

TPC Benchmark™ E
Full Disclosure Report for



PRIMERGY TX300 S4

Using

**Microsoft SQL Server 2008
Enterprise x64 Edition**

Using

**Microsoft Windows Server 2008
Enterprise x64 Edition**

TPC-E Version 1.5.0

Submitted for Review

May 30, 2008

First Edition May 2008

Fujitsu Siemens Computers GmbH believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. We assume no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, we provide no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark™ E should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. We do not warrant or represent that a user can or will achieve similar performance expressed in transactions per second (tpsE) or normalized price/performance (\$/tpsE). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright © 2008 Fujitsu Siemens Computers GmbH. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text on the title page of each item reproduced.

PRIMERGY TX300 S4 and PRIMERGY RX300 S4 are trademarks of Fujitsu Siemens Computers GmbH.

Microsoft Windows Server 2008, Microsoft SQL Server 2008 and BenchCraft are registered trademarks of Microsoft Corporation.

Intel® Xeon® Processor is a registered trademark of Intel.

TPC Benchmark™ is a trademark of the Transaction Processing Performance Council (TPC).

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Abstract


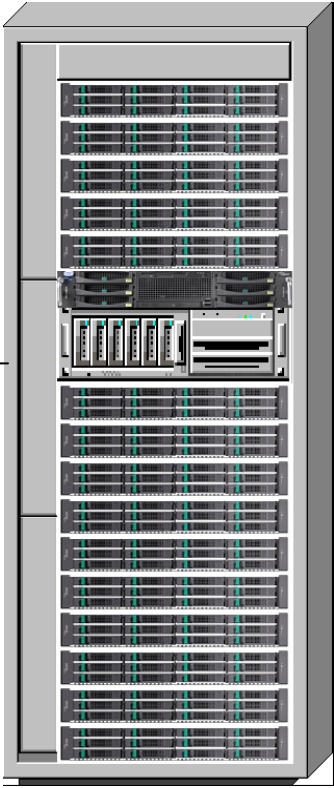
This report documents the TPC Benchmark™ E results achieved by the Fujitsu Siemens Computers GmbH using Microsoft SQL Server 2008 Enterprise x64 Edition.

The TPC Benchmark™ E tests were run on a PRIMERGY TX300 S4 system using the Microsoft Windows Server 2008 Enterprise x64 Edition operating system.

The results, summarized below, show the number of TPC Benchmark™ E transactions per second (tpsE) and the price per tpsE (\$/tpsE).

| Hardware | Software | Total System Cost | tpsE | \$ USD/tpsE | Availability Date |
|---|--|-------------------|--------|---------------|-------------------|
| Fujitsu Siemens Computers GmbH PRIMERGY TX300 S4 | Microsoft SQL Server 2008 Enterprise x64 Edition Microsoft Windows Server 2008 Enterprise x64 Edition | \$ 166,181 USD | 317.45 | \$ 523.49 USD | August 30, 2008 |

The benchmark implementation and results were audited by Francois Raab from InfoSizing Inc. (www.sizing.com). The auditor's attestation letter is contained in Section 8 of this report.

| | | | | | | | |
|--|--|---|--|---|-------------------------------|--|--|
|  | | PRIMERGY TX300 S4 | | TPC-E 1.5.0 TPC Pricing 1.3.0 Report Date May 30, 2008 | | | |
| TPC-E Throughput 317.45 tpsE | | Price/Performance \$ 523.49 USD per tpsE | | Availability Date August 30, 2008 | | Total System Cost \$ 166,181 | |
| Database Server Configuration | | | | | | | |
| Operating System Microsoft Windows Server 2008 Enterprise x64 Edition | | Database Manager Microsoft SQL Server 2008 Enterprise x64 Edition | | Processors/Cores/Threads 2/8/8 | | Memory 64 GB | |
| <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;"> <p style="text-align: center;">SUT</p>  </div> <div style="width: 65%; border: 1px solid black; padding: 10px;"> <p>Tier A PRIMERGY RX300 S4 1x Intel Xeon E5405 2.00 GHz 4 GB of Memory 1x 250 GB SATA Drive Onboard 1 Gb/s Dual Port LAN 1 Gb/s</p> <p>Tier B PRIMERGY TX300 S4 2x Intel Xeon X5460 3.16 GHz 64 GB Memory 2x 73 GB 10K SAS Drives 6x 73 GB 15K SAS Drives Onboard RAID 3x RAID</p> <p>Storage PRIMECENTER Rack 15x PRIMERGY SX40 180x 73 GB 15K SAS Drives</p> </div> </div> | | | | | | | |
| Initial Database Size 1,233 GB | | Redundancy Level 1 RAID-10 | | | Storage 188 x 73 GB | | |

| Description | Part Number | Price Source | Unit Price | Qty | Extended Price | 3-yr. Maint. Price |
|--|--------------------|--------------|------------|-----------------|----------------|--------------------|
| Database Server Hardware | | | | | | |
| FSCT3S4_S26361-K1159-V301_66824-04 | | 1 | 15,102.80 | 1 | 15,102.80 | |
| PY TX300S4r/standard PSU | S26361-K1159-V301 | | | 1 | | |
| Xeon DP X5460 3.16 GHz 2x6MB 1333MHz | S26361-F3340-E316 | | | 2 | | |
| Memory Board 2 for TX300 S4 | S26361-F3263-E300 | | | 1 | | |
| 8GB 2x4GB FBD667 PC2-5300F d ECC | S26361-F3263-E524 | | | 8 | | |
| Conversion kit for 2.5" HD Basic Unit | S26361-F2826-E133 | | | 1 | | |
| F-D-L-Box1 | S26361-F2826-E301 | | | 1 | | |
| CD-RW/DVD slimline SATA | S26361-F3268-E1 | | | 1 | | |
| HD SAS 3Gb/s 73GB 10k hot plug 2.5" | S26361-F3208-E173 | | | 2 | | |
| HD SAS 3Gb/s 73GB 15k hot plug 2.5" | S26361-F3208-E573 | | | 6 | | |
| RAID 5/6 SAS based on LSI MegaRAID 256MB | S26361-F3257-E256 | | | 1 | | |
| RAID Contr BBU Upgrade for RAID 5/6 V70 | S26361-F3257-E70 | | | 1 | | |
| Rack installation ex works | SNP-SY-F1647E301-P | | | 1 | | |
| RMK-F2_TX300-S4 | S26361-F2735-E103 | | | 1 | | |
| Cable magnt. for 19" DC- PC- Rack | S26361-F2735-E7 | | | 1 | | |
| RAID 5/6 SAS based on LSI MegaRAID 512MB 2x External | S26361-F3890-L501 | 1 | 479.40 | 3 | 1,438.20 | |
| SCENICVIEW A17-3 | S26361-K1146-V150 | 1 | 226.10 | 1 | 226.10 | |
| KB SLIM MF USA | S26381-K370-V510 | 1 | 24.65 | 1 | 24.65 | |
| Optical Wheelmouse USB silver | S26381-K355-L400 | 1 | 15.30 | 1 | 15.30 | |
| PYT3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp (Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | PYT3S4-U004361-ONA | 1 | 854.10 | 1 | | 854.10 |
| | | | | Subtotal | 16,807.05 | 854.10 |
| Server Storage | | | | | | |
| FSC_S26361-K826-V103_66824-01 | | 1 | 2,316.25 | 1 | 2,316.25 | |
| PRIMECENTER Rack 38 U, 1000 deep | S26361-K826-V103 | | | 1 | | |
| Dummy panel, platics, 2U + assembly | S26361-F2735-E131 | | | 4 | | |
| Socket strip 3phase 3x 8 sockets | S26361-F2262-E31 | | | 2 | | |
| FSC_S26361-K1122-V200_66824-02 | | 1 | 4,399.60 | 15 | 65,994.00 | |
| FibreCAT SX40 SAS Disk Subsystem | S26361-K1122-V200 | | | 15 | | |
| HD SAS 3Gb/s 73GB 15k hot pl 3.5" SX40 | S26361-F3244-E573 | | | 180 | | |
| Rack installation ex works, SX10, 1U Nod | S26361-F1647-E302 | | | 15 | | |
| PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp (Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | PYSX40-U004361-ONA | 1 | 1,644.30 | 15 | | 24,664.50 |
| SAS cable external 2 m | S26361-F3246-L20 | 1 | 80.75 | 6 | 484.50 | |
| SAS cable external 0.5 m | S26361-F3246-L5 | 1 | 59.50 | 9 | 535.50 | |
| | | | | Subtotal | 69,330.25 | 24,664.50 |
| Server Software | | | | | | |
| SQL Server 2008 Enterprise x64 Edition Per Processor License | n/a | 2 | 23,911.00 | 2 | 47,822.00 | |
| Windows Server 2008 Enterprise Edition (x64) | P72-03195 | 2 | 2,357.00 | 1 | 2,357.00 | |
| Microsoft Problem Resolution Services | n/a | 2 | 245.00 | 1 | | 245.00 |
| | | | | Subtotal | 50,179.00 | 245.00 |
| Tier A Client Hardware | | | | | | |
| FSCR3S4_S26361-K1151-V101_66824-03 | | 1 | 2,035.75 | 1 | 2,035.75 | |
| PY RX300S4 6x3.5 | S26361-K1151-V101 | | | 1 | | |
| Xeon DP E5405 2.00 GHz 2x6MB 1333MHz | S26361-F3882-E200 | | | 1 | | |
| 2GB 2x1GB FBD667 PC2-5300F d ECC | S26361-F3263-E522 | | | 2 | | |
| CD-RW/DVD slimline SATA | S26361-F3268-E1 | | | 1 | | |
| HD SATA 3Gb/s 250GB 7.2k hot plug 3.5" | S26361-F3265-E250 | | | 1 | | |
| RAID 0/1 SAS based on LSI MegaRAID 8Port | S26361-F3257-E8 | | | 1 | | |
| Rack installation ex works | SNP-SY-F1647E301-P | | | 1 | | |
| RMK-P_1-2U servers (new) | S26361-F2735-E110 | | | 1 | | |
| Eth Ctr 1-2x1Gbit PCIe PRO/1000PT Cu Ip | S26361-F3228-L201 | 1 | 183.60 | 1 | 183.60 | |
| SCENICVIEW A17-3 | S26361-K1146-V150 | 1 | 226.10 | 1 | 226.10 | |
| KB SLIM MF USA | S26381-K370-V510 | 1 | 24.65 | 1 | 24.65 | |
| Optical Wheelmouse USB silver | S26381-K355-L400 | 1 | 15.30 | 1 | 15.30 | |
| PYR3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp (Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | PYR3S4-U004361-ONA | 1 | 854.10 | 1 | | 854.10 |
| | | | | Subtotal | 2,485.40 | 854.10 |
| Tier A Client Software | | | | | | |
| Windows Server 2003 R2 Standard x64 Edition | P73-01664 | 2 | 719.00 | 1 | 719.00 | |
| Infrastructure or Connectivity | | | | | | |
| LAN_crossover-Cat 5e, l=5m | S26361-F3482-L5 | 1 | 21.25 | 2 | 42.50 | |
| | | | | Total | 139,563.20 | 26,617.70 |

| | | |
|---|---|-----------|
| Notes: | Three-Year Cost of Ownership USD | \$166,181 |
| Price Source: 1=Fujitsu Computer Systems Corporation, 2=Microsoft Corporation | TPC-E Throughput | 317.45 |
| | \$ USD/tpsE | \$523.49 |

The benchmark results and test methodology were audited by Francois Raab of InfoSizing Inc. (www.sizing.com)

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing section of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.

Numerical Quantities Summary

| | | | | |
|--|--------------------------|------------------------------|------------------|----------------|
| Reported Throughput: | 317.45 tpsE | Configured Customers: | 160,000 | |
| Response Times (in seconds) | Minimum | Average | 90th%tile | Maximum |
| Broker Volume | 0.00 | 0.03 | 0.05 | 0.16 |
| Customer Position | 0.00 | 0.03 | 0.05 | 0.61 |
| Market Feed | 0.00 | 0.03 | 0.07 | 0.30 |
| Market Watch | 0.00 | 0.02 | 0.05 | 0.73 |
| Security Detail | 0.00 | 0.01 | 0.03 | 0.65 |
| Trade Lookup | 0.00 | 0.52 | 0.70 | 1.13 |
| Trade Order | 0.00 | 0.08 | 0.13 | 0.66 |
| Trade Result | 0.00 | 0.08 | 0.14 | 3.00 |
| Trade Status | 0.00 | 0.02 | 0.04 | 0.62 |
| Trade Update | 0.01 | 0.62 | 0.75 | 4.10 |
| Data Maintenance | 0.01 | 0.09 | N/A | 0.72 |
| Transaction Mix | Transaction Count | | Mix % | |
| Broker Volume | 1,119,936 | | 4.900% | |
| Customer Position | 2,971,416 | | 13.001% | |
| Market Feed | 228,571 | | 1.000% | |
| Market Watch | 4,113,702 | | 17.999% | |
| Security Detail | 3,199,821 | | 14.000% | |
| Trade Lookup | 1,828,234 | | 7.999% | |
| Trade Order | 2,308,430 | | 10.100% | |
| Trade Result | 2,285,688 | | 10.001% | |
| Trade Status | 4,342,414 | | 19.000% | |
| Trade Update | 457,068 | | 2.000% | |
| Data Maintenance | 120 | | N/A | |
| Test Duration and Timings | | | | |
| Ramp-up Time (hh:mm:ss) | 00:22:28 | | | |
| Measurement Interval (hh:mm:ss) | 02:00:00 | | | |
| Business Recovery Time (hh:mm:ss) | 00:41:53 | | | |
| Total Number of Transactions Completed in Measurement Interval | 22,855,280 | | | |

Table of Contents

| | |
|--|-----------|
| ABSTRACT | 3 |
| CLAUSE 0: PREAMBLE..... | 9 |
| Introduction | 9 |
| Goal of the TPC-E Benchmark | 9 |
| Restrictions and Limitations..... | 10 |
| CLAUSE 1: OVERVIEW..... | 11 |
| Order and Titles | 11 |
| Executive Summary Statement | 11 |
| Benchmark Sponsor | 11 |
| Configuration Diagram..... | 12 |
| Hardware Configuration..... | 12 |
| Software Configuration | 13 |
| CLAUSE 2: DATABASE DESIGN, SCALING AND POPULATION | 14 |
| Database Creation..... | 14 |
| Partitioning..... | 14 |
| Replication and Duplicated Attributes..... | 14 |
| Cardinality of Tables | 15 |
| Distribution of Tables, Partitions and Logs | 16 |
| Database Interface, Data Model and Load Methodology | 17 |
| CLAUSE 3: TRANSACTIONS | 18 |
| Vendor-Supplied Code | 18 |
| Database Footprint Requirements..... | 18 |
| CLAUSE 4: SUT, DRIVER AND NETWORK..... | 19 |
| Network Configuration | 19 |
| CLAUSE 5: EGEN..... | 20 |
| EGen Version | 20 |
| EGen Code | 20 |
| EGen Modifications..... | 20 |
| CLAUSE 6: PERFORMANCE METRICS AND RESPONSE TIME..... | 21 |
| EGen Driver | 21 |
| Measured Throughput | 21 |
| Test Run Graph | 21 |
| Steady State | 22 |
| Work Performed During Steady State | 22 |
| Transaction Input Parameter Averages..... | 23 |
| CLAUSE 7: TRANSACTION AND SYSTEM PROPERTIES..... | 24 |
| ACID Tests | 24 |
| Redundancy Level and Data Accessibility..... | 24 |
| Business Recovery | 25 |
| CLAUSE 8: PRICING RELATED ITEMS..... | 27 |
| 60-Day Space | 27 |
| Attestation Letter..... | 28 |
| CLAUSE 9: SUPPORTING FILES..... | 30 |

| | |
|--|-----------|
| Supporting Files Index table | 30 |
| APPENDIX: THIRD PARTY PRICE QUOTATIONS..... | 34 |

Clause 0: Preamble

Introduction

TPC Benchmark™ E (TPC-E) is an On-Line Transaction Processing (OLTP) workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. The database schema, data population, transactions, and implementation rules have been designed to be broadly representative of modern OLTP systems. The benchmark exercises a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity; Moderate system and application execution time;
- A balanced mixture of disk input/output and processor usage; Transaction integrity (ACID properties);
- A mixture of uniform and non-uniform data access through primary and secondary keys;
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships with realistic content;
- Contention on data access and update.

The TPC-E operations are modelled as follows: The database is continuously available 24 hours a day, 7 days a week, for data processing from multiple Sessions and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance Sessions. Due to the worldwide nature of the application modelled by the TPC-E benchmark, any of the transactions may be executed against the database at anytime, especially in relation to each other.

Goal of the TPC-E Benchmark

The TPC-E benchmark simulates the OLTP workload of a brokerage firm. The focus of the benchmark is the central database that executes transactions related to the firm's customer accounts. In keeping with the goal of measuring the performance characteristics of the database system, the benchmark does not attempt to measure the complex flow of data between multiple application systems that would exist in a real environment.

The mixture and variety of transactions being executed on the benchmark system is designed to capture the characteristic components of a complex system. Different transaction types are defined to simulate the interactions of the firm with its customers as well as its business partners. Different transaction types have varying run-time requirements.

The benchmark defines:

- Two types of transactions to simulate Consumer-to-Business as well as Business-to-Business activities
- Several transactions for each transaction type
- Different execution profiles for each transaction type
- A specific run-time mix for all defined transactions

For example, the database will simultaneously execute transactions generated by systems that interact with customers along with transactions that are generated by systems that interact with financial markets as well as administrative systems. The benchmark system will interact with a set of Driver systems that simulate the various sources of transactions without requiring the benchmark to implement the complex environment.

The Performance Metric reported by TPC-E is a "business throughput" measure of the number of completed Trade-Result transactions processed per second (see Clause 6.7.1). Multiple Transactions are used to simulate the business activity of processing a trade, and each Transaction is subject to a Response Time constraint. The Performance Metric for the benchmark is expressed in transactions-per-second-E (tpsE). To be compliant with the TPC-E standard, all references to tpsE Results must include the tpsE rate, the associated price-per-tpsE, and the Availability Date of the Priced Configuration (See Clause 6.7.3 for more detail).

Although this specification defines the implementation in terms of a relational data model, the database may be implemented using any commercially available Database Management System (DBMS), Database Server, file

system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-E uses terminology and metrics that are similar to other benchmarks, originated by the TPC and others. Such similarity in terminology does not imply that TPC-E Results are comparable to other benchmarks. The only benchmark Results comparable to TPC-E are other TPC-E Results that conform to a comparable version of the TPC-E specification.

Restrictions and Limitations

Despite the fact that this benchmark offers a rich environment that represents many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the Results reported by a vendor is highly dependent on how closely TPC-E approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark Results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary because of these and other factors. Therefore, TPC-E should not be used as a substitute for specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Benchmark Sponsors are permitted various possible implementation designs, insofar as they adhere to the model described and pictorially illustrated in this specification. A Full Disclosure Report (FDR) of the implementation details, as specified in Clause 9.1, must be made available along with the reported Results.

Clause 1: Overview

Order and Titles

The order and titles of sections in the Report and Supporting Files must correspond with the order and titles of sections from the TPC-E Standard Specification (i.e., this document). The intent is to make it as easy as possible for readers to compare and contrast material in different Reports (9.1.1.1).

The order and titles in this report correspond to those in the TPC-E specification.

Executive Summary Statement

The TPC Executive Summary Statement must be included near the beginning of the Report (9.2).

The Executive summary has been included near the beginning of this FDR.

Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided (9.3.1.1).


Fujitsu Siemens Computers GmbH is the sponsor of this TPC Benchmark™ E result.

Configuration Diagram

Diagrams of both measured and Priced Configurations must be reported in the Report, accompanied by a description of the differences (9.3.1.2).

The measured and priced configurations are shown in the following figures. There are no differences between both configurations.

Figure 1-1: Measured and Priced Configuration

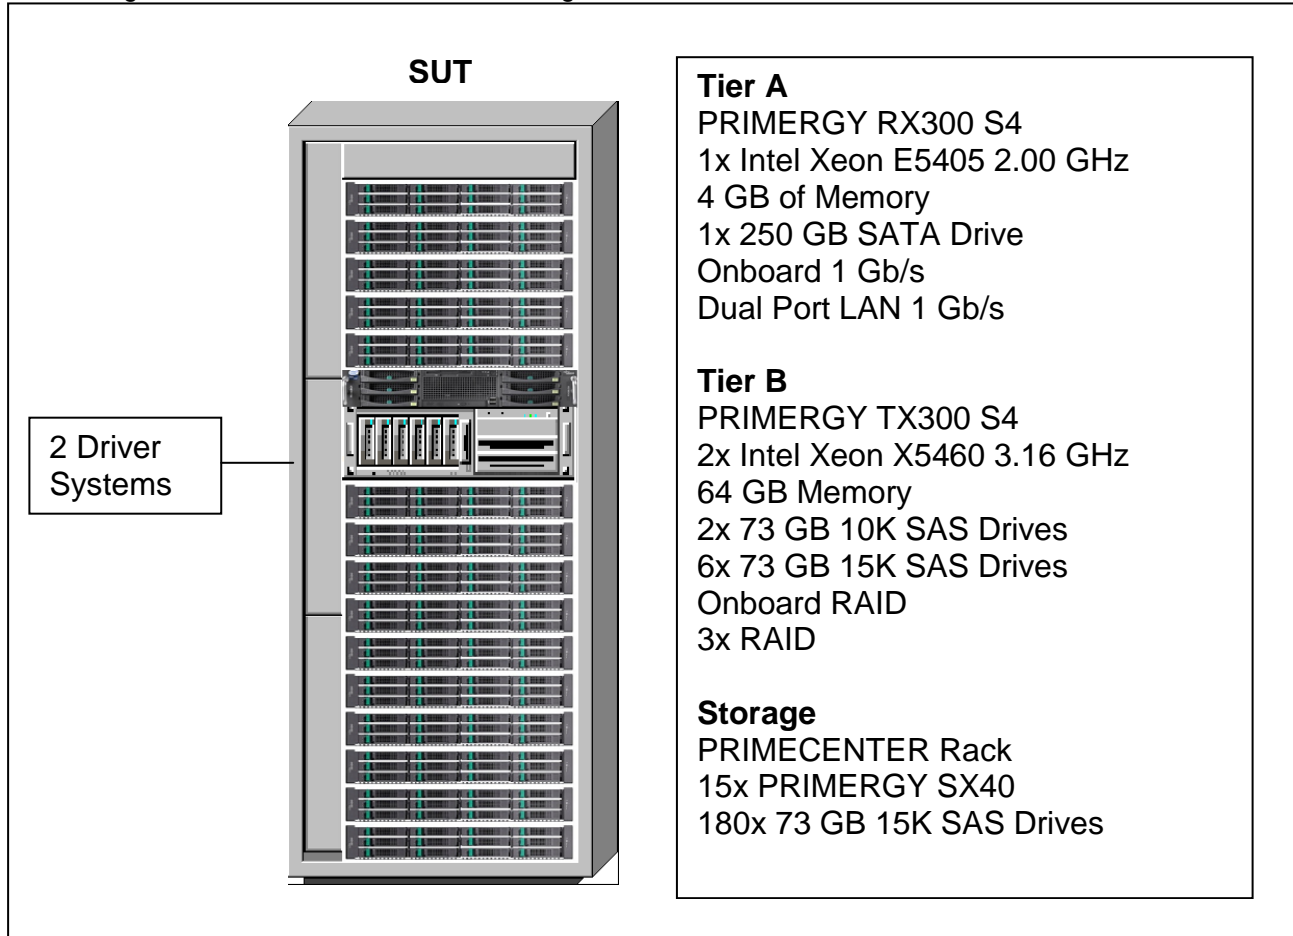

Hardware Configuration

A description of the steps taken to configure all the hardware must be reported in the Report (9.3.1.4).

Driver

The driver systems are not part of the System Under Test (SUT) and priced configuration. Two systems are used and connected with 1 GbE and a 1 GbE Ethernet switch with system Tier A. There is one LAN segment for this connection.

Tier A

The Tier A server is a Fujitsu Siemens Computers PRIMERGY RX300 S4 with one Intel Xeon E5405 Quad-Core Processor and 4 GB of memory. One 250 GB SATA disk drive is connected to the onboard controller. A 1 GbE dual port Ethernet LAN card is plugged in a PCI-E slot. Each of the two ports is directly connected with one of the 1 GbE

Ethernet onboard LAN ports of Tier B using a LAN crossover cable. There are two LAN segments for these connections

Tier B

The Tier B or database server is a Fujitsu Siemens Computers PRIMERGY TX300 S4 with two Intel Xeon X5460 Quad-Core Processors and 64 GB memory. Eight of the twelve 2.5" disk bays are used with 2x SAS 73GB 10K disk drives 2.5" RAID1 for OS and database and 6x SAS 73GB 15K disk drives 2.5" RAID10 for database log. All drives are connected to a RAID 5/6 SAS based on LSI MegaRAID 256MB controller and configured with the MegaRAID BIOS Configuration Utility (enter with <CTRL>H at boot). Three SAS RAID controllers RAID 5/6 SAS based on LSI MegaRAID 512MB 2x External are used to connect the 180 external disk drives to the server. The LAN connection of the two onboard 1 GbE is described above.

Storage

15 Fujitsu Siemens Computers PRIMERGY SX40 are used, each with 12x SAS 73GB 15K disk drives 3.5". Two or three enclosures are linked and connected to the RAID 5/6 SAS based on LSI MegaRAID 512MB 2x External. Each controller has one external chain with 3x SX40 and one external chain with 2x SX40. The disk configuration can be done with the MegaRAID BIOS Configuration Utility or ServerView RAID Manager, which is shipped on ServerStart DVD together with the Server.

Software Configuration

A description of the steps taken to configure all the software must be reported in the Report (9.3.1.5).

The default installation of the operating system was executed on Tier A and B as well as the installation of the database SW on Tier B. Information about changes to the software, settings and BenchCraft can be found in the SupportingFiles directory Introduction - Software.

Clause 2: Database Design, Scaling and Population

Database Creation

A description of the steps taken to create the database for the Reported Throughput must be reported in the Report (9.3.2).

The physical organization of tables and indices, within the database, must be reported in the Report. (9.3.2.1)

The database has been created for 160,000 customers. The SQL Server scripts and setup command files are included in the SupportingFiles\Clause2 folder. Two file groups are used for tables and indices. The distribution is shown in table 2-1.

Partitioning

While few restrictions are placed upon horizontal or vertical partitioning of tables and rows in the TPC-E benchmark (see Clause 2.3.3), any such partitioning must be reported in the Report.(9.3.2.2)

There is no partitioning implemented in this configuration.

Replication and Duplicated Attributes

Replication of tables, if used, must be reported in the Report (9.3.2.3).

Additional and/or duplicated attributes in any table must be reported in the Report along with a statement on the impact on performance (9.3.2.4).

There is no replication implemented in this configuration.

No duplications or additional attributes were used.

Cardinality of Tables

The cardinality (e.g. the number of rows) of each table, as it existed after database load (see Clause 2.6), must be reported in the Report (9.3.2.5).

The database was configured for 160,000 customers. The cardinality of the tables after database load is as shown in the following table 2-1.

Table 2-1: Table Cardinality and Filegroups

| Table | Cardinality after database load | Filegroup |
|--------------------|---------------------------------|-----------|
| ACCOUNT_PERMISSION | 1136641 | 2 |
| ADDRESS | 240004 | 2 |
| BROKER | 1600 | 2 |
| CASH_TRANSACTION | 2543598631 | 1 |
| CHARGE | 15 | 2 |
| COMMISSION_RATE | 240 | 2 |
| COMPANY | 80000 | 2 |
| COMPANY_COMPETITOR | 240000 | 2 |
| CUSTOMER | 160000 | 2 |
| CUSTOMER_ACCOUNT | 800000 | 2 |
| CUSTOMER_TAXRATE | 320000 | 2 |
| DAILY_MARKET | 143028000 | 2 |
| EXCHANGE | 4 | 2 |
| FINANCIAL | 1600000 | 2 |
| HOLDING | 141541573 | 2 |
| HOLDING_HISTORY | 3705338545 | 2 |
| HOLDING_SUMMARY | 7962634 | 2 |
| INDUSTRY | 102 | 2 |
| LAST_TRADE | 109600 | 2 |
| NEWS_ITEM | 160000 | 2 |
| NEWS_XREF | 160000 | 2 |
| SECTOR | 12 | 2 |
| SECURITY | 109600 | 2 |
| SETTLEMENT | 2764800000 | 1 |
| STATUS_TYPE | 5 | 2 |
| TAXRATE | 320 | 2 |
| TRADE | 2764800000 | 1 |
| TRADE_HISTORY | 6635553316 | 1 |
| TRADE_REQUEST | 0 | 2 |
| TRADE_TYPE | 5 | 2 |
| WATCH_ITEM | 16067081 | 2 |
| WATCH_LIST | 160000 | 2 |
| ZIP_CODE | 14741 | 2 |

Distribution of Tables, Partitions and Logs

The distribution of tables, partitions and logs across all media must be explicitly depicted for the measured and Priced Configurations (9.3.2.6).

Table 2-2: Disk Configuration

| HBA | Disk | Drives | Partition | Size | Use |
|-----|-------------|--------------------------|------------------------------------|---------------------------------------|--------------------------------------|
| 0 | 0 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst1 C:\jp\else1 E:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup1 |
| | 1 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst2 C:\jp\else2 F:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup2 |
| | 2 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst3 C:\jp\else3 G:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 n/a |
| | 3 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst4 C:\jp\else4 H:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup3 |
| | 4 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst5 C:\jp\else5 I:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup4 |
| 1 | 5 – onboard | 2x73GB, 10K SAS, RAID10 | C:\ | ~69,500 MB | OS, DB |
| | 6 – onboard | 6x73GB, 15K SAS, RAID10 | L:\ | ~208,500 MB | DB Log |
| 2 | 7 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst6 C:\jp\else6 J:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup5 |
| | 8 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst7 C:\jp\else7 K:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup6 |
| | 9 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst8 C:\jp\else8 M:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 n/a |
| | 10 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst9 C:\jp\else9 N:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup7 |
| | 11 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst10 C:\jp\else10 O:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup8 |
| 3 | 12 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst11 C:\jp\els11 P:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup9 |
| | 13 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst12 C:\jp\else12 Q:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup10 |
| | 14 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst13 C:\jp\else13 R:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 n/a |
| | 15 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst14 C:\jp\else14 S:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup11 |
| | 16 – SX40 | 12x73GB, 15K SAS, RAID10 | C:\jp\cst15 C:\jp\else15 T:\ | 90,000 MB 30,000 MB ~292,000 MB | Filegroup1 Filegroup2 Backup12 |

Database Interface, Data Model and Load Methodology

A statement must be provided in the Report that describes:

The Database Interface (e.g., embedded, call level) and access language (e.g., SQL, COBOL read/write) used to implement the TPC-E Transactions. If more than one interface / access language is used to implement TPC-E, each interface / access language must be described and a list of which interface /access language is used with which Transaction type must be reported.

The data model implemented by the DBMS (e.g., relational, network, hierarchical) (9.3.2.7).

The methodology used to load the database must be reported in the Report (9.3.2.8).

Microsoft SQL Server 2008 Enterprise x64 Edition is a relational database. The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C++ code using the Microsoft ODBC interface.

The methodology used to load the database is described in Clause2 of the SupportingFiles directory.

Clause 3: Transactions

Vendor-Supplied Code

A statement that vendor-supplied code is functionally equivalent to Pseudo-code in the specification (see Clause 3.2.1.6) must be reported in the Report (9.3.3.1).

The vendor supplied code is functionally equivalent to the pseudo-code.

Database Footprint Requirements

A statement that the database footprint requirements (as described in Clause 3.3) were met must be reported in the Report (9.3.3.2).

Database footprint requirements were met as described in the specification.

Clause 4: SUT, Driver and Network

Network Configuration

The Network configurations of both the measured and Priced Configurations must be described and reported in the Report. This includes the mandatory Network between the Driver and Tier A (see Clause 4.2.2) and any optional Database Server interface networks (9.3.4.2):

Figure 1-1 shows the configuration of the measured and priced configurations. Both are identical. Tier B system PRIMERGY TX300 S4 has an onboard Ethernet controller with two 1Gb/s ports. Tier A system PRIMERGY RX300 S4 has an onboard Ethernet controller with two 1Gb/s ports and was extended with a two port 1Gb/s Ethernet controller card. These two ports of the tier A card were directly connected with the two onboard port of tier B using different LAN segments. One of the onboard ports of tier A and the two driver systems were connected via 1Gb/s switch.

Clause 5: EGen

EGen Version

The version of EGen used in the benchmark must be reported (9.3.5.1).

The EGen version used was 1.5.0

EGen Code

A statement that all required TPC-provided EGen code was used in the benchmark must be reported (9.3.5.2).

All the required TPC-provided code was used in the benchmark.

EGen Modifications

If the Test Sponsor modified EGen, a statement EGen has been modified must be reported in the Report. All formal waivers from the TPC documenting the allowed changes to EGen must also be reported in the Report (see Clause 5.3.7.1). If any of the changes to EGen do not have a formal waiver that must also be reported (9.3.5.3).

If the Test Sponsor extended EGenLoader (as described in Appendix A.6), the use of the extended EGenLoader and the audit of the extension code by an Auditor must be reported (9.3.5.4).

There were no modifications to the EGen and EGenLoader was not extended for this benchmark.

Clause 6: Performance Metrics and Response time

EGen Driver

The number of EGenDriverMEE and EGenDriverCE instances used in the benchmark must be reported in the Report (see Clause 6.2.5) (9.3.1.1).

Two driver systems were used, each configured to drive one EGenDriverMEE and one EGenDriverCE. Tier A system run two EGenDriverMEE and two EGenDriverCE.

Measured Throughput


The Measured Throughput must be reported in the Report (see Clause 6.7.1.2) (9.3.6.2).

The measured throughput was 317.45 tpsE.

Test Run Graph

A Test Run Graph of throughput versus elapsed wall clock time must be reported in the Report for the Trade-Result Transaction (see Clause 6.7.2) (9.3.6.3).

Figure 6-1: Test Run Graph

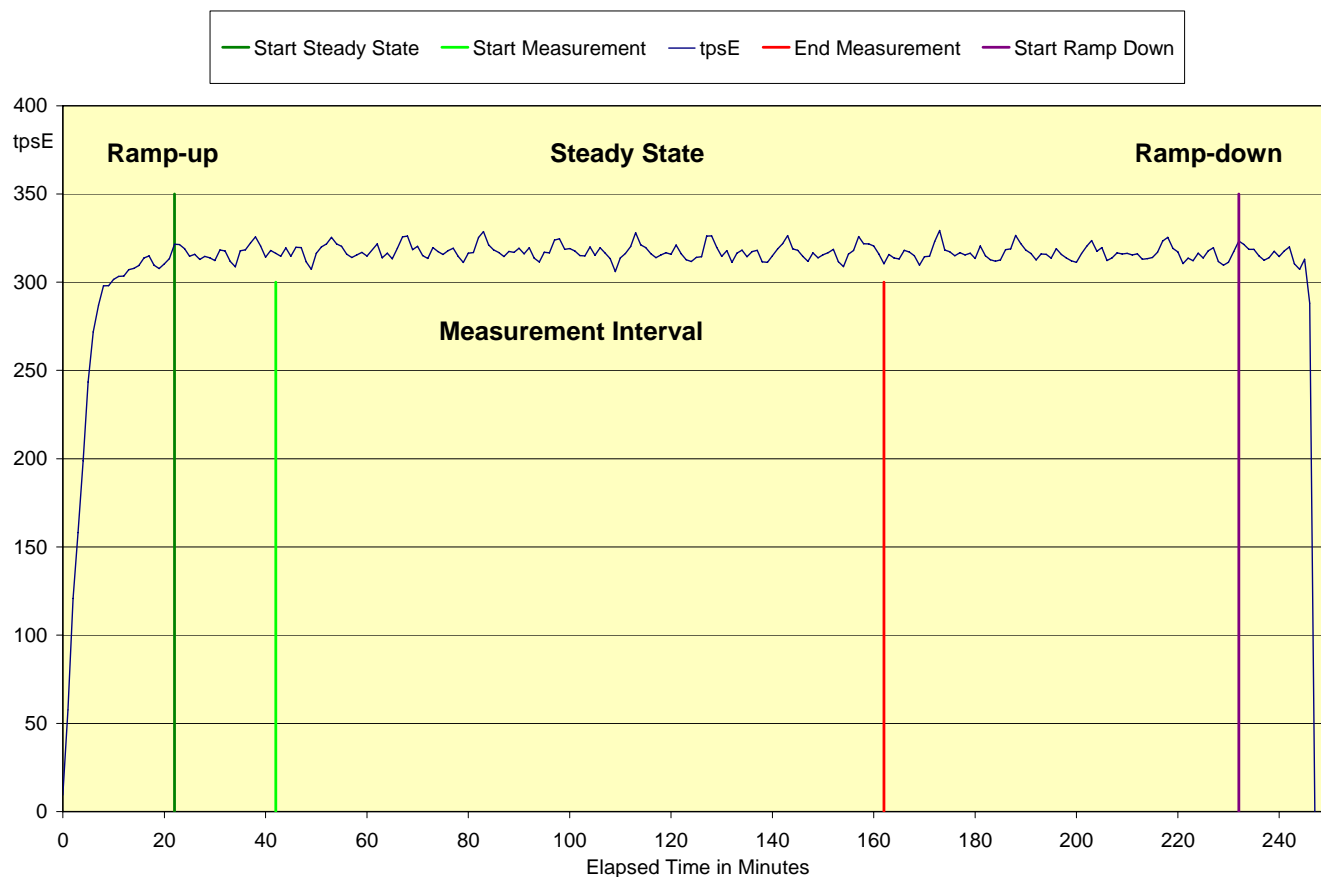

Steady State

The method used to determine that the SUT had reached a Steady State prior to commencing the Measurement Interval must be reported in the Report (9.3.6.4).

During the run the tpsE throughput was observed to determine steady state. After the run steady state was confirmed by:

1. Looked at the Test Run Graph and verified that tpsE was steady prior to commencing the Measurement Interval.
2. Calculated 60 minute average tpsE during the Steady State moving the time window 10 minutes each time. Then confirmed that the minimum 60 minute average tpsE was not less than 98% of the Reported Throughput, and that the maximum 60 minute average tpsE was not greater than 102% of the Reported Throughput.
3. Calculated 10 minute average tpsE during the Steady State moving the window 1 minute each time. Then confirmed that the minimum 10 minute average tpsE was not less than 80% of the Reported Throughput, and that the maximum 10 minute average tpsE was not greater than 120% of the Reported Throughput.
4. Two completed full checkpoints.

Work Performed During Steady State

A description of how the work normally performed during a Test Run, actually occurred during the Measurement Interval must be reported in the Report (for example checkpointing, writing Undo/Redo Log records, etc.) (9.3.6.5).

The Microsoft SQL Server recovery interval parameter was set to the maximum allowable value to perform checkpoint at specific intervals. Checkpoints were automatically issued at specified intervals (450 seconds) and specified duration (420 seconds). SQL Server was started with trace flag 3502, which caused it to log the occurrence of the checkpoints. This information was used to verify that the checkpoints occurred at the appropriate times and duration during steady state.

Transaction Input Parameter Averages

The recorded averages over the Measurement Interval for each of the Transaction input parameters specified by clause 6.4.1 must be reported (9.3.6.6).

Table 6-2: Transaction Input Parameter Averages.

| Transaction | Parameter | Range Min | Range Max | Value | Check |
|-------------------|---------------------|-----------|-----------|--------|-------|
| Customer Position | By Tax ID | 48.00% | 52.00% | 50.00% | Ok |
| | Get History | 48.00% | 52.00% | 49.96% | Ok |
| | Overall | | | | Ok |
| Market Watch | By Watch List | 57.00% | 63.00% | 59.99% | Ok |
| | By Customer Account | 33.00% | 37.00% | 35.00% | Ok |
| | By Industry | 4.50% | 5.50% | 5.01% | Ok |
| | Overall | | | | Ok |
| Security Detail | Access LOB | 0.90% | 1.10% | 1.00% | Ok |
| | Overall | | | | Ok |
| Trade Lookup | Frame 1 | 28.50% | 31.50% | 29.98% | Ok |
| | Frame 2 | 28.50% | 31.50% | 29.97% | Ok |
| | Frame 3 | 28.50% | 31.50% | 30.01% | Ok |
| | Frame 4 | 9.50% | 10.50% | 10.04% | Ok |
| | Overall | | | | Ok |
| Trade Update | Frame 1 | 31.00% | 35.00% | 33.13% | Ok |
| | Frame 2 | 31.00% | 35.00% | 32.96% | Ok |
| | Frame 3 | 32.00% | 36.00% | 33.91% | Ok |
| | Overall | | | | Ok |
| Trade Order | By Non-Owner | 9.50% | 10.50% | 10.03% | Ok |
| | By Company Name | 38.00% | 42.00% | 40.00% | Ok |
| | Buy On Margin | 7.50% | 8.50% | 8.00% | Ok |
| | Rollback | 0.94% | 1.04% | 1.00% | Ok |
| | LIFO | 33.00% | 37.00% | 34.97% | Ok |
| | Trade Qty 100 | 24.00% | 26.00% | 25.01% | Ok |
| | Trade Qty 200 | 24.00% | 26.00% | 24.97% | Ok |
| | Trade Qty 400 | 24.00% | 26.00% | 24.99% | Ok |
| | Trade Qty 800 | 24.00% | 26.00% | 25.03% | Ok |
| | Market Buy | 29.70% | 30.30% | 30.06% | Ok |
| | Market Sell | 29.70% | 30.30% | 29.94% | Ok |
| | Limit Buy | 19.80% | 20.20% | 19.99% | Ok |
| | Limit Sell | 9.90% | 10.10% | 10.01% | Ok |
| | Stop Loss | 9.90% | 10.10% | 10.00% | Ok |
| Overall | | | | Ok | |

Clause 7: Transaction and System Properties

ACID Tests

The results of the ACID tests must be reported in the Report along with a description of how the ACID requirements were met, and how the ACID tests were run (9.3.7.1).

The TPC Benchmark™ E Standard Specification defines a set of transaction processing system properties that a system under test (SUT) must support during the execution of the benchmark. Those properties are Atomicity, Consistency, Isolation and Durability (ACID). This section quotes the specification definition of each of those properties and describes the tests done as specified and monitored by the auditor, to demonstrate compliance. See also file MSTPCE ACID Procedures.pdf in the SupportingFiles directory.

Redundancy Level and Data Accessibility

The Test Sponsor must report in the Report the Redundancy Level (see Clause 7.5.7.1) and describe the Data Accessibility test(s) used to demonstrate compliance (9.3.7.2).


A Data Accessibility Graph for each run demonstrating a Redundancy Level must be reported in the Report (see Clause 7.5.7.2) (9.3.7.3).

Redundancy Level 1 was used for the storage system. To prove Redundancy Level 1, the following steps were successfully performed on a database data and log disk. The test for Redundancy Level 1 is the test for Permanent Irrecoverable Failure of any single Durable Medium. At different steps screenshots from ServerView RAID are captured to document the various states of the two disks (see SupportingFiles).

1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting Transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes.
3. Induce the failure described for the redundancy level being demonstrated. In this case fail a disk in a database data array and after 5 minutes a disk in the database log array. The transactions continue since RAID10 is used for about 10 minutes.
4. Begin the necessary recovery process, by replacing the failed drives in the database data array and start the rebuild.
5. Begin the necessary recovery process, by replacing the failed drives in the database log array and start the rebuild process.
6. Continue running the Driver until the rebuilds completed.
7. Terminate the run gracefully from the Driver.
8. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
9. Run the evaluation of Trade-Result Transactions executed and compare it with the difference of the SETTLEMENT rows counted.

The Graph in Figure 7-1 show the measured throughput versus time and the different test stated.

Figure 7-1: Redundancy Level and Data Accessibility Graph

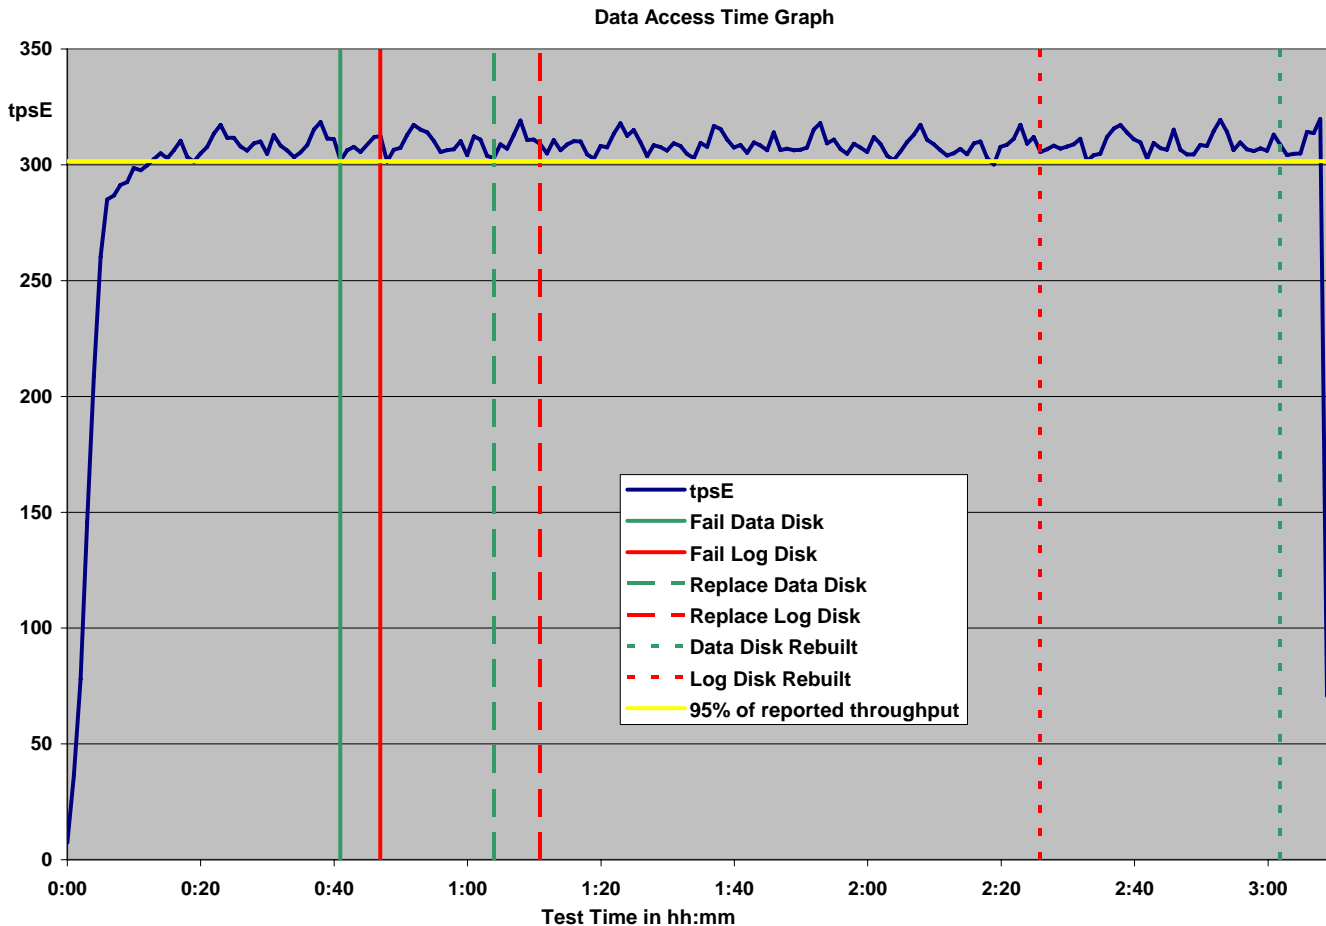

Business Recovery

The Test Sponsor must describe in the Report the test(s) used to demonstrate Business Recovery (9.3.4.7).

The Business Recovery Time must be reported on the Executive Summary Statement and in the Report. If the failures described in Clauses 7.5.2.2, 7.5.2.3 and 7.5.2.4 were not combined into one Durability test (usually powering off the Database Server during the run), then the Business Recovery Time for the failure described for instantaneous interruption is the Business Recovery Time that must be reported in the Executive Summary Statement. All the Business Recovery Times for each test requiring Business Recovery must be reported in the Report (9.3.7.5).

9.3.7.6 The Business Recovery Time Graph (see Clause 7.5.7.4) must be reported in the Report for all Business Recovery tests (9.3.7.6).

The tests for “Instantaneous interrupt,” “Failure of all or part of memory,” and “Loss of external power to the SUT” were combined by power off Tier A and B.


1. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
2. Start submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes.
3. Induce the failures by simultaneously power off Tier A and B.
4. On the driver side the number of MEE connections is captured and after transaction failures is noted by the drivers, terminate the run and collect the data for Pre-Failure Run.
5. Re-power and restart Tier A and B.

6. When restarting the database on Tier B, it automatically starts the recovery and records timestamps. The first timestamp defines the beginning of Business Recovery.
7. After recovery completes start a Trade-Cleanup. Just after finishing this start again submitting transactions and ramp up to the Durability Throughput Requirements (as defined in Clause 7.5.3) and satisfy those requirements for at least 20 minutes. The end of this interval is the end of the Business Recovery.
8. Terminate the run gracefully from the Driver and collect the data for Post-Failure Run.
9. Verify that there are no errors in the Post-Failure run and check the consistency of the database as specified in Clause 7.3.1.1.
10. Determine the current number of completed trades in the database by counting the rows in SETTLEMENT.
11. Run the evaluation of Trade-Result Transactions executed in both runs and compare it with the difference of the SETTLEMENT rows counted. The difference must be less than or equal to the maximum number of Transactions which can be simultaneously in-flight from the Driver to the SUT.

The Business Recovery Time was 00:41:53 (hh:mm:ss).

The Graph in Figure 7-2 shows the measured throughput versus time and the Business Recovery.

Figure 7-2: Business Recovery Graph

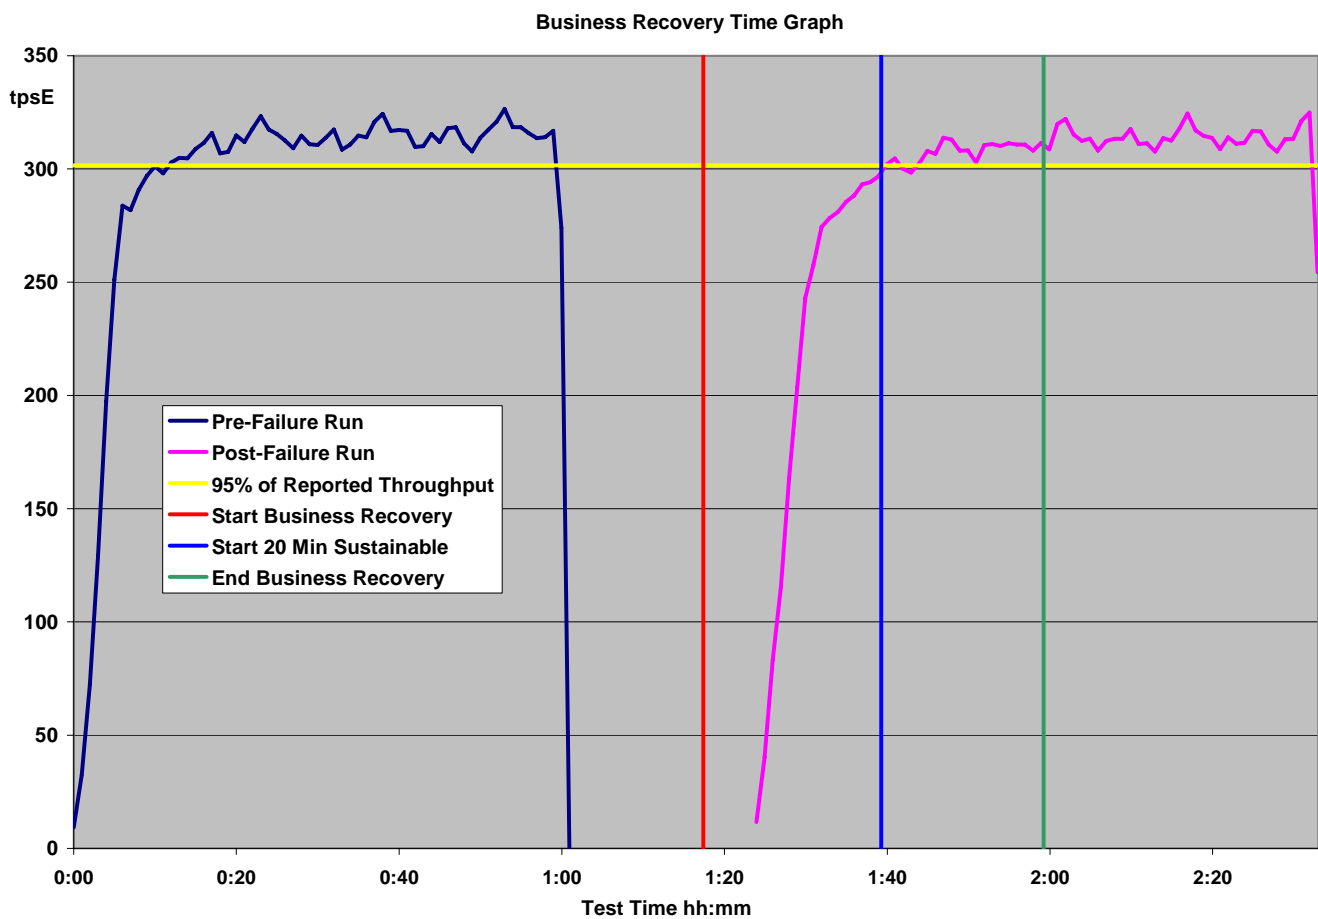

Clause 8: Pricing Related Items

60-Day Space

Details of the 60-Day Space computations (see Clause 8.2.2) along with proof that the database is configured to sustain a Business Day of growth (see Clause 6.6.6.1) must be reported (9.3.8.1).

Table 8-1: Space Requirements

| | | TPC-E Disk Space Requirements | | | | | | | |
|----------------------------|---------------------|-------------------------------|--|-----------------------|---|-------------------------------------|--------------------|-----------|--|
| Customers Used | 160,000 | | | | | | | | |
| Performance | 317.45 | TpsE | settlements after 8 hours (Busines Day) | | | | 9,142,560 | | |
| Table | Initial Rows | Data (KB) | Index size (KB) | Extra 5% (KB) | initial size Total + 5% (KB) | grow size After run (KB) | Growth (KB) | | |
| ACCOUNT_PERMISSION | 1136641 | 113696 | 800 | 5725 | 120221 | 114496 | 0 | | |
| ADDRESS | 240004 | 13848 | 256 | 705 | 14809 | 14160 | 56 | | |
| BROKER | 1600 | 96 | 192 | 14 | 302 | 392 | 104 | | |
| CASH_TRANSACTION | 2543598631 | 250764384 | 528736 | 12564656 | 263857776 | 260308320 | 9015200 | | |
| CHARGE | 15 | 8 | 8 | 1 | 17 | 16 | 0 | | |
| COMMISSION_RATE | 240 | 16 | 16 | 2 | 34 | 32 | 0 | | |
| COMPANY | 80000 | 17376 | 5112 | 1124 | 23612 | 22488 | 0 | | |
| COMPANY_COMPETITOR | 240000 | 6440 | 5504 | 597 | 12541 | 11944 | 0 | | |
| CUSTOMER | 160000 | 27104 | 7168 | 1714 | 35986 | 34320 | 48 | | |
| CUSTOMER_ACCOUNT | 800000 | 74296 | 88776 | | | 163072 | 0 | | |
| CUSTOMER_TAXRATE | 320000 | 6680 | 264 | 347 | 7291 | 7144 | 200 | | |
| DAILY_MARKET | 143028000 | 7292424 | 3055896 | 517416 | 10865736 | 10350264 | 1944 | | |
| EXCHANGE | 4 | 8 | 8 | 1 | 17 | 16 | 0 | | |
| FINANCIAL | 1600000 | 188256 | 760 | 9451 | 198467 | 189408 | 392 | | |
| HOLDING | 141541573 | 7486248 | 5533032 | 650964 | 13670244 | 19565112 | 6545832 | | |
| HOLDING_HISTORY | 3705338545 | 134739608 | 70219864 | 10247974 | 215207446 | 206050128 | 1090656 | | |
| HOLDING_SUMMARY | 7962634 | 267408 | 1200 | 13430 | 282038 | 537896 | 269288 | | |
| INDUSTRY | 102 | 8 | 40 | 2 | 50 | 48 | 0 | | |
| LAST_TRADE | 109600 | 5064 | 264 | 266 | 5594 | 10488 | 5160 | | |
| NEWS_ITEM | 160000 | 17347048 | 448 | | | 17347528 | 32 | | |
| NEWS_XREF | 160000 | 3968 | 256 | 211 | 4435 | 4224 | 0 | | |
| SECTOR | 12 | 8 | 24 | 2 | 34 | 32 | 0 | | |
| SECURITY | 109600 | 17136 | 7736 | 1244 | 26116 | 24872 | 0 | | |
| SETTLEMENT | 2764800000 | 135680464 | 286224 | 6798334 | 142765022 | 144376296 | 8409608 | | |
| STATUS_TYPE | 5 | 8 | 8 | 1 | 17 | 16 | 0 | | |
| TAXRATE | 320 | 24 | 16 | 2 | 42 | 56 | 16 | | |
| TRADE | 2764800000 | 304787496 | 163151288 | 23396939 | 491335723 | 482355360 | 14416576 | | |
| TRADE_HISTORY | 6635553316 | 190266784 | 496784 | 9538178 | 200301746 | 191748816 | 985248 | | |
| TRADE_REQUEST | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| TRADE_TYPE | 5 | 8 | 1032 | 52 | 1092 | 1040 | 0 | | |
| WATCH_ITEM | 16067081 | 434840 | 1768 | 21830 | 458438 | 436984 | 376 | | |
| WATCH_LIST | 160000 | 3968 | 3528 | 375 | 7871 | 7496 | 0 | | |
| ZIP_CODE | 14741 | 488 | 120 | 30 | 638 | 608 | 0 | | |
| | | Initial Database Size | | | | Settlements | | 5,278,750 | |
| | | 1,262,639 (MB) | | | | Grown Database Size | | | |
| | | 1,233 (GB) | | | | 1,302,425 (MB) | | | |
| DB filegroups | partition size (MB) | file size (MB) | alloc total (MB) | loaded (MB) | loaded +5% (MB) | after run (MB) | Business Day (MB) | | |
| 15x filegroup1 | 90,000 | 85,000 | 1,350,000 | 1,021,447 | 1,072,520 | 1,053,505 | 1,076,969 | | |
| 15x filegroup2 | 30,000 | 25,000 | 450,000 | 241,192 | 253,251 | 248,920 | 254,577 | | |
| Initial Growing Space (MB) | 1,234,580 | | | | | | | | |
| Final Growing Space (MB) | 1,274,357 | Data units | 15 | Initial Log Size (MB) | 4,537 | Log units | 1 | | |
| Delta (MB) | 39,778 | Disks per unit | 12 | Final Log Size (MB) | 62,349 | Disks per unit | 6 | | |
| Data Space per Trade (MB) | 0.007535 | Disk Capacity (MB) | 68,664 | Log Growth (MB) | 57,811 | Disk Capacity (MB) | 69,472 | | |
| 1 Day Data Growth (MB) | 68,893 | RAID10 Overhead | 50% | Log Space per Trade | 0.010952 | RAID10 Overhead | 50.0% | | |
| 60 Day Space (MB) | 5,396,236 | Total Space (MB) | 6,179,760 | 1 Day Log Space (MB) | 100,127 | Log Space (MB) | 208,416 | | |

Attestation Letter

The Auditor's Attestation Letter, which indicates compliance, must be included in the Report (9.3.8.2).



Benchmark Sponsors: Detlev Seidel
Primary TPC Representative
Fujitsu Siemens Computer GmbH
Heinz-Nixdorf-Ring 1
33106 Paderborn, Germany

March 29, 2008

I verified the TPC Benchmark™ E performance of the following configuration:

Platform: PRIMERGY TX300 S4
Operating system: Microsoft Windows Server 2008 Enterprise x64 Edition
Database Manager: Microsoft SQL Server 2008 Enterprise x64 Edition

The results were:

| CPU's Speed | Memory | Disks | Trade-Result 90% Response Time | tpsE |
|----------------------------------|--------|---|--------------------------------|--------|
| Tier B: PRIMERGY RX300 S4 | | | | |
| 2 x Intel Xeon X5460 (3.16GHz) | 64 GB | 2 x 73 GB 10K SAS (int.) 6 x 73 GB 15K SAS (int.) 180 x 73 GB 15K SAS | 0.14 Seconds | 317.45 |
| Tier A: PRIMERGY RX300 S4 | | | | |
| 1 x Intel Xeon E5405 (2.0GHz) | 4 GB | 1x 250 GB SATA | n/a | n/a |

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:


- All EGen components were verified to be v1.5.0.
- The transactions were correctly implemented.
- The database was properly scaled and populated for 160,000 Customers.
- The mandatory network between the driver and the SUT was configured.
- The ACID properties were met.

- Input data was generated according to the specified percentages.
- The reported response times were correctly measured.
- All 90% response times were under the specified maximums.
- The measurement interval was representative of steady state conditions.
- The reported measurement interval was 120 minutes.
- The implementation used Redundancy Level 1.
- The Business Recovery Time of 00:41:53 was correctly measured.
- The 60 day storage requirement was correctly computed and configured.
- The system pricing was verified for major components and maintenance.

Additional Audit Notes:

None.

Respectfully Yours,



François Raab, President

Clause 9: Supporting Files

Supporting Files Index table

An index for all files required by Clause 9.4 Supporting Files must be provided in the Report. The Supporting Files index is presented in a tabular format where the columns specify the following:

- The first column denotes the clause in the TPC Specification
- The second column provides a short description of the file contents
- The third column contains the path name for the file starting at the SupportingFiles directory.

If there are no Supporting Files provided then the description column must indicate that there is no supporting file and the path name column must be left blank (9.3.9.1).

| Clause | Description | Path | Filename |
|--------------|--------------------------------------|--|--|
| Introduction | System Configuration | SupportingFiles/Introduction/ | SysInfo_TierA.txt SysInfo_TierB.txt |
| | Disk Configuration | SupportingFiles/Introduction/Hardware/ | DiskConfiguration.doc RAIDConfiguration.xml |
| | Parameter OS Tunables Database Setup | SupportingFiles/Introduction/Software/ | SQL_param.rpt SQL IP Config.reg SQL Node Config.reg SQL Page Config.reg MSTPCE Database Setup Reference.doc |
| | Startup Scripts Tier A | SupportingFiles/Introduction/Software/ | start_CE.cmd start_CE2.cmd start_MEE.cmd start_MEE2.cmd |
| | Startup Scripts Tier B | SupportingFiles/Introduction/Software/ | sqlstart.cmd |
| Clause 2 | Create Database | SupportingFiles/Cause2 | backupdev10.sql Backup_Database.sql Create_Database.sql Create_DM_Audit_Table.sql Create_TID_Ranges_Table.sql Create_Timer_Table.sql Create_TPCE_VERSIONS_Table.sql Database_Options_1.sql Database_Options_2.sql Drop_and_Create_TPCE_INFO.sql End_Load_Timer.sql Get_Next_T_ID.sql Install_Load_Timer_Proc.sql Load_TPCE_Info.sql Remove_Database.sql Restore_Database.sql SQL_Server_Configuration.sql tempdb.sql Trade_Cleanup.cmd Trade_Cleanup.sql Version.sql |
| | Index Creation Scripts | SupportingFiles/Cause2/DDL | Convert_NI_ITEM_Data.SQL Create_Check_Constraints_Fixed.sql Create_Check_Constraints_Growing.sql Create_Check_Constraints_Scaling.sql Create_Clustered_Indexes_Fixed.sql Create_Clustered_Indexes_Growing.sql Create_Clustered_Indexes_Scaling.sql Create_FK_Constraints.sql Create_NC_Indexes_Fixed.sql Create_NC_Indexes_Growing.sql Create_NC_Indexes_Scaling.sql Create_Tables_Fixed.sql Create_Tables_Growing.sql Create_Tables_Scaling.sql Create_Tables_Scaling_Flat.sql Create_TPCE_Types.sql |

| | | | |
|---------|------------------------|---|--|
| | | | Drop_FK_Constraints.sql Drop_Tables_Fixed.sql Drop_Tables_Growing.sql Drop_Tables_Scaling.sql |
| | Database Audit Scripts | SupportingFiles/Cause2/DDL/Audit_Scripts/D atabase | Create_DB_Audit_Tables.SQL DB_Check.sql DB_Primary_Key_Check.SQL DB_Tables.sql Drop_DB_Audit_Tables.SQL Insert_Duplicates_Tests.sql Referential_Integrity_Tests.sql |
| | Database Space Scripts | SupportingFiles/Cause2/DDL/Audit_Scripts/S pace | SPFiles.sql SPLog.sql SPUsed.sql |
| Clause3 | Transaction Frames | SupportingFiles/Cause3 | BrokerVolume.sql CustomerPosition.sql DataMaintenance.sql MarketFeed.sql MarketWatch.sql SecurityDetail.sql TradeLookup.sql TradeOrder.sql TradeResult.sql TradeStatus.sql TradeUpdate.sql |
| | BaseServer | SupportingFiles/Cause3/BaseServer | BaseServer.cpp BaseServer.h BaseServer.vcproj stdafx.cpp stdafx.h SUTServersLocals.h |
| | SUT_CE_Server | SupportingFiles/Cause3/SUT_CE_Server | CEServer.cpp CEServer.h CEServerMain.cpp PortDefinitions.h Release stdafx.cpp stdafx.h SUTServer.sln SUTStructs.h SUT_CE_Server.vcproj |
| | SUT_MEE_Serv er | SupportingFiles/Cause3/SUT_MEE_Server | MEEServer.cpp MEEServer.h MEEServerMain.cpp Release stdafx.cpp stdafx.h SUT_MEE_Server.vcproj |
| | TransactionsSP | SupportingFiles/Cause3/TransactionsSP | BrokerVolumeDB_SP.cpp BrokerVolumeDB_SP.h CheckpointDB_SP.cpp CheckpointDB_SP.h CustomerPositionDB_SP.cpp CustomerPositionDB_SP.h DataMaintenanceDB_SP.cpp DataMaintenanceDB_SP.h MarketFeedDB_SP.cpp MarketFeedDB_SP.h MarketWatchDB_SP.cpp MarketWatchDB_SP.h SecurityDetailDB_SP.cpp SecurityDetailDB_SP.h stdafx.cpp stdafx.h TradeLookupDB_SP.cpp TradeLookupDB_SP.h TradeOrderDB_SP.cpp TradeOrderDB_SP.h TradeResultDB_SP.cpp TradeResultDB_SP.h TradeStatusDB_SP.cpp |

| | | | |
|---------|------------------------------|--|--|
| | | | TradeStatusDB_SP.h TradeUpdateDB_SP.cpp TradeUpdateDB_SP.h TransactionsSP.vcproj TxnHarnessDBBase.cpp TxnHarnessDBBase.h TxnHarnessDBConn.cpp TxnHarnessDBConn.h |
| | TxnHarness | SupportingFiles/Cause3/TxnHarness | TxnHarness.vcproj TxnHarnessSendToMarket.cpp TxnHarnessSendToMarket.h TxnHarness_stdafx.cpp TxnHarness_stdafx.h |
| Clause4 | | | |
| Clause5 | EGen Driver Configuration | SupportingFiles/Cause5 | RXTX300S4_160KCus_122_124user_CKPT_new.xml |
| | EGenLoader Parameter | SupportingFiles/Cause5 | BuildSteps.log EGenLoaderFrom10001To120000.log EGenLoaderFrom120001To140000.log EGenLoaderFrom140001To160000.log EGenLoaderFrom1To20000.log EGenLoaderFrom20001To40000.log EGenLoaderFrom40001To60000.log EGenLoaderFrom60001To80000.log EGenLoaderFrom80001To100000.log |
| | EGenLogger Output | SupportingFiles/Cause5 | TxnReportE_MI.xls |
| Clause6 | EGenValidate | SupportingFiles/Cause6 | EGenValidate.txt |
| Clause7 | ACID | SupportingFiles/Cause7 | MSTPCE ACID Procedures.doc |
| | ACID Procedures | SupportingFiles/Cause7/AcidProcs | AcidProc.cmd AcidProc.out Remove_AcidProcs.cmd |
| | ACID Scripts | SupportingFiles/Cause6/AcidProcs/Scripts | AcidProc.vbs CustomerPosition_Iso3.sql CustomerPosition_Iso4.sql Drop_SPROC.sql Remove_AcidProcs.vbs TradeOrder_C.sql TradeOrder_Iso1_1.sql TradeOrder_Iso1_2.sql TradeOrder_Iso2.sql TradeOrder_Iso3.sql TradeOrder_Iso4.sql TradeOrder_RB.sql TradeResult_Iso1_1.sql TradeResult_Iso1_2.sql TradeResult_Iso2_1.sql TradeResult_Iso2_2.sql TradeResult_Iso3.sql TradeResult_Iso4.sql |
| | Atomicity | SupportingFiles/Cause7/Atomicity | Atomicity.cmd Atomicity_C.out Atomicity_RB.out |
| | | SupportingFiles/Cause7/Atomicity/Scripts | atom.vbs Atomicity_C.sql Atomicity_RB.sql |
| | Consistency | SupportingFiles/Cause7/Consistency | Consistency.cmd Consistency.out |
| | | SupportingFiles/Cause7/Consistency/Scripts | Consistency.sql Consistency.vbs |
| | Durability Business Recovery | SupportingFiles/Cause7/Durability/BusinessRecovery | BR_BenchCraft_Config.xml BR_Consistency.out BR_Count_Settlement1.ver BR_Count_Settlement2.ver BR_ERRORLOG_1.txt BR_ERRORLOG_2.txt BR_Systemevents_TierA.txt BR_Systemevents_TierB.txt BusinessRecov_Part1_step60.xlt BusinessRecov_Part1_TxnReportE_20.xl BusinessRecov_Part1_TxnReportE_all.xl |

| | | | |
|---------|-------------------------------|---|--|
| | | | BusinessRecov_Part2_step60.xlt BusinessRecov_Part2_TxnReportE_20.xl BusinessRecov_Part2_TxnReportE_all.xl BusinessRecov_TimeGraph.xls |
| | Durability Data Accessibility | SupportingFiles/Cause7/Durability/DataAccessibility | DataAccess_TimeGraph.xls DataAccess_TxnReportE_all.xls Dataafter.jpg Databefore.jpg Datafail.jpg Datarebuild.jpg DA_BenchCraft_Config.xml DA_Count_Settlement1.ver DA_Count_Settlement2.ver DA_ERRORLOG.txt Logafter.jpg Logbefore.jpg Logfail.jpg Logrebuild.jpg |
| | Isolation | SupportingFiles/Cause7/Isolation | Isolation1_S1.rpt Isolation1_S2.rpt Isolation1_S3.rpt Isolation1_S4.rpt Isolation2_S1.rpt Isolation2_S2.rpt Isolation2_S3.rpt Isolation2_S4.rpt Isolation3_S1.rpt Isolation3_S2.rpt Isolation3_S3.rpt Isolation4_S1.rpt Isolation4_S2.rpt Isolation4_S3.rpt |
| | | SupportingFiles/Cause7/Isolation/Scripts | Isolation1_S1.sql Isolation1_S2.sql Isolation1_S3.sql Isolation1_S4.sql Isolation2_S1.sql Isolation2_S2.sql Isolation2_S3.sql Isolation2_S4.sql Isolation3_S1.sql Isolation3_S2.sql Isolation3_S3.sql Isolation4_S1.sql Isolation4_S2.sql Isolation4_S3.sql |
| Clause8 | 60-Day Space Calculations | SupportingFiles/Cause8 | tpce_space.xls |
| | | | |

Appendix: Third Party Price Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

May 13, 2008

Fujitsu Siemens Computers
Detlev Seidel
Heinz Nixdorf Ring 1
Paderborn, Germany 33106

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-E benchmark testing.

All pricing shown is in US Dollars (\$).

| Part Number | Description | Unit Price | Quantity | Price |
|-------------|--|------------|----------|----------|
| | SQL Server 2008 Enterprise x64 Edition <i>Per Processor License</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 4% discount from the retail unit price of \$24,999.</i> | \$23,911 | 2 | \$47,822 |
| P72-03195 | Windows Server 2008 Enterprise Edition (x64) <i>Server License with 25 CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 41% discount from the retail unit price of \$3,999.</i> | \$2,357 | 1 | \$2,357 |
| P73-01664 | Windows Server 2003 R2 Standard x64 Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i> | \$719 | 1 | \$719 |
| N/A | Microsoft Problem Resolution Services <i>Professional Support</i> <i>(1 Incident)</i> | \$245 | 1 | \$245 |

Windows Server 2008 and Windows Server 2003 are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's resellers can be found at <http://www.microsoft.com/products/info/render.aspx?view=22&type=mpn&content=22/licensing>

SQL Server 2008 will be orderable and available by August 30, 2008.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PEdese0805130000007028.

Please include this Reference ID in any correspondence regarding this price quote.



Fujitsu Computer Systems Corporation
 1250 E. Arques Avenue
 MS125
 Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **66024-3**
 Valid through: **09/30/2008**

| | | |
|---|--|----------------------------------|
| Quote Date: 05/27/2008 | | |
| Customer: TPC Configuration | | Reference: |
| Address: Pricing for the TPC Benchmark Sunnyvale, CA 94085 | | ATTN: Detlev Seidel Phone: 1 |
| Payment Terms: NET30 | | Freight Terms: FOB |
| Sales Rep Name: Jon Rodriguez | Sales Rep Email: jrodriguez@fujitsupc.com | Sales Rep Phone: 408-764-9586 |

| Item | Part Number | Description | Qty | Sell Price | Ext. Price |
|------|------------------------------------|---|-----|-------------|-------------|
| 1 | FSC_S26361-K826-V103_67630-01 | | 1 | \$2,316.25 | \$2,316.25 |
| | 1 | PRIMECENTER Rack 38 U, 1000 deep (S26361-K826-V103) | | | |
| | 4 | Dummy panel, platics, 2U + assembly (S26361-F2735-E131) | | | |
| | 2 | Socket strip 3phase 3x 8 sockets (S26361-F2262-E31) | | | |
| 2 | FSC_S26361-K1122-V200_67630-02 | | 15 | \$4,399.60 | \$65,994.00 |
| | 15 | FibreCAT SX40 SAS Disk Subsystem (S26361-K1122-V200) | | | |
| | 180 | HD SAS 3Gb/s 73GB 15k hot pl 3.5" SX40 (S26361-F3244-E573) | | | |
| | 15 | Rack installation ex works, SX10, 1U Nod (S26361-F1647-E302) | | | |
| 3 | PYSX40-W036360-0NA | PYSX40, Standard Warranty, 9 x 5, NBD response time, 36 Months | 15 | \$0.00 | \$0.00 |
| 4 | PYSX40-U004361-0NA | PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | 15 | \$1,644.30 | \$24,664.50 |
| 5 | FSCR3S4_S26361-K1151-V101_67630-03 | | 1 | \$2,035.75 | \$2,035.75 |
| | 1 | PY RX300S4 6x3.5 (S26361-K1151-V101) | | | |
| | 1 | Xeon DP E5405 2.00 GHz 2x8MB 1333MHz (S26361-F3882-E200) | | | |
| | 2 | 2GB 2x1GB FBD667 PC2-5300F d ECC (S26361-F3263-E522) | | | |
| | 1 | CD-RW/DVD slimline SATA (S26361-F3268-E1) | | | |
| | 1 | HD SATA 3Gb/s 250GB 7.2k hot plug 3.5" (S26361-F3265-E250) | | | |
| | 1 | RAID 0/1 SAS based on LSI MegaRAID 8Port (S26361-F3257-E8) | | | |
| | 1 | Rack installation ex works (SNP:SY-F1647E301-P) | | | |
| | 1 | RMK-P_1-2U servers (new) (S26361-F2735-E110) | | | |
| 6 | PYR3S4-W036360-0NA | PYR3S4, Standard Warranty, 9 x 5, NBD response time, 36 Months | 1 | \$0.00 | \$0.00 |
| 7 | PYR3S4-U004361-0NA | PYR3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | 1 | \$854.10 | \$854.10 |
| 8 | FSCT3S4_S26361-K1159-V301_67630-04 | | 1 | \$15,102.80 | \$15,102.80 |
| | 1 | PY TX300S4r/standard PSU (S26361-K1159-V301) | | | |
| | 2 | Xeon DP X5460 3.16 GHz 2x8MB 1333MHz (S26361-F3340-E316) | | | |
| | 1 | Memory Board 2 for TX300 S4 (S26361-F3263-E300) | | | |
| | 8 | 8GB 2x4GB FBD667 PC2-5300F d ECC (S26361-F3263-E524) | | | |
| | 1 | Conversion kit for 2.5" HD Basic Unit (S26361-F2826-E133) | | | |
| | 1 | F-D-L-Box1 (S26361-F2826-E301) | | | |
| | 1 | CD-RW/DVD slimline SATA (S26361-F3268-E1) | | | |



Fujitsu Computer Systems Corporation
 1250 E. Arques Avenue
 MS125
 Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **66024-3**
 Valid through: **09/30/2008**

| | | |
|---|--|----------------------------------|
| Quote Date: 05/27/2008 | | |
| Customer: TPC Configuration | | Reference: |
| Address: Pricing for the TPC Benchmark Sunnyvale, CA 94085 | ATTN: Detlev Seidel Phone: 1 | |
| Payment Terms: NET30 | Freight Terms: FOB | |
| Sales Rep Name: Jon Rodriguez | Sales Rep Email: jrodriguez@fujitsupc.com | Sales Rep Phone: 408-764-9586 |

| Item | Part Number | Description | Qty | Sell Price | Ext. Price |
|---------------------|--------------------|---|-----|------------|---------------------|
| | 2 | HD SAS 3Gb/s 73GB 10k hot plug 2.5" (S26361-F3208-E173) | | | |
| | 6 | HD SAS 3Gb/s 73GB 15k hot plug 2.5" (S26361-F3208-E573) | | | |
| | 1 | RAID 5/6 SAS based on LSI MegaRAID 256MB (S26361-F3257-E258) | | | |
| | 1 | Rack installation ex works (SNP:SY-F1647E301-P) | | | |
| | 1 | RMK-F2_TX300-S4 (S26361-F2735-E103) | | | |
| | 1 | Cable mgmt. for 19" DC- PC- Rack (S26361-F2735-E7) | | | |
| 9 | PYT3S4-W036360-0NA | PYT3S4, Standard Warranty, 9 x 5, NBD response time, 36 Months | 1 | \$0.00 | \$0.00 |
| 10 | PYT3S4-U004361-0NA | PYT3S4 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | 1 | \$854.10 | \$854.10 |
| 11 | S26361-F3228-L201 | Eth Ctrl 2x1Gbit PCIe PRO/1000PT Cu Ip | 1 | \$183.60 | \$183.60 |
| 12 | S26361-F3482-L5 | LAN_crossover-Cat 5e, l=5m | 2 | \$21.25 | \$42.50 |
| 13 | S26381-K370-V510 | KB SLIM MF USA | 2 | \$24.65 | \$49.30 |
| 14 | S26361-F3246-L20 | SAS cable external 2 m | 6 | \$80.75 | \$484.50 |
| 15 | S26361-F3246-L5 | SAS cable external 0.5 m | 9 | \$59.50 | \$535.50 |
| 16 | S26361-K1146-V150 | SCENICVIEW A17-3 | 2 | \$226.10 | \$452.20 |
| 17 | S26381-K355-L400 | Optical Wheelmouse USB silver | 2 | \$15.30 | \$30.60 |
| 18 | S26361-F3890-L501 | RAID 5/6 SAS based on LSI MegaRAID 512MB 2x External | 3 | \$479.40 | \$1,438.20 |
| Quote Total: | | | | | \$115,037.90 |
| Notes: | | | | | |

* Freight Charge and Sales Tax will be added as applicable.

* All products subject to availability.

* PLEASE STATE THIS QUOTE NUMBER WHEN PLACING A PURCHASE ORDER—THIS WILL ENSURE PROMPT HANDLING TO SPEED PROCESSING AND SHIPMENT.

Warranty/Service Programs

| Part No. | Description |
|--------------------|---|
| PYR384-U004361-0NA | PYR384 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid |



Fujitsu Computer Systems Corporation
 1250 E. Arques Avenue
 MS125
 Sunnyvale, CA 94088-3470

QUOTATION

Quote #: **66024-3**
 Valid through: **09/30/2008**

| | | |
|---|--|----------------------------------|
| Quote Date: 05/27/2008 | | |
| Customer: TPC Configuration | | Reference: |
| Address: Pricing for the TPC Benchmark Sunnyvale, CA 94085 | ATTN: Detlev Seidel Phone: 1 | |
| Payment Terms: NET30 | Freight Terms: FOB | |
| Sales Rep Name: Jon Rodriguez | Sales Rep Email: jrodriguez@fujitsupc.com | Sales Rep Phone: 408-764-9586 |

| Item | Part Number | Description | Qty | Sell Price | Ext. Price |
|------|-------------|-------------|-----|------------|------------|
|------|-------------|-------------|-----|------------|------------|

| | | | | | |
|--------------------|--|---|--|--|--|
| | | billing | | | |
| PYR384-W036360-0NA | | PYR384, Standard Warranty, 9 x 5, NBD response time, 36 Months | | | |
| PYSX40-U004361-0NA | | PYSX40 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | | | |
| PYSX40-W036360-0NA | | PYSX40, Standard Warranty, 9 x 5, NBD response time, 36 Months | | | |
| PYT384-U004361-0NA | | PYT384 Enhanced +, 24 x 7 Phone Support; 24 x 7, 4-hour On-Site Resp.(Sev-1), Warranty Uplift Maintenance, 36 Months, Prepaid billing | | | |
| PYT384-W036360-0NA | | PYT384, Standard Warranty, 9 x 5, NBD response time, 36 Months | | | |

Terms and Conditions of Order

Special Provisions (If any):

FCS reserves the right to substitute equivalent or better items based upon availability at the time of shipment

Quote Expiration - Unless otherwise agreed to in writing by FCS, this quote is only valid through 09/30/2008

Server Purchase: Customer's acceptance of this Quote by the issuance of an authorized Purchase Order that references said Quote shall constitute Customer's acknowledgement that it has read and understands the terms and conditions set forth in the FCS Products and Services Agreement (FCS-1) and that such Agreement shall exclusively govern the subject matter of the authorized Purchase Order, regardless of any varying or additional terms in any Customer documents. A complete copy of the FCS Products and Services Agreement is available at <http://www.computers.us.fujitsu.com/downloads/FCS-1.pdf>. If a Master Agreement or a Federal Government GSA Schedule exists between Customer and FCS and it is referenced on the authorized Purchase Order, then and only then will the terms of said Master Agreement or GSA Schedule apply.

Mobile Purchase: Customer's acceptance of this Quote by the issuance of an authorized Purchase Order that references said Quote shall constitute Customer's acknowledgement that it has read and understands the terms and conditions set forth in (Terms and Conditions of Mobile Sale) and that such Agreement shall exclusively govern the subject matter of the authorized Purchase Order, regardless of any varying or additional terms in any Customer documents. A complete copy of the FCS Mobile Products Agreement is available at <http://www.computers.us.fujitsu.com/termsandconditions.shtml>. If a reseller Agreement or other mutually executed Agreement (including a Federal Government GSA Schedule) exists between Customer and FCS and it is referenced on the authorized Purchase Order, then and only then will the terms of said Agreement or GSA Schedule apply.

Server/Mobile Evaluation: This Evaluation Order is subject to the terms and conditions set forth in FCS Product Evaluation Agreement (FCS-2), which are an integral part hereof and are incorporated herein by reference. A complete copy of the FCS Products Evaluation Agreement is available at http://www.computers.us.fujitsu.com/downloads/FCS-2_EVAL.pdf. Customer's acceptance of this Evaluation Order shall constitute Customer's acknowledgement that it has read and understands the terms and conditions of the FCS Product Evaluation Agreement, and that such terms shall exclusively govern the subject matter of this Order, regardless of any varying or additional terms in any Customer documents.

Non FCS Products Notice: Notwithstanding any contrary terms or conditions in any Agreement between the parties, or any Purchase Order submitted by Buyer, Buyer is hereby notified that all products distributed by FCS pursuant to those Non FCS Products are pass-through products only, and are not covered by any warranty obligation from FCS, are not covered by any indemnification provision from FCS, are not covered by any maintenance or service provision by FCS, and FCS does not assume any liability to Buyer for such Non FCS Products or service whatsoever. Buyer shall have recourse only to the manufacturer, not FCS, for all such warranty, indemnity, service or support obligations. Buyer's Purchase Order for Non FCS Products signifies agreement to these terms.

