TPC Benchmark™ C Full Disclosure Report



First Edition 16–Dec–2021

Using

Goldilocks v3.1 Standard Edition

on

KTNF KR580S2

First Edition: 16-Dec-2021

TTA, Telecommunications Technology Association, believes that all the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. TTA, the sponsor of this benchmark test, assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, the TPC Benchmark™ C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtain

ned in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

Trademarks

The following terms used in this publication are trademarks of other companies as follows:

- TPC Benchmark, TPC-C, and tpmC are trademarks of the Transaction Processing Performance Council
- TTA is a registered trademark of Telecommunications Technology Association
- Goldilocks is a registered trademark of SUNJESOFT, Inc.
- JBoss is a registered trademark of RedHat, Inc.
- Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation.
- All other trademarks and copyrights are properties of their respective owners.

Table of Contents

TABLE OF CONTENTS	3
ABSTRACT	5
PREFACE	6
GENERAL ITEMS	
0.1 APPLICATION CODE AND DEFINITION STATEMENTS	11
0.2 BENCHMARK SPONSOR	11
0.3 PARAMETER SETTINGS	
0.4 Configuration Diagrams	
CLAUSE 1: LOGICAL DATABASE DESIGN	
1.1 Table Definitions	
1.2 PHYSICAL ORGANIZATION OF DATABASE	
1.3 Insert and Delete Operations	
1.4 HORIZONTAL OR VERTICAL PARTITIONING	
1.5 REPLICATION OR DUPLICATION	
CLAUSE 2: TRANSACTION AND TERMINAL PROFILES	14
2.1 RANDOM NUMBER GENERATION	
2.2 INPUT/OUTPUT SCREENS	
2.3 PRICED TERMINAL FEATURE	
2.4 Presentation Managers	
2.5 Transaction Statistics	
2.6 QUEUING MECHANISM	
CLAUSE 3: TRANSACTION AND SYSTEM PROPERTIES	
3.1 ATOMICITY	
3.1.1 Atomicity of Completed Transactions	
3.1.2 Atomicity of Aborted Transactions	
3.2 Consistency	
3.3 ISOLATION	
3.4.2 Instantaneous Interruption, Loss of Memory	
CLAUSE 4: SCALING AND DATABASE POPULATION	
4.1 CARDINALITY OF TABLES	
4.2 DATABASE IMPLEMENTATION	
4.4 60-DAY SPACE	
CLAUSE 5: PERFORMANCE METRICS	
5.1 TPC BENCHMARK C METRICS	
5.1 TPC BENCHMARK C METRICS	
5.3 KEYING AND THINK TIMES	

5.4 DISTRIBUTION AND PERFORMANCE CURVES	
5.4.1 Response Time frequency distribution curves	
5.4.2 Response Time versus throughput	
5.4.3 Think Time frequency distribution	
5.4.4 Throughput versus elapsed time	
5.5 STEADY STATE DETERMINATION	
5.6 Work Performed During Steady State	
5.7 MEASUREMENT PERIOD DURATION	
5.8 TRANSACTION STATISTICS	
5.9 CHECKPOINTS	
CLAUSE 6: SUT, DRIVER AND COMMUNICATION	36
6.1 REMOTE TERMINAL EMULATOR (RTE)	36
6.2 EMULATED COMPONENTS	
6.3 FUNCTIONAL DIAGRAMS	
6.4 Networks	
6.5 OPERATOR INTERVENTION	
CLAUSE 7: PRICING	37
7.1 HARDWARE AND SOFTWARE PRICING	
7.2 Three Year Price	
7.3 AVAILABILITY DATES	
CLAUSE 8: REPORTING	
8.1 FULL DISCLOSURE REPORT	
CLAUSE 9: AUDITOR ATTESTATION	39
9.1 Auditor Information	
9.2 ATTESTATION LETTER	39
APPENDIX A: SOURCE CODE	41
APPENDIX B: TUNABLE PARAMETERS	44
APPENDIX C. PRICE OUOTATIONS	45

Abstract

This report documents the methodology and results of the TPC Benchmark™ C (TPC-C) test conducted by TTA on the Goldilocks v3.1 Standard Edition on KTNF KR580S2

Goldilocks v3.1 Standard Edition on KTNF KR580S2

Company Name	System Name	Database Software	Operating System
Telecommunications	KTNF KR580S2	Goldilocks v3.1	RedHat Enterprise
Technology Association		Standard Edition	Linux 7.9

TPC Benchmark™ C Metrics

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
₩ 260,814,000 (KRW)	101,550 tpmC	2,569 KRW/tpmC	Available Now

Preface

The Transaction Processing Performance Council (TPC^{TM}) is a non-profit corporation founded to define transaction processing and database benchmarks and to disseminate objective, verifiable TPC performance data to the industry. The TPC Benchmark© C is an on-line transaction processing benchmark (OLTP) developed by the TPC.

TPC Benchmark™ C Overview

TPC Benchmark $^{\mathsf{TM}}$ C (TPC-C) simulates a complete computing environment where a population of users executes transactions against a database. The benchmark is centered around the principal activities (transactions) of an order-entry environment. These transactions include entering and delivering orders, recording payments, checking the status of orders, and monitoring the level of stock at the warehouses. While the benchmark portrays the activity of a wholesale supplier, TPC-C is not limited to the activity of any particular business segment, but, rather represents any industry that must manage, sell, or distribute a product or service.

TPC-C consists of a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention of data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to other environments are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

Further information is available at www.tpc.org




Goldilocks v3.1 Standard Edition on KTNF KR580S2

TPC-C Version 5.11.0 TPC Pricing 2.7.0

Report Date 16-Dec-2021

Total System Cost	TPC-C Throughput	Price/Performance		Price/Performance		Availability Date
₩ 260,814,000 (KRW)	101,550 tpmC	2,569 KRW/tpmC		2,569 KRW/tpmC		Available Now
Server Processors/Cores/Threads	Database Manager	Operating System	Other Software	Number of Users		
2/36/72	Goldilocks v3.1 Standard Edition	RHEL 7.9	JBoss Web Server	80,000		

Priced Configuration (KTNF)

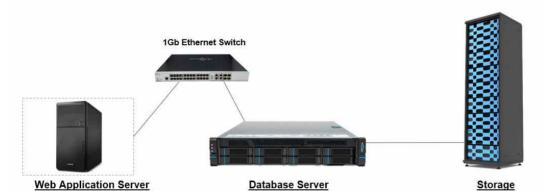

2 x HANSUNG DT-S170G1IV0

- 1 x Intel(R) Core(TM) i7-10700K CPU @ 3.80GHz
- 1 x 32GB Memory
- 1 x 2TB SATA HDD
- 1 x 512GB SATA SSD
- 1 x 2-port 10G Ethernet - 1 x 1G Ethernet

1 x KTNF KR580S2

- 2 x Intel(R) Xeon(R) Gold 6354 CPU @ 3.00GHz
- 32 x 32GB (1,024GB) Memory
- 1 x 480GB SATA SSD
- 1 x 16Gb 2-Port Host Bus Adaptor
- 1 x single-port 1G Ethernet(Intel® Ethernet Controller I210-IT)

1 x UNIWIDE FCH2800

- 16 x 32GB (512GB) Cache Memory
- 8 x 1.6TB FMD Drive (Write Back)
- 4 x 8/16Gb 8-Port Host Bus Adaptor

System Components		DB Server	WAS Server	
System Components	Quantity	Description	Quantity	Description
Processors/Cores/Threads	2/36/72	Intel(R) Xeon(R) Gold 6354 CPU @ 3.00GHz	1/8/16	Intel(R) Core(TM) i7-10700K CPU @ 3.80GHz
Memory	32	32GB	1	32GB
Storage Controller	1	- EMULEX LightPulse LPe16002 HP SN1000E 16Gb Dual Port Fibre Channel Host Bus Adapter		
Storage Device	1 8	480GB SATA SSD 1.6TB FMD (External, Write back)	1 1	1TB SATA HDD 512GB SATA SSD
Total Storage Capacity		14.8TB		



Goldilocks v3.1 Standard Edition on KTNF KR580S2

TPC-C Version 5.11.0 **TPC Pricing 2.7.0**

> Report Date 16-Dec-2021

Available Now

					Available No	iow
Description	Part Number	Source	Unit Price	Qty	Price	3-Yr. Maint. Price
Server Hardware						
KTNF KR580S2 Server	KR580S2	1	30,470,000	1	30,470,000	
2U-12Bay, FH Riser (3slots PCle Gen4.0 x16, x8, x8) x2, OCP3.0 slot x1, 1P 1G RJ-45, 1300W x2, Rail 1	SYS	1	(included)	1		
Intel Xeon Gold 6354 Processor (18C/36T 3.0GHz, 39MB, 205W)	CPU	1	(included)	2		
32GB DDR4 3200 RDIMM memory	RAM	1	(included)	32		
Samsung 480GB, 2.5" SATA SSD	SSD	1	(included)	1		
Emulex Dual port 16Gbps FC HBA Adapter	НВА	1	(included)	1		
3year, 24x7x4hr Onsite Support Service 1	Maintenance	1	(included)	1		
WAS Servers (per server) - DT-S170G1IV0 (w/spares)	DT-S170G1IV0	2	1,551,000	4	6,204,000	
Intel® Core Processor i7-10700K, 3.8GHz	-	2	(included)	1		
DDR4 32GB, Samsung, UDIMM PC4-25600U	_	2	(included)	1		
Seagate Barracuda ST2000DM008 2 TB 3.5"	-	2	(included)	1		
HP SSD EX900 512GB	-	2	(included)	1		
2-port 10G Ethernet Controller	-	2	(included)	1		
Server Hardware Sub Total					36,674,000	
Storage Hardware						
All Flash Storage - FCH2800	FCH2800	3	72,250,000	1	72,250,000	
FCH2800 Controller Device	T0001-0117-00	3	(included)	 1	12,200,000	
Back-end Bus Adapter 12G SAS	T0001-0117-01	3	(included)	1		
16G 8-Port Host Bus Adapter	T0001-0117-02	3	(included)	4		
Cache Interconnect Adapter	T0001-0117-03	3	(included)	1		
Cache Memory DDR-3 (32GB)	T0001-0117-04	3	(included)	16		
FCH2800 Flash Disk Drive Expantion Unit	T0001-0117-05	3	(included)	1		
FCH2800 controller cpu Board	T0001-0117-06	3	(included)	1		
Rack 600x1200x2010 mm (WxDxH) 42U	T0001-0117-07	3	(included)	1		
Storage Management SW	T0001-0117-08	3	(included)	1		
UTP CAT5e Ethernet Cable 1M	61001-0001-00	3	(included)	1		
Power Cord, NICETECH, 2.5M	42119-0005-00	3	(included)	2		
1.6TB Flash Memory Disk Drive	T22601-0117-03	3	3,900,000	8	31,200,000	
3-yrs 24x7x4hrs Onsite Support Service	-	3	26,350,000	1		26,350,000
Storage Hardware Sub Total					103,450,000	26,350,000
Client/Server Software						
Red Hat Enterprise Linux Server Standard 3yrs	RH00004F3	4	4,098,000	3	12,294,000	
RHEL Server Standard Maintenance - 3yrs 24x7x4hrs	RP-CPS(OS)	4	6,000,000	3	12,207,000	18,000,000

Red Hat JBoss Web Server 4-Core Standard 3Year	MW00123F3	4	2,144,000	4	8,576,000	
JBoss Web Server per 4Core 3Year Maintenance	RP-CPS(WAS)	4	12,000,000	4		48,000,000
Goldilocks v3.1 Standard Edition	-	5	96,000,000	1	96,000,000	
Goldilocks v3.1 Standard Edition Technical Supports	-	5	10,000,000	3		30,000,000
Software Sub Total					116,870,000	96,000,000
Other Hardware						
UbiQuoss uSafe3010-24ps (10G, 24-port)(w/spares)	22917889	6	1,900,000	3	5,700,000	
Other Hardware Sub Total					5,700,000	
<u>Discounts*</u>						
Red Hat OS Discount					-5,094,000	-12,000,000
Red Hat JBoss Discount					-3,536,000	-24,000,000
SW Discount - Goldilocks					-64,000,000	-15,600,000
Discounts Sub Total					-72,630,000	-51,600,000
Total					190,064,000	70,750,000

Pricing Notes

1) KTNF Inc.

2) Hansung Corporation.

3) UNIWIDE Technologies Inc.

4) Rockplace Inc.

5) Sunjesoft Inc.

6) UbiQuoss Inc.

All of the prices are based on South Korea's currency, KRW (\forall , Korean Won) and excluded VAT.

* All discounts are based on Korea list prices and for similar quantities and configurations. Discounts for similarly sized configurations will be similar to those quoted here, but may vary based on the components in the configuration.

Three year cost of ownership KRW(₩): 260,814,000

TPC-C throughput: 101,550 tpmC

Price/Performance: 2,569 ₩ / tpmC

Benchmark implementation and results independantly audited by Doug Johnson of InfoSizing (www.sizing.com)

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.



Goldilocks v3.1 Standard Edition on KTNF KR580S2

TPC-C Version 5.11.0 TPC Pricing 2.7.0

Report Date 16-Dec-2021

Available Now

MQTh, computed Maximum Qualified	Throughput	oughput 101,550 tpmC		
Response Times (seconds)	Min	Average	90 th	Max
New-Order	0.102	0.104	0.105	4.915
Payment	0.102	0.104	0.105	1.446
Order-Status	0.102	0.103	0.103	1.282
Delivery (interactive portion)	0.101	0.101	0.101	0.723
Delivery (deferred portion)	0.002	0.006	0.008	5.092
Stock-Level	0.102	0.103	0.103	1.281
Menu	0.101	0.101	0.102	0.881

Emulated Display Delay: 0.1 sec.

Transaction Mix	Percent	Number
New-Order	44.980%	42,651,272
Payment	43.011%	40,784,729
Order-Status	4.003%	3,795,420
Delivery	4.003%	3,796,002
Stock-Level	4.003%	3,796,131

Keying Times (seconds)	Min	Average	Max
New-Order	18.001	18.001	18.004
Payment	3.001	3.001	3.012
Order-Status	2.001	2.001	2.011
Delivery	2.001	2.001	2.011
Stock-Level	2.001	2.001	2.010

Think Times (seconds)	Min	Average	Max
New-Order	0.001	12.046	120.501
Payment	0.001	12.044	120.501
Order-Status	0.001	10.054	100.501
Delivery	0.001	5.038	50.301
Stock-Level	0.001	5.029	50.301

Test	Du	ratio	n

Ramp-up time	65 min
Measurement Interval (MI)	420 min
Checkpoints in MI	16
Checkpoint Interval (Average / Max)	26:11 min / 26:13 min
Number of Transactions in MI (all types)	94,823,554

General Items

0.1 Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains the application source code for the transactions.

0.2 Benchmark Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by TTA, Telecommunications Technology Association. The implementation was developed and engineered in partnership with SUNJESOFT Inc. and KTNF Inc.

0.3 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- Database options
- Recover/commit options
- Consistency locking options
- Operating system and application configuration parameters

This requirement can be satisfied by providing a full list of all parameters.

Appendix B contains the tunable parameters for the database, the operating system, and the transaction monitor.

0.4 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced system is depicted in Figure 0.1. There was no difference between the priced and tested configurations.

Priced Configuration (KTNF) 1Gb Ethernet Switch Web Application Server **Database Server** Storage 2 x HANSUNG DT-S170G1IV0 1 x KTNF KR580S2 1 x UNIWIDE FCH2800 - 1 x Intel(R) Core(TM) i7-10700K CPU @ 3.80GHz - 2 x Intel(R) Xeon(R) Gold 6354 CPU @ 3.00GHz 16 x 32GB (512GB) Cache Memory - 32 x 32GB (1,024GB) Memory - 1 x 32GB Memory 8 x 1.6TB FMD Drive (Write Back) - 1 x 2TB SATA HDD - 1 x 480GB SATA SSD 4 x 8/16Gb 8-Port Host Bus Adaptor - 1 x 512GB SATA SSD - 1 x 16Gb 2-Port Host Bus Adaptor - 1 x 2-port 10G Ethernet - 1 x single-port 1G Ethemet(Intel® Ethemet Controller I210-IT) - 1 x 1G Ethernet

Figure 0.1: Benchmarked and Priced Configuration

Clause 1: Logical Database Design

1.1 Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database. Appendix A contains the code used to define and load the database tables.

1.2 Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The physical organization of the database is shown in Table 1.2.

Table 1.2: Physical Organization of the Database

Controller	Array	RAID Array	Drives	Content
SATA	Internal	None	1 x SATA 480GB HDD	os
Hitachi DKC810I Series	FCH2800 Array	RAID 1 (2D+2D)	4 x 1.6TB FMD	Database files
Hitachi DKC810I Series	FCH2800 Array	RAID 1 (2D+2D)	4 x 1.6TB FMD	Redo Logs

1.3 Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were verified to be fully operational during the entire benchmark.

1.4 Horizontal or Vertical Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No horizontal or vertical partitioning was used in this benchmark.

1.5 Replication or Duplication

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2: Transaction and Terminal Profiles

2.1 Random Number Generation

The method of verification for the random number generation must be described.

Random numbers were generated using 'SysVr4 rand_r()' call. The seed value for 'rand_r()' was collected and reviewed by the auditor.

2.2 Input/Output Screens

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts were verified by the auditor to validate that they followed the requirements of the specifications.

2.3 Priced Terminal Feature

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were manually verified by the auditor by verifying that each required feature was implemented.

2.4 Presentation Managers

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client systems implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the user interface is listed in Appendix A.

2.5 Transaction Statistics

Table 2.1 lists the transaction statistics defined in Clauses 8.1.3.5 to 8.1.3.11 and observed during the Measurement Interval.

Table 2.1: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines Remote warehouse order lines Rolled back transactions Average items per order	99.001% 0.999% 1.003% 10.000
Payment	Home warehouse Remote warehouse Accessed by last name	84.997% 15.003% 59.998%
Order Status	Accessed by last name	59.993%
Delivery	Skipped transactions	0
Transaction Mix	New Order Payment Order status Delivery Stock level	44.980% 43.011% 4.003% 4.003% 4.003%

2.6 Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

The queuing mechanism was implemented using 'BlockingQueue' provided by Java.

Clause 3: Transaction and System Properties

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were conducted according to the specification.

3.1 Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

3.1.1 Atomicity of Completed Transactions

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have been changed appropriately.

A row was randomly selected from the CUSTOMER, DISTRICT, and WAREHOUSE tables, and the balances noted. A payment transaction was started with the same Customer, District, and Warehouse identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

3.1.2 Atomicity of Aborted Transactions

Perform the Payment transaction for a randomly selected warehouse, district, and customer (by customer number) and substitute a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the records in the CUSTOMER, DISTRICT, and WAREHOUSE tables have NOT been changed.

A row was randomly selected from the CUSTOMER, DISTRICT, and WAREHOUSE tables, and the balances noted. A payment transaction was started with the same Customer, District, and Warehouse identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

3.2 Consistency

Consistency is the property of the application that requires any execution of a data base transaction to take the database from one consistent state to another, assuming that the data base is initially in a consistent state.

Verify that the data base is initially consistent by verifying that it meets the consistency conditions defined in Clauses 3.3.2.1 to 3.3.2.4. Describe the steps used to do this in sufficient detail so that the steps are independently repeatable.

The specification defines 12 consistency conditions, of which Consistency conditions 1 through 4 were demonstrated as follows:

- The sum of balances (d_ytd) for all Districts within a specific Warehouse is equal to the balance (w_ytd) of that Warehouse.
- 2. For each District within a Warehouse, the next available Order ID (d_next_o_id) minus one is equal to the most recent Order ID [max(o_id)] for the ORDER table associated with the preceding District and Warehouse. Additionally, that same relationship exists for the most recent Order ID [max(o_id)] for the NEW-ORDER table associated with the same District and Warehouse. Those relationships can be illustrated as:

```
d_next_o_id - 1 = max(o_id) = max(no_o_id)
where (d w id = o w id = no w id) and (d id = o d id = no d id)
```

3. For each District within a Warehouse, the value of the most recent Order ID [max(no_o_id)] minus the first Order ID [min(no_o_id)] plus one, for the NEW-ORDER table associated with the District and Warehouse, equals the number of rows in that NEW-ORDER table. That relationship can be illustrated as:

```
max(no_o_id) - min(no_o_id) + 1 = rows in NEW-ORDER
where (o w id = no w id) and (o d id = no d id)
```

4. For each District within a Warehouse, the sum of Order-Line counts [sum(o_ol_cnt)] for the Orders associated with the District equals the number of rows in the ORDER-LINE table associated with the same District.

That relationship can be illustrated as:

sum(o_ol_cnt) = rows in the ORDER-LINE table for the Warehouse and District

To test consistency, the following steps were executed:

- 1. The consistency conditions 1 through 4 were tested by running queries against the database. All queries showed that the database was in a consistent state.
- 2. An RTE run was executed at full load for a duration sufficient to include at least one completed checkpoint.
- 3. The consistency conditions 1 through 4 were tested again. All queries showed that the database was still in a consistent state.

3.3 Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

The benchmark specification defines nine tests to demonstrate the property of transaction isolation. The tests, described in Clauses 3.4.2.1 - 3.4.2.9, were all successfully executed using a series of scripts. Each included timestamps to demonstrate the concurrency of operations. The results of the queries were logged. The captured logs were verified to demonstrate the required isolation had been met.

Isolation Test 1

This test demonstrates isolation for read-write conflicts of Order-Status and New-Order transactions when the New-Order transaction is committed.

The test proceeds as follows:

- 1. An Order-Status transaction T0 was executed and committed for a randomly selected Customer, and the Order returned was noted.
- 2. A New-Order transaction T1 was started for the same Customer used in T0. T1 was stopped prior to COMMIT.
- 3. An Order-Status transaction T2 was started for the same Customer used in T1. T2 completed and was committed without being blocked by T1. T2 returned the same Order that T0 had returned.
- 4. T1 was allowed to complete and was committed.
- 5. An Order-Status transaction T3 was started for the same Customer used in T1. T3 returned the Order inserted by T1.

Isolation Test 2

This test demonstrates isolation for read-write conflicts of Order-Status and New-Order transactions when the New-Order transaction is rolled back.

The test proceeds as follows:

- 1. An Order-Status transaction T0 was executed and committed for a randomly selected Customer and the Order returned was noted.
- 2. A New-Order transaction T1 with an invalid item number was started for the same Customer used in T0. T1 was stopped immediately prior to ROLLBACK.
- 3. An Order-Status transaction T2 was started for the same Customer used in T1. T2 completed and was committed without being blocked by T1. T2 returned the same Order that T0 had returned.
- 4. T1 was allowed to ROLLBACK.
- 5. An Order-Status transaction T3 was started for the same Customer used in T1. T3 returned the same Order that T0 had returned.

Isolation Test 3

This test demonstrates isolation for write-write conflicts of two New-Order transactions when both transactions are committed. The test proceeds as follows:

- 1. The D_NEXT_O_ID of a randomly selected district was retrieved.
- 2. A New-Order transaction T1 was started for a randomly selected customer within the District used in step 1. T1 was stopped immediately prior to COMMIT.
- 3. Another New-Order transaction T2 was started for the same customer used in T1. T2 waited.
- 4. T1 was allowed to complete. T2 completed and was committed.
- 5. The order number returned by T1 was the same as the D_NEXT_O_ID retrieved in step 1. The order number returned by T2 was one greater than the order number returned by T1.
- 6. The D_NEXT_O_ID of the same District was retrieved again. It had been incremented by two (i.e. it was one greater than the order number returned by T2).

Isolation Test 4

This test demonstrates isolation for write-write conflicts of two New-Order transactions when one transaction is rolled back. The test proceeds as follows:

- 1. The D NEXT O ID of a randomly selected District was retrieved.
- 2. A New-Order transaction T1, with an invalid item number, was started for a randomly selected customer within the district used in step 1. T1 was stopped immediately prior to ROLLBACK.
- 3. Another New-Order transaction T2 was started for the same customer used in T1. T2 waited.
- 4. T1 was allowed to roll back, and T2 completed and was committed.
- 5. The order number returned by T2 was the same as the D_NEXT_O_ID retrieved in step 1.
- 6. The D_NEXT_O_ID of the same District was retrieved again. It had been incremented by one (i.e. one greater than the order number returned by T2).

Isolation Test 5

This test demonstrates isolation for write-write conflicts of Payment and Delivery transactions when Delivery transaction is committed.

The test proceeds as follows:

- 1. A query was executed to find out the Customer who is to be updated by the next Delivery transaction for a randomly selected Warehouse and District.
- 2. The C BALANCE of the Customer found in step 1 was retrieved.
- 3. A Delivery transaction T1 was started for the same Warehouse used in step 1. T1 was stopped immediately prior to COMMIT.
- 4. A Payment transaction T2 was started for the same Customer found in step 1. T2 waited.
- 5. T1 was allowed to complete. T2 completed and was committed.
- The C_BALANCE of the Customer found in step 1 was retrieved again. The C_BALANCE reflected the results of both T1 and T2.

Isolation Test 6

This test demonstrates isolation for write-write conflicts of Payment and Delivery transactions when the Delivery transaction is rolled back.

The test proceeds as follows:

- 1. A query was executed to find out the Customer who is to be updated by the next delivery transaction for a randomly selected Warehouse and District.
- 2. The C BALANCE of the Customer found in step 1 was retrieved.
- 3. A Delivery transaction T1 was started for the same Warehouse used in step 1. T1 was stopped immediately prior to COMMIT.
- 4. A Payment transaction T2 was started for the same customer found in step 1. T2 waited.
- 5. T1 was forced to execute a ROLLBACK. T2 completed and was committed. The C_BALANCE of the Customer found in step 1 was retrieved again. The C_BALANCE reflected the results of only T2.

Isolation Test 7

This test demonstrates repeatable reads for the New-Order transaction while an interactive transaction updates the prices of some items.

The test proceeds as follows:

- 1. The I PRICE of two randomly selected items X and Y were retrieved.
- 2. A New-Order transaction T1 with a group of Items including Items X and Y was started. T1 was stopped immediately after retrieving the prices of all items. The prices of Items X and Y retrieved matched those retrieved in step 1.
- 3. A transaction T2 was started to increase the price of Items X and Y by 10%.
- 4. T2 did not stall and was committed.

- 5. T1 was resumed, and the prices of all Items were retrieved again within T1. The prices of Items X and Y matched those retrieved in step 1.
- 6. T1 was committed.
- 7. The prices of Items X and Y were retrieved again. The values matched the values set by T2.

The Execution followed Case D, where T3 does not stall and no transaction is rolled back. Query T4 verifies the price change made by T3.

Isolation Test 8

This test demonstrates isolation for phantom protection between New-Order and Delivery transactions.

The test proceeds as follows:

- 1. The NO_D_ID of all NEW_ORDER rows for a randomly selected Warehouse and District was changed to 11. The changes were committed.
- 2. A Delivery transaction T1 was started for the selected Warehouse.
- 3. T1 was stopped immediately after reading the NEW_ORDER table for the selected Warehouse and District. No qualifying row was found.
- 4. A New-Order transaction T2 was started for the same Warehouse and District. T2 completed and was committed without being blocked by T1.
- 5. T1 was resumed and the NEW_ORDER table was read again. No qualifying row was found.
- 6. T1 completed and was committed.
- 7. The NO_D_ID of all NEW_ORDER rows for the selected Warehouse and District was restored to the original value. The changes were committed.

Isolation Test 9

This test demonstrates isolation for phantom protection between New-Order and Order-Status transactions.

The test proceeds as follows:

- 1. An Order-Status transaction T1 was started for a randomly selected Customer.
- 2. T1 was stopped immediately after reading the ORDER table for the selected Customer to find the most recent Order for that Customer.
- 3. A New-Order transaction T2 was started for the same Customer. T2 completed and was committed without being blocked by T1.
- 4. T1 was resumed and the ORDER table was read again to determine the most recent Order for the same Customer. The Order found was the same as the one found in step 2.
- 5. T1 completed and was committed.

3.4 Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and ensure data base consistency after recovery from any one of the failures listed in Clause 3.5.3

- Permanent irrecoverable failure of any single durable medium containing TPC-C database tables or recovery log data (this test includes failure of all or part of memory)
- Instantaneous interruption (system crash/system hang) in processing that requires system reboot to recover
- Failure of all or part of memory (loss of contents)

3.4.1 Durable Media Failure

3.4.1.1 Loss of Log Media and Data Media

This test was conducted on a fully scaled database. To demonstrate recovery from a permanent failure of durable medium containing TPC-C Log Media and Data Media, the following steps were executed:

- 1. The total number of Orders is determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table; giving count-1.
- 2. The consistency is verified.
- 3. The RTE is started with full user load.
- 4. The test is allowed to run for a minimum of 5 minutes after ramp-up.
- 5. A first checkpoint is initiated and completed.
- 6. The test is allowed to run for a minimum of 2 more minutes.
- 7. A second checkpoint is initiated.
- 8. Before the second checkpoint completes, one data disk is disabled by removing it physically. Since the data disks are configured with redundancy, the transactions continued to run without interruption.
- 9. The test is allowed to run until the completion of the second checkpoint and for at least 5 minutes
- 10. A third checkpoint is initiated.
- 11. Before the third checkpoint completes, one log device is disabled by removing it physically. Since the log devices are configured with redundancy, the transactions continued to run without interruption.
- 12. The test is allowed to run until the fourth checkpoint has completed, but no less than 5 more minutes.
- 13. The RTE run is completed.
- 14. The consistency is verified.
- 15. Step 1 is repeated, giving count-2.
- 16. The RTE result file is used to determine the number of New-Order transactions successfully completed during the full run.
- 17. The difference between the count-1 and count-2 is compared with the number of New-Order transactions successfully completed during the full run. The difference indicated that no committed transactions had been lost.
- 18. Data from the success file is used to query the database to demonstrate that the last 500 successful New-Orders have corresponding rows in the ORDER table.

3.4.1.2 Instantaneous Loss of Storage Controller Cache

This test was executed on a fully scaled database. The following steps were executed: To demonstrate recovery from a permanent failure of a controller cache, the following steps were executed:

- 1. The total number of Orders is determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table; giving count-1.
- 2. The consistency is verified.
- 3. The RTE is started with full user load.
- 4. The test is allowed to run for a minimum of 5 minutes at full load (after ramp-up)
- 5. A first checkpoint is initiated and completed.
- 6. The test is allowed to run for a minimum of 2 more minutes.
- 7. A second checkpoint is initiated.
- 8. Before the second checkpoint completes, one of the two caches in the storage subsystem was failed (removing it from the chassis)
- 9. The RTE run is completed.
- 10. Step 1 is repeated, giving count-2.
- 11. The consistency is verified.
- 12. The RTE result file is used to determine the number of New-Order transactions successfully completed during the full run.
- 13. The difference between the count-1 and count-2 is compared with the number of New-Order transactions successfully completed during the full run. The difference indicated that all committed transactions had been successfully recovered.
- 14. Data from the success file is used to query the database to demonstrate that the last 500 successful New-Orders have corresponding rows in the ORDER table.

3.4.2 Instantaneous Interruption, Loss of Memory

As the loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database. The following steps were executed:

- 1. The total number of Orders is determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table; giving count-1.
- 2. The consistency is verified.
- 3. The RTE is started with full user load.
- 4. The test is allowed to run for a minimum of 5 minutes at full load (after ramp-up).
- 5. A first checkpoint is initiated and completed.
- 6. The test is allowed to run for a minimum of 2 more minutes.
- 7. A second checkpoint is initiated.

- 8. Before the second checkpoint completes, the primary power to the back-end server is shut off (removing both power cords).
- 9. The RTE is shutdown.
- 10. Power is restored to the database server and the system performs an automatic recovery.
- 11. GOLDILOCKS is restarted and performs an automatic recovery.
- 12. Step 1 is repeated, giving count-2.
- 13. The consistency is verified.
- 14. The RTE result file is used to determine the number of New-Order transactions successfully completed during the full run.
- 15. The difference between the count-1 and count-2 is compared with the number of New-Order transactions successfully completed during the full run. The difference indicated that all committed transactions had been successfully recovered.
- 16. Data from the success file is used to query the database to demonstrate that the last 500 successful New-Orders have corresponding rows in the ORDER table.

Clause 4: Scaling and Database Population

4.1 Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows

Table 4.1 shows that number of rows for each table as they were initially populated.

Table 4.1: Number of Rows for Server

Table	Cardinality
Warehouse	8,000
District	80,000
Customer	240,000,000
History	240,000,000
Order	240,000,000
New Order	72,000,000
Order Line	2,399,477,279
Stock	800,000,000
Item	100,000
Unused Warehouses	0

4.2 Database Implementation

A statement must be provided that describes: The data model implemented by DBMS used (e.g. relational, network, hierarchical). The database interfaces (e.g. embedded, call level) and access language (e.g. SQL, DL/1, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.

Goldilocks v3.1 is an in-memory DBMS, implementing the relational model.

The transactions are implemented in SQL via JDBC calls to the database engine.

All application code and procedures are listed in Appendix A.

4.3 Distribution of Database Files

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The database files are stored on a set of four 1.6TB disks configured as RAID1(2+2). The database log files are stored on four 1.6TB disks configured as RAID1(2+2).

Table 4.3: Database file locations

Name	Location	Description
system_XXX.dbf	/data/db/db1	System tables and dictionary
tpcc_data_XX.dbf	/data/db/db1 /data/db/db2 /data/db/db3 /data/db/db4 /data/db/db5	Database data files
redo_X_X.log	/wal	Database log files

The distribution of tables and logs across storage media is shown in Table 1.2.

4.4 60-Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

A test run of over 8 hours was executed to demonstrate that the configuration is capable of sustaining 8 hours of growth at the reported throughput. The computation of the 60-day storage requirements is shown in Table 4.4.

Table 4.4: 60-Day Space Calculations

Base Unit (KBytes) tpmC	101,550.640						
Table	Rows	Data	Index	Initial Population 59	% Growth	8-Hour Growth	Required Runtime Space
WAREHOUSE	8,000	64,496	216	64,712	3,236	0	67,948
DISTRICT	80,000	10,168	2,408	12,576	629	0	13,205
CUSTOMER	240,000,000	154,445,096	19,610,976	174,056,072	8,702,804	0	182,758,876
NEW_ORDER	72,000,000	4,552,376	2,532,792	7,085,168	354,258	0	7,439,426
ITEM	100,000	10,808	2,736	13,544	677	0	14,221
STOCK	800,000,000	294,700,808	26,045,464	320,746,272	16,037,314	0	336,783,586
HISTORY	240,000,000	19,785,704	0	19,785,704	0	4,018,502	23,804,206
ORDERS	240,000,000	15,291,024	18,067,608	33,358,632	0	3,105,627	36,464,259
ORDER_LINE	2,399,477,279	224,965,088	93,569,728	318,534,816	0	45,690,697	364,225,513
Total		713,825,568	159,831,928	873,657,496	25,098,917	52,814,826	951,571,239

60-Day Red	quirements
Dynamic-Space	260,041,816
Free-Space	1,240,400
Static-Space	613,615,680
Daily-Growth	52,814,826
Daily-Spread	0
60-Day Space	3,782,505,221

Memory Requ	uirements
Final Allocation	968,304,104
Non-Growing 5%	25,098,917
1-Day Memory	993,403,021

Storage Req	uirements
Total Disk Space	6,549,825,127
Log space used	131,072,000
60-Day Space	3,782,505,221
Remaining Space	2,636,247,906

Clause 5: Performance Metrics

5.1 TPC Benchmark C Metrics

The TPC-C Metrics are reported in the front of this report as part of the executive summary.

5.2 Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

During the performance run transactions are submitted by the RTE in accordance with the required mix, Keying Times and Think Times of the benchmark Specification. Transactions are submitted by emulated users via HTTP. All timings are recorded by the RTE. The response time is measured from the submission of the transaction until the last byte of response is received by the RTE.

The details of the response times are reported in the front of this report as part of the Executive Summary.

5.3 Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

The details of the keying and think times are reported in the front of this report as part of the Executive Summary.

5.4 Distribution and Performance Curves

5.4.1 Response Time frequency distribution curves

Response Time frequency distribution curves must be reported for each transaction type.

- Figure 5.4.1.1 shows the Response Time frequency distribution curves for the New-Order transaction.
- Figure 5.4.1.2 shows the Response Time frequency distribution curves for the Payment transaction.
- Figure 5.4.1.3 shows the Response Time frequency distribution curves for the Order-Status transaction.
- Figure 5.4.1.4 shows the Response Time frequency distribution curves for the interactive portion of the Delivery transaction.
- Figure 5.4.1.5 shows the Response Time frequency distribution curves for the Stock-Level transaction.

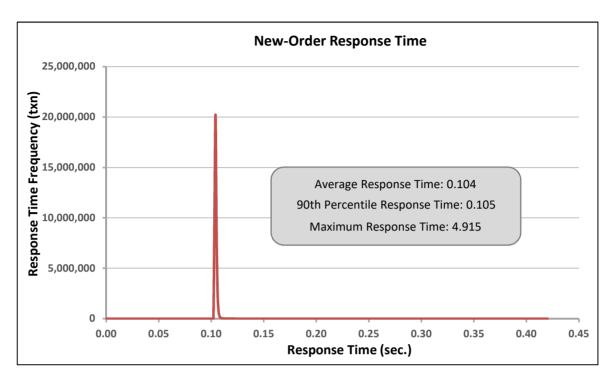


Figure 5.4.1.1: New-Order RT Frequency Distribution

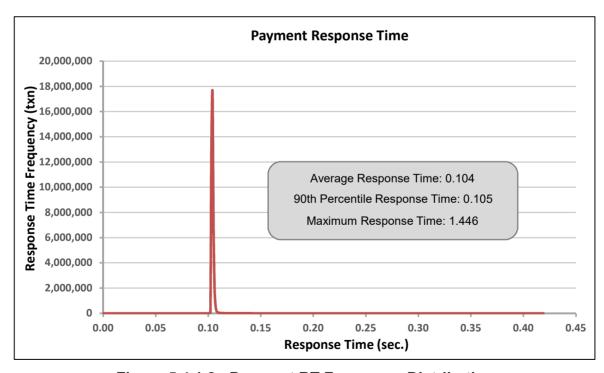


Figure 5.4.1.2: Payment RT Frequency Distribution

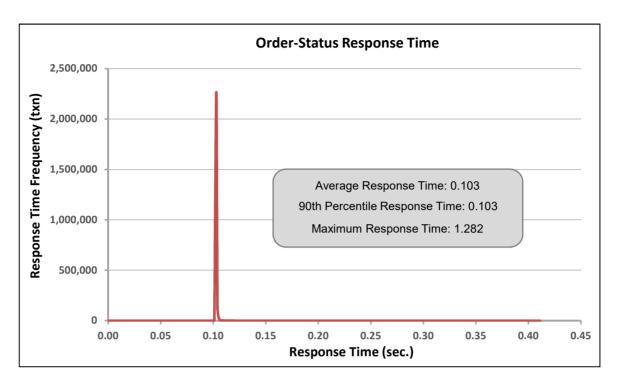


Figure 5.4.1.3: Order-Status RT Frequency Distribution

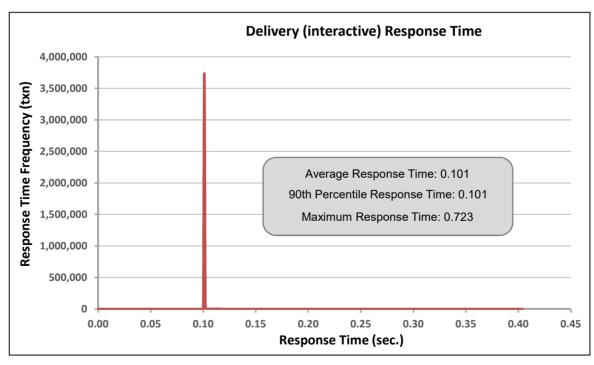


Figure 5.4.1.4: Delivery (Interactive) RT Frequency Distribution

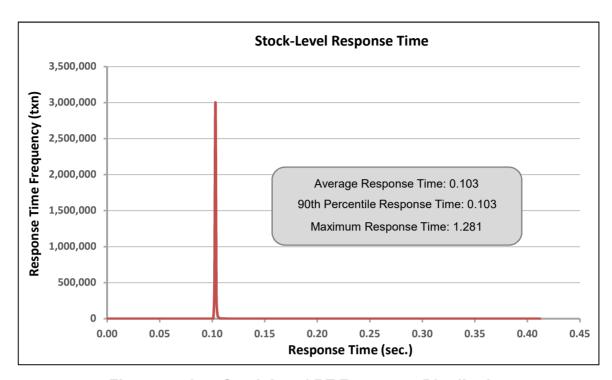


Figure 5.4.1.5: Stock-Level RT Frequency Distribution

5.4.2 Response Time versus throughput

The performance curve for response times versus throughput must be reported for the New-Order transaction.

Figure 5.4.2 shows the Response Time versus throughput curves for the New-Order transaction.

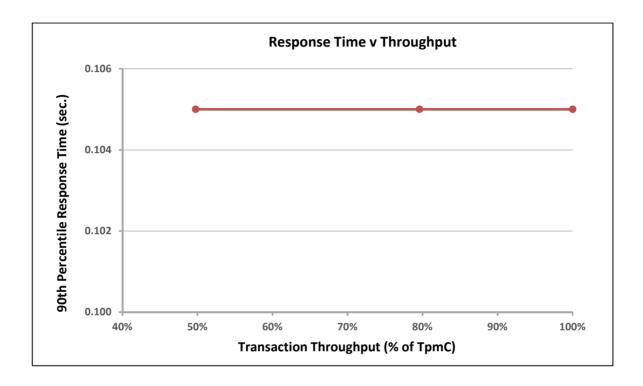


Figure 5.4.2: New-Order RT versus Throughput

5.4.3 Think Time frequency distribution

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for the New-Order transaction.

Figure 5.4.3 shows the Think Time frequency distribution curves for the New-Order transaction.

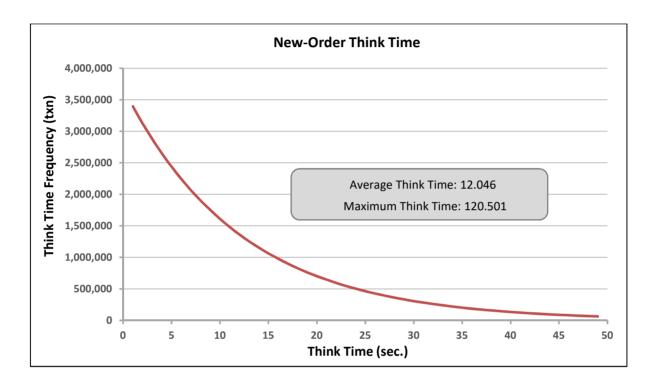


Figure 5.4.3: New-Order Think Time Frequency Distribution

5.4.4 Throughput versus elapsed time

A graph of throughput versus elapsed time must be reported for the New-Order transaction.

Figure 5.4.4 shows the throughput versus elapsed time for the New-Order transaction. The start and end of the Measurement Interval is included on the figure.

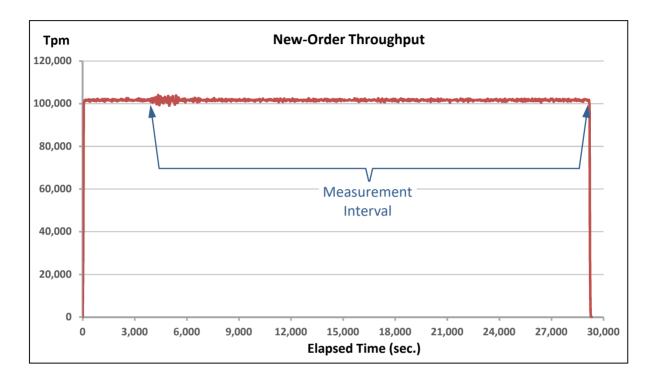


Figure 5.4.4: New-Order Throughput versus Elapsed Time

5.5 Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by a visual analysis of the throughput graph.

5.6 Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.) actually occurred during the measurement interval must be reported.

During the test, Goldilocks satisfied all of the ACID properties required by the benchmark specification. Committed transactions write a Redo record in the transaction log, to be used in case of system failure. The Redo records are used for roll-forward recovery during a re-start following a failure. This prevents the system from losing any committed transactions. Checkpoints periodically occurred about every 28 min. and are completed in about 7.5 min.

5.7 Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The duration of the reported measured interval was 7 hours (7hr = 420min = 25,200sec).

5.8 Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of skipped Delivery transactions must be disclosed.

The details of the transaction statistics are reported in the front of this report as part of the Executive Summary.

5.9 Checkpoints

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

Two full checkpoints occurred before the Measurement Interval. 14 full checkpoints occurred during the Measurement Interval. The checkpoints' start and end times and durations during the Measurement Interval are listed in table 5.6.

Table 5.6: Checkpoints

Event	Event time	Execution time	Interval
Measurement Interval Begin	2021-11-04 14:11:44	-	-
Checkpoint3 Begin	2021-11-04 14:20:55		00:26:11
Checkpoint3 End	2021-11-04 14:30:54	00:09:59	
Checkpoint4 Begin	2021-11-04 14:47:03		00:26:08
Checkpoint4 End	2021-11-04 14:57:02	00:09:59	
Checkpoint5 Begin	2021-11-04 15:13:15		00:26:12
Checkpoint5 End	2021-11-04 15:23:15	00:10:00	
Checkpoint6 Begin	2021-11-04 15:39:25		00:26:10
Checkpoint6 End	2021-11-04 15:49:26	00:10:01	
Checkpoint7 Begin	2021-11-04 16:05:36		00:26:11
Checkpoint7 End	2021-11-04 16:15:36	00:10:00	
Checkpoint8 Begin	2021-11-04 16:31:46		00:26:10
Checkpoint8 End	2021-11-04 16:41:47	00:10:01	
Checkpoint9 Begin	2021-11-04 16:57:57		00:26:11
Checkpoint9 End	2021-11-04 17:07:58	00:10:01	
Checkpoint10 Begin	2021-11-04 17:24:09		00:26:12
Checkpoint10 End	2021-11-04 17:34:09	00:10:00	
Checkpoint11 Begin	2021-11-04 17:50:20		00:26:11
Checkpoint11 End	2021-11-04 18:00:19	00:09:59	
Checkpoint12 Begin	2021-11-04 18:16:31		00:26:11
Checkpoint12 End	2021-11-04 18:26:28	00:09:57	
Checkpoint13 Begin	2021-11-04 18:42:41		00:26:10
Checkpoint13 End	2021-11-04 18:52:41	00:10:00	
Checkpoint14 Begin	2021-11-04 19:08:53		00:26:12
Checkpoint14 End	2021-11-04 19:19:18	00:10:25	
Checkpoint15 Begin	2021-11-04 19:35:05		00:26:12
Checkpoint15 End	2021-11-04 19:45:34	00:10:29	
Checkpoint16 Begin	2021-11-04 20:01:18		00:26:13
Checkpoint16 End	2021-11-04 20:12:04	01:03:11	
Checkpoint17 Begin	2021-11-04 20:27:29		00:26:11
Checkpoint17 End	2021-11-04 20:39:03	00:11:34	
Checkpoint18 Begin	2021-11-04 20:53:41		00:26:12
Checkpoint18 End	2021-11-04 21:04:59	00:11:18	
Measurement Interval End	2021-11-04 21:11:44	-	-

Clause 6: SUT, Driver and Communication

6.1 Remote Terminal Emulator (RTE)

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE software used was internally developed. The RTE simulated web users. It generated random input data based on the benchmark requirements and recorded response times and other statistics for each transaction cycle.

6.2 Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

No components were emulated by the driver system.

6.3 Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The diagram in Figure 0.1 shows the tested and priced benchmark configurations.

6.4 Networks

The network configuration of both the tested services and proposed (target) services which are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

The diagram in Figure 0.1 shows the network configuration between the components of the tested configuration. The RTE and the SUT are connected through a 1Gbit switch.

The network bandwidths are listed in Figure 0.1.

6.5 Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

No operator intervention is required to sustain eight hours at the reported throughput.

Clause 7: Pricing

7.1 Hardware and Software Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The details of the hardware and software are reported in the front of this report as part of the Executive Summary.

7.2 Three Year Price

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The pricing details for this TPC-C result are reported in the front of this report as part of the Executive Summary.

7.3 Availability Dates

The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

All components of the priced system are available as of the date of this publication.

Clause 8: Reporting

8.1 Full Disclosure Report

A Full Disclosure report is required in order for results to be considered compliant with the TPC-C benchmark specification

This document constitute the Full Disclosure Report for the TPC-C benchmark result describes within.

Clause 9: Auditor Attestation

9.1 Auditor Information

The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

This benchmark was audited by:

InfoSizing

Doug Johnson

63 Lourdes Drive

Leominster, MA, 01453 USA Phone: +1 (978) 343-6562

www.sizing.com

9.2 Attestation Letter

The auditor's attestation letter is included in the following pages.





Sejin Hwang Senior Research Engineer Telecommunications Technology Association (TTA) Bundang-ro 47, Bundang-gu, Seongnam-city Gyeonggi-do, 13591, Republic of Korea

December 16, 2021

I verified the TPC Benchmark[™] C v5.11.0 performance of the following configuration:

Platform: KTNF KR580S2

Operating System: Red Hat Enterprise Linux 7.9
Database Manager: Goldilocks v3.1 Standard Edition

The results were:

Performance Metric 101,550 tpmC

Number of Users 80,000

Server KTNF KR580S2

CPUs 2x Intel® Xeon® Gold 6354 (3.00 GHz, 18-core, 39 MB Cache)

Memory 1,024 GB

Storage Qty Size Type

1 480 GB SATA SSD

8 1.6 TB FMD SSD (External)

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark.

The following verification items were given special attention:

- The transactions were correctly implemented
- The database records were the proper size
- The database was properly scaled and populated
- The ACID properties were met
- Input data was generated according to the specified percentages
- · The transaction cycle times included the required keying and think times
- · The reported response times were correctly measured
- . At least 90% of all delivery transactions met the 80 Second completion time limit
- All 90% response times were under the specified maximums

63 Lourdes Dr. | Leominster, MA 01453 | 978-343-6562 | www.sizing.com

- · The measurement interval was representative of steady state conditions
- · The reported measurement interval was over 120 minutes
- · Checkpoint intervals were under 30 minutes
- · The 60-day storage requirement was correctly computed
- · The system pricing was verified for major components and maintenance

Additional Audit Notes:

None.

Respectfully Yours,

Doug Johnson, Certified TPC Auditor

Appendix A: Source Code

The source code and scripts used to implement the benchmark is provided as a soft appendix. This soft appendix includes the following files:

```
\ACID
   \ACID\include
   \ACID\src
   \ACID\include\acid.h
   \ACID\src\atom.c
   \ACID\src\compare.c
   \ACID\src\consist.c
   \ACID\src\Deliverv.c
   \ACID\src\isol1.c
   \ACID\src\isol2.c
   \ACID\src\isol3.c
   \ACID\src\isol4.c
   \ACID\src\isol5.c
   \ACID\src\isol6.c
   \ACID\src\isol7.c
   \ACID\src\isol8.c
   \ACID\src\isol9.c
   \ACID\src\Makefile
   \ACID\src\NewOrder.c
   \ACID\src\OrderStatus.c
   \ACID\src\Payment.c
   \ACID\src\support.c
\bin
   \bin\load.sh
\html
   \html\DeliveryInput.html
   \html\MainMenu.html
   \html\NewOrderInput.html
   \html\OrderStatusInput.html
   \html\PaymentInput.html
   \html\StockLevelInput.html
\include
   \include\spt proc.h
   \include\support.h
\java
   \java\Common.java
   \java\Delivery.java
   \java\NewOrder.java
   \java\OrderStatus.java
   \java\Payment.java
   \java\StockLevel.java
\scripts
   \scripts\analyze system.sql
   \scripts\analyze table.sql
   \scripts\analyze table district.sql
   \scripts\analyze table item.sql
   \scripts\analyze table new order.sql
   \scripts\analyze table orders.sql
   \scripts\analyze table order line.sql
```

```
\scripts\analyze table stock.sql
   \scripts\analyze table warehouse.sql
   \scripts\audit.sql
   \scripts\checkpoint.py
   \scripts\count.sql
   \scripts\create_audit_table.sql
   \scripts\create index.sql
   \scripts\create procedure.sql
   \scripts\create table.sql
   \scripts\create tablespace.sql
   \scripts\dbcheck.sql
   \scripts\dbtables.sql
   \scripts\runcheck.sql
   \scripts\sys
         \scripts\sys\be
            \scripts\sys\be\part info.sh
            \scripts\sys\be\reboot info.sh
             \scripts\sys\be\sw info.sh
            \scripts\sys\be\sys info.sh
\src
   \src\free_space.c
   \src\load.c
   \src\load new.c
   \src\Makefile
   \src\support.c
```

Appendix B: Tunable Parameters

goldilocks.properties.conf

```
TRANSACTION COMMIT WRITE MODE = 1
TRANSACTION TABLE SIZE = 1024
UNDO RELATION COUNT = 1024
LOG BUFFER SIZE = 3G
LOG FILE SIZE = 40G
LOG FILE SIZE = 40G
LOG FOUNT = 5
PENDING LOG BUFFER COUNT = 8
SPIN COUNT = 1
BUSY WAIT COUNT = 1000
SYSTEM TABLESPACE DIR = '/data/db/db1'
SYSTEM MEMORY UNDO TABLESPACE SIZE = 16G
SYSTEM MEMORY TEMP TABLESPACE SIZE = 16G
SYSTEM MEMORY TEMP TABLESPACE SIZE = 16
SYARED MEMORY TEMP TABLESPACE SIZE = 16
PARALLEI TO FACTOR = 5
PARALLEI TO FACTOR = 5
PARALLEI TO GROUP 1 = '/data/db/db1'
LOG DIR = '7wa1' -
LOEDIN TAX COUNT = 1024
PROCESS MAX COUNT = 1024
PARALLEI LOĀD FACTOR = 16
SHARED SESSION = NO
CONTROL FILE COUNT = 2
CONTROL FILE
```

limit.conf

```
/etc/security/limits.conf
   #
#This file sets the resource limits for the users logged in via PAM.
#It does not affect resource limits of the system services.
  #
#Also note that configuration files in /etc/security/limits.d
directory,
#which are read in alphabetical order, override the settings in this
#file in case the domain is the same or more specific.
#That means for example that setting a limit for wildcard domain here
#can be overriden with a wildcard setting in a config file in the
#subdirectory, but a user specific setting here can be overriden only
#with a user specific setting in the subdirectory.
     "
#Each line describes a limit for a user in the form:
                                                                                                     <type> <item> <value>
#Where:
#<a href="feet-align: center;">feet-align: center;</a>
# - a group name, with @group syntax
# - the wildcard *, for default entry
# - the wildcard *, can be also used with %group syntax,
# for maxlogin limit

**Trailues:**

 19]
                                                        - rtprio - max realtime priority
     #<domain>
                                                                                      <type> <item>
                                                                                                                                                            core
                                                                                                                                                                                                                                                             0
10000
                                                                                                                                                          rss
nproc
  #*
#@student
#@faculty
#@faculty
#ftp
                                                                                                       hard
soft
hard
hard
                                                                                                                                                          nproc
nproc
nproc
```

```
tpcc soft nofile 65535
tpcc hard nofile 65535
tpcc soft nproc 65535
tpcc hard nproc 65535
server.xml
<?xml version='1.0' encoding='utf-8'?>
<Context>
       <WatchedResource>WEB-INF/web.xml</WatchedResource>
<Resource
  name='jdbc/goldilocks'
  auth='Container'
  type='javax.sql.DataSource'
  driverClassName='sunje.goldilocks.jdbc.GoldilocksDriver'
  url='jdbc:goldilocks://10.100.50.85:22581/test'
  username='test'
  password='test'
  maxActive='10'
  maxIdle='10'
  maxWait='-1'
/>
 tm server fel.conf
<?xml version='1.0' encoding='utf-8'?>
<Server port="8005" shutdown="SHUTDOWN">
<Listener
<Listener
className="org.apache.catalina.startup.VersionLoggerListener" />
<!-- Security listener. Documentation at /docs/config/listeners.!
<Listener className="org.apache.catalina.security.SecurityListener</pre>
 -->
<!--APR library loader. Documentation at /docs/apr.html -->
<!--Initialize Jasper prior to webapps are loaded. Documentation at
/docs/jasper-howto.html -->
<!-- Prevent memory leaks due to use of particular java/javax APIs--


<Listener
className="org.apache.catalina.core.JreMemoryLeakPreventionListener"
</pre>
"/> <Listener className="org.apache.catalina.core.ThreadLocalLeakPreventionListener"/>
   <Service name="Catalina">
                                         t="8080"
acceptCount="150000"
maxConnections="141000"
connectionTimeout="20000000"
maxThreads="1024"
maxKeepAliveRequests="-1" keepAliveTimeout="-
protocol="org.apache.coyote.http11.Http11NioProtocol"redirectPort="8443"
       <Connector port="8009" protocol="AJP/1.3" redirectPort="8443" />
       <Engine name="Catalina" defaultHost="localhost">
          <Realm className="org.apache.catalina.realm.LockOutRealm">
          <Realm className="org.apache.catalina.realm.UserDatabaseRealm"
resourceName="UserDatabase"/>
</Realm>
          <Host name="localhost" appBase="webapps"
unpackWARs="true" autoDeploy="true">
</Host>
</Engine>
</Service>
</Server>
```

maxlogins

#@student

Appendix C: Price Quotations

DB Server

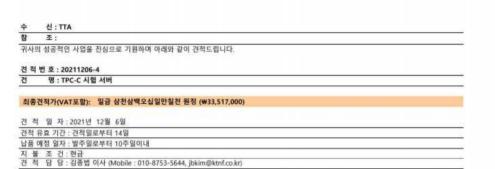



주식회사 케이티엔에프 서울시 강서구 마곡중앙 8로 3길 21

TEL: 02-865-5200, FAX: 02-3661-3377

등록번호	106-86-07697	
대표이사	이 중 연	
업 태	제 조	
종 목	컴퓨터제조	

구분	파트번호	ガ호 규 격		수량 소비자가		공급가	
TE	Part Number	Specification	Q'ty	단가	합계	단가	함계
R580S2 (18C 3.0GHz x2	P / 1TB RAM /	480GB SATA SSD x1 / 1P 1G RJ-45 (onboard) / 2P 16G FC HBA x1 / 1300W x2 / Rail)	1			30,470,000	30,470,000
	SYS	2U-12Bay, FH Riser (3slots PCIe Gen4.0 x16, x8, x8) x2, OCP3.0 slot x1, 1P 1G RJ-45, 1300W x2, Rail	1				
KTNF KR580S2 Server	CPU	Intel Xeon Gold 6354 Processor (18C/36T 3.0GHz, 39MB, 205W)	2				
	RAM	32GB DDR4 3200 RDIMM memory	32				
	SSD	삼성 480GB, 2.5" SATA SSD	1				
	HRA	Emulex Dual port 16Ghps FC HRA Adapter	- 1				
	Mainterance	3year, 24x7x4hr Onsite Support Service	3				
APP ICEPSA							
emarks 상기 제품은 대외무역법 제	19조 제1항에 따라	전략물자에 해당되며, 해외수출시 대외무역법에 따라 전략물자 기술 수출입 통합고시에서 규정하는				공급가 합계	₩ 30,470,000
허가기관의 장으로부터 수 본 제품은 제2자에게 어디		바랍니다. 2. 해당 제3자에게 상기에 언급한 의무사항들을 사전에 충분히 고지하시기 바랍니다.				VAT	w 3,047,000
OS, SW 별도입니다.	AC 4048 01	· 제 6 개3석에(R. 9억)에 된본한 선구선 6로운 선당에 충효성 소설역식간 역분에서:				최종 공급가	W 33,517,000
						(VAT포함)	W 33,517,000

적

WAS Server

견 적 서

견적일	HSR 2021-12-13 -001		업체명	(취한성 6 A
수신업체	한국정보통신기술협회		대표자	2 北北北
담당자	서병준 님	공	사업자등록번호	106-86-1
연락처	sbj8388@tta.or.kr	공 급 자	업태 / 종목	제조,서비스 / 컴퓨터 및 주변기기
유효기간	견적 후 7일		사업장 소재지	서울특별시 강서구 마곡중앙8로7길 35 (마곡동,한성타워)
납기 / 지급조건	협의 후 결정 / 현금(선입금)		담당자 / 연락처	김신영 이사 / 010-4358-0113

품명		상세스펙	수량	공급가 (VAT포함)
	모델명	DT-S170G1IV0		
	식별번호	24110096		
	CPU	Intel Core i7 10700K(3.8Ghz Up to 5.1Ghz / 16M / 8Core / 16Thread)		
	MainBoard	H410 칩셋		
	RAM	DDR4 32GB		
데스크톱컴퓨터	HDD	2TB (7200RPM - 3.5혐)		1,551,000
	SSD	512GB (M.2)		
	NET	2-port 10G 이더넷 컨트롤러	4	
	CASE	Middle 2 CASE (6861)		
	PSU	ATX 500W		
	기타	키보드, 마우스, 마우스패드		
	os	N/A		64
옵션품목	ODD	N/A		-
(별도선택)	Card Reader	N/A		-
	설치	미설치		-
총 합계		(VAT 포함)	₩	6,204,000
담당자 정보	* 담당자: 행망영업팀 * 직통번호: 070-759 * 휴대폰번호: 010-4 * E-mail: young@ha	95-7176 358-0113		
특이사항	* 1년 무상보증			

UNIWIDE

Quotation

전 적 일 자: UWT21 - 11 -0025 수 신: 한국정보통신기술협회 납 품 일 자: 고객 요청 시, 견적유효기간: 견적 후 7일 결 제 조 건: 납품 후 즉시 현금 무상유지보수: 3년 UNIWIDE Technologies, Inc.

서울시 구로구 디지털로26길5, 717~718호 (에이스하이엔드타워 1차)

대표이사 : 우 종 운 TEL : 070-7306-0500 FAX : 02-866-0037

공 급 금 액: 129,800,000

0,000 원(부가세 별도

모 델: FCH2800

Sales Manager

영 업 대 표 : 유통사업팀 / 김창환 팀장

전 화 번 호 : 070-7306-0550 휴 대 전 화 : 010-8335-1686

이 메 일: chkim@uniwide.co.kr

e.co.ki	chkim@uniwid	이 메일:		FCH2800	고 말:
공급합가	공급단가	도입수량	수량	제품명	PART NUMBER
			1	All Flash Storage - FCH2800	FCH2800
			1	FCH2800 Controller Device	T0001-0117-00
			1	Back-end Bus Adapter 12G SAS	T0001-0117-01
			4	16G 8-Port Host Bus Adapter	T0001-0117-02
			1	Cache Interconnect Adapter	T0001-0117-03
₩72,2 <mark>5</mark> 0,0 <mark>0</mark>	72,250,0 <mark>0</mark> 0	1	16	Cache Memory DDR-3 (32GB)	T0001-0117-04
		848	1	FCH2800 Flash Disk Drive Expantion Unit	T0001-0117-05
			1	FCH2800 controller cpu Board	T0001-0117-06
			1	Rack 600x1200x2010 mm (WxDxH) 42U	T0001-0117-07
			1	Storage Management SW	T0001-0117-08
			1	UTP CAT5e Ethernet Cable 1M	61001-0001-00
	55 B		2	Power Cord, NICETECH, 2.5M	42119-0005-00
₩31,200,00	3,900,000	8	1	1.6TB Flash Memory Disk Drive	T22601-0117-03
₩26,350,00	26,350,000	319	1	3-yrs 24x7x4hrs Onsite Support Service	
₩ 129,800,000				제 안 가	
₩12,980,000				부 가 세	
₩142,780,000				부 가 세 포 함 가	
₩142,780,000			랍니다.	부가세포함가 시다면 명판 및 직인을 날인하시어 팩스를 송부하여 주시기	· 발주를 진행하고 싶으

RHEL/JWS



㈜락플레이스 135-120 서울시 강남구 선사동 634-10 울당빌딩 3층 Tel.02)6251.7788 Fax.02)6251.6677

rockPLACE, Inc.

3F, Yundang bldg, 634-10, Shins m-gu, Seoul, Korea Tel : 822-6251-7788 Fax: 822-6251-6677

적 견 서

REF No. : 2021RP11-2903

DATE : 2021. 11. 29. COMPANY : TTA

: 최기한 선임연구원님 귀하 TEL : 031-780-9256 ATTN Email

: kihanc@tta.or.kr FROM Email

: ㈜락플레이스 이왕모 과장 TEL : 010-9116-4680 : wmlee@rockplace.co.kr

유지보수 : 납품일로부터 1년 결제조건 : 익월말 현금 유효기간 : 건적일로부터 4개월

下記와 같이 見積합니다.

㈜ 락플레이스 대표이사 서 동 식

TERMS AND CONDITION

납 기 : 발주후 4주이내

Part No.	Description	수량	소비자가	공급단가	공급합계
OS	Red Hat Enterprise Linux Operating System Platform				
RH00004F3	Red Hat Enterprise Linux Server, Standard (Physical or Virtual Nodes) 3Year support : Easy ISOs: OS, Source, Documentation ISO Images 기상화 Guest OS : 2 guests Red Hat Network 서비스 : 3년 Phone,email Support : 09:00 — 17:00 Scope of Coverage : Standard Maximum Memory Support: Unlimited	3	4,098,000	2,400,000	7,200,000
경간기술지원	연간 방문 기술지원 (옵션)				
RP-CPS(OS)	rockPLACE Support Carepack - Linux Standard (3년) per Server 3 Year, 24x7, 4hr response 이메일, 전화, 원격자원, 현장자원 서비스 On Site Support - Total 연간 10회 Support (아래 지원내역에 준함) - Installation & Startup Service Included - Problem tracking/Emergency assistance - Update, Patch 작업 지원 - 서비스, 시스템 환경, 네트워크 환경 설정 변경 지원 - 인수 시험, 성능 사업, 비상 복구 용견 지원	3	6,000,000	2,000,000	6,000,000
	소계금액	70 D		7	13,200,00

Part No.	Description	수량	소비자가	공급단가	공급합계
WEB	Red Hat JBoss Web Server			2	************
MW00123F3	Red Hat JBoss Web Server, 4-Core Standard 3Year - 전화/캠 지원 : 월-급, 9 a.m 5 p.m. 4시간내 용답 - unlimited incidents,	4	2,144,000	1,260,000	5,040,000
연간기술지원	연간 방문 기술지원 (옵션)				
RP-CPS(WAS)	rockPLACE Support Carepack - JBoss Standard (3년) per 4Core 3 Year, 24x7, 4hr response 이메일, 전화, 원격지원, 현장지원 서비스 On Site Support - Total 10회 Support (아래 지원내역에 준함) - Installation & Startup Service Included - Problem tracking/Emergency assistance - Update, Patch 작업 지원 - 서비스, 시스템 환경, 네트워크 환경 설정 변경 지원 - 인수 시험, 성능 시험, 비상 복구 훈련 지원	4	12,000,000	6,000,000	24,000,000
	소계 금액	- 16 k			29,040,000

합계	42,240,000
부가세	4,224,000
합 계(부가세포함)	46,464,000

_		_		7.	=
- 7	Vе	m	aı	K5	

1. Red Hat 제품은 년간 Subscription 제품이며, 기간이 만료되실 경우 Renewal을 하셔야합니다. OnSite 방문지원이 필요하실 경우에는 케어팩을 구매하셔야 합니다.

Network Switch

상품상세정보



화대보기

김대 수량:

네트워크스위치

업체명: 주식회사엔에스지[중소기업] 계약자/공급자정보조회

계약방법: 다수공급자계약

규격명: 네트워크스위치, 유비쿼스, uSafe3010-24T, 24port (공급)

가격: 1,900,000 원

다량납품할인을 확인

Price

원산지: 대한민국

주요부품1[원산지]: Firmware[대한민국]

주요부품2[원산지]: Main Board[대한민국]

제조사: (주)유비쿼스

납품장소: 수요기관 지정장소

인도조건: 현장설치도

공급지역: 전지역

부가세여부: 부가가치세포함

계약기간: 2017/08/24 ~ 2022/08/23

납품기한: 60일 (납품요구일로부터)

조달수수료여부: 조달수수료 별도 조달수수료 안내·계산

첨부파일: 2018/02/01_00176118204-(계약예규)물품구매(제조)계약일반

조건(기재부예규제328호20161230).hwp

2018/02/02_00176118204-다수공급자계약특수조건(조달청공

고2017-73호,2017.7.14).hwp

2018/02/03_00176118204-물품구매계약품질관리특수조건

(2017.8.28.).hwp

2018/02/04_00176118204-엔에스지_규격서(2017.08).zip

대분류: 09 - 전자/정보/통신/영상

중분류: 07 - 음향장비 및 신호장치

물품분류번호: 43222612

세부품명번호: 4322261201

물품식별번호: 22917889

계약번호: 00176118204-9

징수구분: 후징수

DBMS

Quotation

丹TTA 貴中

Title: TPC-C Performance&Quality Authentication

참 조 : 황 세진 선임연구원 견적일자 : 2021년 11월 29일 유효기간 : 견적일로부터 4개월



대표이사:김기완 (인)

주 소 : 서울시 영등포구 당산로 171 금강펜테리움IT타워 604호 영업대표 : 사업본부 최승렬 이사

전화번호 : 010-9312-0188 e-mail : slchoi@sunjesoft.com

* Goldilocks Standard Edition for LINUX 1식

(단위:원)

₩46,400,000

No.	Description	Unit List Price	Q'ty	Total Amount Price	Offer Price
	Goldilocks Ver 3.1 DBMS Standard Edition	₩96,000,000	1 Set(s)	₩96,000,000	₩32,000,000
	- Query Processes Module	Ī			
1	- Storage Management Module				
	Goldilocks DBMS License Fee	- 1	icense Prop	posal Price	₩32,000,000
3	DBMS Implementaion & Supports	*10,000,000	3 Set(s)	₩30,000,000	₩14,400,000
2					
	Goldilocks Technical Supports Fee(3yr)	Sı	upport Pro	posal Price	₩14,400,000
	Total Amount(VAT Exclu	ide)		₩ 126,000,000	₩46,400,000

* For Technical supports, it indicates 24 x 7 x 4 hours of support

Goldilocks Total Amount (Offer Price)