

TPC Express Benchmark™ IoT
Full Disclosure Report
for
Dell PowerEdge R6415

(with 4x Dell PowerEdge R6415 Servers)

Using

HBase 2.0.0 on
Cloudera Distribution for Apache Hadoop
Enterprise Edition 6.0
and
Red Hat Enterprise Linux Server Release 7.5

TPCx-IoT Version

V1.0.3

Report Edition

First

Report Submitted

November 30, 2018

First Edition - November 2018

Dell Inc. (Dell), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary because of these and other factors. Therefore, the TPC Express Benchmark™ V should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.


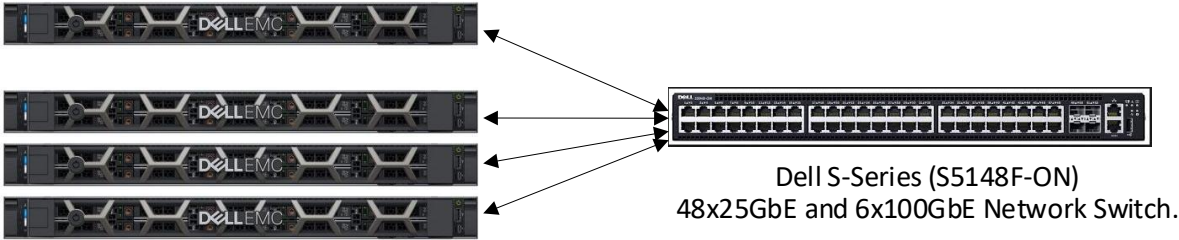
Dell and the Dell Logo are trademarks of Dell Inc. and/or its affiliates in the U.S. and other countries. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Dell and any other company

TPC Express Benchmark™ IoT, TPCx-IoT, and IoTps, are registered certification marks of the Transaction Processing Performance Council.


The Dell products, services or features identified in this document may not yet be available or may not be available in all areas and may be subject to change without notice. Consult your local Dell business contact for information on the products or services available in your area. You can find additional information via Dell's web site at www.dell.com. Actual performance and environmental costs of Dell products will vary depending on individual customer configurations and conditions.


Copyright© 2018 Dell Inc.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

		Dell PowerEdge R6415		TPCx-IoT v1.0.3
				TPC-Pricing v2.3.0
				Report Date: Nov 30, 2018
Total System Cost		TPCx-IoT Performance Metric		Price/Performance
129,663 USD		165,054 IoTps		0.79 USD \$/IoTps
Number of Records	DBMS Software	Operating System	Other Software	Availability Date
300 Million	HBase 2.0.0 on Cloudera Distribution for Apache Hadoop 6.0	Red Hat Enterprise Linux Server Release 7.5	None	Nov 30, 2018
System Configuration				
<p>1x Dell PowerEdge R6415 Server (Master Node) 1x AMD EPYC 7401P 24-Core Processor 256 GB (8x 32GB RDIMM 2666MT/s Dual Rank) 1x 120GB SSD SATA 2.5in Hot-plug Drive 1x Mellanox Dual Port 25GbE SFP28 NIC</p>  <p>3x Dell PowerEdge R6415 Servers (Data Nodes) 1x AMD EPYC 7401P 24-Core Processor 256 GB (8x 32GB RDIMM 2666MT/s Dual Rank) 1x 120GB SSD SATA 2.5in Hot-plug Drive 1x 1.6 TB Dell NVMe 1x Mellanox Dual Port 25GbE SFP28 NIC</p> <p>Dell S-Series (S5148F-ON) 48x25GbE and 6x100GbE Network Switch.</p>				
Total Number of Servers:		4x Dell PowerEdge R6415		
Total Processors/Cores/Threads:		4/96/192		
Server Configuration (each)	Processors	1x AMD EPYC 7401P 2.0GHz 24-Core		
	Memory	256GB		
	Storage Controller	Perc H740P		
	Storage Device	1x 120GB SSD SATA (all nodes) 1x Dell 1.6TB NVMe (Data Nodes)		
	Network	1x Mellanox Dual Port 25GbE SFP28 NIC		
	Connectivity:	Dell S-Series (S5148F-ON) Network Switch		
Total Rack Units:		(4xR6415) + (1xS5148F) = (4x1) + (1x1) = 15RU		

	<h1>Dell PowerEdge R6415</h1>		TPCx-IoT v1.0.3					
			TPC-Pricing v2.3.0					
			Report Date: Nov 30, 2018					
Description			Part Number	Key	Unit Price	Qty	Extended Price	3yr. Maint. Price
HARDWARE COMPONENTS								
PowerEdge R6415 Server			210-ANJ0	1	\$925.00	3	\$2,775.00	
PowerEdge R6415/R7415 Motherboard			384-BBSR	1	\$0.00	3	\$0.00	
No Trusted Platform Module			461-AABZ	1	\$0.00	3	\$0.00	
2.5" Chassis with up to 10 Hard Drives, including up to 8 SAS/SATA or 9 NVME Drives			321-BDFY	1	\$100.00	3	\$300.00	
PowerEdge R6415 Shipping			340-BTFM	1	\$0.00	3	\$0.00	
PowerEdge R6415 x4 or x10 Drive Shipping Material			343-BBGL	1	\$99.00	3	\$297.00	
AMD EPYC™ 7401P 2.0GHz/2.8GHz, 24C/48T, 64M Cache (155W/170W) DDR4-2400/2666			338-BNCT	1	\$1,849.00	3	\$5,547.00	
Standard Heatsink			412-AALH	1	\$19.00	3	\$57.00	
2666MT/s RDIMMs			370-ADNU	1	\$0.00	3	\$0.00	
Performance Optimized			370-AAIP	1	\$0.00	3	\$0.00	
Unconfigured RAID			780-BCDS	1	\$0.00	3	\$0.00	
PERC H740P RAID Controller, 8GB NV Cache, Mini card			405-AAMS	1	\$1,049.00	3	\$3,147.00	
Red Hat Enterprise Linux Non Factory Install,x64,Req Lic&Sub Selection			421-4727	1	\$0.00	3	\$0.00	
iDRAC9,Enterprise			385-BBKT	1	\$489.00	3	\$1,467.00	
iDRAC Group Manager, Disabled			379-BCQY	1	\$0.00	3	\$0.00	
iDRAC,Factory Generated Password			379-BCSF	1	\$0.00	3	\$0.00	
Riser Config 1, 2 x 16 LP			330-BBIV	1	\$149.00	3	\$447.00	
On-Board LOM			542-BBBP	1	\$0.00	3	\$0.00	
No Internal Optical Drive			429-AAIQ	1	\$0.00	3	\$0.00	
Dual, Hot Plug, Redundant Power Supply (1+1), 550W			450-AGZB	1	\$559.00	3	\$1,677.00	
No Bezel			350-BBBW	1	\$0.00	3	\$0.00	
Dell EMC Luggage Tag			350-BBME	1	\$0.00	3	\$0.00	
No Quick Sync			350-BBKR	1	\$49.00	3	\$147.00	
Performance BIOS Settings			384-BBBL	1	\$0.00	3	\$0.00	
UEFI BIOS Boot Mode with GPT Partition			800-BBDM	1	\$0.00	3	\$0.00	
ReadyRails Sliding Rails With Cable Management Arm			770-BCKT	1	\$189.00	3	\$567.00	
No Systems Documentation, No OpenManage DVD Kit			631-AACK	1	\$0.00	3	\$0.00	
US Order			332-1286	1	\$0.00	3	\$0.00	
Dell Hardware Limited Warranty Plus On-Site Service			816-0779	1	\$200.00	3		\$600.00
ProSupport Mission Critical: 7x24 HW / SW Technical Support and Assistance, 3 Years			816-0796	1	\$1,438.00	3		\$4,314.00
ProSupport Mission Critical: 4-Hour 7x24 On-Site Service with Emergency Dispatch, 3 Years			816-0784	1	\$262.00	3		\$786.00
Thank you choosing Dell ProSupport. For tech support, visit //www.dell.com/support or call 1-800- 945-3355			989-3439	1	\$0.00	3		\$0.00
On-Site Installation Declined			900-9997	1	\$0.00	3		\$0.00
32GB RDIMM 2666MT/s Dual Rank			370-ADNF	1	\$1,209.00	24	\$29,016.00	
120GB SSD SATA Boot 6Gbps 512n 2.5in Hot-plug Drive, 1 DWPD, 219 TBW			400-ASEG	1	\$249.00	3	\$747.00	
Dell 1.6TB, NVMe, Mixed Use Express Flash, 2.5 SFF Drive, U.2, PM1725a with Carrier			400-AUMP	1	\$3,379.00	3	\$10,137.00	
Mellanox ConnectX-4 Lx Dual Port 25GbE SFP28 Network Adapter, Low Profile			406-BBLD	1	\$749.00	3	\$2,247.00	
C13 to C14, PDU Style, 12 AMP, 6.5 Feet (2m) Power Cord, North America			492-BBDI	1	\$20.00	6	\$120.00	
Dell EMC S5148F-0N Switch,48x 25GbE,6x 100GbE QSFP28, 10 to PSU,2 PSU,0S10			210-ANCK	1	\$21,578.00	1	\$21,578.00	
OS10 Enterprise S5148F-0N			634-BMIF	1	\$0.00	1	\$0.00	
Dell Networking, Cable, SFP28 to SFP28, 25GbE, Passive Copper Twinax Direct Attach Cable, 2 Meter			470-ACET	1	\$215.00	1	\$215.00	
Dell EMC S5148 Series User Guide			343-BBFV	1	\$6.00	1	\$6.00	
US No Canada Ship Charge			332-1286	1	\$0.00	1	\$0.00	
Force10, Power Cord, 125V, 15A, 10 Feet, NEMA 5-15/C13, S-Series			450-AAFH	1	\$40.00	1	\$40.00	
Dell Hardware Limited Warranty 1 Year			814-8268	1	\$422.00	1	\$422.00	
Thank you choosing Dell ProSupport. For tech support, visit //www.dell.com/support or call 1-800- 945-3355			989-3439	1	\$0.00	1	\$0.00	
Dell Limited Hardware Warranty Extended Year(s)			975-3461	1	\$0.00	1		\$0.00
Mission Critical Package: 4-Hour 7X24 On-Site Service with Emergency Dispatch, 2 Year Extended			814-8278	1	\$423.00	1		\$423.00
ProSupport: 7x24 HW / SW Tech Support and Assistance, 3 Year			814-8288	1	\$5,956.00	1		\$5,956.00
Info 3rd Party Software Warranty provided by Vendor			997-6306	1	\$0.00	1		\$0.00
Mission Critical Package: 4-Hour 7X24 On-Site Service with Emergency Dispatch, 1 Year			814-8277	1	\$111.00	1		\$111.00
On-Site Installation Declined			900-9997	1	\$0.00	1		\$0.00
APC NetShelter SX 24U 600mm x 1070mm Deep Enclosure			A7067508	1	\$1,079.99	1	\$1,079.99	
Rack PDU, Basic, Zero U, 15A, 120V, 5-15 input, (14) 5-15 output			A7541364	1	\$174.99	1	\$174.99	
Logitech MK120 Keyboard and Mouse			A6999510	1	\$15.99	1	\$15.99	
Dell 24 Monitor			210-AIWG	1	\$169.99	1	\$169.99	
Subtotal							\$82,396.96	\$12,190.00

	<h1>Dell PowerEdge R6415</h1>	TPCx-IoT v1.0.3								
		TPC-Pricing v2.3.0								
		Report Date: Nov 30, 2018								
Description				Part Number	Key	Unit Price	Qty	Extended Price	3yr. Maint. Price	
PowerEdge R6415 Server				210-ANJ0	1	\$925.00	1	\$925.00		
PowerEdge R6415/R7415 Motherboard				384-BBSR	1	\$0.00	1	\$0.00		
No Trusted Platform Module				461-AADZ	1	\$0.00	1	\$0.00		
2.5" Chassis with up to 10 Hard Drives, including up to 8 SAS/SATA or 9 NVME Drives				321-BDFY	1	\$100.00	1	\$100.00		
PowerEdge R6415 Shipping				340-BTFM	1	\$0.00	1	\$0.00		
PowerEdge R6415 x4 or x10 Drive Shipping Material				343-BBGL	1	\$99.00	1	\$99.00		
AMD EPYC™ 7401P 2.0GHz/2.8GHz, 24C/48T, 64M Cache (155W/170W) DDR4-2400/2666				338-BNCT	1	\$1,849.00	1	\$1,849.00		
Standard Heatsink				412-AALH	1	\$19.00	1	\$19.00		
2666MT/s RDIMMs				370-ADNU	1	\$0.00	1	\$0.00		
Performance Optimized				370-AAIP	1	\$0.00	1	\$0.00		
Unconfigured RAID				780-BCDS	1	\$0.00	1	\$0.00		
PERC H740P RAID Controller, 8GB NV Cache, Mini card				405-AAMS	1	\$1,049.00	1	\$1,049.00		
Red Hat Enterprise Linux Non Factory Install,x64,Req Lic&Sub Selection				421-4727	1	\$0.00	1	\$0.00		
iDRAC9,Enterprise				385-BBKT	1	\$489.00	1	\$489.00		
iDRAC Group Manager, Disabled				379-BCQY	1	\$0.00	1	\$0.00		
iDRAC,Factory Generated Password				379-BCSF	1	\$0.00	1	\$0.00		
Riser Config 1, 2 x 16 LP				330-BBIV	1	\$149.00	1	\$149.00		
On-Board LOM				542-BBBP	1	\$0.00	1	\$0.00		
No Internal Optical Drive				429-AAIQ	1	\$0.00	1	\$0.00		
Dual, Hot Plug, Redundant Power Supply (1+1), 550W				450-AGZB	1	\$559.00	1	\$559.00		
No Bezel				350-BBBW	1	\$0.00	1	\$0.00		
Dell EMC Luggage Tag				350-BBME	1	\$0.00	1	\$0.00		
No Quick Sync				350-BBKR	1	\$49.00	1	\$49.00		
Performance BIOS Settings				384-BBBL	1	\$0.00	1	\$0.00		
UEFI BIOS Boot Mode with GPT Partition				800-BBDM	1	\$0.00	1	\$0.00		
ReadyRails Sliding Rails With Cable Management Arm				770-BCKT	1	\$189.00	1	\$189.00		
No Systems Documentation, No OpenManage DVD Kit				631-AACK	1	\$0.00	1	\$0.00		
US Order				332-1286	1	\$0.00	1	\$0.00		
Dell Hardware Limited Warranty Plus On-Site Service				816-0779	1	\$200.00	1		\$200.00	
ProSupport Mission Critical: 7x24 HW / SW Technical Support and Assistance, 3 Years				816-0796	1	\$1,438.00	1		\$1,438.00	
ProSupport Mission Critical: 4-Hour 7x24 On-Site Service with Emergency Dispatch, 3 Years				816-0784	1	\$262.00	1		\$262.00	
Thank you choosing Dell ProSupport. For tech support, visit //www.dell.com/support or call 1-800- 945-3355				989-3439	1	\$0.00	1		\$0.00	
On-Site Installation Declined				900-9997	1	\$0.00	1		\$0.00	
32GB RDIMM 2666MT/s Dual Rank				370-ADNF	1	\$1,209.00	8	\$9,672.00		
120GB SSD SATA Boot 6Gbps 512n 2.5in Hot-plug Drive, 1 DWPD, 219 TBW				400-ASEG	1	\$249.00	1	\$249.00		
Mellanox ConnectX-4 Lx Dual Port 25GbE SFP28 Network Adapter, Low Profile				406-BBLD	1	\$749.00	1	\$749.00		
C13 to C14, PDU Style, 12 AMP, 6.5 Feet (2m) Power Cord, North America				492-BBDI	1	\$20.00	2	\$40.00		
Sub Total								\$16,186.00	\$1,900.00	
HARDWARE COMPONENTS								Subtotal	\$98,582.96	\$14,090.00
SOFTWARE COMPONENTS										
Cloudera Enterprise Operational DB Edition, Node License, 24x7, 1YR				CE0DN-GOLD	1	\$6,000.00	12		\$72,000.00	
Red Hat Enterprise Linux,1-2SKT,3yr Premium Subscription,1 Virtual Guest				421-5721	1	\$3,702	4		\$14,808.00	
SOFTWARE COMPONENTS								Subtotal	\$0.00	\$86,808.00
Total								\$98,582.96	\$100,898.00	
Large Purchase Discount (35%)*								-34,504.04	-35,314.30	
Pricing: 1 Dell EMC * Discount based upon total system cost as purchased by a regular customer.		Three-Year Cost of Ownership:						\$129,663		
		IoTps:						165,054.36		
		\$ / IoTps:						\$0.79		
<p>Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org.</p>										

	Dell PowerEdge R6415	TPCx-IoT	v1.0.3														
		TPC-Pricing	v2.3.0														
		Report Date:	Nov 30, 2018														
Measurement Results for Performance Run																	
<table><tr><td>Total Number of Records</td><td>300 Millions</td></tr><tr><td>Warmup Run - Start Time</td><td>2018-10-23 23:30:41</td></tr><tr><td>Warmup Run - End Time</td><td>2018-10-24 00:05:29</td></tr><tr><td>Warmup Run Elapsed Time in Seconds</td><td>2,088.092</td></tr><tr><td>Measured Run Start Time</td><td>2018-10-24 00:05:30</td></tr><tr><td>Measured Run End Time</td><td>2018-10-24 00:35:48</td></tr><tr><td>Total Time In Seconds</td><td>1,817.583</td></tr></table>				Total Number of Records	300 Millions	Warmup Run - Start Time	2018-10-23 23:30:41	Warmup Run - End Time	2018-10-24 00:05:29	Warmup Run Elapsed Time in Seconds	2,088.092	Measured Run Start Time	2018-10-24 00:05:30	Measured Run End Time	2018-10-24 00:35:48	Total Time In Seconds	1,817.583
Total Number of Records	300 Millions																
Warmup Run - Start Time	2018-10-23 23:30:41																
Warmup Run - End Time	2018-10-24 00:05:29																
Warmup Run Elapsed Time in Seconds	2,088.092																
Measured Run Start Time	2018-10-24 00:05:30																
Measured Run End Time	2018-10-24 00:35:48																
Total Time In Seconds	1,817.583																
Measurement Results for Repeatability Run																	
<table><tr><td>Total Number of Records</td><td>300 Millions</td></tr><tr><td>Warmup Run Start Time</td><td>2018-10-23 22:14:35</td></tr><tr><td>Warmup Run End Time</td><td>2018-10-23 22:55:29</td></tr><tr><td>Warmup Run Elapsed Time in Seconds</td><td>2,453.423</td></tr><tr><td>Measured Run Start Time</td><td>2018-10-23 22:55:29</td></tr><tr><td>Measured Run End Time</td><td>2018-10-23 23:25:34</td></tr><tr><td>Total Time In Seconds</td><td>1,804.289</td></tr></table>				Total Number of Records	300 Millions	Warmup Run Start Time	2018-10-23 22:14:35	Warmup Run End Time	2018-10-23 22:55:29	Warmup Run Elapsed Time in Seconds	2,453.423	Measured Run Start Time	2018-10-23 22:55:29	Measured Run End Time	2018-10-23 23:25:34	Total Time In Seconds	1,804.289
Total Number of Records	300 Millions																
Warmup Run Start Time	2018-10-23 22:14:35																
Warmup Run End Time	2018-10-23 22:55:29																
Warmup Run Elapsed Time in Seconds	2,453.423																
Measured Run Start Time	2018-10-23 22:55:29																
Measured Run End Time	2018-10-23 23:25:34																
Total Time In Seconds	1,804.289																



Dell PowerEdge R6415

TPCx-IoT	v1.0.3
TPC-Pricing	v2.3.0
Report Date:	Nov 30, 2018

Run Report for Performance Run

```
=====
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,088.09
Total Time In Seconds = 1,817.58
Total Number of Records = 300 Millions

TPCx-IoT Performance Metric (IoTps): 165,054.36
=====
```

Run Report for Repeatability Run

```
=====
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,453.42
Total Time In Seconds = 1,804.28
Total Number of Records = 300 Millions

TPCx-IoT Performance Metric (IoTps): 166,270.48
=====
```

Table of Contents

ABSTRACT	9
PREFACE	10
CLAUSE 1: GENERAL ITEMS.....	11
1.1 TEST SPONSOR	11
1.2 PARAMETER SETTINGS	11
1.3 CONFIGURATION DIAGRAMS	11
1.4 DATASET DISTRIBUTION.....	13
1.5 SOFTWARE COMPONENTS DISTRIBUTION.....	13
CLAUSE 2: WORKLOAD RELATED ITEMS.....	14
2.1 HARDWARE & SOFTWARE TUNABLE	14
2.2 RUN REPORT	14
2.3 BENCHMARK KIT IDENTIFICATION.....	15
2.4 BENCHMARK KIT CHANGES	15
CLAUSE 3: SCALE FACTORS AND METRICS	16
3.1 TOTAL RUN TIME	16
3.2 PERFORMANCE AND PRICE PERFORMANCE	16
3.3 SYSTEM CONFIGURATION INFORMATION	16
SUPPORTING FILE INDEX	17

Abstract

This document contains the methodology and results of the TPC Express Benchmark™ IoT (TPCx-IoT) test conducted in conformance with the requirements of the TPCx-IoT Standard Specification, Revision 1.0.3.

The test was conducted for a Scale Factor of 300 Million records with 4 Dell R6415 Servers running HBase 2.0.0 on Cloudera Distribution for Apache Hadoop Edition 6.0.0 on Red Hat Enterprise Linux Server Release 7.5.

This benchmark is now submitted for the Peer Review Board consisting of members of the TPCx-IoT sub-committee.

Measured Configuration

Company Name	Cluster Node	Virtualization	Operating System
Dell Inc.	Dell R6415 Server	Not Used	Red Hat Enterprise Linux Server Release 7.5

TPC Express Benchmark© IoT Metrics

Total System Cost	IoTps	Price/Performance	Availability Date
129,663 USD	165,054.36	0.79 USD	Nov 30, 2018

Preface

TPC Express Benchmark™ IoT Overview

TPC Express Benchmark™ IoT (TPCx-IoT) was developed to provide an objective measure of hardware, operating system and commercial NoSQL database software distributions, and to provide the industry with verifiable performance, price-performance and availability metrics. The benchmark models a continuous system availability of 24 hours a day, 7 days a week.

Even though the modeled application is simple, the results are highly relevant to hardware and software dealing with IoT Gateway systems in general. The TPCx-IoT stresses both hardware and software including database APIs and network connections to the database. This workload can be used to assess a broad range of NoSQL databases. The TPCx-IoT can be used to assess a range of NoSQL implementations in a technically rigorous and directly comparable and vendor-neutral manner. The metric effectively represents the total number of records that can be inserted into a NoSQL database per second while running queries against the database.

The TPCx-IoT kit is available from the TPC (See www.tpc.org/tpcx-iot for more information). Users must sign-up and agree to the TPCx-IoT User Licensing Agreement (ULA) to download the kit. Re-distribution of the kit is prohibited. All related work (such as collaterals, papers, derivatives) must acknowledge the TPC and include TPCx-IoT copyright. The TPCx-IoT Kit includes: TPCx-IoT Specification document, TPCx-IoT Users Guide documentation, shell scripts to set up the benchmark environment and Java code to execute the benchmark load.

The purpose of TPC benchmarks is to provide relevant, objective performance data to industry users. To achieve that purpose, TPC benchmark specifications require that benchmark tests be implemented with systems, products, technologies and pricing that:

- *Are generally available to users;*
- *Are relevant to the market segment that the individual TPC benchmark models or represents (e.g., TPCx- IoT models and represents a NoSQL database mimicking an IoT gateway system)*
- *Would plausibly be implemented by a significant number of users in the market segment the benchmark models or represents.*

The use of new systems, products, technologies (hardware or software) and pricing is encouraged so long as they meet the requirements above. Specifically prohibited are benchmark systems, products, technologies or pricing (hereafter referred to as "implementations") whose primary purpose is performance optimization of TPC benchmark results without any corresponding applicability to real-world applications and environments. In other words, all "benchmark special" implementations that improve benchmark results but not real-world performance or pricing, are prohibited.

The rules for pricing are included in the TPC Pricing Specification.

Further information is available at www.tpc.org

Clause 1: General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Dell Inc.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Configuration parameters and options for server, storage, network and other hardware component incorporated into the pricing structure;*
- *Configuration parameters and options for operating system and file system component incorporated into the pricing structure;*
- *Configuration parameters and options for any other software component incorporated into the pricing structure;*
- *Compiler optimization options.*

Comment 1: In the event that some parameters and options are set multiple times, it must be easily discernible by an interested reader when the parameter or option was modified and what new value it received each time.

Comment 2: This requirement can be satisfied by providing a full list of all parameters and options, as long as all those that have been modified from their default values have been clearly identified and these parameters and options are only set once.

The supporting files contain the parameters and options used to configure the components involved in this benchmark.

1.3 Configuration Diagrams

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Total number of nodes used;*
- *Total number and type of processors used/total number of cores used/total number of threads used (including sizes of L2 and L3 caches);*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test;*

- *Number and type of disk units (and controllers,) if applicable;*
- *Number of channels or bus connections to disk units, including their protocol type;*
- *Number of LAN (e.g., Ethernet) connections and speed for switches and other hardware components physically used in the test or are incorporated into the pricing structure;*
- *Type and the run-time execution location of software components.*

Measured Configuration:

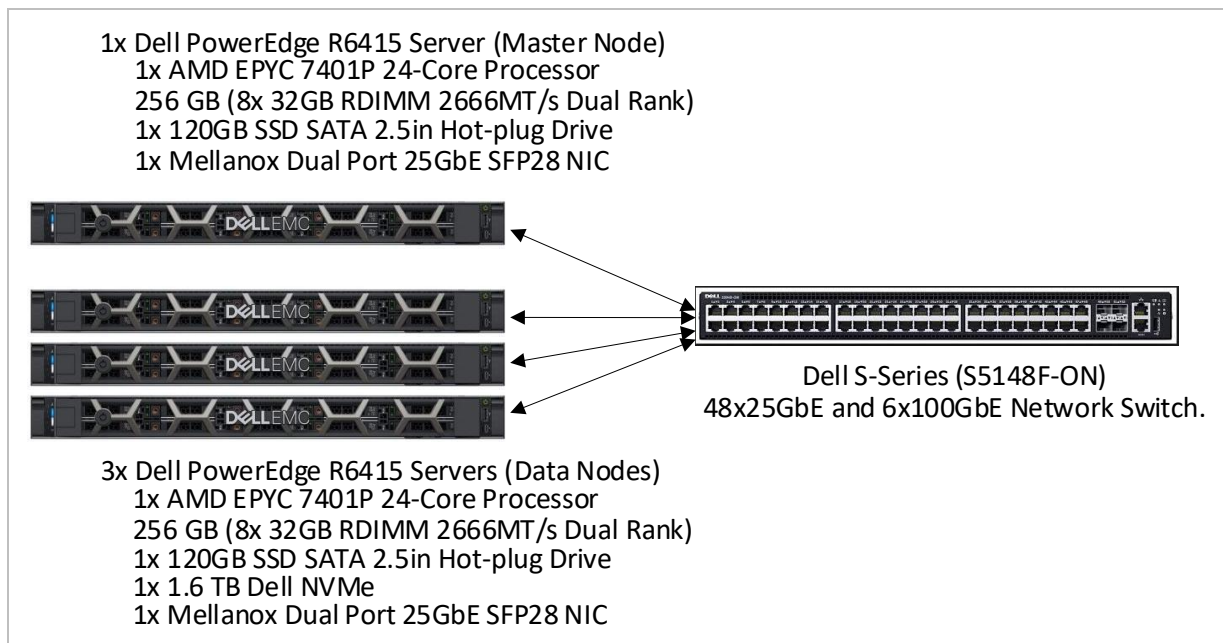


Figure 1-1 Measured Configuration

The measured configuration consisted of

- Total Nodes: 4
- Total Processor/Cores/Threads: 4/96/192
- Total Memory: 1.02TB
- Total Number of Storage Devices: 7
- Total Storage Capacity: 7.04TB

Server nodes details:

- 4x Dell PowerEdge R6415 Servers, each with:
 - Processors/Cores/Threads: 1/24/48
 - Processor Model: 1x AMD EPYC™ 7401P 2.0GHz 24-core
 - Memory: 256GB (8 x 32GB RDIMM 2666MT/s Dual Rank)
 - Drives: 1x 120GB SSD SATA (for all Servers)
1x Dell 1.6TB NVMe (for all Data Node Servers)
 - Network: 1x Mellanox Dual Port 25GbE SFP28 NIC

Priced Configuration:

There are no differences between the priced and measured configurations.

1.4 Dataset Distribution

The distribution of dataset across all media must be explicitly described.

Table 1.4 describes the distribution of the dataset across all media in the system.

Table 1.4: Dataset Distribution

Server Node	Controller	Disk Drive	Description of Content
1	Perc HP740p	1 (SSD)	Operating System, Swap, Hadoop Master, Root, Temp
2-4	Perc HP740p	1 (SSD)	Operating System, Swap, Root, Temp
2-4	NVMe	NVMe0n1	Data, Temp

1.5 Software Components Distribution

The distribution of various software components across the system must be explicitly described.

Table 1.5 describes the distribution of the software components across the system.

Table 1.5: Software Component Distribution

Node	HDFS		HBase		YARN		Zoo Keeper
	NameNode	DataNode	Master	Region Server	Resource Manager	Node Manager	
1	X		X		X		X
2-4		X		X		X	X

NoSQL Database version must be disclosed.

HBase -2.0.0 on Cloudera Distribution for Apache Hadoop 6.0.0

Clause 2: Workload Related Items

2.1 Hardware & Software Tunable

Script or text used to set for all hardware and software tunable parameters must be reported.

The Supporting File Archive contains all configuration scripts.

2.2 Run Report

The run report generated by TPCx-IoT benchmark kit must be reported.

The Supporting File Archive contains the full run report. Following are extracts from the run report that lists the performance summary for both runs.

Run Report for Performance Run

```
=====
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,088.09
Total Time In Seconds = 1,817.58
Total Number of Records = 300 Millions

TPCx-IoT Performance Metric (IoTps): 165,054.36
=====
```

Run Report for Repeatability Run

```
=====
TPCx-IoT Performance Metric (IoTps) Report

Total Time For Warmup Run In Seconds = 2,453.42
Total Time In Seconds = 1,804.28
Total Number of Records = 300 Millions

TPCx-IoT Performance Metric (IoTps): 166,270.48
=====
```

2.3 Benchmark Kit Identification

Version number of TPCx-IoT kit and checksum for the jar file and master Programs must be reported.

Kit Version

1.0.3

```
24d1e8079cfdd240f266041bca0333b5  ./TPC-IoT-master.sh
68379f9375c7b584fc3253dfe9c4f7a6  ./tpcx-iot/lib/core-0.13.0-SNAPSHOT.jar
7bebf1e17d5c2b380df575fad160d7f8  ./IoT_cluster_validate_suite.sh
```

2.4 Benchmark Kit changes

No Modifications were made to the TPC provided kit.

Clause 3: Scale Factors and Metrics

3.1 Total Run Time

	Run 1	Run 2
Total Run Time	1,804.29	1,817.58

3.2 Performance and Price Performance

The performance metric (IoTps) must be disclosed for Run1 and Run2. Price-performance metric (\$/IoTps) must be disclosed for the performance run.

	Run 1	Run 2
IoTps	166,270.48	165,054.36

\$/IoTps	\$0.79
----------	--------

3.3 System Configuration Information

Storage System Software	Operating System	Other Software	System Availability Date
	Red Hat Enterprise Linux Server Release 7.5		Nov 30, 2018

Cloudera 6.0.0	
Component	Package Version
Apache Hadoop	hadoop-3.0.0+cdh6.0.0
HBase	hbase-2.0.0+cdh6.0.0
YARN	yarn-3.0.0+cdh6.0.0
Zookeeper	zookeeper-3.4.5+cdh6.0.0

Supporting File Index

The following index outlines the information included in the supporting file archive.

Storage System Software	Operating System	System Availability Date
Clause 1	Parameters and options used to configure and tune the SUT	Supporting Files Archive/Clause1
Clause 2	Configuration Scripts and Run Report	Supporting Files Archive/Clause2
Clause 3	System Configuration Details	Supporting Files Archive/Clause3