



Hewlett-Packard Company

TPC Benchmark™ H
Full Disclosure Report
for
HP Integrity Superdome
using
Microsoft SQL Server 2005 Enterprise Edition for
Itanium-based Systems (SP2)
and
Windows Server 2003 Datacenter Edition 64-bit (SP1)

Second Edition
May 2007

Hewlett-Packard Company (HP), the Sponsor of this benchmark test, believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. The Sponsor assumes no responsibility for any errors that may appear in this document.

The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, the Sponsor provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, the TPC Benchmark H should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report was obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2007 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in the United States, May, 2007

HP and HP StorageWorks are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003 and SQL Server 2005 are registered trademarks of Microsoft Corporation.

TPC Benchmark, TPC-H, QppH, QthH and QphH are registered certification marks of the Transaction Processing Performance Council.

All other brand or product names mentioned herein must be considered trademarks or registered trademarks of their respective owners.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark™ H test conducted on the HP Integrity Superdome using Microsoft SQL Server 2005 Enterprise Edition for Itanium-based systems SP2, in conformance with the requirements of the TPC Benchmark™ H Standard Specification, Revision 2.6.0. The operating system used for the benchmark was Microsoft Windows 2003 Datacenter Edition (64-bit) SP1.

The TPC Benchmark™ H was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry.

Requests for this TPC Benchmark H Full Disclosure Report should be sent to:

Transaction Processing Performance Council (TPC)
c/o Shanley Public Relations
777 North First Street, Suite 600
San Jose, CA 95112 USA
Telephone: (408) 295-8894
Fax: (408) 295-9768

Standard and Executive Summary Statements

Pages iv - viii contain the Executive Summary and Numerical Quantities Summary of the benchmark results for the HP Integrity Superdome.


Auditor

The benchmark configuration, environment and methodology used to produce and validate the test results, and the pricing model used to calculate the cost per QppH and QthH were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

The auditor's letter of attestation is attached in Section 9.1 "Auditors' Report."

		HP Integrity Superdome		TPC-H Rev. 2.6.0
				Report Date May 21, 2007
Total System Cost		Composite Query per Hour Rating		Price Performance
\$1,967,970 USD		60,359.3 QphH @ 3000G		\$32.60 USD \$ / QphH @3000G
Database size	Database Manager	Operating System	Other Software	Availability Date
3000G	Microsoft SQL Server 2005 Enterprise Edition for Itanium-based systems SP2	Microsoft Windows Server 2003, Datacenter Edition (64-bit) SP1	MS Visual Basic MS Visual C++ MS Resource Kit	May 21, 2007

133.6 1487.0

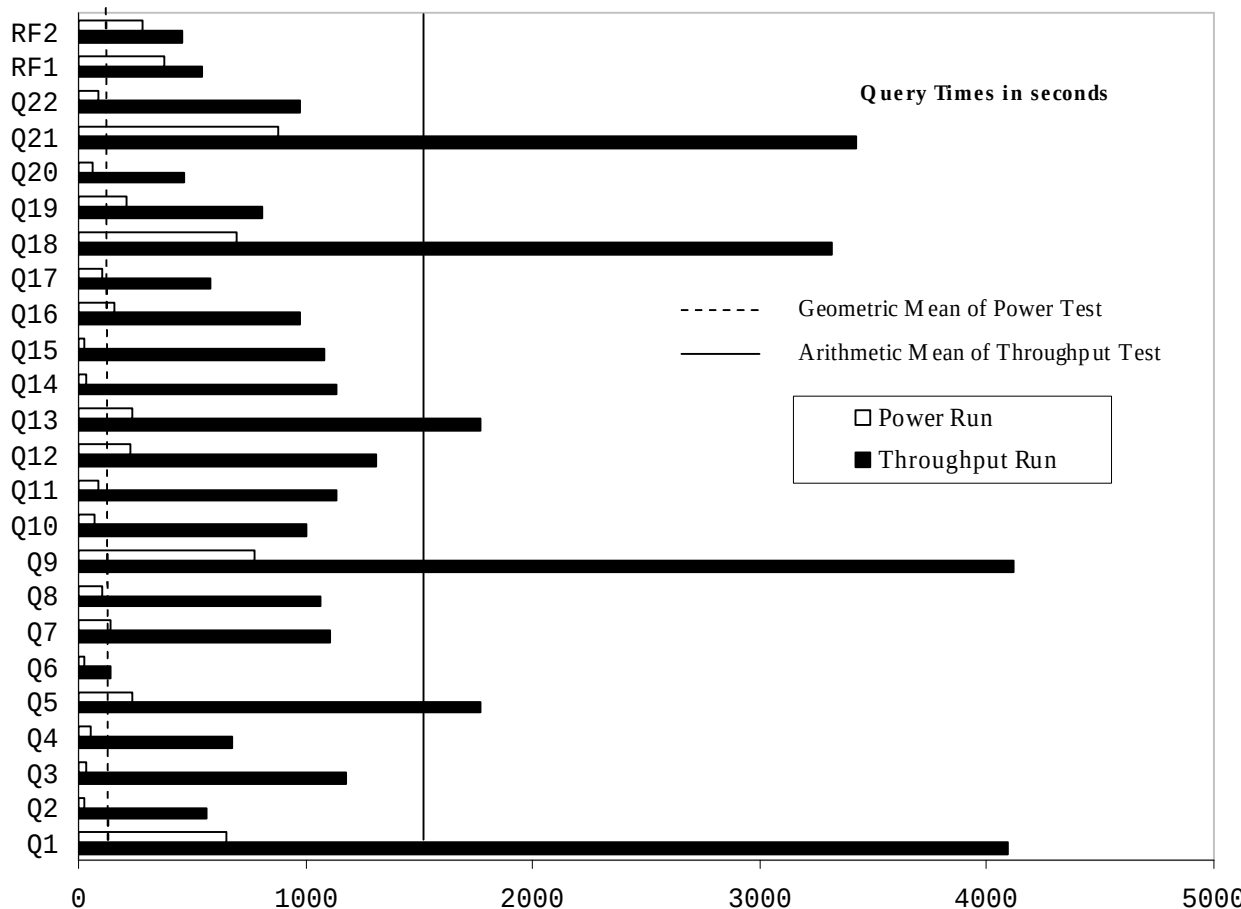

Query Times in seconds

----- Geometric Mean of Power Test
——— Arithmetic Mean of Throughput Test

□ Power Run
■ Throughput Run

Database Load Time = 25h45m26s Load included backup: Y Total Data Storage / Database Size = 11.24			
RAID(Base Tables): Y RAID(Base Tables and Auxiliary Data Structure): Y RAID(All)= Y			
System configuration			
Processors/Cores/Threads	32/64/64 DC Itanium 2 Processor 9050 @ 1.6GHz / 18MB		
Memory	256 GB Main Memory		
Disk Controllers	49 SmartArray 6402 2 Fibre Channel Controllers		
Disk Drives	6 36GB SCSI (Boot/Tools) 988 36GB SCSI (DB/Log)		
Total Disk Storage	33,715 GB		



HP Integrity Superdome

TPC-H Rev. 2.6.0

TPC Pricing 1.1.0

Report Date: May 21, 2007

Availability Date: May 21, 2007

Description	Price Key	Part Number	Unit Price	Qty.	Extended Price	3 Yr Maint Price
HP Superdome 32p/64c Chassis	1	A9834A, Opt. 429	\$235,950	1	\$235,950	
IPF Superdome Cell Board (sx2000)	1	A9837A	\$19,250	8	\$154,000	
HP 12 Slot PCI-X Chassis for sx2000	1	A9836A	\$16,950	4	\$67,800	
3 Year Svc & Support Price (Hardware and Software)	1			1		\$667,176
HP Superdome Itanium2 1.6 GHz/18MB CPU	1	AB406A	\$23,000	32	\$736,000	
Superdome 256GB Memory Pack	1	A9856A	\$611,950	1	\$611,950	
Graphite I/O expansion power subsystem	1	A5861D	\$34,860	1	\$34,860	
12 Slot PCI I/O Enclosure	1	A9852A	\$25,750	1	\$25,750	
12 Slot PCI-X Chassis for rack expansion cabinet	1	A9836AZ	\$16,950	4	\$67,800	
HP ProCurve Switch2124	1	J4868AZ	\$279	1	\$279	\$219
HP Superdome Rack System Mgmt. Station	1	A9802B	\$6,500	1	\$6,500	
1U RackMT Display/Keyboard/Mouse	1	AB243AZ	\$3,046	1	\$3,046	
1000Base-T Gigabit Eth Adp	1	A9900A	\$486	1	\$486	
FC-HBA 2GB, 1 Channel	1	AB467A	\$1,520	2	\$3,040	
HP Smart Array Controller 6402 (incl. boot)	1	A9890A	\$1,669	49	\$81,781	
HP Dual Channel U320 SCSI Adapter	1	A7173A	\$795	1	\$795	
36GB, 15krpm Ultra3 Wide disk	1	286776-B22	\$319	994	\$317,086	
Storageworks MSA30 SB (incl boot)	1	302969-B21	\$2,829	97	\$274,413	
Storage MSA30 Support 3yrs 24x7 4 hr incl disks	1	HA110A3 #7GT	\$1,827	97		\$177,219
SW 4000 39FT Cable All	1	150214-B21	\$114	97	\$11,058	
HP Universal Rack 10642 G2	1	AF002A	\$1,489	7	\$10,423	
HP 10642 G2 Sidepanel Kit	1	AF054A	\$359	7	\$2,513	
4 Bay Rack Support	1	HA1103A Opt 6EC	\$1,558	1		\$1,558
HP 16A High Voltage Modular PDU	1	252663-B24	\$299	21	\$6,279	
Modular Storage Array 1000	1	201723-B22	\$6,995	2	\$13,990	
MSA1000 controller	1	218231-B22	\$4,290	4	\$17,160	
MSA1000 Fibre Channel I/O Module	1	218960-B21	\$375	2	\$750	
Storage MAS1000 Support 3yrs 24x7 4hr incl disks	1	HA110A3 #6FG	\$3,222	2		\$6,444
5M LC to LC Cable Kit	1	221692-B22	\$82	2	\$164	
SCSI Cable 10m VHDS68 / HDTS68 Multimd	1	C2363B	\$335	1	\$335	
SCSI Terminator LVD/SE HDTS68 Multimd	1	C2364A	\$100	1	\$100	
HP C13/C14 Jumper Cord 2.5M	1	E7742A	\$25	1	\$25	
5300 Tape Array	1	C7508BZ	\$1,045	1	\$1,045	
DVD Rom drive	1	Q1592A	\$649	1	\$649	
Server Subtotal					\$2,686,027	\$852,616

	HP Integrity Superdome		TPC-H Rev. 2.6.0 TPC Pricing 1.1.0			
			Report Date: May 21, 2007			
			Availability Date: May 21, 2007			
Microsoft Windows Server 2003 DC Edition 64-bit Service Pack 1 Microsoft SQL Server 2005 Enterprise Edition Microsoft SQL Server 2005 Client License Microsoft Visual C++ Standard Microsoft Visual Basic HP's Large Configuration Discount *	1 2 2 2 2	T2372A opt032 810-04794 359-01911 254-00170 046-00856 Server Software Subtotal Total Extended Price Total Discounts	\$64,000 \$8,487 \$156 \$109 \$109	1 1 45 1 1	\$64,000 \$8,487 \$7,020 \$109 \$109	
						\$245
Price Key: 1-HP, 2-Microsoft Audited by Lorna Livingtree of Performance Metrics, Inc.		3 year cost of ownership: QphH @ 3000GB \$/QphH @ 3000GB				\$1,967,970 USD 6,0359.3 \$32.61 USD
* All discounts are based on US list prices and for similar quantities and configurations. A 46.64 % discount was based on the overall specific components and support pricing from vendor 1 in this single quotation. Discounts for similarly sized configurations will be similar to those quoted here, but may vary based on the components in the configuration.						
Sales contact: HP Sales Development, 19111 Pruneridge Ave., Cupertino, CA 95014 (408) 447 2320						



HP Integrity Superdome

TPC-H Rev. 2.6.0
Report Date May 21, 2007

Numerical Quantities

Measurement Results

Database Scale Factor	3000GB
Total Data Storage / Database Size	11.24
Start of Database Load	2007-04-28 16:04:13
End of Database Load	2007-04-29 17:49:38
Database Load Time	25h45m26s
Query Streams for Throughput Test	8
TPC-H Power	80,838.3
TPC-H Throughput	45,068.3
TPC-H Composite Query-per-Hour (QphH@3000GB)	60,359.3
Total System Price over 3 Years	\$1,967,970 USD
TPC-H Price/Performance Metric (USD /QphH@3000GB)	\$32.60 USD / QphH@3000GB

Measurement Interval

Measurement Interval in Throughput Test (Ts) = seconds 42176 seconds

Duration of Stream Execution

	Seed	Query Start Date/Time Query End Date/Time	RF1 Start Date/Time RF1 End Date/Time	RF2 Start Date/Time RF2 End Date/Time	Duration
Stream 00	429174938	04/29/07 22:08:39 04/29/07 23:30:55	04/29/07 22:00:26 04/29/07 22:06:49	04/29/07 23:30:55 04/29/07 23:35:34	1:35:08
Stream 01	429174939	04/29/07 23:35:36 04/30/07 8:32:18	4/30/07 9:03:03 4/30/07 9:10:53	04/30/07 9:10:54 04/30/07 9:17:47	9:42:11
Stream 02	429174940	04/29/07 23:35:36 04/30/07 9:01:17	4/30/07 9:17:49 4/30/07 9:26:01	04/30/07 9:26:02 04/30/07 9:32:55	9:57:19
Stream 03	429174941	04/29/07 23:35:36 04/30/07 8:19:34	4/30/07 9:32:58 4/30/07 9:41:55	04/30/07 9:41:57 04/30/07 9:49:20	10:13:44
Stream 04	429174942	04/29/07 23:35:36 04/30/07 8:48:35	4/30/07 9:49:24 4/30/07 9:58:34	04/30/07 9:58:36 04/30/07 10:06:38	10:31:02
Stream 05	429174943	04/29/07 23:35:37 04/30/07 8:29:16	4/30/07 10:06:43 4/30/07 10:16:08	04/30/07 10:16:11 04/30/07 10:23:52	10:48:15
Stream 06	429174944	04/29/07 23:35:37 04/30/07 8:29:08	4/30/07 10:23:57 4/30/07 10:33:35	04/30/07 10:33:37 04/30/07 10:41:52	11:06:14
Stream 07	429174945	04/29/07 23:35:38 04/30/07 8:43:36	4/30/07 10:41:59 4/30/07 10:51:51	04/30/07 10:51:54 04/30/07 11:00:01	11:24:23
Stream 08	429174946	04/29/07 23:35:39 04/30/07 9:03:01	4/30/07 11:00:10 4/30/07 11:10:18	04/30/07 11:10:22 04/30/07 11:18:31	11:42:53



HP Integrity Superdome

TPC-H Rev. 2.6.0
Report Date May 21, 2007

TPC-H Timing Intervals (in seconds):

Query	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
Stream 0	650.2	22.2	37.2	55.4	237.8	30.4	136.7	104.8
Stream 1	3918.9	634.2	1010.9	1223.5	2552.7	115.6	1037.4	759.4
Stream 2	3765.7	441.8	640.5	767.6	1012.4	247.3	1317.3	1284.2
Stream 3	3203.2	188.1	2374.1	346.1	2213.5	141.4	1477.6	1321.8
Stream 4	5912.4	89.2	201.9	410.9	819.4	64.5	463.7	1498.0
Stream 5	4552.4	1177.8	1044.8	553.2	2050.3	145.1	1272.7	951.4
Stream 6	3978.3	460.1	1822.1	640.4	1334.2	122.5	1179.9	1209.4
Stream 7	2683.4	1007.1	1920.0	953.0	1231.8	155.5	943.7	543.2
Stream 8	4739.6	488.8	426.2	530.7	2920.1	155.5	1182.0	942.3
Min Qi	2683.4	89.2	201.9	346.1	819.4	64.5	463.7	543.2
Max Qi	5912.4	1177.8	2374.1	1223.5	2920.1	247.3	1477.6	1498.0
Avg Qi	4094.2	560.9	1180.1	678.2	1766.8	143.4	1109.3	1063.7
Query	Q9	Q10	Q11	Q12	Q13	Q14	Q15	Q16
Stream 0	770.3	68.0	90.8	231.5	240.5	34.3	30.2	161.9
Stream 1	4435.3	944.9	893.7	1221.3	1392.7	482.1	2063.4	923.3
Stream 2	3596.9	1408.7	2507.1	2825.4	1598.2	2196.6	733.3	644.5
Stream 3	4844.1	1228.4	597.8	726.1	1563.6	1108.8	191.0	750.4
Stream 4	3550.9	668.9	1286.6	1341.9	2184.9	959.0	2350.5	1322.1
Stream 5	3511.7	345.2	1221.2	780.4	2457.6	458.7	1004.3	1319.6
Stream 6	4141.4	967.3	628.8	1469.6	1530.3	542.1	898.3	1472.2
Stream 7	3872.9	551.7	1835.2	746.2	2055.9	2266.7	806.4	665.8
Stream 8	5015.5	1945.1	89.7	1381.8	1380.0	1072.5	591.6	693.8
Min Qi	3511.7	345.2	89.7	726.1	1380.0	458.7	191.0	644.5
Max Qi	5015.5	1945.1	2507.1	2825.4	2457.6	2266.7	2350.5	1472.2
Avg Qi	4121.1	1007.5	1132.5	1311.6	1770.4	1135.8	1079.9	974.0
Query	Q17	Q18	Q19	Q20	Q21	Q22	RF1	RF2
Stream 0	101.6	694.7	209.1	62.0	878.3	88.4	382.8	278.7
Stream 1	288.4	3365.6	526.4	769.0	2684.2	959.2	469.5	413.5
Stream 2	1242.1	3184.5	539.5	542.2	2373.1	1072.4	491.4	413.2
Stream 3	576.3	3085.2	1176.0	262.2	3497.5	564.2	536.8	443.5
Stream 4	834.9	2833.2	623.8	200.2	5279.4	282.5	550.4	481.9
Stream 5	369.1	4352.1	683.5	467.0	2683.7	617.1	565.4	461.0
Stream 6	325.4	3493.8	973.0	254.9	3289.7	1276.5	578.1	494.6
Stream 7	381.9	3528.7	592.4	817.9	4051.7	1266.6	592.5	486.8
Stream 8	624.4	2735.1	1352.1	425.8	3540.3	1809.7	608.2	489.7
Min Qi	288.4	2735.1	526.4	200.2	2373.1	282.5	469.5	413.2
Max Qi	1242.1	4352.1	1352.1	817.9	5279.4	1809.7	608.2	494.6
Avg Qi	580.3	3322.3	808.3	467.4	3425.0	981.0	549.0	460.5

Abstract.....	iii
Overview.....	iii
Standard and Executive Summary Statements.....	iii
Auditor.....	iii
1.0 General Items	11
1.1 Test Sponsor.....	11
1.2 Parameter Settings	11
1.3 Configuration Items	11
2.0 Clause 1: Logical Database Design.....	13
2.1 Table Definitions	13
2.2 Physical Organization of Database.....	13
2.3 Horizontal Partitioning.....	13
2.4 Replication	13
3.0 Clause 2: Queries and Refresh Functions - Related Items	14
3.1 Query Language	14
3.2 Random Number Generation.....	14
3.3 Substitution Parameters Generation	14
3.4 Query Text and Output Data from Database.....	14
3.5 Query Substitution Parameters and Seeds Used.....	14
3.6 Isolation Level	14
3.7 Refresh Functions	14
4.0 Clause 3: Database System Properties.....	15
4.1 Atomicity Requirements	15
4.1.1 Atomicity of the Completed Transactions	15
4.1.2 Atomicity of Aborted Transactions	15
4.2 Consistency Requirements	15
4.3 Isolation Requirements	16
4.4 Durability Requirements	18
5.0 Clause 4: Scaling and Database Population.....	19
5.1 Initial Cardinality of Tables	19
5.2 Distribution of Tables and Logs Across Media.....	19
5.3 Mapping of Database Partitions/Replications	25
5.4 Implementation of RAID	25
5.5 DBGEN Modifications	25
5.6 Database Load time	25
5.7 Data Storage Ratio	25
5.8 Database Load Mechanism Details and Illustration.....	26
6.0 Clause 5: Performance Metrics and Execution Rules Related Items	27
6.1 Steps after the Load Test.....	27
6.2 Steps in the Power Test.....	27
6.3 Timing Intervals for Each Query and Refresh Function.....	27
6.4 Number of Streams for The Throughput Test.....	27
6.5 Start and End Date/Times for Each Query Stream.....	27
6.6 Total Elapsed Time for the Measurement Interval.....	27
6.7 Refresh Function Start Date/Time and Finish Date/Time	27
6.8 Timing Intervals for Each Query and Each Refresh Function for Each Stream	28
6.9 Performance Metrics.....	28
6.10 The Performance Metric and Numerical Quantities from Both Runs	28
6.11 System Activity Between Tests.....	28
7.0 Clause 6: SUT and Driver Implementation Related Items	29

7.1 Driver	29
7.2 Implementation Specific Layer (ISL)	29
7.3 Profile-Directed Optimization	30
8. Clause 7: Pricing Related Items	31
8.1 Hardware and Software Used	31
8.2 Three-Year Cost of System Configuration	31
8.3 Availability Dates	31
9. Clause 8: Audit Related Items	32
9.1 Auditors' Report	32
Appendix A: Tunable Parameters	35
Appendix B: Database Build Scripts	133
Appendix C: Query Text and Output	141
Appendix D: Seeds and Query Substitution Parameters	148
Appendix E: Refresh Function Source Code	151
Appendix F: Implementation Specific Layer and Source Code	155
Appendix G: Price Quotations	507

1.0 General Items

1.1 Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at Microsoft facilities in Redmond, Washington.

1.2 Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database Tuning Options*
- *Optimizer/Query execution options*
- *Query processing tool/language configuration parameters*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and configuration parameters*
- *Configuration parameters and options for any other software component incorporated into the pricing structure*
- *Compiler optimization options*

This requirement can be satisfied by providing a full list of all parameters and options, as long as all those which have been modified from their default values have been clearly identified and these parameters and options are only set once.

Appendix A, "Tunable Parameters," contains a list of all database parameters and operating system parameters.

1.3 Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:

- *Number and type of processors*
- *Size of allocated memory, and any specific mapping/partitioning of memory unique to the test.*
- *Number and type of disk units (and controllers, if applicable).*
- *Number of channels or bus connections to disk units, including their protocol type.*
- *Number of LAN (e.g. Ethernet) Connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure.*
- *Type and the run-time execution location of software components (e.g., DBMS, query processing tools /languages, middle-ware components, software drivers, etc.).*

The server System Under Test (SUT), an HP Integrity Superdome, depicted in Figure 1.1, consisted of :

- 32 DC Itanium 2 Processor 9050 @ 1.6GHz / 18MB
- 256 GB RAM
- 49 6402 Smart Array Controllers
- 97 HP StorageWorks MSA 30 Enclosures
- 994 36GB Pluggable Ultra320 15K rpm 1" height drives
- 2 AB467A 2Gb Fibre Channel Controller
- 2 HP StorageWorks MSA 1000 Dual Controller Enclosure

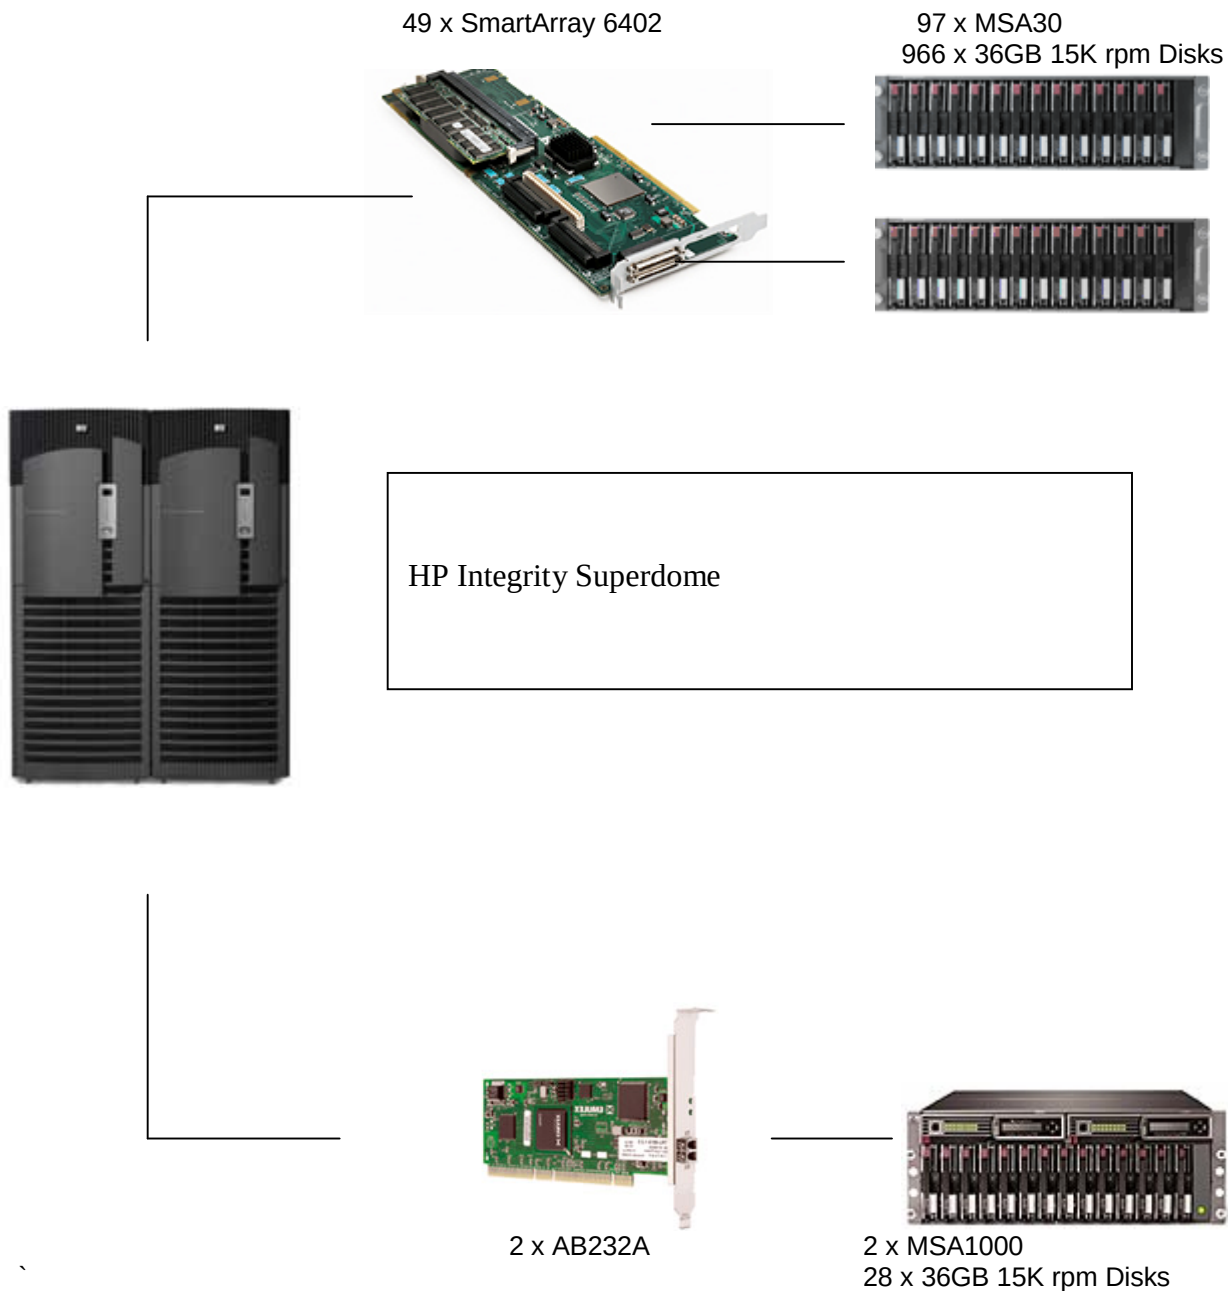


Figure 1.1 Benchmark and priced configuration for Superdome

2.0 Clause 1: Logical Database Design

2.1 Table Definitions

Listings must be provided for all table definition statements and all other statements used to set up the test and qualification databases. (8.1.2.1)

Appendix B, "Database Build Scripts," contains the table definitions and the program used to load the database.

2.2 Physical Organization of Database

The physical organization of tables and indices, within the test and qualification databases, must be disclosed. If the column ordering of any table is different from that specified in Clause 1.4, it must be noted.

Appendix B, "Database Build Scripts," contains the DDL for the index definitions.

2.3 Horizontal Partitioning

Horizontal partitioning of tables and rows in the test and qualification databases (see Clause 1.5.4) must be disclosed.

Horizontal partitioning was not used

2.4 Replication

Any replication of physical objects must be disclosed and must conform to the requirements of Clause 1.5.6.

No replication was used.

3.0 Clause 2: Queries and Refresh Functions - Related Items

3.1 Query Language

The query language used to implement the queries must be identified.

T-SQL was the query language used.

3.2 Random Number Generation

The method of verification for the random number generation must be described unless the supplied DBGEN and QGEN were used.

DBGEN version 2.6.0 and QGEN version 2.6.0 were used to generate all database populations.

3.3 Substitution Parameters Generation

The method used to generate values for substitution parameters must be disclosed. If QGEN is not used for this purpose, then the source code of any non-commercial tool used must be disclosed. If QGEN is used, the version number, release number, modification number and patch level of QGEN must be disclosed.

The TPC source based QGEN version 2.6.0 was used to generate the substitution parameters

3.4 Query Text and Output Data from Database

The executable query text used for query validation must be disclosed along with the corresponding output data generated during the execution of the query text against the qualification database. If minor modifications (see Clause 2.2.3) have been applied to any functional query definitions or approved variants in order to obtain executable query text, these modifications must be disclosed and justified. The justification for a particular minor query modification can apply collectively to all queries for which it has been used. The output data for the power and throughput tests must be made available electronically upon request..

Appendix C contains the query text and query output. The following modifications were used:

- o In Q1 the function "count_big" is used in place of "count"
- o The "dateadd" function is used to perform date arithmetic in Q1, Q4, Q5, Q6, Q10, Q12, Q14 , Q15 and Q20.
- o The "datepart" function is used to extract part of a date ("YY") in Q7, Q8 and Q9.
- o The "top" function is used to restrict the number of output rows in Q2, Q3, Q10, Q18 and Q21.

3.5 Query Substitution Parameters and Seeds Used

All the query substitution parameters used during the performance test must be disclosed in tabular format, along with the seeds used to generate these parameters.

Appendix D contains the seed and query substitution parameters used.

3.6 Isolation Level

The isolation level used to run the queries must be disclosed. If the isolation level does not map closely to one of the isolation levels defined in Clause 3.4, additional descriptive detail must be provided.

The queries and transactions were run with isolation level Read Committed.

3.7 Refresh Functions

The details of how the refresh functions were implemented must be disclosed

Appendix E contains the source code for the refresh functions.

4.0 Clause 3: Database System Properties

4.1 Atomicity Requirements

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing the code written to implement the ACID Transaction and Query.

All ACID tests were conducted according to specification. The Atomicity, Isolation, Consistency and Durability tests were performed on the HP Integrity Superdome.

4.1.1 Atomicity of the Completed Transactions

Perform the ACID Transaction for a randomly selected set of input data and verify that the appropriate rows have been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of completed transactions:

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1.
3. The ACID Transaction committed.
4. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for the same order key. It was verified that the appropriate rows had been changed.

4.1.2 Atomicity of Aborted Transactions

Perform the ACID transaction for a randomly selected set of input data, submitting a ROLLBACK of the transaction for the COMMIT of the transaction. Verify that the appropriate rows have not been changed in the ORDER, LINEITEM, and HISTORY tables.

The following steps were performed to verify the Atomicity of the aborted ACID transaction:

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected order key.
2. The ACID Transaction was performed using the order key from step 1. The transaction was stopped prior to the commit.
3. The ACID Transaction was ROLLED BACK. .
4. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for the same order key used in steps 1 and 2. It was verified that the appropriate rows had not been changed.

4.2 Consistency Requirements

Consistency is the property of the application that requires any execution of transactions to take the database from one consistent state to another. A consistent state for the TPC-H database is defined to exist when:

$$O_TOTALPRICE = SUM(trunc(trunc((L_EXTENDEDPRICE - L_DISCOUNT) * (1 + L_TAX)))$$

for each ORDER and LINEITEM defined by (O_ORDERKEY = L_ORDERKEY)

4.2.1 Consistency Tests

Verify that ORDER and LINEITEM tables are initially consistent as defined in Clause 3.3.2.1, based upon a random sample of at least 10 distinct values of O_ORDERKEY.

The following steps were performed to verify consistency:

1. The consistency of the ORDER and LINEITEM tables was verified based on a sample of O_ORDERKEYs.
2. One hundred ACID Transactions were submitted from each of six execution streams.
3. The consistency of the ORDER and LINEITEM tables was re-verified.

4.3 Isolation Requirements

Operations of concurrent transactions must yield results which are indistinguishable from the results which would be obtained by forcing each transaction to be serially executed to completion in some order.

4.3.1 Isolation Test 1 - Read-Write Conflict with Commit

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is committed)

The following steps were performed to satisfy the test of isolation for a read-only and a read-write committed transaction:

1. An ACID Transaction was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction was suspended prior to Commit.
2. An ACID query was started for the same O_KEY used in step 1. The ACID query blocked and did not see any uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was resumed and committed. The ACID query completed. It returned the data as committed by the ACID Transaction.

4.3.2 Isolation Test 2 - Read-Write Conflict with Rollback

Demonstrate isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is rolled back.

The following steps were performed to satisfy the test of isolation for read-only and a rolled back read-write transaction:

1. An ACID transaction was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction was suspended prior to Rollback.
2. An ACID query was started for the same O_KEY used in step 1. The ACID query did not see any uncommitted changes made by the ACID Transaction.
3. The ACID Transaction was ROLLED BACK.
4. The ACID query completed.

4.3.3 Isolation Test 3 - Write-Write Conflict with Commit

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is committed.

The following steps were performed to verify isolation of two update transactions:

1. An ACID Transaction T1 was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID transaction T1 was suspended prior to Commit.
2. Another ACID Transaction T2 was started using the same O_KEY and L_KEY and a randomly selected DELTA.
3. T2 waited.
4. The ACID transaction T1 was allowed to Commit and T2 completed.
5. It was verified that: $T2.L_EXTENDEDPRICE = T1.L_EXTENDEDPRICE + (DELTA1 * (T1.L_EXTENDEDPRICE / T1.L_QUANTITY))$

4.3.4 Isolation Test 4 - Write-Write Conflict with Rollback

Demonstrate isolation for the write-write conflict of two update transactions when the first transaction is rolled back.

The following steps were performed to verify the isolation of two update transactions after the first one is rolled back:

1. An ACID Transaction T1 was started for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction T1 was suspended prior to Rollback.
2. Another ACID Transaction T2 was started using the same O_KEY and L_KEY used in step 1 and a randomly selected DELTA.
3. T2 waited.
4. T1 was allowed to ROLLBACK and T2 completed.

5. It was verified that T2.L_EXTENDEDPRICE = T1.L_EXTENDEDPRICE.

4.3.5 Isolation Test 5 – Concurrent Read and Write Transactions on Different Tables

Demonstrate the ability of read and write transactions affecting different database tables to make progress concurrently.

The following steps were performed:

1. An ACID Transaction T1 for a randomly selected O_KEY, L_KEY and DELTA. The ACID Transaction T1 was suspended prior to Commit.
2. Another ACID Transaction T2 was started using random values for PS_PARTKEY and PS_SUPPKEY.
3. T2 completed.
4. T1 completed and the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

4.3.6 Isolation Test 6 – Update Transactions During Continuous Read-Only Query Stream

Demonstrate the continuous submission of arbitrary (read-only) queries against one or more tables of the database does not indefinitely delay update transactions affecting those tables from making progress.

The following steps were performed:

1. An ACID Transaction T1 was started, executing Q1 against the qualification database. The substitution parameter was chosen from the interval [0..2159] so that the query ran for a sufficient amount of time.
2. Before T1 completed, an ACID Transaction T2 was started using randomly selected values of O_KEY, L_KEY and DELTA.
3. T2 completed before T1 completed.
4. It was verified that the appropriate rows in the ORDER, LINEITEM and HISTORY tables were changed.

4.4 Durability Requirements

The tested system must guarantee durability: the ability to preserve the effects of committed transactions and insure database consistency after recovery from any one of the failures listed in Clause 3.5.2.

4.4.1 Permanent Unrecoverable Failure of Any Durable Medium and Loss of System Power

Guarantee the database and committed updates are preserved across a permanent irrecoverable failure of any single durable medium containing TPC-H database tables or recovery log tables

The test database log was stored on a RAID-10 array of 28 physical drives. The tables for the test database were stored on 192 logical volumes on RAID-5 arrays across 5 physical drives. A backup of the test database was taken. The backup was spread across 32 logical volumes striped across 192 RAID-5 arrays, each array across 5 physical disks.

The tests were conducted on the qualification database. The qualification database was loaded in the same fashion as the test database but used fewer disks. The steps performed are shown below:

1. The complete database was backed up.
2. Eight streams of ACID transactions were started. Each stream executed a minimum of 100 transactions.
3. While the test was running, one of the disks from the database RAID-10 log was removed.
4. After it was determined that the test would still run with the loss of a log disk, one physical drive of a RAID-5 data volume was removed.
5. It was determined that the test kept on running.
6. The eight streams of ACID transactions finished successfully, i.e. the durability requirement of preservation of the database after loss of a single durable medium was fulfilled.

4.4.2 System Crash

Guarantee the database and committed updates are preserved across an instantaneous interruption (system crash/system hang) in processing which requires the system to reboot to recover.

1. Eight streams of ACID transactions were started. Each stream executed a minimum of 100 transactions.
2. While the streams of ACID transactions were running a system hardware reset was issued.
3. The system rebooted and the database was restarted.
4. The database went through a recovery period.
5. The success file and the HISTORY table counts were compared and were found to match.

4.4.3 Memory Failure

Guarantee the database and committed updates are preserved across failure of all or part of memory (loss of contents).

See section 4.4.2

5.0 Clause 4: Scaling and Database Population

5.1 Initial Cardinality of Tables

The cardinality (i.e., the number of rows) of each table of the test database, as it existed at the completion of the database load (see clause 4.2.5) must be disclosed.

Table 5.1 lists the TPC-H Benchmark defined tables and the row count for each table as they existed upon completion of the build.

TABLE	# of Rows
Lineitem	18,000,048,306
Orders	4,500,000,000
Partsupp	2,400,000,000
Part	600,000,000
Customer	450,000,000
Supplier	30,000,000
Nation	25
Region	5

Table 5.1 Initial Number of Rows

5.2 Distribution of Tables and Logs Across Media

The distribution of tables and logs across all media must be explicitly described for the tested and priced systems.

Microsoft SQL Server was configured on an HP Integrity Superdome with the following configuration:

- 49 Smart Array 6402 Disk RAID Controllers
- 2 AB467A 2Gb Fibre Channel Controller
- 97 HP StorageWorks MSA 30 enclosures
- 2 HP StorageWorks MSA1000 enclosures
- 994 36GB 15k rpm external disk drives

988 disks were used to hold table data, indexes, database log and the temporary database (TempDB).

The raw partitions for the database and the NTFS partition for the backup and flat files were mounted to a folder on the G: drive

G:\mnt\li
G:\mnt\gen
G:\mnt\temp
G:\mnt\ntfs

A description of distribution of database filegroups and log can be found in the Table below.

SmartArray 6402	# of Disks	Array Fault Tolerance	Size in GB	Partition Format	Content
Slot 39	6	RAID 1	36	NTFS	Boot, SQL
		RAID 1	72	NTFS	Tools, Mount Points
Slot 40 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 41 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 42 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 43 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 44 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 45 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 63 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 64 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 65 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 66 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles

SmartArray 6402	# of Disks	Array Fault Tolerance	Size in GB	Partition Format	Content
Slot 67 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 68 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 95 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 96 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 97 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 98 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 99 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 100 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 119 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 120 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles

SmartArray 6402	# of Disks	Array Fault Tolerance	Size in GB	Partition Format	Content
Slot 121 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 122 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 123 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 124 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 151 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 152 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 153 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 154 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 155 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 156 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles

SmartArray 6402	# of Disks	Array Fault Tolerance	Size in GB	Partition Format	Content
Slot 175 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 176 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 177 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 178 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 179 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 180 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 207 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 208 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 209 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 210 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles

SmartArray 6402	# of Disks	Array Fault Tolerance	Size in GB	Partition Format	Content
Slot 211 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 212 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 231 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 232 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 233 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 234 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 235 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles
Slot 237 A/B	10	RAID 5	50	RAW	Tpch3000G LI
				RAW	Tpch3000G GEN
				RAW	Tpch3000G TempDB
		RAID 5	89	NTFS	Backup, Flatfiles

5.3 Mapping of Database Partitions/Replications

The mapping of database partitions/replications must be explicitly described.

Database partitioning/replication was not used.

5.4 Implementation of RAID

Implementations may use some form of RAID to ensure high availability. If used for data, auxiliary storage (e.g. indexes) or temporary space, the level of RAID used must be disclosed for each device.

RAID 5 was used for database filegroups and tempdb, RAID 10 and OS level striping for database recovery logs, RAID 5 and OS level striping for the Backup drives.

5.5 DBGEN Modifications

The version number, release number, modification number, and patch level of DBGEN must be disclosed. Any modifications to the DBGEN (see Clause 4.2.1) source code must be disclosed. In the event that a program other than DBGEN was used to populate the database, it must be disclosed in its entirety.

DBGEN version 2.6.0 was used

5.6 Database Load time

The database load time for the test database (see clause 4.3) must be disclosed.

The database load time was 25h 45min 26sec

5.7 Data Storage Ratio

The data storage ratio must be disclosed. It is computed by dividing the total data storage of the priced configuration (expressed in GB) by the size chosen for the test database as defined in 4.1.3.1. The ratio must be reported to the nearest 1/100th, rounded up.

Disk Type	# of Disks	Total (GB)
36 GB 15k rpm U320	994	33,715

Size of test database: 3000G

Data Storage Ratio: 11.24

5.8 Database Load Mechanism Details and Illustration

The details of the database load must be disclosed, including a block diagram illustrating the overall process. Disclosure of the load procedure includes all steps, scripts, input and configuration files required to completely reproduce the test and qualification databases.

Flat files for each of the tables were created using DBGEN. The tables were loaded as depicted in Figure 5-8.

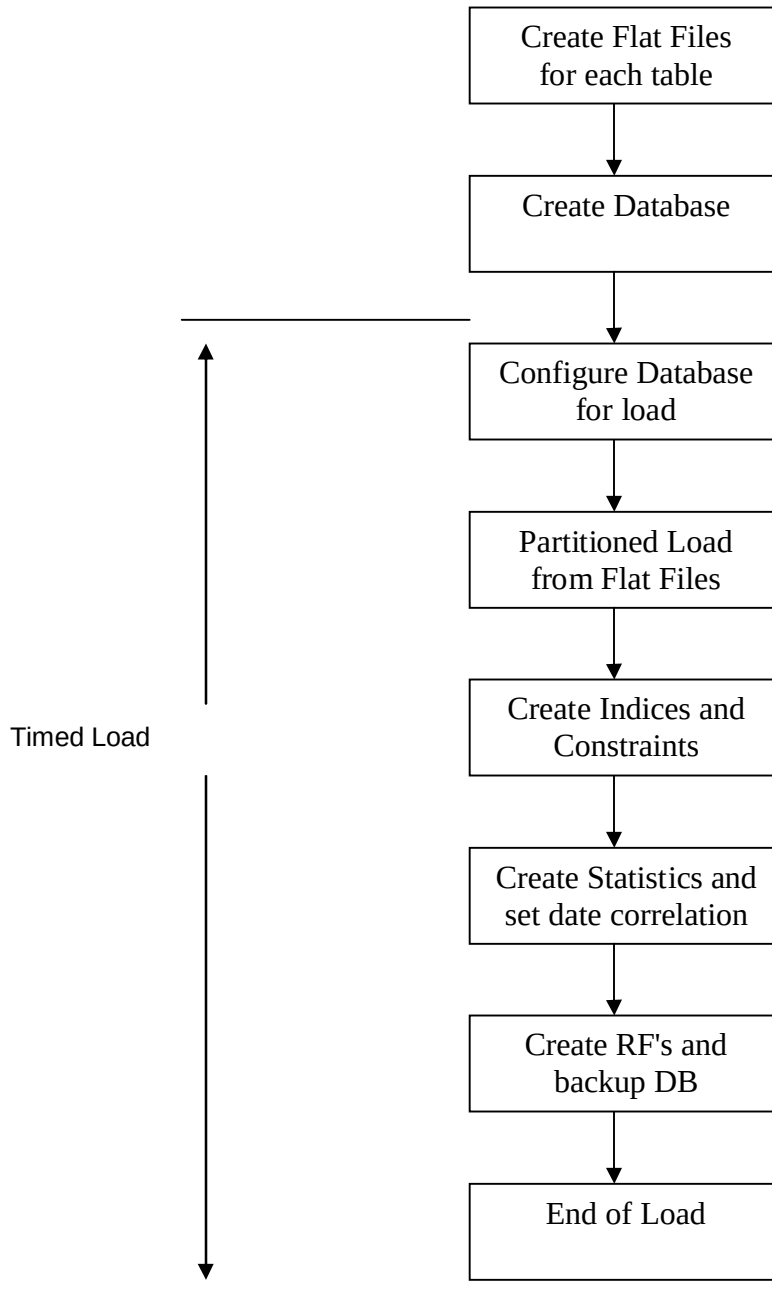


Figure 5.8: Block Diagram of Database Load Process

6.0 Clause 5: Performance Metrics and Execution Rules Related Items

6.1 Steps after the Load Test

Any system activity on the SUT that takes place between the conclusion of the load test and the beginning of the performance test must be fully disclosed including listings of scripts or command logs.

Auditor requested queries were run against the database to verify the correctness of the load. The system was rebooted and SQL Server was restarted.

6.2 Steps in the Power Test

The details of the steps followed to implement the power test (e.g., system boot, database restart, etc.) must be disclosed.

The following steps were used to implement the power test:

1. RF1 Refresh Transaction
2. Stream 0 Execution
3. RF2 Refresh Transaction.

6.3 Timing Intervals for Each Query and Refresh Function

The timing intervals (see Clause 5.3.6) for each query of the measured set and for both refresh functions must be reported for the power test.

The timing intervals for each query and both refresh functions are given in the Numerical Quantities Summary earlier in this document on page vi.

6.4 Number of Streams for The Throughput Test

The number of execution streams used for the throughput test must be disclosed.

7 streams were used for the Throughput Test.

6.5 Start and End Date/Times for Each Query Stream

The start time and finish time for each query execution stream must be reported for the throughput test.

The Numerical Quantities Summary on page vi contains the start and stop times for the query execution streams run on the system reported.

6.6 Total Elapsed Time for the Measurement Interval

The total elapsed time of the measurement interval(see Clause 5.3.5) must be reported for the throughput test.

The Numerical Quantities Summary on page vi contains the timing intervals for the throughput test run on the system reported.

6.7 Refresh Function Start Date/Time and Finish Date/Time

Start and finish time for each update function in the update stream must be reported for the throughput test.

The Numerical Quantities Summary on page vi contains the start and finish times for the refresh functions of each stream.

6.8 Timing Intervals for Each Query and Each Refresh Function for Each Stream

The timing intervals (see Clause 5.3.6) for each query of each stream and for each update function must be reported for the throughput test.

The timing intervals for each query and each update function are given in the Numerical Quantities Summary earlier in this document on page vi.

6.9 Performance Metrics

The computed performance metrics, related numerical quantities and the price performance metric must be reported.

The Numerical Quantities Summary contains the performance metrics, related numerical quantities, and the price/performance metric for the system reported.

6.10 The Performance Metric and Numerical Quantities from Both Runs

The performance metric (QphH@Size) and the numerical quantities (TPC-H Power@Size and TPC-H Throughput@ Size) from both of the runs must be disclosed

Run ID	QppH@3000G	QthH@3000G	QphH@3000G
Run 1	80,838.3	45,068.3	60,359.9
Run 2	80,838.3	45,506.3	60,651.9

6.11 System Activity Between Tests

Any activity on the SUT that takes place between the conclusion of Run1 and the beginning of Run2 must be disclosed.

The system was rebooted and SQL Server was restarted.

7.0 Clause 6: SUT and Driver Implementation Related Items

7.1 Driver

A detailed description of how the driver performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the driver.

The TPC-H benchmark was implemented using a Microsoft tool called StepMaster. StepMaster is a general purpose test tool which can drive ODBC and shell commands. Within StepMaster, the user designs a workspace corresponding to the sequence of operations (or steps) to be executed. When the workspace is executed, StepMaster records information about the run into a database as well as a log file for later analysis.

StepMaster provides a mechanism for creating parallel streams of execution. This is used in the throughput tests to drive the query and refresh streams. Each step is timed using a millisecond resolution timer. A timestamp T1 is taken before beginning the operation and a timestamp T2 is taken after completing the operation. These times are recorded in a database as well as a log file for later analysis.

Two types of ODBC connections are supported. A dynamic connection is used to execute a single operation and is closed when the operation finishes. A static connection is held open until the run completes and may be used to execute more than one step. A connection (either static or dynamic) can only have one outstanding operation at any time.

In TPC-H, static connections are used for the query streams in the power and throughput tests. StepMaster reads an Access database to determine the sequence of steps to execute. These commands are represented as the Implementation Specific Layer. StepMaster records its execution history, including all timings, in the Access database. Additionally, StepMaster writes a textual log file of execution for each run.

The source code is disclosed on Appendix F

7.2 Implementation Specific Layer (ISL)

If an implementation-specific layer is used, then a detailed description of how it performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the implementation-specific layer.

The following steps are performed, to accomplish the Power and Throughput Runs:

1. Power Run

- Execute 144 concurrent RF1 threads, each of which will apply a segment of a refresh set generated by DBGen. Each thread submits multiple transactions, where a transaction spans a set of orders and their associated line items. A checkpoint was issued after RF1 completion.
- Execute the Stream 0 queries in the order according to TPC Benchmark H Specification, Appendix A
- Execute 144 concurrent RF2 threads, each of which will apply a segment of a refresh set generated by DBGen. Each thread submits multiple transactions, where a transaction spans a set of orders and their associated line items.

2. Throughput Run

- Execute 8 concurrent query streams. Each stream executes queries in the order according to TPC Benchmark H Specification, Appendix A, for the appropriate Stream ID (01-08). Upon completion of each stream, a semaphore is signaled to indicate completion.
- Execute 8 consecutive RF1/RF2 transactions, against ascending Refresh sets produced by DBGen. The first RF1 waits on a semaphore prior to beginning its insert operations.

Each step is timed by StepMaster. The timing information, together with an activity log, are stored for later analysis. The inputs and results of steps are stored in text files for later analysis.

7.3 Profile-Directed Optimization

If profile-directed optimization as described in Clause 5.2.9 is used, such use must be disclosed.

Profile-directed optimization was not used.

8. Clause 7: Pricing Related Items

8.1 Hardware and Software Used

A detailed list of hardware and software used in the priced system must be reported. Each item must have a vendor part number, description, and release/revision level, and indicate General Availability status or committed delivery date. If package pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) of price(s) must also be reported.

The pricing summary sheet is given on page v in the Executive Summary at the front of this report. The source for all prices is indicated.

The HP Integrity Superdome, system memory, additional processors, disk controllers, and hard drives are all available at the time of publication.

The pricing and availability of the Microsoft software used is given in a quote from Microsoft, which is included in this report in Appendix H.

8.2 Three-Year Cost of System Configuration

The total 3-year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is required.

The pricing summary sheet on page v in the front of this report contains all details.

8.3 Availability Dates

The committed delivery date for general availability (availability date) of products used in the priced calculations must be reported. When the priced system includes products with different availability dates, the single availability date reported on the first page of the executive summary must be the date by which all components are committed to being available. The full disclosure report must report availability dates individually for at least each of the categories for which a pricing subtotal must be provided (see Clause 7.3.1.4). All availability dates, whether for individual components or for the SUT as a whole, must be disclosed to a precision of 1 day, but the precise format is left to the test sponsor.

Category	Available
Server Hardware	Now (date of publication)
Storage	Now (date of publication)
Server Software	Now (date of publication)
SQL Server	Now (date of publication)

9. Clause 8: Audit Related Items

9.1 Auditors' Report

The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the full disclosure report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.

This implementation of the TPC Benchmark H was audited by Lorna Livingtree of Performance Metrics, a certified TPC-H auditor. Further information regarding the audit process may be obtained from:

Lorna Livingtree
Performance Metrics Inc.
PO Box 984
Klamath, CA 95548
(707) 482 0523

Requests for this TPC Benchmark H Full Disclosure Report should be sent to:

Transaction Processing Performance Council
c/o Shanley Public Relations
777 North First Street, Suite 6000
San Jose, CA 95112-6311 USA
Telephone: (408) 295-8894
Fax: (408) 295-9768



PERFORMANCE METRICS INC.
TPC Certified Auditors

May 4, 2007

Mr. Mike Fitzner
Senior Performance Engineer
Hewlett-Packard Company
14475 24th Street NE
Bellevue, WA 98007

I have verified the TPC Benchmark™ H for the following configuration:

Platform: HP Integrity Superdome
Database Manager: Microsoft SQL Server 2005 Enterprise
Operating System: Microsoft Windows Server 2003

CPU's	Memory	Total Disks	Qpph @ 3000 GB	QthH @ 3000 GB	QphH @ 3000 GB
32 Intel Itanium2 @ 1.6 Ghz	256 GB	994 @ 36 GB	80,838.3	45,068.3	60,359.3

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The database tables were defined with the proper columns, layout and sizes.
- The tested database was correctly scaled and populated for 3000 GB using DBGEN. The version of DBGEN was 2.6.0.
- The sample data produce by DBGEN was successfully compared to the reference data for this scale factor.
- The qualification database layout was identical to the tested database except for the number and size of the files.
- The query text was verified to use only compliant variants and minor modifications.
- The executable query text was generated by QGEN and submitted through SQL Server's standard interactive interface. The version of QGEN was 2.6.0. The sample

P.O. Box 984 Klamath, CA 95548
(707) 482-0523 fax: (707) 482-0575

Page 1
email: LornaL@PerfMetrics.com

PERFORMANCE METRICS INC.
TPC Certified Auditors

parameters produced by QGEN were successfully compared to the reference data for this scale factor.

- The validation of the query text against the qualification database produced compliant results.
- The refresh functions were properly implemented and executed the correct number of inserts and deletes.
- The load timing was properly measured and reported.
- The execution times were correctly measured and reported.
- The performance metrics were correctly computed and reported.
- The repeatability of the measurement was verified.
- The ACID properties were tested and verified.
- The system pricing was checked for major components and maintenance.
- The executive summary pages of the FDR were verified for accuracy.

Auditor's Notes: None

Sincerely,



Lorna Livingtree
Auditor

Appendix A: Tunable Parameters

System Info

System Information report written at: 05/01/07 15:43:11

System Name: SQLDUNE

[System Summary]

Item Value

OS Name Microsoft(R) Windows(R) Server 2003, Datacenter Edition for 64-Bit Itanium-based Systems

Version 5.2.3790 Service Pack 1 Build 3790

Other OS Description Not Available

OS Manufacturer Microsoft Corporation

System Name SQLDUNE

System Manufacturer hp

System Model superdome server SD64B

System Type Itanium (TM) -based System

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

Processor ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz

```
Processor    ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz
Processor    ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz
Processor    ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz
Processor    ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz
Processor    ia64 Family 32 Model 0 Stepping 5 GenuineIntel
~1600 Mhz
BIOS Version/Date  HP 5.24, Not Available
SMBIOS Version    2.3
Windows Directory  C:\windows
System Directory   C:\windows\system32
Boot Device\Device\HarddiskVolume961
Locale           United States
Hardware Abstraction Layer Version = "5.2.3790.2781
(srv03_sp1_qfe.060830-0223)"
User Name         Not Available
Time Zone         Pacific Daylight Time
Total Physical Memory  261,612.96 MB
Available Physical Memory  6.66 GB
Total Virtual Memory  272.86 GB
Available Virtual Memory  25.30 GB
Page File Space    19.98 GB
Page File          C:\pagefile.sys
```

```
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller SG (Non-Miniport)
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller SG (Non-Miniport)
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller SG (Non-Miniport)
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller SG (Non-Miniport)
Memory Address 0x80080000-0x80081FFF Smart Array 6400
Controller SG (Non-Miniport)
```



```
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
Memory Address 0x80000000-0xFEDFFFFFFPCI bus
Memory Address 0x80000000-0xFEDFFFFFFPCI standard PCI-to-
PCI bridge
```

[illegible]

[illegible]

[illegible]

0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80040000-0x8007FFFF (Non-Miniport) OK	Smart Array 6400 Controller SG
0x80100000-0x8011FFFF Server Adapter OK	Intel(R) PRO/1000 MT Dual Port
0x80120000-0x8013FFFF Server Adapter #2 OK	Intel(R) PRO/1000 MT Dual Port
0x800C0000-0x800FFFFF Server Adapter #2 OK	Intel(R) PRO/1000 MT Dual Port
0x80041000-0x800410FF Miniport Driver OK	Emulex LightPulse LP1050, Storport
0x80041000-0x800410FF 11109, Storport Miniport Driver OK	Emulex LightPulse LP1050, PCI Slot

[Sound Device]

Item Value

[Display]

Item Value

[Infrared]

Item Value

[Input]

[Keyboard]

Item Value

[Pointing Device]

Item Value

[Modem]

Item Value

[Network]

[Adapter]

Item Value

Name [00000001] Intel(R) PRO/1000 MT Dual Port Server Adapter
Adapter Type Ethernet 802.3
Product Type Intel(R) PRO/1000 MT Dual Port Server Adapter
Installed Yes
PNP Device ID
PCI\VEN_8086&DEV_1079&SUBSYS_12A6103C&REV_03\5&2975FBB5&0&08
Last Reset 4/30/2007 3:28 PM
Index 1
Service Name E1000
IP Address 0.0.0.0
IP Subnet 0.0.0.0
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server 10.193.8.64
DHCP Lease Expires 12/21/2006 3:46 PM
DHCP Lease Obtained 12/13/2006 3:46 PM
MAC Address 00:12:79:9E:6B:30
Memory Address 0x80100000-0x8011FFFF
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00002000-0x00002FFF
IRQ Channel IRQ 329

Name [00000002] Intel(R) PRO/1000 MT Dual Port Server Adapter
Adapter Type Ethernet 802.3
Product Type Intel(R) PRO/1000 MT Dual Port Server Adapter
Installed Yes
PNP Device ID
PCI\VEN_8086&DEV_1079&SUBSYS_12A6103C&REV_03\5&2975FBB5&0&09
Last Reset 4/30/2007 3:28 PM
Index 2
Service Name E1000
IP Address 15.1.101.3
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server 15.1.101.1
DHCP Lease Expires 5/8/2007 3:33 PM

DHCP Lease Obtained 4/30/2007 3:33 PM
MAC Address 00:12:79:9E:6B:31
Memory Address 0x80120000-0x8013FFFF
Memory Address 0x800C0000-0x800FFFFF
I/O Port 0x00002040-0x0000207F
IRQ Channel IRQ 330

Name [00000003] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 4/30/2007 3:28 PM
Index 3
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000004] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPORT\0000
Last Reset 4/30/2007 3:28 PM
Index 4
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000005] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset 4/30/2007 3:28 PM
Index 5
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30

Name [00000006] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
Last Reset 4/30/2007 3:28 PM
Index 6
Service Name RasPppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30

Name [00000007] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTMINIPORT\0000
 Last Reset 4/30/2007 3:28 PM
 Index 7
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Name [00000008] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 4/30/2007 3:28 PM
 Index 8
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Name [00000009] Broadcom NetXtreme Gigabit Ethernet
 Adapter Type Not Available
 Product Type Broadcom NetXtreme Gigabit Ethernet
 Installed Yes
 PNP Device ID Not Available
 Last Reset 4/30/2007 3:28 PM
 Index 9
 Service Name b57nd
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled Yes
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

[Protocol]

Item Value
 Name MSAFD Tcpip [TCP/IP]
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 16 bytes
 Maximum Message Size 0 bytes
 Message Oriented No
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data Yes
 Supports Graceful Closing Yes
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

Name MSAFD Tcpip [UDP/IP]
 Connectionless Service Yes
 Guarantees Delivery No

Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)
 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption No
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting Yes

Name RSVP UDP Service Provider
 Connectionless Service Yes
 Guarantees Delivery No
 Guarantees Sequencing No
 Maximum Address Size 16 bytes
 Maximum Message Size 63.93 KB (65,467 bytes)
 Message Oriented Yes
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting Yes
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption Yes
 Supports Expedited Data No
 Supports Graceful Closing No
 Supports Guaranteed Bandwidth No
 Supports Multicasting Yes

Name RSVP TCP Service Provider
 Connectionless Service No
 Guarantees Delivery Yes
 Guarantees Sequencing Yes
 Maximum Address Size 16 bytes
 Maximum Message Size 0 bytes
 Message Oriented No
 Minimum Address Size 16 bytes
 Pseudo Stream Oriented No
 Supports Broadcasting No
 Supports Connect Data No
 Supports Disconnect Data No
 Supports Encryption Yes
 Supports Expedited Data Yes
 Supports Graceful Closing Yes
 Supports Guaranteed Bandwidth No
 Supports Multicasting No

[WinSock]

Item Value
 File c:\windows\system32\wssock32.dll
 Size 23.00 KB (23,552 bytes)
 Version 5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item Value

[Parallel]

Item Value

[Storage]

[Drives]

Item Value
 Drive C:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 33.30 GB (35,756,208,128 bytes)
 Free Space 4.70 GB (5,045,923,840 bytes)
 Volume Name PerfOS
 Volume Serial Number 6A7ACC17

Drive E:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 33.07 GB (35,508,531,200 bytes)
 Free Space 26.23 GB (28,169,445,376 bytes)
 Volume Name MgmtOS
 Volume Serial Number 7039995C

Drive G:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 33.79 GB (36,279,676,928 bytes)
 Free Space 7.13 GB (7,659,974,656 bytes)
 Volume Name G-Drive
 Volume Serial Number 182CA85F

Drive L:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive T:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 162.10 GB (174,048,931,840 bytes)
 Free Space 62.03 GB (66,601,844,736 bytes)
 Volume Name TempLog
 Volume Serial Number 84B86872

[Disks]

Item Value
 Description \\.\PHYSICALDRIVE136
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #136, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #136, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #136, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE137
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #137, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #137, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE138
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #138, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #138, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #138, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE139
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #139, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #139, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE140
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #140, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #140, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #140, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE141
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #141, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #141, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE142
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255

Description \\.\PHYSICALDRIVE143
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #143, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #143, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE144
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #144, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #144, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #144, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE145
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #145, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #145, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE146
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #146, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #146, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #146, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE147
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #147, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #147, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE148
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #148, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #148, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #148, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE149

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #149, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #149, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE150
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #150, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #150, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #150, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE151
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #151, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #151, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE120

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #120, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #120, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #120, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE121
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #121, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #121, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE122
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #122, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #122, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #122, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE123
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #123, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #123, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE124
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #124, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #124, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #124, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE125
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #125, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #125, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE126
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #126, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #126, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #126, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE127
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #127, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #127, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE56
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #56, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #56, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #56, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE57
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #57, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #57, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE58
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #58, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #58, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #58, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE59
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #59, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #59, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE60
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #60, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #60, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #60, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE61
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #61, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #61, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE62
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #62, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #62, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #62, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE63
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #63, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #63, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE376
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #376, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #376, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #376, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE377
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #377, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #377, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE378
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #378, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #378, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #378, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE379
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #379, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #379, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE380
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #380, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #380, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #380, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE381
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #381, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #381, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE382
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #382, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #382, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #382, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE383
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #383, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #383, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE40
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #40, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #40, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #40, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE41
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #41, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #41, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE42
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #42, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #42, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #42, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE43
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #43, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #43, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE44
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #44, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #44, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #44, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE45
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #45, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #45, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE46
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #46, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #46, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #46, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE47
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #47, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #47, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE32
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #32, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #32, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #32, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE33
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #33, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #33, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE34
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #34, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #34, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #34, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE35
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #35, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #35, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE36
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #36, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #36, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #36, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE37
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #37, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #37, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE38
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #38, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #38, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #38, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE39
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #39, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #39, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE216
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #216, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #216, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #216, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE217
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #217, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #217, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE218

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #218, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #218, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #218, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE219

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #219, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #219, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE220

Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #220, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #220, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #220, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE221

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #221, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #221, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE222

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #222, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #222, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #222, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE223

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #223, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #223, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE112
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #112, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #112, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #112, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE113
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #113, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #113, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE114

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #114, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #114, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #114, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE115
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #115, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #115, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE116
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #116, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #116, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #116, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE117
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #117, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #117, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE118
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #118, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #118, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #118, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE119
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #119, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #119, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE352
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #352, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #352, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #352, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE353
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #353, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #353, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE354
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #354, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #354, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #354, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE355
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #355, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #355, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE356
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #356, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #356, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #356, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE357
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #357, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #357, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE358
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #358, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #358, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #358, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE359
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #359, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #359, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE368
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #368, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #368, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #368, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE369
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #369, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #369, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE370
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #370, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #370, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #370, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE371
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #371, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #371, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE372
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #372, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #372, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #372, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE373
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #373, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #373, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE374
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #374, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #374, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #374, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE375
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #375, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #375, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE168
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #168, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #168, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #168, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE169
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #169, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #169, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE170
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #170, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #170, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #170, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE171
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #171, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #171, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE172
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #172, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #172, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #172, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE173
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #173, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #173, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE174
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #174, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #174, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #174, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE175
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #175, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #175, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE360
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #360, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #360, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #360, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE361
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #361, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #361, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE362
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #362, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #362, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #362, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE363
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #363, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #363, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE364
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #364, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #364, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #364, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE365
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #365, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #365, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE366
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #366, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #366, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #366, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE367
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #367, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #367, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE328
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #328, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #328, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #328, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE329
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #329, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #329, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE330
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #330, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #330, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #330, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE331
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #331, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #331, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE332
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #332, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #332, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #332, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE333
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #333, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #333, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE334
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #334, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #334, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #334, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE335
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #335, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #335, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE184
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #184, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #184, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #184, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE185

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #185, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #185, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE186
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #186, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #186, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #186, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE187
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #187, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #187, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE188

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #188, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #188, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #188, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE189
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #189, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #189, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE190
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #190, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #190, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #190, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE191
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #191, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #191, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE16
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #16, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #16, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE17
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #17, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #17, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE18
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #18, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #18, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #18, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE19
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #19, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #19, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE20
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #20, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #20, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #20, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE21
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #21, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #21, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE22
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #22, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #22, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #22, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE23
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #23, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #23, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE248
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #248, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #248, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #248, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE249
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #249, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #249, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE250
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #250, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #250, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #250, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE251
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #251, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #251, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE252
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #252, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #252, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #252, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE253
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #253, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #253, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE254
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #254, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #254, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #254, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE255
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #255, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #255, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE128
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #128, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #128, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #128, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE129
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #129, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #129, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE130
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #130, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #130, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #130, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE131
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #131, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #131, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE132
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #132, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #132, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #132, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE133
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #133, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #133, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE134
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #134, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #134, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #134, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE135
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #135, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #135, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE176
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #176, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #176, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #176, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE177
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #177, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #177, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE178
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #178, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #178, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #178, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE179
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #179, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #179, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE180
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #180, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #180, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #180, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE181
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #181, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #181, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE182
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #182, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #182, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #182, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE183
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #183, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #183, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE296
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #296, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #296, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #296, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE297
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #297, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #297, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE298
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #298, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #298, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #298, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE299
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #299, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #299, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE300
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #300, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #300, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #300, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE301
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #301, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #301, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE302
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #302, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #302, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #302, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE303
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #303, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #303, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE336
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #336, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #336, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #336, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE337
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #337, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #337, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE338
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #338, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #338, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #338, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE339

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #339, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #339, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE340
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #340, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #340, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #340, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE341
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #341, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #341, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE342

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #342, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #342, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #342, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE343
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #343, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #343, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE48
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #48, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #48, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #48, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE49
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #49, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #49, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE50
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #50, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #50, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #50, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE51
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #51, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #51, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE52
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #52, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #52, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #52, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE53
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #53, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #53, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE54
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #54, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #54, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #54, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE55
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #55, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #55, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE88
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #88, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #88, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #88, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE89
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #89, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #89, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE90
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #90, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #90, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #90, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE91
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #91, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #91, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE92
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #92, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #92, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #92, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE93
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #93, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #93, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE94
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #94, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #94, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #94, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE95
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #95, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #95, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE264
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #264, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #264, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #264, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE265
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #265, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #265, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE266
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #266, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #266, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #266, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE267
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #267, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #267, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE268
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #268, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #268, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #268, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE269
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #269, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #269, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE270
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #270, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #270, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #270, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE271
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #271, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #271, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE72
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #72, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #72, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #72, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE73
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #73, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #73, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE74
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #74, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #74, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #74, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE75
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #75, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #75, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE76
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #76, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #76, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #76, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE77
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #77, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #77, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE78
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #78, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #78, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #78, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE79
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #79, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #79, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE256
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #256, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #256, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #256, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE257
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #257, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #257, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE258
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #258, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #258, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #258, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE259
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #259, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #259, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE260
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #260, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #260, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #260, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE261
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #261, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #261, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE262
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #262, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #262, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #262, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE263
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #263, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #263, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE192
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #192, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #192, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #192, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE193
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #193, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #193, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE194
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #194, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #194, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #194, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE195
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #195, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #195, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE196
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #196, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #196, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #196, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE197

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #197, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #197, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE198
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #198, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #198, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #198, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE199
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #199, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #199, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE104

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #104, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #104, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #104, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE105
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #105, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #105, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE106
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #106, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #106, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #106, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE107
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #107, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #107, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE108
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #108, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #108, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #108, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE109
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #109, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #109, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE110
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #110, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #110, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #110, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE111
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #111, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #111, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE80
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #80, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #80, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #80, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE81
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #81, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #81, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE82
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #82, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #82, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #82, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE83
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #83, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #83, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE84
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #84, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #84, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #84, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE85
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #85, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #85, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE86
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #86, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #86, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #86, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE87
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #87, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #87, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE232
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #232, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #232, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #232, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE233
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #233, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #233, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE234
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #234, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #234, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #234, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE235
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #235, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #235, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE236
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #236, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #236, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #236, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE237
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #237, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #237, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE238
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #238, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #238, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #238, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE239
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #239, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #239, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE200
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #200, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #200, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #200, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE201
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #201, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #201, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE202
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #202, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #202, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #202, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE203
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #203, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #203, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE204
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #204, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #204, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #204, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE205
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #205, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #205, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE206
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #206, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #206, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #206, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE207
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #207, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #207, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE320
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #320, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #320, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #320, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE321
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #321, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #321, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE322
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #322, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #322, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #322, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE323
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #323, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #323, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE324
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #324, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #324, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #324, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE325
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #325, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #325, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE326
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #326, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #326, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #326, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE327
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #327, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #327, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE280
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #280, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #280, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #280, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE281
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #281, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #281, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE282

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #282, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #282, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #282, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE283

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #283, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #283, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE284

Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #284, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #284, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #284, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE285

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #285, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #285, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE286

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #286, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #286, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #286, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE287

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #287, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #287, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE312
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #312, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #312, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #312, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE313
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #313, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #313, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE314

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #314, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #314, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #314, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE315
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #315, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #315, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE316
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #316, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #316, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #316, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE317
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #317, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #317, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE318
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #318, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #318, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #318, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE319
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #319, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #319, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE96
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #96, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #96, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #96, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE97
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #97, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #97, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE98
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #98, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #98, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #98, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE99
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #99, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #99, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE100
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #100, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #100, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #100, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE101
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #101, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #101, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE102
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #102, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #102, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #102, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE103
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #103, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #103, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE272
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #272, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #272, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #272, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE273
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #273, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #273, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE274
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #274, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #274, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #274, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE275
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #275, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #275, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE276
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #276, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #276, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #276, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE277
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #277, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #277, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE278
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #278, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #278, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #278, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE279
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #279, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #279, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE240
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #240, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #240, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #240, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE241
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #241, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #241, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE242
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #242, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #242, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #242, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE243
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #243, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #243, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE244
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #244, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #244, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #244, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE245
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #245, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #245, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE246
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #246, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #246, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #246, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE247
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #247, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #247, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE152
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #152, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #152, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #152, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE153
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #153, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #153, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE154
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available

SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #154, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #154, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #154, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE155
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #155, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #155, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE156
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #156, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #156, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #156, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE157
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #157, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #157, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE158
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #158, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #158, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #158, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE159
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #159, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #159, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE208
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3

SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #208, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #208, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #208, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE209
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #209, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #209, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE210
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #210, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #210, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #210, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE211
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #211, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #211, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE212
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #212, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #212, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #212, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE213
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #213, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #213, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE214
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #214, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #214, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #214, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE215
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #215, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #215, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE288
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #288, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #288, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #288, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE289

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #289, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #289, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE290
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #290, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #290, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #290, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE291
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #291, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #291, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE292

Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #292, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #292, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #292, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE293
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #293, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #293, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE294
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #294, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #294, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #294, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE295
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #295, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #295, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE160
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #160, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #160, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #160, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE161
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #161, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #161, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE162
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #162, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #162, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #162, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE163
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #163, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #163, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE164
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #164, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #164, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #164, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE165
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #165, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #165, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE166
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #166, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #166, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #166, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE167
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #167, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #167, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE224
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #224, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #224, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #224, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE225
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #225, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #225, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE226
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #226, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
Partition Disk #226, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #226, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE227
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #227, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #227, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE228
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #228, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #228, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #228, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE229
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170

Tracks/Cylinder 255
Partition Disk #229, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #229, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE230
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #230, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #230, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #230, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE231
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #231, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #231, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE304
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370

Tracks/Cylinder 255
Partition Disk #304, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #304, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #304, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE305
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #305, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #305, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE306
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #306, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #306, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #306, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE307
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)

Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #307, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #307, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE308
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #308, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #308, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #308, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE309
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #309, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #309, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE310
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)

Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #310, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #310, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #310, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE311
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #311, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #311, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE344
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #344, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #344, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #344, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE345
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #345, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #345, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE346
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #346, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #346, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #346, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE347
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #347, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #347, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE348
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available

SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #348, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #348, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #348, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE349
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #349, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #349, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE350
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #350, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #350, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #350, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE351
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #351, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #351, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE8
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #8, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #8, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #8, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE9
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #9, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #9, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE10
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3

SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #10, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #10, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #10, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE11
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #11, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #11, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE12
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #12, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #12, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #12, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE13
Manufacturer Not Available
Model Not Available
Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #13, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #13, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE14
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #14, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #14, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE15
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #15, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512

Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #0, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #0, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE1
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #1, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #1, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE2
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #2, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #2, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #2, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE3

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #3, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #3, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE4
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #4, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #4, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #4, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE5
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #5, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #5, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE6

Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #6, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #6, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #6, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE7
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #7, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #7, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE64
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #64, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #64, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #64, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)

Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE65
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #65, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #65, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE66
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #66, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #66, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #66, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE67
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #67, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #67, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)

Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE68
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #68, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #68, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #68, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE69
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #69, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #69, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE70
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #70, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #70, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)

Partition Starting Offset 24,252,514,304 bytes
Partition Disk #70, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE71
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #71, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #71, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE24
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #24, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #24, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #24, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE25
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #25, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #25, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE26
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #26, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)
Partition Starting Offset 135,266,304 bytes
Partition Disk #26, Partition #1
Partition Size 7.81 GB (8,388,608,000 bytes)
Partition Starting Offset 24,252,514,304 bytes
Partition Disk #26, Partition #2
Partition Size 18.43 GB (19,787,578,880 bytes)
Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE27
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 2
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 86.82 GB (93,225,323,520 bytes)
Total Cylinders 11,334
Total Sectors 182,080,710
Total Tracks 2,890,170
Tracks/Cylinder 255
Partition Disk #27, Partition #0
Partition Size 1.00 MB (1,048,576 bytes)
Partition Starting Offset 17,408 bytes
Partition Disk #27, Partition #1
Partition Size 86.70 GB (93,096,032,768 bytes)
Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE28
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 3
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #28, Partition #0
Partition Size 22.46 GB (24,117,248,000 bytes)

Partition Starting Offset 135,266,304 bytes
 Partition Disk #28, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #28, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE29
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170
 Tracks/Cylinder 255
 Partition Disk #29, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #29, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description \\.\PHYSICALDRIVE30
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #30, Partition #0
 Partition Size 22.46 GB (24,117,248,000 bytes)
 Partition Starting Offset 135,266,304 bytes
 Partition Disk #30, Partition #1
 Partition Size 7.81 GB (8,388,608,000 bytes)
 Partition Starting Offset 24,252,514,304 bytes
 Partition Disk #30, Partition #2
 Partition Size 18.43 GB (19,787,578,880 bytes)
 Partition Starting Offset 32,641,122,304 bytes

Description \\.\PHYSICALDRIVE31
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 86.82 GB (93,225,323,520 bytes)
 Total Cylinders 11,334
 Total Sectors 182,080,710
 Total Tracks 2,890,170

Tracks/Cylinder 255
 Partition Disk #31, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #31, Partition #1
 Partition Size 86.70 GB (93,096,032,768 bytes)
 Partition Starting Offset 134,235,136 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model COMPAQ MSA1000 VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 1
 SCSI Target ID 0
 Sectors/Track 63
 Size 237.42 GB (254,926,103,040 bytes)
 Total Cylinders 30,993
 Total Sectors 497,902,545
 Total Tracks 7,903,215
 Tracks/Cylinder 255
 Partition Disk #385, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #385, Partition #1
 Partition Size 237.30 GB (254,798,248,448 bytes)
 Partition Starting Offset 134,235,136 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model COMPAQ MSA1000 VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus 0
 SCSI Logical Unit 1
 SCSI Port 0
 SCSI Target ID 0
 Sectors/Track 63
 Size 237.42 GB (254,926,103,040 bytes)
 Total Cylinders 30,993
 Total Sectors 497,902,545
 Total Tracks 7,903,215
 Tracks/Cylinder 255
 Partition Disk #384, Partition #0
 Partition Size 1.00 MB (1,048,576 bytes)
 Partition Starting Offset 17,408 bytes
 Partition Disk #384, Partition #1
 Partition Size 237.30 GB (254,798,248,448 bytes)
 Partition Starting Offset 134,235,136 bytes

Description Disk drive
 Manufacturer (Standard disk drives)
 Model HP LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 3
 SCSI Bus 0
 SCSI Logical Unit 0
 SCSI Port 2
 SCSI Target ID 4
 Sectors/Track 63
 Size 33.91 GB (36,413,314,560 bytes)
 Total Cylinders 4,427
 Total Sectors 71,119,755
 Total Tracks 1,128,885
 Tracks/Cylinder 255
 Partition Disk #386, Partition #0
 Partition Size 100.00 MB (104,857,600 bytes)

Partition Starting Offset 17,408 bytes
Partition Disk #386, Partition #1
Partition Size 400.00 MB (419,430,400 bytes)
Partition Starting Offset 104,875,008 bytes
Partition Disk #386, Partition #2
Partition Size 33.30 GB (35,756,210,176 bytes)
Partition Starting Offset 658,523,648 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 5
Sectors/Track 63
Size 33.91 GB (36,413,314,560 bytes)
Total Cylinders 4,427
Total Sectors 71,119,755
Total Tracks 1,128,885
Tracks/Cylinder 255
Partition Disk #387, Partition #0
Partition Size 33.79 GB (36,279,681,024 bytes)
Partition Starting Offset 134,235,136 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 6
Sectors/Track 63
Size 33.20 GB (35,648,363,520 bytes)
Total Cylinders 4,334
Total Sectors 69,625,710
Total Tracks 1,105,170
Tracks/Cylinder 255
Partition Disk #388, Partition #0
Partition Size 33.07 GB (35,508,533,760 bytes)
Partition Starting Offset 139,829,760 bytes

[SCSI]

Item Value
Name Smart Array 6400 Controller
Manufacturer Hewlett-Packard Company
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&A4F6191&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 58

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&235652B9&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 69

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1515489B&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 80

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1343AC2F&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000A000-0x0000AFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 113

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&20AE6B46&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 124

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&20306884&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 135

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&37940A43&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 146

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&101050B3&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 199

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCIIVEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1F4EF7C7&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF

IRQ Channel IRQ 210

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&17F6C54C&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 221

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&34D48D83&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 265

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&17E5D392&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 276

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1841A4F2&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 287

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&2B23C123&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 340

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&34F3E515&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 351

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&385777D7&0&2008
Memory Address 0x80080000-0x80081FFF

I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 362

Name Emulex LightPulse LP1050, Storport Miniport Driver
Manufacturer Emulex
Status OK
PNP Device ID

PCI\VEN_10DF&DEV_F0A5&SUBSYS_F0A510DF&REV_01\5&17DB65C1&0&08
Memory Address 0x80040000-0x8007FFFF
Memory Address 0x80041000-0x800410FF
I/O Port 0x00009000-0x00009FFF
IRQ Channel IRQ 384

Name Emulex LightPulse LP1050, PCI Slot 11109, Storport Miniport Driver
Manufacturer Emulex
Status OK
PNP Device ID

PCI\VEN_10DF&DEV_F0A5&SUBSYS_F0A510DF&REV_01\5&6BC8B59&0&08
Memory Address 0x80040000-0x8007FFFF
Memory Address 0x80041000-0x800410FF
I/O Port 0x0000A000-0x0000AFFF
IRQ Channel IRQ 395

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&A744A0&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 406

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&BC6FE6F&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 417

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&E46E896&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 428

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID

PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&35B4DD70&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 481

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK

PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1564F926&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 492

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&12EEBAA&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 503

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&10ACDC9C&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 547

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1BEB322&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 558

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&12B54397&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 569

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&31DFDE09&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 622

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&2D74616F&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 633

Name Smart Array 6400 Controller SG (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&33E3EADD&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 644

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&39700FB2&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 688

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&4DBE04C&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 699

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&CDC72D&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 710

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&25D295F0&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 763

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&117134A8&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 774

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1323537D&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 785

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&5E75036&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000A000-0x0000AFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 818

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&16D93B7F&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 840

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&19FBEA94&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 851

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&259DB4FE&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 904

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&3515D47F&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 915

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&238B56A3&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 926

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&31ED1944&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF

Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 970

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1BF37FA9&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 981

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1FC20C8&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 992

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&18CCA847&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1045

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&6D21B21&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00005000-0x00005FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1056

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&1134F1ED&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1067

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&8E266AA&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000C000-0x0000CFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1111

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01\6&22560893&0&2008

Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000D000-0x0000DFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1122

Name Smart Array 6400 Controller SG (Non-Miniport)
Manufacturer Hewlett-Packard
Status OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_409C0E11&REV_01
6&246387A0&0&2008
Memory Address 0x80080000-0x80081FFF
I/O Port 0x0000E000-0x0000EFFF
Memory Address 0x80040000-0x8007FFFF
IRQ Channel IRQ 1133

[IDE]

Item Value

[Printing]

Name Driver Port Name Server Name

[Problem Devices]

Device PNP Device ID Error Code

[USB]

Device PNP Device ID

[Software Environment]

[System Drivers]

Name	Description	File Type	Started	Start Mode	State
Status	Error Control	Accept Pause	Accept Stop		
4mmdat	4mmdat	c:\windows\system32\drivers\4mmdat.sys	Kernel Driver	No Manual Stopped	OK Normal No No
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	Disabled Stopped OK Ignore No No
acpi	Microsoft ACPI Driver				
		c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	Boot Running OK Normal No Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
adpu160m	adpu160m				
		c:\windows\system32\drivers\adpu160m.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
adpu320	adpu320				
		c:\windows\system32\drivers\adpu320.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
afcnt	afcnt	c:\windows\system32\drivers\afcnt.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
afd	AFD	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes System Running	OK Normal No Yes
agp460	Intel AGP Bus Filter				
		c:\windows\system32\drivers\agp460.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
aic78u2	aic78u2	c:\windows\system32\drivers\aic78u2.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
aic78xx	aic78xx	c:\windows\system32\drivers\aic78xx.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
aliide	Alilde	c:\windows\system32\drivers\aliide.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
arc	arc	Not Available	Kernel Driver	No Disabled Stopped	OK Normal No No

asynmac	RAS Asynchronous Media Driver				
		c:\windows\system32\drivers\asynmac.sys	Kernel Driver	No Manual Stopped	OK Normal No No
atapi	Standard IDE/ESDI Hard Disk Controller				
		c:\windows\system32\drivers\atapi.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
atdisk	Atdisk	Not Available	Kernel Driver	No Disabled Stopped	OK Ignore No No
ati2mtag	ati2mtag				
		c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver	No Manual Stopped	OK Ignore No No
atmarpc	ATM ARP Client Protocol				
		c:\windows\system32\drivers\atmarpc.sys	Kernel Driver	No Manual Stopped	OK Normal No No
audstub	Audio Stub Driver				
		c:\windows\system32\drivers\audstub.sys	Kernel Driver	Yes Manual Running	OK Normal No Yes
b57nd	Broadcom NetXtreme Gigabit Ethernet				
		c:\windows\system32\drivers\b57xp64.sys	Kernel Driver	No Manual Stopped	OK Normal No No
beep	Beep				
		c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes System Running	OK Normal No Yes
cbidf	cbidf				
		c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cbidf2k	cbidf2k				
		c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cdfs	Cdfs				
		c:\windows\system32\drivers\cdfs.sys	File System Driver	No Disabled Stopped	OK Normal No No
cdrom	CD-ROM Driver				
		c:\windows\system32\drivers\cdrom.sys	Kernel Driver	No System Stopped	OK Normal No No
changer	Changer	Not Available	Kernel Driver	No System Stopped	OK Ignore No No
clustdisk	Cluster Disk Driver				
		c:\windows\system32\drivers\clustdisk.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cmdide	CmdIde				
		c:\windows\system32\drivers\cmdide.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cpqarry2	cpqarry2				
		c:\windows\system32\drivers\cpqarry2.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cpqcisse	CPQCISSE				
		c:\windows\system32\drivers\cpqcisse.sys	Kernel Driver	Yes Manual Running	OK Normal No Yes
cpqcissm	cpqcissm				
		c:\windows\system32\drivers\cpqcissm.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes
cpqfcalm	cpqfcalm				
		c:\windows\system32\drivers\cpqfcalm.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
cpqteam	HP Network Configuration Utility				
		c:\windows\system32\drivers\cpqteam.sys	Kernel Driver	No Manual Stopped	OK Normal No No
crdisk	CRC Disk Filter Driver				
		c:\windows\system32\drivers\crdisk.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes
dfsdriver	DfsDriver				
		c:\windows\system32\drivers\dfs.sys	File System Driver	Yes Boot Running	OK Normal No Yes
diskDisk	Disk Driver				
		c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes
dmboot	dmboot				
		c:\windows\system32\drivers\dmboot.sys	Kernel Driver	Yes Disabled Running	OK Normal No Yes
dmio	Logical Disk Manager Driver				
		c:\windows\system32\drivers\dmio.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes
dmload	dmload				
		c:\windows\system32\drivers\dmload.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes
dpti2o	dpti2o				
		c:\windows\system32\drivers\dpti2o.sys	Kernel Driver	No Disabled Stopped	OK Normal No No
e1000	Intel(R) PRO/1000 Network Connection Driver				
		c:\windows\system32\drivers\e1000645.sys	Kernel Driver	Yes Manual Running	OK Normal No Yes
elxadjct	elxadjct				
		c:\windows\system32\drivers\elxadjct.sys	Kernel Driver	Yes Boot Running	OK Normal No Yes

elxstor	elxstor	c:\windows\system32\drivers\elxstor.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
em	em	c:\windows\system32\drivers\em.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
fastfat	Fastfat	c:\windows\system32\drivers\fastfat.sys	File System Driver	No	Disabled	Stopped	OK	Normal	No	No
fdc	Fdc	c:\windows\system32\drivers\fdc.sys	Kernel Driver	No	System	Stopped	OK	Ignore	No	No
fips	Fips	c:\windows\system32\drivers\fips.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Yes
flpydisk	Flypydisk	c:\windows\system32\drivers\flpydisk.sys	Kernel Driver	No	System	Stopped	OK	Ignore	No	No
fltmgr	FltMgr	c:\windows\system32\drivers\fltmgr.sys	File System Driver	Yes	Boot	Running	OK	Normal	No	Yes
ftdisk	Volume Manager Driver	c:\windows\system32\drivers\ftdisk.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
gpc	Generic Packet Classifier	c:\windows\system32\drivers\msgpc.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
hidusb	Microsoft HID Class Driver	c:\windows\system32\drivers\hidusb.sys	Kernel Driver	No	Manual	Stopped	OK	Ignore	No	No
hpcisss	hpcisss	c:\windows\system32\drivers\hpcisss.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
hpcsr	HP CSR OpRegion Driver	c:\windows\system32\drivers\hpcsr.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
hphlth	HP Baseboard Management Controller Interface Device	c:\windows\system32\drivers\hphlth.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
hpmppser	HP MP Driver	c:\windows\system32\drivers\hpmppser.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
hpn	hpn	c:\windows\system32\drivers\hpn.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
hpqcissb	Smart Array Controllers Non-Miniport Bus Driver	c:\windows\system32\drivers\hpqcissb.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
hpqcissd	Smart Array Controllers Non-Miniport Disk Driver	c:\windows\system32\drivers\hpqcissd.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
http	HTTP	c:\windows\system32\drivers\http.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
i2omgmt	i2omgmt	Not Available	Kernel Driver	No	System	Stopped	OK	Normal	No	No
iirsp	iirsp	Not Available	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
imapi	CD-Burning Filter Driver	c:\windows\system32\drivers\imapi.sys	Kernel Driver	No	System	Stopped	OK	Normal	No	No
intelide	IntelIde	c:\windows\system32\drivers\intelide.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
ip6fw	IPv6 Windows Firewall Driver	c:\windows\system32\drivers\ip6fw.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ipfilterdriver	IP Traffic Filter Driver	c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ipinip	IP in IP Tunnel Driver	c:\windows\system32\drivers\ipinip.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ipnat	IP Network Address Translator	c:\windows\system32\drivers\ipnat.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Yes
isapnp	PnP ISA/EISA Bus Driver	c:\windows\system32\drivers\isapnp.sys	Kernel Driver	No	Disabled	Stopped	OK	Critical	No	No
kbdclass	Keyboard Class Driver	c:\windows\system32\drivers\kbdclass.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Yes
kbdhid	Keyboard HID Driver	c:\windows\system32\drivers\kbdhid.sys	Kernel Driver	No	System	Stopped	OK	Ignore	No	No
kldbgdrv	kldbgdrv	c:\windows\system32\drivers\kldbgdrv.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
krdrv	Kernel Driver	c:\windows\system32\drivers\krdrv.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ksecdd	KSecDD	c:\windows\system32\drivers\ksecdd.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
ksthunk	Kernel Streaming WOW64 Thunk Service	c:\windows\system32\drivers\ksthunk.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
lp6nds35	lp6nds35	c:\windows\system32\drivers\lp6nds35.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
lpxfr	lpxfr	c:\windows\system32\drivers\lpxfr.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
lpxnds	lpxnds	c:\windows\system32\drivers\lpxnds.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
mnmd	mnmd	Not Available	Kernel Driver	No	System	Stopped	OK	Ignore	No	No
modem	Modem	c:\windows\system32\drivers\modem.sys	Kernel Driver	No	Manual	Stopped	OK	Ignore	No	No
mouclass	Mouse Class Driver	c:\windows\system32\drivers\mouclass.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Yes
mouhid	Mouse HID Driver	c:\windows\system32\drivers\mouhid.sys	Kernel Driver	No	Manual	Stopped	OK	Ignore	No	No
mountmgr	Mount Point Manager	c:\windows\system32\drivers\mountmgr.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
mraid35x	mraid35x	c:\windows\system32\drivers\mraid35x.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
mrxdav	WebDav Client Redirector	c:\windows\system32\drivers\mrxdav.sys	File System Driver	No	Manual	Stopped	OK	Normal	No	No
mrxsm	MRXSMB	c:\windows\system32\drivers\mrxsm.sys	File System Driver	Yes	System	Running	OK	Normal	No	Yes
msfs	Msfs	c:\windows\system32\drivers\msfs.sys	File System Driver	Yes	System	Running	OK	Normal	No	Yes
mssmbios	Microsoft System Management BIOS Driver	c:\windows\system32\drivers\mssmbios.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
mup	Mup	c:\windows\system32\drivers\mup.sys	File System Driver	Yes	Boot	Running	OK	Normal	No	Yes
ndis	NDIS System Driver	c:\windows\system32\drivers\ndis.sys	Kernel Driver	Yes	Boot	Running	OK	Normal	No	Yes
ndistapi	Remote Access NDIS TAPI Driver	c:\windows\system32\drivers\ndistapi.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
ndisui	NDIS Usermode I/O Protocol	c:\windows\system32\drivers\ndisui.sys	Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ndiswan	Remote Access NDIS WAN Driver	c:\windows\system32\drivers\ndiswan.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
ndproxy	NDIS Proxy	c:\windows\system32\drivers\ndproxy.sys	Kernel Driver	Yes	Manual	Running	OK	Normal	No	Yes
netbios	NetBIOS Interface	c:\windows\system32\drivers\netbios.sys	File System Driver	Yes	System	Running	OK	Normal	No	Yes
netbt	NetBios over Tcpip	c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Yes
nfrd960	nfrd960	c:\windows\system32\drivers\nfrd960.sys	Kernel Driver	No	Disabled	Stopped	OK	Normal	No	No
npfs	Npfs	c:\windows\system32\drivers\npfs.sys	File System Driver	Yes	System	Running	OK	Normal	No	Yes
ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys	File System Driver	Yes	Disabled	Running	OK	Normal	No	Yes

null Null c:\windows\system32\drivers\null.sys Kernel Driver
 Yes System Running OK Normal No Yes
 partmgr Partition Manager
 c:\windows\system32\drivers\partmgr.sys Kernel Driver
 Yes Boot Running OK Normal No Yes
 pci PCI Bus Driver c:\windows\system32\drivers\pci.sys Kernel Driver
 Yes Boot Running OK Critical No Yes
 pciide PCIIDE c:\windows\system32\drivers\pciide.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 pcmcia Pcmcia c:\windows\system32\drivers\pcmcia.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 pdcomp PDCOMP Not Available Kernel Driver No Manual
 Stopped OK Ignore No No
 pdfm PDFFRAME Not Available Kernel Driver No
 Manual Stopped OK Ignore No No
 pdrel PDRELI Not Available Kernel Driver No Manual
 Stopped OK Ignore No No
 pdfm PDRFRAME Not Available Kernel Driver No
 Manual Stopped OK Ignore No No
 pptpminiport WAN Miniport (PPTP)
 c:\windows\system32\drivers\rasppp.sys Kernel Driver
 Yes Manual Running OK Normal No Yes
 processor Processor Driver
 c:\windows\system32\drivers\processr.sys Kernel Driver
 Yes Manual Running OK Normal No Yes
 procinfo ProcInfo c:\windows\system32\drivers\procinfo.sys
 Kernel Driver No Manual Stopped OK Normal No No
 ptlink Direct Parallel Link Driver
 c:\windows\system32\drivers\ptlink.sys Kernel Driver Yes
 Manual Running OK Normal No Yes
 ql1080 ql1080 c:\windows\system32\drivers\ql1080.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 ql12160 ql12160 c:\windows\system32\drivers\ql12160.sys
 Kernel Driver No Disabled Stopped OK Normal No No
 ql1240 ql1240 c:\windows\system32\drivers\ql1240.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 ql1280 ql1280 c:\windows\system32\drivers\ql1280.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 ql2100 ql2100 c:\windows\system32\drivers\ql2100.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 ql2200 ql2200 c:\windows\system32\drivers\ql2200.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 ql2300 QLogic Fibre Channel STOR Miniport Driver (wia64 IP)
 c:\windows\system32\drivers\ql2300.sys Kernel Driver No
 Disabled Stopped OK Normal No No
 rasacd Remote Access Auto Connection Driver
 c:\windows\system32\drivers\rasacd.sys Kernel Driver Yes
 System Running OK Normal No Yes
 rasl2tp WAN Miniport (L2TP)
 c:\windows\system32\drivers\rasl2tp.sys Kernel Driver Yes
 Manual Running OK Normal No Yes
 rasppoe Remote Access PPPOE Driver
 c:\windows\system32\drivers\rasppoe.sys Kernel Driver
 Yes Manual Running OK Normal No Yes
 raspti Direct Parallel c:\windows\system32\drivers\raspti.sys
 Kernel Driver Yes Manual Running OK Normal No Yes
 rdbss Rdbss c:\windows\system32\drivers\rdbss.sys File
 System Driver Yes System Running OK Normal No Yes
 rdpcdd RDPDCC c:\windows\system32\drivers\rdpcdd.sys
 Kernel Driver Yes System Running OK Ignore No Yes
 rdpdr Terminal Server Device Redirector Driver
 c:\windows\system32\drivers\rdpdr.sys Kernel Driver Yes
 Manual Running OK Normal No Yes
 rdpwd RDPWD c:\windows\system32\drivers\rdpwd.sys
 Kernel Driver Yes Manual Running OK Ignore No Yes
 redbook Digital CD Audio Playback Filter Driver
 c:\windows\system32\drivers\redbook.sys Kernel Driver
 No System Stopped OK Normal No No
 rio Real I/O c:\windows\system32\drivers\rio.sys Kernel Driver
 No Manual Stopped OK Normal No No
 serenum Serenum Filter Driver
 c:\windows\system32\drivers\serenum.sys Kernel Driver
 No Manual Stopped OK Normal No No

serial Serial port driver
 c:\windows\system32\drivers\serial.sys Kernel Driver No
 System Stopped OK Ignore No No
 sfloppy Sfloppy c:\windows\system32\drivers\sfloppy.sys Kernel Driver
 No System Stopped OK Ignore No No
 simbad Simbad Not Available Kernel Driver No Disabled
 Stopped OK Normal No No
 slowmemory Slow Memory Measurement
 c:\windows\system32\drivers\slowmemory.sys Kernel Driver
 No Manual Stopped OK Normal No No
 srv Srv c:\windows\system32\drivers\srv.sys File System Driver
 Yes Manual Running OK Normal No Yes
 swenum Software Bus Driver
 c:\windows\system32\drivers\swenum.sys Kernel Driver
 Yes Manual Running OK Normal No Yes
 symc8xx symc8xx
 c:\windows\system32\drivers\symc8xx.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 symmpi symmpi c:\windows\system32\drivers\symmpi.sys
 Kernel Driver No Disabled Stopped OK Normal No No
 sym_hi sym_hi c:\windows\system32\drivers\sym_hi.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 sym_u3 sym_u3 c:\windows\system32\drivers\sym_u3.sys
 Kernel Driver Yes Boot Running OK Normal No Yes
 tcpip TCP/IP Protocol Driver
 c:\windows\system32\drivers\tcpip.sys Kernel Driver Yes
 System Running OK Normal No Yes
 tdppe TDPIPE c:\windows\system32\drivers\tdppe.sys
 Kernel Driver No Manual Stopped OK Ignore No No
 tdtcp TDTCP c:\windows\system32\drivers\tdtcp.sys Kernel Driver
 Yes Manual Running OK Ignore No Yes
 termdd Terminal Device Driver
 c:\windows\system32\drivers\termdd.sys Kernel Driver Yes
 System Running OK Normal No Yes
 toside Toside c:\windows\system32\drivers\toside.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 udfs Udfs c:\windows\system32\drivers\udfs.sys File
 System Driver No Disabled Stopped OK Normal No No
 usbccgp Microsoft USB Generic Parent Driver
 c:\windows\system32\drivers\usbccgp.sys Kernel Driver
 No Manual Stopped OK Normal No No
 usbehci Microsoft USB 2.0 Enhanced Host Controller Miniport
 Driver c:\windows\system32\drivers\usbehci.sys Kernel Driver
 No Manual Stopped OK Normal No No
 ushub USB2 Enabled Hub
 c:\windows\system32\drivers\usbhub.sys Kernel Driver
 No Manual Stopped OK Normal No No
 usbohci Microsoft USB Open Host Controller Miniport Driver
 c:\windows\system32\drivers\usbohci.sys Kernel Driver
 No Manual Stopped OK Normal No No
 vgasave VGA Display Controller.
 c:\windows\system32\drivers\vga.sys Kernel Driver No
 System Stopped OK Ignore No No
 viaide Vialde c:\windows\system32\drivers\viaide.sys Kernel Driver
 No Disabled Stopped OK Normal No No
 volsnap Storage volumes
 c:\windows\system32\drivers\volsnap.sys Kernel Driver
 Yes Boot Running OK Normal No Yes
 wanarp Remote Access IP ARP Driver
 c:\windows\system32\drivers\wanarp.sys Kernel Driver
 Yes Manual Running OK Normal No Yes
 wdica WDICA Not Available Kernel Driver No Manual
 Stopped OK Ignore No No
 wlbs Network Load Balancing
 c:\windows\system32\drivers\wlbs.sys Kernel Driver No
 Manual Stopped OK Normal No No

[Signed Drivers]

Device Name	Signed	Device Class	Driver Version	Driver Date	Manufacturer	INF Name	Driver Name	Device ID
-------------	--------	--------------	----------------	-------------	--------------	----------	-------------	-----------

[Environment Variables]

Variable Value User Name
 ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
 Path
 %SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;%SystemRoot%\syswow64\C:\Program Files (x86)\Microsoft SQL Server\80\Tools\Binn\C:\Program Files\Microsoft SQL Server\90\Tools\Binn\C:\Program Files (x86)\Microsoft SQL Server\90\Tools\Binn\C:\Program Files\Microsoft SQL Server\90\Tools\Binn\ <SYSTEM>
 windir %SystemRoot% <SYSTEM>
 FP_NO_HOST_CHECK NO <SYSTEM>
 OS Windows_NT <SYSTEM>
 PROCESSOR_ARCHITECTURE IA64 <SYSTEM>
 PROCESSOR_LEVEL 32 <SYSTEM>
 PROCESSOR_IDENTIFIER ia64 Family 32 Model 0 Stepping 5, GenuineIntel <SYSTEM>
 PROCESSOR_REVISION 0005 <SYSTEM>
 NUMBER_OF_PROCESSORS 64 <SYSTEM>
 ClusterLog C:\WINDOWS\Cluster\cluster.log <SYSTEM>
 PATHEXT
 .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH <SYSTEM>
 TEMP %SystemRoot%\TEMP <SYSTEM>
 TMP %SystemRoot%\TEMP <SYSTEM>
 _NT_SYMBOL_PATH SRV*\symbols\symbols <SYSTEM>
 TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
 TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
 TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
 TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
 TEMP %USERPROFILE%\Local Settings\Temp SQLDUNE\Administrator
 TMP %USERPROFILE%\Local Settings\Temp SQLDUNE\Administrator
 _NT_SYMBOL_PATH SRV*\symbols\symbols SQLDUNE\Administrator

[Print Jobs]

Document	Size	Owner	Notify	Status	Time Submitted	Start
Time	Until Time	Elapsed Time	Pages Printed	Job ID	Priority	Parameters
Queue	Data	Type	Name	Driver	Print Processor	Host Print

[Network Connections]

Local Name	Remote Name	Type	Status	User Name
------------	-------------	------	--------	-----------

[Running Tasks]

Name	Path	Process ID	Priority	Min	Working Set	Max
Working Set	Start Time	Version	Size	File Date		
system idle process	Not Available	0	0	Not Available	Not Available	Not Available
system	Not Available	4	8	0	2826240	Not Available
smss.exe	Not Available	344	11	409600	2826240	4/30/2007 3:33 PM
csrss.exe	Not Available	392	13	Not Available	Not Available	4/30/2007 3:33 PM
winlogon.exe	c:\windows\system32\winlogon.exe	416	13	409600	2826240	4/30/2007 3:33 PM

services.exe	c:\windows\system32\services.exe	4609	409600	2826240	4/30/2007 3:33 PM	5.2.3790.1830
(srv03_sp1_rtm.050324-1447)	300.00 KB (307,200 bytes)	3/25/2005 5:00 AM				
lsass.exe	c:\windows\system32\lsass.exe	4729	409600	2826240	4/30/2007 3:33 PM	5.2.3790.0
(srv03_rtm.030324-2048)	15.00 KB (15,360 bytes)	3/25/2005 5:00 AM				
svchost.exe	c:\windows\system32\svchost.exe	6568	409600	2826240	4/30/2007 3:33 PM	5.2.3790.1830
(srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 5:00 AM				
svchost.exe	Not Available	7048	Not Available	Not Available	4/30/2007 3:33 PM	Not Available
svchost.exe	Not Available	7528	Not Available	Not Available	4/30/2007 3:33 PM	Not Available
svchost.exe	Not Available	8008	Not Available	Not Available	4/30/2007 3:33 PM	Not Available
svchost.exe	c:\windows\system32\svchost.exe	8288	409600	2826240	4/30/2007 3:33 PM	5.2.3790.1830
(srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 5:00 AM				
msdtc.exe	Not Available	9848	Not Available	Not Available	4/30/2007 3:33 PM	Not Available
svchost.exe	c:\windows\system32\svchost.exe	1068	8	409600	2826240	4/30/2007 3:33 PM
(srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 5:00 AM				
sqlwriter.exe	c:\program files\microsoft sql server\90\shared\sqlwriter.exe	1096	8	409600	2826240	4/30/2007 3:33 PM
(srv03_sp1_rtm.050324-1447)	268.86 KB (275,312 bytes)	2/10/2007 10:27 AM				
svchost.exe	c:\windows\system32\svchost.exe	1772	8	409600	2826240	4/30/2007 3:34 PM
(srv03_sp1_rtm.050324-1447)	36.00 KB (36,864 bytes)	3/25/2005 5:00 AM				
wmiprvse.exe	Not Available	1920	8	Not Available	Not Available	4/30/2007 3:35 PM
csrss.exe	Not Available	2168	13	Not Available	Not Available	4/30/2007 3:35 PM
winlogon.exe	c:\windows\system32\winlogon.exe	2192	13	409600	2826240	4/30/2007 3:35 PM
(srv03_sp1_rtm.050324-1447)	664.50 KB (680,448 bytes)	3/25/2005 5:00 AM				
rdpclip.exe	c:\windows\system32\rdpclip.exe	2340	8	409600	2826240	4/30/2007 3:35 PM
(srv03_sp1_rtm.050324-1447)	211.00 KB (216,064 bytes)	3/25/2005 5:00 AM				
explorer.exe	c:\windows\explorer.exe	2432	8	409600	2826240	4/30/2007 3:35 PM
(srv03_sp1_rtm.050324-1447)	1.64 MB (1,716,224 bytes)	10/3/2006 4:01 PM				
cpqteam.exe	c:\windows\system32\cpqteam.exe	2520	8	409600	2826240	4/30/2007 3:35 PM
(srv03_sp1_rtm.050324-1447)	101.50 KB (103,936 bytes)	5/23/2006 3:11 PM				
cmd.exe	c:\windows\system32\cmd.exe	2968	8	409600	2826240	4/30/2007 3:38 PM
(srv03_sp1_rtm.050324-1447)	507.50 KB (519,680 bytes)	3/25/2005 5:00 AM				
sqlservr.exe	c:\program files\microsoft sql server\mssql.1\mssql\bin\sqlservr.exe	2976	8	409600	2826240	4/30/2007 3:38 PM
(srv03_sp1_rtm.050324-1447)	69.17 MB (72,527,728 bytes)	4/16/2007 9:46 AM				
logon.scr	Not Available	2836	4	Not Available	Not Available	4/30/2007 3:45 PM
isqlw.exe	g:\isqlw\isqlw.exe	3628	8	409600	2826240	5/1/2007 9:27 AM
(srv03_sp1_rtm.050324-1447)	344.56 KB (352,828 bytes)	9/12/2006 5:44 PM				

helpctr.exe c:\windows\pchealth\helpctr\binaries\helpctr.exe 476
8 409600 2826240 5/1/2007 2:37 PM 5.2.3790.1830
(srv03_sp1_rtm.050324-1447) 2.01 MB (2,105,344 bytes)
3/25/2005 5:00 AM
wmiprvse.exe Not Available 2716 8 Not Available Not
Available 5/1/2007 2:37 PM Not Available Not Available
Not Available
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsvc.exe 272
8 409600 2826240 5/1/2007 2:37 PM 5.2.3790.1830
(srv03_sp1_rtm.050324-1447) 2.21 MB (2,320,384 bytes)
3/25/2005 5:00 AM

[Loaded Modules]

Name	Version	Size	File Date	Manufacturer	Path
winlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	664.50 KB (680,448 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\winlogon.exe
ntdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.56 MB (1,638,400 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\ntdll.dll
kernel32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.87 MB (1,965,056 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\kernel32.dll
msvcrt	7.0.3790.1830 (srv03_sp1_rtm.050324-1447)	932.00 KB (954,368 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\msvcrt.dll
advapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.41 MB (1,482,752 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\advapi32.dll
rpcrt4	5.2.3790.2781 (srv03_sp1_qfe.060830-0223)	2.35 MB (2,463,232 bytes)	10/3/2006 4:02 PM	Microsoft Corporation	c:\windows\system32\rpcrt4.dll
user32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.41 MB (1,476,096 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\user32.dll
gdi32	5.2.3790.2781 (srv03_sp1_qfe.060830-0223)	885.00 KB (906,240 bytes)	10/3/2006 4:01 PM	Microsoft Corporation	c:\windows\system32\gdi32.dll
userenv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.49 MB (1,563,648 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\userenv.dll
nddeapi	5.2.3790.0 (srv03_rtm.030324-2048)	39.50 KB (40,448 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\nddeapi.dll
crypt32	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	1.68 MB (1,759,232 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\crypt32.dll
msasn1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	179.50 KB (183,808 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\msasn1.dll
secur32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	186.00 KB (190,464 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\secur32.dll
winsta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	143.50 KB (146,944 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\winsta.dll
netapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	885.50 KB (906,752 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\netapi32.dll
profmap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	59.50 KB (60,928 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\profmap.dll
regapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	141.50 KB (144,896 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\regapi.dll
ws2_32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	248.00 KB (253,952 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\ws2_32.dll
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	51.00 KB (52,224 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\ws2help.dll
msgina	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.40 MB (1,465,344 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\msgina.dll

shsvcs	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	354.50 KB (363,008 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\shsvcs.dll
shlwapi	6.00.3790.2653 (srv03_sp1_gdr.060303-1536)	805.00 KB (824,320 bytes)	3/29/2006 3:46 PM	Microsoft Corporation	c:\windows\system32\shlwapi.dll
sfc	5.2.3790.0 (srv03_rtm.030324-2048)	7.50 KB (7,680 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\sfc.dll
sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	273.00 KB (279,552 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\sfc_os.dll
wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	459.50 KB (470,528 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\wintrust.dll
imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	140.50 KB (143,872 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\imagehlp.dll
ole32	5.2.3790.2781 (srv03_sp1_qfe.060830-0223)	3.81 MB (3,995,648 bytes)	10/3/2006 4:02 PM	Microsoft Corporation	c:\windows\system32\ole32.dll
comctl32	6.0 (srv03_sp1_rtm.050324-1447)	2.50 MB (2,622,976 bytes)	3/24/2005 2:56 AM	Microsoft Corporation	c:\windows\winsxs\x-ww_aa3e736f\comctl32.dll
controls	6595b64144ccf1df_6.0.3790.1830_x-ww_aa3e736f\comctl32.dll				
winscard	5.2.3790.2781 (srv03_sp1_qfe.060830-0223)	302.00 KB (309,248 bytes)	8/30/2006 1:45 PM	Microsoft Corporation	c:\windows\system32\wincard.dll
wtsapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	54.00 KB (55,296 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\wtsapi32.dll
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	51.00 KB (52,224 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\version.dll
shell32	6.00.3790.2781 (srv03_sp1_qfe.060830-0223)	12.63 MB (13,240,320 bytes)	10/3/2006 4:02 PM	Microsoft Corporation	c:\windows\system32\shell32.dll
setupapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.99 MB (2,086,400 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\setupapi.dll
sxs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.82 MB (1,904,640 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\sxs.dll
wldap32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	441.50 KB (452,096 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\wldap32.dll
cscdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	207.00 KB (211,968 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\cscdll.dll
dimsntfy	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	51.50 KB (52,736 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\dimsntfy.dll
wlnotify	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	239.50 KB (245,248 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\wlnotify.dll
winmm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	428.00 KB (438,272 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\winmm.dll
winspool	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	400.50 KB (410,112 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\winspool.drv
mpr	5.2.3790.0 (srv03_rtm.030324-2048)	163.00 KB (166,912 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\mpr.dll
oleaut32	5.2.3790.1830	3.75 MB (3,930,624 bytes)	3/25/2005 5:00 AM	Microsoft Corporation	c:\windows\system32\oleaut32.dll
comctl32	5.82 (srv03_sp1_rtm.050324-1447)	1.72 MB (1,806,336 bytes)	3/24/2005 2:56 AM	Microsoft Corporation	c:\windows\winsxs\x-ww_4aca2dea\comctl32.dll

uxtheme 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 542.50 KB (555,520 bytes) 10/3/2006 4:02 PM Microsoft Corporation c:\windows\system32\uxtheme.dll	services 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 300.00 KB (307,200 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\services.exe
scredir 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 69.00 KB (70,656 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\scredir.dll	scserv 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 806.50 KB (825,856 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\scserv.dll
samlib 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 106.50 KB (109,056 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\samlib.dll	authz 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 220.50 KB (225,792 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\authz.dll
clbcatq 2001.12.4720.2634 (srv03_sp1_qfe.060206-1939) 1.29 MB (1,352,192 bytes) 2/13/2006 1:20 AM Microsoft Corporation c:\windows\system32\clbcatq.dll	umppnmgmr 5.2.3790.2477 (srv03_sp1_gdr.050629-1534) 323.50 KB (331,264 bytes) 6/30/2005 3:06 AM Microsoft Corporation c:\windows\system32\umppnmgmr.dll
comres 2001.12.4720.0 (srv03_rtm.030324-2048) 779.50 KB (798,208 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\comres.dll	ncobjapi 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 120.50 KB (123,392 bytes) 10/3/2006 4:02 PM Microsoft Corporation c:\windows\system32\ncobjapi.dll
cscui 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 627.00 KB (642,048 bytes) 10/3/2006 4:01 PM Microsoft Corporation c:\windows\system32\cscui.dll	eventlog 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 180.00 KB (184,320 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\eventlog.dll
rdpsnd 5.2.3790.0 (srv03_rtm.030324-2048) 63.00 KB (64,512 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rdpsnd.dll	lsass 5.2.3790.0 (srv03_rtm.030324-2048) 15.00 KB (15,360 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\lsass.exe
psapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 53.00 KB (54,272 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\psapi.dll	lsasrv 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.07 MB (2,166,784 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\lsasrv.dll
ntmarta 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 366.00 KB (374,784 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\ntmarta.dll	samsrv 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 1.09 MB (1,140,224 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\samsrv.dll
xpsp2res 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.76 MB (2,897,920 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\xpsp2res.dll	cryptdll 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 68.50 KB (70,144 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\cryptdll.dll
msacm32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 87.00 KB (89,088 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msacm32.drv	msprvs 5.2.3790.0 (srv03_rtm.030324-2048) 46.00 KB (47,104 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msprvs.dll
msacm32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 276.50 KB (283,136 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msacm32.dll	kerberos 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 932.00 KB (954,368 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\kerberos.dll
imaadp32 5.2.3790.0 (srv03_rtm.030324-2048) 55.00 KB (56,320 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\imaadp32.acm	msv1_0 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 380.00 KB (389,120 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msv1_0.dll
msadp32 5.2.3790.0 (srv03_rtm.030324-2048) 49.00 KB (50,176 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msadp32.acm	iphlpapi 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 255.00 KB (261,120 bytes) 8/30/2006 1:45 PM Microsoft Corporation c:\windows\system32\iphlpapi.dll
msg7115.2.3790.0 (srv03_rtm.030324-2048) 33.00 KB (33,792 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msg711.acm	netlogon 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 956.00 KB (978,944 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\netlogon.dll
msgsm32 5.2.3790.0 (srv03_rtm.030324-2048) 66.50 KB (68,096 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msgsm32.acm	w32time 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 565.00 KB (578,560 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\w32time.dll
tssoft32 1.01 29.00 KB (29,696 bytes) 3/25/2005 5:00 AM DSP GROUP, INC. c:\windows\system32\tssoft32.acm	schannel 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 456.00 KB (466,944 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\schannel.dll
tsd32 1.03 38.00 KB (38,912 bytes) 3/25/2005 5:00 AM DSP GROUP, INC. c:\windows\system32\tsd32.dll	wdigest 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 210.00 KB (215,040 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wdigest.dll
wbemprox 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 65.00 KB (66,560 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wbemprox.dll	rsaenh 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 415.98 KB (425,960 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rsaenh.dll
wbemcomn 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 665.50 KB (681,472 bytes) 10/3/2006 4:02 PM Microsoft Corporation c:\windows\system32\wbem\wbemcomn.dll	rassfm 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 68.50 KB (70,144 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rassfm.dll
wbemsvc 5.2.3790.0 (srv03_rtm.030324-2048) 62.50 KB (64,000 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wbemsvc.dll	kdcsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 596.00 KB (610,304 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\kdcsvc.dll
fastprox 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.63 MB (1,710,592 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\fastprox.dll	ntdsa 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 4.05 MB (4,249,600 bytes) 8/30/2006 1:45 PM Microsoft Corporation c:\windows\system32\ntdsa.dll
msvcpx60 6.10.2240.8941.50 KB (964,096 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msvcpx60.dll	ntdsatq 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 79.50 KB (81,408 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\ntdsatq.dll
ntdsapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 204.50 KB (209,408 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\ntdsapi.dll	mswsock 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 763.00 KB (781,312 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\mswsock.dll
dnsapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 428.00 KB (438,272 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\dnsapi.dll	esent 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.65 MB (2,776,064 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\esent.dll

scecli 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 459.50 KB (470,528 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\scecli.dll

ws03res 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 792.50 KB (811,520 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\ws03res.dll

hnetcfg 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.04 MB (1,094,144 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\hnetcfg.dll

wshtcpip 5.2.3790.0 (srv03_rtm.030324-2048) 38.00 KB (38,912 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wshtcpip.dll

pstorsvc 5.2.3790.0 (srv03_rtm.030324-2048) 56.00 KB (57,344 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\pstorsvc.dll

psbase 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 167.50 KB (171,520 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\psbase.dll

dsenh 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 363.98 KB (372,712 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\dsenh.dll

svchost 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 36.00 KB (36,864 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\svchost.exe

rpcss 5.2.3790.2634 (srv03_sp1_qfe.060206-1939) 839.00 KB (859,136 bytes) 2/13/2006 1:20 AM Microsoft Corporation c:\windows\system32\rpcss.dll

schedsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 567.00 KB (580,608 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\schedsvc.dll

msidle 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 11.50 KB (11,776 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\msidle.dll

wkssvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 315.50 KB (323,072 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wkssvc.dll

wiarp 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 76.00 KB (77,824 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wiarp.dll

cryptsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 139.00 KB (142,336 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\cryptsvc.dll

certcli 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 582.00 KB (595,968 bytes) 8/30/2006 1:44 PM Microsoft Corporation c:\windows\system32\certcli.dll

atl 3.00.2282 348.00 KB (356,352 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\atl.dll

vssapi 5.2.3790.2476 (srv03_sp1_qfe.050628-1725) 1.57 MB (1,642,496 bytes) 6/29/2005 12:49 AM Microsoft Corporation c:\windows\system32\vssapi.dll

dmserver 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 52.00 KB (53,248 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\dmserver.dll

es 2001.12.4720.2634 (srv03_sp1_qfe.060206-1939) 685.50 KB (701,952 bytes) 2/13/2006 1:20 AM Microsoft Corporation c:\windows\system32\es.dll

srvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 197.50 KB (202,240 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\srvc.dll

sacsvr 5.2.3790.0 (srv03_rtm.030324-2048) 27.50 KB (28,160 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\sacsvr.dll

trkwks 5.2.3790.0 (srv03_rtm.030324-2048) 246.00 KB (251,904 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\trkwks.dll

wmisvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 445.50 KB (456,192 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wmisvc.dll

sens 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 98.00 KB (100,352 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\sens.dll

comsvcs 2001.12.4720.2781 (srv03_sp1_qfe.060830-0223) 3.21 MB (3,361,792 bytes) 8/30/2006 1:44 PM Microsoft Corporation c:\windows\system32\comsvcs.dll

browser 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 200.50 KB (205,312 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\browser.dll

netrap 5.2.3790.0 (srv03_rtm.030324-2048) 30.00 KB (30,720 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\netrap.dll

wbemcore 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.94 MB (2,038,784 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wbemcore.dll

esscli 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.01 MB (1,057,280 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\esscli.dll

wmiutils 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 302.00 KB (309,248 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wmiutils.dll

repdrfs 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 649.00 KB (664,576 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\repdrfs.dll

wmiprvsd 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.39 MB (1,454,592 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wmiprvsd.dll

wbemess 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.02 MB (1,070,080 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\wbemess.dll

ncprov 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 146.00 KB (149,504 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wbem\ncprov.dll

netman 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 705.50 KB (722,432 bytes) 8/30/2006 1:45 PM Microsoft Corporation c:\windows\system32\netman.dll

netshell 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 2.95 MB (3,089,920 bytes) 8/30/2006 1:45 PM Microsoft Corporation c:\windows\system32\netshell.dll

rtutils 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 91.50 KB (93,696 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rtutils.dll

credui 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 311.00 KB (318,464 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\credui.dll

clusapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 158.00 KB (161,792 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\clusapi.dll

mprapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 265.00 KB (271,360 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\mprapi.dll

activeds 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 581.50 KB (595,456 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\activeds.dll

adslidpc 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 325.50 KB (333,312 bytes) 8/30/2006 1:44 PM Microsoft Corporation c:\windows\system32\adslidpc.dll

rasapi32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 632.50 KB (647,680 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rasapi32.dll

rasman 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 170.00 KB (174,080 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\rasman.dll

tapi32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 518.00 KB (530,432 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\tapi32.dll

wzcsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 818.00 KB (837,632 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wzcsvc.dll

wmi 5.2.3790.0 (srv03_rtm.030324-2048) 5.00 KB (5,120 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wmi.dll

dhcpcsvc 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 300.50 KB (307,712 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\dhcpcsvc.dll

wininet 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 1.62 MB (1,701,376 bytes) 10/3/2006 4:02 PM Microsoft Corporation c:\windows\system32\wininet.dll

wzcsapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 86.50 KB (88,576 bytes) 3/25/2005 5:00 AM Microsoft Corporation c:\windows\system32\wzcsapi.dll

rasdlg 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.44 MB (1,509,888 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\rasdlg.dll
 rasadhlp 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 18.00 KB (18,432 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\rasadhlp.dll
 ntlapi 5.2.3790.0 (srv03_rtm.030324-2048) 14.50 KB (14,848 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\ntlsapi.dll
 xactsrv 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 297.00 KB (304,128 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\xactsrv.dll
 netcfgx 5.2.3790.2520 (srv03_sp1_qfe.050830-1536) 2.01 MB (2,104,320 bytes) 8/30/2005 1:41 PM Microsoft Corporation
 c:\windows\system32\netcfgx.dll
 winipsec 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 83.00 KB (84,992 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\winipsec.dll
 wbemcons 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 154.50 KB (158,208 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\wbem\wbemcons.dll
 pchsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 113.00 KB (115,712 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\pchsvc.dll
 ersvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 66.50 KB (68,096 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\ersvc.dll
 sqlwriter 2005.090.3042.00 268.86 KB (275,312 bytes) 2/10/2007 10:27 AM Microsoft Corporation
 c:\program files\microsoft sql server\90\shared\sqlwriter.exe
 msvcr80 8.00.50727.42 1.42 MB (1,484,800 bytes) 9/22/2005 11:28 PM Microsoft Corporation
 c:\windows\winsxs\x-ww_3d3b516d\msvcr80.dll
 sqlwss 2005.090.3042.00 572.36 KB (586,096 bytes) 2/10/2007 10:27 AM Microsoft Corporation
 c:\program files\microsoft sql server\90\shared\sqlwss.dll
 msvcpr80 8.00.50727.42 1.32 MB (1,385,472 bytes) 9/22/2005 11:31 PM Microsoft Corporation
 c:\windows\winsxs\x-ww_3d3b516d\msvcpr80.dll
 termsrv 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 680.00 KB (696,320 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\termsrv.dll
 icaapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 33.50 KB (34,304 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\icaapi.dll
 mstlsapi 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 340.50 KB (348,672 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\mstlsapi.dll
 rdpwsx 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 324.63 KB (332,424 bytes) 10/3/2006 4:02 PM Microsoft Corporation
 c:\windows\system32\rdpwsx.dll
 rdpclip 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 211.00 KB (216,064 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\rdpclip.exe
 wsock32 5.2.3790.0 (srv03_rtm.030324-2048) 23.00 KB (23,552 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\wsock32.dll
 urlmon 6.00.3790.2663 (srv03_sp1_gdr.060317-1534) 1.54 MB (1,613,312 bytes) 3/29/2006 3:46 PM Microsoft Corporation
 c:\windows\system32\urlmon.dll
 explorer 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 1.64 MB (1,716,224 bytes) 10/3/2006 4:01 PM Microsoft Corporation
 c:\windows\explorer.exe
 browseui 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 2.42 MB (2,541,568 bytes) 10/3/2006 4:01 PM Microsoft Corporation
 c:\windows\system32\browseui.dll
 shdocvw 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 3.51 MB (3,679,744 bytes) 10/3/2006 4:02 PM Microsoft Corporation
 c:\windows\system32\shdocvw.dll
 cryptui 5.131.3790.1830 (srv03_sp1_rtm.050324-1447) 1.11 MB (1,159,168 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\cryptui.dll
 apphelp5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 301.50 KB (308,736 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\apphelp.dll
 themeui6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 891.00 KB (912,384 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\themeui.dll
 msimg32 5.2.3790.0 (srv03_rtm.030324-2048) 7.00 KB (7,168 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\msimg32.dll
 linkinfo 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 46.50 KB (47,616 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\linkinfo.dll
 ntshrui 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 244.00 KB (249,856 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\ntshrui.dll
 msi 3.1.4000.2781 5.70 MB (5,975,552 bytes) 10/3/2006 4:01 PM Microsoft Corporation
 c:\windows\system32\msi.dll
 webcheck 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 699.00 KB (715,776 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\webcheck.dll
 stobject 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 175.00 KB (179,200 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\stobject.dll
 batmeter 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 61.00 KB (62,464 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\batmeter.dll
 powrprof 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 44.00 KB (45,056 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\powrprof.dll
 drprov 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 32.50 KB (33,280 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\drprov.dll
 ntlanman 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 117.00 KB (119,808 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\ntlanman.dll
 netui0 5.2.3790.0 (srv03_rtm.030324-2048) 181.50 KB (185,856 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\netui0.dll
 netui1 5.2.3790.0 (srv03_rtm.030324-2048) 482.00 KB (493,568 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\netui1.dll
 davclnt 5.2.3790.0 (srv03_rtm.030324-2048) 59.00 KB (60,416 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\davclnt.dll
 browselc 6.00.3790.0 (srv03_rtm.030324-2048) 61.50 KB (62,976 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\browselc.dll
 mlang 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 813.50 KB (833,024 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\mlang.dll
 mydocs 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 130.50 KB (133,632 bytes) 10/3/2006 4:02 PM Microsoft Corporation
 c:\windows\system32\mydocs.dll
 shdoclc 6.00.3790.0 (srv03_rtm.030324-2048) 588.00 KB (602,112 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\shdoclc.dll
 mmcshext 5.2.3790.2777 (srv03_sp1_qfe.060824-0248) 168.00 KB (172,032 bytes) 8/25/2006 1:22 AM Microsoft Corporation
 c:\windows\system32\mmcshext.dll
 hhsetup5.2.3790.2427 (srv03_sp1_gdr.050421-1629) 117.00 KB (119,808 bytes) 4/22/2005 1:17 AM Microsoft Corporation
 c:\windows\system32\hhsetup.dll
 cpqteam 8.30.0.8 101.50 KB (103,936 bytes) 5/23/2006 3:11 PM Hewlett-Packard Company
 c:\windows\system32\cpqteam.exe
 cmd 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 507.50 KB (519,680 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\cmd.exe
 sqlservr 2005.090.3042.00 69.17 MB (72,527,728 bytes) 4/16/2007 9:46 AM Microsoft Corporation
 c:\program files\microsoft sql server\mssql.1\mssql\bin\sqlservr.exe
 opens60 2005.090.1399.00 38.21 KB (39,128 bytes) 10/14/2005 2:39 PM Microsoft Corporation
 c:\program files\microsoft sql server\mssql.1\mssql\bin\opens60.dll

instapi 2005.090.1399.00 98.21 KB (100,568 bytes)
 10/14/2005 2:30 PM Microsoft Corporation c:\program
 files\microsoft sql server\90\shared\instapi.dll
 sqllevn70 2005.090.3042.00 1.66 MB (1,739,632 bytes)
 2/10/2007 10:21 AM Microsoft Corporation c:\program
 files\microsoft sql
 server\mssql.1\mssql\bin\resources\1033\sqllevn70.rll
 sqlos 2005.090.3042.00 23.86 KB (24,432 bytes) 2/10/2007
 10:26 AM Microsoft Corporation c:\program files\microsoft sql
 server\mssql.1\mssql\bin\sqllos.dll
 mscoree 2.0.50727.42 (RTM.050727-4200) 864.50 KB
 (885,248 bytes) 9/22/2005 11:40 PM Microsoft Corporation
 c:\windows\system32\mscoree.dll
 xolehlp 2001.12.4720.2634 (srv03_sp1_qfe.060206-1939)
 18.00 KB (18,432 bytes) 2/13/2006 1:20 AM Microsoft
 Corporation c:\windows\system32\xolehlp.dll
 msdtcprx 2001.12.4720.2634 (srv03_sp1_qfe.060206-1939)
 1.28 MB (1,338,368 bytes) 2/13/2006 1:20 AM Microsoft
 Corporation c:\windows\system32\msdtcprx.dll
 mtxclu 2001.12.4720.2634 (srv03_sp1_qfe.060206-1939)
 203.50 KB (208,384 bytes) 2/13/2006 1:20 AM Microsoft
 Corporation c:\windows\system32\mtxclu.dll
 resutils 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 154.00
 KB (157,696 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\resutils.dll
 winnr 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.50
 KB (48,640 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\winnr.dll
 security 5.2.3790.0 (srv03_rtm.030324-2048) 7.00 KB (7,168
 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\security.dll
 msfte 12.0.6828.0 6.74 MB (7,069,464 bytes) 8/28/2006 3:34
 AM Microsoft Corporation c:\program files\microsoft sql
 server\mssql.1\mssql\bin\msfte.dll
 dbghelp6.6.0007.5 (debuggers\dbg).051022-1815) 3.47 MB
 (3,634,032 bytes) 2/10/2007 10:14 AM Microsoft
 Corporation c:\program files\microsoft sql
 server\90\shared\dbghelp.dll
 sqlncli 2005.090.3042.00 5.17 MB (5,419,888 bytes)
 2/10/2007 10:26 AM Microsoft Corporation
 c:\windows\system32\sqlncli.dll
 comdlg32 6.00.3790.2781 (srv03_sp1_qfe.060830-0223)
 743.50 KB (761,344 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\system32\comdlg32.dll
 sqlnclir 2005.090.1399.00 200.21 KB (205,016 bytes)
 10/14/2005 2:39 PM Microsoft Corporation
 c:\windows\system32\sqlnclir.rll
 isqlw 2000.080.0725.00 344.56 KB (352,828 bytes)
 9/12/2006 5:44 PM Microsoft Corporation
 g:\isqlw\isqlw.exe
 wow64 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 487.00
 KB (498,688 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\wow64.dll
 wow64win 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
 567.50 KB (581,120 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\system32\wow64win.dll
 wow64cpu 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
 44.00 KB (45,056 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\system32\wow64cpu.dll
 wowia32x 5.3,5021.0 54.00 KB (55,296 bytes) 3/25/2005 5:00
 AM Intel Corporation c:\windows\system32\wowia32x.dll
 ia32exec 5.3,5338.0 7.13 MB (7,471,104 bytes) 5/20/2005
 2:47 AM Intel Corporation
 c:\windows\system32\ia32exec.bin
 helpctr 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.01 MB
 (2,105,344 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\helpctr.exe
 hcappres 5.2.3790.0 (srv03_rtm.030324-2048) 6.00 KB
 (6,144 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\hcappres.dll
 itss 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 410.50 KB
 (420,352 bytes) 4/22/2005 1:17 AM Microsoft Corporation
 c:\windows\system32\itss.dll
 msxml3 8.70.1104.0 3.32 MB (3,486,208 bytes) 3/25/2005 5:00
 AM Microsoft Corporation c:\windows\system32\msxml3.dll
 pchshell 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
 290.50 KB (297,472 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\pchealth\helpctr\binaries\pchshell.dll
 mshtml 6.00.3790.2781 (srv03_sp1_qfe.060830-0223) 8.93 MB
 (9,366,016 bytes) 3/29/2006 3:46 PM Microsoft Corporation
 c:\windows\system32\mshtml.dll
 msls31 3.10.349.0 502.50 KB (514,560 bytes) 3/25/2005 5:00
 AM Microsoft Corporation c:\windows\system32\msls31.dll
 msimtf 5.2.3790.2781 (srv03_sp1_qfe.060830-0223) 585.00
 KB (599,040 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\msimtf.dll
 msctf 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 983.50
 KB (1,007,104 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\system32\msctf.dll
 jscript 5.6.0.8827 1.24 MB (1,304,576 bytes) 3/25/2005 5:00
 AM Microsoft Corporation c:\windows\system32\jscript.dll
 imm32 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 322.50
 KB (330,240 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\imm32.dll
 mshtml 6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 1.46
 MB (1,531,392 bytes) 3/25/2005 5:00 AM Microsoft
 Corporation c:\windows\system32\mshtml.dll
 vbscript 5.6.0.8827 1.07 MB (1,118,208 bytes) 3/25/2005 5:00
 AM Microsoft Corporation c:\windows\system32\vbscript.dll
 msinfo 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.26 MB
 (1,321,472 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\msinfo.dll
 mfc42u 6.50.4245.0 3.35 MB (3,510,272 bytes) 3/25/2005 5:00
 AM Microsoft Corporation c:\windows\system32\mfc42u.dll
 riched32 5.2.3790.0 (srv03_rtm.030324-2048) 5.00 KB
 (5,120 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\riched32.dll
 riched20 5.31.23.1225 1.38 MB (1,442,816 bytes)
 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\system32\riched20.dll
 helpsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.21 MB
 (2,320,384 bytes) 3/25/2005 5:00 AM Microsoft Corporation
 c:\windows\pchealth\helpctr\binaries\helpsvc.exe
 [Services]
 Display Name Name State Start Mode Service Type Path
 Error Control Start Name Tag ID
 Application Experience Lookup Service AeLookupSvc Stopped
 Disabled Share Process
 c:\windows\system32\svchost.exe -k netsvcsNormal
 LocalSystem 0
 Alerter Alerter Running Auto Share Process
 c:\windows\system32\svchost.exe -k localservice Normal
 NT AUTHORITY\LocalService 0
 Application Layer Gateway Service ALG Stopped Manual
 Own Process c:\windows\system32\alg.exe Normal NT
 AUTHORITY\LocalService 0
 Application Management AppMgmt Stopped Manual
 Share Process c:\windows\system32\svchost.exe -k netsvcs
 Normal LocalSystem 0
 ASP.NET State Service aspnet_state Stopped Manual Own
 Process
 c:\windows\microsoft.net\framework64\v2.0.50727\aspnet_sta
 te.exe Normal NT AUTHORITY\NetworkService 0
 Windows Audio AudioSrv Stopped Disabled Share
 Process c:\windows\system32\svchost.exe -k netsvcsNormal
 LocalSystem 0
 Background Intelligent Transfer Service BITS Stopped
 Manual Share Process c:\windows\system32\svchost.exe -k
 netsvcs Normal LocalSystem 0
 Computer Browser Browser Running Auto Share
 Process c:\windows\system32\svchost.exe -k netsvcsNormal
 LocalSystem 0
 Indexing Service CiSvc Stopped Disabled Share
 Process c:\windows\system32\cisvc.exe Normal LocalSystem
 0
 ClipBook ClipSrv Stopped Disabled Own Process
 c:\windows\system32\clipsrv.exe Normal LocalSystem
 0

.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32 Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.50727\mscorsvw.exe Ignore LocalSystem 0

.NET Runtime Optimization Service v2.0.50727_I64
clr_optimization_v2.0.50727_64 Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.50727\mscorsvw.exe Ignore LocalSystem 0

COM+ System Application COMSysApp Stopped Manual Own Process c:\windows\system32\dlhhost.exe /processid:{02d4b3f1-fd88-11d1-960d-00805fc79235} Normal LocalSystem 0

Cryptographic Services CryptSvc Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

DCOM Server Process Launcher DcomLaunch Running Auto Share Process c:\windows\system32\svchost.exe -k dcomlaunchNormal LocalSystem 0

Distributed File System Dfs Stopped Manual Own Process c:\windows\system32\dfssvc.exe Normal LocalSystem 0

DHCP Client Dhcp Running Auto Share Process c:\windows\system32\svchost.exe -k networkservice Normal NT AUTHORITY\NetworkService 0

Logical Disk Manager Administrative Servicedmadm Stopped Manual Share Process c:\windows\system32\dmadmin.exe /com Normal LocalSystem 0

Logical Disk Manager dmserver Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

DNS Client Dnscache Running Auto Share Process c:\windows\system32\svchost.exe -k networkservice Normal NT AUTHORITY\NetworkService 0

Emulex HBAnyware Discovery Emulex HBAnyware Discovery Stopped Manual Own Process "c:\program files (x86)\hbanyware\hbadiscsrv.exe" Normal LocalSystem 0

Emulex HBAnyware SvcMgrEmulex HBAnyware SvcMgrStopped Manual Own Process "c:\program files (x86)\hbanyware\hbmhsmgr.exe" Normal LocalSystem 0

Emulex HBAnyware Emulex HBAnyware Stopped Manual Own Process "c:\program files (x86)\hbanyware\lrmserver.exe" Normal LocalSystem 0

Error Reporting Service ERSvc Running Auto Share Process c:\windows\system32\svchost.exe -k winerr Ignore LocalSystem 0

Event Log Eventlog Running Auto Share Process c:\windows\system32\services.exe Normal LocalSystem 0

COM+ Event System EventSystem Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Help and Support helpsvc Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

Human Interface Device Access HidServStopped Disabled Share Process c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

HTTP SSL HTTPFilter Stopped Manual Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

IAS Jet Database Access IASJet Stopped Manual Share Process c:\windows\syswow64\svchost.exe -k iasjet Normal LocalSystem 0

IMAPI CD-Burning COM Service ImapiService Stopped Disabled Own Process c:\windows\system32\imapi.exe Normal LocalSystem 0

InterSite Messaging IsmServ Stopped Disabled Own Process c:\windows\system32\ismserv.exe Normal LocalSystem 0

Kerberos Key Distribution Center kdc Stopped Disabled Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

Server lanmanserver Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

Workstation lanmanworkstation Running Auto Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

License Logging LicenseService Stopped Disabled Own Process c:\windows\system32\llssrv.exe Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper LmHosts Running Auto Share Process c:\windows\system32\svchost.exe -k localservice Normal NT AUTHORITY\LocalService 0

Messenger Messenger Stopped Disabled Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

NetMeeting Remote Desktop Sharing mnmsrvc Stopped Disabled Own Process c:\windows\system32\mnmsrvc.exe Normal LocalSystem 0

Distributed Transaction Coordinator MSDTCRunning Auto Own Process c:\windows\system32\msdtc.exe Normal NT AUTHORITY\NetworkService 0

SQL Server FullText Search (MSSQLSERVER) msftesql Stopped Manual Own Process "c:\program files\microsoft sql server\mssql.1\mssql\binn\msftesql.exe" -s:mssql.1 -f:mssqlserverNormal LocalSystem 0

Windows Installer MSIServer Stopped Manual Share Process c:\windows\system32\msiexec.exe /v Normal LocalSystem 0

SQL Server (MSSQLSERVER) MSSQLSERVER Stopped Manual Own Process "c:\program files\microsoft sql server\mssql.1\mssql\binn\sqlservr.exe" -smssqlserver Normal LocalSystem 0

SQL Server Active Directory Helper MSSQLServerADHelper Stopped Disabled Own Process "c:\program files\microsoft sql server\90\shared\sqladhlp90.exe" Normal NT AUTHORITY\NetworkService 0

Network DDE NetDDE Stopped Disabled Share Process c:\windows\system32\netdde.exe Normal LocalSystem 0

Network DDE DSDM NetDDEdsdm Stopped Disabled Share Process c:\windows\system32\netdde.exe Normal LocalSystem 0

Net Logon Netlogon Stopped Manual Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

Network Connections NetmanRunning Manual Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

Network Location Awareness (NLA) Nla Running Manual Share Process c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

File Replication NtFrs Stopped Manual Own Process c:\windows\system32\ntfrs.exe Ignore LocalSystem 0

NT LM Security Support Provider NtLmSsp Stopped Manual Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

Removable Storage NtmsSvc Stopped Manual Share Process c:\windows\system32\svchost.exe -k netsvcsNormal LocalSystem 0

Office Source Engine ose Stopped Manual Own Process "c:\program files (x86)\common files\microsoft shared\source engine\ose.exe"Normal LocalSystem 0

Plug and Play PlugPlay Running Auto Share Process c:\windows\system32\services.exe Normal LocalSystem 0

IPSEC Services PolicyAgent Stopped Manual Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

Protected Storage ProtectedStorage Running Auto Share Process c:\windows\system32\lsass.exe Normal LocalSystem 0

Remote Access Auto Connection Manager RasAuto Stopped Manual Share Process c:\windows\system32\svchost.exe -k netsvcs Normal LocalSystem 0

Remote Access Connection Manager RasMan Stopped
Manual Share Process c:\windows\system32\svchost.exe -k
netsvcs Normal LocalSystem 0

Remote Desktop Help Session Manager RDSessMgrStopped
Manual Own Process c:\windows\system32\sessmgr.exe
Normal LocalSystem 0

Routing and Remote Access RemoteAccess Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Remote Registry RemoteRegistryStopped Disabled
Share Process c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0

Remote Procedure Call (RPC) Locator RpcLocator Stopped
Manual Own Process c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0

Remote Procedure Call (RPC) RpcSs Running Auto
Share Process c:\windows\system32\svchost.exe -k rpcss
Normal NT AUTHORITY\NetworkService 0

Resultant Set of Policy Provider RSOPProv Stopped Manual
Share Process c:\windows\system32\rsopprov.exe Normal
LocalSystem 0

Special Administration Console Helper sacsvr Running
Manual Share Process c:\windows\system32\svchost.exe -k
netsvcs Normal LocalSystem 0

Security Accounts Manager SamSs Running Auto Share
Process c:\windows\system32\lsass.exe Normal LocalSystem
0

Smart Card SCardSvr Stopped Manual Share Process
c:\windows\system32\scardsvr.exe Ignore NT
AUTHORITY\LocalService 0

Task Scheduler Schedule Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Secondary Logon seclogon Stopped Disabled Share
Process c:\windows\system32\svchost.exe -k netsvcsIgnore
LocalSystem 0

System Event Notification SENS Running Auto Share
Process c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Windows Firewall/Internet Connection Sharing (ICS)
SharedAccess Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Shell Hardware Detection ShellHWDetection Running Auto
Share Process c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0

SNMP Service SNMP Stopped Disabled Own Process
c:\windows\system32\snmp.exe Normal LocalSystem 0

SNMP Trap Service SNMPTRAP Stopped Manual Own
Process c:\windows\system32\snmptrap.exe Normal NT
AUTHORITY\LocalService 0

Print Spooler Spooler Stopped Disabled Own Process
c:\windows\system32\spoolsv.exe Normal LocalSystem
0

SQL Server Browser SQLBrowser Stopped Disabled
Own Process "c:\program files\microsoft sql
server\90\shared\sqlbrowser.exe" Normal LocalSystem 0

SQL Server Agent (MSSQLSERVER) SQLSERVERAGENT
Stopped Manual Own Process "c:\program
files\microsoft sql server\mssql.1\mssql\binn\sqlagent90.exe" -i
mssqlserverNormal LocalSystem 0

SQL Server VSS Writer SQLWriter Running Auto Own
Process "c:\program files\microsoft sql
server\90\shared\sqlwriter.exe" Normal LocalSystem 0

Windows Image Acquisition (WIA) stisvc Stopped Disabled
Share Process c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0

Microsoft Software Shadow Copy Provider swprv Stopped
Manual Own Process c:\windows\system32\svchost.exe -k
swprv Normal LocalSystem 0

Performance Logs and Alerts SysmonLog Stopped Auto
Own Process c:\windows\system32\smlogsvc.exe Normal
NT Authority\NetworkService 0

Telephony TapiSrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv Normal
LocalSystem 0

Terminal Services TermService Running Manual Share
Process c:\windows\system32\svchost.exe -k termsvcs
Normal LocalSystem 0

Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Distributed Link Tracking Server TrkSvr Stopped Disabled
Share Process c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Distributed Link Tracking Client TrkWks Running Auto
Share Process c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

Terminal Services Session DirectoryTssdis Stopped Disabled
Own Process c:\windows\system32\tssdis.exe Normal
LocalSystem 0

Uninterruptible Power Supply UPS Stopped Manual Own
Process c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0

Virtual Disk Service vds Stopped Manual Own Process
c:\windows\system32\vds.exe Normal LocalSystem 0

Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal LocalSystem
0

Windows Time W32Time Running Auto Share Process
c:\windows\system32\svchost.exe -k localservice Normal
NT AUTHORITY\LocalService 0

WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k localservice Normal
NT AUTHORITY\LocalService 0

WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual Share Process
c:\windows\system32\svchost.exe -k localservice Normal
NT AUTHORITY\LocalService 0

Windows Management Instrumentation winmgmt Running
Auto Share Process c:\windows\system32\svchost.exe -k
netsvcs Ignore LocalSystem 0

Windows Management Instrumentation Driver Extensions Wmi
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

WMI Performance Adapter WmiApSrv Stopped Manual Own
Process c:\windows\system32\wbem\wmiaprv.exe Normal
LocalSystem 0

Automatic Updates wuauerv Stopped Manual Share
Process c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Wireless Configuration WZCSVC Stopped Manual Share
Process c:\windows\system32\svchost.exe -k netsvcsNormal
LocalSystem 0

Network Provisioning Service xmlprov Stopped Manual
Share Process c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

[Program Groups]

Group Name	Name	User Name
AccessoriesDefault	User:Accessories	Default User
Accessories\Accessibility	Default	User:Accessories\Accessibility
Accessories\Entertainment	Default	User:Accessories\Entertainment
Accessories\EntertainmentDefault	User:Accessories\EntertainmentDefault	User:Accessories\EntertainmentDefault
Startup	Default User:Startup	Default User
AccessoriesAll Users:Accessories	All Users	Accessories\Accessibility
Accessories\Communications	All Users	Accessories\Communications
Accessories\Entertainment	All Users	Accessories\Entertainment
Accessories\System Tools	All Users	Accessories\System Tools

Administrative Tools All Users:Administrative Tools All Users

Debugging Tools for Windows 64-bitAll Users:Debugging Tools
for Windows 64-bit All Users

Emulex All Users:Emulex All Users

Microsoft SQL Server 2005 All Users:Microsoft SQL Server 2005
All Users

Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools All Users

Startup All Users:Startup All Users

AccessoriesNT AUTHORITY\SYSTEM:Accessories NT
AUTHORITY\SYSTEM

Accessories\Accessibility NT

AUTHORITY\SYSTEM:Accessories\AccessibilityNT
AUTHORITY\SYSTEM

Accessories\Entertainment NT

AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM

Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM

AccessoriesSQLDUNE\Administrator:Accessories
SQLDUNE\Administrator

Accessories\Accessibility

SQLDUNE\Administrator:Accessories\Accessibility

SQLDUNE\Administrator

Accessories\Entertainment

SQLDUNE\Administrator:Accessories\Entertainment

SQLDUNE\Administrator

Administrative Tools SQLDUNE\Administrator:Administrative
Tools SQLDUNE\Administrator

Startup SQLDUNE\Administrator:Startup

SQLDUNE\Administrator

[Startup Programs]

Program Command User Name Location

desktopdesktop.ini NT AUTHORITY\SYSTEM Startup

desktopdesktop.ini SQLDUNE\Administrator Startup

desktopdesktop.ini .DEFAULT Startup

desktopdesktop.ini All Users Common Startup

CPQTEAM cpqteam.exe All Users

HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run

[OLE Registration]

Object Local Server

Sound (OLE2) sndrec32.exe

Media Clip mplay32.exe

Video Clip mplay32.exe /avi

MIDI Sequence mplay32.exe /midi

Sound Not Available

Media Clip Not Available

WordPad Document "%programfiles%\windows

nt\accessories\wordpad.exe"

Bitmap Image mspaint.exe

[Windows Error Reporting]

Time Type Details

[Internet Settings]

[Internet Explorer]

[Following are sub-categories of this main category]

[Summary]

Item Value

Version 6.0.3790.1830

Build 63790.1830

Application Path C:\Program Files\Internet Explorer

Language English (United States)

Active Printer Not Available

Cipher Strength 128-bit
Content AdvisorDisabled
IEAK Install No

[File Versions]

File	Version	Size	Date	Path	Company
actxprxy.dll	6.0.3790.1830	237 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
actxprxy.dll	6.0.3790.1830	97 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
advpack.dll	6.0.3790.1830	260 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
advpack.dll	6.0.3790.1830	98 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
asctrls.ocx	6.0.3790.0	219 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
asctrls.ocx	6.0.3790.0	90 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
browsecl.dll	6.0.3790.0	62 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
browsecl.dll	6.0.3790.0	62 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
browseui.dll	6.0.3790.2781	2,482 KB	10/3/2006 4:01:42 PM	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3790.2781	1,013 KB	10/3/2006 4:02:32 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation
cdfview.dll	6.0.3790.1830	307 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
cdfview.dll	6.0.3790.1830	149 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
comctl32.dll	5.82.3790.1830	1,764 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3790.1830	585 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
dxttrans.dll	6.3.3790.2653	626 KB	3/29/2006 4:46:04 PM	C:\WINDOWS\system32	Microsoft Corporation
dxttrans.dll	6.3.3790.2653	208 KB	3/29/2006 4:46:16 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation
dxtmsft.dll	6.3.3790.2781	986 KB	8/30/2006 1:45:06 PM	C:\WINDOWS\system32	Microsoft Corporation
dxtmsft.dll	6.3.3790.2781	355 KB	8/30/2006 1:45:36 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iecontic.dll	<File Missing>	Not Available	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.1830	702 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iedkcs32.dll	16.0.3790.1830	324 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
iepeers.dll	6.0.3790.2653	702 KB	3/29/2006 4:46:04 PM	C:\WINDOWS\system32	Microsoft Corporation
iepeers.dll	6.0.3790.2653	248 KB	3/29/2006 4:46:16 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation
iesetup.dll	6.0.3790.1830	98 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3790.1830	61 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Microsoft Corporation
ieuinit.inf	Not Available	24 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\system32	Not Available
ieuinit.inf	Not Available	24 KB	3/25/2005 6:00:00 AM	C:\WINDOWS\SysWOW64	Not Available
ieexplore.exe	6.0.3790.1830	108 KB	3/25/2005 6:00:00 AM	C:\Program Files\Internet Explorer	Microsoft Corporation
imgutil.dll	6.0.3790.2781	114 KB	8/30/2006 1:45:10 PM	C:\WINDOWS\system32	Microsoft Corporation
imgutil.dll	6.0.3790.2781	38 KB	8/30/2006 1:45:36 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation
inetcp.cpl	6.0.3790.2781	663 KB	8/30/2006 1:45:10 PM	C:\WINDOWS\system32	Microsoft Corporation
inetcp.cpl	6.0.3790.2781	358 KB	8/30/2006 1:45:36 PM	C:\WINDOWS\SysWOW64	Microsoft Corporation

inetcpic.dll 6.0.3790.0 108 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

inetcpic.dll 6.0.3790.0 109 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

inseng.dll 6.0.3790.1830 276 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

inseng.dll 6.0.3790.1830 94 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mlang.dll 6.0.3790.1830 814 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mlang.dll 6.0.3790.1830 578 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

msencode.dll 2002.10.4.0 112 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Not Available

mshta.exe 6.0.3790.1830 68 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshta.exe 6.0.3790.1830 30 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mshtml.dll 6.0.3790.2781 9,147 KB 10/3/2006 4:01:56 PM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.dll 6.0.3790.2781 3,082 KB 10/3/2006 4:02:32 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mshtml.tlb 6.0.3790.1830 1,319 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.tlb 6.0.3790.1830 1,320 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mshtml.dll 6.0.3790.1830 1,496 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.dll 6.0.3790.1830 455 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mshtml.dll 6.0.3790.1830 56 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

mshtml.dll 6.0.3790.1830 56 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

msident.dll 6.0.3790.1830 144 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msident.dll 6.0.3790.1830 48 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

msidntld.dll 6.0.3790.0 14 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msidntld.dll 6.0.3790.0 15 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

msieftp.dll 6.0.3790.2781 577 KB 10/3/2006 4:02:02 PM
C:\WINDOWS\system32 Microsoft Corporation

msieftp.dll 6.0.3790.2781 244 KB 10/3/2006 4:02:32 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

msrating.dll 6.0.3790.1830 415 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

msrating.dll 6.0.3790.1830 144 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

mstime.dll 6.0.3790.2781 1,803 KB 8/30/2006 1:45:18 PM
C:\WINDOWS\system32 Microsoft Corporation

mstime.dll 6.0.3790.2781 525 KB 8/30/2006 1:45:36 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

occache.dll 6.0.3790.2781 217 KB 8/30/2006 1:45:32 PM
C:\WINDOWS\system32 Microsoft Corporation

occache.dll 6.0.3790.2781 94 KB 8/30/2006 1:45:36 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

proctexe.ocx 6.3.3790.1830 83 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Intel Corporation

sendmail.dll 6.0.3790.2781 109 KB 8/30/2006 1:45:34 PM
C:\WINDOWS\system32 Microsoft Corporation

sendmail.dll 6.0.3790.2781 56 KB 8/30/2006 1:45:36 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

shdoclc.dll 6.0.3790.0 588 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shdoclc.dll 6.0.3790.0 589 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

shdocvw.dll 6.0.3790.2781 3,594 KB 10/3/2006 4:02:18 PM
C:\WINDOWS\system32 Microsoft Corporation

shdocvw.dll 6.0.3790.2781 1,480 KB 10/3/2006 4:02:32 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

shfolder.dll 6.0.3790.1830 43 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

shfolder.dll 6.0.3790.1830 25 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

shlwapi.dll 6.0.3790.2653 805 KB 3/29/2006 4:46:12 PM
C:\WINDOWS\system32 Microsoft Corporation

shlwapi.dll 6.0.3790.2653 314 KB 3/29/2006 4:46:16 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

tdc.ocx 1.3.0.3130 177 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

tdc.ocx 1.3.0.3130 58 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

url.dll 6.0.3790.1830 49 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

url.dll 6.0.3790.1830 37 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

urlmon.dll 6.0.3790.2663 1,576 KB 3/29/2006 4:46:14 PM
C:\WINDOWS\system32 Microsoft Corporation

urlmon.dll 6.0.3790.2663 680 KB 3/29/2006 4:46:16 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

webcheck.dll 6.0.3790.1830 699 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

webcheck.dll 6.0.3790.1830 273 KB 3/25/2005 6:00:00 AM
C:\WINDOWS\SysWOW64 Microsoft Corporation

wininet.dll 6.0.3790.2781 1,662 KB 10/3/2006 4:02:30 PM
C:\WINDOWS\system32 Microsoft Corporation

wininet.dll 6.0.3790.2781 650 KB 10/3/2006 4:02:32 PM
C:\WINDOWS\SysWOW64 Microsoft Corporation

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	wininet.dll
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To	Issued By	Validity	Signature Algorithm
No personal certificate information available			

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Low
Internet	Custom
Restricted sites	Custom

SQL Server

Engine Version: Microsoft SQL Server 2005 - 9.00.3042.00 (Intel IA-64)
Feb 10 2007 01:00:35 Copyright (c) 1988-2005 Microsoft Corporation

SQL install: The installation followed the default options. For the sort order Latin1_General_binary was chosen.
Client tools and development tools were not installed on the server. Mixed mode authentication was used.

SQL Startup parameters: -c -x - E -T834 -T2301 -T661

-x Disable the Keeping of CPU time and cache-hit ratio statistics.

-c Start SQL Server independently of Windows NT Service Control Manager

-E Increase the number of consecutive extents allocated per file to 4

-T2301 Trace flag to enable more accurate query run-time behavior modeling in the SQL Server query optimizer typically only needed for large data set decision support processing.

- T834 On systems with 8GB or more, this traceflag causes the buffer pool to use large pages. These are allocated at startup and are kept throughout the lifetime of the process. This trace flag can only be set on 64-bit installations of SQL Server.

-T661 Turn off the ghost thread

The following parameters were changed from their default values:

name	minimum	maximum	config_value	run_value
affinity mask	-2147483648	2147483648	-1	-1
affinity64 mask	-2147483648	2147483648	-1	-1
allow updates	0	1	1	1
lightweight pooling	0	1	1	1
max worker threads	128	32767	2048	2048
max server memory (MB)	16	2147483647	120000	120000
min server memory (MB)	0	2147483647	118000	118000
network packet size (B)	512	32767	32767	32767
recovery interval (min)	0	32767	32767	32767
show advanced options	0	1	1	1
query wait	-1	2147483647	2147483647	2147483647

Appendix B: Database Build Scripts

Create Database

if exists (select name from sysdatabases where name = 'tpch3000g') drop database tpch3000g

```
CREATE DATABASE tpch3000g ON PRIMARY  
(NAME = tpch3000g_root,  
FILENAME = "G:\TPCH_Roots\tpch3000g.mdf",  
SIZE = 10MB,  
FILEGROWTH = 10MB),
```

```
FILEGROUP STAGING_FG  
(NAME = tpch3000g_stage1, FILENAME = 'G:\mnt\ntfs\1\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage2, FILENAME = 'G:\mnt\ntfs\2\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage3, FILENAME = 'G:\mnt\ntfs\3\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage4, FILENAME = 'G:\mnt\ntfs\4\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage5, FILENAME = 'G:\mnt\ntfs\5\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage6, FILENAME = 'G:\mnt\ntfs\6\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage7, FILENAME = 'G:\mnt\ntfs\7\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage8, FILENAME = 'G:\mnt\ntfs\8\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage9, FILENAME = 'G:\mnt\ntfs\9\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage10, FILENAME = 'G:\mnt\ntfs\10\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage11, FILENAME = 'G:\mnt\ntfs\11\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage12, FILENAME = 'G:\mnt\ntfs\12\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage13, FILENAME = 'G:\mnt\ntfs\13\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage14, FILENAME = 'G:\mnt\ntfs\14\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage15, FILENAME = 'G:\mnt\ntfs\15\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage16, FILENAME = 'G:\mnt\ntfs\16\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage17, FILENAME = 'G:\mnt\ntfs\17\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage18, FILENAME = 'G:\mnt\ntfs\18\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage19, FILENAME = 'G:\mnt\ntfs\19\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage20, FILENAME = 'G:\mnt\ntfs\20\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage21, FILENAME = 'G:\mnt\ntfs\21\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage22, FILENAME = 'G:\mnt\ntfs\22\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage23, FILENAME = 'G:\mnt\ntfs\23\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage24, FILENAME = 'G:\mnt\ntfs\24\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage25, FILENAME = 'G:\mnt\ntfs\25\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage26, FILENAME = 'G:\mnt\ntfs\26\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage27, FILENAME = 'G:\mnt\ntfs\27\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage28, FILENAME = 'G:\mnt\ntfs\28\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage29, FILENAME = 'G:\mnt\ntfs\29\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage30, FILENAME = 'G:\mnt\ntfs\30\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage31, FILENAME = 'G:\mnt\ntfs\31\load\stage.mdf', SIZE = 110000MB),  
(NAME = tpch3000g_stage32, FILENAME = 'G:\mnt\ntfs\32\load\stage.mdf', SIZE = 110000MB),
```

```
FILEGROUP LINEITEM_FG  
(NAME = tpch3000g_li1, FILENAME = 'G:\mnt\li\1\', SIZE = 22500MB),  
(NAME = tpch3000g_li2, FILENAME = 'G:\mnt\li\2\', SIZE = 22500MB),  
(NAME = tpch3000g_li3, FILENAME = 'G:\mnt\li\3\', SIZE = 22500MB),  
(NAME = tpch3000g_li4, FILENAME = 'G:\mnt\li\4\', SIZE = 22500MB),  
(NAME = tpch3000g_li5, FILENAME = 'G:\mnt\li\5\', SIZE = 22500MB),  
(NAME = tpch3000g_li6, FILENAME = 'G:\mnt\li\6\', SIZE = 22500MB),  
(NAME = tpch3000g_li7, FILENAME = 'G:\mnt\li\7\', SIZE = 22500MB),  
(NAME = tpch3000g_li8, FILENAME = 'G:\mnt\li\8\', SIZE = 22500MB),  
(NAME = tpch3000g_li9, FILENAME = 'G:\mnt\li\9\', SIZE = 22500MB),  
(NAME = tpch3000g_li10, FILENAME = 'G:\mnt\li\10\', SIZE = 22500MB),  
(NAME = tpch3000g_li11, FILENAME = 'G:\mnt\li\11\', SIZE = 22500MB),  
(NAME = tpch3000g_li12, FILENAME = 'G:\mnt\li\12\', SIZE = 22500MB),  
(NAME = tpch3000g_li13, FILENAME = 'G:\mnt\li\13\', SIZE = 22500MB),  
(NAME = tpch3000g_li14, FILENAME = 'G:\mnt\li\14\', SIZE = 22500MB),  
(NAME = tpch3000g_li15, FILENAME = 'G:\mnt\li\15\', SIZE = 22500MB),  
(NAME = tpch3000g_li16, FILENAME = 'G:\mnt\li\16\', SIZE = 22500MB),  
(NAME = tpch3000g_li17, FILENAME = 'G:\mnt\li\17\', SIZE = 22500MB),  
(NAME = tpch3000g_li18, FILENAME = 'G:\mnt\li\18\', SIZE = 22500MB),  
(NAME = tpch3000g_li19, FILENAME = 'G:\mnt\li\19\', SIZE = 22500MB),  
(NAME = tpch3000g_li20, FILENAME = 'G:\mnt\li\20\', SIZE = 22500MB),  
(NAME = tpch3000g_li21, FILENAME = 'G:\mnt\li\21\', SIZE = 22500MB),  
(NAME = tpch3000g_li22, FILENAME = 'G:\mnt\li\22\', SIZE = 22500MB),  
(NAME = tpch3000g_li23, FILENAME = 'G:\mnt\li\23\', SIZE = 22500MB),  
(NAME = tpch3000g_li24, FILENAME = 'G:\mnt\li\24\', SIZE = 22500MB),
```

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

Create Base Tables

```

create table PART
(P_PARTKEY int not null,
 P_NAME varchar(55) not null,
 P_MFGR char(25) not null,
 P_BRAND char(10) not null,
 P_TYPE varchar(25) not null,
 P_SIZE int not null,
 P_CONTAINER char(10) not null,
 P_RETAILPRICE float not null,
 P_COMMENT varchar(23) not null)
on LOAD_FG

create table SUPPLIER
(S_SUPPKEY int not null,
 S_NAME char(25) not null,
 S_ADDRESS varchar(40) not null,
 S_NATIONKEY int not null,
 S_PHONE char(15) not null,
 S_ACCTBAL float not null,
 S_COMMENT varchar(101) not null)
on LOAD_FG

create table PARTSUPP
(PS_PARTKEY int not null,
 PS_SUPPKEY int not null,
 PS_AVAILQTY int not null,
 PS_SUPPLYCOST float not null,
 PS_COMMENT varchar(199) not null)
on LOAD_FG

create table CUSTOMER
(C_CUSTKEY int not null,
 C_NAME varchar(25) not null,
 C_ADDRESS varchar(40) not null,
 C_NATIONKEY int not null,
 C_PHONE char(15) not null,
 C_ACCTBAL float not null,
 C_MKTSEGMENT char(10) not null,
 C_COMMENT varchar(117) not null)
on LOAD_FG

```

```

create table ORDERS
(O_ORDERKEY bigint not null,
 O_CUSTKEY int not null,
 O_ORDERSTATUS char(1) not null,
 O_TOTALPRICE float not null,
 O_ORDERDATE datetime not null,
 O_ORDERPRIORITY char(15) not null,
 O_CLERK char(15) not null,
 O_SHIPPRIORITY int not null,
 O_COMMENT varchar(79) not null)
on LOAD_FG

create table REGION
(R_REGIONKEY int not null,
 R_NAME char(25) not null,
 R_COMMENT varchar(152) not null)
on LOAD_FG

create table LINEITEM
(L_ORDERKEY bigint not null,
 L_PARTKEY int not null,
 L_SUPPKEY int not null,
 L_LINENUMBER int not null,
 L_QUANTITY float not null,
 L_EXTENDEDPRICE float not null,
 L_DISCOUNT float not null,
 L_TAX float not null,
 L_RETURNFLAG char(1) not null,
 L_LINESTATUS char(1) not null,
 L_SHIPDATE datetime not null,
 L_COMMITDATE datetime not null,
 L_RECEIPTDATE datetime not null,
 L_SHIPINSTRUCT char(25) not null,
 L_SHIPMODE char(10) not null,
 L_COMMENT varchar(44) not null)
on LOAD_FG

create table NATION
(N_NATIONKEY int not null,
 N_NAME char(25) not null,
 N_REGIONKEY int not null,
 N_COMMENT varchar(152) not null)
on LOAD_FG

```

Create Indexes

```

create index PS_SUPPKEY_IDX
on PARTSUPP(PS_SUPPKEY)
with fillfactor=100, SORT_IN_TEMPDB
on GENERAL_FG

create index L_PARTKEY_SUPPKEY_IDX on
LINEITEM(L_PARTKEY)
with FILLFACTOR=95, SORT_IN_TEMPDB on
LINEITEM_FG

```

```

create index S_NATIONKEY_IDX
on SUPPLIER(S_NATIONKEY)
with fillfactor=100, SORT_IN_TEMPDB
on GENERAL_FG

create index L_ORDERKEY_IDX
on LINEITEM(L_ORDERKEY)
with FILLFACTOR=95, SORT_IN_TEMPDB
on LINEITEM_FG

create index N_REGIONKEY_IDX
on NATION(N_REGIONKEY)
with fillfactor=100, SORT_IN_TEMPDB
on GENERAL_FG

```

Foreign Keys

```
alter table SUPPLIER add constraint FK_S_NATIONKEY foreign key (S_NATIONKEY) references NATION(N_NATIONKEY)
alter table PARTSUPP add constraint FK_PS_PARTKEY foreign key (PS_PARTKEY) references PART(P_PARTKEY)
alter table PARTSUPP add constraint FK_PS_SUPPKEY foreign key (PS_SUPPKEY) references SUPPLIER(S_SUPPKEY)
alter table CUSTOMER add constraint FK_C_NATIONKEY foreign key (C_NATIONKEY) references NATION(N_NATIONKEY)
alter table ORDERS add constraint FK_O_CUSTKEY foreign key (O_CUSTKEY) references CUSTOMER(C_CUSTKEY)
alter table LINEITEM add constraint FK_L_ORDERKEY foreign key (L_ORDERKEY) references ORDERS(O_ORDERKEY)
alter table LINEITEM add constraint FK_L_PARTKEY foreign key (L_PARTKEY) references PART(P_PARTKEY)
alter table LINEITEM add constraint FK_L_SUPPKEY foreign key (L_SUPPKEY) references SUPPLIER(S_SUPPKEY)
alter table LINEITEM add constraint FK_L_PARTKEY_SUPPKEY foreign key (L_PARTKEY,L_SUPPKEY) references
PARTSUPP(PS_PARTKEY, PS_SUPPKEY)
alter table NATION add constraint FK_N_REGIONKEY foreign key (N_REGIONKEY) references REGION(R_REGIONKEY)
```

Primary Keys

```
ALTER table NATION ADD constraint PK_N_NATIONKEY primary key (N_NATIONKEY) ON GENERAL_FG
ALTER table REGION ADD constraint PK_R_REGIONKEY primary key (R_REGIONKEY) ON GENERAL_FG
ALTER table SUPPLIER ADD constraint PK_S_SUPPKEY primary key (S_SUPPKEY) ON GENERAL_FG
ALTER table CUSTOMER ADD constraint PK_C_CUSTKEY primary key (C_CUSTKEY) ON GENERAL_FG
ALTER table ORDERS ADD constraint PK_O_ORDERKEY primary key (O_ORDERKEY) WITH (FILLFACTOR = 95) ON GENERAL_FG
ALTER table PARTSUPP ADD constraint PK_PS_PARTKEY_PS_SUPPKEY primary key (PS_PARTKEY, PS_SUPPKEY) ON
GENERAL_FG
ALTER table PART ADD constraint PK_P_PARTKEY primary key (P_PARTKEY) ON GENERAL_FG
```

Clustered Indexes

```
create clustered index L_SHIPDATE_CLUIDX on LINEITEM(L_SHIPDATE) WITH FILLFACTOR=95, SORT_IN_TEMPDB
on LINEITEM_FG

create clustered index O_ORDERDATE_CLUIDX on ORDERS(O_ORDERDATE) WITH FILLFACTOR=95, SORT_IN_TEMPDB
on GENERAL_FG
```

Backup

backup database tpch3000g to

```
DISK = 'G:\mnt\ntfs\1\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\2\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\3\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\4\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\5\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\6\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\7\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\8\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\9\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\10\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\11\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\12\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\13\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\14\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\15\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\16\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\17\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\18\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\19\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\20\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\21\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\22\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\23\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\24\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\25\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\26\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\27\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\28\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\29\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\30\backup\tpch3000g.bak',
DISK = 'G:\mnt\ntfs\31\backup\tpch3000g.bak', DISK = 'G:\mnt\ntfs\32\backup\tpch3000g.bak'
```

with init, maxtransfersize=1048576, BUFFERCOUNT=1000, stats = 1

Appendix C: Query Text and Output

Using Standard Substitutions

/* TPC_H Query 1 - Pricing Summary Report */

```
SELECT L_RETURNFLAG, L_LINESTATUS, SUM(L_QUANTITY) AS SUM_QTY, SUM(L_EXTENDEDPRI  
  AS SUM_BASE_PRICE, SUM(L_EXTENDEDPRI*(1-L_DISCOUNT)) AS SUM_DISC_PRICE,  
  SUM(L_EXTENDEDPRI*(1-L_DISCOUNT)*(1+L_TAX)) AS SUM_CHARGE, AVG(L_QUANTITY) AS AVG_QTY,  
  AVG(L_EXTENDEDPRI) AS AVG_PRICE, AVG(L_DISCOUNT) AS AVG_DISC, COUNT(*) AS COUNT_ORDER  
FROM LINEITEM  
WHERE L_SHIPDATE <= dateadd(dd, -90, '1998-12-01') GROUP BY L_RETURNFLAG, L_LINESTATUS  
ORDER BY L_RETURNFLAG, L_LINESTATUS
```

L_RETURNFLAG	L_LINESTATUS	SUM_QTY	SUM_BASE_PRICE	SUM_DISC_PRICE	SUM_CHARGE
AVG_QTY	AVG_PRICE	AVG_DISC	COUNT_ORDER		
A	F	37734107.000000	56586554400.729401	53758257134.869392	55909065222.827774
38273.129735	0.049985	1478493			25.522006
N	F	991417.000000	1487504710.379998	1413082168.054106	1469649223.194383
38284.467761	0.050093	38854			25.516472
N	O	74476040.000000	111701729697.741550	106118230307.607930	110367043872.496800
38249.117989	0.049997	2920374			25.502227
R	F	37719753.000000	56568041380.899246	53741292684.604187	55889619119.831680
38250.854626	0.050009	1478870			25.505794

(4 row(s) affected)

/* TPC_H Query 2 - Minimum Cost Supplier */

```
SELECT TOP 100 S_ACCTBAL, S_NAME, N_NAME, P_PARTKEY, P_MFGR, S_ADDRESS, S_PHONE, S_COMMENT  
FROM PART, SUPPLIER, PARTSUPP, NATION, REGION  
WHERE P_PARTKEY = PS_PARTKEY AND S_SUPPKEY = PS_SUPPKEY AND P_SIZE = 15 AND  
  P_TYPE LIKE '%%BRASS' AND S_NATIONKEY = N_NATIONKEY AND N_REGIONKEY = R_REGIONKEY AND  
  R_NAME = 'EUROPE' AND  
  PS_SUPPLYCOST = (SELECT MIN(PS_SUPPLYCOST) FROM PARTSUPP, SUPPLIER, NATION, REGION  
  WHERE P_PARTKEY = PS_PARTKEY AND S_SUPPKEY = PS_SUPPKEY  
  AND S_NATIONKEY = N_NATIONKEY AND N_REGIONKEY = R_REGIONKEY AND R_NAME = 'EUROPE')  
ORDER BY S_ACCTBAL DESC, N_NAME, S_NAME, P_PARTKEY
```

S_ACCTBAL	S_NAME	N_NAME	P_PARTKEY	P_MFGR	S_ADDRESS
S_PHONE	S_COMMENT				
9938.530000	Supplier#000005359	UNITED KINGDOM	185358	Manufacturer#4	QKuHYh,vZGiwu2FWEJoLDx04
33-429-790-6131	uriously regular requests hag				
9937.840000	Supplier#000005969	ROMANIA	108438	Manufacturer#1	
ANDENSOSmk,miq23Xfb5RWt6dvUcvt6Qa	29-520-692-3537	efully express instructions. regular requests against the slyly fin			
9936.220000	Supplier#000005250	UNITED KINGDOM	249	Manufacturer#4	B3rqp0xbSEim4Mpy2RH J
33-320-228-2957	etected about the furiously final accounts. slyly ironic pinto beans sleep inside the furiously				
9923.770000	Supplier#000002324	GERMANY	29821	Manufacturer#4	y3OD9UyWSTOK
17-779-299-1839	ackages boost blithely. blithely regular deposits c				
.					
.					
.					
7850.660000	Supplier#000001518	UNITED KINGDOM	86501	Manufacturer#1	ONda3YJiHKJOC
33-730-383-3892	ifts haggle fluffily pending pai				
7843.520000	Supplier#000006683	FRANCE	11680	Manufacturer#4	2Z0JGkiv01Y00oCFwUGfviIbhzCdy
16-464-517-8943	express, final pinto beans x-ray slyly asymptotes. unusual, unusual				

(100 row(s) affected)

/* TPC_H Query 3 - Shipping Priority */

```
SELECT TOP 10 L_ORDERKEY, SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT))AS REVENUE, O_ORDERDATE, O_SHIPPRIORITY
FROM CUSTOMER, ORDERS, LINEITEM
WHERE C_MKTSEGMENT = 'BUILDING' AND C_CUSTKEY = O_CUSTKEY AND L_ORDERKEY = O_ORDERKEY AND
      O_ORDERDATE < '1995-03-15' AND L_SHIPDATE > '1995-03-15'
GROUP BY L_ORDERKEY, O_ORDERDATE, O_SHIPPRIORITY
ORDER BY REVENUE DESC, O_ORDERDATE
```

L_ORDERKEY	REVENUE	O_ORDERDATE	O_SHIPPRIORITY
2456423	406181.011100	1995-03-05 00:00:00.000	0
3459808	405838.698900	1995-03-04 00:00:00.000	0
492164	390324.061000	1995-02-19 00:00:00.000	0
1188320	384537.935900	1995-03-09 00:00:00.000	0
2435712	378673.055800	1995-02-26 00:00:00.000	0
4878020	378376.795200	1995-03-12 00:00:00.000	0
5521732	375153.921500	1995-03-13 00:00:00.000	0
2628192	373133.309400	1995-02-22 00:00:00.000	0
993600	371407.459500	1995-03-05 00:00:00.000	0
2300070	367371.145200	1995-03-13 00:00:00.000	0

(10 row(s) affected)

/* TPC_H Query 4 - Order Priority Checking */

```
SELECT O_ORDERPRIORITY, COUNT(*) AS ORDER_COUNT FROM ORDERS
WHERE O_ORDERDATE >= '1993-07-01' AND O_ORDERDATE < dateadd (mm, 3, '1993-07-01') AND
      EXISTS (SELECT * FROM LINEITEM WHERE L_ORDERKEY = O_ORDERKEY AND
            L_COMMITDATE < L_RECEIPTDATE)
GROUP BY O_ORDERPRIORITY
ORDER BY O_ORDERPRIORITY
```

O_ORDERPRIORITY	ORDER_COUNT
1-URGENT	10594
2-HIGH	10476
3-MEDIUM	10410
4-NOT SPECIFIED	10556
5-LOW	10487

(5 row(s) affected)

/* TPC_H Query 5 - Local Supplier Volume */

```
SELECT N_NAME, SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT)) AS REVENUE
FROM CUSTOMER, ORDERS, LINEITEM, SUPPLIER, NATION, REGION
WHERE C_CUSTKEY = O_CUSTKEY AND L_ORDERKEY = O_ORDERKEY AND L_SUPPKEY = S_SUPPKEY AND
      C_NATIONKEY = S_NATIONKEY AND S_NATIONKEY = N_NATIONKEY AND N_REGIONKEY = R_REGIONKEY
      AND R_NAME = 'ASIA' AND O_ORDERDATE >= '1994-01-01' AND O_ORDERDATE < DATEADD(YY, 1, '1994-01-01')
GROUP BY N_NAME
ORDER BY REVENUE DESC
```

N_NAME	REVENUE
INDONESIA	55502041.169700
VIETNAM	55295086.996700
CHINA	53724494.256600
INDIA	52035512.000200
JAPAN	45410175.695400

(5 row(s) affected)

/* TPC_H Query 6 - Forecasting Revenue Change */

```
SELECT SUM(L_EXTENDEDPRICE*L_DISCOUNT) AS REVENUE
FROM LINEITEM
WHERE L_SHIPDATE >= '1994-01-01' AND L_SHIPDATE < dateadd (yy, 1, '1994-01-01') AND L_DISCOUNT BETWEEN .06 - 0.01
      AND .06 + 0.01 AND L_QUANTITY < 24
```

REVENUE
123141078.228300

(1 row(s) affected)

/* TPC_H Query 7 - Volume Shipping */

```
SELECT SUPP_NATION, CUST_NATION, L_YEAR, SUM(VOLUME) AS REVENUE
FROM ( SELECT N1.N_NAME AS SUPP_NATION, N2.N_NAME AS CUST_NATION, datepart(yy, L_SHIPDATE) AS
L_YEAR,
      L_EXTENDEDPRICE*(1-L_DISCOUNT) AS VOLUME
      FROM SUPPLIER, LINEITEM, ORDERS, CUSTOMER, NATION N1, NATION N2
      WHERE S_SUPPKEY = L_SUPPKEY AND O_ORDERKEY = L_ORDERKEY AND C_CUSTKEY = O_CUSTKEY
      AND S_NATIONKEY = N1.N_NATIONKEY AND C_NATIONKEY = N2.N_NATIONKEY AND
            ((N1.N_NAME = 'FRANCE' AND N2.N_NAME = 'GERMANY') OR
            (N1.N_NAME = 'GERMANY' AND N2.N_NAME = 'FRANCE')) AND
            L_SHIPDATE BETWEEN '1995-01-01' AND '1996-12-31' )
      AS SHIPPING
GROUP BY SUPP_NATION, CUST_NATION, L_YEAR
ORDER BY SUPP_NATION, CUST_NATION, L_YEAR
```

SUPP_NATION	CUST_NATION	L_YEAR	REVENUE
FRANCE	GERMANY	1995	54639732.733600
FRANCE	GERMANY	1996	54633083.307600
GERMANY	FRANCE	1995	52531746.669700
GERMANY	FRANCE	1996	52520549.022400

(4 row(s) affected)

/* TPC_H Query 8 - National Market Share */

```
SELECT O_YEAR, SUM(CASE WHEN NATION = 'BRAZIL' THEN VOLUME ELSE 0 END) / SUM(VOLUME) AS MKT_SHARE
FROM (SELECT datepart(yy, O_ORDERDATE) AS O_YEAR, L_EXTENDEDPRICE * (1-L_DISCOUNT) AS VOLUME,
      N2.N_NAME AS NATION
      FROM PART, SUPPLIER, LINEITEM, ORDERS, CUSTOMER, NATION N1, NATION N2, REGION
      WHERE P_PARTKEY = L_PARTKEY AND S_SUPPKEY = L_SUPPKEY AND L_ORDERKEY = O_ORDERKEY
      AND O_CUSTKEY = C_CUSTKEY AND C_NATIONKEY = N1.N_NATIONKEY AND
            N1.N_REGIONKEY = R_REGIONKEY AND R_NAME = 'AMERICA' AND
            S_NATIONKEY = N2.N_NATIONKEY AND O_ORDERDATE BETWEEN '1995-01-01' AND
            '1996-12-31' AND P_TYPE= 'ECONOMY ANODIZED STEEL') AS ALL_NATIONS
GROUP BY O_YEAR
ORDER BY O_YEAR
```

O_YEAR	MKT_SHARE
1995	0.034436
1996	0.041486

(2 row(s) affected)

/* TPC_H Query 9 - Product Type Profit Measure */

```
SELECT NATION, O_YEAR, SUM(AMOUNT) AS SUM_PROFIT
FROM (SELECT N_NAME AS NATION, datepart(yy, O_ORDERDATE) AS O_YEAR,
      L_EXTENDEDPRICE*(1-L_DISCOUNT)-PS_SUPPLYCOST*L_QUANTITY AS AMOUNT
      FROM PART, SUPPLIER, LINEITEM, PARTSUPP, ORDERS, NATION
      WHERE S_SUPPKEY = L_SUPPKEY AND PS_SUPPKEY= L_SUPPKEY AND PS_PARTKEY = L_PARTKEY AND
            P_PARTKEY= L_PARTKEY AND O_ORDERKEY = L_ORDERKEY AND S_NATIONKEY = N_NATIONKEY AND
            P_NAME LIKE '%green%') AS PROFIT
GROUP BY NATION, O_YEAR
ORDER BY NATION, O_YEAR DESC
```

NATION	O_YEAR	SUM_PROFIT
ALGERIA	1998	31342867.234500
ALGERIA	1997	57138193.023300
ALGERIA	1996	56140140.133000
ALGERIA	1995	53051469.653400
ALGERIA	1994	53867582.128600
ALGERIA	1993	54942718.132400
ALGERIA	1992	54628034.712700
ARGENTINA	1998	30211185.708100
.		
VIETNAM	1992	49613838.315100

(175 row(s) affected)

/* TPC_H Query 10 - Returned Item Reporting */

```
SELECT TOP 20 C_CUSTKEY, C_NAME, SUM(L_EXTENDEDPRI*(1-L_DISCOUNT)) AS REVENUE, C_ACCTBAL,
      N_NAME, C_ADDRESS, C_PHONE, C_COMMENT
FROM CUSTOMER, ORDERS, LINEITEM, NATION
WHERE C_CUSTKEY = O_CUSTKEY AND L_ORDERKEY = O_ORDERKEY AND O_ORDERDATE >= '1993-10-01 AND
      O_ORDERDATE < dateadd(mm, 3, '1993-10-01') AND
      L_RETURNFLAG = 'R' AND C_NATIONKEY= N_NATIONKEY
GROUP BY C_CUSTKEY, C_NAME, C_ACCTBAL, C_PHONE, N_NAME, C_ADDRESS, C_COMMENT
ORDER BY REVENUE DESC
```

C_CUSTKEY	C_NAME C_PHONE	REVENUE C_COMMENT	C_ACCTBAL	N_NAME	C_ADDRESS	
57040	Customer#000057040	734235.245500	632.870000	JAPAN	Eioyzzf4pp	22-895-
641-3466	sits. slyly regular requests	sleep alongside of the regular inst				
143347	Customer#000143347	721002.694800	2557.470000	EGYPT	1aReFYv,Kw4	14-
742-935-3718	ggle carefully enticing requests.	final deposits use bold, bold pinto beans. ironic, idle re				
60838	Customer#000060838	679127.307700	2454.770000	BRAZIL	64EaJ5vMAHWJIBOxJklpNc2RJiWE	
12-913-494-9813	need to boost against the slyly regular account					
.						
.						
23431	Customer#000023431	554269.536000	3381.860000	ROMANIA	HgiV0phqhala9aydNollb	
29-915-458-2654	nusual, even instructions: furiously stealthy n					

(20 row(s) affected)

/* TPC_H Query 11 - Important Stock Identification */

```
SELECT PS_PARTKEY, SUM(PS_SUPPLYCOST*PS_AVAILQTY) AS VALUE
FROM PARTSUPP, SUPPLIER, NATION
WHERE PS_SUPPKEY = S_SUPPKEY AND S_NATIONKEY = N_NATIONKEY AND N_NAME = 'GERMANY'
GROUP BY PS_PARTKEY
HAVING SUM(PS_SUPPLYCOST*PS_AVAILQTY) > (SELECT SUM(PS_SUPPLYCOST*PS_AVAILQTY) * 0.0001000000
      FROM PARTSUPP, SUPPLIER, NATION
WHERE PS_SUPPKEY = S_SUPPKEY AND S_NATIONKEY = N_NATIONKEY AND N_NAME = 'GERMANY')
ORDER BY VALUE DESC
```

PS_PARTKEY	VALUE
129760	17538456.860000
166726	16503353.920000
191287	16474801.970000
161758	16101755.540000
.	
.	
72073	7877736.110000
5182	7874521.730000

(1048 row(s) affected)

/* TPC_H Query 12 - Shipping Modes and Order Priority */

```
SELECT L_SHIPMODE,
      SUM(CASE WHEN O_ORDERPRIORITY = '1-URGENT' OR O_ORDERPRIORITY = '2-HIGH' THEN 1 ELSE 0 END)
      AS HIGH_LINE_COUNT, SUM(CASE WHEN O_ORDERPRIORITY <> '1-URGENT' AND O_ORDERPRIORITY <> '2-HIGH'
      THEN 1 ELSE 0 END) AS LOW_LINE_COUNT
FROM ORDERS, LINEITEM
WHERE O_ORDERKEY = L_ORDERKEY AND L_SHIPMODE IN ('MAIL','SHIP') AND L_COMMITDATE < L_RECEIPTDATE AND
      L_SHIPDATE < L_COMMITDATE AND L_RECEIPTDATE >= '1994-01-01' AND L_RECEIPTDATE < dateadd(yy, 1, '1994-01-01')
GROUP BY L_SHIPMODE
ORDER BY L_SHIPMODE
```

L_SHIPMODE	HIGH_LINE_COUNT	LOW_LINE_COUNT
MAIL	6202	9324
SHIP	6200	9262

(2 row(s) affected)

/* TPC_H Query 13 - Customer Distribution */

```
SELECT C_COUNT, COUNT(*) AS CUSTDIST
FROM (SELECT C_CUSTKEY, COUNT(O_ORDERKEY)
      FROM CUSTOMER left outer join ORDERS on C_CUSTKEY = O_CUSTKEY
      AND O_COMMENT not like '%%special%%requests%%'
      GROUP BY C_CUSTKEY) AS C_ORDERS (C_CUSTKEY, C_COUNT)
GROUP BY C_COUNT
ORDER BY CUSTDIST DESC, C_COUNT DESC
```

C_COUNT CUSTDIST

```
-----
0      50005
9      6641
10     6532
11     6014
8      5937
12     5639
13     5024
19     4793
7      4687.
```

```
.
41     2
39     1
(42 row(s) affected)
```

/* TPC_H Query 14 - Promotion Effect */

```
SELECT 100.00 * SUM (CASE WHEN P_TYPE LIKE 'PROMO%%' THEN L_EXTENDEDPRICE*(1-L_DISCOUNT)
                      ELSE 0 END) / SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT)) AS PROMO_REVENUE
FROM LINEITEM, PART
WHERE L_PARTKEY = P_PARTKEY AND L_SHIPDATE >= '1995-09-01' AND L_SHIPDATE < dateadd(mm, 1, '1995-09-01')
```

PROMO_REVENUE

```
-----
16.380779
```

(1 row(s) affected)

/* TPC_H Query 15 - Create View for Top Supplier Query */

```
CREATE VIEW REVENUE0 (SUPPLIER_NO, TOTAL_REVENUE) AS
  SELECT L_SUPPKEY, SUM(L_EXTENDEDPRICE*(1-L_DISCOUNT)) FROM LINEITEM
  WHERE L_SHIPDATE >= '1996-01-01' AND L_SHIPDATE < dateadd(mm, 3, '1996-01-01')
GROUP BY L_SUPPKEY
GO
```

/* TPC_H Query 15 - Top Supplier */

```
SELECT S_SUPPKEY,
       S_NAME,
       S_ADDRESS,
       S_PHONE,
       TOTAL_REVENUE
FROM SUPPLIER, REVENUE0
WHERE S_SUPPKEY = SUPPLIER_NO AND TOTAL_REVENUE = ( SELECT MAX(TOTAL_REVENUE) FROM REVENUE0)
ORDER BY S_SUPPKEY
```

DROP VIEW REVENUE0

```
S_SUPPKEY S_NAME          S_ADDRESS          S_PHONE    TOTAL_REVENUE
-----
8449      Supplier#000008449    Wp34zim9qYFbVctdW    20-469-856-8873 1772627.208700
```

(1 row(s) affected)

/* TPC_H Query 16 - Parts/Supplier Relationship */

```
SELECT P_BRAND, P_TYPE, P_SIZE, COUNT(DISTINCT PS_SUPPKEY) AS SUPPLIER_CNT
FROM PARTSUPP, PART
WHERE P_PARTKEY = PS_PARTKEY AND P_BRAND <> 'Brand#45' AND P_TYPE NOT LIKE 'MEDIUM POLISHED%%'
AND P_SIZE IN (49, 14, 23, 45, 19, 3, 36, 9) AND PS_SUPPKEY NOT IN (SELECT S_SUPPKEY FROM SUPPLIER
WHERE S_COMMENT LIKE '%%Customer%%Complaints%%')
GROUP BY P_BRAND, P_TYPE, P_SIZE
ORDER BY SUPPLIER_CNT DESC, P_BRAND, P_TYPE, P_SIZE
```

P_BRAND	P_TYPE	P_SIZE	SUPPLIER_CNT
---------	--------	--------	--------------

Brand#41	MEDIUM BRUSHED TIN	3	28
Brand#54	STANDARD BRUSHED COPPER	14	27
Brand#11	STANDARD BRUSHED TIN	23	24
Brand#11	STANDARD BURNISHED BRASS	36	24
Brand#15	MEDIUM ANODIZED NICKEL	3	24

Brand#55	STANDARD PLATED TIN	49	3
----------	---------------------	----	---

(18314 row(s) affected)

/* TPC_H Query 17 - Small-Quantity-Order Revenue */

```
SELECT SUM(L_EXTENDEDPRISE)/7.0 AS AVG_YEARLY FROM LINEITEM, PART
WHERE P_PARTKEY = L_PARTKEY AND P_BRAND = 'Brand#23' AND P_CONTAINER = 'MED BOX'
AND L_QUANTITY < (SELECT 0.2 * AVG(L_QUANTITY) FROM LINEITEM WHERE L_PARTKEY = P_PARTKEY)
```

AVG_YEARLY

348406.054286

(1 row(s) affected)

/* TPC_H Query 18 - Large Volume Customer */

```
SELECT TOP 100 C_NAME, C_CUSTKEY, O_ORDERKEY, O_ORDERDATE, O_TOTALPRICE,
SUM(L_QUANTITY)
FROM CUSTOMER, ORDERS, LINEITEM
WHERE O_ORDERKEY IN (SELECT L_ORDERKEY FROM LINEITEM GROUP BY L_ORDERKEY HAVING
SUM(L_QUANTITY) > 300) AND C_CUSTKEY = O_CUSTKEY AND O_ORDERKEY = L_ORDERKEY
GROUP BY C_NAME, C_CUSTKEY, O_ORDERKEY, O_ORDERDATE, O_TOTALPRICE
ORDER BY O_TOTALPRICE DESC, O_ORDERDATE
```

C_NAME	C_CUSTKEY	O_ORDERKEY	O_ORDERDATE	O_TOTALPRICE
--------	-----------	------------	-------------	--------------

Customer#000128120	128120	4722021	1994-04-07 00:00:00.000	544089.090000
Customer#000144617	144617	3043270	1997-02-12 00:00:00.000	530604.440000
Customer#000013940	13940	2232932	1997-04-13 00:00:00.000	522720.610000
Customer#000066790	66790	2199712	1996-09-30 00:00:00.000	515531.820000
Customer#000088703	88703	2995076	1994-01-30 00:00:00.000	363812.120000

(57 row(s) affected)

/* TPC_H Query 19 - Discounted Revenue */

```
SELECT SUM(L_EXTENDEDPRISE* (1 - L_DISCOUNT)) AS REVENUE
FROM LINEITEM, PART
WHERE (P_PARTKEY = L_PARTKEY AND P_BRAND = 'Brand#12' AND P_CONTAINER IN ('SM CASE', 'SM BOX',
'SM PACK', 'SM PKG') AND L_QUANTITY >= 1 AND L_QUANTITY <= 1 + 10 AND P_SIZE BETWEEN 1 AND 5
AND L_SHIPMODE IN ('AIR', 'AIR REG') AND L_SHIPINSTRUCT = 'DELIVER IN PERSON')
OR (P_PARTKEY = L_PARTKEY AND P_BRAND = 'Brand#23' AND P_CONTAINER IN ('MED BAG', 'MED BOX',
'MED PKG', 'MED PACK') AND L_QUANTITY >= 10 AND L_QUANTITY <= 10 + 10 AND P_SIZE BETWEEN 1
AND 10 AND L_SHIPMODE IN ('AIR', 'AIR REG') AND L_SHIPINSTRUCT = 'DELIVER IN PERSON') OR
(P_PARTKEY = L_PARTKEY AND P_BRAND = 'Brand#34' AND P_CONTAINER IN ('LG CASE', 'LG BOX',
'LG PACK', 'LG PKG') AND L_QUANTITY >= 20 AND L_QUANTITY <= 20 + 10 AND P_SIZE BETWEEN 1 AND 15
AND L_SHIPMODE IN ('AIR', 'AIR REG') AND L_SHIPINSTRUCT = 'DELIVER IN PERSON')
```

REVENUE

3083843.057800

(1 row(s) affected)

/* TPC_H Query 20 - Potential Part Promotion */

```
SELECT S_NAME, S_ADDRESS FROM SUPPLIER, NATION
WHERE S_SUPPKEY IN ( SELECT PS_SUPPKEY FROM PARTSUPP
  WHERE PS_PARTKEY in (SELECT P_PARTKEY FROM PART WHERE P_NAME like 'forest%') AND
    PS_AVAILQTY (SELECT 0.5 * sum(L_QUANTITY) FROM LINEITEM WHERE L_PARTKEY = PS_PARTKEY AND
      L_SUPPKEY = PS_SUPPKEY AND L_SHIPDATE >= '1994-01-01' AND
        L_SHIPDATE < dateadd(yy,1,'1994-01-01')) AND S_NATIONKEY = N_NATIONKEY AND N_NAME = 'CANADA'
ORDER BY S_NAME
```

S_NAME	S_ADDRESS
Supplier#000000020	iybAE,RmTymrZVYaFZva2SH,j
Supplier#000000091	YV45D7TkfdQanOOZ7q9QxkyGUapU1oOWU6q3
Supplier#000000197	YC2Acon6kjY3zj3Fbxs2k4Vdf7X0cd2F
Supplier#000000226	83qOdU2EYRdPQAQhEtn GRZED
Supplier#000000285	Br7e1nnt1yxrw6lmgpJ7YdhFDjuBf
Supplier#000000378	FfbhyCxWvcPrO8ltp9
.	.
Supplier#000009899	7XdpAHrzt1t,UQFZE
Supplier#000009974	7wJ,J5DKcxSU4Kp1cQLpbcAvB5AsvKT

(204 row(s) affected)

/* TPC_H Query 21 - Suppliers Who Kept Orders Waiting */

```
SELECT TOP 100 S_NAME, COUNT(*) AS NUMWAIT
FROM SUPPLIER, LINEITEM L1, ORDERS, NATION WHERE S_SUPPKEY = L1.L_SUPPKEY AND
  O_ORDERKEY = L1.L_ORDERKEY AND O_ORDERSTATUS = 'F' AND L1.L_RECEIPTDATE> L1.L_COMMITDATE
  AND EXISTS (SELECT * FROM LINEITEM L2 WHERE L2.L_ORDERKEY = L1.L_ORDERKEY
    AND L2.L_SUPPKEY <> L1.L_SUPPKEY) AND
  NOT EXISTS (SELECT * FROM LINEITEM L3 WHERE L3.L_ORDERKEY = L1.L_ORDERKEY AND
    L3.L_SUPPKEY <> L1.L_SUPPKEY AND L3.L_RECEIPTDATE > L3.L_COMMITDATE) AND
  S_NATIONKEY = N_NATIONKEY AND N_NAME = 'SAUDI ARABIA'
GROUP BY S_NAME
ORDER BY NUMWAIT DESC, S_NAME
```

S_NAME	NUMWAIT
Supplier#000002829	20
Supplier#000005808	18
Supplier#000000262	17
Supplier#000000496	17
Supplier#000002160	17
.	.
Supplier#000002357	12
Supplier#000002483	12

(100 row(s) affected)

/* TPC_H Query 22 - Global Sales Opportunity */

```
SELECT CNTRYCODE, COUNT(*) AS NUMCUST, SUM(C_ACCTBAL) AS TOTACCTBAL
FROM (SELECT SUBSTRING(C_PHONE,1,2) AS CNTRYCODE, C_ACCTBAL
  FROM CUSTOMER WHERE SUBSTRING(C_PHONE,1,2) IN ('13', '31', '23', '29', '30', '18', '17') AND
    C_ACCTBAL > (SELECT AVG(C_ACCTBAL) FROM CUSTOMER WHERE C_ACCTBAL > 0.00 AND
      SUBSTRING(C_PHONE,1,2) IN ('13', '31', '23', '29', '30', '18', '17')) AND
    NOT EXISTS ( SELECT * FROM ORDERS WHERE O_CUSTKEY = C_CUSTKEY)) AS CUSTSALE
GROUP BY CNTRYCODE
ORDER BY CNTRYCODE
```

CNTRYCODE	NUMCUST	TOTACCTBAL
13	888	6737713.990000
17	861	6460573.720000
18	964	7236687.400000
23	892	6701457.950000
29	948	7158866.630000
30	909	6808436.130000
31	922	6806670.180000

(7 row(s) affected)

Appendix D: Seeds and Query Substitution Parameters

Stream0 Substitution Parameters Seed 429174938	Stream1 Substitution Parameters Seed 429174939
1 64 2 16 COPPER AFRICA 3 MACHINERY 1995-03-03 4 1993-06-01 5 AMERICA 1994-01-01 6 1994-01-01 0.08 25 7 ROMANIAVIETNAM 8 VIETNAM ASIA LARGE BRUSHED COPPER 9 papaya 10 1993-09-01 11 FRANCE 0.0001000000 12 SHIP RAIL 1997-01-01 13 pending deposits 14 1997-01-01 15 1996-01-01 16 Brand#23 STANDARD BRUSHED 8 11 29 43 47 9 32 26 17 Brand#31 SM PKG 18 312 19 Brand#12 Brand#21 Brand#54 5 13 21 20 cornsilk 1994-01-01 EGYPT 21 FRANCE 22 14 33 15 24 12 29 17	1 72 2 4 STEEL EUROPE 3 BUILDING1995-03-20 4 1996-01-01 5 ASIA 1994-01-01 6 1994-01-01 0.05 25 7 IRAQ JORDAN 8 JORDAN MIDDLE EAST LARGE PLATED COPPER 9 navajo 10 1994-07-01 11 ROMANIA0.0001000000 12 FOB RAIL 1997-01-01 13 pending deposits 14 1997-01-01 15 1993-01-01 16 Brand#53 LARGE ANODIZED 5 15 47 12 44 22 49 23 17 Brand#33 LG CASE 18 314 19 Brand#24 Brand#54 Brand#54 10 14 28 20 olive 1997-01-01 ROMANIA 21 UNITED KINGDOM 22 29 31 25 17 16 28 12

Stream2 Substitution Parameters Seed 429174940	Stream3 Substitution Parameters Seed 429174941
1 80 2 41 BRASS AFRICA 3 MACHINERY 1995-03-05 4 1993-10-01 5 EUROPE 1994-01-01 6 1994-01-01 0.03 24 7 CANADA ETHIOPIA 8 ETHIOPIAAFRICA LARGE BURNISHED TIN 9 medium 10 1993-04-01 11 GERMANY 0.0001000000 12 TRUCK REG AIR 1996-01-01 13 pending packages 14 1993-01-01 15 1996-01-01 16 Brand#44 PROMO PLATED10 2 32 18 43 50 39 20 17 Brand#45 LG JAR 18 315 19 Brand#21 Brand#42 Brand#43 6 15 24 20 azure 1996-01-01 INDIA 21 MOROCCO 22 16 29 27 14 12 28 34	1 88 2 29 NICKEL EUROPE 3 BUILDING1995-03-22 4 1996-05-01 5 MIDDLE EAST 1994-01-01 6 1994-01-01 0.08 25 7 SAUDI ARABIA RUSSIA 8 RUSSIA EUROPE MEDIUM BRUSHED TIN 9 lemon 10 1994-01-01 11 SAUDI ARABIA 0.0001000000 12 RAIL TRUCK 1993-01-01 13 pending packages 14 1993-01-01 15 1994-01-01 16 Brand#24 SMALL POLISHED 11 28 50 17 37 21 23 38 17 Brand#42 LG PKG 18 313 19 Brand#23 Brand#25 Brand#42 1 16 20 20 lavender 1994-01-01 UNITED KINGDOM 21 GERMANY 22 30 14 29 11 24 28 20

Stream4 Substitution Parameters Seed 429174942	Stream5 Substitution Parameters Seed 429174943
1 96 2 17 COPPER AMERICA 3 HOUSEHOLD1995-03-07 4 1994-02-01 5 AFRICA 1995-01-01 6 1995-01-01 0.05 25 7 JAPAN KENYA 8 KENYA AFRICA MEDIUM PLATED TIN 9 indian 10 1994-10-01 11 INDIA 0.0001000000 12 AIR TRUCK 1993-01-01 13 unusual packages 14 1993-01-01 15 1996-01-01 16 Brand#54 ECONOMY ANODIZED 3 44 50 27 10 8 47 5 17 Brand#44 MED CASE 18 314 19 Brand#35 Brand#53 Brand#41 6 17 27 20 smoke 1997-01-01 JORDAN 21 UNITED STATES 22 23 26 29 22 11 27 31	1 104 2 5 STEELEUROPE 3 BUILDING1995-03-24 4 1996-09-01 5 AMERICA 1995-01-01 6 1995-01-01 0.03 24 7 EGYPT FRANCE 8 FRANCE EUROPE MEDIUM ANODIZED TIN 9 ghost 10 1993-07-01 11 VIETNAM 0.0001000000 12 REG AIR TRUCK 1993-01-01 13 unusual packages 14 1993-01-01 15 1994-01-01 16 Brand#44 STANDARD BURNISHED 36 25 35 16 20 24 8 31 17 Brand#41 MED JAR 18 312 19 Brand#32 Brand#41 Brand#31 1 18 24 20 firebrick 1996-01-01 CANADA 21 PERU 22 12 24 29 21 32 15 16

Stream6 Substitution Parameters Seed 429174944	Stream7 Substitution Parameters Seed 429174945
1 112 2 42 BRASS AMERICA 3 HOUSEHOLD1995-03-09 4 1994-06-01 5 ASIA 1995-01-01 6 1995-01-01 0.08 25 7 VIETNAM UNITED KINGDOM 8 UNITED KINGDOM EUROPE SMALL POLISHED TIN 9 drab 10 1994-05-01 11 INDONESIA 0.0001000000 12 SHIP MAIL 1994-01-01 13 unusual packages 14 1994-01-01 15 1997-01-01 16 Brand#24 MEDIUM POLISHED 15 24 19 49 14 47 31 6 17 Brand#43 MED PKG 18 313 19 Brand#34 Brand#24 Brand#35 7 19 20 20 plum 1994-01-01 PERU 21 INDONESIA 22 30 29 17 25 12 27 10	1 120 2 30 NICKEL MIDDLE EAST 3 AUTOMOBILE 1995-03-26 4 1997-01-01 5 EUROPE 1995-01-01 6 1995-01-01 0.06 25 7 JORDAN MOROCCO 8 MOROCCO AFRICA SMALL BURNISHED NICKEL 9 cream 10 1993-02-01 11 RUSSIA 0.0001000000 12 FOB MAIL 1994-01-01 13 unusual requests 14 1994-01-01 15 1994-01-01 16 Brand#54 ECONOMY BRUSHED 40 7 25 6 24 44 32 21 17 Brand#45 JUMBO CASE 18 315 19 Brand#41 Brand#12 Brand#34 2 20 27 20 burlywood 1993-01-01 GERMANY 21 ARGENTINA 22 17 31 16 28 33 26 27

Stream8 Substitution Parameters Seed 429174946

1 67
2 18 TIN AMERICA
3 HOUSEHOLD1995-03-11
4 1994-10-01
5 MIDDLE EAST 1996-01-01
6 1996-01-01 0.03 24
7 ETHIOPIAGERMANY
8 GERMANY EUROPE STANDARD BRUSHED NICKEL
9 chartreuse
10 1993-11-01
11 IRAN 0.0001000000
12 TRUCK MAIL 1994-01-01
13 unusual requests
14 1994-01-01
15 1997-01-01
16 Brand#44 SMALL BURNISHED41 6 42 16 36 25 29
32
17 Brand#42 JUMBO JAR
18 312
19 Brand#43 Brand#45 Brand#23 7 10 23
20 metallic 1996-01-01 RUSSIA
21 CHINA
22 34 17 21 10 32 24 11

Appendix E: Refresh Function Source Code

RF1

```
if exists (select name from sysobjects where name = 'RF1') drop procedure RF1
GO
--
-- Create a stored Refresh Insert procedure which will catch the deadlock
-- victim abort and restart the insert transaction.
--
CREATE PROCEDURE RF1
    @current_execution INTEGER, @insert_sets INTEGER, @parallel_executions INTEGER, @total_executions INTEGER
AS
BEGIN

    DECLARE @startdate DATETIME
    DECLARE @enddate DATETIME
    DECLARE @edate DATETIME
    DECLARE @rangeStart INTEGER
    DECLARE @rangeSize INTEGER
    DECLARE @range INTEGER

    declare @index integer
    declare @div integer
    declare @mod integer
    declare @skip integer
    declare @i integer
    declare @rangeSum integer
    declare @totRangeSize integer
    declare @stmt nchar(1000)
    declare @orderSql nchar(1000)
    declare @liSql nchar(1000)

    set @skip = @total_executions/@parallel_executions
    set @div = (@current_execution - 1)/@parallel_executions
    set @mod = (@current_execution - 1) - @div * @parallel_executions
    set @index = @mod*@skip + @div + 1

    --
    -- Get the range for this execution
    --
    set @stmt = N'select @sdate = dateadd(day,-1,min(O_ORDERDATE)), @edate = max(O_ORDERDATE)
        from NEWORDERS'
    exec sp_executesql @stmt,N'@sdate datetime output, @edate datetime output',@startdate output, @enddate output

    if (@total_executions > @parallel_executions)
    begin
        set @div = (@index-1)/@skip
        set @mod = (@index-1) - @div * @skip
        set @rangeSize = datediff(day, @startdate, @enddate)/@parallel_executions + 1
        set @totRangeSize = @rangeSize
        set @rangeSum = 0
        set @rangeStart = @div * @rangeSize
        set @i = @mod
        while (@i > 0)
        begin
            set @rangeSize = (@totRangeSize - @rangeSum)/2
            set @rangeSum = @rangeSum + @rangeSize
            set @rangeStart = @rangeStart + @rangeSize
            set @insert_sets = @insert_sets/2
            set @i = @i - 1
        end

        if (@mod + 1 = @skip) set @rangeSize = @totRangeSize - @rangeSum
        else
            set @rangeSize = (@totRangeSize - @rangeSum)/2
            if (@rangeSize < 0) set @rangeSize = 0
            if (@insert_sets <= 0) set @insert_sets = 1
        end
    end
else
```

```

begin
set @rangeSize = datediff(day, @startdate, @enddate)/@total_executions
set @rangeStart = @rangeSize * (@index - 1)
end

set @startdate = dateadd(day, @rangeStart, @startdate)
if (@index < @total_executions) set @enddate = dateadd(day, @rangeSize, @startdate)
-- print @startdate
-- print @enddate

SET @range = datediff(day, @startdate, @enddate) / @insert_sets
--
-- This handles the case when the max-min/insert_sets is less than 1
--
IF @range = 0 SET @range = 1
--
-- Loop through the order keys only inserting a sets into the
-- ORDERS and LINTEITEM tables
--
SET @edate = dateadd(day, @range, @startdate)
SET @orderSql = N'insert into ORDERS (O_ORDERKEY, O_CUSTKEY, O_ORDERSTATUS, O_TOTALPRICE, O_ORDERDATE,
O_ORDERPRIORITY, O_CLERK, O_SHIPPRIORITY, O_COMMENT) (select O_ORDERKEY, O_CUSTKEY,
O_ORDERSTATUS, O_TOTALPRICE, O_ORDERDATE, O_ORDERPRIORITY, O_CLERK, O_SHIPPRIORITY,
O_COMMENT from NEWORDERS
where O_ORDERDATE > @startdate AND O_ORDERDATE <= @edate) '
SET @liSql = N'insert into LINEITEM (L_ORDERKEY,L_PARTKEY,L_SUPPKEY,L_LINENUMBER,L_QUANTITY,
L_EXTENDEDPRICE, L_DISCOUNT, L_TAX, L_RETURNFLAG, L_LINESTATUS,
L_SHIPDATE, L_COMMITDATE, L_RECEIPTDATE, L_SHIPINSTRUCT, L_SHIPMODE, L_COMMENT)
(select L_ORDERKEY,L_PARTKEY,L_SUPPKEY,L_LINENUMBER,L_QUANTITY, L_EXTENDEDPRICE, L_DISCOUNT,
L_TAX, L_RETURNFLAG, L_LINESTATUS, L_SHIPDATE, L_COMMITDATE, L_RECEIPTDATE, L_SHIPINSTRUCT,
L_SHIPMODE, L_COMMENT from NEWLINEITEM, NEWORDERS
where L_ORDERKEY = O_ORDERKEY AND O_ORDERDATE > @startdate AND O_ORDERDATE <= @edate)'

WHILE @startdate < @enddate
BEGIN
INSERT_TRANS:
begin transaction
exec sp_executesql @orderSql, N'@startdate datetime, @edate datetime', @startdate, @edate
if (@@error = 1205)
begin
print 'Insert deadlock - restarting RF2_' + RTRIM(CONVERT(varchar(30),@current_execution)) + ' transaction'
rollback transaction
goto INSERT_TRANS
end
exec sp_executesql @liSql, N'@startdate datetime, @edate datetime', @startdate, @edate
if (@@error = 1205)
begin
print 'Insert deadlock - restarting RF2_' + RTRIM(CONVERT(varchar(30),@current_execution)) + ' transaction'
rollback transaction
goto INSERT_TRANS
end
commit transaction
set @startdate = @edate
set @edate = dateadd(day, @range, @edate)
if (@edate > @enddate)
set @edate = @enddate
END
END
GO

```


RF2

if exists (select name from sysobjects where name = 'RF2') drop procedure RF2

GO

```
--  
-- Create a stored Refresh Delete procedure which will catch the deadlock  
-- victim abort and restart the delete transaction.  
--
```

CREATE PROCEDURE RF2

 @current_execution INTEGER, @delete_sets INTEGER, @parallel_executions INTEGER, @total_executions INTEGER

AS

BEGIN

```
DECLARE @startdate DATETIME  
DECLARE @enddate DATETIME  
DECLARE @edate DATETIME  
DECLARE @rangeStart INTEGER  
DECLARE @rangeSize INTEGER  
DECLARE @range INTEGER
```

```
declare @index integer  
declare @div integer  
declare @mod integer  
declare @skip integer  
declare @i integer  
declare @rangeSum integer  
declare @totRangeSize integer  
declare @sql nchar(1000)  
declare @orderSql nchar(1000)  
declare @liSql nchar(1000)
```

```
set @skip = @total_executions/@parallel_executions  
set @div = floor((@current_execution-1)/@parallel_executions)  
set @mod = (@current_execution - 1) - @div * @parallel_executions  
set @index = @mod*@skip + @div + 1
```

```
set @sql = N'select @sdate = dateadd(day,-1,min(O_ORDERDATE)), @edate = max(O_ORDERDATE)  
          from MOD_OLDORDERS'
```

exec sp_executesql @sql,N'@sdate datetime output, @edate datetime output',@startdate output, @enddate output

if (@total_executions > @parallel_executions)

```
begin  
    set @div = (@index-1)/@skip  
    set @mod = (@index-1) - @div * @skip  
    set @rangeSize = datediff(day, @startdate, @enddate)/@parallel_executions + 1  
    set @totRangeSize = @rangeSize  
    set @rangeSum = 0  
    set @rangeStart = @div * @rangeSize  
    set @i = @mod  
    while (@i > 0)  
    begin  
        set @rangeSize = (@totRangeSize - @rangeSum)/2  
        set @rangeSum = @rangeSum + @rangeSize  
        set @rangeStart = @rangeStart + @rangeSize  
        set @delete_sets = @delete_sets/2  
        set @i = @i - 1  
    end  
    if (@mod + 1 = @skip) -- last allocation set @rangeSize = @totRangeSize - @rangeSum  
    else  
        set @rangeSize = (@totRangeSize - @rangeSum)/2  
    if (@rangeSize < 0) set @rangeSize = 0  
    if (@delete_sets <= 0) set @delete_sets = 1  
end
```

else

```
begin  
    set @rangeSize = datediff(day, @startdate, @enddate)/@total_executions  
    set @rangeStart = @rangeSize * (@index - 1)  
end
```

set @startdate = dateadd(day, @rangeStart, @startdate)

if (@index < @total_executions) set @enddate = dateadd(day, @rangeSize, @startdate)

```

SET @range = datediff(day, @startdate, @enddate) / @delete_sets
--
-- This handles the case when the max-min/delete_sets is less than 1
--
IF @range = 0 SET @range = 1

--
-- Loop through the order keys only deleting sets from orders
-- and lineitem tables
--
SET @edate = dateadd(day, @range, @startdate)
SET @liSql = N'delete from LINEITEM where L_ORDERKEY in (select O_ORDERKEY from MOD_OLDORDERS
WHERE O_ORDERDATE > @startdate AND O_ORDERDATE <= @edate)'

SET @orderSql = N'delete from ORDERS where O_ORDERKEY in (select O_ORDERKEY from MOD_OLDORDERS
WHERE O_ORDERDATE > @startdate AND O_ORDERDATE <= @edate)'

WHILE @startdate < @enddate
BEGIN
--
-- Delete from ORDERS and LINEITEM table
--
DELETE_TRANS:
begin transaction

exec sp_executesql @liSql, N'@startdate datetime, @edate datetime', @startdate, @edate

--
-- If deadlock victim abort then restart the transaction
--
if (@@error = 1205)
begin
print 'Delete deadlock - restarting RF2_' + RTRIM(CONVERT(varchar(30),@current_execution)) +
'transaction'
rollback transaction
goto DELETE_TRANS
end

exec sp_executesql @orderSql, N'@startdate datetime, @edate datetime', @startdate, @edate

--
-- If deadlock victim abort then restart the transaction
--
if (@@error = 1205)
begin
print 'Delete deadlock - restarting RF2_' + RTRIM(CONVERT(varchar(30),@current_execution)) + 'transaction'
rollback transaction
goto DELETE_TRANS
end

commit transaction

set @startdate = @edate
set @edate = dateadd(day, @range, @edate)

if (@edate > @enddate) set @edate = @enddate

END
END
GO

```

Appendix F: Implementation Specific Layer and Source Code

```

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cArrConstraints"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrConstraints.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of
cConstraint objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions
that determine all the
' constraints for a step, all
constraints in a workspace,
' validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrConstraints As
cNodeCollections

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrConstraints."
Public Sub SaveWspConstraints(ByVal
lngWorkspace As Long)
' Calls a procedure to commit all changes
to the constraints
' in the passed in workspace.

    Call
mcarrConstraints.Save(lngWorkspace)

End Sub
Public Property Set ConstraintDB(vdata As
Database)

    Set mcarrConstraints.NodeDB = vdata

End Property
Public Property Get ConstraintDB() As
Database

    Set ConstraintDB =
mcarrConstraints.NodeDB

End Property

Public Sub Modify(cConsToUpdate As
cConstraint)

' Modify the constraint record
Call
mcarrConstraints.Modify(cConsToUpdate)

End Sub

```

```

Public Sub
CreateNewConstraintVersion(ByVal lngStepId
As Long, _
    ByVal strNewVersion As String, _
    ByVal strOldVersion As String, _
    ByVal intStepType As Integer)

' Does all the processing needed to create
new versions of
' all the constraints for a given step
' It inserts new constraint records in the
database with
' the new version numbers on them
' It also updates the version number on all
constraints
' for the step in the array to the new version
passed in
' Since it handles both global and
manager/worker steps,
' it checks for the step_id or global_step_id
fields,
' depending on the type of step

    Dim lngIndex As Long
    Dim cUpdateConstraint As cConstraint

    On Error GoTo
CreateNewConstraintVersionErr
mstrSource = mstrModuleName &
"CreateNewConstraintVersion"

' Update the version/global version on
Constraint with the
' passed in step/global step id
For lngIndex = 0 To mcarrConstraints.Count
- 1
    Set cUpdateConstraint =
mcarrConstraints(lngIndex)
    If intStepType = gintGlobalStep Then
        If cUpdateConstraint.GlobalStepId =
lngStepId And _
            cUpdateConstraint.IndOperation
<> DeleteOp Then
            cUpdateConstraint.GlobalVersionNo
= strNewVersion

            ' Set the operation to indicate an
insert
            cUpdateConstraint.IndOperation =
InsertOp
        End If
    Else
        If cUpdateConstraint.StepId =
lngStepId And _
            cUpdateConstraint.IndOperation
<> DeleteOp Then
            cUpdateConstraint.VersionNo =
strNewVersion

            ' Set the operation to indicate an
insert
            cUpdateConstraint.IndOperation =
InsertOp
        End If
    End If
    Next lngIndex

    Exit Sub
CreateNewConstraintVersionErr:
LogErrors Errors

```

```

gstrSource = mstrModuleName &
"CreateNewConstraintVersion"
On Error GoTo 0
Err.Raise vbObjectError +
errCreateNewConstraintVersionFailed, _
mstrSource, _

LoadResString(errCreateNewConstraintVersionFail
ed)

End Sub
Private Sub Class_Initialize()

    Set mcarrConstraints = New cNodeCollections
    BugMessage "cArrConstraints: Initialize event -
setting Constraint count to 0"

End Sub

Private Sub Class_Terminate()

    Set mcarrConstraints = Nothing
    BugMessage "cArrConstraints: Terminate event
triggered"

End Sub

Public Sub Add(ByVal cConstraintToAdd As
cConstraint)

    Set cConstraintToAdd.NodeDB =
mcarrConstraints.NodeDB

' Retrieve a unique constraint identifier
cConstraintToAdd.ConstraintId =
cConstraintToAdd.NextIdentifier

' Call a procedure to load the constraint record in
the array
Call mcarrConstraints.Add(cConstraintToAdd)

End Sub
Public Sub Delete(ByVal cOldConstraint As
cConstraint)

    Dim lngDeleteElement As Long
    Dim cConsToDelete As cConstraint

    lngDeleteElement =
QueryConstraintIndex(cOldConstraint.ConstraintId)
    Set cConsToDelete =
mcarrConstraints(lngDeleteElement)

    Call
mcarrConstraints.Delete(cConsToDelete.Position)

    Set cConsToDelete = Nothing

End Sub
Private Function
QueryConstraintIndex(lngConstraintId As Long) _
As Long

    Dim lngIndex As Integer

' Find the element in the array to be deleted
For lngIndex = 0 To mcarrConstraints.Count - 1

' Note: The constraint id is not a primary key
field in

```

```

' the database - there can be multiple
records with the
' same constraint_id but for different
versions of a step
' However, since we'll always load the
constraint information
' for the latest version of a step, we'll
have just one
' constraint record with a given
constraint_id
If
mcarrConstraints(IngIndex).ConstraintId =
IngConstraintId Then
    QueryConstraintIndex = IngIndex
    Exit Function
End If

Next IngIndex

' Raise error that Constraint has not been
found
ShowError errConstraintNotFound
On Error GoTo 0
Err.Raise vbObjectError +
errConstraintNotFound, mstrSource, _
LoadResString(errConstraintNotFound)

End Function

Public Function QueryConstraint(ByVal
IngConstraintId As Long) _
As cConstraint

' Returns a cConstraint object with the
property values
' corresponding to the Constraint
Identifier, IngConstraintId

Dim IngQueryElement As Long

IngQueryElement =
QueryConstraintIndex(IngConstraintId)

' Set the return value to the queried
Constraint
Set QueryConstraint =
mcarrConstraints(IngQueryElement)

End Function

Public Sub LoadConstraints(ByVal
IngWorkspaceId As Long, rstStepsInWsp
As Recordset)

' Loads the constraints array with all the
constraints
' for the workspace
Dim recConstraints As Recordset
Dim qyCons As DAO.QueryDef
Dim strSql As String
Dim dtStart As Date

On Error GoTo LoadConstraintsErr
mstrSource = mstrModuleName &
"LoadConstraints"

If rstStepsInWsp.RecordCount = 0 Then
    Exit Sub
End If

' First check if the database object has
been set
If mcarrConstraints.NodeDB Is Nothing
Then
    On Error GoTo 0

```

```

Err.Raise vbObjectError +
errSetDBBeforeLoad, _
mstrSource, _

LoadResString(errSetDBBeforeLoad)
End If

dtStart = Now

' Select based on the global step id since
there might
' be constraints for a global step that run are
executed
' for the workspace
' This method has the advantage that if the
steps are queried right, everything else follows
strSql = "Select a.constraint_id, a.step_id,
a.version_no, " & _
" a.constraint_type, a.global_step_id,
a.global_version_no, " & _
" a.sequence_no, b.workspace_id " & _
" from step_constraints a, att_steps b " & _
_
" where a.global_step_id = b.step_id " & _
_
" and a.global_version_no = b.version_no
" & _
" and a.global_step_id = [g_s_id] " & _
" and a.global_version_no = [g_ver_no] "
& _
" and b.archived_flag = [archived] "

' Find the highest X-component of the
version number
strSql = strSql & " AND ( a.step_id = 0 or (
cint( mid( a.version_no, 1, instr( a.version_no,
" & gstrDQ & gstrVerSeparator & gstrDQ & "
) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS d " & _
" WHERE a.step_id = d.step_id " & _
" and d.archived_flag = [archived] ) "

' Find the highest Y-component of the
version number for the highest X-component
strSql = strSql & " AND cint( mid(
a.version_no, instr( a.version_no, " & gstrDQ
& gstrVerSeparator & gstrDQ & " ) + 1 ) ) = "
& _
" ( select max( cint( mid( version_no,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) + 1 ) ) ) " & _
_
" from att_steps AS y " & _
" Where a.step_id = y.step_id " & _
" AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS c " & _
" WHERE y.step_id = c.step_id " & _
" and c.archived_flag = [archived] ) ) ) "

' Order the constraints by sequence within a
given step
strSql = strSql & " order by a.sequence_no "

Set qyCons =
mcarrConstraints.NodeDB.CreateQueryDef(gst
rEmptyString, strSql)

```

```

qyCons.Parameters("archived").Value = False

rstStepsInWsp.MoveFirst

While Not rstStepsInWsp.EOF

    If Not (rstStepsInWsp!global_flag) Then
        qyCons.Close
        BugMessage "Query constraints Read +
load took: " & CStr(DateDiff("s", dtStart, Now))
        Exit Sub
    End If

    qyCons.Parameters("g_s_id").Value =
rstStepsInWsp!step_id
    qyCons.Parameters("g_ver_no").Value =
rstStepsInWsp!version_no

    Set recConstraints =
qyCons.OpenRecordset(dbOpenSnapshot)

    Call
LoadRecordsetInConstraintArray(recConstraints)
    recConstraints.Close

    rstStepsInWsp.MoveNext
Wend

qyCons.Close
BugMessage "Query constraints Read + load
took: " & CStr(DateDiff("s", dtStart, Now))

Exit Sub

LoadConstraintsErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadConstraints"
On Error GoTo 0
Err.Raise vbObjectError + errLoadDataFailed, _
mstrSource, _
LoadResString(errLoadDataFailed)

End Sub

Public Sub UnloadStepConstraints(ByVal IngStepId
As Long)

' Unloads all the constraints for the workspace
from
' the constraints array

Dim IngIndex As Long

' Find all constraints in the array with a matching
step id
' It is important to step in reverse order through
the array,
' since we delete constraint records!
For IngIndex = mcarrConstraints.Count - 1 To 0
Step -1
    If mcarrConstraints(IngIndex).GlobalStepId =
IngStepId Then

        ' Unload the constraint from the array
        Call mcarrConstraints.Unload(IngIndex)

    End If
Next IngIndex

End Sub

Public Sub UnloadConstraint(cOldConstraint As
cConstraint)
' Unloads the constraint from the constraints array

Dim IngDeleteElement As Long

```

<pre> lngDeleteElement = QueryConstraintIndex(cOldConstraint.ConstraintId) Call mcarrConstraints.Unload(lngDeleteElement) End Sub Private Sub LoadRecordsetInConstraintArray(ByVal recConstraints As Recordset) ' Loads all the constraint records in the passed in ' recordset into the array Dim cNewConstraint As cConstraint On Error GoTo LoadRecordsetInConsArrayErr mstrSource = mstrModuleName & "LoadRecordsetInConstraintArray" If recConstraints.RecordCount = 0 Then Exit Sub End If recConstraints.MoveFirst While Not recConstraints.EOF Set cNewConstraint = New cConstraint ' Initialize Constraint values cNewConstraint.ConstraintId = CLng(ErrorOnNullField(recConstraints, "Constraint_id")) cNewConstraint.StepId = CLng(ErrorOnNullField(recConstraints, "step_id")) cNewConstraint.VersionNo = CStr(ErrorOnNullField(recConstraints, "version_no")) cNewConstraint.GlobalStepId = CLng(ErrorOnNullField(recConstraints, "global_step_id")) cNewConstraint.GlobalVersionNo = CStr(ErrorOnNullField(recConstraints, "global_version_no")) cNewConstraint.SequenceNo = CInt(ErrorOnNullField(recConstraints, "sequence_no")) cNewConstraint.WorkspaceId = CLng(ErrorOnNullField(recConstraints, FLD_ID_WORKSPACE)) cNewConstraint.ConstraintType = CInt(ErrorOnNullField(recConstraints, "constraint_type")) ' Add this record to the array of Constraints mcarrConstraints.Load cNewConstraint Set cNewConstraint = Nothing recConstraints.MoveNext Wend Exit Sub LoadRecordsetInConsArrayErr: LogErrors Errors gstrSource = mstrModuleName & "LoadRecordsetInConstraintArray" On Error GoTo 0 </pre>	<pre> Err.Raise vbObjectError + errLoadRsInArrayFailed, _ mstrSource, _ LoadResString(errLoadRsInArrayFailed) End Sub Public Function ConstraintsForStep(_ ByVal lngStepId As Long, _ ByVal strVersionNo As String, _ Optional ByVal intConstraintType As ConstraintType = 0, _ Optional ByVal blnSort As Boolean = True, _ Optional ByVal blnGlobal As Boolean = False, _ Optional ByVal blnGlobalConstraintsOnly As Boolean = False) - As Variant ' Returns a variant containing an array of cConstraint objects, ' containing all the constraints that have been defined for the ' given step. If the Global flag is set to true, the ' search will be made for all the constraints that have ' a matching global_step_id Dim lngIndex As Long Dim cStepConstraint() As cConstraint Dim lngConstraintCount As Long Dim cTempConstraint As cConstraint On Error GoTo ConstraintsForStepErr mstrSource = mstrModuleName & "ConstraintsForStep" lngConstraintCount = 0 ' Find each element in the constraints array For lngIndex = 0 To mcarrConstraints.Count - 1 ' If a constraint type has been specified then check ' if the constraint type for the record matches the ' passed in type Set cTempConstraint = mcarrConstraints(lngIndex) If Not blnGlobal Then If cTempConstraint.StepId = lngStepId And _ cTempConstraint.VersionNo = strVersionNo And _ cTempConstraint.IndOperation <> DeleteOp And _ (intConstraintType = 0 Or _ cTempConstraint.ConstraintType = intConstraintType) Then ' We have a matching constraint for the given step AddArrayElement cStepConstraint, _ cTempConstraint, lngConstraintCount End If Else If cTempConstraint.GlobalStepId = lngStepId And _ cTempConstraint.GlobalVersionNo = strVersionNo And _ </pre>	<pre> cTempConstraint.IndOperation <> DeleteOp Then If blnGlobalConstraintsOnly = False Or _ (blnGlobalConstraintsOnly And _ cTempConstraint.StepId = 0 And _ cTempConstraint.VersionNo = gstrMinVersion) Then ' We have a matching constraint for the global step AddArrayElement cStepConstraint, _ cTempConstraint, lngConstraintCount End If End If End If Next lngIndex ' Set the return value of the function to the array of ' constraints that has been built above If lngConstraintCount = 0 Then ConstraintsForStep = Empty Else ConstraintsForStep = cStepConstraint() End If ' Sort the constraints If blnSort Then Call QuickSort(ConstraintsForStep) End If Exit Function ConstraintsForStepErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errConstraintsForStepFailed, _ mstrSource, _ LoadResString(errConstraintsForStepFailed) End Function Private Sub AddArrayElement(ByRef arrNodes() As cConstraint, _ ByVal objToAdd As cConstraint, _ ByRef lngCount As Long) ' Adds the passed in object to the array ' Increase the array dimension and add the object to it ReDim Preserve arrNodes(lngCount) Set arrNodes(lngCount) = objToAdd lngCount = lngCount + 1 End Sub Public Function ConstraintsForWsp(_ ByVal lngWorkspaceId As Long, _ Optional ByVal intConstraintType As Integer = 0, _ Optional ByVal blnSort As Boolean = True, _ Optional ByVal blnGlobalConstraintsOnly As Boolean = False) _ As Variant ' Returns a variant containing an array of cConstraint objects, ' containing all the constraints that have been defined for the ' given workspace. Dim lngIndex As Long </pre>
---	---	--

```

Dim cWspConstraint() As cConstraint
Dim lngConstraintCount As Long
Dim cTempConstraint As cConstraint

On Error GoTo ConstraintsForWspErr
mstrSource = mstrModuleName &
"ConstraintsForWsp"

lngConstraintCount = 0

' Find each element in the constraints
array
For lngIndex = 0 To
mcarrConstraints.Count - 1
' If a constraint type has been specified
then check
' if the constraint type for the record
matches the
' passed in type
Set cTempConstraint =
mcarrConstraints(lngIndex)
If cTempConstraint.WorkspaceId =
lngWorkspaceId And _
cTempConstraint.IndOperation <>
DeleteOp And _
(intConstraintType = 0 Or _
cTempConstraint.ConstraintType
= intConstraintType) Then

If blnGlobalConstraintsOnly = False
Or _
(blnGlobalConstraintsOnly And
_
cTempConstraint.StepId = 0
And _
cTempConstraint.VersionNo =
gstrMinVersion) Then

' We have a matching constraint
for the workspace
AddArrayElement
cWspConstraint, _
cTempConstraint,
lngConstraintCount
End If
End If
Next lngIndex

' Set the return value of the function to the
array of
' constraints that has been built above
If lngConstraintCount = 0 Then
ConstraintsForWsp = Empty
Else
ConstraintsForWsp = cWspConstraint()
End If

' Sort the constraints
If blnSort Then
Call QuickSort(ConstraintsForWsp)
End If

Exit Function

ConstraintsForWspErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errConstraintsForWspFailed, _
mstrSource, _

LoadResString(errConstraintsForWspFailed
)

End Function

```

```

Public Function PreConstraintsForStep( _
ByVal lngStepId As Long, _
ByVal strVersionNo As String, _
Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the pre-execution constraints
that have
' been defined for the given step_id and
version

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PreConstraintsForStep =
ConstraintsForStep(lngStepId, _
strVersionNo, gintPreStep, blnSort)

End Function

Public Function PostConstraintsForStep( _
ByVal lngStepId As Long, _
ByVal strVersionNo As String, _
Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Post-execution
constraints that have
' been defined for the given step_id and
version

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PostConstraintsForStep =
ConstraintsForStep(lngStepId, _
strVersionNo, gintPostStep, blnSort)

End Function

Public Function PostConstraintsForWsp( _
ByVal lngWorkspaceId As Long, _
Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Post-execution globals
that have
' been defined for the workspace

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PostConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
gintPostStep, blnSort, True)

End Function

Public Function PreConstraintsForWsp( _
ByVal lngWorkspaceId As Long, _
Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Pre-execution globals that
have
' been defined for the workspace

' Call a function that will return a variant
containing
' all the constraints of the passed in type

```

```

PreConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
gintPreStep, blnSort, True)

End Function

Public Property Get ConstraintCount() As Long

ConstraintCount = mcarrConstraints.Count

End Property

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cArrParameters"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrParameters.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of cParameter
objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions to
determine parameter
' values, validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrParameters As cNodeCollections

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrParameters."

Public Sub InitBuiltInsForRun(lWspId As Long,
lRunId As Long)

Dim cParamRec As cParameter

' Initialize the values of the run_id and output_dir
built-in parameters and save them
' to the database
Set cParamRec = GetParameterValue(lWspId,
PARAM_RUN_ID)
cParamRec.ParameterValue = CStr(lRunId)
Call Modify(cParamRec)

Set cParamRec = GetParameterValue(lWspId,
PARAM_OUTPUT_DIR)
cParamRec.ParameterValue =
GetDefaultDir(lWspId, Me)
cParamRec.ParameterValue =
cParamRec.ParameterValue & gstrFileSeparator &
CStr(lRunId)
Call Modify(cParamRec)

Call SaveParametersInWsp(lWspId)

End Sub

```

```

Public Property Set ParamDatabase(vdata
As Database)

    Set mcarrParameters.NodeDB = vdata

End Property
Public Sub Modify(cModifiedParam As
cParameter)

    ' First check if the parameter record is
    valid
    Call
    CheckDupParamName(cModifiedParam)

    Call
    mcarrParameters.Modify(cModifiedParam)

End Sub
Public Sub Load(ByRef cParamToAdd As
cParameter)

    Call
    mcarrParameters.Load(cParamToAdd)

End Sub
Public Sub Add(ByRef cParamToAdd As
cParameter)

    Set cParamToAdd.NodeDB =
    mcarrParameters.NodeDB

    ' First check if the parameter record is
    valid
    Call Validate(cParamToAdd)

    ' Retrieve a unique parameter identifier
    cParamToAdd.ParameterId =
    cParamToAdd.NextIdentifier

    Call
    mcarrParameters.Add(cParamToAdd)

End Sub

Public Sub Unload(IngParamToDelete As
Long)

    Dim lngDeleteElement As Long

    lngDeleteElement =
    QueryIndex(IngParamToDelete)

    Call
    mcarrParameters.Unload(lngDeleteElement)

End Sub

Public Sub SaveParametersInWsp(ByVal
IngWorkspace As Long)
    ' Calls a procedure to commit all changes
    to the parameters
    ' for the passed in workspace.

    ' Call a procedure to save all parameter
    records for the
    ' workspace
    Call
    mcarrParameters.Save(IngWorkspace)

End Sub
Public Function GetParameterValue(ByVal
IngWorkspace As Long, _
ByVal strParamName As String) As
cParameter

```

```

' Returns the value for the passed in
workspace parameter

Dim cParamRec As cParameter
Dim lngIndex As Long

On Error GoTo GetParameterValueErr

' Find all parameters in the array with a
matching workspace id
For lngIndex = 0 To mcarrParameters.Count
- 1
    Set cParamRec =
    mcarrParameters(lngIndex)
    If cParamRec.WorkspaceId =
    lngWorkspace And _
    cParamRec.ParameterName =
    strParamName Then

        Set GetParameterValue = cParamRec
        Exit For
    End If
Next lngIndex

If lngIndex > mcarrParameters.Count - 1
Then
    ' The parameter has not been defined for
    the workspace
    ' Raise an error
    On Error GoTo 0
    Err.Raise vbObjectError +
    errParamNameInvalid, _
    mstrModuleName &
    "GetParameterValue", _

LoadResString(errParamNameInvalid)
End If

Exit Function

GetParameterValueErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName &
"GetParameterValue"
On Error GoTo 0
Err.Raise vbObjectError +
errGetParamValueFailed, _
gstrSource, _

LoadResString(errGetParamValueFailed)

End Function
Public Sub Delete(IngParamToDelete As
Long)
    ' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement =
    QueryIndex(IngParamToDelete)
    Call
    mcarrParameters.Delete(lngDeleteElement)

End Sub
Private Function QueryIndex(lngParameterId
As Long) As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in the
    array
    For lngIndex = 0 To mcarrParameters.Count
- 1

```

```

    If mcarrParameters(lngIndex).ParameterId =
    lngParameterId And _
    mcarrParameters(lngIndex).IndOperation
    <> DeleteOp Then
        QueryIndex = lngIndex
        Exit Function
    End If
Next lngIndex

' Raise error that parameter has not been found
On Error GoTo 0
Err.Raise vbObjectError + errParamNotFound,
"cArrParameters.QueryIndex", _
LoadResString(errParamNotFound)

End Function

Public Function QueryParameter(lngParameterId
As Long) _
As cParameter

    Dim lngQueryElement As Long

    lngQueryElement = QueryIndex(lngParameterId)

    ' Return the queried parameter object
    Set QueryParameter =
    mcarrParameters(lngQueryElement)

End Function
Public Property Get ParameterCount() As Long

    ParameterCount = mcarrParameters.Count

End Property
Public Property Get Item(lngIndex As Long) As
cParameter
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrParameters(lngIndex)

End Property

Public Sub Validate(ByVal cParamToValidate As
cParameter)
    ' This procedure is necessary since the class
    cannot validate
    ' all the parameter properties on it's own. This is
    ' coz we
    ' might have created new parameters in the
    workspace, but not
    ' saved them to the database yet - hence the
    duplicate check
    ' has to be repeated in the array

    Dim lngIndex As Long
    Dim cTempParam As cParameter

    On Error GoTo ValidateErr

    ' Check if the parameter name already exists in
    the workspace
    For lngIndex = 0 To mcarrParameters.Count - 1
        Set cTempParam = mcarrParameters(lngIndex)
        If cTempParam.WorkspaceId =
        cParamToValidate.WorkspaceId And _
        cTempParam.ParameterName =
        cParamToValidate.ParameterName And _
        cTempParam.IndOperation <> DeleteOp
    Then
        On Error GoTo 0
        Err.Raise vbObjectError +
        errDuplicateParameterName, _
        mstrSource,
        LoadResString(errDuplicateParameterName)

```

<pre> End If Next lngIndex Exit Sub ValidateErr: LogErrors Errors mstrSource = mstrModuleName & "Validate" On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ mstrSource, LoadResString(errValidateFailed) End Sub Public Sub CheckDupParamName(ByVal cParamToValidate As cParameter) Dim lngIndex As Long Dim cTempParam As cParameter ' Check if the parameter name already exists in the workspace For lngIndex = 0 To mcarrParameters.Count - 1 Set cTempParam = mcarrParameters(lngIndex) If cTempParam.WorkspaceId = cParamToValidate.WorkspaceId And _ cTempParam.ParameterName = cParamToValidate.ParameterName And _ cTempParam.ParameterId <> cParamToValidate.ParameterId And _ cTempParam.IndOperation <> DeleteOp Then ShowError errDuplicateParameterName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateParameterName, _ mstrSource, LoadResString(errDuplicateParameterName) End If Next lngIndex End Sub Private Sub Class_Initialize() 'bugmessage "cArrParameters: Initialize event - setting parameter count to 0" Set mcarrParameters = New cNodeCollections End Sub Private Sub Class_Terminate() Set mcarrParameters = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cArrSteps" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cArrSteps.cls Microsoft TPC-H Kit Ver. 1.00 </pre>	<pre> ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: Implements an array of cStep objects. ' Type-safe wrapper around cNodeCollections. ' Also contains additional functions to update parent version ' on substeps, validation functions, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcarrSteps As cNodeCollections ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cArrSteps." Public Sub Unload(lngStepToDelete As Long) Dim lngDeleteElement As Long Dim cUnloadStep As cStep lngDeleteElement = QueryStepIndex(lngStepToDelete) Set cUnloadStep = QueryStep(lngStepToDelete) ' First unload all iterators for the step Call cUnloadStep.UnloadIterators ' Unload the step from the collection Call mcarrSteps.Unload(lngDeleteElement) End Sub Public Sub Modify(cModifiedStep As cStep) Dim iAppend As Integer Dim sLabel As String On Error GoTo ModifyErr iAppend = 0 sLabel = cModifiedStep.StepLabel Validate cModifiedStep Call mcarrSteps.Modify(cModifiedStep) Exit Sub ModifyErr: ' If the error raised by the add function is due to a duplication ' of the step label, then try to generate a unique label If Err.Number - vbObjectError = errStepLabelUnique Then iAppend = iAppend + 1 cModifiedStep.StepLabel = sLabel & CStr(iAppend) ' Try to insert the step record again Resume End If ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 </pre>	<pre> Err.Raise vbObjectError + errModifyStepFailed, - gstrSource, _ LoadResString(errModifyStepFailed) End Sub Public Sub UpdateParentVersion(ByVal lngStepId As Long, _ ByVal strNewVersion As String, _ ByVal strOldVersion As String, _ ByVal intStepType As Integer) ' Does all the processing needed to update the parent version ' number on all the sub-steps for a given step ' It updates the parent version no in the database for all ' sub-steps of the passed in step id ' It also updates the parent version number on all sub-steps ' in the array to the new version passed in Dim lngIndex As Long Dim cUpdateStep As cStep On Error GoTo UpdateParentVersionErr If intStepType <> gintManagerStep Then ' Only a manager can have sub-steps - if the passed ' in step is not a manager, exit Exit Sub End If ' For all steps in the array For lngIndex = 0 To mcarrSteps.Count - 1 Set cUpdateStep = mcarrSteps(lngIndex) ' If the current step is a sub-step of the passed in step If cUpdateStep.ParentStepId = lngStepId And - cUpdateStep.ParentVersionNo = strOldVersion And _ Not cUpdateStep.ArchivedFlag Then ' Update the parent version number for the sub-step ' in the array cUpdateStep.ParentVersionNo = strNewVersion ' Update the parent version number for the sub-step ' in the array Call Modify(cUpdateStep) End If Next lngIndex Exit Sub UpdateParentVersionErr: LogErrors Errors mstrSource = mstrModuleName & "UpdateParentVersion" On Error GoTo 0 Err.Raise vbObjectError + errUpdateParentVersionFailed, _ mstrSource, _ LoadResString(errUpdateParentVersionFailed) End Sub </pre>
--	--	---


```

Private Sub Validate(cCheckStep As cStep)

    ' Step validations that depend on other
    steps in the collection

    Dim lngIndex As Long

    ' Ensure that the step label is unique in the
    workspace
    For lngIndex = 0 To mcarrSteps.Count - 1

        ' If the current step is a sub-step of the
        passed in step
        If mcarrSteps(lngIndex).WorkspaceId
        = cCheckStep.WorkspaceId And _
            mcarrSteps(lngIndex).StepLabel =
            cCheckStep.StepLabel And _
            mcarrSteps(lngIndex).StepId <>
            cCheckStep.StepId And _

mcarrSteps(lngIndex).IndOperation <>
DeleteOp Then
            On Error GoTo 0
            Err.Raise vbObjectError +
            errStepLabelUnique, _
            mstrModuleName &
            "Validate", _

LoadResString(errStepLabelUnique)
        End If
        Next lngIndex

    End Sub

    Public Sub ValidateStep(cCheckStep As
    cStep)

        On Error GoTo ValidateStepErr

        'Public wrapper for Validate function (2
        many Validates)
        Call Validate(cCheckStep)

        Exit Sub

    ValidateStepErr:
        ShowError errStepLabelUnique
        On Error GoTo 0
        Err.Raise vbObjectError +
        errValidateFailed, _
        gstrSource, _
        LoadResString(errValidateFailed)
    End Sub

    Private Sub Class_Initialize()

        BugMessage "cArrSteps: Initialize event -
        setting step count to 0"
        Set mcarrSteps = New cNodeCollections

    End Sub

    Private Sub Class_Terminate()

        BugMessage "cArrSteps: Terminate event
        triggered"
        Set mcarrSteps = Nothing

    End Sub

    Public Sub Add(ByVal cStepToAdd As
    cStep)

        Dim iAppend As Integer
        Dim sLabel As String

```

```

        On Error GoTo AddErr

        iAppend = 0
        sLabel = cStepToAdd.StepLabel

        Set cStepToAdd.NodeDB =
        mcarrSteps.NodeDB

        ' Retrieve a unique step identifier
        cStepToAdd.StepId =
        cStepToAdd.NextStepId

        Validate cStepToAdd

        ' Call a procedure to add the step record
        Call mcarrSteps.Add(cStepToAdd)

        ' Call a procedure to add all iterators for the
        step
        cStepToAdd.AddAllIterators

        Exit Sub

    AddErr:
        ' If the error raised by the add function is due
        to a duplication
        ' of the step label, then try to generate a
        unique label
        If Err.Number - vbObjectError =
        errStepLabelUnique Then
            iAppend = iAppend + 1
            cStepToAdd.StepLabel = sLabel &
            CStr(iAppend)
            ' Try to insert the step record again
            Resume
        End If

        ' Log the error code raised by Visual Basic
        Call LogErrors(Errors)
        On Error GoTo 0
        Err.Raise vbObjectError +
        errInsertStepFailed, _
        gstrSource, _
        LoadResString(errInsertStepFailed)

    End Sub

    Public Sub Load(cStepToLoad As cStep)

        Call mcarrSteps.Load(cStepToLoad)

    End Sub

    Public Sub SaveStepsInWsp(ByVal
    lngWorkspace As Long)
        ' Calls a procedure to commit all changes to
        the steps
        ' in the passed in workspace.

        Dim lngIndex As Integer

        ' Find all steps in the array with a matching
        workspace id
        ' It is important to step in reverse order
        through the array,
        ' since we delete step records sometimes!
        For lngIndex = mcarrSteps.Count - 1 To 0
        Step -1
            If mcarrSteps(lngIndex).WorkspaceId =
            lngWorkspace Then

                ' Call a procedure to commit all
                changes to the
                ' Step record, if any
                Call
                CommitStep(mcarrSteps(lngIndex), lngIndex)

```

```

        End If
        Next lngIndex

    End Sub

    Private Sub CommitStep(ByVal cCommitStep As
    cStep, _
        ByVal intIndex As Integer)
        ' This procedure checks if any changes have been
        made to the
        ' passed in Step. If so, it calls the step methods to
        commit
        ' the changes.

        ' First commit all changes to the iterator records
        for
        ' the step
        cCommitStep.SaveIterators

        Call mcarrSteps.Commit(cCommitStep, intIndex)

    End Sub

    Public Sub Delete(lngStepToDelete As Long)

        Dim lngDeleteElement As Long

        lngDeleteElement =
        QueryStepIndex(lngStepToDelete)
        Call mcarrSteps.Delete(lngDeleteElement)

    End Sub

    Public Function QueryStepIndex(lngStepId As
    Long) As Long

        Dim lngIndex As Long

        ' Find the element in the array that corresponds to
        the
        ' passed in step id - note that while there will be
        multiple
        ' versions of a step in the database, only one
        version will
        ' be currently loaded in the array - meaning that
        the stepid
        ' is enough to uniquely identify a step
        For lngIndex = 0 To mcarrSteps.Count - 1
            If mcarrSteps(lngIndex).StepId = lngStepId
        Then
            QueryStepIndex = lngIndex
            Exit Function
        End If
        Next lngIndex

        ' Raise error that step has not been found
        On Error GoTo 0
        Err.Raise vbObjectError + errStepNotFound,
        mstrSource, _
        LoadResString(errStepNotFound)

    End Function

    Public Function QueryStep(ByVal lngStepId As
    Long) As cStep

        ' Populates the passed in cStep object with the
        property
        ' values corresponding to the Step Identifier,
        lngStepId

        Dim lngQueryElement As Integer

        lngQueryElement = QueryStepIndex(lngStepId)

        ' Initialize the passed in step object to the queried
        step

```

```

Set QueryStep =
mcarrSteps(IngQueryElement)

End Function
Public Property Get Item(ByVal Position As
Long) As cStep
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in
position in the array
If Position >= 0 And Position <
mcarrSteps.Count Then
Set Item = mcarrSteps(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _

LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Set Item(ByVal Position As
Long, _
ByVal cStepRec As cStep)

' Returns the element at the passed in
position in the array
If Position >= 0 And Position <
mcarrSteps.Count Then
Set mcarrSteps(Position) = cStepRec
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _

LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Set StepDB(vdata As
Database)

Set mcarrSteps.NodeDB = vdata

End Property
Public Function SubSteps(ByVal lngStepId
As Long, _
ByVal strVersionNo As String) As
Variant

' Returns a variant containing an array of
all the substeps
' for the passed in step

Dim intIndex As Integer
Dim cSubSteps() As cStep
Dim lngStepCount As Long
Dim cQueryStep As cStep

On Error GoTo SubStepsErr

lngStepCount = 0

Set cQueryStep = QueryStep(lngStepId)

' Only a manager can have sub-steps
If cQueryStep.StepType =
gintManagerStep Then

' For each element in the Steps array
For intIndex = 0 To mcarrSteps.Count -
1
' Check if the parent step id and
parent version number

```

```

' match the passed in step
If mcarrSteps(intIndex).ParentStepId =
lngStepId And _

mcarrSteps(intIndex).ParentVersionNo =
strVersionNo And _

mcarrSteps(intIndex).IndOperation <>
DeleteOp Then

' Increase the array dimension and
add the step
' to it
ReDim Preserve
cSubSteps(lngStepCount)
Set cSubSteps(lngStepCount) =
mcarrSteps(intIndex)
lngStepCount = lngStepCount + 1

End If
Next intIndex

End If

' Set the return value of the function to the
array of
' Steps that has been built above
If lngStepCount = 0 Then
SubSteps = Empty
Else
SubSteps = cSubSteps()
End If

Exit Function

SubStepsErr:
LogErrors Errors
mstrSource = mstrModuleName &
"SubSteps"
On Error GoTo 0
Err.Raise vbObjectError +
errSubStepsFailed, _
mstrSource, _
LoadResString(errSubStepsFailed)

End Function

Public Property Get StepCount() As Integer

StepCount = mcarrSteps.Count

End Property

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cAsyncShell"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
'-----
' Copyright © 1997 Microsoft Corporation. All
rights reserved.
'
' You have a royalty-free right to use, modify,
reproduce and distribute the
' Sample Application Files (and/or any
modified version) in any way you find
' useful, provided that you agree that Microsoft
has no warranty, obligations or
' liability for any Sample Application Files.

```

```

'-----
'-----
Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cAsyncShell."

Public Event Terminated()

Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Private proc As PROCESS_INFORMATION
Private mfShelling As Boolean

'-----
'-----
'Initialization and cleanup:

Private Sub Class_Initialize()
Set moTimer = New cTimerSM
End Sub

Private Sub Class_Terminate()
If mfShelling Then CloseHandle proc.hProcess
End Sub

'-----
'-----
'Shelling:

Public Sub Shell(CommandLine As String,
Optional PollingInterval As Long = 1000)
Dim Start As STARTUPINFO

If mfShelling Then
On Error GoTo 0
Err.Raise vbObjectError + errInstanceInUse, _
mstrSource, _
LoadResString(errInstanceInUse)
End If
mfShelling = True

' Initialize the STARTUPINFO structure:
Start.cb = Len(Start)
Start.dwFlags =
STARTF_USESHOWWINDOW
Start.wShowWindow =
SW_SHOWMINNOACTIVE

' Start the shelled application:
CreateProcessA 0&, CommandLine, 0&, 0&,
1&, _
NORMAL_PRIORITY_CLASS, 0&, 0&,
Start, proc

With moTimer
If PollingInterval > 0 Then
.Interval = PollingInterval
Else
.Interval = 1000
End If
.Enabled = True
End With
End Sub

'-----
'-----
'Aborting:
Public Sub Abort()
Dim nCode As Long

```

```

' Dim X As Integer
' Dim ReturnVal As Integer

On Error GoTo AbortErr

If Not mfShelling Then
    Call WriteError(errProgramError,
mstrSource)
Else
' If IsWindow(proc.hProcess) = False
Then Exit Sub
'
' If (GetWindowLong(proc.hProcess,
GWL_STYLE) And WS_DISABLED)
Then Exit Sub
'
' If IsWindow(proc.hProcess) Then
' If Not
(GetWindowLong(proc.hProcess,
GWL_STYLE) And WS_DISABLED)
Then
' X = PostMessage(proc.hProcess,
WM_CANCELMODE, 0, 0&)
' X = PostMessage(proc.hProcess,
WM_CLOSE, 0, 0&)
' End If
' End If

If TerminateProcess(proc.hProcess,
0&) = 0 Then
    Debug.Print "Unable to terminate
process: " & proc.hProcess
    Call
WriteError(errTerminateProcessFailed,
mstrSource, _
    ApiError(GetLastError()))
Else
' Should always come here!
GetExitCodeProcess proc.hProcess,
nCode
If nCode = STILL_ACTIVE Then
' Write an error and close the
handles to the
' process anyway
Call
WriteError(errTerminateProcessFailed,
mstrSource)
End If
End If

' Close all open handles to the shelled
process, even
' if any of the above calls error out
CloseHandle proc.hProcess
moTimer.Enabled = False
mfShelling = False
RaiseEvent Terminated

End If

Exit Sub

AbortErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"Abort"
On Error GoTo 0
Err.Raise vbObjectError +
errProgramError, _
mstrSource, _
LoadResString(errProgramError)

End Sub
Private Sub moTimer_Timer()
Dim nCode As Long

```

```

GetExitCodeProcess proc.hProcess, nCode
If nCode <> STILL_ACTIVE Then
    CloseHandle proc.hProcess
    moTimer.Enabled = False
    mfShelling = False
    RaiseEvent Terminated
End If
End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnDtl"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cConnDtl.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Encapsulates the properties
and methods of a connection.
' Contains functions to insert, update
and delete
' connection_dtls records from the
database.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnNameId As Long
Public ConnName As String
Public ConnectionString As String
Public ConnType As ConnectionType
Public Position As Long
Public NodeDB As Database

Private mintOperation As Operation

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnDtl."

' The cSequence class is used to generate
unique Connection identifiers
Private mConnectionSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Private Sub AssignParameters(qyExec As
DAO.QueryDef)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to
differentiate them from the field names.
' When the parameter names are the same as
the field names, parameters in the where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr

```

```

For Each prmParam In qyExec.Parameters
Select Case prmParam.Name
Case "[w_id]"
    prmParam.Value = WorkspaceId

Case "[c_id]"
    prmParam.Value = ConnNameId

Case "[c_name]"
    prmParam.Value = ConnName

Case "[c_str]"
    prmParam.Value = ConnectionString

Case "[c_type]"
    prmParam.Value = ConnType

Case Else
' Write the parameter name that is faulty
WriteError errInvalidParameter,
mstrSource, prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrModuleName & "AssignParameters", _
LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:

Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrModuleName & "AssignParameters",
LoadResString(errAssignParametersFailed)

End Sub

Public Function Clone() As cConnDtl

' Creates a copy of a given Connection

Dim cCloneConn As cConnDtl

On Error GoTo CloneErr

Set cCloneConn = New cConnDtl

' Copy all the Connection properties to the newly
created Connection
cCloneConn.WorkspaceId = WorkspaceId
cCloneConn.ConnNameId = ConnNameId
cCloneConn.ConnName = ConnName
cCloneConn.ConnectionString =
ConnectionString
cCloneConn.ConnType = ConnType
cCloneConn.IndOperation = mintOperation
cCloneConn.Position = Position

' And set the return value to the newly created
Connection
Set Clone = cCloneConn
Set cCloneConn = Nothing

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName & "Clone"
On Error GoTo 0

```

```

Err.Raise vbObjectError +
errCloneFailed, mstrSource,
LoadResString(errCloneFailed)

End Function
Private Sub CheckDupConnectionName()
' Check if the Connection name already
exists in the workspace

Dim rstConnection As Recordset
Dim strSql As String
Dim qy As DAO.QueryDef

On Error GoTo
CheckDupConnectionNameErr
mstrSource = mstrModuleName &
"CheckDupConnectionName"

' Create a recordset object to retrieve the
count of all Connections
' for the workspace with the same name
strSql = "Select count(*) as
Connection_count " & _
" from " &
TBL_CONNECTION_DTLS & _
" where " & FLD_ID_WORKSPACE
& " = [w_id]" & _
" and " &
FLD_CONN_DTL_CONNECTION_NAME
& " = [c_name]" & _
" and " & FLD_ID_CONN_NAME & "
<> [c_id]"

Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyStrin
g, strSql)
Call AssignParameters(qy)

Set rstConnection =
qy.OpenRecordset(dbOpenForwardOnly)

If rstConnection![Connection_count] > 0
Then
rstConnection.Close
qy.Close
ShowError errDupConnDtlName
On Error GoTo 0
Err.Raise vbObjectError +
errDupConnDtlName, _
mstrSource,
LoadResString(errDupConnDtlName)
End If

rstConnection.Close
qy.Close

Exit Sub

CheckDupConnectionNameErr:
LogErrors Errors
mstrSource = mstrModuleName &
"CheckDupConnectionName"
On Error GoTo 0
Err.Raise vbObjectError +
errProgramError, _
mstrSource,
LoadResString(errProgramError)

End Sub
Public Property Let IndOperation(ByVal
vdata As Operation)

' The valid operations are define in the
cOperations
' class. Check if the operation is valid

```

```

Select Case vdata
Case QueryOp, InsertOp, UpdateOp,
DeleteOp
mintOperation = vdata

Case Else
BugAssert True
End Select

End Property
Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are valid.
This method
' will be used to check interdependant
properties that
' cannot be validated by the let procedures.
' It should be called by the add and modify
methods of the class

If ConnName = gstrEmptyString Then

ShowError
errConnectionNameMandatory
On Error GoTo 0
' Propagate this error back to the caller
Err.Raise vbObjectError +
errConnectionNameMandatory, _
mstrSource,
LoadResString(errConnectionNameMandatory
)
End If

' Raise an error if the Connection name
already exists in the workspace
Call CheckDupConnectionName

End Sub
Public Sub Add()

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' Validate the record before trying to insert
the record
Call Validate

' Create a temporary querydef object
strInsert = "insert into " &
TBL_CONNECTION_DTLS & _
"(" & FLD_ID_WORKSPACE & _
", " & FLD_ID_CONN_NAME & _
", " &
FLD_CONN_DTL_CONNECTION_NAME
& _
", " &
FLD_CONN_DTL_CONNECTION_STRING
& _
", " &
FLD_CONN_DTL_CONNECTION_TYPE &
") " & _
" values ( [w_id], [c_id], " & _
" [c_name], [c_str], [c_type] ) "

Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to assign the Connection
values
Call AssignParameters(qy)

```

```

qy.Execute dbFailOnError
qy.Close

Exit Sub

AddErr:

Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInsertFailed, _
mstrModuleName & "Add",
LoadResString(errInsertFailed)

End Sub
Public Sub Delete()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr

strDelete = "delete from " &
TBL_CONNECTION_DTLS & _
" where " & FLD_ID_CONN_NAME & " =
[c_id]"
Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString,
strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errDeleteFailed, _
mstrModuleName & "Delete",
LoadResString(errDeleteFailed)

End Sub

Public Sub Modify()

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo ModifyErr

' Validate the updated values before trying to
modify the db
Call Validate

' Create a temporary querydef object with the
modify string
strUpdate = "update " &
TBL_CONNECTION_DTLS & _
" set " & FLD_ID_WORKSPACE & " =
[w_id], " & _
FLD_CONN_DTL_CONNECTION_NAME & " =
[c_name], " & _
FLD_CONN_DTL_CONNECTION_STRING & "
= [c_str], " & _
FLD_CONN_DTL_CONNECTION_TYPE
& " = [c_type] " & _
" where " & FLD_ID_CONN_NAME & " =
[c_id]"
Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString,
strUpdate)

```

```

' Call a procedure to assign the
Connection values to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

ModifyErr:

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errModifyFailed, _
        mstrModuleName & "Modify",
LoadResString(errModifyFailed)

End Sub
Public Property Get NextIdentifier() As
Long

    Dim lngNextId As Long

    On Error GoTo NextIdentifierErr

    ' Retrieve the next identifier using the
sequence class
    Set mConnectionSeq = New cSequence
    Set mConnectionSeq.IdDatabase =
dbsAttTool
    mConnectionSeq.IdentifierColumn =
FLD_ID_CONN_NAME
    lngNextId = mConnectionSeq.Identifier
    Set mConnectionSeq = Nothing

    NextIdentifier = lngNextId
    Exit Property

NextIdentifierErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errIdGetFailed,
_
        mstrModuleName & "NextIdentifier",
LoadResString(errIdGetFailed)

End Property
Public Property Get IndOperation() As
Operation

    IndOperation = mintOperation

End Property

Private Sub Class_Initialize()

    Set mFieldValue = New cStringSM

    ' Initialize the operation indicator variable
to Query
    ' It will be modified later by the collection
class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp

    ConnType = giDefaultConnType

End Sub

Private Sub Class_Terminate()

    Set mFieldValue = Nothing

```

```

End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnDtls"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConnDtls.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
'
' PURPOSE:   Implements an array of
cConnDtl objects.
'            Type-safe wrapper around
cNodeCollections.
'            Also contains additional functions to
determine the connection
'            string value, validation functions, etc.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrConnDtls As cNodeCollections

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnDtls."

Public Property Set ConnDb(vdata As
Database)

    Set mcarrConnDtls.NodeDB = vdata

End Property
Public Sub Modify(cModifiedConn As
cConnDtl)

    ' First check if the parameter record is valid
    Call CheckDupConnName(cModifiedConn)

    Call
mcarrConnDtls.Modify(cModifiedConn)

End Sub
Public Sub Load(ByRef cConnToAdd As
cConnDtl)

    Call mcarrConnDtls.Load(cConnToAdd)

End Sub
Public Sub Add(ByRef cConnToAdd As
cConnDtl)

    ' First check if the record is valid
    Call Validate(cConnToAdd)

    ' Retrieve a unique identifier
    cConnToAdd.ConnNameId =
cConnToAdd.NextIdentifier

    Call mcarrConnDtls.Add(cConnToAdd)

End Sub

Public Sub Unload(lConnNameId As Long)

```

```

Dim lngDeleteElement As Long

lngDeleteElement = QueryIndex(lConnNameId)

Call mcarrConnDtls.Unload(lngDeleteElement)

End Sub

Public Sub SaveConnDtlsInWsp(ByVal
lngWorkspace As Long)
    ' Call a procedure to save all connection details
records for the workspace
    Call mcarrConnDtls.Save(lngWorkspace)

End Sub
Public Function GetConnectionDtl(ByVal
lngWorkspace As Long, _
    ByVal strConnectionName As String) As
cConnDtl
    ' Returns the connection dtl for the passed in
connection name

    Dim lngIndex As Long

    ' Find all parameters in the array with a matching
workspace id
    For lngIndex = 0 To mcarrConnDtls.Count - 1
        If mcarrConnDtls(lngIndex).WorkspaceId =
lngWorkspace And _
            mcarrConnDtls(lngIndex).ConnName =
strConnectionName Then

            Set GetConnectionDtl =
mcarrConnDtls(lngIndex)
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcarrConnDtls.Count - 1 Then
        ' The parameter has not been defined for the
workspace
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError +
errConnNameInvalid, mstrModuleName &
"GetConnection", _
            LoadResString(errConnNameInvalid)
    End If

End Function
Public Sub Delete(lConnNameId As Long)
    ' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lConnNameId)
    Call mcarrConnDtls.Delete(lngDeleteElement)

End Sub
Private Function QueryIndex(lConnNameId As
Long) As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in the array
    For lngIndex = 0 To mcarrConnDtls.Count - 1
        If mcarrConnDtls(lngIndex).ConnNameId =
lConnNameId And _
            mcarrConnDtls(lngIndex).IndOperation
<> DeleteOp Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

```

```
' Raise error that parameter has not been
found
On Error GoTo 0
Err.Raise vbObjectError +
errQueryIndexFailed,
"cArrParameters.QueryIndex", _
LoadResString(errQueryIndexFailed)

End Function
```

```
Public Function
QueryConnDtl(lConnNameId As Long) As
cConnDtl
```

```
Dim lngQueryElement As Long

lngQueryElement =
QueryIndex(lConnNameId)
```

```
' Return the queried connection object
Set QueryConnDtl =
mcarrConnDtls(lngQueryElement)
```

```
End Function
Public Property Get Count() As Long
```

```
Count = mcarrConnDtls.Count
```

```
End Property
Public Property Get Item(lngIndex As Long)
As cConnDtl
Attribute Item.VB_UserMemId = 0
```

```
Set Item = mcarrConnDtls(lngIndex)
```

```
End Property
```

```
Private Sub Validate(ByVal
cConnToValidate As cConnDtl)
' This procedure is necessary since the
class cannot validate
' all the connection_dtl properties on it's
own. This is 'coz we
' might have created new connections in
the workspace, but not
' saved them to the database yet - hence
the duplicate check
' has to be repeated in the array
```

```
Dim lngIndex As Long
Dim cTempParam As cConnDtl
```

```
' Check if the parameter name already
exists in the workspace
For lngIndex = 0 To
mcarrConnDtls.Count - 1
```

```
Set cTempParam =
mcarrConnDtls(lngIndex)
If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
cTempParam.ConnName =
cConnToValidate.ConnName And _
cTempParam.IndOperation <>
```

```
DeleteOp Then
On Error GoTo 0
Err.Raise vbObjectError +
errDupConnDtlName, _
mstrSource,
LoadResString(errDupConnDtlName)
End If
Next lngIndex
```

```
End Sub
```

```
Private Sub CheckDupConnName(ByVal
cConnToValidate As cConnDtl)
```

```
Dim lngIndex As Long
Dim cTempParam As cConnDtl
```

```
' Check if the parameter name already exists
in the workspace
For lngIndex = 0 To mcarrConnDtls.Count -
1
```

```
Set cTempParam =
mcarrConnDtls(lngIndex)
If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
cTempParam.ConnName =
cConnToValidate.ConnName And _
cTempParam.ConnNameId <>
cConnToValidate.ConnNameId And _
cTempParam.IndOperation <>
```

```
DeleteOp Then
ShowError errDupConnDtlName
On Error GoTo 0
Err.Raise vbObjectError +
errDupConnDtlName, _
mstrSource,
LoadResString(errDupConnDtlName)
End If
Next lngIndex
```

```
End Sub
```

```
Private Sub Class_Initialize()
```

```
Set mcarrConnDtls = New cNodeCollections
```

```
End Sub
```

```
Private Sub Class_Terminate()
```

```
Set mcarrConnDtls = Nothing
```

```
End Sub
VERSION 1.0 CLASS
BEGIN
```

```
MultiUse = -1 'True
END
Attribute VB_Name = "cConnection"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cConnection.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
```

```
' PURPOSE: Encapsulates the properties
and methods of a connection string.
' Contains functions to insert, update
and delete
' workspace_connections records from
the database.
```

```
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
```

```
Option Explicit
Option Base 0
```

```
' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnectionId As Long
Public ConnectionValue As String
Public Description As String
Public NodeDB As Database
```

```
Public Position As Long
Public NoCountDisplay As Boolean
Public NoExecute As Boolean
Public ParseQueryOnly As Boolean
Public QuotedIdentifiers As Boolean
Public AnsiNulls As Boolean
Public ShowQueryPlan As Boolean
Public ShowStatsTime As Boolean
Public ShowStatsIO As Boolean
Public ParseOdbcMsg As Boolean
Public RowCount As Long
Public TsqlBatchSeparator As String
Public QueryTimeout As Long
Public ServerLanguage As String
Public CharacterTranslation As Boolean
Public RegionalSettings As Boolean
```

```
Private mstrConnectionName As String
Private mintOperation As Operation
```

```
' Used to indicate the source module name when
errors
```

```
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnection."
```

```
' The cSequence class is used to generate unique
Connection identifiers
Private mConnectionSeq As cSequence
```

```
' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM
```

```
Private Sub AssignParameters(qyExec As
DAO.QueryDef)
' Assigns values to the parameters in the querydef
object
' The parameter names are cryptic to differentiate
them from the field names.
' When the parameter names are the same as the
field names, parameters in the where
' clause do not get created.
```

```
Dim prmParam As DAO.Parameter
```

```
On Error GoTo AssignParametersErr
```

```
For Each prmParam In qyExec.Parameters
Select Case prmParam.Name
Case "[w_id]"
prmParam.Value = WorkspaceId
```

```
Case "[c_id]"
prmParam.Value = ConnectionId
```

```
Case "[c_name]"
prmParam.Value = mstrConnectionName
```

```
Case "[c_value]"
prmParam.Value = ConnectionValue
```

```
Case "[desc]"
prmParam.Value = Description
```

```
Case "[no_count]"
prmParam.Value = NoCountDisplay
```

```
Case "[no_exec]"
prmParam.Value = NoExecute
```

```
Case "[parse_only]"
prmParam.Value = ParseQueryOnly
```

<pre> Case "[quoted_id]" prmParam.Value = QuotedIdentifiers Case "[a_nulls]" prmParam.Value = AnsiNulls Case "[show_qp]" prmParam.Value = ShowQueryPlan Case "[stats_tm]" prmParam.Value = ShowStatsTime Case "[stats_io]" prmParam.Value = ShowStatsIO Case "[parse_odbc]" prmParam.Value = ParseOdbcMsg Case "[row_cnt]" prmParam.Value = RowCount Case "[batch_sep]" prmParam.Value = TsqlBatchSeparator Case "[qry_tmout]" prmParam.Value = QueryTimeOut Case "[lang]" prmParam.Value = ServerLanguage Case "[char_trans]" prmParam.Value = CharacterTranslation Case "[reg_settings]" prmParam.Value = RegionalSettings Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrModuleName & "AssignParameters", _ LoadResString(errInvalidParameter) End Select Next prmParam Exit Sub AssignParametersErr: Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrModuleName & "AssignParameters", LoadResString(errAssignParametersFailed) End Sub Public Function Clone() As cConnection ' Creates a copy of a given Connection Dim cCloneConn As cConnection </pre>	<pre> On Error GoTo CloneErr Set cCloneConn = New cConnection ' Copy all the Connection properties to the newly created Connection Set cCloneConn.NodeDB = NodeDB cCloneConn.WorkspaceId = WorkspaceId cCloneConn.ConnectionId = ConnectionId cCloneConn.ConnectionName = mstrConnectionName cCloneConn.ConnectionValue = ConnectionValue cCloneConn.Description = Description cCloneConn.IndOperation = mintOperation cCloneConn.Position = Position cCloneConn.NoCountDisplay = NoCountDisplay cCloneConn.NoExecute = NoExecute cCloneConn.ParseQueryOnly = ParseQueryOnly cCloneConn.QuotedIdentifiers = QuotedIdentifiers cCloneConn.AnsiNulls = AnsiNulls cCloneConn.ShowQueryPlan = ShowQueryPlan cCloneConn.ShowStatsTime = ShowStatsTime cCloneConn.ShowStatsIO = ShowStatsIO cCloneConn.ParseOdbcMsg = ParseOdbcMsg cCloneConn.RowCount = RowCount cCloneConn.TsqlBatchSeparator = TsqlBatchSeparator cCloneConn.QueryTimeOut = QueryTimeOut cCloneConn.ServerLanguage = ServerLanguage cCloneConn.CharacterTranslation = CharacterTranslation cCloneConn.RegionalSettings = RegionalSettings ' And set the return value to the newly created Connection Set Clone = cCloneConn Set cCloneConn = Nothing Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, mstrSource, LoadResString(errCloneFailed) End Function Private Sub CheckDupConnectionName() ' Check if the Connection name already exists in the workspace Dim rstConnection As Recordset Dim strSql As String Dim qy As DAO.QueryDef On Error GoTo CheckDupConnectionNameErr mstrSource = mstrModuleName & "CheckDupConnectionName" ' Create a recordset object to retrieve the count of all Connections </pre>	<pre> ' for the workspace with the same name strSql = "Select count(*) as Connection_count " & _ " from workspace_connections " & _ " where workspace_id = [w_id]" & _ " and connection_name = [c_name]" & _ " and connection_id <> [c_id]" Set qy = NodeDB.CreateQueryDef(gstrEmptyString, strSql) Call AssignParameters(qy) Set rstConnection = qy.OpenRecordset(dbOpenForwardOnly) If rstConnection![Connection_count] > 0 Then rstConnection.Close qy.Close ShowError errDuplicateConnectionName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateConnectionName, _ mstrSource, LoadResString(errDuplicateConnectionName) End If rstConnection.Close qy.Close Exit Sub CheckDupConnectionNameErr: LogErrors Errors mstrSource = mstrModuleName & "CheckDupConnectionName" On Error GoTo 0 Err.Raise vbObjectError + errProgramError, _ mstrSource, LoadResString(errProgramError) End Sub Private Sub CheckDB() ' Check if the database object has been initialized If NodeDB Is Nothing Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidDB, _ mstrModuleName & "CheckDB", LoadResString(errInvalidDB) End If End Sub Public Property Let ConnectionName(vdata As String) If vdata = gstrEmptyString Then ShowError errConnectionNameMandatory On Error GoTo 0 ' Propagate this error back to the caller Err.Raise vbObjectError + errConnectionNameMandatory, _ mstrSource, LoadResString(errConnectionNameMandatory) Else mstrConnectionName = vdata End If End Property Public Property Let IndOperation(ByVal vdata As Operation) ' The valid operations are define in the cOperations ' class. Check if the operation is valid </pre>
---	---	---

```

Select Case vdata
Case QueryOp, InsertOp, UpdateOp,
DeleteOp
    mintOperation = vdata

Case Else
    BugAssert True
End Select

End Property
Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are
valid. This method
' will be used to check interdependant
properties that
' cannot be validated by the let
procedures.
' It should be called by the add and
modify methods of the class

' Check if the db object is valid
Call CheckDB

' Raise an error if the Connection name
already exists in the workspace
Call CheckDupConnectionName

End Sub
Public Sub Add()

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' Validate the record before trying to
insert the record
Call Validate

' Create a temporary querydef object
strInsert = "insert into
workspace_connections " & _
"(" & workspace_id, connection_id, " &
_
"connection_name,
connection_value, " & _
"description, no_count_display, " &
_
"no_execute, parse_query_only, " &
_
"ANSI_quoted_identifiers,
ANSI_nulls, " & _
"show_query_plan,
show_stats_time, " & _
"show_stats_io,
parse_odbc_msg_prefixes, " & _
"row_count, tsq_batch_separator, "
& _
"query_time_out, server_language, "
& _
"character_translation,
regional_settings ) " & _
" values ( [w_id], [c_id], [c_name],
[c_value], " & _
"[desc], [no_count], [no_exec],
[parse_only], " & _
"[quoted_id], [a_nulls], [show_qp],
[stats_tm], " & _
"[stats_io], [parse_odbc], [row_cnt],
[batch_sep], " & _
"[qry_tmout], [lang], [char_trans],
[reg_settings] ) "

```

```

Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strInsert)

' Call a procedure to assign the Connection
values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

Exit Sub

AddErr:

Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInsertFailed, _
mstrModuleName & "Add",
LoadResString(errInsertFailed)

End Sub
Public Sub Delete()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr

' Check if the db object is valid
Call CheckDB

strDelete = "delete from
workspace_connections " & _
" where connection_id = [c_id]"

Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errDeleteFailed, _
mstrModuleName & "Delete",
LoadResString(errDeleteFailed)

End Sub

Public Sub Modify()

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo ModifyErr

' Validate the updated values before trying to
modify the db
Call Validate

' Create a temporary querydef object with
the modify string
strUpdate = "update workspace_connections
" & _
" set workspace_id = [w_id], " & _
"connection_name = [c_name], " & _
"connection_value = [c_value], " & _
"description = [desc], " & _
"no_count_display = [no_count], " & _

```

```

"no_execute = [no_exec], " & _
"parse_query_only = [parse_only], " & _
"ANSI_quoted_identifiers = [quoted_id], "
& _
"ANSI_nulls = [a_nulls], " & _
"show_query_plan = [show_qp], " & _
"show_stats_time = [stats_tm], " & _
"show_stats_io = [stats_io], " & _
"parse_odbc_msg_prefixes = [parse_odbc],
" & _
"row_count = [row_cnt], " & _
"tsq_batch_separator = [batch_sep], " & _
"query_time_out = [qry_tmout], " & _
"server_language = [lang], " & _
"character_translation = [char_trans], " & _
"regional_settings = [reg_settings] " & _
" where connection_id = [c_id]"

Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strUpdate)

' Call a procedure to assign the Connection values
to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

ModifyErr:

Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errModifyFailed, _
mstrModuleName & "Modify",
LoadResString(errModifyFailed)

End Sub
Public Property Get ConnectionName() As String

ConnectionName = mstrConnectionName

End Property

Public Property Get NextIdentifier() As Long

Dim lngNextId As Long

On Error GoTo NextIdentifierErr

' First check if the database object is valid
Call CheckDB

' Retrieve the next identifier using the sequence
class
Set mConnectionSeq = New cSequence
Set mConnectionSeq.IdDatabase = NodeDB
mConnectionSeq.IdentifierColumn =
"connection_id"
lngNextId = mConnectionSeq.Identifier
Set mConnectionSeq = Nothing

NextIdentifier = lngNextId
Exit Property

NextIdentifierErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errIdGetFailed, _
mstrModuleName & "NextIdentifier",
LoadResString(errIdGetFailed)

End Property

```


<pre> Public Property Get IndOperation() As Operation IndOperation = mintOperation End Property Private Sub Class_Initialize() Set mFieldValue = New cStringSM ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp ' Initialize connection properties to their default values NoCountDisplay = DEF_NO_COUNT_DISPLAY NoExecute = DEF_NO_EXECUTE ParseQueryOnly = DEF_PARSE_QUERY_ONLY QuotedIdentifiers = DEF_ANSI_QUOTED_IDENTIFIERS AnsiNulls = DEF_ANSI_NULLS ShowQueryPlan = DEF_SHOW_QUERY_PLAN ShowStatsTime = DEF_SHOW_STATS_TIME ShowStatsIO = DEF_SHOW_STATS_IO ParseOdbcMsg = DEF_PARSE_ODBC_MSG_PREFIXES RowCount = DEF_ROW_COUNT TsqlBatchSeparator = DEF_TSQL_BATCH_SEPARATOR QueryTimeOut = DEF_QUERY_TIME_OUT ServerLanguage = DEF_SERVER_LANGUAGE CharacterTranslation = DEF_CHARACTER_TRANSLATION RegionalSettings = DEF_REGIONAL_SETTINGS End Sub Private Sub Class_Terminate() Set NodeDB = Nothing Set mFieldValue = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cConnections" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cConnections.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Implements an array of cConnection objects. ' Type-safe wrapper around cNodeCollections. </pre>	<pre> ' Also contains validation functions, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcarrConnections As cNodeCollections ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cConnections." Public Property Set ConnDb(vdata As Database) Set mcarrConnections.NodeDB = vdata End Property Public Sub Modify(cModifiedConn As cConnection) ' First check if the parameter record is valid Call CheckDupConnName(cModifiedConn) Call mcarrConnections.Modify(cModifiedConn) End Sub Public Sub Load(ByRef cConnToAdd As cConnection) Call mcarrConnections.Load(cConnToAdd) End Sub Public Sub Add(ByRef cConnToAdd As cConnection) Set cConnToAdd.NodeDB = mcarrConnections.NodeDB ' First check if the record is valid Call Validate(cConnToAdd) ' Retrieve a unique identifier cConnToAdd.ConnectionId = cConnToAdd.NextIdentifier Call mcarrConnections.Add(cConnToAdd) End Sub Public Sub Unload(IngConnId As Long) Dim lngDeleteElement As Long lngDeleteElement = QueryIndex(IngConnId) Call mcarrConnections.Unload(lngDeleteElement) End Sub Public Sub SaveConnectionsInWsp(ByVal lngWorkspace As Long) ' Call a procedure to save all connection records for the workspace Call mcarrConnections.Save(lngWorkspace) End Sub </pre>	<pre> Public Function GetConnection(ByVal lngWorkspace As Long, _ ByVal strConnectionName As String) As cConnection ' Returns the connection string for the passed in connection name Dim lngIndex As Long ' Find all parameters in the array with a matching workspace id For lngIndex = 0 To mcarrConnections.Count - 1 If mcarrConnections(lngIndex).WorkspaceId = lngWorkspace And _ mcarrConnections(lngIndex).ConnectionName = strConnectionName Then Set GetConnection = mcarrConnections(lngIndex) Exit For End If Next lngIndex If lngIndex > mcarrConnections.Count - 1 Then ' The parameter has not been defined for the workspace ' Raise an error On Error GoTo 0 Err.Raise vbObjectError + errConnNameInvalid, mstrModuleName & "GetConnection", _ LoadResString(errConnNameInvalid) End If End Function Public Sub Delete(IngConnId As Long) ' Delete the passed in parameter Dim lngDeleteElement As Long lngDeleteElement = QueryIndex(IngConnId) Call mcarrConnections.Delete(lngDeleteElement) End Sub Private Function QueryIndex(IngConnId As Long) As Long Dim lngIndex As Long ' Find the matching parameter record in the array For lngIndex = 0 To mcarrConnections.Count - 1 If mcarrConnections(lngIndex).ConnectionId = lngConnId And _ mcarrConnections(lngIndex).IndOperation <> DeleteOp Then QueryIndex = lngIndex Exit Function End If Next lngIndex ' Raise error that parameter has not been found On Error GoTo 0 Err.Raise vbObjectError + errQueryIndexFailed, "cArrParameters.QueryIndex", _ LoadResString(errQueryIndexFailed) End Function Public Function QueryConnection(IngConnId As Long) As cConnection Dim lngQueryElement As Long </pre>
--	---	--

```

    lngQueryElement =
    QueryIndex(lngConnId)

    ' Return the queried connection object
    Set QueryConnection =
    mcarrConnections(lngQueryElement)

End Function
Public Property Get Count() As Long

    Count = mcarrConnections.Count

End Property
Public Property Get Item(lngIndex As Long)
As cConnection
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrConnections(lngIndex)

End Property

Public Sub Validate(ByVal
cConnToValidate As cConnection)
    ' This procedure is necessary since the
    class cannot validate
    ' all the parameter properties on it's own.
    This is 'coz we
    ' might have created new parameters in
    the workspace, but not
    ' saved them to the database yet - hence
    the duplicate check
    ' has to be repeated in the array

    Dim lngIndex As Long
    Dim cTempParam As cConnection

    ' Check if the parameter name already
    exists in the workspace
    For lngIndex = 0 To
    mcarrConnections.Count - 1
        Set cTempParam =
    mcarrConnections(lngIndex)
        If cTempParam.WorkspaceId =
    cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
    cConnToValidate.ConnectionName And _
        cTempParam.IndOperation <>
    DeleteOp Then
            On Error GoTo 0
            Err.Raise vbObjectError +
    errDuplicateConnectionName, _
            mstrSource,
    LoadResString(errDuplicateConnectionNam
    e)
        End If
    Next lngIndex

End Sub
Public Sub CheckDupConnName(ByVal
cConnToValidate As cConnection)

    Dim lngIndex As Long
    Dim cTempParam As cConnection

    ' Check if the parameter name already
    exists in the workspace
    For lngIndex = 0 To
    mcarrConnections.Count - 1
        Set cTempParam =
    mcarrConnections(lngIndex)
        If cTempParam.WorkspaceId =
    cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
    cConnToValidate.ConnectionName And _

```

```

        cTempParam.ConnectionId <>
    cConnToValidate.ConnectionId And _
        cTempParam.IndOperation <>
    DeleteOp Then
            ShowError
            errDuplicateConnectionName
            On Error GoTo 0
            Err.Raise vbObjectError +
    errDuplicateConnectionName, _
            mstrSource,
    LoadResString(errDuplicateConnectionName)
        End If
    Next lngIndex

End Sub

Private Sub Class_Initialize()

    Set mcarrConnections = New
    cNodeCollections

End Sub

Private Sub Class_Terminate()

    Set mcarrConnections = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConstraint"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConstraint.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties
and methods of a constraint.
'            Contains functions to insert, update
and delete
'            step_constraints records from the
database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Module level variables to store the property
values
Private mlngConstraintId As Long
Private mlngStepId As Long
Private mstrVersionNo As String
Private mintConstraintType As Integer
Private mlngGlobalStepId As Long
Private mstrGlobalVersionNo As String
Private mintSequenceNo As Integer
Private mdbbsConstraintDB As Database
Private mlngWorkspaceId As Integer
Private mintOperation As Operation
Private mlngPosition As Long

' The cSequence class is used to generate
unique step identifiers
Private mConstraintSeq As cSequence

Private Const mstrModuleName As String =
".cConstraint."
Private mstrSource As String

```

```

Public Enum ConstraintType
    gintPreStep = 1
    gintPostStep = 2
End Enum

Private Const mstrSQ As String = ""
Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property
Public Property Let WorkspaceId(ByVal vdata As
Long)
    mlngWorkspaceId = vdata
End Property

Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property
Public Property Let IndOperation(ByVal vdata As
Operation)

    On Error GoTo IndOperationErr
    mstrSource = mstrModuleName &
    "IndOperation"

    ' The valid operations are define in the
    cOperations
    ' class. Check if the operation is valid
    Select Case vdata
        Case QueryOp, InsertOp, UpdateOp, DeleteOp
            mintOperation = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
    errInvalidOperation, _
            mstrSource,
    LoadResString(errInvalidOperation)
    End Select

    Exit Property

IndOperationErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
    "IndOperation"
    On Error GoTo 0
    Err.Raise vbObjectError +
    errLetOperationFailed, _
    mstrSource,
    LoadResString(errLetOperationFailed)

End Property

Public Function Clone() As cConstraint

    ' Creates a copy of a given constraint

    Dim cConsClone As cConstraint

    On Error GoTo CloneErr
    mstrSource = mstrModuleName & "Clone"

    Set cConsClone = New cConstraint

    ' Copy all the workspace properties to the newly
    ' created workspace
    cConsClone.ConstraintId = mlngConstraintId
    cConsClone.StepId = mlngStepId
    cConsClone.VersionNo = mstrVersionNo
    cConsClone.ConstraintType =
    mintConstraintType
    cConsClone.GlobalStepId = mlngGlobalStepId

```

```

cConsClone.GlobalVersionNo =
mstrGlobalVersionNo
cConsClone.SequenceNo =
mintSequenceNo
cConsClone.WorkspaceId =
mlngWorkspaceId
cConsClone.IndOperation =
mintOperation

' And set the return value to the newly
created constraint
Set Clone = cConsClone

Exit Function

CloneErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Clone"
On Error GoTo 0
Err.Raise vbObjectError +
errCloneFailed, _
mstrSource,
LoadResString(errCloneFailed)

End Function

Public Property Get SequenceNo() As
Integer

SequenceNo = mintSequenceNo

End Property

Public Property Let SequenceNo(ByVal
vdata As Integer)
mintSequenceNo = vdata
End Property

Public Sub Add()
' Inserts a new step constraint into the
database

Dim strInsert As String
Dim qy As DAO.QueryDef

On Error GoTo AddErr

' First check if the database object is valid
Call CheckDB

' Any record validations
Call Validate

' Create a temporary querydef object
strInsert = "insert into step_constraints "
& _
"( constraint_id, step_id, version_no,
" & _
" constraint_type, global_step_id,
global_version_no, sequence_no )" & _
" values ( [cons_id], [s_id], [ver_no],
" & _
" [cons_type], [g_step_id],
[g_ver_no], " & _
" [seq_no] )"

Set qy =
mdbsConstraintDB.CreateQueryDef(gstrEm
ptyString, strInsert)

' Call a procedure to execute the Querydef
object
Call AssignParameters(qy)

qy.Execute dbFailOnError

```

```

qy.Close

' strInsert = "insert into step_constraints " &
_
"( constraint_id, step_id, version_no, " &
_
" constraint_type, global_step_id,
global_version_no, sequence_no )" & _
" values ( " & _
' Str(mlngConstraintId) & ", " & _
Str(mlngStepId) & ", " & _
' mstrSQ & mstrVersionNo & mstrSQ & ",
" & Str(mintConstraintType) & ", " & _
' Str(mlngGlobalStepId) & ", " & mstrSQ
& mstrGlobalVersionNo & mstrSQ & ", " & _
' Str(mintSequenceNo) & " )"

' BugMessage strInsert
' mdbsConstraintDB.Execute strInsert,
dbFailOnError
Exit Sub

AddErr:
LogErrors Errors
mstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError +
errAddConstraintFailed, _
mstrSource, _

LoadResString(errAddConstraintFailed)
End Sub

Private Sub AssignParameters(qyExec As
DAO.QueryDef)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to make
them different
' from the field names. When the parameter
names are
' the same as the field names, parameters in
the where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName &
"AssignParameters"

For Each prmParam In qyExec.Parameters
Select Case prmParam.Name
Case "[cons_id]"
prmParam.Value = mlngConstraintId

Case "[s_id]"
prmParam.Value = mlngStepId

Case "[ver_no]"
prmParam.Value = mstrVersionNo

Case "[cons_type]"
prmParam.Value =
mintConstraintType

Case "[g_step_id]"
prmParam.Value =
mlngGlobalStepId

Case "[g_ver_no]"
prmParam.Value =
mstrGlobalVersionNo

Case "[seq_no]"
prmParam.Value = mintSequenceNo

```

```

Case Else
' Write the parameter name that is faulty
WriteError errInvalidParameter,
mstrSource, _
prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrSource, _
LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:
mstrSource = mstrModuleName &
"AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrSource,
LoadResString(errAssignParametersFailed)

End Sub

Public Property Get NextIdentifier() As Long

Dim lngNextId As Long

On Error GoTo NextIdentifierErr

' First check if the database object is valid
Call CheckDB

' Retrieve the next constraint identifier using the
' sequence class
Set mConstraintSeq = New cSequence
Set mConstraintSeq.IdDatabase =
mdbsConstraintDB
mConstraintSeq.IdentifierColumn =
"constraint_id"
lngNextId = mConstraintSeq.Identifier
Set mConstraintSeq = Nothing

NextIdentifier = lngNextId
Exit Property

NextIdentifierErr:
LogErrors Errors
mstrSource = mstrModuleName &
"NextIdentifier"
On Error GoTo 0
Err.Raise vbObjectError + errStepIdGetFailed, _
mstrSource,
LoadResString(errStepIdGetFailed)

End Property

Private Sub CheckDB()
' Check if the database object has been initialized

If mdbsConstraintDB Is Nothing Then
ShowError errInvalidDB
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB, _
mstrModuleName,
LoadResString(errInvalidDB)
End If

End Sub

Public Sub Delete()

```

```

' Deletes the step constraint record from
the database

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr
mstrSource = mstrModuleName &
"Delete"

' There can be multiple constraints for a
step,
' meaning that there can be multiple
constraint records
' with the same constraint_id. Only a
combination
' of the step_id, version and constraint_id
will be
' unique
strDelete = "delete from step_constraints
" & _
" where constraint_id = [cons_id]" & _
" and step_id = [s_id] " & _
" and version_no = [ver_no] "
Set qy =
mdbsConstraintDB.CreateQueryDef(gstrEm
ptyString, strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

strDelete = "Delete from step_constraints
" & _
" where constraint_id = " &
Str(mlngConstraintId) & _
" and step_id = " & Str(mlngStepId)
& _
" and version_no = " & mstrSQ &
mstrVersionNo & mstrSQ
'
' BugMessage strDelete
' mdbsConstraintDB.Execute strDelete,
dbFailOnError

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteConstraintFailed, _
mstrSource, _

LoadResString(errDeleteConstraintFailed)
End Sub
Public Sub Modify()
' Updates the sequence no of the step
constraint record
' in the database

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo Modify

' First check if the database object is valid
Call CheckDB

' Any record validations
Call Validate

```

```

' There can be multiple constraints for a step,
' meaning that there can be multiple
constraint records
' with the same constraint_id. Only a
combination
' of the step_id, version and constraint_id
will be
' unique
' Create a temporary querydef object with
the modify string
strUpdate = "Update step_constraints " & _
" set sequence_no = [seq_no] " & _
" where constraint_id = [cons_id] " & _
" and step_id = [s_id] " & _
" and version_no = [ver_no] "
Set qy =
mdbsConstraintDB.CreateQueryDef(gstrEmpt
yString, strUpdate)

' Call a procedure to assign the parameter
values to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

strUpdate = "Update step_constraints " & _
" set sequence_no = " &
Str(mintSequenceNo) & _
" where constraint_id = " &
Str(mlngConstraintId) & _
" and step_id = " & Str(mlngStepId) & _
" and version_no = " & mstrSQ &
mstrVersionNo & mstrSQ
'
' BugMessage strUpdate
' mdbsConstraintDB.Execute strUpdate,
dbFailOnError
Exit Sub

Modify:
LogErrors Errors
mstrSource = mstrModuleName & "Modify"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateConstraintFailed, _
mstrSource, _

LoadResString(errUpdateConstraintFailed)
End Sub
Public Property Get Position() As Long

Position = mlngPosition

End Property

Public Property Let Position(ByVal RHS As
Long)

mlngPosition = RHS

End Property

Public Sub Validate()
' Each distinct object will have a Validate
method which
' will check if the class properties are valid.
This method
' will be used to check interdependant
properties that
' cannot be validated by the let procedures.
' It should be called by the add and modify
methods of the class

```

```

' No validations are necessary for the constraint
object

End Sub

Public Property Set NodeDB(vdata As Database)

Set mdbsConstraintDB = vdata

End Property

Public Property Get NodeDB() As Database

Set NodeDB = mdbsConstraintDB

End Property

Public Property Get GlobalVersionNo() As String

GlobalVersionNo = mstrGlobalVersionNo

End Property

Public Property Let GlobalVersionNo(ByVal vdata
As String)

mstrGlobalVersionNo = vdata

End Property

Public Property Get GlobalStepId() As Long

GlobalStepId = mlngGlobalStepId

End Property

Public Property Get ConstraintId() As Long

ConstraintId = mlngConstraintId

End Property

Public Property Get VersionNo() As String

VersionNo = mstrVersionNo

End Property

Public Property Get StepId() As Long

StepId = mlngStepId

End Property

Public Property Let VersionNo(ByVal vdata As
String)

mstrVersionNo = vdata

End Property

Public Property Let StepId(ByVal vdata As Long)

mlngStepId = vdata

End Property

Public Property Let ConstraintId(ByVal vdata As
Long)

On Error GoTo ConstraintIdErr
mstrSource = mstrModuleName &
"ConstraintId"

If (vdata > 0) Then

```

```

        mlngConstraintId = vdata
    Else
        ' Propagate this error back to the caller
        On Error GoTo 0
        Err.Raise vbObjectError +
errConstraintIdInvalid, _
        mstrSource,
LoadResString(errConstraintIdInvalid)
    End If

    Exit Property

ConstraintIdErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"ConstraintId"
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintIdSetFailed, _
    mstrSource,
LoadResString(errConstraintIdSetFailed)

End Property

Public Property Let GlobalStepId(ByVal
vdata As Long)

    On Error GoTo GlobalStepIdErr
    mstrSource = mstrModuleName &
"GlobalStepId"

    If (vdata > 0) Then
        mlngGlobalStepId = vdata
    Else
        ' Propagate this error back to the caller
        On Error GoTo 0
        Err.Raise vbObjectError +
errGlobalStepIdInvalid, _
        mstrSource,
LoadResString(errGlobalStepIdInvalid)
    End If

    Exit Property

GlobalStepIdErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"GlobalStepId"
    On Error GoTo 0
    Err.Raise vbObjectError +
errGlobalStepIdSetFailed, _
    mstrSource,
LoadResString(errGlobalStepIdSetFailed)

End Property

Public Property Let ConstraintType(ByVal
vdata As ConstraintType)

    On Error GoTo ConstraintTypeErr

    ' A global step can be either a pre- or a
post-execution step.
    ' These constants have been defined in the
enumeration,
    ' ConstraintType, which is exposed
    Select Case vdata
        Case gintPreStep, gintPostStep
            mintConstraintType = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errConstraintTypeInvalid, _

```

```

        mstrSource,
LoadResString(errConstraintTypeInvalid)
    End Select

    Exit Property

ConstraintTypeErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"ConstraintType"
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintTypeLetFailed, _
    mstrSource,
LoadResString(errConstraintTypeLetFailed)

End Property

Public Property Get ConstraintType() As
ConstraintType

    ConstraintType = mintConstraintType

End Property

Private Sub Class_Initialize()

    ' Initialize the operation indicator variable to
Query
    ' It will be modified later by the collection
class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFailedStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFailedStep.cls
'
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   Properties of a step execution
failure.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public InstanceId As Long
Public StepId As Long
Public ParentStepId As Long
Public ContCriteria As ContinuationCriteria
Public EndTime As Currency
Public AskResponse As Long
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFailedSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFailedSteps.cls

```

```

'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   This module encapsulates a
collection of failed steps. It
'            also determines whether sub-steps of a
passed in step need
'            to be skipped due to a failure.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcFailedSteps As cVector
Public Function ExecuteSubStep(IParentStepId As
Long) As Boolean
    ' Returns False if there is any condition that
prevents sub-steps of the passed
' in instance from being executed
    Dim lIndex As Long

    ExecuteSubStep = True

    For lIndex = 0 To Count() - 1
        If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureCompleteSiblings And _
            IParentStepId <>
mcFailedSteps(lIndex).ParentStepId Then
            ExecuteSubStep = False
            Exit For
        End If

        If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureAbortSiblings And _
            IParentStepId =
mcFailedSteps(lIndex).ParentStepId Then
            ExecuteSubStep = False
            Exit For
        End If

        If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureSkipSiblings And _
            IParentStepId =
mcFailedSteps(lIndex).ParentStepId Then
            ExecuteSubStep = False
            Exit For
        End If

        If mcFailedSteps(lIndex).ContCriteria =
gintOnFailureAbort Then
            ExecuteSubStep = False
            Exit For
        End If

        Next lIndex

    End Function

Public Sub Add(ByVal objItem As cFailedStep)

    mcFailedSteps.Add objItem

End Sub

Public Function Delete(ByVal lPosition As Long)
As cFailedStep

    Set Delete = mcFailedSteps.Delete(lPosition)

End Function

Public Sub Clear()

    mcFailedSteps.Clear

```

```

End Sub
Public Function Count() As Long

    Count = mcFailedSteps.Count

End Function
Public Property Get Item(ByVal Position As Long) As cFailedStep
Attribute Item.VB_UserMemId = 0

    Set Item = mcFailedSteps.Item(Position)

End Property

Public Function StepFailed(lStepId As Long) As Boolean

    ' Returns True if a failure record already exists for the passed in step
    Dim lIndex As Long

    StepFailed = False

    For lIndex = 0 To Count() - 1
        If mcFailedSteps(lIndex).StepId = lStepId Then
            StepFailed = True
            Exit For
        End If
    Next lIndex

End Function

Private Sub Class_Initialize()

    Set mcFailedSteps = New cVector

End Sub

Private Sub Class_Terminate()

    Set mcFailedSteps = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFileInfo"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cFileInfo.cls
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   File Properties viz. name, handle, etc.
' Contact:   Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

Private mstrFileName As String
Private mintFileHandle As Integer
Private mdbsNodeDb As Database ' Since it is used to form a cNodeCollection
Private mlngPosition As Long ' Since it is used to form a cNodeCollection
Public Property Get FileName() As String

    FileName = mstrFileName

```

```

End Property
Public Property Let FileName(ByVal vdata As String)

    mstrFileName = vdata

End Property
Public Property Let FileHandle(ByVal vdata As Integer)

    mintFileHandle = vdata

End Property
Public Property Set NodeDB(vdata As Database)

    Set mdbsNodeDb = vdata

End Property

Public Property Get NodeDB() As Database

    Set NodeDB = mdbsNodeDb

End Property
Public Property Get Position() As Long

    Position = mlngPosition

End Property
Public Property Let Position(ByVal vdata As Long)

    mlngPosition = vdata

End Property

Public Property Get FileHandle() As Integer

    FileHandle = mintFileHandle

End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFileSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = "SavedWithClassBuilder", "Yes"
Attribute VB_Ext_KEY = "Top_Level", "Yes"
' FILE:      cFileSM.cls
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   Encapsulates functions to open a file and write to it.
' Contact:   Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cFileSM."
Private mstrSource As String

```

```

Private mstrFileName As String
Private mintHFile As Integer
Private mstrFileHeader As String
Private mstrProjectName As String

Public Sub CloseFile()

    ' Close the file
    If mintHFile > 0 Then
        Call CloseFileSM(mstrFileName)
        mintHFile = 0
    End If

End Sub

Public Property Let ProjectName(ByVal vdata As String)

    ' An optional field - will be appended to the file
    ' header string if specified

    Const strProjectHdr As String = "Project Name:"

    mstrProjectName = vdata
    mstrFileHeader = mstrFileHeader & _
        Space$(1) & strProjectHdr & Space$(1) & _
        gstrSQ & vdata & gstrSQ

End Property
Public Property Get ProjectName() As String

    ProjectName = mstrProjectName

End Property
Public Property Get FileName() As String

    FileName = mstrFileName

End Property
Public Property Let FileName(ByVal vdata As String)

    mstrFileName = vdata

End Property
Public Sub WriteLine(strMsg As String)

    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, False)

End Sub

Public Sub WriteField(strMsg As String)

    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, True)

End Sub

Private Sub WriteToFile(strMsg As String, _
    blnContinue As Boolean)
    ' Writes the passed in string to the file - the
    ' Continue flag indicates whether the next line
    will
    ' be continued on the same line or printed on a
    new one

    On Error GoTo WriteToFileErr

    ' Open the file if it hasn't been already
    If mintHFile = 0 Then

        ' If the filename has not been initialized, do not
        ' attempt to open it
        If mstrFileName <> gstrEmptyString Then

```

```

    mintHFile =
OpenFileSM(mstrFileName)

    If mintHFile = 0 Then
        ' The Open File command failed
for some reason
        ' No point in trying to write the
file header
    Else
        ' Print a file header, if a header
string has been
        ' initialized
    If mstrFileHeader <>
gstrEmptyString Then
        Print #mintHFile,
        Print #mintHFile,
mstrFileHeader
        Print #mintHFile,
    End If
    End If
    End If
    End If

If mintHFile <> 0 Then
    If strMsg = gstrEmptyString Then
        Print #mintHFile,
    Else
        If blnContinue Then
            ' Write the message to the file -
continue
            ' all subsequent characters on the
same line
            Print #mintHFile, strMsg;
        Else
            ' Write the message to the file
            Print #mintHFile, strMsg
        End If
    End If
    Else
        ' Display the string to the user instead
of
        ' trying to write it to the file
        ' This could be the project error log that
we were
        ' trying to open! Play it safe and display
errors - do
        ' not try to log them.
        MsgBox strMsg, vbOKOnly
    End If

    Exit Sub

WriteToFileErr:
    ' Log the error code raised by Visual
Basic
    Call DisplayErrors(Errors)

    ' Display the string to the user instead of
    ' trying to write it to the file
    MsgBox strMsg, vbOKOnly

End Sub
Public Property Let FileHeader(ByVal vdata
As String)

    mstrFileHeader = vdata

End Property
Public Property Get FileHeader() As String

    FileHeader = mstrFileHeader

End Property

```

```

Private Sub Class_Terminate()

    ' Close the file opened by this instance
    Call CloseFile

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cGlobalStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cGlobalStep.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
'
' PURPOSE:  Encapsulates the properties
and methods of a global step.
'           Implements the cStep class - carries
out initializations
'           and validations that are specific to
global steps.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Implements cStep

' Object variable to keep the reference in
Private mcStep As cStep

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cGlobalStep."

Private Sub cStep_AddAllIterators()

    Call mcStep.AddAllIterators

End Sub

Private Sub cStep_AddIterator(cItRecord As
cIterator)

    Call mcStep.AddIterator(cItRecord)

End Sub

Private Property Let
cStep_ArchivedFlag(ByVal RHS As Boolean)

    mcStep.ArchivedFlag = RHS

End Property

Private Property Get cStep_ArchivedFlag() As
Boolean

    cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property

Private Sub Class_Initialize()

```

```

' Create the object
Set mcStep = New cStep

' Initialize the object with valid values for a
global step
' The global flag should be the first field to be
initialized
' since subsequent validations might try to check
if the
' step being created is global
mcStep.GlobalFlag = True
mcStep.StepType = gintGlobalStep

' A global step cannot have any sub-steps
associated with it
' Hence, it will always be at Step Level 0
mcStep.ParentStepId = 0
mcStep.ParentVersionNo = gstrMinVersion
mcStep.StepLevel = 0

' The enabled flag must be False for all global
steps
' Global steps can be of two types
' a. Those that are run globally within a
workspace either
' before every step, after every step or during
the entire
' run, depending on the global run method
' b. Those that are not run globally, but qualify to
be either
' pre or post-execution steps for other steps in
the workspace.
' Whether or not such a step will be executed
depends on
' whether the step for which it is defined as a
pre/post
' step will be executed
mcStep.EnabledFlag = False

mcStep.ContinuationCriteria = gintNoOption
mcStep.DegreeParallelism =
gstrGlobalParallelism

End Sub
Private Sub Class_Terminate()

    ' Remove the step object
    Set mcStep = Nothing

End Sub

Private Sub cStep_Add()

    ' Call a private procedure to see if the step text
has been
    ' entered - since a global step actually executes a
step, entry
    ' of the text is mandatory
    Call StepTextOrFileEntered

    ' Call the Add method of the step class to carry
out the insert
    mcStep.Add

End Sub

Private Function cStep_Clone(Optional cCloneStep
As cStep) As cStep

    Dim cNewGlobal As cGlobalStep

    Set cNewGlobal = New cGlobalStep
    Set cStep_Clone = mcStep.Clone(cNewGlobal)

End Function

```

```
Private Property Get
cStep_ContinuationCriteria() As
ContinuationCriteria
```

```
    cStep_ContinuationCriteria =
mcStep.ContinuationCriteria
```

```
End Property
```

```
Private Property Let
cStep_ContinuationCriteria(ByVal RHS As
ContinuationCriteria)
```

```
    ' The continuation criteria field will
always be empty for a
    ' global step
    mcStep.ContinuationCriteria = 0
```

```
End Property
```

```
Private Property Let
cStep_DegreeParallelism(ByVal RHS As
String)
```

```
    ' Will always be zero for a global step
    mcStep.DegreeParallelism =
gstrGlobalParallelism
```

```
End Property
```

```
Private Property Get
cStep_DegreeParallelism() As String
```

```
    cStep_DegreeParallelism =
mcStep.DegreeParallelism
```

```
End Property
```

```
Private Sub cStep_DeleteIterator(cItRecord
As cIterator)
```

```
    Call mcStep.DeleteIterator(cItRecord)
```

```
End Sub
```

```
Private Sub cStep_Delete()
```

```
    mcStep.Delete
```

```
End Sub
```

```
Private Property Get cStep_EnabledFlag()
As Boolean
```

```
    cStep_EnabledFlag =
mcStep.EnabledFlag
```

```
End Property
```

```
Private Property Let
cStep_EnabledFlag(ByVal RHS As
Boolean)
```

```
    ' The enabled flag must be False for all
global steps
    ' Global steps can be of two types
    ' a. Those that are run globally within a
workspace either
    ' before every step, after every step or
during the entire
    ' run, depending on the global run
method
```

```
    ' b. Those that are not run globally, but
qualify to be either
    ' pre or post-execution steps for other steps
in the workspace.
    ' Whether or not such a step will be
executed depends on
    ' whether the step for which it is defined as
a pre/post
    ' step will be executed
    mcStep.EnabledFlag = False
```

```
End Property
```

```
Private Property Let cStep_ErrorFile(ByVal
RHS As String)
```

```
    mcStep.ErrorFile = RHS
```

```
End Property
```

```
Private Property Get cStep_ErrorFile() As
String
```

```
    cStep_ErrorFile = mcStep.ErrorFile
```

```
End Property
```

```
Private Property Let
cStep_ExecutionMechanism(ByVal RHS As
ExecutionMethod)
```

```
    ' Whether or not the Execution Mechanism
is valid will be
    ' checked by the Step class
    mcStep.ExecutionMechanism = RHS
```

```
End Property
```

```
Private Property Get
cStep_ExecutionMechanism() As
ExecutionMethod
```

```
    cStep_ExecutionMechanism =
mcStep.ExecutionMechanism
```

```
End Property
```

```
Private Property Let
cStep_FailureDetails(ByVal RHS As String)
```

```
    ' Whether or not the Failure Details are valid
for the
    ' selected failure criteria will be checked by
the Step class
    mcStep.FailureDetails = RHS
```

```
End Property
```

```
Private Property Get cStep_FailureDetails() As
String
```

```
    cStep_FailureDetails =
mcStep.FailureDetails
```

```
End Property
```

```
Private Property Get cStep_GlobalFlag() As
Boolean
```

```
    cStep_GlobalFlag = mcStep.GlobalFlag
```

```
End Property
```

```
Private Property Let cStep_GlobalFlag(ByVal
RHS As Boolean)
```

```
    ' Set the global flag to true
    mcStep.GlobalFlag = True
```

```
End Property
```

```
Private Function cStep_IncVersionX() As String
```

```
    cStep_IncVersionX = mcStep.IncVersionX
```

```
End Function
```

```
Private Function cStep_IncVersionY() As String
```

```
    cStep_IncVersionY = mcStep.IncVersionY
```

```
End Function
```

```
'Private Property Let
cStep_GlobalRunMethod(ByVal RHS As Integer)
```

```
    ' ' Whether or not the Global Run Method is valid
for the step
    ' ' will be checked by the Step class
    ' mcStep.GlobalRunMethod = RHS
```

```
'End Property
```

```
'Private Property Get cStep_GlobalRunMethod() As
Integer
```

```
    ' cStep_GlobalRunMethod =
mcStep.GlobalRunMethod
```

```
'End Property
```

```
Private Property Get cStep_IndOperation() As
Operation
```

```
    cStep_IndOperation = mcStep.IndOperation
```

```
End Property
```

```
Private Property Let cStep_IndOperation(ByVal
RHS As Operation)
```

```
    mcStep.IndOperation = RHS
```

```
End Property
```

```
Private Sub cStep_InsertIterator(cItRecord As
cIterator)
```

```
    Call mcStep.InsertIterator(cItRecord)
```

```
End Sub
```

```
Private Function cStep_IsNewVersion() As
Boolean
    cStep_IsNewVersion = mcStep.IsNewVersion
End Function
```

```
Private Function cStep_IteratorCount() As Long
```

```
    cStep_IteratorCount = mcStep.IteratorCount
```

```
End Function
```

```
Private Property Let cStep_IteratorName(ByVal
RHS As String)
```

```
    mcStep.IteratorName = RHS
```

```
End Property
```


Private Property Get cStep_IteratorName() As String cStep_IteratorName = mcStep.IteratorName End Property Private Function cStep_Iterators() As Variant cStep_Iterators = mcStep.Iterators End Function Private Sub cStep_LoadIterator(cItRecord As cIterator) Call mcStep.LoadIterator(cItRecord) End Sub 'Private Property Let cStep_LogFile(ByVal RHS As String) ' ' mcStep.LogFile = RHS ' End Property ' 'Private Property Get cStep_LogFile() As String ' ' cStep_LogFile = mcStep.LogFile ' End Property Private Sub cStep_ModifyIterator(cItRecord As cIterator) Call mcStep.ModifyIterator(cItRecord) End Sub Private Sub cStep_Modify() ' Call a private procedure to see if the step text has been entered - since a global step actually executes a step, ' entry of the text is mandatory Call StepTextOrFileEntered ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Get cStep_NextStepId() As Long cStep_NextStepId = mcStep.NextStepId End Property Private Property Set cStep_NodeDB(RHS As DAO.Database) Set mcStep.NodeDB = RHS End Property Private Property Get cStep_NodeDB() As DAO.Database	Set cStep_NodeDB = mcStep.NodeDB End Property Private Function cStep_OldVersionNo() As String cStep_OldVersionNo = mcStep.OldVersionNo End Function Private Property Let cStep_OutputFile(ByVal RHS As String) mcStep.OutputFile = RHS End Property Private Property Get cStep_OutputFile() As String cStep_OutputFile = mcStep.OutputFile End Property Private Property Let cStep_ParentStepId(ByVal RHS As Long) ' A global step cannot have any sub-steps associated with it ' Hence, the parent step id and parent version number will be zero mcStep.ParentStepId = 0 End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String) ' A global step cannot have any sub-steps associated with it ' Hence, the parent step id and parent version number will be zero mcStep.ParentVersionNo = gstrMinVersion End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property Private Property Let cStep_Position(ByVal RHS As Long) mcStep.Position = RHS End Property Private Property Get cStep_Position() As Long cStep_Position = mcStep.Position End Property	Private Sub cStep_RemoveIterator(cItRecord As cIterator) Call mcStep.RemoveIterator(cItRecord) End Sub Private Sub cStep_SaveIterators() Call mcStep.SaveIterators End Sub Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo End Property Private Property Let cStep_StepId(ByVal RHS As Long) mcStep.StepId = RHS End Property Private Property Get cStep_StepId() As Long cStep_StepId = mcStep.StepId End Property Private Property Let cStep_StepLabel(ByVal RHS As String) mcStep.StepLabel = RHS End Property Private Property Get cStep_StepLabel() As String cStep_StepLabel = mcStep.StepLabel End Property Private Property Let cStep_StartDir(ByVal RHS As String) mcStep.StartDir = RHS End Property Private Property Get cStep_StartDir() As String cStep_StartDir = mcStep.StartDir End Property Private Property Let cStep_StepLevel(ByVal RHS As Integer) ' A global step cannot have any sub-steps associated with it ' Hence, it will always be at step level 0 mcStep.StepLevel = 0
--	---	--

End Property	' carry out the specific validations for the type and	If StringEmpty(mcStep.StepText) And StringEmpty(mcStep.StepTextFile) Then ShowError errStepTextAndFileNull On Error GoTo 0 Err.Raise vbObjectError + errStepTextAndFileNull, _ mstrSource, LoadResString(errStepTextAndFileNull) ElseIf Not StringEmpty(mcStep.StepText) And Not StringEmpty(mcStep.StepTextFile) Then ShowError errStepTextOrFile On Error GoTo 0 Err.Raise vbObjectError + errStepTextOrFile, _ mstrSource, LoadResString(errStepTextOrFile) End If
Private Property Get cStep_StepLevel() As Integer	' call the generic validation routine	
cStep_StepLevel = mcStep.StepLevel	On Error GoTo cStep_ValidateErr mstrSource = mstrModuleName & "cStep_Validate"	
End Property	' Validations specific to global steps	End Sub
Private Property Let cStep_StepText(ByVal RHS As String)	' Check if the step text or a file name has been	Private Property Let cStep_VersionNo(ByVal RHS As String)
mcStep.StepText = RHS	' specified	mcStep.VersionNo = RHS
End Property	Call StepTextOrFileEntered	End Property
Private Property Get cStep_StepText() As String	' The step level must be zero for all globals	Private Property Get cStep_VersionNo() As String
cStep_StepText = mcStep.StepText	If mcStep.StepLevel <> 0 Then ShowError errStepLevelZeroForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	cStep_VersionNo = mcStep.VersionNo
End Property	End If	End Property
Private Property Let cStep_StepTextFile(ByVal RHS As String)	If mcStep.EnabledFlag Then ShowError errEnabledFlagFalseForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	Private Property Let cStep_WorkspaceId(ByVal RHS As Long)
mcStep.StepTextFile = RHS	End If	mcStep.WorkspaceId = RHS
End Property		End Property
Private Property Get cStep_StepTextFile() As String	If mcStep.DegreeParallelism > 0 Then ShowError errDegParallelismNullForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	Private Property Get cStep_WorkspaceId() As Long
cStep_StepTextFile = mcStep.StepTextFile	End If	cStep_WorkspaceId = mcStep.WorkspaceId
End Property		End Property
Private Property Let cStep_StepType(RHS As gintStepType)	If mcStep.ContinuationCriteria > 0 Then ShowError errContCriteriaNullForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	VERSION 1.0 CLASS
mcStep.StepType = gintGlobalStep	End If	BEGIN
End Property		MultiUse = -1 'True
Private Property Get cStep_StepType() As gintStepType		END
cStep_StepType = mcStep.StepType		Attribute VB_Name = "cInstance"
End Property		Attribute VB_GlobalNameSpace = False
Private Sub cStep_UnloadIterators()	mcStep.Validate	Attribute VB_Creatable = True
Call mcStep.UnloadIterators	Exit Sub	Attribute VB_PredeclaredId = False
End Sub		Attribute VB_Exposed = False
Private Sub cStep_UpdateIterator(cItRecord As cIterator)	cStep_ValidateErr:	' FILE: cInstance.cls
Call mcStep.UpdateIterator(cItRecord)	LogErrors Errors	' Microsoft TPC-H Kit Ver. 1.00
End Sub	mstrSource = mstrModuleName & "cStep_Validate"	' Copyright Microsoft, 1999
Private Sub cStep_UpdateIteratorVersion()	On Error GoTo 0	' All Rights Reserved
Call mcStep.UpdateIteratorVersion	Err.Raise vbObjectError + errValidateFailed, _ mstrSource, _ LoadResString(errValidateFailed)	' PURPOSE: Encapsulates the properties and methods of an instance.
End Sub	End Sub	' An instance is created when a step is executed for a
Private Sub cStep_Validate()	Private Sub StepTextOrFileEntered()	' particular iterator value (if applicable) at 'run' time.
' The validate routines for each of the steps will	' Checks if either the step text or the name of the file containing	' Contains functions to determine if an instance is running,
	' the text has been entered	' complete, and so on.
	' If both of them are null or both of them are not null,	' Contact: Reshma Tharamal (reshmat@microsoft.com)
	' the global step is invalid and an error is raised	Option Explicit

```

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"cInstance."
Private mstrSource As String

Private mcStep As cStep
Public Key As String ' Node key for the step
being executed
Public InstanceId As Long
Public ParentInstanceId As Long ' The
parent instance
Private mblnNoMoreToStart As Boolean
Private mblnComplete As Boolean
Public StartTime As Currency
Public EndTime As Currency
Public ElapsedTime As Currency
Private mintStatus As InstanceStatus
Public DegreeParallelism As Integer
Private mcIterators As cRunCollt

' A collection of all the sub-steps for this
step
Private mcSubSteps As cSubSteps
Public Sub UpdateStartTime(lStepId As
Long, Optional ByVal StartTm As Currency
= gdtmEmpty, _
Optional ByVal EndTm As Currency =
gdtmEmpty, _
Optional ByVal Elapsed As Currency =
0)
' We do not maintain start and end
timestamps for the constraint
' of a step. Hence we check if the process
that just started/
' terminated is the worker step that is
being executed. If so,
' we update the start/end time and status
on the instance record.

BugAssert (StartTm <> gdtmEmpty) Or
(EndTm <> gdtmEmpty), "Mandatory
parameter missing."

' Make sure that we are executing the
actual step and not
' a pre or post-execution constraint
If mcStep.StepId = lStepId Then
If StartTm <> 0 Then
StartTime = StartTm
mintStatus = gintRunning
Else
EndTime = EndTm
ElapsedTime = Elapsed
mintStatus = gintComplete
End If
End If

End Sub
Public Function
ValidForIteration(cParentInstance As
cInstance, _
ByVal intConsType As
ConstraintType) As Boolean
' Returns true if the instance passed in is
the first or
' last iteration for the step, depending on
the constraint type

Dim cSubStepRec As cSubStep
Dim vntIterators As Variant

On Error GoTo ValidForIterationErr

```

```

If cParentInstance Is Nothing Then
' This will only be true for the dummy
instance, which
' cannot have any iterators defined for it
ValidForIteration = True
Exit Function
End If

vntIterators = mcStep.Iterators

If Not StringEmpty(mcStep.IteratorName)
And Not IsEmpty(vntIterators) Then

Set cSubStepRec =
cParentInstance.QuerySubStep(mcStep.StepId)

If intConsType = gintPreStep Then
' Pre-execution constraints will only be
executed
' before the first iteration
If
cSubStepRec.LastIterator.IteratorType =
gintValue Then
ValidForIteration =
(cSubStepRec.LastIterator.Sequence = _
gintMinIteratorSequence)
Else
ValidForIteration =
(cSubStepRec.LastIterator.Value = _
cSubStepRec.LastIterator.RangeFrom)
End If
Else
' Post-execution constraints will only be
executed
' after the last iteration - check if there
are any
' pending iterations
ValidForIteration =
cSubStepRec.NextIteration(mcStep) Is
Nothing
End If
Else
ValidForIteration = True
End If

Exit Function

ValidForIterationErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"ValidForIteration"
Err.Raise vbObjectError +
errExecInstanceFailed, _
mstrSource,
LoadResString(errExecInstanceFailed)

End Function

Public Sub CreateSubStep(cSubStepDtls As
cStep, RunParams As cArrParameters)

Dim cNewSubStep As cSubStep

On Error GoTo CreateSubStepErr

Set cNewSubStep = New cSubStep

cNewSubStep.StepId = cSubStepDtls.StepId
cNewSubStep.TasksComplete = 0
cNewSubStep.TasksRunning = 0

' Initialize the iterator for the instance

```

```

Set cNewSubStep.LastIterator = New
cRunItDetails
Call cNewSubStep.InitializeIt(cSubStepDtls,
RunParams)

' Add add the substep to the collection
mcSubSteps.Add cNewSubStep

Set cNewSubStep = Nothing

Exit Sub

CreateSubStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"CreateSubStep"
Err.Raise vbObjectError + errProgramError,
mstrSource, _
LoadResString(errProgramError)

End Sub

Public Function QuerySubStep(ByVal SubStepId
As Long) As cSubStep
' Retrieves the sub-step record for the passed in
sub-step id

Dim lngIndex As Long

On Error GoTo QuerySubStepErr

' Find the sub-step node with the matching step id
For lngIndex = 0 To mcSubSteps.Count - 1
If mcSubSteps(lngIndex).StepId = SubStepId
Then
Set QuerySubStep = mcSubSteps(lngIndex)
Exit For
End If
Next lngIndex

Exit Function

QuerySubStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"QuerySubStep"
Err.Raise vbObjectError +
errNavInstancesFailed, _
mstrSource,
LoadResString(errNavInstancesFailed)

End Function
Public Property Let AllStarted(ByVal vdata As
Boolean)

'bugmessage "Set All Started to " & vData & "
for : " & _
mstrKey

mblnNoMoreToStart = vdata

End Property
Public Property Get AllStarted() As Boolean

AllStarted = mblnNoMoreToStart

End Property
Public Property Let AllComplete(ByVal vdata As
Boolean)

```

```

'bugmessage "Set All Complete to " &
vData & " for : " & _
mstrKey

mblnComplete = vdata

End Property

Public Property Get AllComplete() As
Boolean

    AllComplete = mblnComplete

End Property

Public Sub ChildExecuted(mlngStepId As
Long)
    ' This procedure is called when a sub-step
    executes.

    Dim lngIndex As Long

    On Error GoTo ChildExecutedErr

    BugAssert mcStep.StepType =
gintManagerStep

    For lngIndex = 0 To mcSubSteps.Count -
1
        If mcSubSteps(lngIndex).StepId =
mlngStepId Then
            mcSubSteps(lngIndex).TasksRunning = _
            BugMessage "Tasks Running for Step
Id : " & _
            CStr(mcSubSteps(lngIndex).StepId) & _
            " Instance Id: " & InstanceId &
            " = " &
            mcSubSteps(lngIndex).TasksRunning
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcSubSteps.Count - 1 Then
        ' The child step wasn't found - raise an
        error
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidChild, mstrModuleName, _
        LoadResString(errInvalidChild)
    End If

    Exit Sub

ChildExecutedErr:
    ' Log the error code raised by Visual
    Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errInstanceOpFailed, mstrModuleName &
"ChildExecuted", _
    LoadResString(errInstanceOpFailed)

End Sub

Public Sub ChildTerminated(mlngStepId As
Long)
    ' This procedure is called when any sub-
    step process
    ' terminates. Note: The TasksComplete
    field will be

```

```

' updated only when all the instances for a
sub-step
' complete execution.
Dim lngIndex As Long

On Error GoTo ChildTerminatedErr

BugAssert mcStep.StepType =
gintManagerStep

For lngIndex = 0 To mcSubSteps.Count - 1

    If mcSubSteps(lngIndex).StepId =
mlngStepId Then
        mcSubSteps(lngIndex).TasksRunning =
        mcSubSteps(lngIndex).TasksRunning - 1
        BugMessage "Tasks Running for Step
Id : " & _
        CStr(mcSubSteps(lngIndex).StepId) & _
        " Instance Id: " & InstanceId &
        " = " &
        mcSubSteps(lngIndex).TasksRunning

        BugAssert
        mcSubSteps(lngIndex).TasksRunning >= 0, _
        "Tasks running for " &
        CStr(mlngStepId) & _
        " Instance Id " & InstanceId & " is
less than 0."
        Exit For
    End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
    ' The child step wasn't found - raise an
    error
    On Error GoTo 0
    Err.Raise errInvalidChild,
mstrModuleName & "ChildTerminated", _
    LoadResString(errInvalidChild)
End If

Exit Sub

ChildTerminatedErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
"ChildTerminated"
    Err.Raise vbObjectError +
errInstanceOpFailed, mstrSource, _
    LoadResString(errInstanceOpFailed)

End Sub

Public Sub ChildCompleted(mlngStepId As
Long)
    ' This procedure is called when any a sub-
    step completes
    ' execution. Note: The TasksComplete field
    will be
    ' incremented.
    Dim lngIndex As Long

    On Error GoTo ChildCompletedErr

    BugAssert mcStep.StepType =
gintManagerStep

    For lngIndex = 0 To mcSubSteps.Count - 1
        BugAssert
        mcSubSteps(lngIndex).TasksComplete >= 0, _

```

```

"Tasks complete for " &
CStr(mcSubSteps(lngIndex).StepId) & _
    " Instance Id " & InstanceId & " is less
than 0."

    If mcSubSteps(lngIndex).StepId = mlngStepId
Then
        mcSubSteps(lngIndex).TasksComplete = _
        mcSubSteps(lngIndex).TasksComplete
        + 1
        BugMessage "Tasks Complete for Step Id :
" & _
        CStr(mcSubSteps(lngIndex).StepId) &
        " Instance Id: " & InstanceId &
        " = " &
        mcSubSteps(lngIndex).TasksComplete
        Exit For
    End If
Next lngIndex

If lngIndex > mcSubSteps.Count - 1 Then
    ' The child step wasn't found - raise an error
    On Error GoTo 0
    Err.Raise errInvalidChild, mstrModuleName, _
    LoadResString(errInvalidChild)
End If

Exit Sub

ChildCompletedErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInstanceOpFailed,
mstrModuleName & "ChildCompleted", _
    LoadResString(errInstanceOpFailed)

End Sub

Public Sub ChildDeleted(mlngStepId As Long)
    ' This procedure is called when a sub-step needs
    to be re-executed
    ' Note: The TasksComplete field is decremented.
    We needn't worry about
    ' the TasksRunning field since no steps are
    currently running.
    Dim lngIndex As Long

    On Error GoTo ChildDeletedErr

    BugAssert mcStep.StepType = gintManagerStep

    For lngIndex = 0 To mcSubSteps.Count - 1

        If mcSubSteps(lngIndex).StepId = mlngStepId
Then
            mcSubSteps(lngIndex).TasksRunning = _
            mcSubSteps(lngIndex).TasksRunning -
            1

            BugAssert
            mcSubSteps(lngIndex).TasksRunning >= 0, _
            "Tasks running for " &
            CStr(mcSubSteps(lngIndex).StepId) & _
            " Instance Id " & InstanceId & " is less
than 0."
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcSubSteps.Count - 1 Then
        ' The child step wasn't found - raise an error
        On Error GoTo 0
        Err.Raise errInvalidChild, mstrModuleName, _
        LoadResString(errInvalidChild)
    End If

```

End If	' executed lngRunning = 0 For lngIndex = 0 To mcSubSteps.Count - 1	Public Property Get RunningForStep(lngSubStepId As Long) As Long ' Returns the total number of instances of the substep ' that are executing Dim lngIndex As Long
Exit Sub		Call RaiseErrForWorker
ChildDeletedErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errInstanceOpFailed, mstrModuleName & "ChildDeleted", _ LoadResString(errInstanceOpFailed)	lngRunning = lngRunning + mcSubSteps(lngIndex).TasksRunning Next lngIndex IsPending = (lngRunning < DegreeParallelism) Else ' This should be sufficient to prove that there r no ' more sub-steps to be executed. ' mblnComplete: Handles the case where all steps have ' been executed ' mblnNoMoreToStart: Handles the case where the step ' has a degree of parallelism greater than the total ' number of sub-steps available to execute IsPending = False End If	For lngIndex = 0 To mcSubSteps.Count - 1 BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mcSubSteps(lngIndex).StepId) & _ " is less than 0." If mcSubSteps(lngIndex).StepId = lngSubStepId Then RunningForStep = mcSubSteps(lngIndex).TasksRunning Exit For End If Next lngIndex
End Sub Private Sub RaiseErrForWorker() If mcStep.StepType <> gintManagerStep Then On Error GoTo 0 mstrSource = mstrModuleName & "RaiseErrForWorker" Err.Raise vbObjectError + errInvalidForWorker, _ mstrSource, _	End Property Public Property Get IsRunning() As Boolean ' Returns true if the any one of the substeps is still ' executing Dim lngIndex As Long Call RaiseErrForWorker IsRunning = False	If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise errInvalidChild, mstrSource, _ LoadResString(errInvalidChild) End If
LoadResString(errInvalidForWorker) End If		End Property
End Sub		Public Property Let Status(ByVal vdata As InstanceStatus) mintStatus = vdata
Public Property Get Step() As cStep Set Step = mcStep	' If a substep has no currently executing tasks and ' the tasks completed is greater than zero, then we can ' assume that it has completed execution (otherwise we ' would've run a new task the moment one completed!) For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).TasksRunning > 0 Then IsRunning = True Exit For End If Next lngIndex	End Property Public Property Get Status() As InstanceStatus Status = mintStatus
End Property Public Property Get Iterators() As cRunCollt Set Iterators = mcIterators	End Property Public Property Get TotalRunning() As Long ' Returns the total number of substeps that are executing Dim lngTotalProcesses As Long Dim lngIndex As Long Call RaiseErrForWorker lngTotalProcesses = 0 For lngIndex = 0 To mcSubSteps.Count - 1 BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mcSubSteps(lngIndex).StepId) & _ " is less than 0." lngTotalProcesses = lngTotalProcesses + mcSubSteps(lngIndex).TasksRunning Next lngIndex TotalRunning = lngTotalProcesses End Property	End Property Private Sub Class_Initialize() Set mcSubSteps = New cSubSteps mblnNoMoreToStart = False mblnComplete = False StartTime = gdtmEmpty EndTime = gdtmEmpty
Set SubSteps = mcSubSteps		End Sub
End Property Public Property Set Step(cRunStep As cStep) Set mcStep = cRunStep		Private Sub Class_Terminate() mcSubSteps.Clear Set mcSubSteps = Nothing
End Property Public Property Set Iterators(cIts As cRunCollt) Set mcIterators = cIts		End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 "True" END Attribute VB_Name = "cInstances" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cInstances.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved
End Property Public Property Get IsPending() As Boolean ' Returns true if the step has any substeps that need ' execution Dim lngIndex As Long Dim lngRunning As Long Call RaiseErrForWorker If Not mblnComplete And Not mblnNoMoreToStart Then ' Get a count of all the substeps that are already being		

<pre> ' ' ' PURPOSE: Implements a collection of cInstance objects. ' Type-safe wrapper around cVector. ' Also contains additional functions to query an instance, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cInstance." Private mstrSource As String Private mcInstances As cVector Public Function QueryInstance(ByVal InstanceId As Long) As cInstance ' Retrieves the record for the passed in instance from ' the collection Dim lngIndex As Long On Error GoTo QueryInstanceErr ' Check for valid values of the instance id If InstanceId > 0 Then ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).InstanceId = InstanceId Then Set QueryInstance = mcInstances(lngIndex) Exit For End If Next lngIndex If lngIndex > mcInstances.Count - 1 Then On Error GoTo 0 Err.Raise vbObjectError + errQueryFailed, mstrSource, _ LoadResString(errQueryFailed) End If Else On Error GoTo 0 Err.Raise vbObjectError + errQueryFailed, mstrSource, _ LoadResString(errQueryFailed) End If Exit Function QueryInstanceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "QueryInstance" Err.Raise vbObjectError + errQueryFailed, _ mstrSource, LoadResString(errQueryFailed) End Function </pre>	<pre> Public Function QueryPendingInstance(ByVal ParentInstanceId As Long, _ ByVal lngSubStepId As Long) As cInstance ' Retrieves a pending instance for the passed in substep ' and the given parent instance id. Dim lngIndex As Long On Error GoTo QueryPendingInstanceErr ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).ParentInstanceId = ParentInstanceId And _ mcInstances(lngIndex).Step.StepId = lngSubStepId Then ' Put in a separate if condition since the IsPending ' property is valid only for manager steps. If the ' calling procedure does not pass a manager step ' identifier, the procedure will error out. If mcInstances(lngIndex).IsPending Then Set QueryPendingInstance = mcInstances(lngIndex) Exit For End If End If Next lngIndex Exit Function QueryPendingInstanceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "QueryPendingInstance" Err.Raise vbObjectError + errQueryFailed, _ mstrSource, LoadResString(errQueryFailed) End Function Public Function InstanceAborted(cSubStepRec As cSubStep) As Boolean Dim lngIndex As Long InstanceAborted = False For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).Step.StepId = cSubStepRec.StepId And _ mcInstances(lngIndex).Status = gintAborted Then InstanceAborted = True Exit For End If Next lngIndex End Function Public Function CompletedInstanceExists(lParentInstance As Long, _ cSubStepDtls As cStep) As Boolean ' Checks if there is a completed instance of the passed in step Dim lngIndex As Long CompletedInstanceExists = False </pre>	<pre> If cSubStepDtls.StepType = gintManagerStep Then ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).ParentInstanceId = lParentInstance And _ mcInstances(lngIndex).Step.StepId = cSubStepDtls.StepId Then ' Put in a separate if condition since the IsPending ' property is valid only for manager steps. BugAssert (Not mcInstances(lngIndex).IsPending), "Pending instance exists!" CompletedInstanceExists = True Exit Function End If Next lngIndex End If End Function Public Sub Add(ByVal objItem As cInstance) mcInstances.Add objItem End Sub Public Sub Clear() mcInstances.Clear End Sub Public Function Count() As Long Count = mcInstances.Count End Function Public Function Delete(ByVal lngDelete As Long) As cInstance Set Delete = mcInstances.Delete(lngDelete) End Function Public Property Set Item(Optional ByVal Position As Long, _ RHS As cInstance) If Position = -1 Then Position = 0 End If Set mcInstances(Position) = RHS End Property Public Property Get Item(Optional ByVal Position As Long = -1) _ As cInstance Attribute Item.VB_UserMemId = 0 If Position = -1 Then Position = 0 End If Set Item = mcInstances.Item(Position) End Property </pre>
---	---	--

<pre> Private Sub Class_Initialize() Set mcInstances = New cVector End Sub Private Sub Class_Terminate() Set mcInstances = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cIterator" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cIterator.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of an iterator. ' Contains functions to insert, update and delete ' iterator_values records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Implements cNode ' Module level variables to store the property values Private mintType As Integer Private mintSequenceNo As Integer Private mstrValue As String Private mdbIteratorDB As Database Private mintOperation As Integer Private mlngPosition As Long Private Const mstrModuleName As String = "cIterator." Private mstrSource As String Public Enum ValueType gintFrom = 1 gintTo gintStep gintValue End Enum Public Property Get Value() As String Value = mstrValue End Property Public Property Let Value(ByVal vdata As String) mstrValue = vdata End Property Public Property Get IndOperation() As Operation </pre>	<pre> IndOperation = mintOperation End Property Public Property Let IndOperation(ByVal vdata As Operation) On Error GoTo IndOperationErr mstrSource = mstrModuleName & "IndOperation" ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ mstrSource, LoadResString(errInvalidOperation) End Select Exit Property IndOperationErr: LogErrors Errors mstrSource = mstrModuleName & "IndOperation" On Error GoTo 0 Err.Raise vbObjectError + errLetOperationFailed, _ mstrSource, LoadResString(errLetOperationFailed) End Property Public Function Clone() As cIterator ' Creates a copy of a given Iterator Dim cItClone As cIterator On Error GoTo CloneErr Set cItClone = New cIterator ' Copy all the iterator properties to the newly created object cItClone.IteratorType = mintType cItClone.SequenceNo = mintSequenceNo cItClone.IndOperation = mintOperation cItClone.Value = mstrValue ' And set the return value to the newly created Iterator Set Clone = cItClone Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Get SequenceNo() As Integer </pre>	<pre> SequenceNo = mintSequenceNo End Property Public Property Let SequenceNo(ByVal vdata As Integer) mintSequenceNo = vdata End Property Public Sub Add(ByVal lngStepId As Long, _ strVersion As String) ' Inserts a new iterator values record into the database Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo AddIteratorErr ' First check if the database object is valid Call CheckDB ' Create a temporary querydef object strInsert = "insert into iterator_values " & _ "(" & step_id, version_no, type, " & _ " iterator_value, sequence_no)" & _ " values ([st_id], [ver_no], [it_tpy], " & _ " [it_val], [seq_no])" Set qy = mdbIteratorDB.CreateQueryDef(gstrEmptyString, strInsert) ' Call a procedure to execute the Querydef object Call AssignParameters(qy, lngStepId, strVersion) qy.Execute dbFailOnError qy.Close Exit Sub AddIteratorErr: LogErrors Errors mstrSource = mstrModuleName & "AddIterator" On Error GoTo 0 Err.Raise vbObjectError + errInsertIteratorFailed, _ mstrSource, _ LoadResString(errInsertIteratorFailed) End Sub Private Sub AssignParameters(qyExec As DAO.QueryDef, _ ByVal lngStepId As Long, _ strVersion As String) ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to make them different ' from the field names. When the parameter names are ' the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr mstrSource = mstrModuleName & "AssignParameters" For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[st_id]" prmParam.Value = lngStepId </pre>
---	---	--

```

Case "[ver_no]"
    prmParam.Value = strVersion

Case "[it_tpy]"
    prmParam.Value = mintType

Case "[it_val]"
    prmParam.Value = mstrValue

Case "[seq_no]"
    prmParam.Value =
mintSequenceNo

Case Else
    ' Write the parameter name that is
faulty
    WriteError errInvalidParameter,
mstrSource, _
        prmParam.Name
    On Error GoTo 0
    Err.Raise vbObjectError +
mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:

    mstrSource = mstrModuleName &
"AssignParameters"
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
        mstrSource,
LoadResString(errAssignParametersFailed)

End Sub

Private Sub CheckDB()
    ' Check if the database object has been
initialized

    If mdbIteratorDB Is Nothing Then
        ShowError errInvalidDB
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidDB, _
            mstrModuleName,
LoadResString(errInvalidDB)
    End If

End Sub

Public Sub Delete(ByVal lngStepId As
Long, _
    strVersion As String)
    ' Deletes the step iterator record from the
database

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteIteratorErr
    mstrSource = mstrModuleName &
"DeleteIterator"

    ' There can be multiple iterators for a step.
    ' However the values that an iterator for a
step can
    ' assume will be unique, meaning that a
combination of
    ' the iterator_id and value will be unique.

```

```

    strDelete = "delete from iterator_values " &
_
    " where step_id = [st_id]" & _
    " and version_no = [ver_no]" & _
    " and iterator_value = [it_val] "

    Set qy =
mdbIteratorDB.CreateQueryDef(gstrEmptyStr
ing, strDelete)

    Call AssignParameters(qy, lngStepId,
strVersion)
    qy.Execute dbFailOnError

    qy.Close

Exit Sub

DeleteIteratorErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"DeleteIterator"
    On Error GoTo 0
    Err.Raise vbObjectError +
errDeleteIteratorFailed, _
        mstrSource, _
LoadResString(errDeleteIteratorFailed)

End Sub

Public Sub Update(ByVal lngStepId As Long,
strVersion As String)
    ' Updates the sequence no of the step iterator
record
    ' in the database

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo UpdateErr

    ' First check if the database object is valid
    Call CheckDB

    If mintType = gintValue Then
        ' If the iterator is of type value, only the
sequence of the values can get updated
        strUpdate = "Update iterator_values " & _
            " set sequence_no = [seq_no]" & _
            " where step_id = [st_id]" & _
            " and version_no = [ver_no]" & _
            " and iterator_value = [it_val] "
    Else
        ' If the iterator is of type range, only the
values can get updated
        strUpdate = "Update iterator_values " & _
            " set iterator_value = [it_val]" & _
            " where step_id = [st_id]" & _
            " and version_no = [ver_no]" & _
            " and type = [it_tpy] "

    End If

    Set qy =
mdbIteratorDB.CreateQueryDef(gstrEmptyStr
ing, strUpdate)

    ' Call a procedure to assign the parameter
values to the
    ' querydef object
    Call AssignParameters(qy, lngStepId,
strVersion)
    qy.Execute dbFailOnError

    qy.Close

Exit Sub

UpdateErr:

```

```

LogErrors Errors
mstrSource = mstrModuleName & "Update"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateConstraintFailed, _
    mstrSource, _
LoadResString(errUpdateConstraintFailed)

End Sub

Public Property Set NodeDB(vdata As Database)

    Set mdbIteratorDB = vdata

End Property

Public Property Get NodeDB() As Database

    Set NodeDB = mdbIteratorDB

End Property

Public Property Get Position() As Long

    Position = mlngPosition

End Property

Public Property Let Position(ByVal vdata As Long)

    mlngPosition = vdata

End Property

Public Property Let IteratorType(ByVal vdata As
ValueType)

    On Error GoTo TypeError
    mstrSource = mstrModuleName & "Type"

    ' These constants have been defined in the
enumeration,
    ' Type, which is exposed
    Select Case vdata
        Case gintFrom, gintTo, gintStep, gintValue
            mintType = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError + errTypeInvalid, _
                mstrSource,
LoadResString(errTypeInvalid)
    End Select

Exit Property

TypeError:
    LogErrors Errors
    mstrSource = mstrModuleName & "Type"
    On Error GoTo 0
    Err.Raise vbObjectError + errTypeInvalid, _
        mstrSource, LoadResString(errTypeInvalid)

End Property

Public Property Get IteratorType() As ValueType

    IteratorType = mintType

End Property

Public Sub Validate()

    ' No validations necessary for the iterator class

End Sub

Private Sub Class_Initialize()

```


<pre> ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp End Sub Private Property Let cNode_IndOperation(ByVal vdata As Operation) On Error GoTo IndOperationErr mstrSource = mstrModuleName & "IndOperation" ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ mstrSource, LoadResString(errInvalidOperation) End Select Exit Property IndOperationErr: LogErrors Errors mstrSource = mstrModuleName & "IndOperation" On Error GoTo 0 Err.Raise vbObjectError + errLetOperationFailed, _ mstrSource, LoadResString(errLetOperationFailed) End Property Private Property Get cNode_IndOperation() As Operation IndOperation = mintOperation End Property Private Property Set cNode_NodeDB(RHS As DAO.Database) Set mdbIteratorDB = RHS End Property Private Property Get cNode_NodeDB() As DAO.Database Set cNode_NodeDB = mdbIteratorDB End Property Private Property Let cNode_Position(ByVal vdata As Long) mlngPosition = vdata </pre>	<pre> End Property Private Property Get cNode_Position() As Long cNode_Position = mlngPosition End Property Private Sub cNode_Validate() ' No validations necessary for the iterator class End Sub Private Property Let cNode_Value(ByVal vdata As String) mstrValue = vdata End Property Private Property Get cNode_Value() As String Value = mstrValue End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cManager" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cManager.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a manager step. ' Implements the cStep class - carries out initializations ' and validations that are specific to manager steps. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Implements cStep ' Object variable to keep the step reference in Private mcStep As cStep ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cManager." Private Sub cStep_AddAllIterators() Call mcStep.AddAllIterators End Sub </pre>	<pre> Private Property Let cStep_StartDir(ByVal RHS As String) mcStep.StartDir = RHS End Property Private Property Get cStep_StartDir() As String cStep_StartDir = mcStep.StartDir End Property Private Sub cStep_Delete() Call mcStep.Delete End Sub Private Property Set cStep_NodeDB(RHS As DAO.Database) Set mcStep.NodeDB = RHS End Property Private Function cStep_IncVersionY() As String cStep_IncVersionY = mcStep.IncVersionY End Function Private Function cStep_IsNewVersion() As Boolean cStep_IsNewVersion = mcStep.IsNewVersion End Function Private Function cStep_OldVersionNo() As String cStep_OldVersionNo = mcStep.OldVersionNo End Function Private Function cStep_IncVersionX() As String cStep_IncVersionX = mcStep.IncVersionX End Function Private Sub cStep_UpdateIteratorVersion() Call mcStep.UpdateIteratorVersion End Sub Private Function cStep_IteratorCount() As Long cStep_IteratorCount = mcStep.IteratorCount End Function Private Sub cStep_UnloadIterators() Call mcStep.UnloadIterators End Sub Private Sub cStep_DeleteIterator(cItRecord As cIterator) Call mcStep.DeleteIterator(cItRecord) End Sub Private Property Get cStep_IteratorName() As String cStep_IteratorName = mcStep.IteratorName End Property Private Property Let cStep_IteratorName(ByVal RHS As String) </pre>
---	---	---

<pre> mcStep.IteratorName = RHS End Property Private Sub cStep_SaveIterators() Call mcStep.SaveIterators End Sub Private Sub cStep_LoadIterator(cItRecord As cIterator) Call mcStep.LoadIterator(cItRecord) End Sub Private Property Let cStep_Position(ByVal RHS As Long) mcStep.Position = RHS End Property Private Sub cStep_InsertIterator(cItRecord As cIterator) Call mcStep.InsertIterator(cItRecord) End Sub Private Function cStep_Iterators() As Variant cStep_Iterators = mcStep.Iterators End Function Private Sub cStep_ModifyIterator(cItRecord As cIterator) Call mcStep.ModifyIterator(cItRecord) End Sub Private Sub cStep_RemoveIterator(cItRecord As cIterator) Call mcStep.RemoveIterator(cItRecord) End Sub Private Sub cStep_UpdateIterator(cItRecord As cIterator) Call mcStep.UpdateIterator(cItRecord) End Sub Private Sub cStep_AddIterator(cItRecord As cIterator) Call mcStep.AddIterator(cItRecord) End Sub Private Property Get cStep_Position() As Long cStep_Position = mcStep.Position End Property Private Function cStep_Clone(Optional cCloneStep As cStep) As cStep Dim cNewManager As cManager Set cNewManager = New cManager </pre>	<pre> Set cStep_Clone = mcStep.Clone(cNewManager) End Function Private Property Get cStep_IndOperation() As Operation cStep_IndOperation = mcStep.IndOperation End Property Private Property Let cStep_IndOperation(ByVal RHS As Operation) mcStep.IndOperation = RHS End Property Private Property Get cStep_NextStepId() As Long cStep_NextStepId = mcStep.NextStepId End Property Private Property Let cStep_OutputFile(ByVal RHS As String) mcStep.OutputFile = RHS End Property Private Property Get cStep_OutputFile() As String cStep_OutputFile = mcStep.OutputFile End Property Private Property Let cStep_ErrorFile(ByVal RHS As String) mcStep.ErrorFile = RHS End Property Private Property Get cStep_ErrorFile() As String cStep_ErrorFile = mcStep.ErrorFile End Property Private Property Let cStep_LogFile(ByVal RHS As String) ' mcStep.LogFile = RHS End Property Private Property Get cStep_LogFile() As String ' cStep_LogFile = mcStep.LogFile End Property Private Property Let cStep_ArchivedFlag(ByVal RHS As Boolean) mcStep.ArchivedFlag = RHS End Property </pre>	<pre> Private Property Get cStep_ArchivedFlag() As Boolean cStep_ArchivedFlag = mcStep.ArchivedFlag End Property Private Property Get cStep_NodeDB() As DAO.Database Set cStep_NodeDB = mcStep.NodeDB End Property Private Sub Class_Initialize() ' Create the object Set mcStep = New cStep ' Initialize the object with valid values for a manager step ' The global flag should be the first field to be initialized ' since subsequent validations might try to check if the ' step being created is global mcStep.GlobalFlag = False ' mcStep.GlobalRunMethod = gintNoOption mcStep.StepType = gintManagerStep ' Since the manager step does not take any action, the step ' text and file name will always be empty mcStep.StepText = gstrEmptyString mcStep.StepTextFile = gstrEmptyString ' Since the manager step does not take any action, execution ' properties for the step will be empty mcStep.ExecutionMechanism = gintNoOption mcStep.FailureDetails = gstrEmptyString mcStep.ContinuationCriteria = gintNoOption End Sub Private Sub Class_Terminate() ' Remove the step object Set mcStep = Nothing End Sub Private Sub cStep_Add() ' Call the Add method of the step class to carry out the insert mcStep.Add End Sub Private Property Get cStep_ContinuationCriteria() As ContinuationCriteria cStep_ContinuationCriteria = mcStep.ContinuationCriteria End Property Private Property Let cStep_ContinuationCriteria(ByVal RHS As ContinuationCriteria) ' Since a manager step cannot take any action, the continuation ' criteria property does not apply to it mcStep.ContinuationCriteria = gintNoOption End Property </pre>
---	--	---

Private Property Let cStep_DegreeParallelism(ByVal RHS As String) mcStep.DegreeParallelism = RHS End Property Private Property Get cStep_DegreeParallelism() As String cStep_DegreeParallelism = mcStep.DegreeParallelism End Property Private Sub cStep_DeleteStep() On Error GoTo cStep_DeleteStepErr mstrSource = mstrModuleName & "cStep_DeleteStep" mcStep.Delete Exit Sub cStep_DeleteStepErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_DeleteStep" On Error GoTo 0 Err.Raise vbObjectError + errDeleteStepFailed, _ mstrSource, _ LoadResString(errDeleteStepFailed) End Sub Private Property Get cStep_EnabledFlag() As Boolean cStep_EnabledFlag = mcStep.EnabledFlag End Property Private Property Let cStep_EnabledFlag(ByVal RHS As Boolean) mcStep.EnabledFlag = RHS End Property Private Property Let cStep_ExecutionMechanism(ByVal RHS As ExecutionMethod) ' Since a manager step cannot take any action, the Execution ' Mechanism property does not apply to it mcStep.ExecutionMechanism = gintNoOption End Property Private Property Get cStep_ExecutionMechanism() As ExecutionMethod cStep_ExecutionMechanism = mcStep.ExecutionMechanism End Property	Private Property Let cStep_FailureDetails(ByVal RHS As String) ' Since a manager step cannot take any action, the Failure ' Details property does not apply to it mcStep.FailureDetails = gstrEmptyString End Property Private Property Get cStep_FailureDetails() As String cStep_FailureDetails = mcStep.FailureDetails End Property Private Property Get cStep_GlobalFlag() As Boolean cStep_GlobalFlag = mcStep.GlobalFlag End Property Private Property Let cStep_GlobalFlag(ByVal RHS As Boolean) ' Set the global flag to false - this flag is initialized when ' an instance of the class is created. Just making sure that ' nobody changes the value inadvertently mcStep.GlobalFlag = False End Property Private Sub cStep_Modify() ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Let cStep_ParentStepId(ByVal RHS As Long) mcStep.ParentStepId = RHS End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String) mcStep.ParentVersionNo = RHS End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property	Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo End Property Private Property Let cStep_StepId(ByVal RHS As Long) mcStep.StepId = RHS End Property Private Property Get cStep_StepId() As Long cStep_StepId = mcStep.StepId End Property Private Property Let cStep_StepLabel(ByVal RHS As String) mcStep.StepLabel = RHS End Property Private Property Get cStep_StepLabel() As String cStep_StepLabel = mcStep.StepLabel End Property Private Property Let cStep_StepLevel(ByVal RHS As Integer) mcStep.StepLevel = RHS End Property Private Property Get cStep_StepLevel() As Integer cStep_StepLevel = mcStep.StepLevel End Property Private Property Let cStep_StepText(ByVal RHS As String) ' Since the manager step does not take any action, the step ' text and file name will always be empty mcStep.StepText = gstrEmptyString End Property Private Property Get cStep_StepText() As String cStep_StepText = mcStep.StepText End Property Private Property Let cStep_StepTextFile(ByVal RHS As String)
--	---	--

```

' Since the manager step does not take any
action, the step
' text and file name will always be empty
mcStep.StepTextFile = gstrEmptyString

End Property

Private Property Get cStep_StepTextFile()
As String

    cStep_StepTextFile =
mcStep.StepTextFile

End Property

Private Property Let cStep_StepType(RHS
As gintStepType)

    mcStep.StepType = gintManagerStep

End Property

Private Property Get cStep_StepType() As
gintStepType

    cStep_StepType = mcStep.StepType

End Property

Private Sub cStep_Validate()
' The validate routines for each of the
steps will
' carry out the specific validations for the
type and
' call the generic validation routine

    On Error GoTo cStep_ValidateErr
mstrSource = mstrModuleName &
"cStep_Validate"

' Validations specific to manager steps

' Check if the step text or a file name has
been
' specified
If Not StringEmpty(mcStep.StepText) Or
Not StringEmpty(mcStep.StepTextFile)
Then
    ShowError
errTextAndFileNullForManager
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        gstrSource, _
        LoadResString(errValidateFailed)
End If

If mcStep.ExecutionMechanism <>
gintNoOption Then
    ShowError
errExecutionMechanismInvalid
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        gstrSource, _
        LoadResString(errValidateFailed)
End If

If mcStep.FailureDetails <>
gstrEmptyString Then
    ShowError
errFailureDetailsNullForMgr
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _

```

```

gstrSource, _
    LoadResString(errValidateFailed)
End If

If mcStep.ContinuationCriteria <>
gintNoOption Then
    ShowError errContCriteriaInvalid
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        gstrSource, _
        LoadResString(errValidateFailed)
End If

mcStep.Validate

Exit Sub

cStep_ValidateErr:
LogErrors Errors
mstrSource = mstrModuleName &
"cStep_Validate"
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        mstrSource, _
        LoadResString(errValidateFailed)
End Sub

Private Property Let cStep_VersionNo(ByVal
RHS As String)

    mcStep.VersionNo = RHS

End Property

Private Property Get cStep_VersionNo() As
String

    cStep_VersionNo = mcStep.VersionNo

End Property

Private Property Let
cStep_WorkspaceId(ByVal RHS As Long)

    mcStep.WorkspaceId = RHS

End Property

Private Property Get cStep_WorkspaceId() As
Long

    cStep_WorkspaceId = mcStep.WorkspaceId

End Property
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cNode"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cNode.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Defines the properties that an
object has to implement.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

```

```

'
Option Explicit

Public Property Get IndOperation() As Operation
End Property
Public Property Let IndOperation(ByVal vdata As
Operation)
End Property
Public Sub Validate()
End Sub
Public Property Get Value() As String
End Property
Public Property Let Value(ByVal vdata As String)
End Property

Public Property Get NodeDB() As Database
End Property
Public Property Set NodeDB(vdata As Database)
End Property

Public Property Get Position() As Long
End Property
Public Property Let Position(ByVal vdata As Long)
End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cNodeCollections"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cNodeCollections.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Implements an array of objects.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Node counter
Private mlngNodeCount As Long
Private mdbNodeDb As Database
Private mcarrNodes() As Object

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cNodeCollections."

Public Property Set Item(ByVal Position As Long,
ByVal objNode As Object)

' Returns the element at the passed in position in
the array
If Position >= 0 And Position < mlngNodeCount
Then
    Set mcarrNodes(Position) = objNode
Else
    On Error GoTo 0
    Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
        LoadResString(errItemDoesNotExist)
End If

End Property

```

```

Public Property Get Item(ByVal Position As Long) As Object
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in
position in the array
If Position >= 0 And Position <
mIngnodeCount Then
Set Item = mcarrNodes(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _

LoadResString(errItemDoesNotExist)
End If

End Property

Public Sub Commit(ByVal cSaveObj As Object, _
ByVal lngIndex As Long)
' This procedure checks if any changes
have been made to the
' passed in object. If so, it calls the
corresponding method
' to commit the changes.

On Error GoTo CommitErr
mstrSource = mstrModuleName &
"Commit"

Select Case cSaveObj.IndOperation
Case QueryOp
' No changes were made to the
queried parameter.
' Do nothing

Case InsertOp
cSaveObj.Add
cSaveObj.IndOperation = QueryOp

Case UpdateOp
cSaveObj.Modify
cSaveObj.IndOperation = QueryOp

Case DeleteOp
cSaveObj.Delete
' Now we can remove the record
from the array
Call Unload(lngIndex)

End Select

Exit Sub

CommitErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Commit"
On Error GoTo 0
Err.Raise vbObjectError +
errCommitFailed, _
mstrSource, _
LoadResString(errCommitFailed)

End Sub
Public Sub Save(ByVal lngWorkspace As Long)
' Calls a procedure to commit all changes
for the passed
' in workspace.

Dim lngIndex As Long

```

```

On Error GoTo SaveErr

' Find all parameters in the array with a
matching workspace id
' It is important to step backwards through
the array, since
' we delete parameter records as we go
along!
For lngIndex = mIngnodeCount - 1 To 0
Step -1
If mcarrNodes(lngIndex).WorkspaceId =
lngWorkspace Then

' Call a procedure to commit all
changes to the
' parameter record, if any
Call Commit(mcarrNodes(lngIndex),
lngIndex)

End If
Next lngIndex

Exit Sub

SaveErr:
LogErrors Errors
mstrSource = mstrModuleName & "Save"
On Error GoTo 0
Err.Raise vbObjectError + errSaveFailed, _
mstrSource, _
LoadResString(errSaveFailed)

End Sub
Public Property Get Count() As Long

Count = mIngnodeCount

End Property

Public Property Get NodeDB() As Database

Set NodeDB = mdbNodesDb

End Property
Public Property Set NodeDB(vdata As Database)

Set mdbNodesDb = vdata

End Property

Public Sub Load(cNodeToLoad As Object)
' Adds the passed in object to the array

On Error GoTo LoadErr

' If this procedure is called by the add to
array procedure,
' the database object has already been
initialized
If cNodeToLoad.NodeDB Is Nothing Then

' All the Nodes will be initialized with the
database
' objects before being added to the array
Set cNodeToLoad.NodeDB =
mdbNodesDb

End If

ReDim Preserve
mcarrNodes(mIngnodeCount)

' Set the newly added element in the array to
the passed in Node

```

```

cNodeToLoad.Position = mIngnodeCount
Set mcarrNodes(mIngnodeCount) =
cNodeToLoad

mIngnodeCount = mIngnodeCount + 1

Exit Sub

LoadErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errLoadFailed,
mstrModuleName & "Load", _
LoadResString(errLoadFailed)

End Sub
Public Sub Unload(lngDeletePosition As Long)
' Unloads the passed in object from the array

On Error GoTo UnloadErr

If lngDeletePosition < (mIngnodeCount - 1)
Then

' Set the Node at the position being deleted to
' the last Node in the Node array
Set mcarrNodes(lngDeletePosition) =
mcarrNodes(mIngnodeCount - 1)
mcarrNodes(lngDeletePosition).Position =
lngDeletePosition
End If

' Delete the last Node from the array
mIngnodeCount = mIngnodeCount - 1
If mIngnodeCount > 0 Then
ReDim Preserve mcarrNodes(0 To
mIngnodeCount - 1)
Else
ReDim mcarrNodes(0)
End If

Exit Sub

UnloadErr:
LogErrors Errors
mstrSource = mstrModuleName & "Unload"
On Error GoTo 0
Err.Raise vbObjectError + errUnloadFailed, _
mstrSource, _
LoadResString(errUnloadFailed)

End Sub
Public Sub Delete(lngDeletePosition As Long)
' Deletes the object at the specified position in the
' array

Dim cDeleteObj As Object

On Error GoTo DeleteErr
mstrSource = mstrModuleName & "Delete"

Set cDeleteObj = mcarrNodes(lngDeletePosition)

If cDeleteObj.IndOperation = InsertOp Then
' If we are deleting a record that has just been
inserted,
' blow it away
Call Unload(lngDeletePosition)
Else
' Set the operation for the deleted object to
indicate a
' delete - we actually delete the element only at
the time
' of a save operation
cDeleteObj.IndOperation = DeleteOp

```

End If	' Call a procedure to load the record in the array	End Function
Exit Sub	Call Load(cNodeToAdd)	
DeleteErr:	Exit Sub	Public Function JulianDateToString(dt64Bit As Currency) As String
LogErrors Errors	AddErr:	Dim lYear As Long
mstrSource = mstrModuleName & "Delete"	LogErrors Errors	Dim lMonth As Long
On Error GoTo 0	mstrSource = mstrModuleName & "Add"	Dim lDay As Long
Err.Raise vbObjectError +	On Error GoTo 0	Dim lHour As Long
errDeleteFailed, _	Err.Raise vbObjectError + errAddFailed, _	Dim lMin As Long
mstrSource, _	mstrSource, _	Dim lSec As Long
LoadResString(errDeleteFailed)	LoadResString(errAddFailed)	Dim lMs As Long
End Sub	End Sub	
Public Sub Modify(cModifiedNode As Object)	Private Sub Class_Terminate()	Call JulianToTime(dt64Bit, lYear, lMonth, lDay, lHour, lMin, lSec, lMs)
' Sets the object at the passed in position to the	ReDim mcarrNodes(0)	JulianDateToString = Format\$(lYear, gsYearFormat) & gsDateSeparator & _
' modified object passed in	mlngNodeCount = 0	Format\$(lMonth, gsDtFormat) & gsDateSeparator & _
On Error GoTo ModifyErr	End Sub	Format\$(lDay, gsDtFormat) & gstrBlank & _
' First check if the record is valid - all objects that	Attribute VB_Name = "Common"	Format\$(lHour, gsTmFormat) & gsTimeSeparator & _
' use this collection class must have a Validate routine	' FILE: Common.bas	Format\$(lMin, gsTmFormat) & gsTimeSeparator & _
cModifiedNode.Validate	' Microsoft TPC-H Kit Ver. 1.00	Format\$(lSec, gsTmFormat) & gsMsSeparator & _
' If we are updating a record that hasn't yet been inserted,	' Copyright Microsoft, 1999	Format\$(lMs, gsMSecondFormat)
' do not change the operation indicator - or we try to update	' All Rights Reserved	End Function
' a non-existent record	' PURPOSE: Module containing common functionality throughout	Public Sub DeleteFile(strFile As String, Optional ByVal bCheckIfEmpty As Boolean = False)
If cModifiedNode.IndOperation <> InsertOp Then	' StepMaster	' Ensure that there is only a single file of the name before delete, since
' Set the operations to indicate an update	' Contact: Reshma Tharamal (reshmat@microsoft.com)	' Kill supports wildcards and can potentially delete a number of files
cModifiedNode.IndOperation = UpdateOp	Option Explicit	Dim strTemp As String
UpdateOp	Private Const mstrModuleName As String = "Common."	If CheckFileExists(strFile) Then
End If	' Used to separate the variable data from the constant error	If bCheckIfEmpty Then
' Modify the object at the queried position - the Position	' message being raised when a context-sensitive error is displayed	If FileLen(strFile) = 0 Then
' will be maintained by this class	Private Const mintDelimiter As String = " : "	Kill strFile
Set mcarrNodes(cModifiedNode.Position) = cModifiedNode	Private Const mstrFormatString = "mmddyy"	End If
Exit Sub	' Identifiers for the different labels that need to be loaded	Else
ModifyErr:	' into the tree view for each workspace	Kill strFile
LogErrors Errors	Public Const mstrWorkspacePrefix = "W"	End If
mstrSource = mstrModuleName & "Modify"	Public Const mstrParameterPrefix = "P"	End If
On Error GoTo 0	Public Const mstrParamConnectionPrefix = "C"	End Sub
Err.Raise vbObjectError +	Public Const mstrConnectionDtlPrefix = "N"	Public Function CheckFileExists(strFile As String) As Boolean
errModifyFailed, _	Public Const mstrParamExtensionPrefix = "E"	' Returns true if the passed in file exists
mstrSource, _	Public Const mstrParamBuiltInPrefix = "B"	' Raises an error if multiple files are found (filename contains a wildcard)
LoadResString(errModifyFailed)	Public Const gstrGlobalStepPrefix = "G"	CheckFileExists = False
End Sub	Public Const gstrManagerStepPrefix = "M"	
Public Sub Add(cNodeToAdd As Object)	Public Const gstrWorkerStepPrefix = "S"	If Not StringEmpty(Dir(strFile)) Then
On Error GoTo AddErr	Public Const gstrDummyPrefix = "D"	If Not StringEmpty(Dir()) Then
Set cNodeToAdd.NodeDB = mdbNodeDb	Public Const mstrLabelPrefix = "L"	On Error GoTo 0
' First check if the record is valid	Public Const mstrInstancePrefix = "I"	Err.Raise vbObjectError +
cNodeToAdd.Validate	Public Function LabelStep(lngWorkspaceIdentifier As Long) As String	errDeleteSingleFile, _
' Set the operation to indicate an insert	' Returns the step label for the workspace identifier passed in	mstrModuleName & "DeleteFile",
cNodeToAdd.IndOperation = InsertOp	' Basically this is a wrapper around the MakeKeyValid function	LoadResString(errDeleteSingleFile)
	LabelStep = MakeKeyValid(gintStepLabel, gintStepLabel, lngWorkspaceIdentifier)	End If
		CheckFileExists = True
		End If
		End Function
		Public Function GetVersionString() As String

```

GetVersionString = "Version " & gsVersion
End Function

Function IsLabel(strKey As String) As Boolean

    ' The tree view control on frmMain can
    contain two types of
    ' nodes -
    ' 1. Nodes that contain data for the
    workspace - this could
    ' be data for the different types of steps or
    parameters
    ' 2. Nodes that display static data - these
    kind of nodes
    ' are referred to as label nodes e.g.
    "Global Steps" is a
    ' label node
    ' This function returns True if the passed
    in key corresponds
    ' to a label node

    IsLabel = InStr(strKey, mstrLabelPrefix)
    > 0

End Function

Function MakeKeyValid(IngIdentifier As Long, _
    intTypeOfNode As Integer, _
    Optional ByVal WorkspaceId As Long = 0, _
    Optional ByVal InstanceId As Long = 0) As String

    ' We use a numbering scheme while
    loading the tree view with
    ' all node data, since it needs a unique key
    and we want to
    ' use the key to identify the data it
    contains.
    ' Moreover, add a character to the
    beginning of the identifier
    ' so that the tree view control accepts it as
    a valid string,
    ' viz. "456" doesn't work, so change it to
    "W456"
    ' The general scheme is to concatenate a
    Label with the Identifier
    ' e.g A Global Step Node will have the
    Label, G and the Step Id
    ' concatenated to form the unique key
    ' The list of all such node types is given
    below
    ' 1. "W" + Workspace_Id for Workspace
    nodes
    ' 2. "P" + Parameter_Id for Parameter
    nodes
    ' 3. "M" + Step_Id for Manager Step
    nodes
    ' 4. "S" + Step_Id for Worker Step nodes
    ' 5. "G" + Step_Id for Global Step nodes
    ' 6. Instance_id + "I" + Step_Id for
    Instance nodes
    ' 7. Workspace_id + "L" + the label
    identifier = node type for all Label nodes
    ' Since the manager, worker and global
    steps are stored in the
    ' same table and the step identifiers will
    always be unique, we
    ' can use the same character as the prefix,
    but this is a
    ' convenient way to know the type of step
    being processed.

```

```

' The workspace id is appended to the label
identifier to make
' it unique, since multiple workspaces may
be open during a session
' Strip the prefix characters off while saving
the Ids to the db

Dim strPrefixChar As String

On Error GoTo MakeKeyValidErr
gstrSource = mstrModuleName &
"MakeKeyValid"

Select Case intTypeOfNode
Case gintWorkspace
    strPrefixChar = mstrWorkspacePrefix
Case gintGlobalStep
    strPrefixChar = gstrGlobalStepPrefix
Case gintManagerStep
    strPrefixChar = gstrManagerStepPrefix
Case gintWorkerStep
    strPrefixChar = gstrWorkerStepPrefix
Case gintRunManager, gintRunWorker
    If InstanceId = 0 Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errMandatoryParameterMissing, _
        gstrSource, _

LoadResString(errMandatoryParameterMissin
g)
    End If
    ' Concatenate the instance identifier and
    the step
    ' identifier to form a unique key
    strPrefixChar =
Trim$(Str$(InstanceId)) & mstrInstancePrefix
Case gintParameter
    strPrefixChar = mstrParameterPrefix
Case gintNodeParamConnection
    strPrefixChar =
mstrParamConnectionPrefix
Case gintConnectionDtl
    strPrefixChar =
mstrConnectionDtlPrefix
Case gintNodeParamExtension
    strPrefixChar =
mstrParamExtensionPrefix
Case gintNodeParamBuiltIn
    strPrefixChar = mstrParamBuiltInPrefix
Case gintGlobalsLabel,
gintParameterLabel,
gintParamConnectionLabel, _
gintConnDtlLabel, _
gintParamExtensionLabel,
gintParamBuiltInLabel, gintGlobalStepLabel, _
gintStepLabel
    If WorkspaceId = 0 Then
        ' The Workspace Id has to be
        specified for a label node
        ' Otherwise it will not be possible to
        generate unique label
        ' identifiers if multiple workspaces
        are open
        On Error GoTo 0
        Err.Raise vbObjectError +
errWorkspaceIdMandatory, _
        gstrSource, _

LoadResString(errWorkspaceIdMandatory)
    End If
    ' For all labels, the workspace identifier
    and the
    ' label prefix are concatenated to form
    the key

```

```

    strPrefixChar = Trim$(Str$(WorkspaceId))
    & mstrLabelPrefix
    Case Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidNodeType, _
        gstrSource, _
        LoadResString(errInvalidNodeType)
    End Select

    MakeKeyValid = strPrefixChar &
Trim$(Str$(IngIdentifier))

Exit Function

MakeKeyValidErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errMakeKeyValidFailed, _
    gstrSource, _
    LoadResString(errMakeKeyValidFailed)

End Function

Function MakeIdentifierValid(strKey As String) As Long

    ' Returns the Identifier corresponding to the
    passed in key
    ' (Reverse of what was done in MakeKeyValid)

    On Error GoTo MakeIdentifierValidErr

    If IsLabel(strKey) Then
        ' If the key corresponds to a label node, the
        identifier
        ' appears to the right of the label prefix
        MakeIdentifierValid = Val(Mid(strKey,
InStr(strKey, mstrLabelPrefix) + 1))
    ElseIf InStr(strKey, mstrInstancePrefix) = 0 Then
        ' For all other nodes, stripping the first
        character off
        ' returns a valid Id
        MakeIdentifierValid = Val(Mid(strKey, 2))
    Else
        ' Instance node - strip of all characters till the
        ' instance prefix
        MakeIdentifierValid = Val(Mid(strKey,
InStr(strKey, mstrInstancePrefix) + 1))
    End If

    Exit Function

MakeIdentifierValidErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errMakeIdentifierValidFailed, _
    mstrModuleName & "MakeIdentifierValid",
    _

LoadResString(errMakeIdentifierValidFailed)

End Function
Public Function IsInstanceNode(strNodeKey As String) As Boolean

    ' Returns true if the passed in node key
    corresponds to a step instance
    IsInstanceNode = InStr(strNodeKey,
mstrInstancePrefix) > 0

End Function

```

```

Public Function IsBuiltInLabel(strNodeKey
As String) As Boolean

    ' Returns true if the passed in node key
    corresponds to a step instance
    IsBuiltInLabel = (IsLabel(strNodeKey)
    And _
        (MakeIdentifierValid(strNodeKey) =
        gintParamBuiltInLabel))

End Function

Public Sub ShowBusy()
    ' Modifies the mousepointer to indicate
    that the
    ' application is busy

    On Error Resume Next

    Screen.MousePointer = vbHourglass

End Sub

Public Sub ShowFree()
    ' Modifies the mousepointer to indicate
    that the
    ' application has finished processing and
    is ready
    ' to accept user input

    On Error Resume Next

    Screen.MousePointer = vbDefault

End Sub

Public Function InstrR(strMain As String, _
    strSearch As String) As Integer
    ' Finds the last occurrence of the passed in
    string

    Dim intPos As Integer
    Dim intPrev As Integer

    On Error GoTo InstrRErr

    intPrev = intPos
    intPos = InStr(1, strMain, strSearch)

    Do While intPos > 0
        intPrev = intPos
        intPos = InStr(intPos + 1, strMain,
        strSearch)
    Loop
    InstrR = intPrev

    Exit Function

InstrRErr:
    Call LogErrors(Errors)
    gstrSource = mstrModuleName &
    "InstrR"
    On Error GoTo 0
    Err.Raise vbObjectError +
    errInstrRFailed, _
        gstrSource, _
        LoadResString(errInstrRFailed)

End Function

Public Function GetDefaultDir(lWspId As
Long, WspParameters As cArrParameters)
As String

    Dim sDir As String
    sDir = SubstituteParameters( _

```

```

        gstrEnvVarSeparator &
        PARAM_DEFAULT_DIR &
        gstrEnvVarSeparator, _
        lWspId,
        WspParameters:=WspParameters)
    MakePathValid (sDir & gstrFileSeparator &
    "a.txt")
    GetDefaultDir = GetShortName(sDir)
    If StringEmpty(GetDefaultDir) Then
        GetDefaultDir = App.Path
    End If

End Function

Public Sub AddArrayElement(ByRef
arrNodes() As Object, _
    ByVal objToAdd As Object, _
    ByRef lngCount As Long)
    ' Adds the passed in object to the array

    On Error GoTo AddArrayElementErr

    ' Increase the array dimension and add the
    object to it
    ReDim Preserve arrNodes(lngCount)
    Set arrNodes(lngCount) = objToAdd
    lngCount = lngCount + 1

Exit Sub

AddArrayElementErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
    "AddArrayElement"
    On Error GoTo 0
    Err.Raise vbObjectError +
    errAddArrayElementFailed, _
        gstrSource, _

LoadResString(errAddArrayElementFailed)

End Sub

Public Function CheckForNullField(rstRecords
As Recordset, strFieldName As String) As
String

    ' Returns an empty string if a given field is
    null

    On Error GoTo CheckForNullFieldErr

    If IsNull(rstRecords.Fields(strFieldName))
    Then
        CheckForNullField = gstrEmptyString
    Else
        CheckForNullField =
        rstRecords.Fields(strFieldName)
    End If
    Exit Function

CheckForNullFieldErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
    errCheckForNullFieldFailed, _
        mstrModuleName &
        "CheckForNullField", _

LoadResString(errCheckForNullFieldFailed)

End Function

```

```

Public Function ErrorOnNullField(rstRecords As
Recordset, strFieldName As String) As Variant

    ' If a given field is null, raises an error
    ' Else, returns the field value in a variant
    ' The calling function must convert the return
    value to the
    ' appropriate type
    On Error GoTo ErrorOnNullFieldErr
    gstrSource = mstrModuleName &
    "ErrorOnNullField"

    If IsNull(rstRecords.Fields(strFieldName)) Then
        On Error GoTo 0
        Err.Raise vbObjectError +
        errMandatoryFieldNull, _
            gstrSource, _
            strFieldName & mintDelimiter &
            LoadResString(errMandatoryFieldNull)
    Else
        ErrorOnNullField =
        rstRecords.Fields(strFieldName)
    End If
    Exit Function

ErrorOnNullFieldErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
    errUnableToCheckNull, _
        gstrSource, _
        strFieldName & mintDelimiter &
        LoadResString(errUnableToCheckNull)

End Function

Public Function StringEmpty(strCheckString As
String) As Boolean

    StringEmpty = (strCheckString =
    gstrEmptyString)

End Function

Public Function GetIteratorValue(cStepIterators As
cRunColIt, _
    ByVal strItName As String)

    Dim lngIndex As Long
    Dim strValue As String

    On Error GoTo GetIteratorValueErr
    gstrSource = mstrModuleName &
    "GetIteratorValue"

    ' Find the iterator in the Iterators collection
    For lngIndex = 0 To cStepIterators.Count - 1
        If cStepIterators(lngIndex).IteratorName =
        strItName Then
            strValue = cStepIterators(lngIndex).Value
            Exit For
        End If
    Next lngIndex

    If lngIndex > cStepIterators.Count - 1 Then
        ' The iterator has not been defined for the
        branch
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError +
        errParamNameInvalid, _
            gstrSource, _
            LoadResString(errParamNameInvalid)
    End If

    GetIteratorValue = strValue
    Exit Function

```



```

GetIteratorValueErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName &
"GetIteratorValue"
On Error GoTo 0
Err.Raise vbObjectError +
errGetParamValueFailed, _
gstrSource, _

LoadResString(errGetParamValueFailed)

End Function
Public Function SubstituteParameters(ByVal
strComString As String, _
ByVal lngWorkspaceId As Long, _
Optional StepIterators As cRunCollt =
Nothing, _
Optional WspParameters As
cArrParameters = Nothing) As String
' This function substitutes all parameter
names and
' environment variables in the passed in
string with
' their values. It also substitutes the value
for the
' iterators, if any.
' Since the syntax is to enclose parameter
names and
' environment variables in "%", we check
if a given
' variable is a parameter - if so, we
substitute the
' parameter value - else we try to get the
value from
' the environment

Dim intPos As Integer
Dim intEndPos As Integer
Dim strEnvVariable As String
Dim strValue As String
Dim strCommand As String
Dim cTempStr As cStringSM

' Initialize the return value of the function
to the
' passed in command
strCommand = strComString

If WspParameters Is Nothing Then Set
WspParameters = gcParameters

Set cTempStr = New cStringSM

intPos = InStr(strCommand,
gstrEnvVarSeparator)
Do While intPos <> 0
If Mid(strCommand, intPos + 1, 1) =
gstrEnvVarSeparator Then
' Wildcard character - to be
substituted by a single % - later!
intPos = intPos + 2
If intPos > Len(strCommand) Then
Exit Do
Else
' Extract the environment variable
from the passed
' in string
intEndPos = InStr(intPos + 1,
strCommand, gstrEnvVarSeparator)

If intEndPos > 0 Then

```

```

strEnvVariable = Mid(strCommand,
intPos + 1, intEndPos - intPos - 1)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errParamSeparatorMissing, _
gstrSource, _

LoadResString(errParamSeparatorMissing)
End If
strValue = gstrEmptyString

' Get the value of the variable and call a
function
' to replace the variable with it's value
strValue = GetValue(strEnvVariable,
lngWorkspaceId, StepIterators,
WspParameters)
' The function raises an error if the
variable is
' not found
strCommand =
cTempStr.ReplaceSubString(strCommand, _
gstrEnvVarSeparator &
strEnvVariable & gstrEnvVarSeparator, _
strValue)
End If

intPos = InStr(intPos, strCommand,
gstrEnvVarSeparator)
Loop

strCommand =
cTempStr.ReplaceSubString(strCommand, _
gstrEnvVarSeparator &
gstrEnvVarSeparator, gstrEnvVarSeparator)

Set cTempStr = Nothing
SubstituteParameters = strCommand

End Function
Private Function GetValue(ByVal strParameter
As String, _
ByVal lngWorkspaceId As Long, _
cStepIterators As cRunCollt, _
WspParameters As cArrParameters) As
String
' This function returns the value for the
passed in
' parameter - it may be a workspace
parameter, an
' environment variable or an iterator

Dim intPos As Integer
Dim intEndPos As Integer
Dim strVariable As String
Dim strValue As String
Dim cParamRec As cParameter

On Error GoTo GetValueErr

' Initialize the return value of the function to
the
' empty
strValue = gstrEmptyString

intPos = InStr(strParameter,
gstrEnvVarSeparator)
If intPos > 0 Then
' Extract the variable from the passed in
string
intEndPos = InStr(intPos + 1,
strParameter, gstrEnvVarSeparator)
If intEndPos = 0 Then
intEndPos = Len(strParameter)

```

```

End If

strVariable = Mid(strParameter, intPos + 1,
intEndPos - intPos - 1)
Else
' The separator character has not been passed
in -
' try to find the value of the passed in
parameter
strVariable = strParameter
End If

If Not StringEmpty(strVariable) Then
' Check if this is the timestamp parameter first
If strVariable = gstrTimeStamp Then
strValue = Format$(Now, mstrFormatString,
_
vbUseSystemDayOfWeek,
vbUseSystem)
Else
' Try to find a parameter for the workspace
with
' the same name
Set cParamRec =
WspParameters.GetParameterValue(lngWorkspaceId, _
strVariable)
If cParamRec Is Nothing Then
If Not cStepIterators Is Nothing Then
' If the string is not a parameter, then
check
' if it is an iterator
strValue =
GetIteratorValue(cStepIterators, strVariable)
End If

If StringEmpty(strValue) Then
' Neither - Check if it is an environment
variable
strValue = Environ$(strVariable)
If StringEmpty(strValue) Then
On Error GoTo 0
WriteError errSubValuesFailed, _
OptArgs:="Invalid parameter: "
& gstrSQ & strVariable & gstrSQ
Err.Raise vbObjectError +
errSubValuesFailed, _
mstrModuleName &
"GetValue", _

LoadResString(errSubValuesFailed) & "Invalid
parameter: " & gstrSQ & strVariable & gstrSQ
End If
End If
Else
strValue = cParamRec.ParameterValue
End If
End If
End If

GetValue = strValue

Exit Function

GetValueErr:
If Err.Number = vbObjectError +
errParamNameInvalid Then
' If the parameter has not been defined for the
' workspace then check if it is an environment
' variable
Resume Next
End If

' Log the error code raised by Visual Basic
Call LogErrors(Errors)

```

```

gstrSource = mstrModuleName &
"GetValue"
WriteError errSubValuesFailed,
gstrSource, "Parameter: " & gstrSQ &
strVariable & gstrSQ
On Error GoTo 0
Err.Raise vbObjectError +
errSubValuesFailed, _
gstrSource, _
LoadResString(errSubValuesFailed)
& "Parameter: " & gstrSQ & strVariable &
gstrSQ

End Function
Public Function SQLFixup(strField As
String) As String
' Returns a string that can be executed by
SQL Server

Dim cMyStr As New cStringSM
Dim strTemp As String

On Error GoTo SQLFixupErr

strTemp = strField
SQLFixup = strTemp

' Single-quotes have to be replaced by two
single-quotes,
' since a single-quote is the identifier
delimiter
' character - call a procedure to do the
replace
' SQLFixup =
cMyStr.ReplaceSubString(strTemp, gstrDQ,
"\" & gstrDQ)

' Replace pipe characters with the
corresponding chr function
' SQLFixup =
cMyStr.ReplaceSubString(strTemp, gstrDQ,
gstrDQ & gstrDQ)

Exit Function

SQLFixupErr:
gstrSource = mstrModuleName &
"SQLFixup"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errMakeFieldValidFailed, _
gstrSource,
LoadResString(errMakeFieldValidFailed)

End Function
Public Function TranslateStepLabel(sLabel
As String) As String
' Translates the passed in step label to a
valid file name
' All characters in the label that are invalid
for filenames (viz. \ / : * ? " < > )
' and spaces are substituted with
underscores - also ensure that the resulting
filename
' is not greater than 255 characters
Dim cTempStr As New cStringSM
TranslateStepLabel =
cTempStr.ReplaceSubString(sLabel,
gstrFileSeparator, "_")
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepL
abel, "/", gstrUnderscore)

```

```

TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, ":", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "*", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "?", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, gstrDQ, gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "<", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, ">", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "|", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, gstrBlank, gstrUnderscore)

' Commas are substituted with underscores
since the command shell uses a comma to
' delimit commands
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, ",", gstrUnderscore)

If Len(TranslateStepLabel) > MAX_PATH
Then
TranslateStepLabel =
Mid(TranslateStepLabel, 1, MAX_PATH)
End If

End Function

Public Function TypeOfObject(ByVal objNode
As Object) As Integer
' Determines the type of object that is passed
in

On Error GoTo TypeOfObjectErr
gstrSource = mstrModuleName &
"TypeOfObject"

Select Case TypeName(objNode)
Case "cWorkspace"
TypeOfObject = gintWorkspace

Case "cParameter"
TypeOfObject = gintParameter

Case "cConnection"
TypeOfObject = gintParameterConnect

Case "cConnDtl"
TypeOfObject = gintConnectionDtl

Case "cGlobalStep"
TypeOfObject = gintGlobalStep

Case "cManager"
TypeOfObject = gintManagerStep

Case "cWorker"
TypeOfObject = gintWorkerStep

Case "cStep"
' If a step record is passed in, call a
function
' to determine the type of step

```

```

TypeOfObject =
TypeOfStep(StepClass:=objNode)

Case Else
WriteError errTypeOfObjectFailed,
gstrSource, _
TypeName(objNode)
On Error GoTo 0
Err.Raise vbObjectError +
errTypeOfObjectFailed, _
gstrSource, _

LoadResString(errTypeOfObjectFailed)
End Select

Exit Function

TypeOfObjectErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errTypeOfObjectFailed, _
gstrSource, _
LoadResString(errTypeOfObjectFailed)

End Function
Attribute VB_Name = "ConnDtlCommon"
' FILE: ConnDtlCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
'
' PURPOSE: Contains functionality common
across StepMaster and
' SMRunOnly, pertaining to connections
' Specifically, functions to load connections
in an array
' and so on.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when
errors
' are raised by this module
Private Const mstrModuleName As String =
"ConnDtlCommon."

Public Sub LoadRSInConnDtlArray(rstConns As
Recordset, cConns As cConnDtls)

Dim cNewConnDtl As cConnDtl

On Error GoTo LoadRSInConnDtlArrayErr

If rstConns.RecordCount = 0 Then
Exit Sub
End If

rstConns.MoveFirst
While Not rstConns.EOF

Set cNewConnDtl = New cConnDtl

' Initialize ConnDtl values
' Call a procedure to raise an error if mandatory
fields are null.
cNewConnDtl.ConnNameId =
ErrorOnNullField(rstConns,
FLD_ID_CONN_NAME)

```

```

        cNewConnDtl.WorkspaceId =
ErrorOnNullField(rstConns,
FLD_ID_WORKSPACE)
        cNewConnDtl.ConnName =
CStr(ErrorOnNullField(rstConns,
FLD_CONN_DTL_CONNECTION_NAME
E))
        cNewConnDtl.ConnectionString =
CheckForNullField(rstConns,
FLD_CONN_DTL_CONNECTION_STRING
NG)
        cNewConnDtl.ConnType =
CheckForNullField(rstConns,
FLD_CONN_DTL_CONNECTION_TYPE)

        cConns.Load cNewConnDtl

        Set cNewConnDtl = Nothing
rstConns.MoveNext
Wend

Exit Sub

LoadRSInConnDtlArrayErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadRSInConnDtlArray"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, gstrSource, _

LoadResString(errLoadRsInArrayFailed)
End Sub
Attribute VB_Name =
"ConnectionCommon"
' FILE:    ConnectionCommon.bas
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Contains functionality
common across StepMaster and
'           SMRunOnly, pertaining to
connection strings
'           Specifically, functions to load
connections strings
'           in an array and so on.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"ConnectionCommon."

Public Sub
LoadRecordsetInConnectionArray(rstConns
As Recordset, cConns As cConnections)

    Dim cNewConnection As cConnection

    On Error GoTo
LoadRecordsetInConnectionArrayErr

    If rstConns.RecordCount = 0 Then
        Exit Sub
    End If

    rstConns.MoveFirst
    While Not rstConns.EOF

```

```

        Set cNewConnection = New cConnection

        ' Initialize Connection values
        ' Call a procedure to raise an error if
mandatory fields are null.
        cNewConnection.ConnectionId =
ErrorOnNullField(rstConns, "connection_id")
        cNewConnection.WorkspaceId =
CStr(ErrorOnNullField(rstConns,
FLD_ID_WORKSPACE))
        cNewConnection.ConnectionName =
CStr(ErrorOnNullField(rstConns,
"connection_name"))
        cNewConnection.ConnectionValue =
CheckForNullField(rstConns,
"connection_value")
        cNewConnection.Description =
CheckForNullField(rstConns, "description")

        cNewConnection.NoCountDisplay =
CheckForNullField(rstConns,
"no_count_display")
        cNewConnection.NoExecute =
CheckForNullField(rstConns, "no_execute")
        cNewConnection.ParseQueryOnly =
CheckForNullField(rstConns,
"parse_query_only")
        cNewConnection.QuotedIdentifiers =
CheckForNullField(rstConns,
"ANSI_quoted_identifiers")
        cNewConnection.AnsiNulls =
CheckForNullField(rstConns, "ANSI_nulls")
        cNewConnection.ShowQueryPlan =
CheckForNullField(rstConns,
"show_query_plan")
        cNewConnection.ShowStatsTime =
CheckForNullField(rstConns,
"show_stats_time")
        cNewConnection.ShowStatsIO =
CheckForNullField(rstConns, "show_stats_io")
        cNewConnection.ParseOdbcMsg =
CheckForNullField(rstConns,
"parse_odbc_msg_prefixes")
        cNewConnection.RowCount =
CheckForNullField(rstConns, "row_count")
        cNewConnection.TsqlBatchSeparator =
CheckForNullField(rstConns,
"tsql_batch_separator")
        cNewConnection.QueryTimeOut =
CheckForNullField(rstConns,
"query_time_out")
        cNewConnection.ServerLanguage =
CheckForNullField(rstConns,
"server_language")
        cNewConnection.CharacterTranslation =
CheckForNullField(rstConns,
"character_translation")
        cNewConnection.RegionalSettings =
CheckForNullField(rstConns,
"regional_settings")

        cConns.Load cNewConnection

        Set cNewConnection = Nothing
rstConns.MoveNext
Wend

Exit Sub

LoadRecordsetInConnectionArrayErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadRecordsetInConnectionArray"
On Error GoTo 0

```

```

        Err.Raise vbObjectError +
errLoadRsInArrayFailed, gstrSource, _
        LoadResString(errLoadRsInArrayFailed)
End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cParameter"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cParameter.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Encapsulates the properties and
methods of a parameter.
'           Contains functions to insert, update and
delete
'           workspace_parameters records from the
database.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Private mlngWorkspaceId As Long
Private mlngParameterId As Long
Private mstrParameterName As String
Private mstrParameterValue As String
Private mstrDescription As String
Private mintParameterType As Integer
Private mdbStepMaster As Database
Private mintOperation As Operation
Private mlngPosition As Long

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cParameter."

' The cSequence class is used to generate unique
parameter identifiers
Private mParameterSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

' Parameter types
Public Enum ParameterType
    gintParameterGeneric = 0
    gintParameterConnect
    gintParameterApplication
    gintParameterBuiltIn
End Enum

Private Sub AssignParameters(qyExec As
DAO.QueryDef)
    ' Assigns values to the parameters in the querydef
object
    ' The parameter names are cryptic to make them
different
    ' from the field names. When the parameter
names are

```

<pre> ' the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" prmParam.Value = mLngWorkspaceId Case "[p_id]" prmParam.Value = mLngParameterId Case "[p_name]" prmParam.Value = mstrParameterName Case "[p_value]" prmParam.Value = mstrParameterValue Case "[desc]" prmParam.Value = mstrDescription Case "[p_type]" prmParam.Value = mintParameterType Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, _ prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrModuleName & "AssignParameters", _ LoadResString(errInvalidParameter) End Select Next prmParam ' qyExec.Parameters("w_id").Value = mLngWorkspaceId ' qyExec.Parameters("p_id").Value = mLngParameterId ' qyExec.Parameters("p_name").Value = mstrParameterName ' qyExec.Parameters("p_value").Value = mstrParameterValue ' Exit Sub AssignParametersErr: mstrSource = mstrModuleName & "AssignParameters" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrSource, LoadResString(errAssignParametersFailed) End Sub </pre>	<pre> Public Property Let Position(ByVal RHS As Long) mLngPosition = RHS End Property Public Property Get Position() As Long Position = mLngPosition End Property Public Function Clone() As cParameter ' Creates a copy of a given parameter Dim cCloneParam As cParameter On Error GoTo CloneErr mstrSource = mstrModuleName & "Clone" Set cCloneParam = New cParameter ' Copy all the parameter properties to the newly ' created parameter Set cCloneParam.NodeDB = mdbsStepMaster cCloneParam.WorkspaceId = mLngWorkspaceId cCloneParam.ParameterId = mLngParameterId cCloneParam.ParameterName = mstrParameterName cCloneParam.ParameterValue = mstrParameterValue cCloneParam.Description = mstrDescription cCloneParam.ParameterType = mintParameterType cCloneParam.IndOperation = mintOperation cCloneParam.Position = mLngPosition ' And set the return value to the newly created parameter Set Clone = cCloneParam Set cCloneParam = Nothing Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Set NodeDB(vdata As Database) Set mdbsStepMaster = vdata End Property Public Property Get NodeDB() As Database Set NodeDB = mdbsStepMaster End Property Private Sub CheckDupParameterName() ' Check if the parameter name already exists in the workspace </pre>	<pre> Dim rstParameter As Recordset Dim strSql As String Dim qy As DAO.QueryDef On Error GoTo CheckDupParameterNameErr mstrSource = mstrModuleName & "CheckDupParameterName" ' Create a recordset object to retrieve the count of all parameters ' for the workspace with the same name strSql = "Select count(*) as parameter_count " & - " from workspace_parameters " & _ " where workspace_id = [w_id]" & _ " and parameter_name = [p_name]" & _ " and parameter_id <> [p_id]" Set qy = mdbsStepMaster.CreateQueryDef(gstrEmptyString, strSql) Call AssignParameters(qy) Set rstParameter = qy.OpenRecordset(dbOpenForwardOnly) If rstParameter![parameter_count] > 0 Then rstParameter.Close qy.Close ShowError errDuplicateParameterName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateParameterName, _ mstrSource, LoadResString(errDuplicateParameterName) End If rstParameter.Close qy.Close Exit Sub CheckDupParameterNameErr: LogErrors Errors mstrSource = mstrModuleName & "CheckDupParameterName" On Error GoTo 0 Err.Raise vbObjectError + errCheckDupParameterNameFailed, _ mstrSource, LoadResString(errCheckDupParameterNameFailed) End Sub Private Sub CheckDB() ' Check if the database object has been initialized If mdbsStepMaster Is Nothing Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidDB, _ mstrModuleName & "CheckDB", LoadResString(errInvalidDB) End If End Sub Public Property Let ParameterValue(vdata As String) mstrParameterValue = vdata End Property Public Property Let Description(vdata As String) mstrDescription = vdata </pre>
---	--	--

```

End Property
Public Property Let ParameterType(vdata
As ParameterType)

    mintParameterType = vdata
End Property

Public Property Let ParameterName(vdata
As String)

    If vdata = gstrEmptyString Then

        ShowError
errParameterNameMandatory
        On Error GoTo 0
        ' Propagate this error back to the caller
        Err.Raise vbObjectError +
errParameterNameMandatory, _
            mstrSource,
LoadResString(errParameterNameMandator
y)
    Else
        mstrParameterName = vdata
    End If

End Property

Public Property Let ParameterId(vdata As
Long)
    mlngParameterId = vdata
End Property

Public Property Let IndOperation(ByVal
vdata As Operation)

    ' The valid operations are define in the
cOperations
    ' class. Check if the operation is valid
    Select Case vdata
        Case QueryOp, InsertOp, UpdateOp,
DeleteOp
            mintOperation = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errInvalidOperation, _
                mstrSource,
LoadResString(errInvalidOperation)
    End Select

End Property
Public Sub Validate()
    ' Each distinct object will have a Validate
method which
    ' will check if the class properties are
valid. This method
    ' will be used to check interdependant
properties that
    ' cannot be validated by the let
procedures.
    ' It should be called by the add and
modify methods of the class

    On Error GoTo ValidateErr

    ' Check if the db object is valid
    Call CheckDB

    ' Call procedure to raise an error if the
parameter name
    ' already exists in the workspace -
    ' if there are duplicates, we don't know
what value for the

```

```

' parameter to use at runtime
Call CheckDupParameterName

Exit Sub

ValidateErr:

    mstrSource = mstrModuleName &
"Validate"
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        mstrSource,
LoadResString(errValidateFailed)

End Sub
Public Property Let WorkspaceId(vdata As
Long)

    mlngWorkspaceId = vdata

End Property

Public Sub Add()

    Dim strInsert As String
    Dim qy As DAO.QueryDef

    On Error GoTo AddErr

    ' Validate the record before trying to insert
the record
    Call Validate

    ' Create a temporary querydef object
    strInsert = "insert into
workspace_parameters " & _
        "( workspace_id, parameter_id, " & _
        " parameter_name, parameter_value, "
& _
        " description, parameter_type ) " & _
        " values ( [w_id], [p_id], [p_name],
[p_value], [desc], [p_type] ) "
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptySt
ring, strInsert)

    ' Call a procedure to assign the parameter
values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

    ' strInsert = "insert into
workspace_parameters " & _
    ' "( workspace_id, parameter_id, " & _
    ' " parameter_name, parameter_value ) "
& _
    ' " values ( " & _
    ' Str(mlngWorkspaceId) & ", " &
Str(mlngParameterId) & _
    ' ", " &
mFieldValue.MakeStringFieldValid(mstrPara
meterName) & _
    ' ", " &
mFieldValue.MakeStringFieldValid(mstrPara
meterValue) & " ) "
    ' mdbsStepMaster.Execute strInsert,
dbFailOnError + dbSQLPassThrough

Exit Sub

AddErr:

```

```

mstrSource = mstrModuleName & "Add"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errParameterInsertFailed, _
    mstrSource,
LoadResString(errParameterInsertFailed)

End Sub
Public Sub Delete()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteErr

    ' Check if the db object is valid
    Call CheckDB

    strDelete = "delete from workspace_parameters "
& _
        " where parameter_id = [p_id]"
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString,
strDelete)

    Call AssignParameters(qy)
    qy.Execute dbFailOnError

    qy.Close

Exit Sub

DeleteErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Delete"
    On Error GoTo 0
    Err.Raise vbObjectError +
errDeleteParameterFailed, _
        mstrSource, _
        LoadResString(errDeleteParameterFailed)

End Sub

Public Sub Modify()

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo ModifyErr

    ' Validate the updated values before trying to
modify the db
    Call Validate

    ' Create a temporary querydef object with the
modify string
    strUpdate = "update workspace_parameters " & _
        " set workspace_id = [w_id], " & _
        " parameter_name = [p_name], " & _
        " parameter_value = [p_value], " & _
        " description = [desc], " & _
        " parameter_type = [p_type] " & _
        " where parameter_id = [p_id]"
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString,
strUpdate)

    ' Call a procedure to assign the parameter values
to the
    ' querydef object
    Call AssignParameters(qy)
    qy.Execute dbFailOnError

```

<pre> qy.Close ' mdbaStepMaster.Execute strUpdate, dbFailOnError ' Exit Sub ModifyErr: mstrSource = mstrModuleName & "Modify" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errParameterUpdateFailed, _ mstrSource, LoadResString(errParameterUpdateFailed) End Sub Public Property Get ParameterName() As String ParameterName = mstrParameterName End Property Public Property Get ParameterId() As Long ParameterId = mlngParameterId End Property Public Property Get NextIdentifier() As Long Dim lngNextId As Long On Error GoTo NextIdentifierErr ' First check if the database object is valid Call CheckDB ' Retrieve the next identifier using the sequence class Set mParameterSeq = New cSequence Set mParameterSeq.IdDatabase = mdbsStepMaster mParameterSeq.IdentifierColumn = FLD_ID_PARAMETER lngNextId = mParameterSeq.Identifier Set mParameterSeq = Nothing NextIdentifier = lngNextId Exit Property NextIdentifierErr: LogErrors Errors mstrSource = mstrModuleName & "NextIdentifier" On Error GoTo 0 Err.Raise vbObjectError + errIdGetFailed, _ mstrSource, LoadResString(errIdGetFailed) End Property Public Property Get IndOperation() As Operation IndOperation = mintOperation End Property Public Property Get WorkspaceId() As Long WorkspaceId = mlngWorkspaceId </pre>	<pre> End Property Public Property Get ParameterValue() As String ParameterValue = mstrParameterValue End Property Public Property Get Description() As String Description = mstrDescription End Property Public Property Get ParameterType() As ParameterType ParameterType = mintParameterType End Property Private Sub Class_Initialize() Set mFieldValue = New cStringSM ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp End Sub Private Sub Class_Terminate() Set mdbsStepMaster = Nothing Set mFieldValue = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunColIt" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cRunColIt.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module implements a stack of Iterator nodes. ' Ensures that only cRunItNode objects are stored in the stack. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cRunColIt." Private mstrSource As String Private mcIterators As cStack Public Sub Clear() </pre>	<pre> mcIterators.Clear End Sub Private Sub Class_Initialize() Set mcIterators = New cStack End Sub Private Sub Class_Terminate() Set mcIterators = Nothing End Sub Public Function Value(strItName As String) As String Dim lngIndex As Long For lngIndex = 0 To mcIterators.Count - 1 If mcIterators(lngIndex).IteratorName = strItName Then Value = mcIterators(lngIndex).Value Exit For End If Next lngIndex End Function Public Property Get Item(ByVal Position As Long) As cRunItNode Attribute Item.VB_UserMemId = 0 Set Item = mcIterators(Position) End Property Public Function Count() As Long Count = mcIterators.Count End Function Public Function Pop() As cRunItNode Set Pop = mcIterators.Pop End Function Public Sub Push(objToPush As cRunItNode) Call mcIterators.Push(objToPush) End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True Persistable = 0 'NotPersistable DataBindingBehavior = 0 'vbNone DataSourceBehavior = 0 'vbNone MTSTransactionMode = 0 'NotAnMTSObject END Attribute VB_Name = "cRunInst" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cRunColIt.cls ' Microsoft TPC-H Kit Ver. 1.00 </pre>
--	---	---

```

' Copyright Microsoft, 1999
' All Rights Reserved
'
'
' PURPOSE: This module controls the
run processing. It runs a branch
' at a time and raises events when
each step completes execution.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"cRunInst."
Private mstrSource As String

' Local variable(s) to hold property value(s)
Private mstrRootKey As String
Public WspId As Long
Private mcParameters As cArrParameters
Private mcRunSteps As cArrSteps
Private mcRunConstraints As
cArrConstraints
Public RunConnections As cConnections
Public RunConnDtls As cConnDtls
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mcNavSteps As cStepTree

Private mcInstances As cInstances
Private mcFreeSteps As cVectorLng
Private mcFailures As cFailedSteps
Private mblnAsk As Boolean ' Set to True
when the a step with continuation
criteria=Ask fails
Private mblnAbort As Boolean ' Set to True
when the run is aborted
Private msAbortDtls As String
Private mbarrFree() As Byte
Private WithEvents mcTermSteps As
cTermSteps
Attribute mcTermSteps.VB_VarHelpID = -1
Public RunId As Long
Public CreateInputFiles As Boolean
Private Enum WspLogEvents
mintRunStart
mintRunComplete
mintStepStart
mintStepComplete
End Enum

Private mcWspLog As cFileSM
Private mstrCurBranchRoot As String
Private mcDummyRootInstance As
cInstance
' Key for the dummy root instance - Should
be a key that is invalid for an actual step
record
Private Const mstrDummyRootKey As
String = "D"
' Public events to notify the calling function
of the
' start and end time for each step
Public Event RunStart(dtmStartTime As
Currency, strWspLog As String)
Public Event RunComplete(dtmEndTime As
Currency)
Public Event StepStart(cStepRecord As
cStep, dtmStartTime As Currency, _

```

```

lngInstanceId As Long, lParentInstanceId
As Long, sPath As String, _
sIts As String, sItValue As String)
Public Event StepComplete(cStepRecord As
cStep, dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)
Public Event ProcessStart(cStepRecord As
cStep, strCommand As String, _
dtmStartTime As Currency, lngInstanceId
As Long, lParentInstanceId As Long, _
sItValue As String)
Public Event ProcessComplete(cStepRecord
As cStep, dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)
' The class that will execute each step - we trap
the events
' that are raised by it when a step
starts/completes
' execution
Private WithEvents cExecStep1 As cRunStep
Attribute cExecStep1.VB_VarHelpID = -1
Private WithEvents cExecStep2 As cRunStep
Attribute cExecStep2.VB_VarHelpID = -1
Private WithEvents cExecStep3 As cRunStep
Attribute cExecStep3.VB_VarHelpID = -1
Private WithEvents cExecStep4 As cRunStep
Attribute cExecStep4.VB_VarHelpID = -1
Private WithEvents cExecStep5 As cRunStep
Attribute cExecStep5.VB_VarHelpID = -1
Private WithEvents cExecStep6 As cRunStep
Attribute cExecStep6.VB_VarHelpID = -1
Private WithEvents cExecStep7 As cRunStep
Attribute cExecStep7.VB_VarHelpID = -1
Private WithEvents cExecStep8 As cRunStep
Attribute cExecStep8.VB_VarHelpID = -1
Private WithEvents cExecStep9 As cRunStep
Attribute cExecStep9.VB_VarHelpID = -1

Private WithEvents cExecStep10 As cRunStep
Attribute cExecStep10.VB_VarHelpID = -1
Private WithEvents cExecStep11 As cRunStep
Attribute cExecStep11.VB_VarHelpID = -1
Private WithEvents cExecStep12 As cRunStep
Attribute cExecStep12.VB_VarHelpID = -1
Private WithEvents cExecStep13 As cRunStep
Attribute cExecStep13.VB_VarHelpID = -1
Private WithEvents cExecStep14 As cRunStep
Attribute cExecStep14.VB_VarHelpID = -1
Private WithEvents cExecStep15 As cRunStep
Attribute cExecStep15.VB_VarHelpID = -1
Private WithEvents cExecStep16 As cRunStep
Attribute cExecStep16.VB_VarHelpID = -1
Private WithEvents cExecStep17 As cRunStep
Attribute cExecStep17.VB_VarHelpID = -1
Private WithEvents cExecStep18 As cRunStep
Attribute cExecStep18.VB_VarHelpID = -1
Private WithEvents cExecStep19 As cRunStep
Attribute cExecStep19.VB_VarHelpID = -1

Private WithEvents cExecStep20 As cRunStep
Attribute cExecStep20.VB_VarHelpID = -1
Private WithEvents cExecStep21 As cRunStep
Attribute cExecStep21.VB_VarHelpID = -1
Private WithEvents cExecStep22 As cRunStep
Attribute cExecStep22.VB_VarHelpID = -1
Private WithEvents cExecStep23 As cRunStep
Attribute cExecStep23.VB_VarHelpID = -1
Private WithEvents cExecStep24 As cRunStep
Attribute cExecStep24.VB_VarHelpID = -1
Private WithEvents cExecStep25 As cRunStep
Attribute cExecStep25.VB_VarHelpID = -1
Private WithEvents cExecStep26 As cRunStep
Attribute cExecStep26.VB_VarHelpID = -1
Private WithEvents cExecStep27 As cRunStep
Attribute cExecStep27.VB_VarHelpID = -1

```

```

Private WithEvents cExecStep28 As cRunStep
Attribute cExecStep28.VB_VarHelpID = -1
Private WithEvents cExecStep29 As cRunStep
Attribute cExecStep29.VB_VarHelpID = -1

Private WithEvents cExecStep30 As cRunStep
Attribute cExecStep30.VB_VarHelpID = -1
Private WithEvents cExecStep31 As cRunStep
Attribute cExecStep31.VB_VarHelpID = -1
Private WithEvents cExecStep32 As cRunStep
Attribute cExecStep32.VB_VarHelpID = -1
Private WithEvents cExecStep33 As cRunStep
Attribute cExecStep33.VB_VarHelpID = -1
Private WithEvents cExecStep34 As cRunStep
Attribute cExecStep34.VB_VarHelpID = -1
Private WithEvents cExecStep35 As cRunStep
Attribute cExecStep35.VB_VarHelpID = -1
Private WithEvents cExecStep36 As cRunStep
Attribute cExecStep36.VB_VarHelpID = -1
Private WithEvents cExecStep37 As cRunStep
Attribute cExecStep37.VB_VarHelpID = -1
Private WithEvents cExecStep38 As cRunStep
Attribute cExecStep38.VB_VarHelpID = -1
Private WithEvents cExecStep39 As cRunStep
Attribute cExecStep39.VB_VarHelpID = -1

Private WithEvents cExecStep40 As cRunStep
Attribute cExecStep40.VB_VarHelpID = -1
Private WithEvents cExecStep41 As cRunStep
Attribute cExecStep41.VB_VarHelpID = -1
Private WithEvents cExecStep42 As cRunStep
Attribute cExecStep42.VB_VarHelpID = -1
Private WithEvents cExecStep43 As cRunStep
Attribute cExecStep43.VB_VarHelpID = -1
Private WithEvents cExecStep44 As cRunStep
Attribute cExecStep44.VB_VarHelpID = -1
Private WithEvents cExecStep45 As cRunStep
Attribute cExecStep45.VB_VarHelpID = -1
Private WithEvents cExecStep46 As cRunStep
Attribute cExecStep46.VB_VarHelpID = -1
Private WithEvents cExecStep47 As cRunStep
Attribute cExecStep47.VB_VarHelpID = -1
Private WithEvents cExecStep48 As cRunStep
Attribute cExecStep48.VB_VarHelpID = -1
Private WithEvents cExecStep49 As cRunStep
Attribute cExecStep49.VB_VarHelpID = -1

Private WithEvents cExecStep50 As cRunStep
Attribute cExecStep50.VB_VarHelpID = -1
Private WithEvents cExecStep51 As cRunStep
Attribute cExecStep51.VB_VarHelpID = -1
Private WithEvents cExecStep52 As cRunStep
Attribute cExecStep52.VB_VarHelpID = -1
Private WithEvents cExecStep53 As cRunStep
Attribute cExecStep53.VB_VarHelpID = -1
Private WithEvents cExecStep54 As cRunStep
Attribute cExecStep54.VB_VarHelpID = -1
Private WithEvents cExecStep55 As cRunStep
Attribute cExecStep55.VB_VarHelpID = -1
Private WithEvents cExecStep56 As cRunStep
Attribute cExecStep56.VB_VarHelpID = -1
Private WithEvents cExecStep57 As cRunStep
Attribute cExecStep57.VB_VarHelpID = -1
Private WithEvents cExecStep58 As cRunStep
Attribute cExecStep58.VB_VarHelpID = -1
Private WithEvents cExecStep59 As cRunStep
Attribute cExecStep59.VB_VarHelpID = -1

Private WithEvents cExecStep60 As cRunStep
Attribute cExecStep60.VB_VarHelpID = -1
Private WithEvents cExecStep61 As cRunStep
Attribute cExecStep61.VB_VarHelpID = -1
Private WithEvents cExecStep62 As cRunStep
Attribute cExecStep62.VB_VarHelpID = -1
Private WithEvents cExecStep63 As cRunStep

```

```

Attribute cExecStep63.VB_VarHelpID = -1
Private WithEvents cExecStep64 As
cRunStep
Attribute cExecStep64.VB_VarHelpID = -1
Private WithEvents cExecStep65 As
cRunStep
Attribute cExecStep65.VB_VarHelpID = -1
Private WithEvents cExecStep66 As
cRunStep
Attribute cExecStep66.VB_VarHelpID = -1
Private WithEvents cExecStep67 As
cRunStep
Attribute cExecStep67.VB_VarHelpID = -1
Private WithEvents cExecStep68 As
cRunStep
Attribute cExecStep68.VB_VarHelpID = -1
Private WithEvents cExecStep69 As
cRunStep
Attribute cExecStep69.VB_VarHelpID = -1

Private WithEvents cExecStep70 As
cRunStep
Attribute cExecStep70.VB_VarHelpID = -1
Private WithEvents cExecStep71 As
cRunStep
Attribute cExecStep71.VB_VarHelpID = -1
Private WithEvents cExecStep72 As
cRunStep
Attribute cExecStep72.VB_VarHelpID = -1
Private WithEvents cExecStep73 As
cRunStep
Attribute cExecStep73.VB_VarHelpID = -1
Private WithEvents cExecStep74 As
cRunStep
Attribute cExecStep74.VB_VarHelpID = -1
Private WithEvents cExecStep75 As
cRunStep
Attribute cExecStep75.VB_VarHelpID = -1
Private WithEvents cExecStep76 As
cRunStep
Attribute cExecStep76.VB_VarHelpID = -1
Private WithEvents cExecStep77 As
cRunStep
Attribute cExecStep77.VB_VarHelpID = -1
Private WithEvents cExecStep78 As
cRunStep
Attribute cExecStep78.VB_VarHelpID = -1
Private WithEvents cExecStep79 As
cRunStep
Attribute cExecStep79.VB_VarHelpID = -1

Private WithEvents cExecStep80 As
cRunStep
Attribute cExecStep80.VB_VarHelpID = -1
Private WithEvents cExecStep81 As
cRunStep
Attribute cExecStep81.VB_VarHelpID = -1
Private WithEvents cExecStep82 As
cRunStep
Attribute cExecStep82.VB_VarHelpID = -1
Private WithEvents cExecStep83 As
cRunStep
Attribute cExecStep83.VB_VarHelpID = -1
Private WithEvents cExecStep84 As
cRunStep
Attribute cExecStep84.VB_VarHelpID = -1
Private WithEvents cExecStep85 As
cRunStep
Attribute cExecStep85.VB_VarHelpID = -1
Private WithEvents cExecStep86 As
cRunStep
Attribute cExecStep86.VB_VarHelpID = -1
Private WithEvents cExecStep87 As
cRunStep
Attribute cExecStep87.VB_VarHelpID = -1

```

```

Private WithEvents cExecStep88 As cRunStep
Attribute cExecStep88.VB_VarHelpID = -1
Private WithEvents cExecStep89 As cRunStep
Attribute cExecStep89.VB_VarHelpID = -1

Private WithEvents cExecStep90 As cRunStep
Attribute cExecStep90.VB_VarHelpID = -1
Private WithEvents cExecStep91 As cRunStep
Attribute cExecStep91.VB_VarHelpID = -1
Private WithEvents cExecStep92 As cRunStep
Attribute cExecStep92.VB_VarHelpID = -1
Private WithEvents cExecStep93 As cRunStep
Attribute cExecStep93.VB_VarHelpID = -1
Private WithEvents cExecStep94 As cRunStep
Attribute cExecStep94.VB_VarHelpID = -1
Private WithEvents cExecStep95 As cRunStep
Attribute cExecStep95.VB_VarHelpID = -1
Private WithEvents cExecStep96 As cRunStep
Attribute cExecStep96.VB_VarHelpID = -1
Private WithEvents cExecStep97 As cRunStep
Attribute cExecStep97.VB_VarHelpID = -1
Private WithEvents cExecStep98 As cRunStep
Attribute cExecStep98.VB_VarHelpID = -1
Private WithEvents cExecStep99 As cRunStep
Attribute cExecStep99.VB_VarHelpID = -1

Private Const msIt As String = " Iterator: "
Private Const msItValue As String = " Value: "
Public Sub Abort()

    On Error GoTo AbortErr

    ' Make sure that we don't execute any more
    steps
    Call StopRun

    If cExecStep1 Is Nothing And cExecStep2 Is
    Nothing And cExecStep3 Is Nothing And
    cExecStep4 Is Nothing And cExecStep5 Is
    Nothing And cExecStep6 Is Nothing And
    cExecStep7 Is Nothing And cExecStep8 Is
    Nothing And cExecStep9 Is Nothing And _
        cExecStep10 Is Nothing And cExecStep11
    Is Nothing And cExecStep12 Is Nothing And
    cExecStep13 Is Nothing And cExecStep14 Is
    Nothing And cExecStep15 Is Nothing And
    cExecStep16 Is Nothing And cExecStep17 Is
    Nothing And cExecStep18 Is Nothing And
    cExecStep19 Is Nothing And _
        cExecStep20 Is Nothing And cExecStep21
    Is Nothing And cExecStep22 Is Nothing And
    cExecStep23 Is Nothing And cExecStep24 Is
    Nothing And cExecStep25 Is Nothing And
    cExecStep26 Is Nothing And cExecStep27 Is
    Nothing And cExecStep28 Is Nothing And
    cExecStep29 Is Nothing And _
        cExecStep30 Is Nothing And cExecStep31
    Is Nothing And cExecStep32 Is Nothing And
    cExecStep33 Is Nothing And cExecStep34 Is
    Nothing And cExecStep35 Is Nothing And
    cExecStep36 Is Nothing And cExecStep37 Is
    Nothing And cExecStep38 Is Nothing And
    cExecStep39 Is Nothing And _
        cExecStep40 Is Nothing And cExecStep41
    Is Nothing And cExecStep42 Is Nothing And
    cExecStep43 Is Nothing And cExecStep44 Is
    Nothing And cExecStep45 Is Nothing And
    cExecStep46 Is Nothing And cExecStep47 Is
    Nothing And cExecStep48 Is Nothing And
    cExecStep49 Is Nothing And _
        cExecStep50 Is Nothing And cExecStep51
    Is Nothing And cExecStep52 Is Nothing And
    cExecStep53 Is Nothing And cExecStep54 Is
    Nothing And cExecStep55 Is Nothing And
    cExecStep56 Is Nothing And cExecStep57 Is

```

```

Nothing And cExecStep58 Is Nothing And
cExecStep59 Is Nothing And _
    cExecStep60 Is Nothing And cExecStep61 Is
    Nothing And cExecStep62 Is Nothing And
    cExecStep63 Is Nothing And cExecStep64 Is
    Nothing And cExecStep65 Is Nothing And
    cExecStep66 Is Nothing And cExecStep67 Is
    Nothing And cExecStep68 Is Nothing And
    cExecStep69 Is Nothing And _
        cExecStep70 Is Nothing And cExecStep71 Is
    Nothing And cExecStep72 Is Nothing And
    cExecStep73 Is Nothing And cExecStep74 Is
    Nothing And cExecStep75 Is Nothing And
    cExecStep76 Is Nothing And cExecStep77 Is
    Nothing And cExecStep78 Is Nothing And
    cExecStep79 Is Nothing And _
        cExecStep80 Is Nothing And cExecStep81 Is
    Nothing And cExecStep82 Is Nothing And
    cExecStep83 Is Nothing And cExecStep84 Is
    Nothing And cExecStep85 Is Nothing And
    cExecStep86 Is Nothing And cExecStep87 Is
    Nothing And cExecStep88 Is Nothing And
    cExecStep89 Is Nothing And _
        cExecStep90 Is Nothing And cExecStep91 Is
    Nothing And cExecStep92 Is Nothing And
    cExecStep93 Is Nothing And cExecStep94 Is
    Nothing And cExecStep95 Is Nothing And
    cExecStep96 Is Nothing And cExecStep97 Is
    Nothing And cExecStep98 Is Nothing And
    cExecStep99 Is Nothing Then
    ' Then...
    WriteToWspLog (mintRunComplete)
    RaiseEvent
    RunComplete(Determine64BitTime())
    Else
    ' Abort each of the steps that is currently
    executing.
    If Not cExecStep1 Is Nothing Then
        cExecStep1.Abort
    End If
    If Not cExecStep2 Is Nothing Then
        cExecStep2.Abort
    End If
    If Not cExecStep3 Is Nothing Then
        cExecStep3.Abort
    End If
    If Not cExecStep4 Is Nothing Then
        cExecStep4.Abort
    End If
    If Not cExecStep5 Is Nothing Then
        cExecStep5.Abort
    End If
    If Not cExecStep6 Is Nothing Then
        cExecStep6.Abort
    End If
    If Not cExecStep7 Is Nothing Then
        cExecStep7.Abort
    End If
    If Not cExecStep8 Is Nothing Then
        cExecStep8.Abort
    End If
    If Not cExecStep9 Is Nothing Then
        cExecStep9.Abort
    End If
    If Not cExecStep10 Is Nothing Then
        cExecStep10.Abort
    End If
    If Not cExecStep11 Is Nothing Then
        cExecStep11.Abort
    End If
    If Not cExecStep12 Is Nothing Then
        cExecStep12.Abort
    End If
    If Not cExecStep13 Is Nothing Then
        cExecStep13.Abort

```


End If If Not cExecStep14 Is Nothing Then cExecStep14.Abort End If If Not cExecStep15 Is Nothing Then cExecStep15.Abort End If If Not cExecStep16 Is Nothing Then cExecStep16.Abort End If If Not cExecStep17 Is Nothing Then cExecStep17.Abort End If If Not cExecStep18 Is Nothing Then cExecStep18.Abort End If If Not cExecStep19 Is Nothing Then cExecStep19.Abort End If If Not cExecStep20 Is Nothing Then cExecStep20.Abort End If If Not cExecStep21 Is Nothing Then cExecStep21.Abort End If If Not cExecStep22 Is Nothing Then cExecStep22.Abort End If If Not cExecStep23 Is Nothing Then cExecStep23.Abort End If If Not cExecStep24 Is Nothing Then cExecStep24.Abort End If If Not cExecStep25 Is Nothing Then cExecStep25.Abort End If If Not cExecStep26 Is Nothing Then cExecStep26.Abort End If If Not cExecStep27 Is Nothing Then cExecStep27.Abort End If If Not cExecStep28 Is Nothing Then cExecStep28.Abort End If If Not cExecStep29 Is Nothing Then cExecStep29.Abort End If ' ===== 30 - 39 ===== If Not cExecStep30 Is Nothing Then cExecStep30.Abort End If If Not cExecStep31 Is Nothing Then cExecStep31.Abort End If	If Not cExecStep32 Is Nothing Then cExecStep32.Abort End If If Not cExecStep33 Is Nothing Then cExecStep33.Abort End If If Not cExecStep34 Is Nothing Then cExecStep34.Abort End If If Not cExecStep35 Is Nothing Then cExecStep35.Abort End If If Not cExecStep36 Is Nothing Then cExecStep36.Abort End If If Not cExecStep37 Is Nothing Then cExecStep37.Abort End If If Not cExecStep38 Is Nothing Then cExecStep38.Abort End If If Not cExecStep39 Is Nothing Then cExecStep39.Abort End If ' ===== 40 - 49 ===== If Not cExecStep40 Is Nothing Then cExecStep40.Abort End If If Not cExecStep41 Is Nothing Then cExecStep41.Abort End If If Not cExecStep42 Is Nothing Then cExecStep42.Abort End If If Not cExecStep43 Is Nothing Then cExecStep43.Abort End If If Not cExecStep44 Is Nothing Then cExecStep44.Abort End If If Not cExecStep45 Is Nothing Then cExecStep45.Abort End If If Not cExecStep46 Is Nothing Then cExecStep46.Abort End If If Not cExecStep47 Is Nothing Then cExecStep47.Abort End If If Not cExecStep48 Is Nothing Then cExecStep48.Abort End If If Not cExecStep49 Is Nothing Then cExecStep49.Abort End If	' ===== 50 - 59 ===== If Not cExecStep50 Is Nothing Then cExecStep50.Abort End If If Not cExecStep51 Is Nothing Then cExecStep51.Abort End If If Not cExecStep52 Is Nothing Then cExecStep52.Abort End If If Not cExecStep53 Is Nothing Then cExecStep53.Abort End If If Not cExecStep54 Is Nothing Then cExecStep54.Abort End If If Not cExecStep55 Is Nothing Then cExecStep55.Abort End If If Not cExecStep56 Is Nothing Then cExecStep56.Abort End If If Not cExecStep57 Is Nothing Then cExecStep57.Abort End If If Not cExecStep58 Is Nothing Then cExecStep58.Abort End If If Not cExecStep59 Is Nothing Then cExecStep59.Abort End If ' ===== 60 - 69 ===== If Not cExecStep60 Is Nothing Then cExecStep60.Abort End If If Not cExecStep61 Is Nothing Then cExecStep61.Abort End If If Not cExecStep62 Is Nothing Then cExecStep62.Abort End If If Not cExecStep63 Is Nothing Then cExecStep63.Abort End If If Not cExecStep64 Is Nothing Then cExecStep64.Abort End If If Not cExecStep65 Is Nothing Then cExecStep65.Abort End If If Not cExecStep66 Is Nothing Then cExecStep66.Abort End If If Not cExecStep67 Is Nothing Then cExecStep67.Abort End If
--	--	---

<pre> If Not cExecStep68 Is Nothing Then cExecStep68.Abort End If If Not cExecStep69 Is Nothing Then cExecStep69.Abort End If ' ===== 70 - 79 ===== If Not cExecStep70 Is Nothing Then cExecStep70.Abort End If If Not cExecStep71 Is Nothing Then cExecStep71.Abort End If If Not cExecStep72 Is Nothing Then cExecStep72.Abort End If If Not cExecStep73 Is Nothing Then cExecStep73.Abort End If If Not cExecStep74 Is Nothing Then cExecStep74.Abort End If If Not cExecStep75 Is Nothing Then cExecStep75.Abort End If If Not cExecStep76 Is Nothing Then cExecStep76.Abort End If If Not cExecStep77 Is Nothing Then cExecStep77.Abort End If If Not cExecStep78 Is Nothing Then cExecStep78.Abort End If If Not cExecStep79 Is Nothing Then cExecStep79.Abort End If ' ===== 80 - 89 ===== If Not cExecStep80 Is Nothing Then cExecStep80.Abort End If If Not cExecStep81 Is Nothing Then cExecStep81.Abort End If If Not cExecStep82 Is Nothing Then cExecStep82.Abort End If If Not cExecStep83 Is Nothing Then cExecStep83.Abort End If If Not cExecStep84 Is Nothing Then cExecStep84.Abort End If If Not cExecStep85 Is Nothing Then cExecStep85.Abort </pre>	<pre> End If If Not cExecStep86 Is Nothing Then cExecStep86.Abort End If If Not cExecStep87 Is Nothing Then cExecStep87.Abort End If If Not cExecStep88 Is Nothing Then cExecStep88.Abort End If If Not cExecStep89 Is Nothing Then cExecStep89.Abort End If ' ===== 90 - 99 ===== If Not cExecStep90 Is Nothing Then cExecStep90.Abort End If If Not cExecStep91 Is Nothing Then cExecStep91.Abort End If If Not cExecStep92 Is Nothing Then cExecStep92.Abort End If If Not cExecStep93 Is Nothing Then cExecStep93.Abort End If If Not cExecStep94 Is Nothing Then cExecStep94.Abort End If If Not cExecStep95 Is Nothing Then cExecStep95.Abort End If If Not cExecStep96 Is Nothing Then cExecStep96.Abort End If If Not cExecStep97 Is Nothing Then cExecStep97.Abort End If If Not cExecStep98 Is Nothing Then cExecStep98.Abort End If If Not cExecStep99 Is Nothing Then cExecStep99.Abort End If End If Exit Sub AbortErr: Call LogErrors(Errors) On Error GoTo 0 ShowError errAbortFailed ' Try to abort the remaining steps, if any Resume Next End Sub Public Sub AbortSiblings(cTermInstance As cInstance) </pre>	<pre> On Error GoTo AbortSiblingsErr ' Abort each of the steps that is currently executing. If Not cExecStep1 Is Nothing Then If cExecStep1.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep1.Abort End If End If If Not cExecStep2 Is Nothing Then If cExecStep2.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep2.Abort End If End If If Not cExecStep3 Is Nothing Then If cExecStep3.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep3.Abort End If End If If Not cExecStep4 Is Nothing Then If cExecStep4.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep4.Abort End If End If If Not cExecStep5 Is Nothing Then If cExecStep5.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep5.Abort End If End If If Not cExecStep6 Is Nothing Then If cExecStep6.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep6.Abort End If End If If Not cExecStep7 Is Nothing Then If cExecStep7.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep7.Abort End If End If If Not cExecStep8 Is Nothing Then If cExecStep8.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep8.Abort End If End If If Not cExecStep9 Is Nothing Then If cExecStep9.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep9.Abort End If End If If Not cExecStep10 Is Nothing Then If cExecStep10.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep10.Abort End If End If If Not cExecStep11 Is Nothing Then </pre>
--	---	---


```

End If
End If

If Not cExecStep51 Is Nothing Then
    If cExecStep51.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep51.Abort
    End If
End If

If Not cExecStep52 Is Nothing Then
    If cExecStep52.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep52.Abort
    End If
End If

If Not cExecStep53 Is Nothing Then
    If cExecStep53.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep53.Abort
    End If
End If

If Not cExecStep54 Is Nothing Then
    If cExecStep54.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep54.Abort
    End If
End If

If Not cExecStep55 Is Nothing Then
    If cExecStep55.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep55.Abort
    End If
End If

If Not cExecStep56 Is Nothing Then
    If cExecStep56.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep56.Abort
    End If
End If

If Not cExecStep57 Is Nothing Then
    If cExecStep57.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep57.Abort
    End If
End If

If Not cExecStep58 Is Nothing Then
    If cExecStep58.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep58.Abort
    End If
End If

If Not cExecStep59 Is Nothing Then
    If cExecStep59.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep59.Abort
    End If
End If

' ===== 60
=====

If Not cExecStep60 Is Nothing Then
    If cExecStep60.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep60.Abort
    End If
End If

```

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

End If End If If Not cExecStep72 Is Nothing Then If cExecStep72.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep72.Abort End If End If If Not cExecStep73 Is Nothing Then If cExecStep73.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep73.Abort End If End If If Not cExecStep74 Is Nothing Then If cExecStep74.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep74.Abort End If End If If Not cExecStep75 Is Nothing Then If cExecStep75.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep75.Abort End If End If If Not cExecStep76 Is Nothing Then If cExecStep76.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep76.Abort End If End If If Not cExecStep77 Is Nothing Then If cExecStep77.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep77.Abort End If End If If Not cExecStep78 Is Nothing Then If cExecStep78.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep78.Abort End If End If If Not cExecStep79 Is Nothing Then If cExecStep79.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep79.Abort End If End If ' ===== 80 ===== If Not cExecStep80 Is Nothing Then If cExecStep80.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep80.Abort End If End If	End If If Not cExecStep81 Is Nothing Then If cExecStep81.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep81.Abort End If End If If Not cExecStep82 Is Nothing Then If cExecStep82.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep82.Abort End If End If If Not cExecStep83 Is Nothing Then If cExecStep83.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep83.Abort End If End If If Not cExecStep84 Is Nothing Then If cExecStep84.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep84.Abort End If End If If Not cExecStep85 Is Nothing Then If cExecStep85.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep85.Abort End If End If If Not cExecStep86 Is Nothing Then If cExecStep86.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep86.Abort End If End If If Not cExecStep87 Is Nothing Then If cExecStep87.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep87.Abort End If End If If Not cExecStep88 Is Nothing Then If cExecStep88.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep88.Abort End If End If If Not cExecStep89 Is Nothing Then If cExecStep89.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep89.Abort End If End If ' ===== 90 ===== If Not cExecStep90 Is Nothing Then If cExecStep90.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep90.Abort End If End If If Not cExecStep91 Is Nothing Then	If cExecStep91.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep91.Abort End If End If If Not cExecStep92 Is Nothing Then If cExecStep92.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep92.Abort End If End If If Not cExecStep93 Is Nothing Then If cExecStep93.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep93.Abort End If End If If Not cExecStep94 Is Nothing Then If cExecStep94.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep94.Abort End If End If If Not cExecStep95 Is Nothing Then If cExecStep95.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep95.Abort End If End If If Not cExecStep96 Is Nothing Then If cExecStep96.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep96.Abort End If End If If Not cExecStep97 Is Nothing Then If cExecStep97.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep97.Abort End If End If If Not cExecStep98 Is Nothing Then If cExecStep98.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep98.Abort End If End If If Not cExecStep99 Is Nothing Then If cExecStep99.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep99.Abort End If End If Exit Sub AbortSiblingsErr: Call LogErrors(Errors) On Error GoTo 0 ShowError errAbortFailed ' Try to abort the remaining steps, if any Resume Next End Sub Private Sub ExecutionFailed(cTermStep As cRunStep)
--	--	--

```

' Called when execution of a step fails for
any reason - ensure that execution
' continues

On Error GoTo ExecutionFailedErr

Call AddFreeProcess(cTermStep.Index)

Call RunBranch(mstrCurBranchRoot)

Exit Sub

ExecutionFailedErr:
' Log the error code raised by Visual
Basic - do not raise an error here!
Call LogErrors(Errors)

End Sub
Private Sub FreeExecStep(lngIndex As
Long)
' Frees an instance of a cExecuteSM
object depending on the index
On Error GoTo FreeExecStepErr

Select Case lngIndex + 1
Case 1
Set cExecStep1 = Nothing
Case 2
Set cExecStep2 = Nothing
Case 3
Set cExecStep3 = Nothing
Case 4
Set cExecStep4 = Nothing
Case 5
Set cExecStep5 = Nothing
Case 6
Set cExecStep6 = Nothing
Case 7
Set cExecStep7 = Nothing
Case 8
Set cExecStep8 = Nothing
Case 9
Set cExecStep9 = Nothing
Case 10
Set cExecStep10 = Nothing
Case 11
Set cExecStep11 = Nothing
Case 12
Set cExecStep12 = Nothing
Case 13
Set cExecStep13 = Nothing
Case 14
Set cExecStep14 = Nothing
Case 15
Set cExecStep15 = Nothing
Case 16
Set cExecStep16 = Nothing
Case 17
Set cExecStep17 = Nothing
Case 18
Set cExecStep18 = Nothing
Case 19
Set cExecStep19 = Nothing
Case 20
Set cExecStep20 = Nothing
Case 21
Set cExecStep21 = Nothing
Case 22
Set cExecStep22 = Nothing
Case 23
Set cExecStep23 = Nothing
Case 24
Set cExecStep24 = Nothing
Case 25
Set cExecStep25 = Nothing

```

```

Case 26
Set cExecStep26 = Nothing
Case 27
Set cExecStep27 = Nothing
Case 28
Set cExecStep28 = Nothing
Case 29
Set cExecStep29 = Nothing
Case 30
Set cExecStep30 = Nothing
Case 31
Set cExecStep31 = Nothing
Case 32
Set cExecStep32 = Nothing
Case 33
Set cExecStep33 = Nothing
Case 34
Set cExecStep34 = Nothing
Case 35
Set cExecStep35 = Nothing
Case 36
Set cExecStep36 = Nothing
Case 37
Set cExecStep37 = Nothing
Case 38
Set cExecStep38 = Nothing
Case 39
Set cExecStep39 = Nothing
Case 40
Set cExecStep40 = Nothing
Case 41
Set cExecStep41 = Nothing
Case 42
Set cExecStep42 = Nothing
Case 43
Set cExecStep43 = Nothing
Case 44
Set cExecStep44 = Nothing
Case 45
Set cExecStep45 = Nothing
Case 46
Set cExecStep46 = Nothing
Case 47
Set cExecStep47 = Nothing
Case 48
Set cExecStep48 = Nothing
Case 49
Set cExecStep49 = Nothing
Case 50
Set cExecStep50 = Nothing
Case 51
Set cExecStep51 = Nothing
Case 52
Set cExecStep52 = Nothing
Case 53
Set cExecStep53 = Nothing
Case 54
Set cExecStep54 = Nothing
Case 55
Set cExecStep55 = Nothing
Case 56
Set cExecStep56 = Nothing
Case 57
Set cExecStep57 = Nothing
Case 58
Set cExecStep58 = Nothing
Case 59
Set cExecStep59 = Nothing
Case 60
Set cExecStep60 = Nothing
Case 61
Set cExecStep61 = Nothing
Case 62
Set cExecStep62 = Nothing
Case 63

```

```

Set cExecStep63 = Nothing
Case 64
Set cExecStep64 = Nothing
Case 65
Set cExecStep65 = Nothing
Case 66
Set cExecStep66 = Nothing
Case 67
Set cExecStep67 = Nothing
Case 68
Set cExecStep68 = Nothing
Case 69
Set cExecStep69 = Nothing
Case 70
Set cExecStep70 = Nothing
Case 71
Set cExecStep71 = Nothing
Case 72
Set cExecStep72 = Nothing
Case 73
Set cExecStep73 = Nothing
Case 74
Set cExecStep74 = Nothing
Case 75
Set cExecStep75 = Nothing
Case 76
Set cExecStep76 = Nothing
Case 77
Set cExecStep77 = Nothing
Case 78
Set cExecStep78 = Nothing
Case 79
Set cExecStep79 = Nothing
Case 80
Set cExecStep80 = Nothing
Case 81
Set cExecStep81 = Nothing
Case 82
Set cExecStep82 = Nothing
Case 83
Set cExecStep83 = Nothing
Case 84
Set cExecStep84 = Nothing
Case 85
Set cExecStep85 = Nothing
Case 86
Set cExecStep86 = Nothing
Case 87
Set cExecStep87 = Nothing
Case 88
Set cExecStep88 = Nothing
Case 89
Set cExecStep89 = Nothing
Case 90
Set cExecStep90 = Nothing
Case 91
Set cExecStep91 = Nothing
Case 92
Set cExecStep92 = Nothing
Case 93
Set cExecStep93 = Nothing
Case 94
Set cExecStep94 = Nothing
Case 95
Set cExecStep95 = Nothing
Case 96
Set cExecStep96 = Nothing
Case 97
Set cExecStep97 = Nothing
Case 98
Set cExecStep98 = Nothing
Case 99
Set cExecStep99 = Nothing
Case Else

```

```

        BugAssert False, "FreeExecStep:
Invalid index value!"
    End Select

    Exit Sub

FreeExecStepErr:
' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)

End Sub
Private Sub ProcessAskFailures()
' This procedure is called when a step
with a continuation criteria = Ask has failed.
' Wait for all running processes to
complete before displaying an
Abort/Retry/Fail
' message to the user. We process every
Ask step that has failed and use a simple
' algorithm to determine what to do next.
' 1. An abort response to any failure
results in an immediate abort of the run
' 2. A continue means the run continues -
this failure is popped off the failure list.
' 3. A retry means that the execution
details for the instance are cleared and the
' step is re-executed.
    Dim lIndex As Long
    Dim cStepRec As cStep
    Dim cNextInst As cInstance
    Dim cFailureRec As cFailedStep

    On Error GoTo ProcessAskFailuresErr

' Display a popup message for all steps
that have failed with a continuation
' criteria of Ask
    For lIndex = mcFailures.Count - 1 To 0
Step -1

        Set cFailureRec = mcFailures(lIndex)

        If cFailureRec.ContCriteria =
gintOnFailureAsk Then
            Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)
' Ask the user whether to
abort/retry/continue
            #If RUN_ONLY Then
                cFailureRec.AskResponse =
ShowMessageBox(0, _
                    "Step "" &
GetStepNodeText(cStepRec) & "" failed. "" &
_
                    "Select Abort to abort run
and Ignore to continue. "" & _
                    "Select Retry to re-execute
the failed step.", _
                    "Step Failure", _

MB_ABORTRETRYIGNORE +
MB_APPLMODAL +
MB_ICONEXCLAMATION)
            #Else
                cFailureRec.AskResponse =
ShowMessageBox(frmRunning.hWnd, _
                    "Step "" &
GetStepNodeText(cStepRec) & "" failed. "" &
_
                    "Select Abort to abort run
and Ignore to continue. "" & _
                    "Select Retry to re-execute
the failed step.", _
                    "Step Failure", _

```

```

        MB_ABORTRETRYIGNORE
+ MB_APPLMODAL +
MB_ICONEXCLAMATION)
        #End If

        ' Process an abort response immediately
        If cFailureRec.AskResponse =
IDABORT Then
            mblnAbort = True
            Set cNextInst =
mcInstances.QueryInstance(cFailureRec.Instan
ceId)
            Call RunPendingSiblings(cNextInst,
cFailureRec.EndTime)
            Exit For
        End If
        End If

        Next lIndex

' Process all failed steps for which we have
Ignore and Retry responses.
        If Not mblnAbort Then
            ' Navigate in reverse order since we'll be
deleting items from the collection
            For lIndex = mcFailures.Count - 1 To 0
Step -1
                If mcFailures(lIndex).ContCriteria =
gintOnFailureAsk Then
                    mblnAsk = False
                    Set cFailureRec =
mcFailures.Delete(lIndex)

                    Select Case
cFailureRec.AskResponse
                        Case IDABORT
                            BugAssert True

                        Case IDRETRY
                            ' Delete all instances for the
failed step and re-try
                            ' Returns a parent instance
reference
                            Set cNextInst =
ProcessRetryStep(cFailureRec)
                            Call
RunPendingStepInBranch(mstrCurBranchRoot
, cNextInst)

                        Case IDIGNORE
                            Set cNextInst =
mcInstances.QueryInstance(cFailureRec.Instan
ceId)
                            Call
RunPendingSiblings(cNextInst,
cFailureRec.EndTime)

                    End Select
                End If
            Next lIndex
        End If

        Exit Sub

ProcessAskFailuresErr:
' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName, _

    LoadResString(errExecuteBranchFailed)

End Sub

```

```

Private Function ProcessRetryStep(cFailureRec As
cFailedStep) As cInstance
' This procedure is called when a step with a
continuation criteria = Ask has failed
' and the user wants to re-execute the step.
' We delete all existing instances for the step and
reset the iterator, if
' any on the parent instance - this way we ensure
that the step will be executed
' in the next pass.
    Dim lIndex As Long
    Dim cParentInstance As cInstance
    Dim cSubStepRec As cSubStep
    Dim cStepRec As cStep

    On Error GoTo ProcessRetryStepErr

' Navigate in reverse order since we'll be deleting
items from the collection
    For lIndex = mcInstances.Count - 1 To 0 Step -1

        If mcInstances(lIndex).Step.StepId =
cFailureRec.StepId Then
            Set cParentInstance =
mcInstances.QueryInstance(mcInstances(lIndex).Pa
rentInstanceId)
            Set cSubStepRec =
cParentInstance.QuerySubStep(cFailureRec.StepId)
            Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)

            ' Decrement the child count on the parent
instance and reset the
            ' step iterators on the sub-step record, if any
            -
            ' all the iterations of the step will be re-
executed.
            cParentInstance.ChildDeleted
cFailureRec.StepId
            cParentInstance.AllComplete = False
            cParentInstance.AllStarted = False

            cSubStepRec.InitializeIt cStepRec,
mcParameters

            ' Now delete the current instance
            Set ProcessRetryStep =
mcInstances.Delete(lIndex)
        End If
    Next lIndex

    Exit Function

ProcessRetryStepErr:
' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName, _
        LoadResString(errExecuteBranchFailed)

End Function

Private Sub RunNextStep(ByVal
dtmCompleteTime As Currency, ByVal lngIndex
As Long, _
    ByVal InstanceId As Long, ByVal
ExecutionStatus As InstanceStatus)
' Checks if there are any steps remaining to be
' executed in the current branch. If so, it executes
' the step.
    Dim cTermInstance As cInstance
    Dim cFailure As cFailedStep

    On Error GoTo RunNextStepErr

```

<pre> BugMessage "RunNextStep: cExecStep" & CStr(IngIndex + 1) & " has completed." Call mcTermSteps.Delete Call FreeExecStep(IngIndex) ' Call a procedure to add the freed up object to the list Call AddFreeProcess(IngIndex) Set cTermInstance = mcInstances.QueryInstance(InstanceId) cTermInstance.Status = ExecutionStatus If ExecutionStatus = gintFailed Then If cTermInstance.Step.ContinuationCriteria = gintOnFailureAbortSiblings Then Call AbortSiblings(cTermInstance) End If If Not mcFailures.StepFailed(cTermInstance.Step. StepId) Then Set cFailure = New cFailedStep cFailure.InstanceId = cTermInstance.InstanceId cFailure.StepId = cTermInstance.Step.StepId cFailure.ParentStepId = cTermInstance.Step.ParentStepId cFailure.ContCriteria = cTermInstance.Step.ContinuationCriteria cFailure.EndTime = dtmCompleteTime mcFailures.Add cFailure Set cFailure = Nothing End If End If If ExecutionStatus = gintFailed And cTermInstance.Step.ContinuationCriteria = gintOnFailureAbort Then If StringEmpty(msAbortDtIs) Then ' Initialize the abort message msAbortDtIs = "Step "" & GetStepNodeText(cTermInstance.Step) & "" failed." & _ "Aborting execution. Please check the error file for details." End If Call Abort ElseIf ExecutionStatus = gintFailed And cTermInstance.Step.ContinuationCriteria = gintOnFailureAsk Then mblnAsk = True ' If the step failed due to a Cancel operation (Abort), abort the run If mblnAbort Then Call RunPendingSiblings(cTermInstance, dtmCompleteTime) End If Else Call RunPendingSiblings(cTermInstance, dtmCompleteTime) End If If mblnAbort Then If Not AnyStepRunning(mcFreeSteps, mbarrFree) And Not StringEmpty(msAbortDtIs) Then </pre>	<pre> ' Display an error only if the abort is due to a failure ' We had to abort since a step failed - since no other steps are currently ' running, we can display a message to the user saying that we had to abort #If RUN_ONLY Then Call ShowMessageBox(0, msAbortDtIs, "Run Aborted", _ MB_APPLMODAL + MB_OK + MB_ICONEXCLAMATION) #Else Call ShowMessageBox(frmRunning.hWnd, msAbortDtIs, "Run Aborted", _ MB_APPLMODAL + MB_OK + MB_ICONEXCLAMATION) #End If ' MsgBox msAbortDtIs, vbOKOnly, "Run Aborted" End If ElseIf mblnAsk Then If Not AnyStepRunning(mcFreeSteps, mbarrFree) Then ' Ask the user whether to abort/retry/ignore failed steps Call ProcessAskFailures End If End If Exit Sub RunNextStepErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) WriteError errExecuteBranchFailed, mstrSource Call ResetForm(IngIndex) End Sub Public Sub StopRun() ' Setting the Abort flag to True will ensure that we ' don't execute any more steps mblnAbort = True End Sub Private Sub CreateDummyInstance(strRootKey As String) Dim cNewInstance As cInstance Dim cSubStepDtIs As cStep Dim lngSubStepId As Long On Error GoTo CreateDummyInstanceErr ' Create a new instance of the step ' initialize substeps for the step Set cNewInstance = New cInstance ' There can be multiple iterations of the top level nodes ' running at the same time, but only one branch at any ' time - so enforce a degree of parallelism of 1 on this ' node! Set cNewInstance.Step = New cStep cNewInstance.DegreeParallelism = 1 cNewInstance.Key = mstrDummyRootKey cNewInstance.InstanceId = NewInstanceId cNewInstance.ParentInstanceId = 0 </pre>	<pre> lngSubStepId = MakeIdentifierValid(strRootKey) Set cSubStepDtIs = mcRunSteps.QueryStep(lngSubStepId) If cSubStepDtIs.EnabledFlag Then ' Create a child node for the step corresponding to ' the root node of the branch being currently executed, ' only if it has been enabled Call cNewInstance.CreateSubStep(cSubStepDtIs, mcParameters) End If mcInstances.Add cNewInstance Set cNewInstance.Iterators = DetermineIterators(cNewInstance) ' Set a reference to the newly created dummy instance Set mcDummyRootInstance = cNewInstance Set cNewInstance = Nothing Exit Sub CreateDummyInstanceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "CreateDummyInstance" Err.Raise vbObjectError + errCreateInstanceFailed, _ mstrSource, LoadResString(errCreateInstanceFailed) End Sub Private Function CreateInstance(cExecStep As cStep, _ cParentInstance As cInstance) As cInstance ' Creates a new instance of the passed in step. Returns ' a reference to the newly created instance object. Dim cNewInstance As cInstance Dim nodChild As cStep Dim lngSubStepId As Long On Error GoTo CreateInstanceErr ' Create a new instance of the step ' initialize substeps for the step Set cNewInstance = New cInstance Set cNewInstance.Step = cExecStep cNewInstance.Key = MakeKeyValid(cExecStep.StepId, cExecStep.StepType) cNewInstance.ParentInstanceId = cParentInstance.InstanceId cNewInstance.InstanceId = NewInstanceId ' Validate the degree of parallelism field before assigning it to the instance - ' (the parameter value might have been set to an invalid value at runtime) Call ValidateParallelism(cExecStep.DegreeParallelism, _ cExecStep.WorkspaceId, ParamsInWsp:=mcParameters) </pre>
---	--	--


```

cNewInstance.DegreeParallelism =
SubstituteParameters(cExecStep.DegreeParallelism, _
    cExecStep.WorkspaceId,
WspParameters:=mcParameters)

If
mcNavSteps.HasChild(StepKey:=cNewInstance.Key) Then
    Set nodChild =
mcNavSteps.ChildStep(StepKey:=cNewInstance.Key)
    Do
        If nodChild.EnabledFlag Then
            ' Create nodes for all it's substeps
only
            ' if the substeps have been enabled
            Call
cNewInstance.CreateSubStep(nodChild,
mcParameters)
            End If

            Set nodChild =
mcNavSteps.NextStep(StepId:=nodChild.StepId)
        Loop While (Not nodChild.Is Nothing)
    End If

    mcInstances.Add cNewInstance
    Set cNewInstance.Iterators =
DetermineIterators(cNewInstance)

    ' Increment the number of executing steps
on the parent
    cParentInstance.ChildExecuted
(cExecStep.StepId)

    Set CreateInstance = cNewInstance

Exit Function

CreateInstanceErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"CreateInstance"
Err.Raise vbObjectError +
errCreateInstanceFailed, _
mstrSource,
LoadResString(errCreateInstanceFailed)

End Function
Private Function
DetermineIterators(cInstanceRec As cInstance) As cRunCollt
' Returns a collection of all the iterator
values for this
' instance - since an iterator that is defined
at a
' particular level can be used in all it's
substeps, we
' need to navigate the step tree all the way
to the root

Dim cRunIts As cRunCollt
Dim cRunIt As cRunItNode
Dim cStepIt As cIterator
Dim cParentInst As cInstance
Dim cSubStepRec As cSubStep
Dim cSubStepDtls As cStep
Dim lngSubStepId As Long
Dim lngIndex As Long

```

```

On Error GoTo DetermineIteratorsErr

Set cRunIts = New cRunCollt

If cInstanceRec.ParentInstanceId > 0 Then
' The last iterator for an instance of a step
is stored
' on it's parent! So navigate up before
beginning the
' search for iterator values.
Set cParentInst =
mcInstances.QueryInstance(cInstanceRec.ParentInstanceId)

' Get the sub-step record for the current
step
' on it's parent's instance!
lngSubStepId = cInstanceRec.Step.StepId
Set cSubStepRec =
cParentInst.QuerySubStep(lngSubStepId)
Set cSubStepDtls =
mcRunSteps.QueryStep(lngSubStepId)

' And determine the next iteration value
for the
' substep in this instance
Set cStepIt =
cSubStepRec.NewIteration(cSubStepDtls)

If Not cStepIt.Is Nothing Then
' Add the iterator details to the
collection since
' an iterator has been defined for the
step
Set cRunIt = New cRunItNode
cRunIt.IteratorName =
cSubStepDtls.IteratorName
cRunIt.Value =
SubstituteParameters(cStepIt.Value,
cSubStepDtls.WorkspaceId,
WspParameters:=mcParameters)
cRunIt.StepId = cSubStepRec.StepId
cRunIts.Push cRunIt
End If

' Since the parent instance has all the
iterators upto
' that level, read them and push them on to
the stack for
' this instance
For lngIndex = 0 To
cParentInst.Iterators.Count - 1
Set cRunIt =
cParentInst.Iterators(lngIndex)
cRunIts.Push cRunIt
Next lngIndex
End If

Set DetermineIterators = cRunIts

Exit Function

DetermineIteratorsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"DetermineIterators"
Err.Raise vbObjectError +
errExecInstanceFailed, _
mstrSource,
LoadResString(errExecInstanceFailed)

End Function

```

```

Private Function
DetermineConstraints(cInstanceRec As cInstance, _
    intConsType As ConstraintType) As Variant
' Returns a collection of all the constraints for this
' instance of the passed in type - all the
constraints defined
' for the manager are executed first, followed by
those defined
' for the step. If a step has an iterator defined for
it, each
' constraint is executed only once.

Dim cParentInst As cInstance
Dim cTempInst As cInstance
Dim vntConstraints As Variant
Dim vntTempCons As Variant
Dim cColConstraints() As Variant
Dim lngConsCount As Long

On Error GoTo DetermineConstraintsErr

Set cTempInst = cInstanceRec
lngConsCount = 0

' Go all the way to the root
Do
    If cTempInst.ParentInstanceId > 0 Then
        Set cParentInst =
mcInstances.QueryInstance(cTempInst.ParentInstanceId)
    Else
        Set cParentInst = Nothing
    End If

    ' Check if the step has an iterator defined for it
    If cTempInst.ValidForIteration(cParentInst,
intConsType) Then
        vntTempCons =
mcRunConstraints.ConstraintsForStep( _
            cTempInst.Step.StepId,
cTempInst.Step.VersionNo, _
            intConsType, blnSort:=True, _
            blnGlobal:=False,
blnGlobalConstraintsOnly:=False)

        If Not IsEmpty(vntTempCons) Then
            ReDim Preserve
cColConstraints(lngConsCount)
cColConstraints(lngConsCount) =
vntTempCons
            lngConsCount = lngConsCount + 1
        End If
    End If

    Set cTempInst = cParentInst

Loop While Not cTempInst.Is Nothing

If lngConsCount > 0 Then
    vntTempCons =
OrderConstraints(cColConstraints, intConsType)
End If

DetermineConstraints = vntTempCons

Exit Function

DetermineConstraintsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"DetermineConstraints"
Err.Raise vbObjectError +
errExecInstanceFailed, _

```

```

        mstrSource,
LoadResString(errExecInstanceFailed)

End Function
Private Function
GetInstanceToExecute(cParentNode As
cInstance, _
    cSubStepRec As cSubStep, _
    cSubStepDtls As cStep) As cInstance

    Dim cSubStepInst As cInstance

    On Error GoTo GetInstanceToExecuteErr

    BugAssert Not (cParentNode Is Nothing
Or _
    cSubStepRec Is Nothing Or _
    cSubStepDtls Is Nothing), _
    "GetInstanceToExecute: Input
invalid"

    ' Check if it has iterators
    If cSubStepDtls.IteratorCount = 0 Then
        ' Check if the step has been executed
        If cSubStepRec.TasksRunning = 0 And
cSubStepRec.TasksComplete = 0 And _
            Not
mcInstances.CompletedInstanceExists(cPare
ntNode.InstanceId, cSubStepDtls) Then
            ' The sub-step hasn't been executed
            yet.
            ' Create an instance for it and exit
            Set cSubStepInst =
CreateInstance(cSubStepDtls, cParentNode)
        Else
            Set cSubStepInst = Nothing
        End If
    Else
        ' Check if there are pending iterations
for the sub-step
        If Not
cSubStepRec.NextIteration(cSubStepDtls) Is
Nothing Then
            ' Pending iterations exist - create an
instance for the sub-step and exit
            Set cSubStepInst =
CreateInstance(cSubStepDtls, cParentNode)
        Else
            ' No more iterations - continue with
the next substep
            Set cSubStepInst = Nothing
        End If
    End If

    Set GetInstanceToExecute = cSubStepInst
Exit Function

GetInstanceToExecuteErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
"GetInstanceToExecute"
    Err.Raise vbObjectError +
errNavInstancesFailed, _
        mstrSource,
LoadResString(errNavInstancesFailed)

End Function

Public Function InstancesForStep(lngStepId
As Long, ByRef StepStatus As
InstanceStatus) As cInstances

```

```

' Returns an array of all the instances for a
step
Dim lngIndex As Long
Dim cTempInst As cInstance
Dim cStepInstances As cInstances
Dim cStepRec As cStep

On Error GoTo InstancesForStepErr

Set cStepInstances = New cInstances

For lngIndex = 0 To mcInstances.Count - 1
    Set cTempInst = mcInstances(lngIndex)

    If cTempInst.Step.StepId = lngStepId
Then
        cStepInstances.Add cTempInst
    End If
Next lngIndex

If cStepInstances.Count = 0 Then
    Set cStepRec =
mcRunSteps.QueryStep(lngStepId)
    If Not
mcFailures.ExecuteSubStep(cStepRec.ParentSt
epId) Then
        StepStatus = gintAborted
    End If
    Set cStepRec = Nothing
End If

' Set the return value of the function to the
array of
' constraints that has been built above
Set InstancesForStep = cStepInstances

Set cStepInstances = Nothing
Exit Function

InstancesForStepErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
"InstancesForStep"
    Err.Raise vbObjectError +
errNavInstancesFailed, mstrSource, _
        LoadResString(errNavInstancesFailed)

End Function
Private Sub
RemoveFreeProcess(lngRunningProcess As
Long)
    ' Removes the passed in element from the
collection of
    ' free objects

    ' Confirm that the last element in the array is
the one
    ' we need to delete
    If mcFreeSteps(mcFreeSteps.Count - 1) =
lngRunningProcess Then
        mcFreeSteps.Delete
    Position:=mcFreeSteps.Count - 1
    Else
        ' Ask the class to find the element and
delete it
        mcFreeSteps.Delete
    Item:=lngRunningProcess
    End If

End Sub
Private Sub
AddFreeProcess(lngTerminatedProcess As
Long)

```

```

' Adds the passed in element to the collection of
' free objects

mcFreeSteps.Add lngTerminatedProcess

End Sub

Private Sub ResetForm(Optional ByVal lngIndex
As Long)

    Dim lngTemp As Long

    On Error GoTo ResetFormErr

    ' Check if there are any running instances to wait
for
    If mcFreeSteps.Count <>
glngNumConcurrentProcesses Then

        For lngTemp = 0 To mcFreeSteps.Count - 1
            If mcFreeSteps(lngTemp) = lngIndex Then
                Exit For
            End If
        Next lngTemp

        If lngTemp <= mcFreeSteps.Count - 1 Then
            ' This process that just completed did not
exist in the list of
            ' free processes
            Call AddFreeProcess(lngIndex)
        End If

        If Not AnyStepRunning(mcFreeSteps,
mbarrFree) Then
            WriteToWspLog (mintRunComplete)
            ' All steps are complete
            RaiseEvent
RunComplete(Determine64BitTime())
        End If
    Else
        WriteToWspLog (mintRunComplete)
        RaiseEvent
RunComplete(Determine64BitTime())
    End If

    Exit Sub

ResetFormErr:

End Sub
Private Function NewInstanceId() As Long
    ' Will return new instance id's - uses a static
counter
    ' that it increments each time
    Static lngInstance As Long

    lngInstance = lngInstance + 1
    NewInstanceId = lngInstance

End Function

Private Function RunPendingStepInBranch(strCurBranchRoot As
String, _
    Optional cExecInstance As cInstance =
Nothing) As cInstance
    ' Runs a worker step in the branch being
executed, if
    ' there are any pending execution
    ' This function is also called when a step has just
completed
    ' execution - in which case the terminated
instance is
    ' passed in as the optional parameter. When that
happens,

```

```

' we first try to execute the siblings of the
terminated
' step if any are pending execution.
' If the terminated instance has not been
passed in, we
' start with the dummy root instance and
navigate down,
' trying to find a pending worker step.

Dim cExecSubStep As cStep
Dim cParentInstance As cInstance
Dim cNextInst As cInstance

On Error GoTo
RunPendingStepInBranchErr

If Not cExecInstance Is Nothing Then
' Called when an instance has
terminated
' When a worker step terminates, then
we need to
' decrement the number of running
steps on it's
' manager
Set cParentInstance = _

mcInstances.QueryInstance(cExecInstance.P
arentInstanceId)

Else
If StringEmpty(strCurBranchRoot) Or
mcDummyRootInstance Is Nothing Then
' Run complete - event raised by Run
method
Set RunPendingStepInBranch =
Nothing
Exit Function
End If

' If there are no pending steps on the
root instance,
' then there are no steps within the
branch that need
' to be executed
If
mcDummyRootInstance.AllComplete Or
mcDummyRootInstance.AllStarted Then
Set RunPendingStepInBranch =
Nothing
Exit Function
End If

Set cParentInstance =
mcDummyRootInstance
End If

Do
Set cNextInst =
GetSubStepToExecute(cParentInstance)
If cNextInst Is Nothing Then
' There are no steps within the branch
that can
' be executed - If we are at the
dummy instance,
' this branch has completed executing
If cParentInstance.Key =
mstrDummyRootKey Then
Set cNextInst = Nothing
Exit Do
Else
' Go to the parent instance and try
to find
' some other sibling is pending
execution

```

```

Set cNextInst =
mcInstances.QueryInstance(cParentInstance.Pa
rentInstanceId)

If cParentInstance.SubSteps.Count =
0 Then
cNextInst.ChildTerminated
cParentInstance.Step.StepId
End If
End If
End If

BugAssert Not cNextInst Is Nothing
Set cParentInstance = cNextInst

Loop While cNextInst.Step.StepType <>
gintWorkerStep

If Not cNextInst Is Nothing Then
Call ExecuteStep(cNextInst)
End If

Set RunPendingStepInBranch = cNextInst

Exit Function

RunPendingStepInBranchErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errNavInstancesFailed, _
mstrModuleName &
"RunPendingStepInBranch",
LoadResString(errNavInstancesFailed)

End Function
Private Function
RunPendingSibling(cTermInstance As
cInstance, _
dtmCompleteTime As Currency) As
cInstance
' This process is called when a step
terminates. Tries to
' run a sibling of the terminated step, if one
is pending
' execution.

Dim cParentInstance As cInstance
Dim cNextInst As cInstance

On Error GoTo RunPendingSiblingErr

If StringEmpty(mstrCurBranchRoot) Or
mcDummyRootInstance Is Nothing Then
' Run complete - event raised by Run
method
Set RunPendingSibling = Nothing
Exit Function
End If

BugAssert cTermInstance.ParentInstanceId
> 0, "Orphaned instance in array!"

' When a worker step terminates, then we
need to
' decrement the number of running steps
on it's
' manager
Set cParentInstance =
mcInstances.QueryInstance(cTermInstance.Par
entInstanceId)

' Decrement the number of running
processes on the

```

```

' parent by 1
Call
cParentInstance.ChildTerminated(cTermInstance.St
ep.StepId)

' The first step that terminates has to be a worker
' If it is complete, update the completed steps on
the
' parent by 1.
Call
cParentInstance.ChildCompleted(cTermInstance.St
ep.StepId)
cParentInstance.AllStarted = False

Do
Set cNextInst =
GetSubStepToExecute(cParentInstance,
dtmCompleteTime)
If cNextInst Is Nothing Then
If cParentInstance.Key =
mstrDummyRootKey Then
Set cNextInst = Nothing
Exit Do
Else
' Go to the parent instance and try to find
' some other sibling is pending execution
Set cNextInst =
mcInstances.QueryInstance(cParentInstance.ParentI
nstanceId)
If cParentInstance.IsRunning Then
cNextInst.AllStarted = True
Else
' No more sub-steps to execute
Call
cNextInst.ChildCompleted(cParentInstance.Step.Ste
pId)
Call
cNextInst.ChildTerminated(cParentInstance.Step.St
epId)
cNextInst.AllStarted = False
End If
End If
End If

BugAssert Not cNextInst Is Nothing
Set cParentInstance = cNextInst

Loop While cNextInst.Step.StepType <>
gintWorkerStep

If Not cNextInst Is Nothing Then
Call ExecuteStep(cNextInst)
End If

Set RunPendingSibling = cNextInst

Exit Function

RunPendingSiblingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunPendingSibling"
Err.Raise vbObjectError +
errNavInstancesFailed, mstrSource, _
LoadResString(errNavInstancesFailed)

End Function
Private Sub RunPendingSiblings(cTermInstance As
cInstance, _
dtmCompleteTime As Currency)
' This process is called when a step terminates.
Tries to

```

```

' run siblings of the terminated step, if
they are pending
' execution.

Dim cExecInst As cInstance

On Error GoTo RunPendingSiblingsErr
BugMessage "In RunPendingSiblings"

' Call a procedure to run the sibling of the
terminated
' step, if any. This procedure will also
update the
' number of complete/running tasks on the
manager steps.
Set cExecInst =
RunPendingSibling(cTermInstance,
dtmCompleteTime)

If Not cExecInst Is Nothing Then
Do
' Execute any other pending steps in
the branch.
' The step that has just terminated
might be
' the last one that was executing in a
sub-branch.
' That would mean that we can
execute another
' sub-branch that might involve more
than 1 step.
' Pass the just executed step as a
parameter.
Set cExecInst =
RunPendingStepInBranch(mstrCurBranchR
oot, cExecInst)
Else
Loop While Not cExecInst Is Nothing
Else
If Not
mcDummyRootInstance.IsRunning Then
' All steps have been executed in the
branch - run
' a new branch
Call RunNewBranch
Else
' There are no more steps to execute
in the current
' branch but we have running
processes.
End If
End If

Exit Sub

RunPendingSiblingsErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunPendingSiblings"
Err.Raise vbObjectError +
errNavInstancesFailed, _
mstrSource,
LoadResString(errNavInstancesFailed)

End Sub

Private Sub
NoSubStepsToExecute(cMgrInstance As
cInstance, Optional dtmCompleteTime As
Currency = gdtmEmpty)
' Called when we cannot find any more
substeps to run for

```

```

' manager step - set the allcomplete or
allstarted
' properties to true

If cMgrInstance.IsRunning() Then
cMgrInstance.AllStarted = True
Else
cMgrInstance.AllComplete = True
If dtmCompleteTime <> gdtmEmpty
Then
' Update the end time on the manager
step
Call
TimeCompleteUpdateForStep(cMgrInstance,
dtmCompleteTime)
End If
End If

End Sub

Private Function
GetSubStepToExecute(cParentNode As
cInstance, _
Optional dtmCompleteTime As Currency
= 0) As cInstance
' Returns the child of the passed in node that
is to be
' executed next. Checks if we are in the
middle of an instance
' being executed in which case it returns the
pending
' instance. Creates a new instance if there are
pending
' instances for a sub-step.

Dim lngIndex As Long
Dim cSubStepRec As cSubStep
Dim cSubStepDtls As cStep
Dim cSubStepInst As cInstance

On Error GoTo GetSubStepToExecuteErr

' There are a number of cases that need to be
accounted
' for here.
' 1. While traversing through all enabled
nodes for the
' first time - instance records may not exist
for the
' substeps.
' 2. Instance records exist, and there are
processes
' that need to be executed for a sub-step
' 3. There are no more processes that need to
be currently
' executed (till a process completes)
' 4. There are no more processes that need to
be executed
' (All substeps have completed execution)

' This is the only point where we check the
Abort flag -
' since this is the heart of the navigation
routine that
' selects processes to execute. Also, when a
step terminates
' selection of the next process goes through
here.
If mblnAbort Then
Set GetSubStepToExecute = Nothing
cParentNode.Status = gintAborted
Exit Function
End If

If mblnAsk Then

```

```

Set GetSubStepToExecute = Nothing
Exit Function
End If

If Not
mcFailures.ExecuteSubStep(cParentNode.Step.Step
Id) Then
Set GetSubStepToExecute = Nothing
cParentNode.Status = gintAborted
Exit Function
End If

' First check if there are pending steps for the
parent!
If cParentNode.IsPending Then
' Loop through all the sub-steps for the parent
node
For lngIndex = 0 To
cParentNode.SubSteps.Count - 1
Set cSubStepRec =
cParentNode.SubSteps(lngIndex)
Set cSubStepDtls =
mcRunSteps.QueryStep(cSubStepRec.StepId)
If Not
mcInstances.InstanceAborted(cSubStepRec) Then
' Check if the sub-step is a worker
If cSubStepDtls.StepType =
gintWorkerStep Then
' Find/create an instance to execute
Set cSubStepInst =
GetInstanceToExecute( _
cParentNode, cSubStepRec,
cSubStepDtls)
If Not cSubStepInst Is Nothing Then
Exit For
Else
' Continue w/ the next sub-step
End If
Else
' The sub-step is a manager step
' Check if there are any pending
instances for
' the manager
Set cSubStepInst =
mcInstances.QueryPendingInstance( _
cParentNode.InstanceId,
cSubStepRec.StepId)
If cSubStepInst Is Nothing Then
' Find/create an instance to execute
Set cSubStepInst =
GetInstanceToExecute( _
cParentNode, cSubStepRec,
cSubStepDtls)
If Not cSubStepInst Is Nothing Then
Exit For
Else
' Continue w/ the next sub-step
End If
Else
' We have found a pending instance
for the
' sub-step (manager) - exit the loop
Exit For
End If
End If
Next lngIndex

If lngIndex > cParentNode.SubSteps.Count - 1
Or cParentNode.SubSteps.Count = 0 Then
' If we could not find any sub-steps to
execute,
' mark the parent node as complete/all
started

```

```

Call
NoSubStepsToExecute(cParentNode,
dtmCompleteTime)
Set cSubStepInst = Nothing
End If
End If

Set GetSubStepToExecute = cSubStepInst
Exit Function

GetSubStepToExecuteErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"GetSubStepToExecute"
Err.Raise vbObjectError +
errNavInstancesFailed, mstrSource, _
LoadResString(errNavInstancesFailed)

End Function

Private Sub
TimeCompleteUpdateForStep(cMgrInstance
As cInstance, ByVal EndTime As Currency)

' Called when there are no more sub-steps
to execute for
' the manager step. It updates the end time
and status on
' the manager.
Dim lElapsed As Long

On Error GoTo
TimeCompleteUpdateForStepErr

If cMgrInstance.Key <>
mstrDummyRootKey Then
cMgrInstance.EndTime = EndTime
cMgrInstance.Status = gintComplete
lElapsed = (EndTime -
cMgrInstance.StartTime) * 10000
cMgrInstance.ElapsedTime = lElapsed
RaiseEvent
StepComplete(cMgrInstance.Step, EndTime,
cMgrInstance.InstanceId, lElapsed)
End If

Exit Sub

TimeCompleteUpdateForStepErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed,
mstrModuleName &
"TimeCompleteUpdateForStep"

End Sub

Private Function GetFreeObject() As Long

' Check the array of free objects and
retrieve the first one
If mcFreeSteps.Count > 0 Then
GetFreeObject =
mcFreeSteps(mcFreeSteps.Count - 1)
Else
mstrSource = mstrModuleName &
"GetFreeObject"
ShowError errMaxProcessesExceeded
On Error GoTo 0
Err.Raise vbObjectError +
errMaxProcessesExceeded, _

```

```

mstrSource, _

LoadResString(errMaxProcessesExceeded)
End If

End Function
Private Function
StepTerminated(cCompleteStep As cStep,
ByVal dtmCompleteTime As Currency, _
ByVal lngIndex As Long, ByVal
InstanceId As Long, ByVal ExecutionStatus
As InstanceStatus) As cStep
' This procedure is called whenever a step
terminates.
Dim cTermRec As cTermStep
Dim cInstRec As cInstance
Dim cStartInst As cInstance
Dim lElapsed As Long
Dim sLogLabel As String
Dim LogLabels As New cVectorStr
Dim iltIndex As Long

On Error GoTo StepTerminatedErr

Set cInstRec =
mcInstances.QueryInstance(InstanceId)
If dtmCompleteTime <> 0 And
cInstRec.StartTime <> 0 Then
' Convert to milliseconds since that is the
default precision
lElapsed = (dtmCompleteTime -
cInstRec.StartTime) * 10000
Else
lElapsed = 0
End If

Set cStartInst = cInstRec
iltIndex = 0
Do While cInstRec.Key <>
mstrDummyRootKey
sLogLabel = gstrSQ &
cInstRec.Step.StepLabel & gstrSQ

If iltIndex < cInstRec.Iterators.Count
Then
If cStartInst.Iterators(iltIndex).StepId =
cInstRec.Step.StepId Then
sLogLabel = sLogLabel & mslt &
gstrSQ &
cStartInst.Iterators(iltIndex).IteratorName &
gstrSQ & _
mslItValue & gstrSQ &
cStartInst.Iterators(iltIndex).Value & gstrSQ
iltIndex = iltIndex + 1
End If
End If

If cInstRec.Key = cStartInst.Key Then
' Append the execution status
sLogLabel = sLogLabel & " Status: " &
gstrSQ & gsExecutionStatus(ExecutionStatus)
& gstrSQ
If ExecutionStatus = gintFailed Then
' Append the continuation criteria for
the step since it failed
sLogLabel = sLogLabel & "
Continuation Criteria: " & gstrSQ &
gsContCriteria(cInstRec.Step.ContinuationCrit
eria) & gstrSQ
End If
End If
LogLabels.Add sLogLabel

```

```

Set cInstRec =
mcInstances.QueryInstance(cInstRec.ParentInstanc
eld)
Loop

Call WriteToWspLog(mintStepComplete,
LogLabels, dtmCompleteTime)
Set LogLabels = Nothing

' Adds the terminated step details to a queue.
Set cTermRec = New cTermStep
cTermRec.ExecutionStatus = ExecutionStatus
cTermRec.Index = lngIndex
cTermRec.InstanceId = InstanceId
cTermRec.TimeComplete = dtmCompleteTime
Call mcTermSteps.Add(cTermRec)
Set cTermRec = Nothing

RaiseEvent StepComplete(cCompleteStep,
dtmCompleteTime, InstanceId, lElapsed)

Exit Function

StepTerminatedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errExecuteBranchFailed, mstrSource
Call ResetForm(lngIndex)

End Function
Public Property Let RootKey(ByVal vdata As
String)

mstrRootKey = vdata

End Property

Public Property Get RootKey() As String
RootKey = mstrRootKey
End Property

Private Function InitExecStep() As cRunStep
' Since arrays of objects cannot be declared as
 WithEvents,
' we use a limited number of objects and set a
 maximum
' on the number of steps that can run in parallel
' This is a wrapper that will create an instance of
' a cExecuteSM object depending on the index
Dim lngIndex As Long

On Error GoTo InitExecStepErr

lngIndex = GetFreeObject

Select Case lngIndex + 1
Case 1
Set cExecStep1 = New cRunStep
Set InitExecStep = cExecStep1
Case 2
Set cExecStep2 = New cRunStep
Set InitExecStep = cExecStep2
Case 3
Set cExecStep3 = New cRunStep
Set InitExecStep = cExecStep3
Case 4
Set cExecStep4 = New cRunStep
Set InitExecStep = cExecStep4
Case 5
Set cExecStep5 = New cRunStep
Set InitExecStep = cExecStep5
Case 6
Set cExecStep6 = New cRunStep
Set InitExecStep = cExecStep6
Case 7

```



```

Set cExecStep82 = New cRunStep
Set InitExecStep = cExecStep82
Case 83
Set cExecStep83 = New cRunStep
Set InitExecStep = cExecStep83
Case 84
Set cExecStep84 = New cRunStep
Set InitExecStep = cExecStep84
Case 85
Set cExecStep85 = New cRunStep
Set InitExecStep = cExecStep85
Case 86
Set cExecStep86 = New cRunStep
Set InitExecStep = cExecStep86
Case 87
Set cExecStep87 = New cRunStep
Set InitExecStep = cExecStep87
Case 88
Set cExecStep88 = New cRunStep
Set InitExecStep = cExecStep88
Case 89
Set cExecStep89 = New cRunStep
Set InitExecStep = cExecStep89
Case 90
Set cExecStep90 = New cRunStep
Set InitExecStep = cExecStep90
Case 91
Set cExecStep91 = New cRunStep
Set InitExecStep = cExecStep91
Case 92
Set cExecStep92 = New cRunStep
Set InitExecStep = cExecStep92
Case 93
Set cExecStep93 = New cRunStep
Set InitExecStep = cExecStep93
Case 94
Set cExecStep94 = New cRunStep
Set InitExecStep = cExecStep94
Case 95
Set cExecStep95 = New cRunStep
Set InitExecStep = cExecStep95
Case 96
Set cExecStep96 = New cRunStep
Set InitExecStep = cExecStep96
Case 97
Set cExecStep97 = New cRunStep
Set InitExecStep = cExecStep97
Case 98
Set cExecStep98 = New cRunStep
Set InitExecStep = cExecStep98
Case 99
Set cExecStep99 = New cRunStep
Set InitExecStep = cExecStep99
Case Else
Set InitExecStep = Nothing
End Select

BugMessage "Sending cExecStep" &
(IngIndex + 1) & "!"

If Not InitExecStep Is Nothing Then
InitExecStep.Index = IngIndex

' Remove this element from the
collection of free objects
Call RemoveFreeProcess(IngIndex)
End If

Exit Function

InitExecStepErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
Set InitExecStep = Nothing

```

```

End Function
Public Sub Run()
' Calls procedures to build a list of all the
steps that
' need to be executed and to execute them
' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cTempStep As cStep

On Error GoTo RunErr

If StringEmpty(mstrRootKey) Then
Call ShowError(errExecuteBranchFailed)
On Error GoTo 0
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName &
"Run", _

LoadResString(errExecuteBranchFailed)
Else
' Execute the first branch
WriteToWspLog (mintRunStart)
RaiseEvent
RunStart(Determine64BitTime(),
mcWspLog.FileName)

If
mcNavSteps.HasChild(StepKey:=mstrRootKe
y) Then
Set cTempStep =
mcNavSteps.ChildStep(StepKey:=mstrRootKe
y)
mstrCurBranchRoot =
MakeKeyValid(cTempStep.StepId,
cTempStep.StepType)

Call
CreateDummyInstance(mstrCurBranchRoot)

' Run all pending steps in the branch
If Not RunBranch(mstrCurBranchRoot)
Then
' Execute a new branch if there aren't
any
' steps to run
Call RunNewBranch
End If
Else
WriteToWspLog (mintRunComplete)
' No children to execute - the run is
complete
RaiseEvent
RunComplete(Determine64BitTime())
End If
End If

Exit Sub

RunErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
Call ResetForm

End Sub
Private Sub RunNewBranch()
' We will build a tree of all instances that
occur and
' the count of the sub-steps that are running
will be
' stored at each node in the tree (maintained
internally

```

```

' as an array). Since there can be multiple
iterations
' of the top level nodes running at the same time,
we
' create a dummy node at the root that keeps a
record of
' the instances of the top level node.

' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cNextStep As cStep
Dim bRunComplete As Boolean

On Error GoTo RunNewBranchErr

bRunComplete = False

Do
If StringEmpty(mstrCurBranchRoot) Then
Exit Do
' On Error GoTo 0
' Err.Raise vbObjectError +
errExecuteBranchFailed, mstrSource, _
' LoadResString(errExecuteBranchFailed)
Else
Set cNextStep =
mcNavSteps.NextStep(StepKey:=mstrCurBranchRo
ot)

If cNextStep Is Nothing Then
mstrCurBranchRoot = gstrEmptyString
bRunComplete = True
Exit Do
Else
' Starting execution of a new branch -
initialize the
' module-level variable
mstrCurBranchRoot =
MakeKeyValid(cNextStep.StepId,
cNextStep.StepType)
Call
CreateDummyInstance(mstrCurBranchRoot)
End If
End If
Debug.Print "Running new branch: " &
mstrCurBranchRoot

' Loop until we find a branch that has steps to
execute
Loop While Not
RunBranch(mstrCurBranchRoot)

If bRunComplete Then
WriteToWspLog (mintRunComplete)
' Run is complete
RaiseEvent
RunComplete(Determine64BitTime())
End If

Exit Sub

RunNewBranchErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunNewBranch"
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrSource, _
LoadResString(errExecuteBranchFailed)

End Sub

```

```

Private Function RunBranch(strRootNode
As String) As Boolean
' This procedure is called to run all the
necessary steps
' in a branch. It can also be called when a
step terminates,
' in which case the terminated step is
passed in as the
' optional parameter. When a step
terminates, we need to
' either wait for some other steps to
terminate before
' we execute more steps or run as many
steps as necessary
' Returns True if there are steps currently
executing
' in the branch, else returns False
Dim cRunning As cInstance

On Error GoTo RunBranchErr

If Not StringEmpty(strRootNode) Then
' Call a procedure to execute all the
enabled steps
' in the branch - will return the step
node that is
' being executed - nothing means 'No
more steps to
' execute in the branch'.
Do
Set cRunning =
RunPendingStepInBranch(strRootNode,
cRunning)

Loop While Not cRunning Is Nothing

RunBranch =
mcDummyRootInstance.IsRunning
End If

Exit Function

RunBranchErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunBranch"
Err.Raise vbObjectError +
errExecuteBranchFailed, _
mstrSource,
LoadResString(errExecuteBranchFailed)

End Function
Private Sub
TimeUpdateForProcess(StepRecord As
cStep, _
ByVal InstanceId As Long, _
Optional ByVal StartTime As Currency
= 0, _
Optional ByVal EndTime As Currency
= 0, _
Optional ByVal ElapsedTime As Long
= 0, _
Optional Command As String)
' We do not maintain start and end
timestamps for the constraint
' of a step. Hence we check if the process
that just started/
' terminated is the worker step that is
being executed. If so,
' we update the start/end time and status
on the instance record.

```

```

Dim cInstanceRec As cInstance
Dim sItVal As String

On Error GoTo TimeUpdateForProcessErr

Set cInstanceRec =
mcInstances.QueryInstance(InstanceId)

If StartTime = 0 Then
RaiseEvent ProcessComplete(StepRecord,
EndTime, InstanceId, ElapsedTime)
Else
sItVal =
GetInstanceItValue(cInstanceRec)
RaiseEvent ProcessStart(StepRecord,
Command, StartTime, InstanceId, _
cInstanceRec.ParentInstanceId,
sItVal)
End If

Call
cInstanceRec.UpdateStartTime(StepRecord.Ste
pId, StartTime, EndTime, ElapsedTime)

Exit Sub

TimeUpdateForProcessErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed,
mstrModuleName & "TimeUpdateForProcess"

End Sub
Private Sub
TimeStartUpdateForStep(StepRecord As
cStep, _
ByVal InstanceId As Long, _
ByVal StartTime As Currency)

' Called when a step starts execution. Checks
if this is the
' first enabled child of the manager step. If
so, updates
' the start time and status on the manager.
' Also raises the Step Start event for the
completed step.

Dim cStartInst As cInstance
Dim cInstanceRec As cInstance
Dim LogLabels As New cVectorStr
Dim iItIndex As Long
Dim sLogLabel As String
Dim sPath As String
Dim sIt As String
Dim sItVal As String

On Error GoTo TimeStartUpdateForStepErr

Set cStartInst =
mcInstances.QueryInstance(InstanceId)

' Determine the step path and iterator values
for the step and raise a step start event
Set cInstanceRec = cStartInst
Do While cInstanceRec.Key <>
mstrDummyRootKey
If Not StringEmpty(sPath) Then
sPath = sPath & gstrFileSeparator
End If
sPath = sPath & gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.Pare
ntInstanceId)
Loop

```

```

For iItIndex = cStartInst.Iterators.Count - 1 To 0
Step -1
If Not StringEmpty(sIt) Then
sIt = sIt & gstrFileSeparator
End If
sIt = sIt & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
Next iItIndex

sItVal = GetInstanceItValue(cStartInst)
RaiseEvent StepStart(StepRecord, StartTime,
InstanceId, cStartInst.ParentInstanceId, _
sPath, sIt, sItVal)

iItIndex = 0
Set cInstanceRec = cStartInst
' Raise a StepStart event for the manager step, if
this is it's first sub-step being executed
Do While cInstanceRec.Key <>
mstrDummyRootKey

sLogLabel = gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
If iItIndex < cStartInst.Iterators.Count Then
If cStartInst.Iterators(iItIndex).StepId =
cInstanceRec.Step.StepId Then
sLogLabel = sLogLabel & msIt & gstrSQ
& cStartInst.Iterators(iItIndex).IteratorName &
gstrSQ & _
msItValue & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
iItIndex = iItIndex + 1
End If
End If
LogLabels.Add sLogLabel

If cInstanceRec.Key <> cStartInst.Key And
cInstanceRec.StartTime = 0 Then
cInstanceRec.StartTime = StartTime
cInstanceRec.Status = gintRunning
sItVal = GetInstanceItValue(cInstanceRec)
' The step path and iterator values are not
needed for manager steps, since
' they are primarily used by the run status
form
RaiseEvent StepStart(cInstanceRec.Step,
StartTime, cInstanceRec.InstanceId, _
cInstanceRec.ParentInstanceId,
gstrEmptyString, gstrEmptyString, _
sItVal)
End If

Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.ParentIns
tanceId)
Loop

Call WriteToWspLog(mintStepStart, LogLabels,
StartTime)
Set LogLabels = Nothing

Exit Sub

TimeStartUpdateForStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed,
mstrModuleName & "TimeStartUpdateForStep"

End Sub
Private Sub WriteToWspLog(iLogEvent As
WspLogEvents, Optional StepDtls As cVectorStr, _
Optional dtStamp As Currency = gdtmEmpty)

```



```

' Writes to the workspace log that is
generated for the run. The last three
' parameters are valid only for Step Start
and Step Complete events.
Static bError As Boolean
Dim sLabel As String
Dim lIndex As Long
Dim bHdr As Boolean
Dim cTempConn As cConnection

On Error GoTo WriteToWspLogErr

Select Case iLogEvent
Case mintRunStart
Set mcWspLog = New cFileSM
mcWspLog.FileName =
GetDefaultDir(WspId, mcParameters) &
gstrFileSeparator & _
Trim(Str(RunId)) &
gstrFileSeparator & "SMLog-" &
Format(Now, FMT_WSP_LOG_FILE) &
gstrLogFileSuffix
mcWspLog.WriteLine
(JulianDateToString(Determine64BitTime()
) & " Start Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId
)) & gstrSQ

' Write all current parameter values
to the log
bHdr = False
For lIndex = 0 To
mcParameters.ParameterCount - 1
If
mcParameters(lIndex).ParameterType <>
gintParameterApplication Then
If Not bHdr Then
mcWspLog.WriteLineField
JulianDateToString(Determine64BitTime())
& " Parameters: "
bHdr = True
Else
mcWspLog.WriteLineField
vbTab & vbTab & vbTab
End If
mcWspLog.WriteLine vbTab &
gstrSQ &
mcParameters(lIndex).ParameterName &
gstrSQ & vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterValue &
gstrSQ
End If
Next lIndex

' Write all connection properties to
the log
For lIndex = 0 To
RunConnections.Count - 1
Set cTempConn =
RunConnections(lIndex)
If lIndex = 0 Then
mcWspLog.WriteLineField
JulianDateToString(Determine64BitTime())
& " Connections: "
Else
mcWspLog.WriteLineField vbTab
& vbTab & vbTab
End If
mcWspLog.WriteLine vbTab &
gstrSQ & cTempConn.ConnectionName &
gstrSQ & _
vbTab & vbTab & gstrSQ &
cTempConn.ConnectionValue & gstrSQ &
_

```

```

vbTab & "No Count: " &
gstrSQ & cTempConn.NoCountDisplay &
gstrSQ & gstrBlank & _
"No Execute: " & gstrSQ &
cTempConn.NoExecute & gstrSQ & gstrBlank
& _
"Parse Query Only: " & gstrSQ
& cTempConn.ParseQueryOnly & gstrSQ &
gstrBlank & _
"Quoted Identifiers: " & gstrSQ
& cTempConn.QuotedIdentifiers & gstrSQ &
gstrBlank & _
"ANSI Nulls: " & gstrSQ &
cTempConn.AnsiNulls & gstrSQ & gstrBlank
& _
"Show Query Plan: " & gstrSQ
& cTempConn.ShowQueryPlan & gstrSQ &
gstrBlank & _
"Show Stats Time: " & gstrSQ
& cTempConn.ShowStatsTime & gstrSQ &
gstrBlank & _
"Show Stats IO: " & gstrSQ &
cTempConn.ShowStatsIO & gstrSQ &
gstrBlank & _
"Row Count" & gstrSQ &
cTempConn.RowCount & gstrSQ & gstrBlank
& _
"Query Timeout" & gstrSQ &
cTempConn.QueryTimeout & gstrSQ
Next lIndex

Case mintRunComplete
BugAssert Not mcWspLog Is Nothing
mcWspLog.WriteLine
(JulianDateToString(Determine64BitTime())
& " Comp. Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId))
& gstrSQ
Set mcWspLog = Nothing

Case mintStepStart
For lIndex = StepDtls.Count - 1 To 0
Step -1
sLabel = StepDtls(lIndex)
If lIndex = StepDtls.Count - 1 Then
mcWspLog.WriteLine
JulianDateToString(dtStamp) & " Start Step: "
& vbTab & sLabel
Else
mcWspLog.WriteLine vbTab &
vbTab & vbTab & vbTab & sLabel
End If
Next lIndex

Case mintStepComplete
For lIndex = StepDtls.Count - 1 To 0
Step -1
sLabel = StepDtls(lIndex)
If lIndex = StepDtls.Count - 1 Then
mcWspLog.WriteLine
JulianDateToString(dtStamp) & " Comp. Step:
" & vbTab & sLabel
Else
mcWspLog.WriteLine vbTab &
vbTab & vbTab & vbTab & sLabel
End If
Next lIndex

End Select

Exit Sub

WriteToWspLogErr:
If Not bError Then
bError = True

```

```

End If

End Sub

Private Sub WriteToWspLog(iLogEvent As
WspLogEvents, Optional StepDtls As cVectorStr, _
Optional dtStamp As Date = gdtmEmpty)
'
' This function uses the LogWriter dll - memory
corruption problems since the vb exe
' and the vc Execute DLL both use the same dll to
write.
' ' Writes to the workspace log that is generated
for the run. The last three
' ' parameters are valid only for StepStart and
StepComplete events.
' Static bError As Boolean
' Static sFile As String
' Dim sLabel As String
' Dim lIndex As Long
' Dim bHdr As Boolean
'
On Error GoTo WriteToWspLogErr
'
Select Case iLogEvent
Case mintRunStart
Set mcWspLog = New
LOGWRITERLib.SMLog
sFile = App.Path & "\" & "SMLog-" &
Format(Now, FMT_WSP_LOG_FILE) &
gstrLogFileSuffix
mcWspLog.FileName = sFile
mcWspLog.Init
mcWspLog.WriteLine (Format(Now,
FMT_WSP_LOG_DATE) & " Start Run: " &
vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId)) &
gstrSQ
'
' Write all current parameter values to the
log
bHdr = False
For lIndex = 0 To
mcParameters.ParameterCount - 1
If mcParameters(lIndex).ParameterType
<> gintParameterApplication Then
If Not bHdr Then
mcWspLog.WriteLine
Format(Now, FMT_WSP_LOG_DATE) & "
Parameters: " & vbTab & gstrSQ &
mcParameters(lIndex).ParameterName & gstrSQ &
vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterValue & gstrSQ
bHdr = True
Else
mcWspLog.WriteLine vbTab &
vbTab & vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterName & gstrSQ &
vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterValue & gstrSQ
End If
End If
Next lIndex
'
Case mintRunComplete
BugAssert Not mcWspLog Is Nothing
mcWspLog.WriteLine (Format(Now,
FMT_WSP_LOG_DATE) & " Comp. Run: " &
vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId)) &
gstrSQ
Set mcWspLog = Nothing
'
Case mintStepStart
For lIndex = StepDtls.Count - 1 To 0 Step -
1

```

<pre> ' sLabel = StepDtls(IIndex) ' If IIndex = StepDtls.Count - 1 Then ' mcWspLog.WriteLine Format(dtStamp, FMT_WSP_LOG_DATE) & " Start Step: " & vbTab & sLabel ' Else ' mcWspLog.WriteLine vbTab & vbTab & vbTab & vbTab & sLabel ' End If ' Next IIndex ' Case mintStepComplete ' For IIndex = StepDtls.Count - 1 To 0 Step -1 ' sLabel = StepDtls(IIndex) ' If IIndex = StepDtls.Count - 1 Then ' mcWspLog.WriteLine Format(dtStamp, FMT_WSP_LOG_DATE) & " Comp. Step: " & vbTab & sLabel ' Else ' mcWspLog.WriteLine vbTab & vbTab & vbTab & vbTab & sLabel ' End If ' Next IIndex ' End Select ' Exit Sub ' End Sub 'WriteToWspLogErr: ' If Not bError Then ' bError = True ' End If 'End Sub Public Property Get WspPreExecution() As Variant ' WspPreExecution = mcvntWspPreCons End Property Public Property Let WspPreExecution(ByVal vdata As Variant) ' mcvntWspPreCons = vdata End Property Public Property Get WspPostExecute() As Variant ' WspPostExecute = mcvntWspPostCons End Property Public Property Let WspPostExecute(ByVal vdata As Variant) ' mcvntWspPostCons = vdata End Property Private Sub ExecuteStep(cCurStep As cInstance) ' ' Initializes a cRunStep object with all the properties ' ' corresponding to the step to be executed and calls it's ' ' execute method to execute the step Dim cExecStep As cRunStep On Error GoTo ExecuteStepErr mstrSource = mstrModuleName & "ExecuteStep" ' ' Confirm that the step is a worker If cCurStep.Step.StepType <> gintWorkerStep Then On Error GoTo 0 </pre>	<pre> Err.Raise vbObjectError + errExecInstanceFailed, mstrSource, _ LoadResString(errExecInstanceFailed) End If Set cExecStep = InitExecStep() ' Exceeded the number of processes that we can run simultaneously If cExecStep Is Nothing Then ' ' Raise an error On Error GoTo 0 Err.Raise vbObjectError + errProgramError, mstrSource, _ LoadResString(errProgramError) End If ' Initialize the instance id - not needed for step execution ' but necessary to identify later which instance completed cExecStep.InstanceId = cCurStep.InstanceId Set cExecStep.ExecuteStep = cCurStep.Step Set cExecStep.Iterators = cCurStep.Iterators Set cExecStep.Globals = mcRunSteps Set cExecStep.WspParameters = mcParameters Set cExecStep.WspConnections = RunConnections Set cExecStep.WspConnDtls = RunConnDtls ' Initialize all the pre and post-execution constraints that ' ' have been defined globally for the workspace cExecStep.WspPreCons = mcvntWspPreCons cExecStep.WspPostCons = mcvntWspPostCons ' Initialize all the pre and post-execution constraints for ' ' the step being executed cExecStep.PreCons = DetermineConstraints(cCurStep, gintPreStep) cExecStep.PostCons = DetermineConstraints(cCurStep, gintPostStep) cExecStep.RunId = RunId cExecStep.CreateInputFiles = CreateInputFiles ' Call the execute method to execute the step cExecStep.Execute Set cExecStep = Nothing Exit Sub ExecuteStepErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Call ExecutionFailed(cExecStep) End Sub Public Property Set Steps(cRunSteps As cArrSteps) Set mcRunSteps = cRunSteps Set mcNavSteps.StepRecords = cRunSteps End Property </pre>	<pre> Public Property Set Parameters(cParameters As cArrParameters) ' ' A reference to the parameter array - we use it to ' substitute parameter values in the step text Set mcParameters = cParameters End Property Public Property Get Steps() As cArrSteps Set Steps = mcRunSteps End Property Public Property Get Constraints() As cArrConstraints Set Constraints = mcRunConstraints End Property Public Property Set Constraints(vdata As cArrConstraints) Set mcRunConstraints = vdata End Property Private Sub cExecStep1_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, Elapsed:=lElapsed) End Sub Private Sub cExecStep1_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep1_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep1.Index, InstanceId, Status) End Sub Private Sub cExecStep1_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub </pre>
---	--	---

Private Sub cExecStep9_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep9_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep9_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep9.Index, InstanceId, Status) End Sub Private Sub cExecStep9_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep10_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep10_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep10_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep10.Index, InstanceId, Status) End Sub Private Sub cExecStep10_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep10_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep10.Index, InstanceId, Status) End Sub Private Sub cExecStep10_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep11_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep11_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep11_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep11.Index, InstanceId, Status) End Sub Private Sub cExecStep11_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	End Sub Private Sub cExecStep12_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep12_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep12_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep12.Index, InstanceId, Status) End Sub Private Sub cExecStep12_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep13_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep13_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep13_StepComplete(cStepRecord As cStep, _
---	--	---

dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep13.Index, InstanceId, Status) End Sub Private Sub cExecStep13_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep14_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep14_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep14_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep14.Index, InstanceId, Status) End Sub Private Sub cExecStep14_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep15_ProcessComplete(cStepRecord As cStep, _	dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep15_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep15_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep15.Index, InstanceId, Status) End Sub Private Sub cExecStep15_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep16_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep16_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep16_StepComplete(cStepRecord As cStep, _	dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep16.Index, InstanceId, Status) End Sub Private Sub cExecStep16_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep17_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep17_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep17_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep17.Index, InstanceId, Status) End Sub Private Sub cExecStep17_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep18_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub
--	---	--

```

        Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep19.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep19_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep20_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep20_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep20_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep20.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep20_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep21_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

<pre> End Sub Private Sub cExecStep27_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep28_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep28_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep28_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep28.Index, InstanceId, Status) End Sub Private Sub cExecStep28_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep29_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub </pre>	<pre> End Sub Private Sub cExecStep29_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep29_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep29.Index, InstanceId, Status) End Sub Private Sub cExecStep29_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep30_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep30_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep30_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep30.Index, InstanceId, Status) End Sub </pre>	<pre> Private Sub cExecStep30_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep31_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep31_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep31_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep31.Index, InstanceId, Status) End Sub Private Sub cExecStep31_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep32_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep32_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) </pre>
---	--	--

End Sub Private Sub cExecStep32_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep32.Index, InstanceId, Status) End Sub Private Sub cExecStep32_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep33_ProcessComplete(cStepReco rd As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep33_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep33_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep33.Index, InstanceId, Status) End Sub Private Sub cExecStep33_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	Private Sub cExecStep34_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep34_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep34_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep34.Index, InstanceId, Status) End Sub Private Sub cExecStep34_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep35_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep35_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep35_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep35.Index, InstanceId, Status) End Sub Private Sub cExecStep35_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep36_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep36_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep36_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep36.Index, InstanceId, Status) End Sub Private Sub cExecStep36_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep37_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub
--	---	---


```

Private Sub
cExecStep37_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep37_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep37.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep37_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep38_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep38_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep38_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep38.Index,
InstanceId, Status)

End Sub

```

```

Private Sub
cExecStep38_StepStart(cStepRecord As cStep,
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep39_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep39_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep39_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep39.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep39_StepStart(cStepRecord As cStep,
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep40_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep40_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep40_StepComplete(cStepRecord As cStep,
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep40.Index, InstanceId, Status)

End Sub

Private Sub cExecStep40_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep41_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep41_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep41_StepComplete(cStepRecord As cStep,
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep41.Index, InstanceId, Status)

End Sub

Private Sub cExecStep41_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep42_ProcessComplete(cStepRecord As
cStep, _

```


<pre> dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep47_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep47_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep47_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep47.Index, InstanceId, Status) End Sub Private Sub cExecStep47_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep48_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep48_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub </pre>	<pre> strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep48_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep48.Index, InstanceId, Status) End Sub Private Sub cExecStep48_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep49_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep49_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep49_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep49.Index, InstanceId, Status) End Sub Private Sub cExecStep49_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub </pre>	<pre> Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep50_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep50_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep50_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep50.Index, InstanceId, Status) End Sub Private Sub cExecStep50_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep51_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep51_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep51_StepComplete(cStepRecord As cStep, _ </pre>
--	--	--

dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep51.Index, InstanceId, Status) End Sub Private Sub cExecStep51_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep52_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep52_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep52_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep52.Index, InstanceId, Status) End Sub Private Sub cExecStep52_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep53_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep53_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep53_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep53.Index, InstanceId, Status) End Sub Private Sub cExecStep53_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep54_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep54_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep54_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep54.Index, InstanceId, Status) End Sub Private Sub cExecStep54_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep55_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep55_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep55_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep55.Index, InstanceId, Status) End Sub Private Sub cExecStep55_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep56_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep56_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)
--	---	---

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep56_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep56.Index, InstanceId, Status) End Sub Private Sub cExecStep56_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep57_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep57_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep57_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep57.Index, InstanceId, Status) End Sub Private Sub cExecStep57_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)	Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep58_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep58_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep58_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep58.Index, InstanceId, Status) End Sub Private Sub cExecStep58_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep59_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep59_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)	End Sub Private Sub cExecStep59_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep59.Index, InstanceId, Status) End Sub Private Sub cExecStep59_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep60_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep60_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep60_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep60.Index, InstanceId, Status) End Sub Private Sub cExecStep60_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep61_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)
--	---	---

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep61_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep61_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep61.Index, InstanceId, Status) End Sub Private Sub cExecStep61_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep62_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep62_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep62_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep62.Index, InstanceId, Status) End Sub Private Sub cExecStep62_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep63_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep63_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep63_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep63.Index, InstanceId, Status) End Sub Private Sub cExecStep63_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep64_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	End Sub Private Sub cExecStep64_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep64_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep64.Index, InstanceId, Status) End Sub Private Sub cExecStep64_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep65_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep65_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep65_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep65.Index, InstanceId, Status) End Sub Private Sub cExecStep65_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)
--	--	---

<pre> End Sub Private Sub cExecStep70_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep71_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep71_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep71_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep71.Index, InstanceId, Status) End Sub Private Sub cExecStep71_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep72_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub </pre>	<pre> End Sub Private Sub cExecStep72_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep72_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep72.Index, InstanceId, Status) End Sub Private Sub cExecStep72_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep73_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep73_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep73_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep73.Index, InstanceId, Status) End Sub </pre>	<pre> Private Sub cExecStep73_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep74_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep74_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep74_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep74.Index, InstanceId, Status) End Sub Private Sub cExecStep74_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep75_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep75_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) </pre>
---	--	--

<pre> End Sub Private Sub cExecStep75_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep75.Index, InstanceId, Status) End Sub Private Sub cExecStep75_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep76_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep76_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep76_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep76.Index, InstanceId, Status) End Sub Private Sub cExecStep76_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub </pre>	<pre> Private Sub cExecStep77_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep77_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep77_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep77.Index, InstanceId, Status) End Sub Private Sub cExecStep77_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep78_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep78_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep78_StepComplete(cStepRecord As cStep, _ </pre>	<pre> dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep78.Index, InstanceId, Status) End Sub Private Sub cExecStep78_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep79_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep79_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep79_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep79.Index, InstanceId, Status) End Sub Private Sub cExecStep79_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep80_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub </pre>
--	---	---

```

Private Sub
cExecStep80_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep80_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep80.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep80_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep81_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)

End Sub

Private Sub
cExecStep81_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep81_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep81.Index,
InstanceId, Status)

End Sub

```

```

Private Sub
cExecStep81_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep82_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)

End Sub

Private Sub
cExecStep82_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep82_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep82.Index, lngInstanceId,
Status)

End Sub

Private Sub
cExecStep82_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep83_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)

End Sub

Private Sub
cExecStep83_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep83_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep83.Index, lngInstanceId, Status)

End Sub

Private Sub cExecStep83_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep84_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
Elapsed:=lElapsed)

End Sub

Private Sub
cExecStep84_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep84_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep84.Index, lngInstanceId, Status)

End Sub

Private Sub cExecStep84_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep85_ProcessComplete(cStepRecord As
cStep, _

```



```
Private Sub  
cExecStep91_ProcessStart(cStepRecord As  
cStep,
```

```
Private Sub  
cExecStep92_StepStart(cStepRecord As cStep  
- dtmStartTime As Currency, InstanceId As  
Long)
```

Private Sub
cExecStep94_StepComplete(cStepRecord As cStep,

dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep94.Index, InstanceId, Status) End Sub Private Sub cExecStep94_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep95_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep95_StepStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep95_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep95.Index, InstanceId, Status) End Sub Private Sub cExecStep95_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep96_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub	dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep96_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep96_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep96.Index, InstanceId, Status) End Sub Private Sub cExecStep96_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep97_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep97_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep97_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep97.Index, InstanceId, Status) End Sub Private Sub cExecStep97_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep98_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep98_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep98_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep98.Index, InstanceId, Status) End Sub Private Sub cExecStep98_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep99_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep99_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)
---	--	--

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep99_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep99.Index, _ lngInstanceId, Status) End Sub Private Sub cExecStep99_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime) End Sub Private Sub cExecStep2_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep2_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep2_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep2.Index, _ lngInstanceId, Status) End Sub Private Sub cExecStep2_StepStart(cStepRecord As cStep, _	dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime) End Sub Private Sub cExecStep3_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep3_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep3_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep3.Index, _ lngInstanceId, Status) End Sub Private Sub cExecStep3_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime) End Sub Private Sub cExecStep4_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep4_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep4_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep4.Index, _ lngInstanceId, Status) End Sub Private Sub cExecStep4_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime) End Sub Private Sub cExecStep5_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep5_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep5_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep5.Index, _ lngInstanceId, Status) End Sub Private Sub cExecStep5_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime) End Sub
--	--	--

```

Private Sub
cExecStep6_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call
    TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep6_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call
    TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

Private Sub
cExecStep6_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep6.Index, _
        lngInstanceId, Status)

End Sub

Private Sub
cExecStep6_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, lngInstanceId As Long)

    Call
    TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep7_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call
    TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep7_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call
    TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

```

```

Private Sub
cExecStep7_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep7.Index, _
        lngInstanceId, Status)

End Sub

Private Sub
cExecStep7_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep8_ProcessComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep8_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)

End Sub

Private Sub
cExecStep8_StepComplete(cStepRecord As cStep, _
    dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime, cExecStep8.Index, _
        lngInstanceId, Status)

End Sub

Private Sub
cExecStep8_StepStart(cStepRecord As cStep, _
    dtmStartTime As Currency, lngInstanceId As Long)

    Call TimeStartUpdateForStep(cStepRecord, lngInstanceId, dtmStartTime)

End Sub

Private Sub Class_Initialize()

    Dim lngCount As Long
    Dim lngTemp As Long

```

```

On Error GoTo InitializeErr

Set mcFreeSteps = New cVectorLng
' Initialize the array of free objects with all elements
' for now
For lngCount = 0 To glngNumConcurrentProcesses - 1 Step 1
    mcFreeSteps.Add lngCount
Next lngCount

' Initialize a byte array with the number of free processes. It will
' be used later to determine if any step is running
' Each element in the array can represent 8 steps, 1 for each bit
ReDim mbarrFree(glngNumConcurrentProcesses \ gintBitsPerByte)

' Initialize each element in the byte array w/ all 1's
' (upto glngNumConcurrentProcesses)
For lngCount = LBound(mbarrFree) To UBound(mbarrFree) Step 1
    lngTemp = IIf(_
        glngNumConcurrentProcesses - (gintBitsPerByte * lngCount) > gintBitsPerByte, _
        gintBitsPerByte, _
        glngNumConcurrentProcesses - (gintBitsPerByte * lngCount))

    mbarrFree(lngCount) = (2 ^ lngTemp) - 1
Next lngCount

Set mcInstances = New cInstances
Set mcFailures = New cFailedSteps
Set mcNavSteps = New cStepTree
Set mcTermSteps = New cTermSteps

' Initialize the Abort flag to False
mblnAbort = False
mblnAsk = False

Exit Sub

InitializeErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInitializeFailed, mstrModuleName & "Initialize", _
    LoadResString(errInitializeFailed)

End Sub
Private Sub Class_Terminate()

    On Error GoTo Class_TerminateErr

    mcFreeSteps.Clear
    Set mcFreeSteps = Nothing
    ReDim mbarrFree(0)

    mcInstances.Clear
    Set mcInstances = Nothing

    Set mcFailures = Nothing
    Set mcNavSteps = Nothing
    Set mcTermSteps = Nothing

Exit Sub

Class_TerminateErr:
Call LogErrors(Errors)

```

<pre> End Sub Private Sub mcTermSteps_TermStepExists(cStepDetails As cTermStep) Call RunNextStep(cStepDetails.TimeComplete, cStepDetails.Index, _ cStepDetails.InstanceId, cStepDetails.ExecutionStatus) End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunItDetails" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cRunItDetails.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module encapsulates the properties of iterator values ' that are used by the step being executed at runtime. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cRunItDetails." Private mstrSource As String Private mstrIteratorName As String Private mintType As ValueType Private mlngSequence As Long Private mlngFrom As Long Private mlngTo As Long Private mlngStep As Long Private mstrValue As String Public Property Get RangeTo() As Long RangeTo = mlngTo End Property Public Property Let RangeTo(ByVal vdata As Long) mlngTo = vdata End Property Public Property Get RangeFrom() As Long RangeFrom = mlngFrom End Property Public Property Get Sequence() As Long Sequence = mlngSequence </pre>	<pre> End Property Public Property Get RangeStep() As Long RangeStep = mlngStep End Property Public Property Let RangeStep(vdata As Long) mlngStep = vdata End Property Public Property Let RangeFrom(ByVal vdata As Long) mlngFrom = vdata End Property Public Property Let Sequence(ByVal vdata As Long) mlngSequence = vdata End Property Public Property Get IteratorType() As ValueType IteratorType = mintType End Property Public Property Let IteratorType(ByVal vdata As ValueType) On Error GoTo TypeErr mstrSource = mstrModuleName & "Type" ' These constants have been defined in the enumeration, ' Type, which is exposed Select Case vdata Case gintFrom, gintTo, gintStep, gintValue mintType = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, _ mstrSource, LoadResString(errTypeInvalid) End Select Exit Property TypeErr: LogErrors Errors mstrSource = mstrModuleName & "Type" On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, _ mstrSource, LoadResString(errTypeInvalid) End Property Private Sub IsList() If mintType <> gintValue Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidProperty, mstrSource, _ LoadResString(errInvalidProperty) End If End Sub </pre>	<pre> Private Sub IsRange() If mintType = gintValue Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidProperty, mstrSource, _ LoadResString(errInvalidProperty) End If End Sub Public Property Get Value() As String Value = mstrValue End Property Public Property Let Value(vdata As String) mstrValue = vdata End Property Public Property Get IteratorName() As String IteratorName = mstrIteratorName End Property Public Property Let IteratorName(ByVal vdata As String) mstrIteratorName = vdata End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunItNode" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' An iterator class containing the properties that are used ' by the stpe being executed. ' These iterators might actually come from steps that are at ' a higher level than the step actually being executed (viz. ' direct ascendants of the step at any level). Option Explicit Public IteratorName As String Public Value As String Public StepId As Long VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunOnly" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False Option Explicit Public Event Done() Private WithEvents mcRunWsp As cRunWorkspace Attribute mcRunWsp.VB_VarHelpID = -1 </pre>
--	--	--

<pre> Public WspName As String Public WorkspaceId As Long Public WspLog As String Public Sub RunWsp() On Error GoTo RunWspErr Set mcRunWsp = New cRunWorkspace Set mcRunWsp.LoadDb = dbsAttTool mcRunWsp.WorkspaceId = WorkspaceId mcRunWsp.CreateInputFiles = True mcRunWsp.RunWorkspace Exit Sub RunWspErr: ' Log the VB error code LogErrors Errors End Sub Private Sub mcRunWsp_RunComplete(dtmEndTime As Currency) MsgBox "Completed executing workspace: " & gstrSQ & WspName & gstrSQ & " at " & _ JulianDateToString(dtmEndTime) & "." & vbCrLf & vbCrLf & _ "The log file for the run is: " & gstrSQ & WspLog & gstrSQ & "." RaiseEvent Done End Sub Private Sub mcRunWsp_RunStart(dtmStartTime As Currency, strWspLog As String, lRunId As Long) WspLog = strWspLog End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunStep" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cRunStep.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' PURPOSE: This class executes the step that is assigned to the ' ExecuteStep property. It executes the pre-execution constraints ' in sequence and then the step itself. At the end it executes ' the post-execution constraints. Since these steps should always ' be executed in sequence, each step is only fired on the ' completion of the previous step. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit </pre>	<pre> ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cRunStep." Private mstrSource As String ' Local variable(s) to hold property value(s) Private mcStep As cStep Private mcGlobals As cArrSteps Private mcvntWspPreCons As Variant Private mcvntWspPostCons As Variant Private mcvntPreCons As Variant Private mcvntPostCons As Variant Private mclterators As cRunCollt Private mlngInstanceId As Long ' Identifier for the current instance Private mlngIndex As Long ' Index value for the current instance Private mstrCommand As String ' The command string Private msRunStepDtl As String ' Step text/file name that will go into the run_step_details table Private mblnAbort As Boolean ' Set to True when the user aborts the run Private msOutputFile As String Private msErrorFile As String Private miStatus As InstanceStatus Private mcVBErr As cVBErrorsSM Public WspParameters As cArrParameters Public WspConnections As cConnections Public WspConnDtls As cConnDtls Private WithEvents mcTermProcess As cTermProcess Attribute mcTermProcess.VB_VarHelpID = -1 Public RunId As Long Public CreateInputFiles As Boolean Private msOutputDir As String ' Object that will execute the step Private WithEvents mcExecObj As EXECUTEDLLLib.Execute Attribute mcExecObj.VB_VarHelpID = -1 ' Holds the step that is currently being executed (constraint or ' worker step) Private mcExecStep As cStep Private Const msCompareExe As String = "\diff.exe" Private Enum NextNodeType mintWspPreConstraint = 1 mintPreConstraint mintStep mintWspPostConstraint mintPostConstraint End Enum ' Public events to notify the calling function of the ' start and end time for each step Public Event StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Public Event StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) </pre>	<pre> Public Event ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, _ InstanceId As Long) Public Event ProcessComplete(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long, lElapsed As Long) Private Function AppendDiffErrors(sDiffFile As String) ' The file containing the errors generated by the diff utility is passed in ' These errors are appended to the error file for the step Dim sTemp As String Dim InputFile As Integer If Not StringEmpty(sDiffFile) Then InputFile = FreeFile Open sDiffFile For Input Access Read As InputFile Do While Not EOF(InputFile) ' Loop until end of file. Line Input #InputFile, sTemp ' Read line into variable. mcVBErr.LogMessage sTemp Loop Close InputFile End If End Function Private Sub CreateStepTextFile() ' Creates a file containing the step text being executed On Error GoTo CreateStepTextFileErr Dim sInputFile As String If mcExecStep.ExecutionMechanism = gintExecuteShell Then sInputFile = GetOutputFile(gsCmdFileSuffix) Else sInputFile = GetOutputFile(gsSqlFileSuffix) End If ' Generate a file containing the step text being executed If Not StringEmpty(mcExecStep.StepTextFile) Or mcExecStep.ExecutionMechanism = gintExecuteShell Then FileCopy mstrCommand, sInputFile Else Call WriteCommandToFile(mstrCommand, sInputFile) End If Exit Sub CreateStepTextFileErr: mcVBErr.LogVBErrors End Sub Private Function GetOutputFile(strFileExt As String) As String ' This function generates the output file name for the step currently being executed ' The value of the built-in parameter 'DefaultDir' is appended with the run identifier </pre>
---	---	--

```

' for the file location
' The step label is used for the file name
and a combination of all iterator values
' for the step is used to make the output
files unique for each instance
Dim sFile As String
Dim sIt As String
Dim lIt As Long

On Error GoTo GetOutputFileErr

sFile =
SubstituteParametersIfPossible(mcExecStep
.StepLabel)

sFile = TranslateStepLabel(sFile)

If mcExecStep Is mcStep Then
' Use iterators that have been defined
for the worker or any of it's managers
' to make the error/log file unique for
this instance
For lIt = mcIterators.Count - 1 To 0
Step -1
sIt = sIt & gsExtSeparator &
mcIterators(lIt).Value
Next lIt
End If
sIt = sIt & strFileExt

' Ensure that the length of the complete
path does not exceed 255 characters
If Len(msOutputDir) + Len(sFile) +
Len(sIt) > MAX_PATH Then
sFile = Mid(sFile, 1, MAX_PATH -
Len(sIt) - Len(msOutputDir))
End If
GetOutputFile = msOutputDir & sFile &
sIt
Exit Function

GetOutputFileErr:

' Does not make sense to log error to the
error file yet. Write to the project
' log and return the step label as default
GetOutputFile = mcExecStep.StepLabel
& gsExtSeparator & strFileExt

End Function

Private Sub HandleExecutionError()

On Error GoTo HandleExecutionError

' Log the error code raised by Visual
Basic
miStatus = gintFailed
mcVBErr.LogVBEErrors
Call
mcVBErr.WriteError(errExecuteStepFailed,
-
OptArgs:="Continuation criteria for
the step is: " &
gsContCriteria(mcStep.ContinuationCriteria
))

HandleExecutionError:

' Logging failed - return

End Sub

Public Property Get Index() As Long

```

```

Index = mlngIndex

End Property
Public Property Let Index(ByVal vdata As
Long)

mlngIndex = vdata

End Property
Private Function InitializeExecStatus() As
InstanceStatus
Dim sCompareFile As String

On Error GoTo InitializeExecStatusErr

InitializeExecStatus =
mcExecObj.StepStatus

If InitializeExecStatus = gintComplete Then
If Not
StringEmpty(mcExecStep.FailureDetails) Then
' Compare output to determine whether
the step failed
sCompareFile =
GetShortName(SubstituteParameters( _
mcExecStep.FailureDetails,
mcExecStep.WorkspaceId, mcIterators, _
WspParameters))
InitializeExecStatus =
IIf(CompareOutput(sCompareFile,
msOutputFile), gintComplete, gintFailed)
End If
End If

Exit Function

InitializeExecStatusErr:
mcVBErr.LogVBEErrors
' Call LogErrors(Errors)
InitializeExecStatus =
mcExecObj.StepStatus

End Function
Private Function
CompareOutput(sCompareFile As String,
sOutputFile As String) As Boolean

Dim sCmpOutput As String
Dim sDiffOutput As String

On Error GoTo CompareOutputErr

' Create temporary files to store the file
compare output and
' the errors generated by the compare
function
sCmpOutput = CreateTempFile()
sDiffOutput = CreateTempFile()

' Run the compare utility and redirect it's
output and errors
SyncShell ("cmd /c " & _
GetShortName(App.Path &
msCompareExe) & gstrBlank & _
sCompareFile & gstrBlank &
sOutputFile & _
" > " & sCmpOutput & " 2> " &
sDiffOutput)

If FileLen(sDiffOutput) > 0 Then
' The compare generated errors - append
error msgs to the error file
Call AppendDiffErrors(sDiffOutput)
CompareOutput = False

```

```

Else
CompareOutput = (FileLen(sCmpOutput) = 0)
End If

If Not CompareOutput Then
mcVBErr.WriteError errDiffFailed
End If

' Delete the temporary files used to store the
output of the compare and
' the errors generated by the compare
Kill sDiffOutput
Kill sCmpOutput

Exit Function

CompareOutputErr:
mcVBErr.LogVBEErrors
CompareOutput = False

End Function
Public Property Get InstanceId() As Long

InstanceId = mlngInstanceId

End Property
Public Property Let InstanceId(ByVal vdata As
Long)

mlngInstanceId = vdata

End Property

Private Function ExecuteConstraint(vntConstraints
As Variant, _
ByRef intLoopIndex As Integer) As Boolean

' Returns True if there is a constraint in the
passed in
' array that remains to be executed

If IsArray(vntConstraints) And Not
IsEmpty(vntConstraints) Then
ExecuteConstraint = (LBound(vntConstraints)
<= intLoopIndex) And (intLoopIndex <=
UBound(vntConstraints))
Else
ExecuteConstraint = False
End If

End Function
Private Function NextStep() As cStep

' Determines which is the next step to be executed
- it could
' be either a pre-execution step, the worker step
itself
' or a post-execution step

Dim cConsRec As cConstraint
Dim cNextStepRec As cStep
Dim vntStepConstraints As Variant

' Static variable to remember exactly where we
are in the
' processing
Static intIndex As Integer
Static intNextStepType As NextNodeType

On Error GoTo NextStepErr

If mblnAbort = True Then
' The user has aborted the run - do not run any
more
' processes for the step

```

```

Set NextStep = Nothing
Exit Function
End If

If intNextStepType = 0 Then
' First time through this function - set
the Index and
' node type to initial values
intNextStepType =
mintWspPreConstraint
intIndex = 0
RaiseEvent StepStart(mcStep,
Determine64BitTime(), mlngInstanceId)
End If

Do
Select Case intNextStepType
Case mintWspPreConstraint
vntStepConstraints =
mcvntWspPreCons

Case mintPreConstraint
vntStepConstraints =
mcvntPreCons

Case mintStep
' CONS:
If mcStep.StepType =
gintWorkerStep Then
Set cNextStepRec = mcStep
End If

Case mintWspPostConstraint
vntStepConstraints =
mcvntWspPostCons

Case mintPostConstraint
vntStepConstraints =
mcvntPostCons

End Select

If intNextStepType <> mintStep Then
' Check if there is a constraint to be
executed
If
ExecuteConstraint(vntStepConstraints,
intIndex) Then
' Get the corresponding step record
to be executed
' Query the global step record for
the current
' constraint
Set cConsRec =
vntStepConstraints(intIndex)

Set cNextStepRec =
mcGlobals.QueryStep(cConsRec.GlobalStep
Id)
intIndex = intIndex + 1
Else
If intNextStepType =
mintPostConstraint Then
' No more stuff to be executed
for the step
' Raise a Done event
Set cNextStepRec = Nothing

' Set the next step type to an
invalid value
intNextStepType = -1
Else
Call
NextType(intNextStepType, intIndex)
End If

```

```

End If
Else
' Increment the step type so we look at
the post-
' execution steps the next time through
Call NextType(intNextStepType,
intIndex)
End If

Loop Until (Not cNextStepRec Is Nothing)
Or _
intNextStepType = -1

Set NextStep = cNextStepRec

Exit Function

NextStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"NextStep"
Err.Raise vbObjectError +
errNextStepFailed, mstrSource, _
LoadResString(errNextStepFailed)

End Function
Public Sub Execute()
' This procedure is the method that executes
the step that
' is assigned to the ExecuteStep property. It
call a procedure
' to determine the next step to be executed.
' Then it initializes all the properties of the
cExecuteSM object
' and calls it's run method to execute it.
Dim cConn As cConnection
Dim cRunConnDtl As cConnDtl

On Error GoTo ExecuteErr

' If this procedure is called after a step has
completed,
' we would have to check if we created any
temporary files
' while executing that step
If Not mcExecStep Is Nothing Then
If Not
StringEmpty(mcExecStep.StepTextFile) Or
mcExecStep.ExecutionMechanism =
gintExecuteShell Then
' Remove the temporary file that we
created while
' running this command
Kill mstrCommand
End If

Call StepCompleted

' The VB errors class stores a reference to
the Execute class since it uses
' a method of the class to write errors to
the error log. Hence,
' release all references to the Execute
object before destroying it.
Set mcVBErr.ErrorFile = Nothing
Set mcExecObj = Nothing

' Delete empty output and error files
(generated by shell commands)
' (Can be done only after cleaning up
cExecObj)
Call DeleteEmptyOutputFiles
Else

```

```

' First time through - initialize the location of
output files
msOutputDir =
GetDefaultDir(mcStep.WorkspaceId,
WspParameters)
msOutputDir = msOutputDir &
gstrFileSeparator & Trim(Str(RunId)) &
gstrFileSeparator
' Dummy file since the function expects a file
name
MakePathValid (msOutputDir & "a.txt")
End If

' Call a procedure to determine the next step to be
executed
' - could be a constraint or the step itself
' Initialize a module-level variable to the step
being
' executed
Set mcExecStep = NextStep
If mcExecStep Is Nothing Then
RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mlngInstanceId, miStatus)
' No more stuff to execute
Exit Sub
End If

Dim sStartDir As String

Set mcExecObj = New
EXECUTEDLLLib.Execute

' The VB errors class uses the WriteError method
of the Execute class to write
' all VB errors to the error file for the step (this
prevents a clash when the
' VB errors and Execution errors have to be
written to the same log). Hence, store
' a reference to the Execute object in mcVBErr
msErrorFile = GetOutputFile(gsErrorFileSuffix)
mcExecObj.ErrorFile = msErrorFile
Call DeleteFile(msErrorFile,
bCheckIfEmpty:=False)
Set mcVBErr.ErrorFile = mcExecObj

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
sStartDir =
Trim$(GetShortName(SubstituteParameters( _
mcExecStep.StartDir,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)))
' Dummy connection object
Set cConn = New cConnection
Set cRunConnDtl = New cConnDtl
Else
' Find the connection string value and
substitute parameter values in it
Set cRunConnDtl =
WspConnDtls.GetConnectionDtl(mcExecStep.Wor
kspaceId, mcExecStep.StartDir)
Set cConn =
WspConnections.GetConnection(mcExecStep.Wor
kworkspaceId, cRunConnDtl.ConnectionString)
sStartDir =
Trim$(SubstituteParameters(cConn.ConnectionVal
ue, _
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters))
End If

msOutputFile =
GetOutputFile(gsOutputFileSuffix)
Call DeleteFile(msOutputFile,
bCheckIfEmpty:=False)

```

```

mcExecObj.OutputFile = msOutputFile
' mcExecObj.LogFile =
GetShortName(SubstituteParameters( _
' mcExecStep.LogFile,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters))
If mcExecStep.ExecutionMechanism =
gintExecuteODBC And _
cRunConnDtl.ConnType =
ConnTypeDynamic Then
Call
mcExecObj.DoExecute(BuildCommandStri
ng(), sStartDir,
mcExecStep.ExecutionMechanism, _
cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
cConn.AnsiNulls,
cConn.ShowQueryPlan,
cConn.ShowStatsTime,
cConn.ShowStatsIO, _
cConn.RowCount,
cConn.QueryTimeout, gstrEmptyString)
Else
Call
mcExecObj.DoExecute(BuildCommandStri
ng(), sStartDir,
mcExecStep.ExecutionMechanism, _
cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
cConn.AnsiNulls,
cConn.ShowQueryPlan,
cConn.ShowStatsTime,
cConn.ShowStatsIO, _
cConn.RowCount,
cConn.QueryTimeout,
mcExecStep.StartDir)
End If

Exit Sub

ExecuteErr:
Call HandleExecutionError

' We can assume that if we are in this
function, a StepStart event has been
triggered already.
RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mInglInstanceId,
miStatus)

End Sub
Private Function BuildCommandString() As
String
' Process text to be executed - either from
the text
' field or read it from a file.
' This function will always return the
command text for ODBC commands
' and a file name for Shell commands
Dim sFile As String
Dim sCommand As String
Dim sTemp As String

On Error GoTo BuildCommandStringErr

If Not
StringEmpty(mcExecStep.StepTextFile)
Then
' Substitute parameter values and
environment variables
' in the filename

```

```

msRunStepDtl =
SubstituteParameters(mcExecStep.StepTextFil
e, _
' mcExecStep.WorkspaceId,
mcIterators, WspParameters:=WspParameters)

sFile = GetShortName(msRunStepDtl)

mstrCommand =
SubstituteParametersInText(sFile,
mcExecStep.WorkspaceId)

If mcExecStep.ExecutionMechanism =
gintExecuteODBC Then
' Read the contents of the file and pass
it to ODBC
BuildCommandString =
ReadCommandFromFile(mstrCommand)
Else
BuildCommandString = mstrCommand
End If
Else
' Substitute parameter values and
environment variables
' in the step text
msRunStepDtl =
SubstituteParameters(mcExecStep.StepText, _
' mcExecStep.WorkspaceId,
mcIterators, WspParameters:=WspParameters)
mstrCommand = msRunStepDtl

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
' Write the command to a temp file
(enables us to execute multiple
' commands via the command
interpreter)
mstrCommand =
WriteCommandToFile(msRunStepDtl)
BuildCommandString = mstrCommand
Else
BuildCommandString =
SQLFixup(msRunStepDtl)
End If
End If

If CreateInputFiles Then
Call CreateStepTextFile
End If

Exit Function

BuildCommandStringErr:
' Log the error code raised by the Execute
procedure
' Call LogErrors(Errors)
mcVBErr.LogVBErrors

On Error GoTo 0
mstrSource = mstrModuleName &
"Execute"
Err.Raise vbObjectError +
errExecuteStepFailed, mstrSource, _
LoadResString(errExecuteStepFailed) &
mstrCommand

End Function
Public Sub Abort()

On Error GoTo AbortErr

' Setting the Abort flag to True will ensure
that we
' don't execute any more processes for this
step

```

```

mbInAbort = True

If Not mcExecObj Is Nothing Then
mcExecObj.Abort
Else
' We are not in the middle of execution yet
End If

Exit Sub

AbortErr:
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errProgramError, _
mstrModuleName & "Abort", _
LoadResString(errProgramError)

End Sub
Private Sub NextType(ByRef StepType As
NextNodeType, _
ByRef Position As Integer)

StepType = StepType + 1
Position = 0

End Sub
Private Sub StepCompleted()

On Error GoTo StepCompletedErr

If Not mcExecStep Is Nothing Then
If mcExecStep Is mcStep Then
miStatus = InitializeExecStatus
If miStatus = gintFailed Then
' Create input files if the step failed
execution and one hasn't been created already
If Not CreateInputFiles Then
CreateStepTextFile
Call
mcVBErr.WriteError(errExecuteStepFailed, _
OptArgs:="Continuation criteria for
the step is: " &
gsContCriteria(mcStep.ContinuationCriteria))
End If
End If
End If

Exit Sub

StepCompletedErr:
' Log the error code raised by Visual Basic
miStatus = gintFailed
mcVBErr.LogVBErrors
Call mcVBErr.WriteError(errExecuteStepFailed,
_
OptArgs:="Continuation criteria for the step
is: " &
gsContCriteria(mcStep.ContinuationCriteria))

End Sub
Private Sub DeleteEmptyOutputFiles()

On Error GoTo DeleteEmptyOutputFilesErr

' Delete empty output and error files
If Not mcExecStep Is Nothing Then
Call DeleteFile(msErrorFile,
bCheckIfEmpty:=True)
Call DeleteFile(msOutputFile,
bCheckIfEmpty:=True)
End If

Exit Sub

DeleteEmptyOutputFilesErr:

```

<pre> ' Not a critical error - continue End Sub Private Function ReadCommandFromFile(strFileName As String) As String ' Returns the contents of the passed in file Dim sCommand As String Dim sTemp As String Dim InputFile As Integer On Error GoTo ReadCommandFromFileErr If Not StringEmpty(strFileName) Then InputFile = FreeFile Open strFileName For Input Access Read As InputFile Line Input #InputFile, sCommand ' Read line into variable. Do While Not EOF(InputFile) ' Loop until end of file. Line Input #InputFile, sTemp ' Read line into variable. sCommand = sCommand & vbCrLf & sTemp Loop Close InputFile End If ReadCommandFromFile = sCommand Exit Function ReadCommandFromFileErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) mstrSource = mstrModuleName & "ReadCommandFromFile" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function Private Function SubstituteParametersIfPossible(strLabel As String) On Error GoTo SubstituteParametersIfPossibleErr SubstituteParametersIfPossible = SubstituteParameters(strLabel, _ mcExecStep.WorkspaceId, mcIterators, WspParameters:=WspParameters) Exit Function SubstituteParametersIfPossibleErr: SubstituteParametersIfPossible = strLabel End Function Private Function SubstituteParametersInText(strFileName As String, _ </pre>	<pre> IngWorkspace As Long) As String ' Reads each line in the passed in file, substitutes parameter ' values in the line and writes out the modified line to a ' temporary file that we create. The temporary file will be ' removed once the step completes execution. ' Returns the name of the newly created temporary file. Dim strTempFile As String Dim strTemp As String Dim strOutput As String Dim InputFile As Integer Dim OutputFile As Integer On Error GoTo SubstituteParametersInTextErr strTempFile = CreateTempFile() If Not StringEmpty(strFileName) Then InputFile = FreeFile Open strFileName For Input Access Read As InputFile OutputFile = FreeFile Open strTempFile For Output Access Write As OutputFile Do While Not EOF(InputFile) ' Loop until end of file. Line Input #InputFile, strTemp ' Read line into variable. strOutput = SubstituteParameters(strTemp, IngWorkspace, mcIterators, WspParameters:=WspParameters) If mcExecStep.ExecutionMechanism = gintExecuteODBC Then strOutput = SQLFixup(strOutput) Print #OutputFile, strOutput BugMessage strOutput Loop End If Close InputFile Close OutputFile SubstituteParametersInText = strTempFile Exit Function SubstituteParametersInTextErr: ' Log the error code raised by Visual Basic ' Call LogErrors(Errors) mcVBErr.LogVBErrors mstrSource = mstrModuleName & "SubstituteParametersInText" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function </pre>	<pre> Private Function WriteCommandToFile(sCommand As String, Optional sFile As String = gstrEmptyString) As String ' Writes the command text to a temporary file ' Returns the name of the temporary file Dim OutputFile As Integer On Error GoTo WriteCommandToFileErr If StringEmpty(sFile) Then sFile = CreateTempFile() End If OutputFile = FreeFile Open sFile For Output Access Write As OutputFile Print #OutputFile, sCommand Close OutputFile WriteCommandToFile = sFile Exit Function WriteCommandToFileErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) mstrSource = mstrModuleName & "WriteCommandToFile" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function Public Property Get WspPreCons() As Variant WspPreCons = mcvntWspPreCons End Property Public Property Let WspPreCons(ByVal vdata As Variant) mcvntWspPreCons = vdata End Property Public Property Get WspPostCons() As Variant WspPostCons = mcvntWspPostCons End Property Public Property Let WspPostCons(ByVal vdata As Variant) mcvntWspPostCons = vdata End Property Public Property Get PreCons() As Variant PreCons = mcvntPreCons End Property Public Property Let PreCons(ByVal vdata As Variant) mcvntPreCons = vdata End Property Public Property Get PostCons() As Variant PostCons = mcvntPostCons End Property Public Property Let PostCons(ByVal vdata As Variant) mcvntPostCons = vdata End Property Public Property Set Globals(cRunSteps As cArrSteps) </pre>
---	--	--

<pre> Set mcGlobals = cRunSteps End Property Public Property Set ExecuteStep(cRunStep As cStep) Set mcStep = cRunStep End Property Public Property Get Globals() As cArrSteps Set Globals = mcGlobals End Property Public Property Get ExecuteStep() As cStep Set ExecuteStep = mcStep End Property Public Property Set Iterators(vdata As cRunColIt) Set mcIterators = vdata End Property Private Sub Class_Initialize() ' Initialize the Abort flag to False mblnAbort = False Set mcVBErr = New cVBErroSM Set mcTermProcess = New cTermProcess End Sub Private Sub Class_Terminate() On Error GoTo Class_TerminateErr Set mcExecObj = Nothing Set mcVBErr = Nothing Set mcTermProcess = Nothing Exit Sub Class_TerminateErr: Call LogErrors(Errors) End Sub Private Sub mcExecObj_Start(ByVal StartTime As Currency) ' Raise an event indicating that the step has begun execution RaiseEvent ProcessStart(mcExecStep, msRunStepDtl, StartTime, mlngInstanceId) End Sub Private Sub mcExecObj_Complete(ByVal EndTime As Currency, ByVal Elapsed As Long) On Error GoTo mcExecObj_CompleteErr Debug.Print Elapsed RaiseEvent ProcessComplete(mcExecStep, EndTime, mlngInstanceId, Elapsed) mcTermProcess.ProcessTerminated Exit Sub mcExecObj_CompleteErr: Call LogErrors(Errors) </pre>	<pre> End Sub Private Sub mcTermProcess_TermProcessExists() On Error GoTo TermProcessExistsErr ' Call a procedure to execute the next step, if any Call Execute Exit Sub TermProcessExistsErr: ' Log the error code raised by the Execute procedure Call LogErrors(Errors) End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cRunWorkspace" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cRunWorkspace.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: This class loads all the information necessary to execute a workspace and calls cRunInst to execute the workspace. It also propagates Step start and complete and Run start and complete events. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors are raised by this module Private Const mstrModuleName As String = "cRunWorkspace." Private mstrSource As String Private mcRunSteps As cArrSteps Private mcRunParams As cArrParameters Private mcRunConstraints As cArrConstraints Private mcRunConnections As cConnections Private mcRunConnDtIs As cConnDtIs Private mcvntWspPreCons As Variant Private mcvntWspPostCons As Variant Private mddbLoadDb As Database Private mlngRunId As Long Private mlngWorkspaceId As Long Private mField As cStringSM Public CreateInputFiles As Boolean Private WithEvents mcRun As cRunInst Attribute mcRun.VB_VarHelpID = -1 Public Event RunStart(dtmStartTime As Currency, strWspLog As String, lRunId As Long) Public Event RunComplete(dtmEndTime As Currency) </pre>	<pre> Public Event StepStart(cStepRecord As cStep, dtmStartTime As Currency, lngInstanceId As Long, _ sPath As String, slts As String) Public Event StepComplete(cStepRecord As cStep, dtmEndTime As Currency, lngInstanceId As Long) Public Event ProcessStart(cStepRecord As cStep, strCommand As String, _ dtmStartTime As Currency, lngInstanceId As Long) Public Event ProcessComplete(cStepRecord As cStep, dtmEndTime As Currency, lngInstanceId As Long) Public Function InstancesForStep(lngStepId As Long, iStatus As InstanceStatus) As cInstances ' Returns an array of all the instances for a step If mcRun Is Nothing Then Set InstancesForStep = Nothing Else Set InstancesForStep = mcRun.InstancesForStep(lngStepId, iStatus) End If End Function Private Sub InsertRunDetail(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, _ lngInstanceId As Long, lParentInstanceId As Long, sltValue As String) ' Inserts a new run detail record into the database Dim strInsert As String Dim qy As QueryDef On Error GoTo InsertRunDetailErr mstrSource = mstrModuleName & "InsertRunDetail" strInsert = "insert into run_step_details " & _ "(run_id, step_id, version_no, instance_id, parent_instance_id, " & _ " command, start_time, iterator_value) " & _ " values (" #If USE_JET Then strInsert = strInsert & " [r_id], [s_id], [ver_no], [i_id], [p_i_id], " & _ "[com], [s_date], [it_val])" Set qy = mddbLoadDb.CreateQueryDef(_ gstrEmptyString, strInsert) ' Call a procedure to assign the Querydef parameters Call AssignParameters(qy, StartTime:=dtmStartTime, _ StepId:=cStepRecord.StepId, _ Version:=cStepRecord.VersionNo, _ InstanceId:=lngInstanceId, _ Command:=strCommand) qy.Execute dbFailOnError qy.Close #Else strInsert = strInsert & Str(mlngRunId) & _ "& ", " & Str(cStepRecord.StepId) & _ "& ", " & mField.MakeStringFieldValid(cStepRecord.VersionNo) _ </pre>
---	--	---

<pre> & ", " & Str(IngInstanceId) _ & ", " & Str(IParentInstanceId) _ & ", " & mField.MakeStringFieldValid(strCommand) - & ", " & Str(dtmStartTime) _ & ", " & mField.MakeStringFieldValid(sItValue) strInsert = strInsert & ") " mdbsLoadDb.Execute strInsert, dbFailOnError #End If Exit Sub InsertRunDetailErr: LogErrors Errors mstrSource = mstrModuleName & "InsertRunDetail" On Error GoTo 0 Err.Raise vbObjectError + errUpdateRunDataFailed, _ mstrSource, _ LoadResString(errUpdateRunDataFailed) End Sub Private Sub UpdateRunDetail(cStepRecord As cStep, _ dtmEndTime As Currency, IngInstanceId As Long, lElapsed As Long) ' Updates the run detail record in the database Dim strUpdate As String Dim qy As QueryDef On Error GoTo UpdateRunDetailErr strUpdate = "update run_step_details " & - " set end_time = [e_date], elapsed_time = [elapsed] " & _ " where run_id = [r_id] " & _ " and step_id = [s_id] " & _ " and version_no = [ver_no] " & _ " and instance_id = [i_id] " Set qy = mdbsLoadDb.CreateQueryDef(_ gstrEmptyString, strUpdate) ' Call a procedure to assign the Querydef parameters Call AssignParameters(qy, EndTime:=dtmEndTime, _ StepId:=cStepRecord.StepId, _ Version:=cStepRecord.VersionNo, _ InstanceId:=IngInstanceId, Elapsed:=lElapsed) qy.Execute dbFailOnError qy.Close Exit Sub UpdateRunDetailErr: LogErrors Errors mstrSource = mstrModuleName & "UpdateRunDetail" On Error GoTo 0 Err.Raise vbObjectError + errUpdateRunDataFailed, _ </pre>	<pre> mstrSource, _ LoadResString(errUpdateRunDataFailed) End Sub Private Function InsertRunHeader(dtmStartTime As Currency) As Long ' Inserts a new run header record into the database ' and returns the id for the run Dim strInsert As String Dim qy As QueryDef On Error GoTo InsertRunHeaderErr strInsert = "insert into run_header " & _ "(run_id, workspace_id, start_time) " & - " values (" & _ " [r_id], [w_id], [s_date])" Set qy = mdbsLoadDb.CreateQueryDef(_ gstrEmptyString, strInsert) ' Call a procedure to execute the Querydef object Call AssignParameters(qy, StartTime:=dtmStartTime) qy.Execute dbFailOnError qy.Close InsertRunHeader = mIngRunId Exit Function InsertRunHeaderErr: LogErrors Errors mstrSource = mstrModuleName & "InsertRunHeader" On Error GoTo 0 Err.Raise vbObjectError + errUpdateRunDataFailed, _ mstrSource, _ LoadResString(errUpdateRunDataFailed) End Function Private Sub InsertRunParameters(dtmStartTime As Currency) ' Inserts a new run header record into the database ' and returns the id for the run Dim strInsert As String Dim qy As QueryDef Dim cParamRec As cParameter Dim lngIndex As Long On Error GoTo InsertRunParametersErr strInsert = "insert into run_parameters " & _ "(run_id, parameter_name, parameter_value) " & _ " values (" & _ " [r_id], [p_name], [p_value])" Set qy = mdbsLoadDb.CreateQueryDef(_ gstrEmptyString, strInsert) qy.Parameters("r_id").Value = mIngRunId For lngIndex = 0 To mcRunParams.ParameterCount - 1 </pre>	<pre> Set cParamRec = mcRunParams(lngIndex) qy.Parameters("p_name").Value = cParamRec.ParameterName qy.Parameters("p_value").Value = cParamRec.ParameterValue qy.Execute dbFailOnError Next lngIndex qy.Close Exit Sub InsertRunParametersErr: LogErrors Errors mstrSource = mstrModuleName & "InsertRunParameters" On Error GoTo 0 Err.Raise vbObjectError + errUpdateRunDataFailed, _ mstrSource, _ LoadResString(errUpdateRunDataFailed) End Sub Private Sub AssignParameters(qyExec As DAO.QueryDef, _ Optional StartTime As Currency = 0, _ Optional EndTime As Currency = 0, _ Optional StepId As Long = 0, _ Optional Version As String = gstrEmptyString, - Optional InstanceId As Long = 0, _ Optional ParentInstanceId As Long = 0, _ Optional Command As String = gstrEmptyString, _ Optional Elapsed As Long = 0, _ Optional ItValue As String = gstrEmptyString) ' Assigns values to the parameters in the querydef object Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr mstrSource = mstrModuleName & "AssignParameters" For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" prmParam.Value = mIngWorkspaceId Case "[r_id]" prmParam.Value = mIngRunId Case "[s_id]" BugAssert StepId <> 0 prmParam.Value = StepId Case "[ver_no]" BugAssert Not StringEmpty(Version) prmParam.Value = Version Case "[i_id]" BugAssert InstanceId <> 0 prmParam.Value = InstanceId Case "[p_i_id]" prmParam.Value = ParentInstanceId Case "[com]" BugAssert Not StringEmpty(Command) prmParam.Value = Command Case "[s_date]" </pre>
---	---	---

```

BugAssert StartTime <> 0
prmParam.Value = StartTime

Case "[e_date]"
BugAssert EndTime <> 0
prmParam.Value = EndTime

Case "[elapsed]"
prmParam.Value = Elapsed

Case "[it_val]"
prmParam.Value = ItValue

Case Else
' Write the parameter name that is
faulty
WriteError errInvalidParameter,
mstrSource, _
prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:

mstrSource = mstrModuleName &
"AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrSource,
LoadResString(errAssignParametersFailed)

End Sub
Private Sub
RunStartProcessing(dtmStartTime As
Currency)

On Error GoTo RunStartProcessingErr

' Insert the run header into the database
Call InsertRunHeader(dtmStartTime)

' Insert the run parameters into the
database
Call InsertRunParameters(dtmStartTime)

Exit Sub

RunStartProcessingErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"RunStartProcessing"
ShowError errUpdateRunDataFailed
WriteError errUpdateRunDataFailed,
mstrSource

End Sub
Private Sub
ProcessStartProcessing(cStepRecord As
cStep, _
strCommand As String, dtmStartTime
As Currency, lngInstanceID As Long, _
lParentInstanceID As Long, sltValue As
String)

```

```

On Error GoTo ProcessStartProcessingErr

' Insert the run detail into the database
Call InsertRunDetail(cStepRecord,
strCommand, dtmStartTime, lngInstanceID, _
lParentInstanceID, sltValue)

Exit Sub

ProcessStartProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ProcessStartProcessing"
ShowError errUpdateRunDataFailed
WriteError errUpdateRunDataFailed,
mstrSource

End Sub
Private Sub StepStartProcessing(cStepRecord
As cStep, dtmStartTime As Currency, _
lngInstanceID As Long, lParentInstanceID
As Long, sltValue As String)

On Error GoTo StepStartProcessingErr

' Since ProcessStart events won't be
triggered for manager steps
If cStepRecord.StepType = gintManagerStep
Then
' Insert the run detail into the database
Call InsertRunDetail(cStepRecord,
cStepRecord.StepLabel, _
dtmStartTime, lngInstanceID,
lParentInstanceID, sltValue)
End If

Exit Sub

StepStartProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"StepStartProcessing"
ShowError errUpdateRunDataFailed

End Sub
Private Sub
ProcessCompleteProcessing(cStepRecord As
cStep, _
dtmStartTime As Currency, lngInstanceID
As Long, lElapsed As Long)

On Error GoTo
ProcessCompleteProcessingErr

' Insert the run detail into the database
Call UpdateRunDetail(cStepRecord,
dtmStartTime, lngInstanceID, lElapsed)

Exit Sub

ProcessCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ProcessCompleteProcessing"
ShowError errUpdateRunDataFailed

End Sub
Private Sub
StepCompleteProcessing(cStepRecord As
cStep, _
dtmEndTime As Currency, lngInstanceID
As Long, lElapsed As Long)

```

```

On Error GoTo StepCompleteProcessingErr

' Since ProcessComplete events won't be
triggered for manager steps
If cStepRecord.StepType = gintManagerStep
Then
' Update the run detail in the database
Call UpdateRunDetail(cStepRecord,
dtmEndTime, lngInstanceID, lElapsed)
End If

Exit Sub

StepCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
ShowError errUpdateRunDataFailed

End Sub
Private Sub RunCompleteProcessing(dtmEndTime
As Currency)

On Error GoTo RunCompleteProcessingErr

' Update the header record with the end time for
the run
Call UpdateRunHeader(dtmEndTime)

Exit Sub

RunCompleteProcessingErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
ShowError errUpdateRunDataFailed

End Sub
Private Sub UpdateRunHeader(ByVal dtmEndTime
As Currency)
' Updates the run header record with the end date

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo UpdateRunHeaderErr

strUpdate = "update run_header " & _
" set end_time = [e_date] " & _
" where run_id = [r_id] "

Set qy = mdbLoadDb.CreateQueryDef( _
gstrEmptyString, strUpdate)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy,
EndTime:=dtmEndTime)

qy.Execute dbFailOnError
qy.Close

Exit Sub

UpdateRunHeaderErr:
LogErrors Errors
mstrSource = mstrModuleName &
"UpdateRunHeader"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateRunDataFailed, _
mstrSource, _
LoadResString(errUpdateRunDataFailed)

End Sub

```



```

Public Property Let WorkspaceId(ByVal
vdata As Long)
    mlngWorkspaceId = vdata
End Property
Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property
Public Sub RunWorkspace()

    Dim cRunSeq As cSequence

    On Error GoTo RunWorkspaceErr

    ' Call a procedure to load the module-
level structures
    ' with all the step and parameter data for
the run
    If LoadRunData = False Then
        ' Error handled by the function already
        Exit Sub
    End If

    ' Retrieve the next run identifier using the
sequence class
    Set cRunSeq = New cSequence
    Set cRunSeq.IdDatabase = dbsAttTool
    cRunSeq.IdentifierColumn = "run_id"
    mlngRunId = cRunSeq.Identifier
    Set cRunSeq = Nothing

    Call
mcRunParams.InitBuiltInsForRun(mlngWor
kpaceId, mlngRunId)

    Set mcRun.Constraints =
mcRunConstraints
    mcRun.WspPreExecution =
mcvntWspPreCons
    mcRun.WspPostExecution =
mcvntWspPostCons

    Set mcRun.Steps = mcRunSteps
    Set mcRun.Parameters = mcRunParams
    Set mcRun.RunConnections =
mcRunConnections
    Set mcRun.RunConnDtls =
mcRunConnDtls

    mcRun.WspId = mlngWorkspaceId
    mcRun.RootKey =
LabelStep(mlngWorkspaceId)
    mcRun.RunId = mlngRunId
    mcRun.CreateInputFiles =
CreateInputFiles

    mcRun.Run

    Exit Sub

RunWorkspaceErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)

End Sub
Public Property Get LoadDb() As Database

    Set LoadDb = mdbLoadDb

End Property
Public Property Set LoadDb(vdata As
Database)

    Set mdbLoadDb = vdata

```

```

End Property
Private Function LoadRunData() As Boolean

    ' Loads the step, parameter and constraint
arrays
    ' with all the data for the workspace. Returns
False
    ' if a failure occurs

    Dim strWorkspaceName As String
    Dim recWspSteps As Recordset
    Dim qySteps As DAO.QueryDef
    Dim recWspParams As Recordset
    Dim qyParams As DAO.QueryDef
    Dim recWspConns As Recordset
    Dim qyConns As DAO.QueryDef
    Dim recWspConnDtls As Recordset
    Dim qyConnDtls As DAO.QueryDef

    On Error GoTo LoadRunDataErr

    Set mcRunSteps.StepDB = mdbLoadDb
    Set mcRunParams.ParamDatabase =
mdbLoadDb
    Set mcRunConstraints.ConstraintDB =
mdbLoadDb
    Set mcRunConnections.ConnDb =
mdbLoadDb
    Set mcRunConnDtls.ConnDb =
mdbLoadDb

    ' Read all the step and parameter data for the
workspace
    Call
ReadWorkspaceData(mlngWorkspaceId,
mcRunSteps, _
                mcRunParams, mcRunConstraints,
mcRunConnections, mcRunConnDtls, _
                recWspSteps, qySteps, recWspParams,
qyParams, recWspConns, qyConns, _
                recWspConnDtls, qyConnDtls)

    ' Load all the pre- and post-execution
constraints that
    ' have been defined for the workspace
    mcvntWspPreCons =
mcRunConstraints.ConstraintsForWsp( _
        mlngWorkspaceId, _
        gintPreStep, _
        blnSort:=True, _
        blnGlobalConstraintsOnly:=True)
    mcvntWspPostCons =
mcRunConstraints.ConstraintsForWsp( _
        mlngWorkspaceId, _
        gintPostStep, _
        blnSort:=True, _
        blnGlobalConstraintsOnly:=True)

    On Error Resume Next
    recWspSteps.Close
    qySteps.Close
    recWspParams.Close
    qyParams.Close
    recWspConns.Close
    qyConns.Close

    LoadRunData = True

    Exit Function

LoadRunDataErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    ShowError errLoadRunDataFailed
    LoadRunData = False

```

```

End Function
Public Sub StopRun()

    On Error GoTo StopRunErr

    If mcRun Is Nothing Then
        ' We haven't been the run yet, so do nothing
    Else
        mcRun.StopRun
    End If

    Exit Sub

StopRunErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    ' Errors would have been displayed by the called
process

End Sub
Public Sub AbortRun()

    On Error GoTo AbortRunErr

    If mcRun Is Nothing Then
        ' We haven't been the run yet, so do nothing
    Else
        mcRun.Abort
    End If

    Exit Sub

AbortRunErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    ' Errors would have been displayed by the called
process

End Sub
Private Sub Class_Initialize()

    ' Create instances of the step, parameter and
constraint arrays
    Set mcRunSteps = New cArrSteps
    Set mcRunParams = New cArrParameters
    Set mcRunConstraints = New cArrConstraints
    Set mcRunConnections = New cConnections
    Set mcRunConnDtls = New cConnDtls
    Set mcRun = New cRunInst
    Set mField = New cStringSM

End Sub
Private Sub Class_Terminate()

    On Error GoTo UnLoadRunDataErr

    ' Clears the step, parameter and constraint arrays
    Set mcRunSteps = Nothing
    Set mcRunParams = Nothing
    Set mcRunConstraints = Nothing
    Set mcRunConnections = Nothing
    Set mcRunConnDtls = Nothing

    Set mcRun = Nothing
    Set mdbLoadDb = Nothing
    Set mField = Nothing

    Exit Sub

UnLoadRunDataErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    ' Not a critical error - continue

```

<pre> Resume Next End Sub Private Sub mcRun_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) RaiseEvent ProcessComplete(cStepRecord, dtmEndTime, lngInstanceId) Call ProcessCompleteProcessing(cStepRecord, dtmEndTime, lngInstanceId, lElapsed) End Sub Private Sub mcRun_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long, _ lParentInstanceId As Long, sltValue As String) RaiseEvent ProcessStart(cStepRecord, strCommand, dtmStartTime, lngInstanceId) Call ProcessStartProcessing(cStepRecord, strCommand, dtmStartTime, lngInstanceId, _ lParentInstanceId, sltValue) End Sub Private Sub mcRun_RunComplete(dtmEndTime As Currency) Debug.Print "Run ended at: " & CStr(dtmEndTime) Call RunCompleteProcessing(dtmEndTime) RaiseEvent RunComplete(dtmEndTime) End Sub Private Sub mcRun_RunStart(dtmStartTime As Currency, strWspLog As String) RaiseEvent RunStart(dtmStartTime, strWspLog, mlngRunId) Debug.Print "Run started at: " & CStr(dtmStartTime) Call RunStartProcessing(dtmStartTime) End Sub Private Sub mcRun_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) RaiseEvent StepComplete(cStepRecord, dtmEndTime, lngInstanceId) ' BugMessage "Step: " & cStepRecord.StepLabel & " has completed!" Call StepCompleteProcessing(cStepRecord, dtmEndTime, lngInstanceId, lElapsed) End Sub </pre>	<pre> Private Sub mcRun_StepStart(cStepRecord As cStep, dtmStartTime As Currency, _ lngInstanceId As Long, lParentInstanceId As Long, sPath As String, slts As String, sltValue As String) RaiseEvent StepStart(cStepRecord, dtmStartTime, lngInstanceId, sPath, slts) 'bugmessage "Step: " & cStepRecord.StepLabel & " has started." Call StepStartProcessing(cStepRecord, dtmStartTime, lngInstanceId, lParentInstanceId, sltValue) End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cSequence" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cSequence.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This class uses the att_identifiers table to generate unique identifiers. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mlngIdentifier As Long Private mstrIdentifierColumn As String Private mreIdentifiers As Recordset Private mdbsDatabase As Database Private Const mstrEmptyString = "" ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cSequence." Private Sub CreateIdRecord() ' Creates a record with all identifiers having an initial value of 1 Dim sSql As String Dim pId As DAO.Parameter Dim qyId As DAO.QueryDef sSql = "insert into att_identifiers (" & _ " workspace_id, parameter_id, step_id, " & _ " constraint_id, run_id, connection_id " & _ ", " & FLD_ID_CONN_NAME & _ ") values (" & _ "[w_id], [p_id], [s_id], [c_id], [r_id], [conn_id], [conn_dtl_id])" Set qyId = mdbsDatabase.CreateQueryDef(gstrEmptyStri ng, sSql) For Each pId In qyId.Parameters </pre>	<pre> pId.Value = glMinId Next pId qyId.Execute dbFailOnError qyId.Close End Sub Private Sub CreateIdRecordset() Dim strSql As String ' Initialize the recordset with all identifiers strSql = "select * from att_identifiers" Set mreIdentifiers = mdbsDatabase.OpenRecordset(strSql, dbOpenForwardOnly) If mreIdentifiers.RecordCount = 0 Then CreateIdRecord Set mreIdentifiers = mdbsDatabase.OpenRecordset(strSql, dbOpenForwardOnly) End If BugAssert mreIdentifiers.RecordCount <> 0 End Sub Public Property Set IdDatabase(vdata As Database) Set mdbsDatabase = vdata End Property Public Property Let IdentifierColumn(vdata As String) Dim intIndex As Integer On Error GoTo IdentifierColumnErr ' Initialize the return value to an empty string mstrIdentifierColumn = mstrEmptyString Call CreateIdRecordset For intIndex = 0 To mreIdentifiers.Fields.Count - 1 If LCase(Trim(mreIdentifiers.Fields(intIndex).Name)) = _ LCase(Trim(vdata)) Then ' Valid column name mstrIdentifierColumn = vdata Exit Property End If Next intIndex BugAssert True, "Invalid column name!" Exit Property IdentifierColumnErr: LogErrors Errors mstrSource = mstrModuleName & "IdentifierColumn" On Error GoTo 0 Err.Raise vbObjectError + errIdentifierColumnFailed, _ mstrSource, _ LoadResString(errIdentifierColumnFailed) End Property Public Property Get Identifier() As Long </pre>
--	--	--

<pre> Dim strSql As String On Error GoTo GetIdentifierErr BugAssert mstrIdentifierColumn <> mstrEmptyString ' Increment the identifier column by 1 strSql = "update att_identifiers " & _ " set " & mstrIdentifierColumn & _ " = " & mstrIdentifierColumn & " + 1" mdbsDatabase.Execute strSql, dbFailOnError ' Refresh the recordset with identifier values Call CreateIdRecordset mIngIdentifier = mrecIdentifiers.Fields(mstrIdentifierColumn).Value Identifier = mIngIdentifier Exit Property GetIdentifierErr: LogErrors Errors mstrSource = mstrModuleName & "Identifier" On Error GoTo 0 Err.Raise vbObjectError + errGetIdentifierFailed, _ mstrSource, _ LoadResString(errGetIdentifierFailed) End Property Private Sub Class_Terminate() mrecIdentifiers.Close End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStack" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cStack.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This class implements a stack of objects. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cStack." Private mstrSource As String Private mcVector As cVector Private mIngCount As Long </pre>	<pre> Public Property Get Item(ByVal Position As Long) As Object Attribute Item.VB_UserMemId = 0 Set Item = mcVector(Position) End Property Public Sub Push(objToPush As Object) mcVector.Add objToPush End Sub Public Sub Clear() mcVector.Clear End Sub Public Function Pop() As Object If mcVector.Count > 0 Then Set Pop = mcVector.Delete(mcVector.Count - 1) Else Set Pop = Nothing End If End Function Public Function Count() As Long Count = mcVector.Count End Function Private Sub Class_Initialize() Set mcVector = New cVector End Sub Private Sub Class_Terminate() Set mcVector = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStep" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False Attribute VB_Ext_KEY = "SavedWithClassBuilder", "Yes" Attribute VB_Ext_KEY = "Top_Level", "Yes" ' FILE: cStep.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a step. ' Contains functions to insert, update and delete ' att_steps records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) </pre>	<pre> ' Option Explicit ' Local variable(s) to hold property value(s) Private mIngStepId As Long Private mstrVersionNo As String Private mstrStepLabel As String Private mstrStepTextFile As String Private mstrStepText As String Private mstrStartDir As String Private mIngWorkspaceId As Integer Private mIngParentStepId As Integer Private mstrParentVersionNo As String Private mintSequenceNo As Integer Private mintStepLevel As Integer Private mblnEnabledFlag As Boolean Private mstrDegreeParallelism As String Private mintExecutionMechanism As Integer Private mstrFailureDetails As String Private mintContinuationCriteria As Integer Private mblnGlobalFlag As Boolean Private mblnArchivedFlag As Boolean Private mstrOutputFile As String 'Private mstrLogFile As String Private mstrErrorFile As String Private mdbsDatabase As Database Private mintStepType As Integer Private mintOperation As Operation Private mIngPosition As Long Private mstrIteratorName As String Private mcIterators As cNodeCollections Private mblsNewVersion As Boolean Private msOldVersion As String ' The following constants are used throughout the project to ' indicate the different options selected by the user ' The options are presented to the user as control arrays of ' option buttons. These constants have to be in sync with the ' indexes of the option buttons. ' All the control arrays have an lbound of 1. The value 0 is ' used to indicate that the property being represented by the ' control array is not valid for the step ' Public enums are used since we cannot expose public constants ' in class modules. gintNoOption is applicable to all enums, ' but declared in the Execution method enum, since we cannot ' declare it more than once. ' Is here as a comment ' Has been defined in public.bas with the other object types 'Public Enum gintStepType ' gintGlobalStep = 3 ' gintManagerStep ' gintWorkerStep 'End Enum ' Execution Method options Public Enum ExecutionMethod gintNoOption = 0 gintExecuteODBC gintExecuteShell End Enum ' Failure criteria options Public Enum FailureCriteria gintFailureODBC = 1 gintFailureTextCompare </pre>
---	--	---

<pre> End Enum ' Continuation criteria options ' Note: Update the initialization of gsContCriteria in Initialize() if the ' continuation criteria are modified Public Enum ContinuationCriteria gintOnFailureAbort = 1 gintOnFailureContinue gintOnFailureCompleteSiblings gintOnFailureAbortSiblings gintOnFailureSkipSiblings gintOnFailureAsk End Enum ' The initial version # Private Const mstrMinVersion As String = "0.0" ' End of constants for option button control arrays ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cStep." ' The cSequence class is used to generate unique step identifiers Private mStepSeq As cSequence ' The StringSM class is used to carry out string operations Private mFieldValue As cStringSM Private Sub NewVersion() mbIsNewVersion = True msOldVersion = mstrVersionNo End Sub Public Function IsNewVersion() As Boolean IsNewVersion = mbIsNewVersion End Function Public Function OldVersionNo() As String OldVersionNo = msOldVersion End Function Public Sub SaveIterators() ' This procedure checks if any changes have been made ' to the iterators for the step. If so, it calls the ' methods of the iterator class to commit the changes Dim cItRec As cIterator Dim lngIndex As Long On Error GoTo SaveIteratorsErr For lngIndex = 0 To mcIterators.Count - 1 Set cItRec = mcIterators(lngIndex) Select Case cItRec.IndOperation Case QueryOp ' No changes were made to the queried Step. ' Do nothing Case InsertOp cItRec.Add mlngStepId, mstrVersionNo cItRec.IndOperation = QueryOp </pre>	<pre> Case UpdateOp cItRec.Update mlngStepId, mstrVersionNo cItRec.IndOperation = QueryOp Case DeleteOp cItRec.Delete mlngStepId, mstrVersionNo ' Remove the record from the collection mcIterators.Delete lngIndex End Select Next lngIndex Exit Sub SaveIteratorsErr: LogErrors Errors mstrSource = mstrModuleName & "SaveIterators" On Error GoTo 0 Err.Raise vbObjectError + errSaveFailed, _ mstrSource, _ LoadResString(errSaveFailed) End Sub Public Property Get IndOperation() As Operation IndOperation = mintOperation End Property Public Property Let IndOperation(ByVal vdata As Operation) BugAssert vdata = QueryOp Or vdata = InsertOp Or vdata = UpdateOp Or vdata = DeleteOp, "Invalid operation" mintOperation = vdata End Property Public Function Iterators() As Variant ' Returns a variant containing all the iterators that ' have been defined for the step Dim cStepIterators() As cIterator Dim cTempIt As cIterator Dim lngIndex As Long Dim lngItCount As Long On Error GoTo IteratorsErr lngItCount = 0 For lngIndex = 0 To mcIterators.Count - 1 ' Increase the array dimension and add the constraint ' to it Set cTempIt = mcIterators(lngIndex) If cTempIt.IndOperation <> DeleteOp Then ReDim Preserve cStepIterators(lngItCount) Set cStepIterators(lngItCount) = cTempIt lngItCount = lngItCount + 1 End If Next lngIndex If lngItCount = 0 Then Iterators = Empty </pre>	<pre> Else Iterators = cStepIterators() End If Call QuickSort(Iterators) Exit Function IteratorsErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errIteratorsFailed, _ mstrModuleName & "Iterators", _ LoadResString(errIteratorsFailed) End Function Public Function IteratorCount() As Long ' Returns a count of all the iterators for the step Dim lngItCount As Long Dim lngIndex As Long Dim cTempIt As cIterator On Error GoTo IteratorsErr lngItCount = 0 For lngIndex = 0 To mcIterators.Count - 1 If mcIterators(lngIndex).IndOperation <> DeleteOp Then lngItCount = lngItCount + 1 End If Next lngIndex IteratorCount = lngItCount Exit Function IteratorsErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errIteratorsFailed, _ mstrSource, _ LoadResString(errIteratorsFailed) End Function Public Sub Validate() ' Each distinct object will have a Validate method which ' will check if the class properties are valid. This method ' will be used to check interdependant properties that ' cannot be validated by the let procedures. ' It should be called by the add and modify methods of the class ' Check if the step label has been specified If StringEmpty(mstrStepLabel) Then ShowError errStepLabelMandatory On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ "Validate", LoadResString(errValidateFailed) End If If Not IsStringEmpty(mstrStepText) And Not IsStringEmpty(mstrStepTextFile) Then ShowError errStepTextOrFile On Error GoTo 0 Err.Raise vbObjectError + errStepTextOrFile, - "Validate", LoadResString(errStepTextOrFile) </pre>
--	--	--

<pre> End If End Sub Public Function IncVersionY() As String ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. This function will increment ' the y component of the step by 1 On Error GoTo IncVersionYErr ' Store the old version number for the step Call NewVersion mstrVersionNo = Trim\$(Str\$(GetX(mstrVersionNo))) & gstrVerSeparator & _ Trim\$(Str\$(GetY(mstrVersionNo) + 1)) IncVersionY = mstrVersionNo Exit Function IncVersionYErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "IncVersionY" On Error GoTo 0 Err.Raise vbObjectError + errIncVersionYFailed, _ gstrSource, _ LoadResString(errIncVersionYFailed) End Function Public Function IncVersionX() As String ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. This function will increment ' the y component of the step by 1 and reset the x component ' to 0 On Error GoTo IncVersionXErr ' Store the old version number for the step Call NewVersion mstrVersionNo = Trim\$(Str\$(GetX(mstrVersionNo) + 1)) & gstrVerSeparator & "0" IncVersionX = mstrVersionNo Exit Function IncVersionXErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "IncVersionX" On Error GoTo 0 Err.Raise vbObjectError + errIncVersionXFailed, _ gstrSource, _ </pre>	<pre> LoadResString(errIncVersionXFailed) End Function Private Function GetY(strVersion As String) As Long ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. Given an argument of type ' x.y, it returns y ' Truncate the fractional part to get the parent component ' of the version number (x.y) GetY = Val(Mid(strVersion, InStr(strVersion, gstrVerSeparator) + 1)) End Function Private Function GetX(strVersion As String) As Long ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. Given an argument of type ' x.y, it returns x ' Truncate the fractional part to get the parent component ' of the version number (x.y) GetX = Val(Left(strVersion, InStr(strVersion, gstrVerSeparator) - 1)) End Function Public Function Clone(Optional cCloneStep As cStep) As cStep ' Creates a copy of a given step Dim lngIndex As Long Dim cltRec As cIterator Dim cltClone As cIterator On Error GoTo CloneErr If cCloneStep Is Nothing Then Set cCloneStep = New cStep End If ' Copy all the step properties to the newly created step ' Initialize the global flag first since subsequent ' validations might depend on it cCloneStep.GlobalFlag = mblnGlobalFlag ' cCloneStep.GlobalRunMethod = mintGlobalRunMethod cCloneStep.StepType = mintStepType cCloneStep.StepId = mlngStepId cCloneStep.VersionNo = mstrVersionNo cCloneStep.StepLabel = mstrStepLabel cCloneStep.StepTextFile = mstrStepTextFile cCloneStep.StepText = mstrStepText cCloneStep.StartDir = mstrStartDir cCloneStep.WorkspaceId = mlngWorkspaceId cCloneStep.ParentStepId = mlngParentStepId </pre>	<pre> cCloneStep.ParentVersionNo = mstrParentVersionNo cCloneStep.StepLevel = mintStepLevel cCloneStep.SequenceNo = mintSequenceNo cCloneStep.EnabledFlag = mblnEnabledFlag cCloneStep.DegreeParallelism = mstrDegreeParallelism cCloneStep.ExecutionMechanism = mintExecutionMechanism cCloneStep.FailureDetails = mstrFailureDetails cCloneStep.ContinuationCriteria = mintContinuationCriteria cCloneStep.ArchivedFlag = mblnArchivedFlag cCloneStep.OutputFile = mstrOutputFile ' cCloneStep.LogFile = mstrLogFile cCloneStep.ErrorFile = mstrErrorFile cCloneStep.IteratorName = mstrIteratorName cCloneStep.IndOperation = mintOperation cCloneStep.Position = mlngPosition Set cCloneStep.NodeDB = mdbDatabase ' Clone all the iterators for the step For lngIndex = 0 To mclIterators.Count - 1 Set cltRec = mclIterators(lngIndex) Set cltClone = cltRec.Clone cCloneStep.LoadIterator cltClone Next lngIndex ' And set the return value to the newly created step Set Clone = cCloneStep Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function 'End Sub ' Public Property Let OutputFile(ByVal vdata As String) mstrOutputFile = vdata End Property Public Property Get OutputFile() As String OutputFile = mstrOutputFile End Property 'Public Property Let LogFile(ByVal vdata As String) ' ' mstrLogFile = vdata ' 'End Property ' 'Public Property Get LogFile() As String ' ' LogFile = mstrLogFile ' 'End Property Public Property Let ErrorFile(ByVal vdata As String) </pre>
---	---	--

<pre> mstrErrorFile = vdata End Property Public Property Let IteratorName(ByVal vdata As String) mstrIteratorName = vdata End Property Public Property Get ErrorFile() As String ErrorFile = mstrErrorFile End Property Public Property Get IteratorName() As String IteratorName = mstrIteratorName End Property Public Property Set NodeDB(vdata As Database) Set mddbDatabase = vdata Set mclIterators.NodeDB = vdata End Property Public Property Get NodeDB() As Database Set NodeDB = mddbDatabase End Property Private Function IsStringEmpty(strToCheck As String) As Boolean IsStringEmpty = (strToCheck = gstrEmptyString) End Function Public Property Let EnabledFlag(ByVal vdata As Boolean) ' The enabled flag must be False for all global steps. ' This check must be made by the global step class. Only ' generic step validations will be carried out by this ' class mblnEnabledFlag = vdata End Property Public Property Let GlobalFlag(ByVal vdata As Boolean) mblnGlobalFlag = vdata End Property Public Property Let ArchivedFlag(ByVal vdata As Boolean) mblnArchivedFlag = vdata </pre>	<pre> End Property Public Property Get ArchivedFlag() As Boolean ArchivedFlag = mblnArchivedFlag End Property Public Property Get GlobalFlag() As Boolean GlobalFlag = mblnGlobalFlag End Property Public Sub Add() ' Inserts a step record into the database - it initializes ' the necessary properties for the step and calls InsertStepRec ' to do the database work On Error GoTo AddErr ' A new record would have the deleted_flag turned off! mblnArchivedFlag = False Call InsertStepRec ' If a new version of a step has been created, reset the old version info, since ' it's already been saved to the db If IsNewVersion() Then mblnNewVersion = False msOldVersion = gstrEmptyString End If Exit Sub AddErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errAddStepFailed, _ mstrModuleName & "Add", LoadResString(errAddStepFailed) End Sub Private Sub InsertStepRec() ' Inserts a step record into the database ' It first generates the insert statement using the different ' step properties and then executes it Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo InsertStepRecErr ' First check if the database object is valid Call CheckDB ' Check if the step record is valid Call Validate If IsNewVersion() Then Call UpdOldVersionsArchFlg End If ' Create a temporary querydef object strInsert = "insert into att_steps " & _ "(workspace_id, step_id, version_no, " & _ " step_label, step_file_name, step_text, start_directory, " & _ </pre>	<pre> parent_step_id, parent_version_no, sequence_no, " & _ " enabled_flag, step_level, " & _ " degree_parallelism, execution_mechanism, " & _ " failure_details, " & _ " continuation_criteria, global_flag, " & _ " archived_flag, " & _ " output_file_name, error_file_name, " & _ " iterator_name) values (" ' log_file_name, #If USE_JET Then strInsert = strInsert & " [w_id], [s_id], [ver_no], " & _ " [s_label], [s_file_name], [s_text], [s_start_dir], " & _ " [p_step_id], [p_version_no], [seq_no], " & _ " [enabled], [s_level], [deg_parallelism], " & _ " [exec_mechanism], [fail_dtls], " & _ " [cont_criteria], [global], [archived], " & _ " [output_file], [error_file], " & _ " [it_name])" ' [log_file], Set qy = mddbDatabase.CreateQueryDef(gstrEmptyString, strInsert) ' Call a procedure to execute the Querydef object Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close #Else strInsert = strInsert & Str(mlngWorkspaceId) & ", " & Str(mlngStepId) & _ ", " & mFieldValue.MakeStringFieldValid(mstrVersionNo) ' For fields that may be null, call a function to determine ' the string to be appended to the insert statement strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStepLabel) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStepTextFile) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStepText) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStartDir) strInsert = strInsert & ", " & Str(mlngParentStepId) & _ ", " & mFieldValue.MakeStringFieldValid(mstrParentVersionNo) & _ ", " & Str(mintSequenceNo) & _ ", " & Str(mblnEnabledFlag) & ", " & Str(mintStepLevel) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrDegreeParallelism) strInsert = strInsert & ", " & Str(mintExecutionMechanism) </pre>
---	---	---

```

    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrFail
ureDetails) & _
    ", " & Str(mintContinuationCriteria) &
_
    ", " & Str(mblnGlobalFlag) & _
    ", " & Str(mblnArchivedFlag)

    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrOu
tputFile)
' strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrLo
gFile)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrErr
orFile)
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrIter
atorName)

    strInsert = strInsert & " ) "

    BugMessage strInsert
mdbContext.Database.Execute strInsert,
dbFailOnError

#End If

Exit Sub

InsertStepRecErr:
    mstrSource = mstrModuleName &
"InsertStepRec"
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errInsertStepFailed, _
        mstrSource,
LoadResString(errInsertStepFailed)
End Sub
Private Sub UpdOldVersionsArchFlg()
' Updates the archived flag on all old
version for the step to True

    Dim sUpdate As String
    Dim qy As DAO.QueryDef

    On Error GoTo
UpdOldVersionsArchFlgErr
    mstrSource = mstrModuleName &
"UpdOldVersionsArchFlg"

    #If USE_JET Then

        sUpdate = "update att_steps " & _
            " set archived_flag = True "

        ' Append the Where clause
        sUpdate = sUpdate & " where step_id =
[s_id] " & _
            " and version_no <> [ver_no]"

        Set qy =
mdbsDatabase.CreateQueryDef(gstrEmptyS
tring, sUpdate)

        ' Call a procedure to execute the Querydef
object
        Call AssignParameters(qy)
        qy.Execute dbFailOnError

        If qy.RecordsAffected = 0 Then
            On Error GoTo 0

```

```

    Err.Raise vbObjectError +
errModifyStepFailed, _
        mstrSource,
LoadResString(errModifyStepFailed)
    End If

    qy.Close

    #Else

        sUpdate = "update att_steps " & _
            " set archived_flag = True "

        sUpdate = sUpdate & " where step_id = " &
Str(mlngStepId) & _
            " and version_no <> " &
mFieldValue.MakeStringFieldValid(mstrVersi
onNo)

        BugMessage sUpdate
mdbsDatabase.Execute sUpdate,
dbFailOnError
    #End If

    Exit Sub

UpdOldVersionsArchFlgErr:
    mstrSource = mstrModuleName &
"UpdOldVersionsArchFlg"
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errModifyStepFailed, _
        mstrSource,
LoadResString(errModifyStepFailed)
End Sub
Public Sub InsertIterator(cItRecord As
cIterator)
' Inserts the iterator record into the database

    Call cItRecord.Add(mlngStepId,
mstrVersionNo)

End Sub
Public Sub UpdateIterator(cItRecord As
cIterator)
' Updates the iterator record in the database

    Call cItRecord.Update(mlngStepId,
mstrVersionNo)

End Sub
Public Sub UpdateIteratorVersion()
' Updates the iterator record in the database

    Dim lngIndex As Long
    Dim cTempIt As cIterator

    On Error GoTo UpdateIteratorVersionErr

    For lngIndex = 0 To mcIterators.Count - 1
        ' Increase the array dimension and add the
constraint
        ' to it
        Set cTempIt = mcIterators(lngIndex)

        If cTempIt.IndOperation <> DeleteOp
Then
            ' Set the operation to indicate an insert
cTempIt.IndOperation = InsertOp
        End If

        Next lngIndex

    Exit Sub

```

```

UpdateIteratorVersionErr:
    mstrSource = mstrModuleName &
"UpdateIteratorVersion"
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errUpdateFailed, _
        mstrSource,
LoadResString(errUpdateFailed)

End Sub
Public Sub AddIterator(cItRecord As cIterator)
' Adds the iterator record to the collection of
iterators
' for the step

    Call mcIterators.Add(cItRecord)

End Sub
Public Sub AddAllIterators()
' Sets the indicator variable for all iterators to
insert

    Dim lngIndex As Long

    For lngIndex = 0 To mcIterators.Count - 1
        mcIterators(lngIndex).Validate
        mcIterators(lngIndex).IndOperation = InsertOp
    Next lngIndex

End Sub

Public Sub LoadIterator(cItRecord As cIterator)
' Adds the iterator record to the collection of
iterators
' for the step

    Call mcIterators.Load(cItRecord)

End Sub
Public Sub UnloadIterators()
' Unloads all iterator records for the step

    Dim lngIndex As Long

    For lngIndex = mcIterators.Count - 1 To 0 Step -
1
        ' Calls the collection method to unload the
node
        ' from the array
        mcIterators.Unload lngIndex
    Next lngIndex

End Sub
Public Sub ModifyIterator(cItRecord As cIterator)
' Modifies the iterator record in the collection

    Call mcIterators.Modify(cItRecord)

End Sub
Public Sub DeleteIterator(cItRecord As cIterator)
' Deletes the iterator record from the database

    Call cItRecord.Delete(mlngStepId,
mstrVersionNo)

End Sub
Public Sub RemoveIterator(cItRecord As cIterator)
' Marks the iterator record in the collection to
' indicate a delete

    Call mcIterators.Delete(cItRecord.Position)

End Sub

```

```

Private Sub AssignParameters(qyExec As DAO.QueryDef)
' Assigns values to the parameters in the querydef object
' The parameter names are cryptic to make them different
' from the actual field names. When the parameter names
' are the same as the field names, parameters in the
' where clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName & "AssignParameters"

For Each prmParam In qyExec.Parameters
Select Case prmParam.Name
Case "[w_id]"
prmParam.Value = mlngWorkspaceId
Case "[s_id]"
prmParam.Value = mlngStepId
Case "[ver_no]"
prmParam.Value = mstrVersionNo
Case "[s_label]"
prmParam.Value = mstrStepLabel
Case "[s_file_name]"
prmParam.Value = mstrStepTextFile
Case "[s_text]"
prmParam.Value = mstrStepText
Case "[s_start_dir]"
prmParam.Value = mstrStartDir
Case "[p_step_id]"
prmParam.Value = mlngParentStepId
Case "[p_version_no]"
prmParam.Value = mstrParentVersionNo
Case "[seq_no]"
prmParam.Value = mintSequenceNo
Case "[enabled]"
prmParam.Value = mblnEnabledFlag
Case "[s_level]"
prmParam.Value = mintStepLevel
Case "[deg_parallelism]"
prmParam.Value = mstrDegreeParallelism
Case "[exec_mechanism]"
prmParam.Value = mintExecutionMechanism
Case "[fail_dtls]"
prmParam.Value = mstrFailureDetails
Case "[cont_criteria]"
prmParam.Value = mintContinuationCriteria
Case "[global]"
prmParam.Value = mblnGlobalFlag
Case "[archived]"
prmParam.Value = mblnArchivedFlag
Case "[output_file]"
prmParam.Value = mstrOutputFile
' Case "[log_file]"
' prmParam.Value = mstrLogFile

```

```

Case "[error_file]"
prmParam.Value = mstrErrorFile
Case "[it_name]"
prmParam.Value = mstrIteratorName
Case Else
' Write the parameter name that is faulty
WriteError errInvalidParameter, mstrSource, _
prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter, mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

If qyExec.Parameters("s_id") = 0 Or StringEmpty(qyExec.Parameters("ver_no")) Then
WriteError errInvalidParameter, mstrSource
On Error GoTo 0
Err.Raise errInvalidParameter, mstrSource, LoadResString(errInvalidParameter)
End If

Exit Sub

AssignParametersErr:
mstrSource = mstrModuleName & "AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errAssignParametersFailed, _
mstrSource, LoadResString(errAssignParametersFailed)

End Sub

Public Sub Modify()

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo ModifyErr
mstrSource = mstrModuleName & "Modify"

' Check if the database object is valid
Call CheckDB

' Check if the step record is valid
Call Validate

' The step_id and version_no will never be updated -
' whenever a step is modified a copy of the old step will
' be created with an incremented version_no

#If USE_JET Then

strUpdate = "update att_steps " & _
" set step_label = [s_label] " & _
" , step_file_name = [s_file_name] " & _
" , step_text = [s_text] " & _
" , start_directory = [s_start_dir] " & _
" , workspace_id = [w_id] " & _
" , parent_step_id = [p_step_id] " & _
" , parent_version_no = [p_version_no] " & _
& _

```

```

" , sequence_no = [seq_no] " & _
" , step_level = [s_level] " & _
" , enabled_flag = [enabled] " & _
" , degree_parallelism = [deg_parallelism] " & _
-
" , execution_mechanism = [exec_mechanism] " & _
" & _
" , failure_details = [fail_dtls] " & _
" , continuation_criteria = [cont_criteria] " & _
" , global_flag = [global] " & _
" , archived_flag = [archived] " & _
" , output_file_name = [output_file] " & _
" , error_file_name = [error_file] " & _
" , iterator_name = [it_name] "

' " , log_file_name = [log_file] " & _

' Append the Where clause
strUpdate = strUpdate & " where step_id = [s_id] " & _
" and version_no = [ver_no]"

Set qy = mdbDatabase.CreateQueryDef(gstrEmptyString, strUpdate)

' Call a procedure to execute the Querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

If qy.RecordsAffected = 0 Then
On Error GoTo 0
Err.Raise vbObjectError + errModifyStepFailed, _
mstrSource, LoadResString(errModifyStepFailed)
End If

qy.Close

#Else

strUpdate = "update att_steps " & _
" set step_label = "

' For fields that may be null, call a function to determine
' the string to be appended to the update statement
strUpdate = strUpdate & mFieldValue.MakeStringFieldValid(mstrStepLabel)

strUpdate = strUpdate & " , step_file_name = " & mFieldValue.MakeStringFieldValid(mstrStepTextFile)
strUpdate = strUpdate & " , step_text = " & mFieldValue.MakeStringFieldValid(mstrStepText)
strUpdate = strUpdate & " , start_directory = " & mFieldValue.MakeStringFieldValid(mstrStartDir)

strUpdate = strUpdate & " , workspace_id = " & Str(mlngWorkspaceId) & _
" , parent_step_id = " & Str(mlngParentStepId) & _
" , parent_version_no = " & mFieldValue.MakeStringFieldValid(mstrParentVersionNo) & _
" , sequence_no = " & Str(mintSequenceNo) & _
-
" , step_level = " & Str(mintStepLevel) & _
" , enabled_flag = " & Str(mblnEnabledFlag) & _
& _
" , degree_parallelism = " & mFieldValue.MakeStringFieldValid(mstrDegreeParallelism) & _

```



```

    ", execution_mechanism = " &
Str(mintExecutionMechanism) & _
    ", failure_details = " &
mFieldValue.MakeStringFieldValid(mstrFailureDetails) & _
    ", continuation_criteria = " &
Str(mintContinuationCriteria) & _
    ", global_flag = " &
Str(mblnGlobalFlag) & _
    ", archived_flag = " &
Str(mblnArchivedFlag) & _
    ", output_file_name = " &
mFieldValue.MakeStringFieldValid(mstrOutputFile) & _
    ", error_file_name = " &
mFieldValue.MakeStringFieldValid(mstrErrorFile) & _
    ", iterator_name = " &
mFieldValue.MakeStringFieldValid(mstrIteratorName)

'    ", log_file_name = " &
mFieldValue.MakeStringFieldValid(mstrLogFile) & _

    strUpdate = strUpdate & " where step_id
= " & Str(mlngStepId) & _
    " and version_no = " &
mFieldValue.MakeStringFieldValid(mstrVersionNo)

    BugMessage strUpdate
mdbsDatabase.Execute strUpdate,
dbFailOnError
#End If

Exit Sub

ModifyErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Modify"
On Error GoTo 0
Err.Raise vbObjectError +
errModifyStepFailed, _
    mstrSource,
LoadResString(errModifyStepFailed)
End Sub
Private Sub CheckDB()
' Check if the database object has been
initialized

If mdbsDatabase Is Nothing Then
ShowError errInvalidDB
On Error GoTo 0
Err.Raise vbObjectError +
errInvalidDB, _
    mstrModuleName,
LoadResString(errInvalidDB)
End If

End Sub

Public Sub Delete()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr

Call CheckDB

strDelete = "delete from att_steps " & _
    " where step_id = [s_id] " & _
    " and version_no = [ver_no] "

```

```

' mdbsDatabase.Execute strDelete,
dbFailOnError
Set qy =
mdbsDatabase.CreateQueryDef(gstrEmptyString, strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteStepFailed, _
    mstrModuleName & "Delete",
LoadResString(errDeleteStepFailed)
End Sub
Public Property Get DegreeParallelism() As String

DegreeParallelism = mstrDegreeParallelism

End Property
Public Property Get Position() As Long

Position = mlngPosition

End Property

Public Property Let DegreeParallelism(ByVal vdata As String)

' The degree of parallelism must be zero for
all global steps
' This check must be made by the global step
class. Only
' generic step validations will be carried out
by this
' class
mstrDegreeParallelism = vdata

End Property

Public Property Let
ExecutionMechanism(ByVal vdata As
ExecutionMethod)

BugAssert vdata = gintExecuteODBC Or
vdata = gintExecuteShell Or vdata =
gintNoOption, _
    "Execution mechanism invalid"
mintExecutionMechanism = vdata

End Property

Public Property Let FailureDetails(ByVal vdata As String)

mstrFailureDetails = vdata

End Property

Public Property Let SequenceNo(ByVal vdata As Integer)

mintSequenceNo = vdata

End Property

Public Property Let Position(ByVal vdata As Long)

mlngPosition = vdata

End Property

```

```

Public Property Let ParentStepId(ByVal vdata As Long)

mlngParentStepId = vdata

End Property

Public Property Get SequenceNo() As Integer

SequenceNo = mintSequenceNo

End Property

Public Property Get StepLevel() As Integer

StepLevel = mintStepLevel

End Property

Public Property Get ParentVersionNo() As String

ParentVersionNo = mstrParentVersionNo

End Property

Public Property Let ParentVersionNo(ByVal vdata As String)

mstrParentVersionNo = vdata

End Property

Public Property Get ParentStepId() As Long

ParentStepId = mlngParentStepId

End Property

Public Property Let WorkspaceId(ByVal vdata As Long)

mlngWorkspaceId = vdata

End Property

Public Property Let VersionNo(ByVal vdata As String)

' The version number of a step is stored in the x.y
format where
' x represents a change to the step as a result of
modifications
' to any of the step properties
' y represents a change to the step as a result of
modifications
' to the sub-steps associated with it. Hence the y-
component
' of the version will be incremented when a sub-
step is added,
' modified or deleted
' x will be referred to throughout this code as the
parent
' component of the version and y will be referred
to as the
' child component of the version
' The version information for a step is maintained
by the
' calling function

mstrVersionNo = vdata

End Property

Public Property Get StepType() As gintStepType

On Error GoTo StepTypeErr

If mintStepType = 0 Then
' The step type variable has not been initialized
-

If mblnGlobalFlag Then
mintStepType = gintGlobalStep
ElseIf IsStringEmpty(mstrStepText) And _
IsStringEmpty(mstrStepTextFile) Then
mintStepType = gintManagerStep
Else
mintStepType = gintWorkerStep
End If

```

<pre> End If StepType = mintStepType Exit Property StepTypeErr: LogErrors Errors mstrSource = mstrModuleName & "StepType" On Error GoTo 0 Err.Raise vbObjectError + errGetStepTypeFailed, _ mstrSource, _ LoadResString(errGetStepTypeFailed) End Property Public Property Let StepType(vdata As gintStepType) On Error GoTo StepTypeErr Select Case vdata Case gintGlobalStep, gintManagerStep, gintWorkerStep mintStepType = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errStepTypeInvalid, _ mstrModuleName & "StepType", LoadResString(errStepTypeInvalid) End Select Exit Property StepTypeErr: LogErrors Errors mstrSource = mstrModuleName & "StepType" On Error GoTo 0 Err.Raise vbObjectError + errLetStepTypeFailed, _ mstrSource, _ LoadResString(errLetStepTypeFailed) End Property Public Property Get WorkspaceId() As Long WorkspaceId = mlngWorkspaceId End Property Public Property Get ContinuationCriteria() As ContinuationCriteria ContinuationCriteria = mintContinuationCriteria End Property Public Property Let ContinuationCriteria(ByVal vdata As ContinuationCriteria) ' The Continuation criteria must be null for all global steps ' and non-null for all manager and worker steps ' These checks will have to be made by the corresponding </pre>	<pre> ' classes - only generic step validations will be made ' by this class BugAssert vdata = gintOnFailureAbortSiblings Or vdata = gintOnFailureCompleteSiblings _ Or vdata = gintOnFailureSkipSiblings Or vdata = gintOnFailureAbort _ Or vdata = gintOnFailureContinue Or vdata = gintOnFailureAsk _ Or vdata = gintNoOption, _ "Invalid continuation criteria" mintContinuationCriteria = vdata End Property Public Property Get ExecutionMechanism() As ExecutionMethod ExecutionMechanism = mintExecutionMechanism End Property Public Property Get FailureDetails() As String FailureDetails = mstrFailureDetails End Property Public Property Let StepText(ByVal vdata As String) ' Has to be null for manager steps ' The check will have to be made by the user interface or ' by the manager step class mstrStepText = vdata End Property Public Property Let StepLevel(ByVal vdata As Integer) ' The step level must be zero for all global steps ' This check must be made in the global step class mintStepLevel = vdata End Property Public Property Get StepText() As String StepText = mstrStepText End Property Public Property Let StepTextFile(ByVal vdata As String) ' Has to be null for manager steps ' The check will have to be made by the user interface and ' by the manager step class mstrStepTextFile = vdata End Property Public Property Get StepTextFile() As String StepTextFile = mstrStepTextFile End Property Public Property Let StepLabel(ByVal vdata As String) ' Cannot be null for manager steps ' But this check cannot be made here since we do not know ' at this point if the step being created is a manager ' or a worker step </pre>	<pre> ' The check will have to be made by the user interface and ' by the manager step class mstrStepLabel = vdata End Property Public Property Get StepLabel() As String StepLabel = mstrStepLabel End Property Public Property Let StartDir(ByVal vdata As String) mstrStartDir = vdata End Property Public Property Get StartDir() As String StartDir = mstrStartDir End Property Public Property Get VersionNo() As String ' The version number of a step is stored in the x.y format where ' x represents a change to the step as a result of modifications ' to any of the step properties ' y represents a change to the step as a result of modifications ' to the sub-steps associated with it. Hence the y- component ' of the version will be incremented when a sub- step is added, ' modified or deleted ' x will be referred to throughout this code as the parent ' component of the version and y will be referred to as the ' child component of the version ' The version information for a step is maintained by the ' calling function VersionNo = mstrVersionNo End Property Public Property Get StepId() As Long StepId = mlngStepId End Property Public Property Get NextStepId() As Long Dim lngNextId As Long On Error GoTo NextStepIdErr ' First check if the database object is valid Call CheckDB ' Retrieve the next identifier using the sequence class Set mStepSeq = New cSequence Set mStepSeq.IdDatabase = mdbDatabase mStepSeq.IdentifierColumn = "step_id" lngNextId = mStepSeq.Identifier Set mStepSeq = Nothing NextStepId = lngNextId Exit Property NextStepIdErr: LogErrors Errors mstrSource = mstrModuleName & "NextStepId" On Error GoTo 0 Err.Raise vbObjectError + errStepIdGetFailed, _ </pre>
---	---	---

```

    mstrSource,
    LoadResString(errStepIdGetFailed)

End Property
Public Property Let StepId(ByVal vdata As Long)

    mlngStepId = vdata

End Property

Private Sub Class_Initialize()

    ' Initialize the operation indicator variable to Query
    ' It will be modified later by the collection class when
    ' inserts, updates or deletes are performed
    mintOperation = QueryOp
    mbIsNewVersion = False
    msOldVersion = gstrEmptyString

    Set mFieldValue = New cStringSM
    Set mcIterators = New cNodeCollections

End Sub

Private Sub Class_Terminate()

    Set mFieldValue = Nothing
    Set mcIterators = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cStepTree"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cStepTree.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Implements step navigation functions such as determining
'           the child of a step and so on.
' Contact:  Reshma Tharamal
' (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cStepTree."
Private mstrSource As String

Public StepRecords As cArrSteps
Public Property Get HasChild(Optional ByVal StepKey As String, _
    Optional ByVal StepId As Long = 0) As Boolean

    Dim lTemp As Long

    HasChild = False
    StepId = GetStepId(StepKey, StepId)

```

```

    For lTemp = 0 To StepRecords.StepCount - 1
        If StepRecords(lTemp).StepType <> gintGlobalStep And
            StepRecords(lTemp).ParentStepId = StepId
        Then
            HasChild = True
            Exit For
        End If
    Next lTemp

End Property
Public Property Get ChildStep(Optional ByVal StepKey As String, _
    Optional ByVal StepId As Long = 0) As cStep

    Dim lTemp As Long

    Set ChildStep = Nothing
    StepId = GetStepId(StepKey, StepId)

    For lTemp = 0 To StepRecords.StepCount - 1
        If StepRecords(lTemp).StepType <> gintGlobalStep And
            StepRecords(lTemp).ParentStepId = StepId
        And _
            StepRecords(lTemp).SequenceNo = gintMinSequenceNo Then
            Set ChildStep = StepRecords(lTemp)
            Exit For
        End If
    Next lTemp

End Property
Public Property Get NextStep(Optional ByVal StepKey As String, _
    Optional ByVal StepId As Long = 0) As cStep

    Dim lTemp As Long
    Dim cChildStep As cStep

    Set NextStep = Nothing
    StepId = GetStepId(StepKey, StepId)
    Set cChildStep =
        StepRecords.QueryStep(StepId)

    For lTemp = 0 To StepRecords.StepCount - 1
        If StepRecords(lTemp).StepType <> gintGlobalStep And _
            StepRecords(lTemp).ParentStepId = cChildStep.ParentStepId And _
            StepRecords(lTemp).SequenceNo = cChildStep.SequenceNo + 1 Then
            Set NextStep = StepRecords(lTemp)
            Exit For
        End If
    Next lTemp

End Property
Private Function GetStepId(Optional ByVal StepKey As String, _
    Optional ByVal StepId As Long = 0) As Long

    If StepId = 0 Then
        If StringEmpty(StepKey) Then
            Err.Raise vbObjectError + errMandatoryParameterMissing, _
                mstrModuleName & "GetStepId",
                LoadResString(errMandatoryParameterMissing)
        End If
    End If

```

```

Else
    GetStepId = IIf(IsLabel(StepKey), 0, MakeIdentifierValid(StepKey))
End If
Else
    GetStepId = StepId
End If
End Function
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cStringSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cStringSM.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  This module contains common procedures that can be used
'           to manipulate strings
'           It is called StringSM, since String is a Visual Basic keyword
' Contact:  Reshma Tharamal
' (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String = "cStringSM."

Private mstrText As String

Private Const mstrNullValue = "null"
Private Const mstrSQ = ""
Private Const mstrEnvVarSeparator = "%"
Public Function InsertEnvVariables(_
    Optional ByVal strComString As String) As String

    ' This function replaces all environment variables in
    ' the passed in string with their values - they are
    ' enclosed by "%"

    Dim intPos As Integer
    Dim intEndPos As Integer
    Dim strEnvVariable As String
    Dim strValue As String
    Dim strCommand As String

    On Error GoTo InsertEnvVariablesErr
    mstrSource = mstrModuleName & "InsertEnvVariables"

    ' Initialize the return value of the function to the
    ' passed in command
    If IsStringEmpty(strComString) Then
        strCommand = mstrText
    Else
        strCommand = strComString
    End If

    intPos = InStr(strCommand, mstrEnvVarSeparator)
    Do While intPos > 0

```

```

' Extract the environment variable from
the passed
' in string
intEndPos = InStr(intPos + 1,
strCommand, mstrEnvVarSeparator)
strEnvVariable = Mid(strCommand,
intPos + 1, intEndPos - intPos - 1)

' Get the value of the variable and call a
function
' to replace the variable with it's value
strValue = Environ$(strEnvVariable)
strCommand =
ReplaceSubString(strCommand, _
mstrEnvVarSeparator &
strEnvVariable & mstrEnvVarSeparator, _
strValue)

intPos = InStr(strCommand,
mstrEnvVarSeparator)
Loop

InsertEnvVariables = strCommand
Exit Function

InsertEnvVariablesErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
' Return an empty string
InsertEnvVariables = gstrEmptyString

End Function
Public Function MakeStringFieldValid( _
Optional strField As String =
gstrEmptyString) As String
' Returns a string that can be appended to
any insert
' or modify (sql) statement
' If an argument is not passed to this
function, the
' default text property is used

Dim strTemp As String

On Error GoTo MakeStringFieldValidErr

If IsStringEmpty(strField) Then
strTemp = mstrText
Else
strTemp = strField
End If

' It checks whether the text is empty
' If so, it returns the string, "null"
If IsStringEmpty(strTemp) Then
MakeStringFieldValid =
mstrNullValue
Else
' Single-quotes have to be replaced by
two single-quotes,
' since a single-quote is the identifier
delimiter
' character - call a procedure to do the
replace
strTemp = ReplaceSubString(strTemp,
mstrSQ, mstrSQ & mstrSQ)

' Replace pipe characters with the
corresponding chr function
strTemp = ReplaceSubString(strTemp,
"|", "" & Chr(124) & "")

' Enclose the string in single quotes

```

```

MakeStringFieldValid = mstrSQ &
strTemp & mstrSQ

End If

Exit Function

MakeStringFieldValidErr:
mstrSource = mstrModuleName &
"MakeStringFieldValid"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errMakeFieldValidFailed, _
mstrSource,
LoadResString(errMakeFieldValidFailed)

End Function
Public Function MakeDateFieldValid( _
Optional dtmField As Date = gdtmEmpty)
As String
' Returns a string that can be appended to
any insert
' or modify (sql) statement

' Enclose the date in single quotes
MakeDateFieldValid = mstrSQ & dtmField
& mstrSQ

End Function

Private Function IsStringEmpty(strToCheck
As String) As Boolean

If strToCheck = gstrEmptyString Then
IsStringEmpty = True
Else
IsStringEmpty = False
End If

End Function
Public Function ReplaceSubString(ByVal
MainString As String, _
ByVal ReplaceString As String, _
ByVal ReplaceWith As String) As String

' Replaces all occurrences of ReplaceString
in MainString with ReplaceWith

Dim intPos As Integer
Dim strTemp As String

On Error GoTo ReplaceSubStringErr

strTemp = MainString

intPos = InStr(strTemp, ReplaceString)
Do While intPos <> 0
strTemp = Left(strTemp, intPos - 1) &
ReplaceWith & _
Mid(strTemp, intPos +
Len(ReplaceString))
intPos = InStr(intPos +
Len(ReplaceString) + 1, strTemp,
ReplaceString)
Loop
ReplaceSubString = strTemp

Exit Function

ReplaceSubStringErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ReplaceSubString"
On Error GoTo 0

```

```

Err.Raise vbObjectError + errParseStringFailed,
-
mstrSource, _
LoadResString(errParseStringFailed)

End Function

Public Property Get Text() As String
Attribute Text.VB_UserMemId = 0
Text = mstrText
End Property

Public Property Let Text(ByVal vdata As String)
mstrText = vdata
End Property

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cSubStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cSubStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates the
properties of sub-steps
' that are used during the execution of a
workspace.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private Const mstrModuleName As String =
"cSubStep"

Private mlngStepId As Long
Private mintRunning As Integer ' Number of
running tasks
Private mintComplete As Integer ' Number of
completed tasks
' The last iterator for this sub-step
Private mcLastIterator As cRunItDetails

Public Function NewIteration(cStepRec As cStep)
As cIterator
' Calls a procedure to determine the next iterator
value
' for the passed in step - returns the value to be
used
' in the iteration.
' It updates the instance node with the new
iteration
' for the step.

Dim cItRec As cIterator

On Error GoTo NewIterationErr

' Call a function that will populate an iterator
record
' with the iterator values
Set cItRec = NextIteration(cStepRec)

' Initialize the run node with the new iterator

```

<pre> ' values If Not mcLastIterator Is Nothing Then If cItRec Is Nothing Then mcLastIterator.Value = gstrEmptyString Else mcLastIterator.Value = cItRec.Value ' And if the iterator is a list of values, then update ' the sequence number as well If mcLastIterator.IteratorType = gintValue Then mcLastIterator.Sequence = cItRec.SequenceNo End If End If End If Set NewIteration = cItRec Set cItRec = Nothing Exit Function NewIterationErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Function Public Function NextIteration(cStepRec As cStep) As cIterator ' Retrieves the next iterator value for the passed in step - ' returns an iterator record with the new iterator values Dim cItRec As cIterator Dim vntIterators As Variant Dim lngValue As String On Error GoTo NextIterationErr vntIterators = cStepRec.Iterators If Not mcLastIterator Is Nothing Then ' The run node contains the iterator details ' Get the next value for the iterator If mcLastIterator.IteratorType = gintValue Then ' Find the next iterator that appears in the list of ' iterator values Set cItRec = NextInSequence(vntIterators, mcLastIterator.Sequence) Else lngValue = CLng(Trim\$(mcLastIterator.Value)) ' Determine whether the new iterator value falls in the ' range between From and To If (mcLastIterator.RangeStep > 0 And _ (mcLastIterator.RangeFrom <= mcLastIterator.RangeTo) And _ (mcLastIterator.RangeStep + lngValue) <= mcLastIterator.RangeTo) Or _ </pre>	<pre> (mcLastIterator.RangeStep < 0 And _ (mcLastIterator.RangeFrom >= mcLastIterator.RangeTo) And _ (mcLastIterator.RangeStep + lngValue) >= mcLastIterator.RangeTo) Then Set cItRec = New cIterator cItRec.Value = Trim\$(CStr(mcLastIterator.RangeStep + lngValue)) Else Set cItRec = Nothing End If End If Else Set cItRec = Nothing End If Set NextIteration = cItRec Exit Function NextIterationErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Function Public Sub InitializeIt(cPendingStep As cStep, _ ColParameters As cArrParameters, _ Optional vntIterators As Variant) ' Initializes the LastIteration structure with the iterator details for the ' passed in step On Error GoTo InitializeItErr If IsMissing(vntIterators) Then vntIterators = cPendingStep.Iterators End If If IsArray(vntIterators) And Not IsEmpty(vntIterators) Then mcLastIterator.IteratorName = cPendingStep.IteratorName If vntIterators(LBound(vntIterators)).IteratorTyp e = _ gintValue Then mcLastIterator.IteratorType = gintValue ' Since the sequence numbers begin at 0 mcLastIterator.Sequence = gintMinIteratorSequence - 1 Else mcLastIterator.IteratorType = gintFrom Call InitializeItRange(vntIterators, cPendingStep.WorkspaceId, _ ColParameters) End If Else Set mcLastIterator = Nothing End If Exit Sub InitializeItErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 </pre>	<pre> Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Sub Private Sub InitializeItRange(vntIterators As Variant, ByVal lWorkspace As Long, _ ColParameters As cArrParameters) ' Initializes the LastIteration structure for range iterators from the ' passed in variant containing the iterator records Dim lngIndex As Long Dim cItRec As cIterator On Error GoTo InitializeItRangeErr If IsArray(vntIterators) And Not IsEmpty(vntIterators) Then ' Check if the iterator range has been completely initialized RangeComplete (vntIterators) ' Initialize the Run node with the values for the From, ' To and Step boundaries For lngIndex = LBound(vntIterators) To UBound(vntIterators) Set cItRec = vntIterators(lngIndex) Select Case cItRec.IteratorType Case gintFrom mcLastIterator.RangeFrom = SubstituteParameters(cItRec.Value, lWorkspace, WspParameters:=ColParameters) Case gintTo mcLastIterator.RangeTo = SubstituteParameters(cItRec.Value, lWorkspace, WspParameters:=ColParameters) Case gintStep mcLastIterator.RangeStep = SubstituteParameters(cItRec.Value, lWorkspace, WspParameters:=ColParameters) Case Else On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, mstrModuleName, _ LoadResString(errTypeInvalid) End Select Next lngIndex mcLastIterator.Value = Trim\$(CStr(mcLastIterator.RangeFrom - mcLastIterator.RangeStep)) End If Exit Sub InitializeItRangeErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Sub Private Function NextInSequence(vntIterators As Variant, _ lngOldSequence As Long) As cIterator Dim lngIndex As Long Dim cItRec As cIterator </pre>
---	---	--

<pre> On Error GoTo NextInSequenceErr If IsArray(vntIterators) And Not IsEmpty(vntIterators) Then For lngIndex = LBound(vntIterators) To UBound(vntIterators) Set cItRec = vntIterators(lngIndex) If cItRec.IteratorType <> gintValue Then On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, mstrModuleName, _ LoadResString(errTypeInvalid) End If If cItRec.SequenceNo = lngOldSequence + 1 Then Exit For End If Next lngIndex If cItRec.SequenceNo <> lngOldSequence + 1 Then Set cItRec = Nothing End If Else Set cItRec = Nothing End If Set NextInSequence = cItRec Exit Function NextInSequenceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Function Public Property Get LastIterator() As cRunItDetails Set LastIterator = mcLastIterator End Property Public Property Set LastIterator(vdata As cRunItDetails) Set mcLastIterator = vdata End Property Public Property Get TasksRunning() As Integer TasksRunning = mintRunning End Property Public Property Let TasksRunning(ByVal vdata As Integer) mintRunning = vdata End Property Public Property Get TasksComplete() As Integer </pre>	<pre> TasksComplete = mintComplete End Property Public Property Let TasksComplete(ByVal vdata As Integer) mintComplete = vdata End Property Public Property Get StepId() As Long StepId = mlngStepId End Property Public Property Let StepId(ByVal vdata As Long) mlngStepId = vdata End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cSubSteps" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cSubSteps.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module provides a type- safe wrapper around cVector to ' implement a collection of cSubStep objects. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcSubSteps As cVector Public Sub Add(ByVal objItem As cSubStep) mcSubSteps.Add objItem End Sub Public Sub Clear() mcSubSteps.Clear End Sub Public Function Count() As Long Count = mcSubSteps.Count End Function Public Function Delete(ByVal lngDelete As Long) As cSubStep Set Delete = mcSubSteps.Delete(lngDelete) End Function </pre>	<pre> Public Property Get Item(ByVal Position As Long) As cSubStep Attribute Item.VB_UserMemId = 0 Set Item = mcSubSteps.Item(Position) End Property Private Sub Class_Initialize() Set mcSubSteps = New cVector End Sub Private Sub Class_Terminate() Set mcSubSteps = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cTermProcess" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cTermProcess.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module raises an event if a completed step exists. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private WithEvents moTimer As cTimerSM Attribute moTimer.VB_VarHelpID = -1 Private bTermProcessExists As Boolean Public Event TermProcessExists() Public Sub ProcessTerminated() bTermProcessExists = True moTimer.Enabled = True End Sub Private Sub Class_Initialize() bTermProcessExists = False Set moTimer = New cTimerSM moTimer.Enabled = False End Sub Private Sub Class_Terminate() Set moTimer = Nothing End Sub Private Sub moTimer_Timer() On Error GoTo moTimer_TimerErr </pre>
--	--	--

<pre> If bTermProcessExists Then RaiseEvent TermProcessExists End If moTimer.Enabled = False bTermProcessExists = False Exit Sub moTimer_TimerErr: LogErrors Errors End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cTermStep" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cTermStep.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module encapsulates the properties of steps that ' have completed execution such as status and time of completion. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Public TimeComplete As Currency Public Index As Long Public InstanceId As Long Public ExecutionStatus As InstanceStatus VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cTermSteps" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cTermSteps.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module provides a type-safe wrapper around cVector to ' implement a collection of cTermStep objects. Raises an ' event if a step that has completed execution exists. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcTermSteps As cVector Private WithEvents moTimer As cTimerSM Attribute moTimer.VB_VarHelpID = -1 Public Event TermStepExists(cStepDetails As cTermStep) </pre>	<pre> Public Sub Add(ByVal citem As cTermStep) Call mcTermSteps.Add(citem) moTimer.Enabled = True End Sub Public Sub Clear() mcTermSteps.Clear End Sub Public Function Delete() Call mcTermSteps.Delete(0) ' Disable the timer if there are no more pending events If mcTermSteps.Count = 0 Then moTimer.Enabled = False End Function Public Property Get Item(ByVal Position As Long) As cTermStep Set Item = mcTermSteps(Position) End Property Public Function Count() As Long Count = mcTermSteps.Count End Function Private Sub Class_Initialize() Set mcTermSteps = New cVector Set moTimer = New cTimerSM moTimer.Enabled = False End Sub Private Sub Class_Terminate() Set mcTermSteps = Nothing Set moTimer = Nothing End Sub Private Sub moTimer_Timer() On Error GoTo moTimer_TimerErr If mcTermSteps.Count > 0 Then ' Since items are appended to the end of the array RaiseEvent TermStepExists(mcTermSteps(0)) Else moTimer.Enabled = False End If Exit Sub moTimer_TimerErr: LogErrors Errors End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cTimerSM" </pre>	<pre> Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cTimer.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module implements a timer. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Public Event Timer() Private Const mnDefaultInterval As Long = 1 Private mnTimerID As Long Private mnInterval As Long Private mfEnabled As Boolean Public Property Get Interval() As Long Interval = mnInterval End Property Public Property Let Interval(Value As Long) If mnInterval <> Value Then mnInterval = Value If mfEnabled Then SetInterval mnInterval, mnTimerID End If End If End Property Public Property Get Enabled() As Boolean Enabled = mfEnabled End Property Public Property Let Enabled(Value As Boolean) If mfEnabled <> Value Then If Value Then mnTimerID = StartTimer(mnInterval) If mnTimerID <> 0 Then mfEnabled = True 'Storing Me in the global would add a reference to Me, which ' would prevent Me from being released, which in turn would ' prevent my Class_Terminate code from running. To prevent ' this, I store a "soft reference" - the collection holds a ' pointer to me without incrementing my reference count. gcTimerObjects.Add ObjPtr(Me), Str\$(mnTimerID) End If Else StopTimer mnTimerID mfEnabled = False gcTimerObjects.Remove Str\$(mnTimerID) End If End If End Property Private Sub Class_Initialize() If gcTimerObjects Is Nothing Then Set gcTimerObjects = New Collection mnInterval = mnDefaultInterval End Sub Private Sub Class_Terminate() Enabled = False </pre>
--	--	---

<pre> End Sub Friend Sub Tick() RaiseEvent Timer End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cVBErrorsSM" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False Attribute VB_Ext_KEY = "SavedWithClassBuilder", "Yes" Attribute VB_Ext_KEY = "Top_Level" , "Yes" ' FILE: cVBErrors.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module encapsulates the handling of Visual Basic errors. ' This module does not do any error handling - any error handler ' will erase the errors object! ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' The Execute class exposes a method, WriteError through which we can write to the ' error log that is currently being used by the Execute object. Store a reference to ' Execute object locally. Private mcExecObjRef As EXECUTEDLLLib.Execute Public Sub WriteError(ByVal ErrorCode As errErrorConstants, _ Optional ByVal ErrorSource As String = gstrEmptyString, _ Optional ByVal OptArgs As String = gstrEmptyString) Dim sError As String sError = "StepMaster Error:" & ErrorCode & vbCrLf & LoadResString(ErrorCode) & vbCrLf If Not StringEmpty(ErrorSource) Then sError = sError & "(Source: " & ErrorSource & ")" & vbCrLf End If sError = sError & OptArgs Call LogMessage(sError) End Sub Private Function InitErrorString() As String ' Initializes a string with all the properties of the ' Err object Dim strError As String Dim errCode As Long If Err.Number = 0 Then InitErrorString = gstrEmptyString Else </pre>	<pre> With Err If Err.Number > vbObjectError And Err.Number < (vbObjectError + 65536) Then errCode = .Number - vbObjectError Else errCode = .Number End If strError = "Error #: " & errCode & vbCrLf strError = strError & "Description: " & .Description & vbCrLf strError = strError & "Source: " & Err.Source & vbCrLf End With Debug.Print strError InitErrorString = strError End If End Function Public Sub LogVBErrors() Dim strErr As String strErr = InitErrorString On Error GoTo LogVBErrorsErr If Not StringEmpty(strErr) Then ' Write an error using the WriteError method of the Execute object. If Not mcExecObjRef Is Nothing Then mcExecObjRef.WriteError strErr Else WriteMessage strErr End If End If Err.Clear Exit Sub LogVBErrorsErr: Call LogErrors(Errors) ' Since write to the error file for the step has failed, write to the project log Call WriteMessage(strErr) End Sub Public Sub DisplayErrors() Dim strErr As String strErr = InitErrorString If Not StringEmpty(strErr) Then ' Display the error message MsgBox strErr End If Err.Clear End Sub Public Sub LogMessage(strMsg As String) On Error GoTo LogMessageErr ' Write an error using the WriteError method of the Execute object. If Not mcExecObjRef Is Nothing Then mcExecObjRef.WriteError strMsg Else WriteMessage strMsg End If </pre>	<pre> Exit Sub LogMessageErr: Call LogErrors(Errors) ' Since write to the error file for the step has failed, write to the project log Call WriteMessage(strMsg) End Sub Public Property Set ErrorFile(vdata As EXECUTEDLLLib.Execute) Set mcExecObjRef = vdata End Property Private Sub Class_Terminate() Set mcExecObjRef = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cVector" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cVector.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This class implements an array of objects. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cVector." ' Array counter Private mlngCount As Long Private mcarrItems() As Object Public Sub Add(ByVal objItem As Object) ' Adds the passed in Object variable to the array On Error GoTo AddErr ReDim Preserve mcarrItems(mlngCount) ' Set the newly added element in the array to the ' passed in variable Set mcarrItems(mlngCount) = objItem mlngCount = mlngCount + 1 Exit Sub AddErr: LogErrors Errors gstrSource = mstrModuleName & "Add" On Error GoTo 0 Err.Raise vbObjectError + errLoadInArrayFailed, - mstrSource, _ LoadResString(errLoadInArrayFailed) </pre>
---	---	--

<pre> End Sub Public Sub Clear() ' Clear the array ReDim mcarrItems(0) mlngCount = 0 End Sub Public Function Delete(ByVal lngDelete As Long) As Object Dim lngIndex As Long On Error GoTo DeleteErr If lngDelete < (mlngCount - 1) Then ' We want to maintain the order of all items in the ' array - so move all remaining elements in the array ' up by 1 For lngIndex = lngDelete To mlngCount - 2 MoveDown lngIndex Next lngIndex End If ' Return the deleted node Set Delete = mcarrItems(mlngCount - 1) ' Delete the last Node from the array mlngCount = mlngCount - 1 If mlngCount > 0 Then ReDim Preserve mcarrItems(0 To mlngCount - 1) Else ReDim mcarrItems(0) End If Exit Function DeleteErr: LogErrors Errors mstrSource = mstrModuleName & "Delete" On Error GoTo 0 Err.Raise vbObjectError + errDeleteArrayElementFailed, _ mstrSource, _ LoadResString(errDeleteArrayElementFaile d) End Function Public Property Get Item(ByVal Position As Long) As Object Attribute Item.VB_UserMemId = 0 ' Returns the element at the passed in position in the array If Position >= 0 And Position < mlngCount Then Set Item = mcarrItems(Position) Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist) End If </pre>	<pre> End Property Public Property Set Item(ByVal Position As Long, _ ByVal Value As Object) ' Returns the element at the passed in position in the array If Position >= 0 Then ' If the passed in position is outside the array ' bounds, then resize the array If Position >= mlngCount Then ReDim Preserve mcarrItems(Position) mlngCount = Position + 1 End If ' Set the newly added element in the array to the ' passed in variable Set mcarrItems(Position) = Value Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist) End If End Property Public Sub MoveUp(ByVal Position As Long) ' Moves the element at the passed in position up by 1 Dim cTemp As Object If Position > 0 And Position < mlngCount Then Set cTemp = mcarrItems(Position) Set mcarrItems(Position) = mcarrItems(Position - 1) Set mcarrItems(Position - 1) = cTemp End If End Sub Public Sub MoveDown(ByVal Position As Long) ' Moves the element at the passed in position down by 1 Dim cTemp As Object If Position >= 0 And Position < mlngCount - 1 Then Set cTemp = mcarrItems(Position) Set mcarrItems(Position) = mcarrItems(Position + 1) Set mcarrItems(Position + 1) = cTemp End If End Sub Public Function Count() As Long Count = mlngCount End Function Private Sub Class_Initialize() mlngCount = 0 End Sub </pre>	<pre> Private Sub Class_Terminate() Call Clear End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cVectorLng" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cVectorLng.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This class implements an array of longs. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cVectorLng." ' Array counter Private mlngCount As Long Private mcarrItems() As Long Public Sub Add(ByVal lngItem As Long) ' Adds the passed in long variable to the array On Error GoTo AddErr ReDim Preserve mcarrItems(mlngCount) ' Set the newly added element in the array to the ' passed in variable mcarrItems(mlngCount) = lngItem mlngCount = mlngCount + 1 Exit Sub AddErr: LogErrors Errors gstrSource = mstrModuleName & "Add" On Error GoTo 0 Err.Raise vbObjectError + errLoadInArrayFailed, - mstrSource, _ LoadResString(errLoadInArrayFailed) End Sub Public Sub Clear() ' Clear the array ReDim mcarrItems(0) End Sub Public Sub Delete(Optional ByVal Position As Long = -1, _ Optional ByVal Item As Long = -1) </pre>
--	--	---

```

' The user can opt to delete either a
specific item in
' the list or the item at a specified position.
If no
' parameters are passed in, we delete the
element at
' position 0!

Dim lngDelete As Long
Dim lngIndex As Long

On Error GoTo DeleteErr

If Position = -1 Then
' Since we can never store an element at
position -1,
' we can be sure that the user is trying
to delete
' a given item
lngDelete = Find(Item)
Else
lngDelete = Position
End If

If lngDelete < (m lngCount - 1) Then

' We want to maintain the order of all
items in the
' array - so move all remaining
elements in the array
' up by 1
For lngIndex = lngDelete To
m lngCount - 2
MoveDown lngIndex
Next lngIndex

End If

' Delete the last Node from the array
m lngCount = m lngCount - 1
If m lngCount > 0 Then
ReDim Preserve mcarrItems(0 To
m lngCount - 1)
Else
ReDim mcarrItems(0)
End If

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
mstrSource, _

LoadResString(errDeleteArrayElementFaile
d)

End Sub
Public Function Find(ByVal Item As Long)
As Long

' Returns the position at which the passed
in value occurs
' in the array

Dim lngIndex As Long

On Error GoTo FindErr

' Find the element in the array to be
deleted

```

```

For lngIndex = 0 To m lngCount - 1

If mcarrItems(lngIndex) = Item Then
Find = lngIndex
Exit Function
End If

Next lngIndex

Find = -1

Exit Function

FindErr:
LogErrors Errors
mstrSource = mstrModuleName & "Find"
On Error GoTo 0
Err.Raise vbObjectError +
errItemNotFound, mstrSource, _
LoadResString(errItemNotFound)

End Function
Public Property Get Item(ByVal Position As
Long) As Long
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in
position in the array
If Position >= 0 And Position < m lngCount
Then
Item = mcarrItems(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Let Item(ByVal Position As
Long, _
ByVal Value As Long)

' Returns the element at the passed in
position in the array
If Position >= 0 Then
' If the passed in position is outside the
array
' bounds, then resize the array
If Position >= m lngCount Then
ReDim Preserve mcarrItems(Position)
m lngCount = Position + 1
End If

' Set the newly added element in the array
to the
' passed in variable
mcarrItems(Position) = Value
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Sub MoveUp(ByVal Position As Long)
' Moves the element at the passed in position
up by 1

Dim lngTemp As Long

If Position > 0 And Position < m lngCount
Then
lngTemp = mcarrItems(Position)

```

```

mcarrItems(Position) = mcarrItems(Position -
1)
mcarrItems(Position - 1) = lngTemp
End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
' Moves the element at the passed in position
down by 1

Dim lngTemp As Long

If Position >= 0 And Position < m lngCount - 1
Then
lngTemp = mcarrItems(Position)
mcarrItems(Position) = mcarrItems(Position +
1)
mcarrItems(Position + 1) = lngTemp
End If

End Sub

Public Function Count() As Long

Count = m lngCount

End Function

Private Sub Class_Initialize()

m lngCount = 0

End Sub

Private Sub Class_Terminate()

Call Clear

End Sub

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cVectorStr"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cVectorStr.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class implements an array of
strings.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVectorStr."

' Array counter
Private m lngCount As Long

```

Private mcarrItems() As String Public Sub Add(ByVal strItem As String) ' Adds the passed in string variable to the array On Error GoTo AddErr ReDim Preserve mcarrItems(mlngCount) ' Set the newly added element in the array to the ' passed in variable mcarrItems(mlngCount) = strItem mlngCount = mlngCount + 1 Exit Sub AddErr: Call LogErrors(Errors) gstrSource = mstrModuleName & "Add" On Error GoTo 0 Err.Raise vbObjectError + errLoadInArrayFailed, _ mstrSource, _ LoadResString(errLoadInArrayFailed) End Sub Public Sub Clear() ' Clear the array ReDim mcarrItems(0) End Sub Public Sub Delete(Optional ByVal Position As Long = -1, _ Optional ByVal Item As String = -1) ' The user can opt to delete either a specific item in ' the list or the item at a specified position. If no ' parameters are passed in, we delete the element at ' position 0! Dim lngDelete As Long Dim lngIndex As Long On Error GoTo DeleteErr mstrSource = mstrModuleName & "Delete" If Position = -1 Then ' Since we can never store an element at position -1, ' we can be sure that the user is trying to delete ' a given item lngDelete = Find(Item) Else lngDelete = Position End If If lngDelete < (mlngCount - 1) Then ' We want to maintain the order of all items in the ' array - so move all remaining elements in the array ' up by 1 For lngIndex = lngDelete To mlngCount - 2 MoveDown lngIndex	Next lngIndex End If ' Delete the last Node from the array mlngCount = mlngCount - 1 If mlngCount > 0 Then ReDim Preserve mcarrItems(0 To mlngCount - 1) Else ReDim mcarrItems(0) End If Exit Sub DeleteErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "Delete" On Error GoTo 0 Err.Raise vbObjectError + errDeleteArrayElementFailed, _ mstrSource, _ LoadResString(errDeleteArrayElementFailed) End Sub Public Function Find(ByVal Item As String) As Long ' Returns the position at which the passed in value occurs ' in the array Dim lngIndex As Long On Error GoTo FindErr mstrSource = mstrModuleName & "Find" ' Find the element in the array to be deleted For lngIndex = 0 To mlngCount - 1 If mcarrItems(lngIndex) = Item Then Find = lngIndex Exit Function End If Next lngIndex Find = -1 Exit Function FindErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "Find" On Error GoTo 0 Err.Raise vbObjectError + errItemNotFound, mstrSource, _ LoadResString(errItemNotFound) End Function Public Property Get Item(ByVal Position As Long) As String Attribute Item.VB_UserMemId = 0 ' Returns the element at the passed in position in the array If Position >= 0 And Position < mlngCount Then Item = mcarrItems(Position) Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist)	End If End Property Public Property Let Item(ByVal Position As Long, _ ByVal Value As String) ' Returns the element at the passed in position in the array If Position >= 0 Then ' If the passed in position is outside the array ' bounds, then resize the array If Position >= mlngCount Then ReDim Preserve mcarrItems(Position) mlngCount = Position + 1 End If ' Set the newly added element in the array to the ' passed in variable mcarrItems(Position) = Value Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist) End If End Property Public Sub MoveUp(ByVal Position As Long) ' Moves the element at the passed in position up by 1 Dim strTemp As String If Position > 0 And Position < mlngCount Then strTemp = mcarrItems(Position) mcarrItems(Position) = mcarrItems(Position - 1) mcarrItems(Position - 1) = strTemp End If End Sub Public Sub MoveDown(ByVal Position As Long) ' Moves the element at the passed in position down by 1 Dim strTemp As String If Position >= 0 And Position < mlngCount - 1 Then strTemp = mcarrItems(Position) mcarrItems(Position) = mcarrItems(Position + 1) mcarrItems(Position + 1) = strTemp End If End Sub Public Function Count() As Long Count = mlngCount End Function Private Sub Class_Initialize() mlngCount = 0 End Sub Private Sub Class_Terminate()
--	---	--

<pre> Call Clear End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cWorker" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cWorker.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a worker step. ' Implements the cStep class - carries out initializations ' and validations that are specific to worker steps. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Implements cStep ' Object variable to keep the step reference in Private mcStep As cStep ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cWorker." Private Sub cStep_AddAllIterators() Call mcStep.AddAllIterators End Sub Private Property Let cStep_StartDir(ByVal RHS As String) mcStep.StartDir = RHS End Property Private Property Get cStep_StartDir() As String cStep_StartDir = mcStep.StartDir End Property Private Property Set cStep_NodeDB(RHS As DAO.Database) Set mcStep.NodeDB = RHS End Property Private Property Get cStep_NodeDB() As DAO.Database Set cStep_NodeDB = mcStep.NodeDB </pre>	<pre> End Property Private Function cStep_IncVersionY() As String cStep_IncVersionY = mcStep.IncVersionY End Function Private Function cStep_IsNewVersion() As Boolean cStep_IsNewVersion = mcStep.IsNewVersion End Function Private Function cStep_OldVersionNo() As String cStep_OldVersionNo = mcStep.OldVersionNo End Function Private Function cStep_IncVersionX() As String cStep_IncVersionX = mcStep.IncVersionX End Function Private Sub cStep_UpdateIteratorVersion() Call mcStep.UpdateIteratorVersion End Sub Private Function cStep_IteratorCount() As Long cStep_IteratorCount = mcStep.IteratorCount End Function Private Sub cStep_UnloadIterators() Call mcStep.UnloadIterators End Sub Private Sub cStep_SaveIterators() Call mcStep.SaveIterators End Sub Private Property Get cStep_IteratorName() As String cStep_IteratorName = mcStep.IteratorName End Property Private Property Let cStep_IteratorName(ByVal RHS As String) mcStep.IteratorName = RHS End Property Private Sub cStep_LoadIterator(cItRecord As cIterator) Call mcStep.LoadIterator(cItRecord) End Sub Private Sub cStep_DeleteIterator(cItRecord As cIterator) Call mcStep.DeleteIterator(cItRecord) End Sub </pre>	<pre> Private Sub cStep_InsertIterator(cItRecord As cIterator) Call mcStep.InsertIterator(cItRecord) End Sub Private Function cStep_Iterators() As Variant cStep_Iterators = mcStep.Iterators End Function Private Sub cStep_ModifyIterator(cItRecord As cIterator) Call mcStep.ModifyIterator(cItRecord) End Sub Private Sub cStep_RemoveIterator(cItRecord As cIterator) Call mcStep.RemoveIterator(cItRecord) End Sub Private Sub cStep_UpdateIterator(cItRecord As cIterator) Call mcStep.UpdateIterator(cItRecord) End Sub Private Sub cStep_AddIterator(cItRecord As cIterator) Call mcStep.AddIterator(cItRecord) End Sub Private Property Let cStep_Position(ByVal RHS As Long) mcStep.Position = RHS End Property Private Property Get cStep_Position() As Long cStep_Position = mcStep.Position End Property Private Function cStep_Clone(Optional cCloneStep As cStep) As cStep Dim cNewWorker As cWorker Set cNewWorker = New cWorker Set cStep_Clone = mcStep.Clone(cNewWorker) End Function Private Sub StepTextOrFileEntered() ' Checks if either the step text or the name of the file containing ' the text has been entered ' If both of them are null or both of them are not null, ' the worker step is invalid and an error is raised If StringEmpty(mcStep.StepText) And StringEmpty(mcStep.StepTextFile) Then ShowError errStepTextAndFileNull On Error GoTo 0 Err.Raise vbObjectError + errStepTextAndFileNull, _ mstrSource, LoadResString(errStepTextAndFileNull) End If </pre>
---	---	---

End Sub	Private Property Get cStep_ArchivedFlag() As Boolean	mstrModuleName, LoadResString(errContCriteriaInvalid) End Select
Private Property Get cStep_IndOperation() As Operation	cStep_ArchivedFlag = mcStep.ArchivedFlag	End Property
cStep_IndOperation = mcStep.IndOperation	End Property	Private Property Let cStep_DegreeParallelism(ByVal RHS As String)
End Property	Private Sub Class_Initialize()	mcStep.DegreeParallelism = RHS
Private Property Let cStep_IndOperation(ByVal RHS As Operation)	' Create the object Set mcStep = New cStep	End Property
mcStep.IndOperation = RHS	' Initialize the object with valid values for a Worker step ' The global flag should be the first field to be initialized ' since subsequent validations might try to check if the ' step being created is global mcStep.GlobalFlag = False ' mcStep.GlobalRunMethod = gintNoOption mcStep.StepType = gintWorkerStep	Private Property Get cStep_DegreeParallelism() As String
End Property	End Sub	cStep_DegreeParallelism = mcStep.DegreeParallelism
Private Property Get cStep_NextStepId() As Long	Private Sub Class_Terminate()	End Property
cStep_NextStepId = mcStep.NextStepId	' Remove the step object Set mcStep = Nothing	Private Sub cStep_Delete()
End Property	End Sub	mcStep.Delete
Private Property Let cStep_OutputFile(ByVal RHS As String)	Private Sub cStep_Add()	End Sub
mcStep.OutputFile = RHS	' Call a private procedure to see if the step text has been ' entered - since a worker step actually executes a step, entry ' of the text is mandatory Call StepTextOrFileEntered	Private Property Get cStep_EnabledFlag() As Boolean
End Property	' Call the Add method of the step class to carry out the insert mcStep.Add	cStep_EnabledFlag = mcStep.EnabledFlag
Private Property Get cStep_OutputFile() As String	End Sub	End Property
cStep_OutputFile = mcStep.OutputFile	Private Property Get cStep_ContinuationCriteria() As ContinuationCriteria	Private Property Let cStep_EnabledFlag(ByVal RHS As Boolean)
End Property	cStep_ContinuationCriteria = mcStep.ContinuationCriteria	mcStep.EnabledFlag = RHS
Private Property Let cStep_ErrorFile(ByVal RHS As String)	End Property	End Property
mcStep.ErrorFile = RHS	Private Property Let cStep_ContinuationCriteria(ByVal RHS As ContinuationCriteria)	Private Property Let cStep_ExecutionMechanism(ByVal RHS As ExecutionMethod)
End Property	' The Continuation criteria must be non-null for all worker steps. ' Check if the Continuation Criteria is valid Select Case RHS Case gintOnFailureAbortSiblings, gintOnFailureCompleteSiblings, _ gintOnFailureSkipSiblings, gintOnFailureAbort, _ gintOnFailureContinue, gintOnFailureAsk mcStep.ContinuationCriteria = RHS Case Else On Error GoTo 0 Err.Raise vbObjectError + errContCriteriaInvalid, _	On Error GoTo ExecutionMechanismErr mstrSource = mstrModuleName & "cStep_ExecutionMechanism"
Private Property Get cStep_ErrorFile() As String		Select Case RHS Case gintExecuteShell, gintExecuteODBC mcStep.ExecutionMechanism = RHS Case Else On Error GoTo 0 Err.Raise vbObjectError + errExecutionMechanismInvalid, _ mstrSource, LoadResString(errExecutionMechanismInvalid) End Select
cStep_ErrorFile = mcStep.ErrorFile		Exit Property
End Property		ExecutionMechanismErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_ExecutionMechanism"
'Private Property Let cStep_LogFile(ByVal RHS As String)		On Error GoTo 0 Err.Raise vbObjectError + errExecutionMechanismLetFailed, _ mstrSource, LoadResString(errExecutionMechanismLetFailed)
' mcStep.LogFile = RHS		End Property
'End Property		
'Private Property Get cStep_LogFile() As String		
' cStep_LogFile = mcStep.LogFile		
'End Property		
Private Property Let cStep_ArchivedFlag(ByVal RHS As Boolean)		
mcStep.ArchivedFlag = RHS		
End Property		

Private Property Get cStep_ExecutionMechanism() As ExecutionMethod cStep_ExecutionMechanism = mcStep.ExecutionMechanism End Property Private Property Let cStep_FailureDetails(ByVal RHS As String) mcStep.FailureDetails = RHS End Property Private Property Get cStep_FailureDetails() As String cStep_FailureDetails = mcStep.FailureDetails End Property Private Property Get cStep_GlobalFlag() As Boolean cStep_GlobalFlag = mcStep.GlobalFlag End Property Private Property Let cStep_GlobalFlag(ByVal RHS As Boolean) ' Set the global flag to false - this flag is initialized when ' an instance of the class is created. Just making sure that ' nobody changes the value inadvertently mcStep.GlobalFlag = False End Property Private Sub cStep_Modify() ' Call a private procedure to see if the step text has been ' entered - since a worker step actually executes a step, entry ' of the text is mandatory Call StepTextOrFileEntered ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Let cStep_ParentStepId(ByVal RHS As Long) mcStep.ParentStepId = RHS End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String)	mcStep.ParentVersionNo = RHS End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo End Property Private Property Let cStep_StepId(ByVal RHS As Long) mcStep.StepId = RHS End Property Private Property Get cStep_StepId() As Long cStep_StepId = mcStep.StepId End Property Private Property Let cStep_StepLabel(ByVal RHS As String) mcStep.StepLabel = RHS End Property Private Property Get cStep_StepLabel() As String cStep_StepLabel = mcStep.StepLabel End Property Private Property Let cStep_StepLevel(ByVal RHS As Integer) mcStep.StepLevel = RHS End Property Private Property Get cStep_StepLevel() As Integer cStep_StepLevel = mcStep.StepLevel End Property Private Property Let cStep_StepText(ByVal RHS As String) mcStep.StepText = RHS	End Property Private Property Get cStep_StepText() As String cStep_StepText = mcStep.StepText End Property Private Property Let cStep_StepTextFile(ByVal RHS As String) mcStep.StepTextFile = RHS End Property Private Property Get cStep_StepTextFile() As String cStep_StepTextFile = mcStep.StepTextFile End Property Private Property Let cStep_StepType(RHS As gintStepType) mcStep.StepType = gintWorkerStep End Property Private Property Get cStep_StepType() As gintStepType cStep_StepType = mcStep.StepType End Property Private Sub cStep_Validate() ' The validate routines for each of the steps will ' carry out the specific validations for the type and ' call the generic validation routine On Error GoTo cStep_ValidateErr ' Validations specific to worker steps ' Check if the step text or a file name has been ' specified Call StepTextOrFileEntered mcStep.Validate Exit Sub cStep_ValidateErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_Validate" On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ mstrSource, _ LoadResString(errValidateFailed) End Sub Private Property Let cStep_VersionNo(ByVal RHS As String) mcStep.VersionNo = RHS End Property Private Property Get cStep_VersionNo() As String cStep_VersionNo = mcStep.VersionNo
---	---	--

<pre> End Property Private Property Let cStep_WorkspaceId(ByVal RHS As Long) mcStep.WorkspaceId = RHS End Property Private Property Get cStep_WorkspaceId() As Long cStep_WorkspaceId = mcStep.WorkspaceId End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cWorkspace" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cWorkspace.cls ' ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a workspace. ' Contains functions to insert, update and delete ' att_workspaces records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Local variable(s) to hold property value(s) Private mlngWorkspaceId As Long Private mstrWorkspaceName As String Private mblnArchivedFlag As Boolean Private mdbStepMaster As Database ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cWorkspace." ' The cSequence class is used to generate unique workspace identifiers Private mWorkspaceSeq As cSequence ' The StringSM class is used to carry out string operations Private mFieldValue As cStringSM Public Function Clone() As cWorkspace ' Creates a copy of a given workspace Dim cCloneWsp As cWorkspace On Error GoTo CloneErr Set cCloneWsp = New cWorkspace ' Copy all the workspace properties to the newly </pre>	<pre> ' created workspace cCloneWsp.WorkspaceId = mlngWorkspaceId cCloneWsp.WorkspaceName = mstrWorkspaceName cCloneWsp.ArchivedFlag = mblnArchivedFlag ' And set the return value to the newly created workspace Set Clone = cCloneWsp Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Let ArchivedFlag(ByVal vdata As Boolean) mblnArchivedFlag = vdata End Property Public Property Get ArchivedFlag() As Boolean ArchivedFlag = mblnArchivedFlag End Property Public Property Set WorkDatabase(vdata As Database) Set mdbStepMaster = vdata End Property Private Sub WorkspaceNameDuplicate() ' Check if the workspace name already exists in the workspace Dim rstWorkspace As Recordset Dim strSql As String Dim qy As DAO.QueryDef On Error GoTo WorkspaceNameDuplicateErr mstrSource = mstrModuleName & "WorkspaceNameDuplicate" ' Create a recordset to retrieve the count of records ' having the same workspace name strSql = " Select count(*) as workspace_count " & _ " from att_workspaces " & _ " where workspace_name = [w_name] " & _ " and workspace_id <> [w_id] " Set qy = mdbStepMaster.CreateQueryDef(gstrEmptySt ring, strSql) ' Call a procedure to assign the parameter values Call AssignParameters(qy) </pre>	<pre> Set rstWorkspace = qy.OpenRecordset(dbOpenForwardOnly) ' mFieldValue.MakeStringFieldValid (mstrWorkspaceName) & _ ' " and workspace_id <> " & _ ' Str(mlngWorkspaceId) ' ' Set rstWorkspace = mdbStepMaster.OpenRecordset(_ ' strSql, dbOpenForwardOnly) If rstWorkspace![workspace_count] > 0 Then rstWorkspace.Close qy.Close ShowError errDuplicateWorkspaceName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateWorkspaceName, _ mstrSource, LoadResString(errDuplicateWorkspaceName) End If rstWorkspace.Close qy.Close Exit Sub WorkspaceNameDuplicateErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "WorkspaceNameDuplicate" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceNameDuplicateFailed, _ mstrSource, LoadResString(errWorkspaceNameDuplicateFailed) End Sub Public Property Let WorkspaceName(vdata As String) On Error GoTo WorkspaceNameErr mstrSource = mstrModuleName & "WorkspaceName" If vdata = gstrEmptyString Then On Error GoTo 0 ' Propagate this error back to the caller Err.Raise vbObjectError + errWorkspaceNameMandatory, _ mstrSource, LoadResString(errWorkspaceNameMandatory) Else mstrWorkspaceName = vdata End If Exit Property WorkspaceNameErr: LogErrors Errors mstrSource = mstrModuleName & "WorkspaceName" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceNameSetFailed, _ mstrSource, LoadResString(errWorkspaceNameSetFailed) End Property Public Property Let WorkspaceId(vdata As Long) On Error GoTo WorkspaceIdErr </pre>
---	---	---

```

mstrSource = mstrModuleName &
"WorkspaceId"

If (vdata > 0) Then
    mlngWorkspaceId = vdata
Else
    ' Propagate this error back to the caller
    On Error GoTo 0
    Err.Raise vbObjectError +
errWorkspaceIdInvalid, _
        mstrSource,
LoadResString(errWorkspaceIdInvalid)
End If

Exit Property

WorkspaceIdErr:
LogErrors Errors
mstrSource = mstrModuleName &
"WorkspaceId"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceIdSetFailed, _
    mstrSource,
LoadResString(errWorkspaceIdSetFailed)

End Property

Public Sub AddWorkspace()

    Dim strInsert As String
    Dim qy As DAO.QueryDef

    On Error GoTo AddWorkspaceErr

    ' Retrieve the next identifier using the
    sequence class
    Set mWorkspaceSeq = New cSequence
    Set mWorkspaceSeq.IdDatabase =
mdbsStepMaster
    mWorkspaceSeq.IdentifierColumn =
FLD_ID_WORKSPACE
    mlngWorkspaceId =
mWorkspaceSeq.Identifier
    Set mWorkspaceSeq = Nothing

    ' Call procedure to raise an error if the
    Workspace name
    ' already exists in the db
    Call WorkspaceNameDuplicate

    ' A new record will have the
    archived_flag turned off
    mblnArchivedFlag = False

    ' Create a temporary querydef object
    strInsert = "insert into att_workspaces " &
_
    "( workspace_id, workspace_name, "
    & _
    " archived_flag ) " & _
    " values ( " & _
    " [w_id], [w_name],
[archived] ) "
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmpty
yString, strInsert)

    ' Call a procedure to assign the parameter
    values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

```

```

' strInsert = "insert into att_workspaces " &
_
' "( workspace_id, workspace_name, "
& _
' " archived_flag ) " & _
' " values ( " & _
' Str(mlngWorkspaceId) & _
' ", " &
mFieldValue.MakeStringFieldValid(mstrWork
spaceName) & _
' ", " & Str(mblnArchivedFlag) & _
' " ) "
' mdbsStepMaster.Execute strInsert,
dbFailOnError
'

Exit Sub

AddWorkspaceErr:

    Call LogErrors(Errors)
    mstrSource = mstrModuleName &
"AddWorkspace"
    On Error GoTo 0
    Err.Raise vbObjectError +
errWorkspaceInsertFailed, _
        mstrSource,
LoadResString(errWorkspaceInsertFailed)

End Sub

Private Sub AssignParameters(qyExec As
DAO.QueryDef)
    ' Assigns values to the parameters in the
    querydef object
    ' The parameter names are cryptic to make
    them different
    ' from the field names. When the parameter
    names are
    ' the same as the field names, parameters in
    the where
    ' clause do not get created.

    Dim prmParam As DAO.Parameter

    On Error GoTo AssignParametersErr
    mstrSource = mstrModuleName &
"AssignParameters"

    For Each prmParam In qyExec.Parameters
        Select Case prmParam.Name
            Case "[w_id]"
                prmParam.Value =
mlngWorkspaceId

            Case "[w_name]"
                prmParam.Value =
mstrWorkspaceName

            Case "[archived]"
                prmParam.Value =
mblnArchivedFlag

            Case Else
                ' Write the parameter name that is
                faulty
                WriteError errInvalidParameter,
mstrSource, _
                    prmParam.Name
                On Error GoTo 0
                Err.Raise errInvalidParameter,
mstrSource, _

LoadResString(errInvalidParameter)
End Select
        Next prmParam

Exit Sub

```

```

AssignParametersErr:

    mstrSource = mstrModuleName &
"AssignParameters"
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
        mstrSource,
LoadResString(errAssignParametersFailed)

End Sub

Public Sub DeleteWorkspace()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteWorkspaceErr

    strDelete = "delete from att_workspaces " & _
    " where workspace_id = [w_id]"
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString,
strDelete)

    ' Call a procedure to assign the parameter values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

    ' mdbsStepMaster.Execute strDelete,
    dbFailOnError
    ' " where workspace_id = " & _
    ' Str(mlngWorkspaceId)

Exit Sub

DeleteWorkspaceErr:
    Call LogErrors(Errors)
    mstrSource = mstrModuleName &
"DeleteWorkspace"
    On Error GoTo 0
    Err.Raise vbObjectError +
errWorkspaceDeleteFailed, _
        mstrSource,
LoadResString(errWorkspaceDeleteFailed)
End Sub

Public Sub ModifyWorkspace()

    Dim strUpdate As String
    Dim qy As DAO.QueryDef

    On Error GoTo ModifyWorkspaceErr

    ' Call procedure to raise an error if the Workspace
    name
    ' already exists in the db
    Call WorkspaceNameDuplicate

    strUpdate = "update att_workspaces " & _
    " set workspace_name = [w_name] " & _
    ", archived_flag = [archived] " & _
    " where workspace_id = [w_id] "
    Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString,
strUpdate)

    ' Call a procedure to assign the parameter values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

```


<pre> ' strUpdate = "update att_workspaces " & ' ' " set workspace_name = " & _ ' mFieldValue.MakeStringFieldValid(mstrW orkspaceName) & _ ' " , archived_flag = " & _ ' Str(mblnArchivedFlag) & _ ' " where workspace_id = " & _ ' Str(mlngWorkspaceId) ' ' mdbaStepMaster.Execute strUpdate, dbFailOnError ' Exit Sub ModifyWorkspaceErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "ModifyWorkspace" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceUpdateFailed, _ mstrSource, LoadResString(errWorkspaceUpdateFailed) End Sub Public Property Get WorkspaceName() As String WorkspaceName = mstrWorkspaceName End Property Public Property Get WorkspaceId() As Long WorkspaceId = mlngWorkspaceId End Property Private Sub Class_Initialize() ' Each function will append it's own name to this ' variable mstrSource = "cWorkspace." Set mFieldValue = New cStringSM End Sub Private Sub Class_Terminate() Set mdbaStepMaster = Nothing Set mFieldValue = Nothing End Sub Attribute VB_Name = "DatabaseSM" ' FILE: DatabaseSM.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains all the database initialization/cleanup ' procedures for the project. Also contains upgrade ' database upgrade functions. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' </pre>	<pre> ' This module is called DatabaseSM, since Database is a standard ' Visual Basic object and we want to avoid any confusion with it. Option Explicit Public wrkJet As Workspace Public dbsAttTool As Database Public gbldbOpen As Boolean Public gRunEngine As rdoEngine ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "DatabaseSM." Public Const gsDefDBFileExt As String = ".stp" Private Const msDefDBFile As String = "SMData" & gsDefDBFileExt Private Const merrFileNotFound As Integer = 3024 Private Const merrDaoTableMissing As Integer = 3078 Private Const STEPMASTER_SETTINGS_VAL_NAME_D BFILE As String = "WorkspaceFile" Public Const DEF_NO_COUNT_DISPLAY As Boolean = False Public Const DEF_NO_EXECUTE As Boolean = False Public Const DEF_PARSE_QUERY_ONLY As Boolean = False Public Const DEF_ANSI_QUOTED_IDENTIFIERS As Boolean = False Public Const DEF_ANSI_NULLS As Boolean = True Public Const DEF_SHOW_QUERY_PLAN As Boolean = False Public Const DEF_SHOW_STATS_TIME As Boolean = False Public Const DEF_SHOW_STATS_IO As Boolean = False Public Const DEF_PARSE_ODBC_MSG_PREFIXES As Boolean = True Public Const DEF_ROW_COUNT As Long = 0 Public Const DEF_TSQL_BATCH_SEPARATOR As String = "GO" Public Const DEF_QUERY_TIME_OUT As Long = 0 Public Const DEF_SERVER_LANGUAGE As String = "(Default)" Public Const DEF_CHARACTER_TRANSLATION As Boolean = True Public Const DEF_REGIONAL_SETTINGS As Boolean = False Public Const PARAM_DEFAULT_DIR As String = "DEFAULT_DIR" Public Const PARAM_DEFAULT_DIR_DESC As String = "Default destination directory " & _ "for all output and error files. If it is blank, the StepMaster installation directory will be used." </pre>	<pre> Public Const PARAM_RUN_ID As String = "RUN_ID" Public Const PARAM_RUN_ID_DESC As String = "The run identifier for a run. " & _ "Any modifications will be overwritten before each run." Public Const PARAM_OUTPUT_DIR As String = "OUTPUT_DIR" Public Const PARAM_OUTPUT_DIR_DESC As String = "The output directory for a run. " & _ "Any modifications will be overwritten before each run." Public Const CONNECTION_STRINGS_TO_NAME_SUFFIX As String = "_NAME" Private Const TBL_RUN_STEP_HDR As String = "run_header" Private Const TBL_RUN_STEP_DTLS As String = "run_step_details" Public Const TBL_CONNECTION_DTLS As String = "connection_dtls" Public Const TBL_CONNECTION_STRINGS As String = "workspace_connections" Public Const TBL_STEPS As String = "att_steps" Public Const FLD_ID_CONN_NAME As String = "connection_name_id" Public Const FLD_ID_WORKSPACE As String = "workspace_id" Public Const FLD_ID_STEP As String = "step_id" Public Const FLD_ID_PARAMETER As String = "parameter_id" Public Const FLD_CONN_DTL_CONNECTION_NAME As String = "connection_name" Public Const FLD_CONN_DTL_CONNECTION_STRING As String = "connection_string_name" Public Const FLD_CONN_DTL_CONNECTION_TYPE As String = "connection_type" Public Const FLD_CONN_STR_CONNECTION_NAME As String = "connection_name" Public Const FLD_STEPS_EXEC_MECHANISM As String = "execution_mechanism" Public Const FLD_STEPS_EXEC_DTL As String = "start_directory" Public Const FLD_STEPS_VERSION_NO As String = "version_no" Public Const DATA_TYPE_CURRENCY As String = "CURRENCY" Public Const DATA_TYPE_LONG As String = "Long" Public Const DATA_TYPE_INTEGER As String = "INTEGER" Public Const DATA_TYPE_TEXT255 As String = "Text(255)" Private Sub InsertBuiltInParameter(dbFile As Database, sParamName As String, _ sParamValue As String, sParamDesc As String) Dim sBuf As String Dim cTempStr As New cStringSM Dim lId As Long Dim rTemp As DAO.Recordset </pre>
---	--	--

```

Dim rParam As DAO.Recordset
Dim cTempSeq As cSequence

' Create the passed in built-in parameter,
for each workspace in the db
Set cTempSeq = New cSequence
Set cTempSeq.IdDatabase = dbFile
cTempSeq.IdentifierColumn =
FLD_ID_PARAMETER

sBuf = "select * from att_workspaces "
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
If rTemp.RecordCount <> 0 Then
    rTemp.MoveFirst

    While Not rTemp.EOF
        sBuf = "select * from
workspace_parameters " & _
            " where workspace_id = " &
Str(rTemp!workspace_id) & _
            " and parameter_name = " &
cTempStr.MakeStringFieldValid(sParamNa
me)

        Set rParam =
dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
        If rParam.RecordCount <> 0 Then
            rParam.MoveFirst
            ' Since the parameter already
exists, change it to a built-in type
            sBuf = "update
workspace_parameters " & _
                " set parameter_type = " &
CStr(gintParameterBuiltIn) & _
                ", description = " &
cTempStr.MakeStringFieldValid(sParamDe
sc) & _
                " where workspace_id = " &
Str(rTemp!workspace_id) & _
                " and parameter_id = " &
Str(rParam!parameter_id)
            Else
                ' Else, insert a parameter record
                lId = cTempSeq.Identifier
                sBuf = "insert into
workspace_parameters " & _
                    "( workspace_id,
parameter_id, " & _
                    " parameter_name,
parameter_value, " & _
                    " description, parameter_type
)" & _
                    " values ( " & _
                    Str(rTemp!workspace_id) &
", " & Str(lId) & ", " & _
                    cTempStr.MakeStringFieldValid(sParamNa
me) & ", " & _
                    cTempStr.MakeStringFieldValid(sParamVal
ue) & ", " & _
                    cTempStr.MakeStringFieldValid(sParamDe
sc) & ", " & _
                    CStr(gintParameterBuiltIn) &
_
                    " ) "
            End If
            dbFile.Execute sBuf, dbFailOnError
            rParam.Close

            rTemp.MoveNext
        Wend
    End If

```

```

rTemp.Close

End Sub
Public Sub InitRunEngine()

    Set gRunEngine = New rdoEngine
    gRunEngine.rdoDefaultCursorDriver =
rUseServer

End Sub

Public Function DefaultDBFile() As String
    DefaultDBFile = GetSetting(App.Title,
"Settings",
STEPMaster_SETTINGS_VAL_NAME_D
BFILE, App.Path & msDefDBFile)
End Function

Public Sub CloseDatabase()

    Dim dbsInstance As Database
    Dim recInstance As Recordset

    On Error GoTo CloseDatabaseErr

    ' Close all open recordsets and databases in
the workspace
    For Each dbsInstance In wrkJet.Databases

        For Each recInstance In
dbsAttTool.Recordsets
            recInstance.Close
            Next recInstance
            dbsInstance.Close

        Next dbsInstance

        Set dbsAttTool = Nothing

        gbldbOpen = False
        wrkJet.Close

    Exit Sub

CloseDatabaseErr:

    Call LogErrors(Errors)
    Resume Next

End Sub

Private Function NoDbChanges(sVerTo As
String, sVerFrom As String) As Boolean

    If sVerTo = gsVersion242 And sVerFrom =
gsVersion241 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion242 And
sVerFrom = gsVersion24 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion253 And
sVerFrom = gsVersion251 Then
        NoDbChanges = True
    ElseIf sVerTo = gsVersion255 And
sVerFrom = gsVersion251 Then
        NoDbChanges = True
    Else
        NoDbChanges = False
    End If

End Function

Public Function SMOpenDatabase(Optional
strDbName As String = gstrEmptyString) As
Boolean

```

```

Dim sVersion As String
Dim bOpeningDb As Boolean ' This flag is used
to check if OpenDatabase failed

On Error GoTo OpenDatabaseErr

bOpeningDb = False
SMOpenDatabase = False

' Create Microsoft Jet Workspace object.
If Not gbldbOpen Then
    Set wrkJet =
CreateWorkspace("att_tool_workspace_setup",
"admin", gstrEmptyString, dbUseJet)
End If

' Prompt the user for the database file if it is not
passed in
If StringEmpty(strDbName) Then
    strDbName = BrowseDBFile
    If StringEmpty(strDbName) Then
        Exit Function
    End If
End If

Do
    If gbldbOpen Then
    #If Not RUN_ONLY Then
        CloseOpenWorkspaces
    #End If
    Set wrkJet =
CreateWorkspace("att_tool_workspace_setup",
"admin", gstrEmptyString, dbUseJet)
    End If

    ' Toggle the bOpeningDb flag around the
OpenDatabase method - the value
    ' of this flag will be checked by the error
handler to determine if it is
    ' the OpenDatabase that failed.
    BugMessage "DB File: " & strDbName

    bOpeningDb = True
    ' Open the database for exclusive use
    Set dbsAttTool =
wrkJet.OpenDatabase(strDbName, Options:=True)
    bOpeningDb = False

    If dbsAttTool Is Nothing Then
        ' If the file is not present in the directory,
display
        ' an error and ask the user to enter a new
path
        Call ShowError(errOpenDbFailed,
OptArgs:=strDbName)

        strDbName = BrowseDBFile
    Else
        sVersion = DBVersion(dbsAttTool)

        ' Make sure the application and db version
numbers match
        If sVersion = gsVersion Then
            Call InitializeData(strDbName)
            gbldbOpen = True
            SMOpenDatabase = True
        Else
            If UpgradeDb(wrkJet, dbsAttTool,
gsVersion, sVersion) Then
                Call InitializeData(strDbName)
                gbldbOpen = True
                SMOpenDatabase = True
            Else
                dbsAttTool.Close
                Set dbsAttTool = Nothing
            End If
        End If
    End If
End Do

```

```

        ShowError
errVersionMismatch, _
        OptArgs:=" Please install
Version " & gsVersion & " of the
workspace definition file."
        strDbName = BrowseDBFile
    End If
    End If
    End If
    Loop While gbldbOpen = False And
Not StringEmpty(strDbName)

    Exit Function

OpenDatabaseErr:
    Call DisplayErrors(Errors)

    ' If the OpenDatabase failed, continue
    If bOpeningDb Then
        Resume Next
    End If

    Call ShowError(errOpenDbFailed,
OptArgs:=strDbName)

End Function
Private Sub InitializeData(sDb As String)

    Set gcParameters = New cArrParameters
    Set gcParameters.ParamDatabase =
dbsAttTool

    Set gcSteps = New cArrSteps
    Set gcSteps.StepDB = dbsAttTool

    Set gcConstraints = New cArrConstraints
    Set gcConstraints.ConstraintDB =
dbsAttTool

    Set gcConnections = New cConnections
    Set gcConnections.ConnDb = dbsAttTool

    Set gcConnDtls = New cConnDtls
    Set gcConnDtls.ConnDb = dbsAttTool

    ' Disable the error handler since this is not
a critical step
    On Error GoTo 0
    SaveSetting App.Title, "Settings",
STEPMASTER_SETTINGS_VAL_NAME
_DBFILE, sDb
End Sub
Private Sub
UpdateContinuationCriteria(dbFile As
DAO.Database)

    Dim qyTemp As DAO.QueryDef
    Dim sBuf As String

    On Error GoTo
UpdateContinuationCriteriaErr

    sBuf = "Since this version of the
executable incorporates failure processing, "
& _
        "the upgrade will update the On
Failure field for each of the steps " & _
        "to 'Continue' to be compatible with
the existing behaviour. " & _
        "Proceed?"
    If Not Confirm(Buttons:=vbYesNo,
strMessage:=sBuf, strTitle:="Upgrade
database") Then
        Exit Sub

```

```

    End If

    ' Create a recordset object to retrieve all
steps for
    ' the given workspace
    sBuf = " update att_steps a " & _
        " set continuation_criteria = " &
CStr(gintOnFailureContinue) & _
        " where archived_flag = [archived] "

    ' Find the highest X-component of the
version number
    sBuf = sBuf & " AND cint( mid(
version_no, 1, instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) = " & _
        " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
        " from att_steps AS d " & _
        " WHERE a.step_id = d.step_id ) "

    ' Find the highest Y-component of the
version number for the highest X-component
    sBuf = sBuf & " AND cint( mid(
version_no, instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) + 1 ) ) = " & _
        " ( select max( cint( mid( version_no,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) + 1 ) ) ) " & _
        " from att_steps AS b " & _
        " Where a.step_id = b.step_id " & _
        " AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
        " ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
        " from att_steps AS c " & _
        " WHERE a.step_id = c.step_id ) ) "

    ' Create a temporary Querydef object
    Set qyTemp =
dbFile.CreateQueryDef(gstrEmptyString,
sBuf)
    qyTemp.Parameters("archived").Value =
False

    qyTemp.Execute dbFailOnError
    qyTemp.Close

    Exit Sub

UpdateContinuationCriteriaErr:
    Call LogErrors(Errors)
    Err.Raise vbObjectError +
errModifyStepFailed, mstrModuleName, _
        LoadResString(errModifyStepFailed)

End Sub

Private Sub UpdateDbDtls(dbFile As
Database, sNewVersion As String)

    Dim sSql As String
    Dim cTemp As New cStringSM

    On Error GoTo UpdateDbDtlsErr

    sSql = "update db_details " & _
        " set db_version = " &
cTemp.MakeStringFieldValid(sNewVersion)

```

```

    dbFile.Execute sSql, dbFailOnError

    Exit Sub

UpdateDbDtlsErr:
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade10to21(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sSql As String

    On Error GoTo Upgrade10to21Err

    Call UpdateDbDtls(dbFile, sVersion)

    Call UpdateContinuationCriteria(dbFile)

    Exit Sub

Upgrade10to21Err:
    UpgradeWsp.Rollback
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
        LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade21to23(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sBuf As String
    Dim cTempStr As New cStringSM

    On Error GoTo Upgrade21to23Err

    ' Add a parameter type field and a description
field to the parameter table
    sBuf = "alter table workspace_parameters " & _
        " add column description TEXT(255) "
    dbFile.Execute sBuf, dbFailOnError

    sBuf = "alter table workspace_parameters " & _
        " add column parameter_type INTEGER "
    dbFile.Execute sBuf, dbFailOnError

    ' Initialize the parameter type on all parameters to
indicate generic parameters
    sBuf = "update workspace_parameters " & _
        " set parameter_type = " &
CStr(gintParameterGeneric)
    dbFile.Execute sBuf, dbFailOnError

    sBuf = "Release 2.3 onwards, connection string
parameters will be " & _
        "displayed in a separate node. After this
upgrade, all connection " & _
        "string parameters will appear under the
Globals/Connection Strings " & _
        "node in the workspace. "
    Call MsgBox(sBuf, vbOKOnly +
vbApplicationModal, "Upgrade database")

    ' Update the parameter type on all parameters that
look like db connection strings
    sBuf = "update workspace_parameters " & _
        " set parameter_type = " &
CStr(gintParameterConnect) & _

```

```

    " where UCase(parameter_value)
like '*DRIVER*' " & _
    " or UCase(parameter_value) like
'*DSN*'"
    dbFile.Execute sBuf, dbFailOnError

' Add an elapsed time field to the
run_step_details table - this field is
' needed to store the elapsed time in
milliseconds.
sBuf = "alter table run_step_details " & _
    " add column elapsed_time LONG "
dbFile.Execute sBuf, dbFailOnError

' The failure_details field has some data
for the case when an ODBC failure
' threshold was specified. Since that's no
longer relevant, update the failure_details
' field for records with failure_criteria =
gintFailureODBC to empty.
' failure_criteria = gintFailureODBC = 1
sBuf = "update att_steps " & _
    " set failure_details = " &
cTempStr.MakeStringFieldValid(gstrEmpty
String) & _
    " where failure_criteria = '1'"
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtls(dbFile, sVersion)

UpgradeWsp.CommitTrans

On Error GoTo DropColumnErr

UpgradeWsp.BeginTrans

' This ddl cannot be in the same
transaction as the failure_details update
' But we can do this in a separate
transaction since we do not expect this
' statement to fail - AND, it doesn't matter
if this transaction fails
' Drop the failure_criteria column from
the att_steps table
sBuf = "alter table att_steps " & _
    " drop column failure_criteria "
dbFile.Execute sBuf, dbFailOnError

Exit Sub

DropColumnErr:
Call LogErrors(Errors)
ShowError errDeleteColumnFailed
Exit Sub

Upgrade21to23Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError +
errUpgradeFailed, mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade23to24(UpgradeWsp
As DAO.Workspace, dbFile As Database, sVersion As String)

    Dim sBuf As String
    Dim lId As Long
    Dim rTemp As DAO.Recordset
    Dim cTempStr As New cStringSM

    On Error GoTo Upgrade23to24Err

```

```

' Add a new table for connection properties
sBuf = CreateConnectionsTableScript()
' TODO: Not sure of column sizes for row
count, tsqL_batch_separator and
server_language
dbFile.Execute sBuf, dbFailOnError

' Move all connection parameters from the
parameter table to the connections tables
' Insert default values for the newly added
connection properties
sBuf = "select * from workspace_parameters
" & _
    "where parameter_type = " &
CStr(gintParameterConnect)
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
lId = 1
If rTemp.RecordCount <> 0 Then
    rTemp.MoveFirst

    While Not rTemp.EOF
        sBuf = "insert into
workspace_connections " & _
            "( workspace_id, connection_id, " & _
            "connection_name, connection_value,
" & _
            "description, no_count_display, " & _
            "no_execute, parse_query_only, " & _
            "ANSI_quoted_identifiers,
ANSI_nulls, " & _
            "show_query_plan, show_stats_time, "
& _
            "show_stats_io,
parse_odbc_msg_prefixes, " & _
            "row_count, tsqL_batch_separator, " &
_
            "query_time_out, server_language, " &
_
            "character_translation,
regional_settings )" & _
            " values ( " & _
            Str(rTemp!workspace_id) & ", " &
Str(lId) & ", " & _
            cTempStr.MakeStringFieldValid(" " &
rTemp!parameter_name) & ", " & _
            cTempStr.MakeStringFieldValid(" " &
rTemp!parameter_value) & ", " & _
            cTempStr.MakeStringFieldValid(" " &
rTemp!Description) & ", " & _
            Str(DEF_NO_COUNT_DISPLAY) &
", " & _
            Str(DEF_NO_EXECUTE) & ", " &
Str(DEF_PARSE_QUERY_ONLY) & ", " & _
            Str(DEF_ANSI_QUOTED_IDENTIFIERS) &
", " & Str(DEF_ANSI_NULLS) & ", " & _
            Str(DEF_SHOW_QUERY_PLAN) &
", " & Str(DEF_SHOW_STATS_TIME) & ", " &
_
            Str(DEF_SHOW_STATS_IO) & ", " &
Str(DEF_PARSE_ODBC_MSG_PREFIXES)
& ", " & _
            Str(DEF_ROW_COUNT) & ", " &
cTempStr.MakeStringFieldValid(DEF_TSQL_
BATCH_SEPARATOR) & ", " & _
            Str(DEF_QUERY_TIME_OUT) & ", "
&
            cTempStr.MakeStringFieldValid(DEF_SERV
ER_LANGUAGE) & ", " & _
            Str(DEF_CHARACTER_TRANSLATION) &
", " & Str(DEF_REGIONAL_SETTINGS) & _
            " ) "
        dbFile.Execute sBuf, dbFailOnError
    End While
End If

```

```

    lId = lId + 1
    rTemp.MoveNext
Wend
End If
rTemp.Close

' Add an identifier column for the connection_id
field
sBuf = "alter table att_identifiers " & _
    " add column connection_id long "
dbFile.Execute sBuf, dbFailOnError

' Initialize the value of the connection identifier,
initialized above
sBuf = "update att_identifiers " & _
    " set connection_id = " & Str(lId)
dbFile.Execute sBuf, dbFailOnError

' Delete all connection strings from the parameter
table
sBuf = "delete from workspace_parameters " & _
    "where parameter_type = " &
CStr(gintParameterConnect)
dbFile.Execute sBuf, dbFailOnError

' Create the built-in parameter, default directory,
for each workspace in the db
Call InsertBuiltInParameter(dbFile,
PARAM_DEFAULT_DIR, gstrEmptyString,
PARAM_DEFAULT_DIR_DESC)

Call UpdateDbDtls(dbFile, sVersion)

Exit Sub

Upgrade23to24Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade24to25(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sBuf As String
    Dim qy As DAO.QueryDef
    Dim rTemp As DAO.Recordset
    Dim lId As Long
    Dim cTempStr As New cStringSM

    On Error GoTo Upgrade24to25Err

    sBuf = "Release " & gsVersion25 & " onwards,
new 'Connections' must be created for all " & _
        "connection strings. " & vbCrLf & vbCrLf
& _
        "Connections will appear under the
Globals/Connections " & _
        "node in the workspace. " & vbCrLf & _
        "A list of all 'Connections' (instead of
'Connection Strings') " & _
        "in the workspace will be displayed in the
'Connections' field for " & _
        "ODBC steps on the Step definition screen.
" & vbCrLf & vbCrLf & _
        "Each Connection can be marked as static or
dynamic. " & vbCrLf & _
        "Dynamic connections will be created when
a step starts execution and " & _
        "closed once the step completes. " & vbCrLf
& _

```

```

"Static connections will be kept open
till the run completes." & vbCrLf & vbCrLf
& _

"Currently dynamic 'Connections'
have been created for all existing
'Connection Strings' " & _
"with the suffix " & _
CONNECTION_STRINGS_TO_NAME_S
UFFIX
Call MsgBox(sBuf, vbOKOnly +
vbApplicationModal, "Upgrade database")

' Add a new table for the connection name
entity
' This table has been added in order to
satisfy the TPC-H requirement that
' all the queries in a stream need to be
executed on a single connection.
sBuf =
CreateConnectionDtlsTableScript()
dbFile.Execute sBuf, dbFailOnError

' Add an identifier column for the
connection_name_id field
sBuf = "alter table att_identifiers " & _
" add column " & _
FLD_ID_CONN_NAME & " long "
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtls(dbFile, sVersion)

' insert connection_dtl records for each of
the connection strings
sBuf = "select * from " &
TBL_CONNECTION_STRINGS
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)

sBuf = "insert into " &
TBL_CONNECTION_DTLS & _
"(" & FLD_ID_WORKSPACE & _
", " & FLD_ID_CONN_NAME & _
", " & _
FLD_CONN_DTL_CONNECTION_NAM
E & _
", " & _
FLD_CONN_DTL_CONNECTION_STRIN
G & _
", " & _
FLD_CONN_DTL_CONNECTION_TYPE
& ") " & _
" values ( [w_id], [c_id], [c_name],
[c_str], [c_type] ) "
Set qy = dbFile.CreateQueryDef("", sBuf)

lId = glMinId
If rTemp.RecordCount <> 0 Then
rTemp.MoveFirst

While Not rTemp.EOF
qy.Parameters("w_id").Value =
rTemp.Fields(FLD_ID_WORKSPACE)
qy.Parameters("c_id").Value = lId
qy.Parameters("c_name").Value =
rTemp.Fields(FLD_CONN_STR_CONNEC
TION_NAME) &
CONNECTION_STRINGS_TO_NAME_S
UFFIX
qy.Parameters("c_str").Value =
rTemp.Fields(FLD_CONN_STR_CONNEC
TION_NAME)
qy.Parameters("c_type").Value =
ConnTypeDynamic

qy.Execute dbFailOnError

```

```

lId = lId + 1
rTemp.MoveNext
Wend
End If
qy.Close
rTemp.Close

' Initialize the value of the
connection_name_id
sBuf = "update att_identifiers " & _
" set " & FLD_ID_CONN_NAME & "
= " & Str(lId)
dbFile.Execute sBuf, dbFailOnError

' Update the start_directory field in att_steps
to point to the newly
' created connections
Call ReadStepsInWorkspace(rTemp, qy,
glInvalidId, dbLoad:=dbFile, _
bSelectArchivedRecords:=False)

sBuf = "update " & TBL_STEPS & _
" set " & FLD_STEPS_EXEC_DTL & " =
[c_name] " & _
" where " & FLD_ID_STEP & " = [s_id] "
& _
" and " & FLD_STEPS_VERSION_NO
& " = [ver_no] "
Set qy = dbFile.CreateQueryDef("", sBuf)

If rTemp.RecordCount <> 0 Then
rTemp.MoveFirst

While Not rTemp.EOF
If
rTemp.Fields(FLD_STEPS_EXEC_MECHAN
ISM).Value = gintExecuteODBC Then
If Not (StringEmpty("") &
rTemp.Fields(FLD_STEPS_EXEC_DTL)))
Then
sBuf =
rTemp.Fields(FLD_STEPS_EXEC_DTL)
' Strip the enclosing "%"
characters
sBuf = Mid(sBuf, 2, Len(sBuf) -
2) &
CONNECTION_STRINGS_TO_NAME_SUF
FIX

qy.Parameters("c_name").Value =
sBuf
qy.Parameters("s_id").Value =
rTemp.Fields(FLD_ID_STEP)
qy.Parameters("ver_no").Value =
rTemp.Fields(FLD_STEPS_VERSION_NO)

qy.Execute dbFailOnError
End If
End If
rTemp.MoveNext
Wend
End If

qy.Close
rTemp.Close

Exit Sub

Upgrade243to25Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError +
errUpgradeFailed, mstrModuleName, _
LoadResString(errUpgradeFailed)

```

```

End Sub

Private Sub Upgrade25to251(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

On Error GoTo Upgrade25to251Err

' Create the built-in parameters, run_id and
output_dir, for each workspace in the db
Call InsertBuiltInParameter(dbFile,
PARAM_RUN_ID, gstrEmptyString,
PARAM_RUN_ID_DESC)
Call InsertBuiltInParameter(dbFile,
PARAM_OUTPUT_DIR, gstrEmptyString,
PARAM_OUTPUT_DIR_DESC)

Call UpdateDbDtls(dbFile, sVersion)

Exit Sub

Upgrade25to251Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade242to243(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

Dim sBuf As String
Dim cTempStr As New cStringSM
Dim iResponse As Integer

On Error GoTo DeleteHistoryErr

Call DeleteRunHistory(dbFile)

On Error GoTo Upgrade242to243Err

UpgradeWsp.CommitTrans

UpgradeWsp.BeginTrans

' Add a parameter type field and a description
field to the parameter table
sBuf = "alter table run_step_details " & _
" add column parent_instance_id LONG "

dbFile.Execute sBuf, dbFailOnError

sBuf = "alter table run_step_details " & _
" add column iterator_value TEXT(255) "

dbFile.Execute sBuf, dbFailOnError

Call AlterFieldType(dbFile,
TBL_RUN_STEP_DTLS, "start_time",
DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile,
TBL_RUN_STEP_DTLS, "end_time",
DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile,
TBL_RUN_STEP_HDR, "start_time",
DATA_TYPE_CURRENCY)
Call AlterFieldType(dbFile,
TBL_RUN_STEP_HDR, "end_time",
DATA_TYPE_CURRENCY)

Call UpdateDbDtls(dbFile, sVersion)

```

<pre> Exit Sub DeleteHistoryErr: ' This is not a critical error - continue with upgrade Call LogErrors(Errors) Resume Next Upgrade242to243Err: UpgradeWsp.Rollback Call LogErrors(Errors) Err.Raise vbObjectError + errUpgradeFailed, mstrModuleName, _ LoadResString(errUpgradeFailed) End Sub ***** ***** ' The AlterFieldType Sub procedure requires three string ' parameters. The first string specifies the name of the table ' containing the field to be changed. The second string specifies ' the name of the field to be changed. The third string specifies ' the new data type for the field. ***** ***** Private Sub AlterFieldType(dbFile As Database, TblName As String, FieldName As String, _ NewDataType As String) Dim qdf As DAO.QueryDef Dim sSql As String ' Add a temporary field to the table. sSql = "ALTER TABLE [" & TblName & _ "] ADD COLUMN AlterTempField " & NewDataType Set qdf = dbFile.CreateQueryDef("", sSql) qdf.Execute ' Copy the data from old field into the new field. qdf.SQL = "UPDATE DISTINCTROW [" & TblName & "] SET AlterTempField = [" & FieldName & "]" qdf.Execute ' Delete the old field. qdf.SQL = "ALTER TABLE [" & TblName & "] DROP COLUMN [" & FieldName & "]" qdf.Execute ' Rename the temporary field to the old field's name. dbFile.TableDefs("[[" & TblName & "]").Fields("AlterTempField").Name = FieldName dbFile.TableDefs.Refresh ' Clean up. End Sub Private Sub Upgrade01to21(UpgradeWsp As DAO.Workspace, dbFile As DAO.Database, sVersion As String) Dim sSql As String On Error GoTo Upgrade01to21Err </pre>	<pre> sSql = "Create table db_details (" & _ "db_version Text(50) " & _ ");" dbFile.Execute sSql, dbFailOnError sSql = "insert into db_details " & _ "(db_version) values ('" & sVersion & "') " dbFile.Execute sSql, dbFailOnError Call UpdateContinuationCriteria(dbFile) Exit Sub Upgrade01to21Err: Call LogErrors(Errors) UpgradeWsp.Rollback Err.Raise vbObjectError + errUpgradeFailed, mstrModuleName, _ LoadResString(errUpgradeFailed) End Sub Private Function UpgradeDb(UpgradeWsp As DAO.Workspace, dbFile As Database, _ sVerTo As String, sVerFrom As String) As Boolean Dim sMsg As String On Error GoTo UpgradeDbErr UpgradeDb = False If Not ValidUpgrade(sVerTo, sVerFrom) Then Exit Function If NoDbChanges(sVerTo, sVerFrom) Then UpgradeDb = True Exit Function End If sMsg = "The database needs to be upgraded from Version " & sVerFrom & _ " to Version " & sVerTo & "." & vbCrLf & _ "Proceed?" If Not Confirm(Buttons:=vbYesNo, strMessage:=sMsg, strTitle:="Upgrade database") Then Exit Function End If UpgradeWsp.BeginTrans Select Case sVerFrom Case gsVersion25 Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion243 Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion24, gsVersion241, gsVersion242 sMsg = "After this upgrade, the run history for previous runs will no longer be available. " & _ "Continue?" If Not Confirm(Buttons:=vbYesNo, strMessage:=sMsg, strTitle:="Upgrade database") Then </pre>	<pre> UpgradeWsp.CommitTrans Exit Function End If Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion243) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion23 Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion21 Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion10 Call Upgrade10to21(UpgradeWsp, dbFile, gsVersion21) Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion01 Call Upgrade01to21(UpgradeWsp, dbFile, gsVersion21) Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) End Select UpgradeWsp.CommitTrans UpgradeDb = True Exit Function UpgradeDbErr: Call LogErrors(Errors) ShowError errUpgradeFailed End Function Private Function DBVersion(TestDb As Database) As String ' Retrieves the database version </pre>
--	---	--

<pre> Dim rVersion As Recordset On Error GoTo DBVersionErr Set rVersion = TestDb.OpenRecordset("Select db_version from db_details ", _ dbOpenForwardOnly) BugAssert rVersion.RecordCount <> 0 DBVersion = rVersion!db_version rVersion.Close Exit Function DBVersionErr: If Err.Number = merrDaoTableMissing Then DBVersion = gsVersion01 Else LogErrors Errors Err.Raise vbObjectError + errUpgradeFailed, mstrModuleName, _ LoadResString(errUpgradeFailed) End If End Function Private Function ValidUpgrade(sVerTo As String, sVerFrom As String) As Boolean If sVerTo = gsVersion And sVerFrom = gsVersion251 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion25 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion243 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion242 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion241 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion24 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion23 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion21 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion10 Then ValidUpgrade = True ElseIf sVerTo = gsVersion And sVerFrom = gsVersion01 Then ValidUpgrade = True Else ValidUpgrade = False End If End Function Attribute VB_Name = "DebugSM" ' FILE: DebugSM.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' </pre>	<pre> ' PURPOSE: Contains all the functions that carry out error/debug ' processing for the project. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' ' Most of the functions in this module that manipulate the ' error object do not have an On Error GoTo statement - this ' is because it will clear the passed in error object - let ' the calling functions handle the errors raised by this ' module, if any Option Explicit ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "DebugSM." Private mcLogFile As cFileSM Private mcErrorFile As cFileSM Private Const FORMAT_MESSAGE_FROM_SYSTEM = &H1000 Private Const FORMAT_MESSAGE_IGNORE_INSERTS = &H200 Private Const pNull = 0 Declare Function FormatMessage Lib "kernel32" Alias "FormatMessageA" (ByVal dwFlags As Long, lpSource As Any, ByVal dwMessageId As Long, ByVal dwLanguageId As Long, ByVal lpbuffer As String, ByVal nSize As Long, Arguments As Long) As Long Public Function Confirm(Optional lngMessageCode As conConfirmMsgCodes, _ Optional lngTitleCode As conConfirmMsgTitleCodes, _ Optional TitleParameter As String, _ Optional ByVal Buttons As Integer = -1, _ Optional strMessage As String = gstrEmptyString, _ Optional strTitle As String = gstrEmptyString) _ As Boolean ' Displays a confirmation message corresponding to the ' passed in message code. Returns True if the user says ' Ok and False otherwise Dim intResponse As Integer Dim intButtonStyle As Integer On Error GoTo ConfirmErr Confirm = False ' If the buttons style hasn't been specified, set the ' default style to display OK and Cancel buttons If Buttons = -1 Then intButtonStyle = vbOKCancel Else intButtonStyle = Buttons End If </pre>	<pre> ' Find the message string for the passed in code If StringEmpty(strMessage) Then strMessage = Trim\$(LoadResString(lngMessageCode)) End If If StringEmpty(strTitle) Then strTitle = Trim\$(LoadResString(lngTitleCode)) End If If Not StringEmpty(TitleParameter) Then strTitle = strTitle & Chr\$(vbKeySpace) & _ gstrSQ & TitleParameter & gstrSQ End If ' Display the confirmation message with the Cancel button ' set to the default - assume that we are confirming ' potentially dangerous operations! intResponse = MsgBox(strMessage, _ intButtonStyle + vbQuestion + vbApplicationModal, _ strTitle) ' Translate the user response into a True/False return code If intButtonStyle = vbOKCancel Then If intResponse = vbOK Then Confirm = True Else Confirm = False End If Else If intResponse = vbYes Then Confirm = True Else Confirm = False End If End If Exit Function ConfirmErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 gstrSource = mstrModuleName & "Confirm" Err.Raise vbObjectError + errConfirmFailed, _ gstrSource, _ LoadResString(errConfirmFailed) End Function Public Sub LogSystemError() Dim eErrCode As Long eErrCode = GetLastError() If eErrCode <> 0 Then WriteToFile "System Error: " & eErrCode & vbCrLf & ApiError(eErrCode), _ blnError:=True End If End Sub Public Function ApiError(ByVal e As Long) As String Dim s As String Dim c As Long s = String(256, 0) c = FormatMessage(FORMAT_MESSAGE_FROM_S YSTEM Or _ </pre>
---	---	---

```

FORMAT_MESSAGE_IGNORE_INSERT
S, _
    pNull, e, 0&, s, Len(s), ByVal pNull)
    If c Then ApiError = e & ": " & Left$(s,
c)
End Function

' Output flags determine output destination
of BugAsserts and messages
#Const afLogFile = 1
#Const afMsgBox = 2
#Const afDebugWin = 4
#Const afAppLog = 8

' Display appropriate error message, and
then stop
' program. These errors should NOT be
possible in
' shipping product.
Sub BugAssert(ByVal fExpression As
Boolean, _
    Optional sExpression As String)
#If afDebug Then
    If fExpression Then Exit Sub
    BugMessage "BugAssert failed: " &
sExpression
    Stop
#End If
End Sub

Sub BugMessage(sMsg As String)

#If afDebug And afLogFile Then
    ' Since we are writing log messages, the
error flag is turned off
    Call WriteToFile(sMsg, False)
#End If
#If afDebug And afMsgBox Then
    MsgBox sMsg
#End If
#If afDebug And afDebugWin Then
    Debug.Print sMsg
#End If
#If afDebug And afAppLog Then
    App.LogEvent sMsg
#End If

End Sub
Public Function ProjectLogFile() As String

    ProjectLogFile = mcLogFile.FileName

End Function
Public Function ProjectErrorFile() As String

    ProjectErrorFile = mcErrorFile.FileName

End Function

Private Sub WriteToFile(sMsg As String,
Optional ByVal blnError As Boolean)

    ' Calls procedures to write the passed in
message to the log -
    ' The blnError flag is used to indicate that
the message
    ' should be logged to the error file - by
default the log
    ' file is used

    Dim mcFileObj As cFileSM
    Dim strFileName As String
    Dim strFileHdr As String

```

```

On Error GoTo WriteToFileErr

If blnError Then
    If mcErrorFile Is Nothing Then
        Set mcErrorFile = New cFileSM
    End If
    Set mcFileObj = mcErrorFile
Else
    If mcLogFile Is Nothing Then
        Set mcLogFile = New cFileSM
    End If
    Set mcFileObj = mcLogFile
End If

If StringEmpty(mcFileObj.FileName) Then
    If blnError Then
        strFileName = gstrProjectPath & "\" &
App.EXENAME & ".ERR"
        strFileHdr = "Stepmaster Errors"
    Else
        strFileName = gstrProjectPath & "\" &
App.EXENAME & ".DBG"
        strFileHdr = "Stepmaster Log"
    End If

    mcFileObj.FileName = strFileName
    mcFileObj.WriteLine strFileHdr
    mcFileObj.WriteLine "Log start time : "
& Now
End If

mcFileObj.WriteLine sMsg

Exit Sub

WriteToFileErr:
    ' Display the error code raised by Visual
Basic
    Call DisplayErrors(Errors)
    ' An error message would've been displayed
by the called
    ' procedures

End Sub
Public Sub WriteMessage(sMsg As String)

    Call WriteToFile(sMsg, True)

End Sub

Sub BugTerm()
#If afDebug And afLogFile Then
    ' Close log file
    mcLogFile.CloseFile
#End If
End Sub

Public Sub ShowError(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString, _
    Optional ByVal DoWriteError As
Boolean = True)

    If DoWriteError Then
        ' Call a procedure to write the error to a
log file
        Call WriteError(ErrorCode, ErrorSource,
OptArgs)
    End If

```

```

' Re-initialize the values of the Error object
before
' displaying the error to the user
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)

    Call DisplayErrors(Errors)

    Err.Clear

End Sub
Public Sub WriteError(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString)

    ' Initialize the values of the Error object before
' calling the log function
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)

    Call LogErrors(Errors)

    Err.Clear

End Sub
Private Sub InitErrObject(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString)

    Dim lngError As Long

    lngError = IIf(ErrorCode > vbObjectError And
ErrorCode < vbObjectError + 65535, _
        ErrorCode - vbObjectError, ErrorCode)
    Err.Number = lngError + vbObjectError
    Err.Description = LoadResString(lngError) &
OptArgs
    Err.Source = App.EXENAME & ErrorSource

End Sub
Public Sub ShowMessage(ByVal MessageCode As
errErrorConstants, _
    Optional ByVal OptArgs As String)

    Dim strMessage As String

    On Error GoTo ShowMessageErr

    strMessage = LoadResString(MessageCode) &
OptArgs

    ' Write the error to a log file
    BugMessage strMessage

    MsgBox strMessage, vbOKOnly

Exit Sub

ShowMessageErr:
    ' Log the error and exit
    Call DisplayErrors(Errors)

End Sub
Public Sub ShowMessageStr(sMessage As String)

    ' Write the error to a log file
    BugMessage sMessage

    MsgBox sMessage, vbOKOnly

```


<pre> End Sub Public Sub DisplayErrors(myErrCollection As Errors) Dim strError As String Dim errLoop As Error Dim errCode As Long ' Enumerate Errors collection and display properties of ' each Error object. If Err.Number <> 0 Then If Err.Number > vbObjectError And Err.Number < (vbObjectError + 65536) Then errCode = Err.Number - vbObjectError Else errCode = Err.Number End If strError = "Error # " & Str(errCode) & " was generated by " _ & Err.Source & Chr(13) & Err.Description MsgBox strError, "Error", Err.HelpFile, Err.HelpContext Else For Each errLoop In myErrCollection With errLoop If Err.Number > vbObjectError And Err.Number < (vbObjectError + 65536) Then errCode = .Number - vbObjectError Else errCode = .Number End If strError = "Error #" & errCode & vbCrLf strError = strError & " " & .Description & vbCrLf strError = strError & _ " (Source: " & .Source & ")" & vbCrLf strError = strError & _ "Press F1 to see topic " & .HelpContext & vbCrLf strError = strError & _ " in the file " & .HelpFile & "." End With MsgBox strError Next End If End Sub Public Sub LogErrors(myErrCollection As Errors) Dim cColErrors As cVectorStr Dim strError As String Dim errLoop As Error Dim errCode As Long Dim lngIndex As Long Set cColErrors = New cVectorStr ' Enumerate Errors collection and display properties of ' each Error object. If Err.Number <> 0 Then If Err.Number > vbObjectError And Err.Number < (vbObjectError + 65536) Then </pre>	<pre> errCode = Err.Number - vbObjectError Else errCode = Err.Number End If strError = "Error # " & Str(errCode) & " was generated by " _ & Err.Source & vbCrLf & Err.Description cColErrors.Add strError End If ' Log all database errors, if any For Each errLoop In myErrCollection With errLoop If Err.Number > vbObjectError And Err.Number < (vbObjectError + 65536) Then errCode = .Number - vbObjectError Else errCode = .Number End If strError = "Error #" & errCode & vbCrLf strError = strError & " " & .Description & vbCrLf strError = strError & _ " (Source: " & .Source & ")" & vbCrLf End With cColErrors.Add strError Next ' We can have a error handler now that we have stored all ' errors away safely! - having an error handler before ' enumerating all the errors would have cleared the error ' collection On Error GoTo LogErrorsErr gstrSource = mstrModuleName & "LogErrors" For lngIndex = 0 To cColErrors.Count - 1 strError = cColErrors(lngIndex) Debug.Print strError Call WriteToFile(strError, True) Next lngIndex Set cColErrors = Nothing Exit Sub LogErrorsErr: ' Display the error code raised by Visual Basic DisplayErrors Errors On Error GoTo 0 ShowError errUnableToWriteError, DoWriteError:=False End Sub Attribute VB_Name = "FileCommon" ' FILE: FileCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: This module contains common functionality to display ' the File Open dialog. ' Contact: Reshma Tharamal (reshmat@microsoft.com) </pre>	<pre> ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "FileCommon." Private Enum EOpenFile OFN_OVERWRITEPROMPT = &H2 OFN_HIDEREADONLY = &H4 OFN_FILEMUSTEXIST = &H1000 OFN_EXPLORER = &H80000 End Enum ' The locations for the different output files are presented to ' the user in a list box. These constants are used while loading the ' data and while reading the data from the list box. ' These constants also represent the different file types that are ' displayed to the user in File Open dialogs Public Enum gFileTypes gintOutputFile = 0 ' gintLogFile = 1 gintErrorFile gintStepTextFile gintOutputCompareFile gintDBFile gintDBFileNew gintImportFile gintExportFile End Enum Public Const gsSqlFileSuffix = ".sql" Public Const gsCmdFileSuffix = ".cmd" Public Const gsOutputFileSuffix = ".out" Public Const gstrLogFileSuffix = ".log" Public Const gsErrorFileSuffix = ".err" Public Function BrowseDBFile() As String ' Prompts the user for a database file with the workspace information ' Call CallFileDialog to display the open file dialog BrowseDBFile = CallFileDialog(gintDBFile) End Function Public Function CallFileDialog(intFileType As Integer, _ Optional ByVal strDefaultFile As String = gstrEmptyString) As String ' This function initializes the values of the filter property, ' the dialog title and flags for the File Open dialog depending ' on the FileType passed in ' It then calls ShowFileOpenDialog to set these properties and ' display the File Open dialog to the user ' All the properties used by the File Open dialog are defined ' as constants in this function and passed to ShowFileOpenDialog ' as parameters. So if any of the dialog properties need to be ' modified, these constants are what need to be changed Const s_DLG_TITLE_OPEN = "Open" Const s_DLG_TITLE_NEW = "New" Const s_DLG_TITLE_IMPORT = "Import From" </pre>
--	---	--

```

Const s_DLG_TITLE_EXPORT =
"Export To"

Const mlng_FILE_STEP_TEXT_FLAGS
= OFN_EXPLORER Or
OFN_FILEMUSTEXIST Or
OFN_HIDEREADONLY
Const
mlng_FILE_OUTPUT_COMPARE_FLAG
S = mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_DB_FLAGS =
mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_OUTPUT_FLAGS =
OFN_EXPLORER Or
OFN_HIDEREADONLY Or
OFN_OVERWRITEPROMPT
Const mlng_FILE_LOG_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_ERROR_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_DB_NEW_FLAGS =
mlng_FILE_OUTPUT_FLAGS

Const mstr_FILE_ALL_FILTER = "|All
Files (*.*)*.*"
Const mstr_FILE_STEP_TEXT_FILTER
= "Query Files (*.*) & gsSqlFileSuffix &
")*.*" & gsSqlFileSuffix &
"|Command Script Files (*.*) &
gsCmdFileSuffix &
")*.*" & gsCmdFileSuffix
Const
mstr_FILE_OUTPUT_COMPARE_FILTE
R = "Text Files (*.txt)*.txt"
Const mstr_FILE_OUTPUT_FILTER =
"Output Files (*.out)*.out"
Const mstr_FILE_LOG_FILTER = "Log
Files (*.log)*.log"
Const mstr_FILE_ERROR_FILTER =
"Error Files (*.err)*.err"
Const mstr_FILE_DB_FILTER =
"Stepmaster Workspace Files (*.*) &
gsDefDBFileExt & ")*.*" & gsDefDBFileExt

Dim strFileName As String

On Error GoTo CallFileDialogErr

Select Case intFileType
Case gintStepTextFile
strFileName =
ShowFileDialog( _

mstr_FILE_STEP_TEXT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _

mlng_FILE_STEP_TEXT_FLAGS, _
strDefaultFile)

Case gintOutputCompareFile
strFileName =
ShowFileDialog( _

mstr_FILE_OUTPUT_COMPARE_FILTE
R & mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _

mlng_FILE_OUTPUT_COMPARE_FLAG
S, _
strDefaultFile)

Case gintOutputFile
strFileName =
ShowFileDialog( _

```

```

mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

' Case gintLogFile
' strFileName = ShowFileDialog( _
' mstr_FILE_LOG_FILTER &
' mstr_FILE_ALL_FILTER, _
' s_DLG_TITLE_OPEN, _
' mlng_FILE_LOG_FLAGS, _
' strDefaultFile)
'

Case gintErrorFile
strFileName = ShowFileDialog( _
mstr_FILE_ERROR_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_ERROR_FLAGS, _
strDefaultFile)

Case gintDBFile
strFileName = ShowFileDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintDBFileNew
strFileName = ShowFileDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_NEW, _
mlng_FILE_DB_NEW_FLAGS, _
strDefaultFile)

Case gintImportFile
strFileName = ShowFileDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_IMPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintExportFile
strFileName = ShowFileDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_EXPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case Else
BugAssert True, "Incorrect file type
passed in."
' Default processing will be for the
output file
strFileName = ShowFileDialog( _
mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

End Select
CallFileDialog = strFileName

Exit Function

CallFileDialogErr:
CallFileDialog = gstrEmptyString
' Log the error code raised by Visual Basic
Call LogErrors(Errors)

```

```

gstrSource = mstrModuleName &
"CallFileDialog"
Call ShowError(errBrowseFailed)

End Function

VERSION 5.00
Begin VB.Form frmSplash
BorderStyle = 3 'Fixed Dialog
ClientHeight = 4710
ClientLeft = 45
ClientTop = 45
ClientWidth = 7455
ControlBox = 0 'False
Icon = "frmSplash.frx":0000
LinkTopic = "Form1"
LockControls = -1 'True
MaxButton = 0 'False
MinButton = 0 'False
ScaleHeight = 4710
ScaleWidth = 7455
ShowInTaskbar = 0 'False
StartupPosition = 2 'CenterScreen
Visible = 0 'False
Begin VB.Frame fraMainFrame
Height = 4590
Left = 45
TabIndex = 0
Top = -15
Width = 7380
Begin VB.PictureBox picLogo
Height = 2385
Left = 510
Picture = "frmSplash.frx":0442
ScaleHeight = 2325
ScaleWidth = 1755
TabIndex = 1
Top = 855
Width = 1815
End
Begin VB.Label lblReserved
AutoSize = -1 'True
Caption = "All Rights Reserved."
Height = 195
Left = 5520
TabIndex = 8
Top = 4080
Width = 1440
End
Begin VB.Label lblCopyright
AutoSize = -1 'True
Caption = "Copyright © 1998"
BeginProperty Font
Name = "Arial"
Size = 8.25
Charset = 0
Weight = 400
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False
EndProperty
Height = 210
Left = 5550
TabIndex = 7
Tag = "Copyright"
Top = 3850
Width = 1380
WordWrap = -1 'True
End
Begin VB.Label lblCompany
AutoSize = -1 'True
Caption = "Microsoft Corporation"
BeginProperty Font
Name = "Arial"
Size = 8.25

```

```

    Charset      = 0
    Weight       = 400
    Underline    = 0 'False
    Italic       = 0 'False
    Strikethrough = 0 'False
EndProperty
Height = 210
Left   = 5460
TabIndex = 6
Tag    = "Company"
Top    = 3640
Width  = 1560
End

```

```

Begin VB.Label lblRestrictions
    AutoSize = -1 'True
    Caption  = "See License Agreement for Restrictions"
    Height   = 195
    Left     = 460
    TabIndex = 5
    Top      = 4080
    Width    = 2790
End

```

```

Begin VB.Label lblProductName
    AutoSize = -1 'True
    Caption  = "StepMaster"
BeginProperty Font
    Name     = "Arial"
    Size     = 32.25
    Charset  = 0
    Weight   = 700
    Underline = 0 'False
    Italic   = 0 'False
    Strikethrough = 0 'False
EndProperty
Height = 765
Left   = 2670
TabIndex = 4
Tag    = "Product"
Top    = 1200
Width  = 3495
End

```

```

Begin VB.Label lblVersion
    Alignment = 1 'Right Justify
    AutoSize  = -1 'True
    Caption   = "Version 2.4"
BeginProperty Font
    Name     = "Arial"
    Size     = 12
    Charset  = 0
    Weight   = 700
    Underline = 0 'False
    Italic   = 0 'False
    Strikethrough = 0 'False
EndProperty
Height = 285
Left   = 4800
TabIndex = 3
Tag    = "Version"
Top    = 2040
Width  = 1275
End

```

```

Begin VB.Label lblWarning
    AutoSize = -1 'True
    Caption  = "Do Not Redistribute"
BeginProperty Font
    Name     = "Arial"
    Size     = 8.25
    Charset  = 0
    Weight   = 400
    Underline = 0 'False
    Italic   = 0 'False
    Strikethrough = 0 'False
EndProperty
Height = 210

```

```

    Left = 480
    TabIndex = 2
    Tag = "Warning"
    Top = 3850
    Width = 1380
End

```

```

End
Attribute VB_Name = "frmSplash"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE:    frmSplash.frm
'         Microsoft TPC-H Kit Ver. 1.00
'         Copyright Microsoft, 1999
'         All Rights Reserved

```

```

' PURPOSE:  Splash screen for StepMaster
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

```

```
Option Explicit
```

```

Private Sub Form_Load()
    ' lblVersion.Caption = "Version " &
App.Major & "." & App.Minor & "." &
App.Revision
    lblProductName.Caption = App.Title
    lblVersion.Caption = GetVersionString

```

```
End Sub
```

```
VERSION 5.00
```

```

Begin VB.Form frmWorkspaceOpen
    BorderStyle = 3 'Fixed Dialog
    Caption     = "Open Workspace"
    ClientHeight = 2550
    ClientLeft  = 45
    ClientTop   = 330
    ClientWidth = 4695
    LinkTopic   = "Form1"
    LockControls = -1 'True
    MaxButton   = 0 'False
    MinButton   = 0 'False
    ScaleHeight = 2550
    ScaleWidth  = 4695
    ShowInTaskbar = 0 'False
    StartUpPosition = 1 'CenterOwner
Begin VB.CommandButton cmdOK
    Caption = "OK"
    Default = -1 'True
    Height = 375
    Left = 2160
    TabIndex = 2
    Top = 2040
    Width = 1095
End

```

```

Begin VB.CommandButton cmdCancel
    Cancel = -1 'True
    Caption = "Cancel"
    Height = 375
    Left = 3360
    TabIndex = 3
    Top = 2040
    Width = 1095
End

```

```

Begin VB.ListBox lstWorkspaces
    Height = 1425
    ItemData =
"frmWorkspaceOpen.frx":0000

```

```

    Left = 240
    List = "frmWorkspaceOpen.frx":0002
    MultiSelect = 2 'Extended
    TabIndex = 1
    Top = 480
    Width = 4215
End

```

```

Begin VB.Label lblWorkspaces
    AutoSize = -1 'True
    Caption = "Workspace"
    Height = 195
    Left = 240
    TabIndex = 0
    Top = 120
    Width = 825
End

```

```

End
Attribute VB_Name = "frmWorkspaceOpen"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE:    frmWorkspaceOpen.frm
'         Microsoft TPC-H Kit Ver. 1.00
'         Copyright Microsoft, 1999
'         All Rights Reserved
'
' PURPOSE:  Used to display a list of all
workspaces in a
'           workspace definition file for Open, Import,
Export
'           and Run (in SMRunOnly) workspace
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

```

```

Option Explicit
#If RUN_ONLY Then
    Private WithEvents cRunOnlyInst As cRunOnly
    Attribute cRunOnlyInst.VB_VarHelpID = -1

```

```

Private Sub cRunOnlyInst_Done()
    ShowFree
End Sub

```

```

Private Sub Run()
    Dim iIndex As Integer

    Set cRunOnlyInst = New cRunOnly

    For iIndex = 0 To Me.lstWorkspaces.ListCount -
1
        If Me.lstWorkspaces.Selected(iIndex) Then
            ShowBusy
            cRunOnlyInst.WorkspaceId =
Me.lstWorkspaces.ItemData(Me.lstWorkspaces.List
Index)
            cRunOnlyInst.WspName =
Me.lstWorkspaces.List(Me.lstWorkspaces.ListInde
x)
            cRunOnlyInst.RunWsp
        End If
    Next iIndex
End Sub

```

```

#End If

Private Sub cmdCancel_Click()

```

```
    Unload Me
```

```
End Sub
```

```
Private Sub cmdOK_Click()
```

```

#If RUN_ONLY Then
    Call Run
#Else
    Call WorkspaceOpenOk
#End If

End Sub

Private Sub lstWorkspaces_DblClick()

    ' A double click on the workspaces list
    box is considered
    ' equivalent to selecting an item in the list
    and then selecting
    ' the OK command
    Call cmdOK_Click

End Sub

Attribute VB_Name = "IteratorCommon"
' FILE:    IteratorCommon.bas
'
'    Microsoft TPC-H Kit Ver. 1.00
'    Copyright Microsoft, 1999
'    All Rights Reserved
'
' PURPOSE:  Contains functionality
common across StepMaster and
'           SMRunOnly, pertaining to iterators
'           Specifically, functions to read
iterators records
'           in the workspace, load them in an
array and so on.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"IteratorCommon."

Public Const gintMinIteratorSequence As
Integer = 0

Public Sub RangeComplete(vntIterators As
Variant)
    ' This is a debug procedure
    ' Checks if the from, to and step values
are present in
    ' the array

    Dim bReset As Byte
    Dim bShift As Byte
    Dim lngIndex As Long

    ' Set the three lowest order bits to 1
    bReset = 7

    BugAssert IsArray(vntIterators) And Not
IsEmpty(vntIterators), _
    "Iterators not specified!"

    For lngIndex = LBound(vntIterators) To _
        UBound(vntIterators)
        bShift = 1
        bShift = bShift * (2 ^
(vntIterators(lngIndex).IteratorType - 1))

        bReset = bReset Xor bShift
    Next lngIndex

```

```

' Assert that all the elements are present
BugAssert bReset = 0, "Range not
completely specified!"

End Sub

Public Sub LoadIteratorsForWsp(cStepsCol As
cArrSteps, _
    ByVal lngWorkspaceId As Long,
rstStepsInWsp As Recordset)
    ' Initializes the step records in with all the
iterator
    ' values for each step

    Dim recIterators As Recordset

    On Error GoTo LoadIteratorsForWspErr

#If QUERY_ALL Then
    Dim dtStart As Date

    dtStart = Now
    Set recIterators =
ReadWspIterators(lngWorkspaceId)

    Call LoadIteratorsArray(cStepsCol,
recIterators)

    recIterators.Close

    BugMessage "QueryAll Read + load took: "
& CStr(DateDiff("s", dtStart, Now))

#Else
    Dim dtStart As Date
    Dim qyIt As DAO.QueryDef
    Dim strSql As String

    dtStart = Now
    If rstStepsInWsp.RecordCount = 0 Then
        Exit Sub
    End If

    ' This method has the advantage that if the
steps are queried right, everything else follows
    strSql = "Select step_id, version_no, type,
iterator_value, " & _
        " sequence_no " & _
        " from iterator_values " & _
        " where step_id = [s_id] " & _
        " and version_no = [ver_no] "

    ' Order the iterators by sequence within a
step
    strSql = strSql & " order by sequence_no "

    Set qyIt =
dbsAttTool.CreateQueryDef(gstrEmptyString,
sql)
    rstStepsInWsp.MoveFirst

    While Not rstStepsInWsp.EOF

        qyIt.Parameters("s_id").Value =
rstStepsInWsp!step_id
        qyIt.Parameters("ver_no").Value =
rstStepsInWsp!version_no

        Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

        Call LoadIteratorsArray(cStepsCol,
recIterators)
        recIterators.Close

```

```

        rstStepsInWsp.MoveNext
    Wend

    qyIt.Close

    BugMessage "Query step at a time Read + load
took: " & CStr(DateDiff("s", dtStart, Now))

#End If

Exit Sub

LoadIteratorsForWspErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadIteratorsForWsp"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, _
    gstrSource, _
    LoadResString(errLoadRsInArrayFailed)

End Sub

Private Function ReadWspIterators(ByVal
lngWorkspaceId As Long) As Recordset

    ' This function will return a recordset that is
populated
    ' with the iterators for all the steps in a given
workspace

    Dim recIterators As Recordset
    Dim qyIt As DAO.QueryDef
    Dim strSql As String

    On Error GoTo ReadWspIteratorsErr
    gstrSource = mstrModuleName &
"ReadWspIterators"

    strSql = "Select i.step_id, i.version_no, " & _
        " i.type, i.iterator_value, " & _
        " i.sequence_no " & _
        " from iterator_values i, att_steps a " & _
        " where i.step_id = a.step_id " & _
        " and i.version_no = a.version_no " & _
        " and a.workspace_id = [w_id] " & _
        " and a.archived_flag = [archived] "

    ' Find the highest X-component of the version
number
    strSql = strSql & " AND cint( mid( a.version_no,
1, instr( a.version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) = " & _
        " ( select max( cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
        " from att_steps AS d " & _
        " WHERE a.step_id = d.step_id ) "

    ' Find the highest Y-component of the version
number for the highest X-component
    strSql = strSql & " AND cint( mid( a.version_no,
instr( a.version_no, " & gstrDQ & gstrVerSeparator
& gstrDQ & " ) + 1 ) ) = " & _
        " ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) + 1 ) ) ) " & _
        " from att_steps AS b " & _
        " Where a.step_id = b.step_id " & _
        " AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
        " ( select max( cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _

```

```

" from att_steps AS c " & _
" WHERE a.step_id = c.step_id ) ) "

' Order the iterators by sequence within a
step
strSql = strSql & " order by i.step_id,
i.sequence_no "

Set qyIt =
dbtAttTool.CreateQueryDef(gstrEmptyStrin
g, strSql)
qyIt.Parameters("w_id").Value =
lngWorkspaceId
qyIt.Parameters("archived").Value =
False

Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

qyIt.Close
Set ReadWspIterators = recIterators

Exit Function

ReadWspIteratorsErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errReadDataFailed, _
gstrSource,
LoadResString(errReadDataFailed)

End Function
Private Sub LoadIteratorsArray(cStepsCol
As cArrSteps, _
recIterators As Recordset)
' Initializes the step records with the
iterators for
' the step

Dim cNewIt As cIterator
Dim cStepRec As cStep
Dim lngStepId As Long

On Error GoTo LoadIteratorsArrayErr
gstrSource = mstrModuleName &
"LoadIteratorsArray"

If recIterators.RecordCount = 0 Then
Exit Sub
End If

recIterators.MoveFirst
While Not recIterators.EOF
Set cNewIt = New cIterator

lngStepId =
CLng(ErrorOnNullField(recIterators,
"step_id"))
If Not cStepRec Is Nothing Then
If cStepRec.StepId <> lngStepId
Then
Set cStepRec =
cStepsCol.QueryStep(lngStepId)
End If
Else
Set cStepRec =
cStepsCol.QueryStep(lngStepId)
End If

' Initialize iterator values

```

```

cNewIt.IteratorType =
CInt(ErrorOnNullField(recIterators, "type"))
cNewIt.Value =
CStr(ErrorOnNullField(recIterators,
"iterator_value"))
cNewIt.SequenceNo =
CInt(ErrorOnNullField(recIterators,
"sequence_no"))

' Add this record to the array of iterators
cStepRec.LoadIterator cNewIt

Set cNewIt = Nothing
recIterators.MoveNext
Wend

Exit Sub

LoadIteratorsArrayErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadIteratorsArray"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, _
gstrSource, _

LoadResString(errLoadRsInArrayFailed)

End Sub

Attribute VB_Name = "MsgConfirm"
' FILE: MsgConfirm.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved

' PURPOSE: Contains constants for
confirmation messages that
' will be displayed by StepMaster
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' A public enum containing the codes for all the
confirmation
' messages that will be used by the project -
each of the codes
' has the prefix, con
Public Enum conConfirmMsgCodes
conWspDelete = 2000
conSave
conStopRun
conSaveConnect
conSaveDB
End Enum

' A public enum containing the titles for all the
confirmation
' messages that will be used by the project -
each of the codes
' has the prefix, cont - most confirmation
message codes will
' have a corresponding title code in here
Public Enum conConfirmMsgTitleCodes
contWspDelete = 3000
contSave
contStopRun
contSaveConnect
contSaveDB
End Enum

```

```

Attribute VB_Name = "OpenFiles"
' FILE: OpenFiles.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved

' PURPOSE: This module holds a list of all files
that have been
' opened by the project. This module is
needed since there
' is no way to share static data between
different instances
' of a class.
' Many procedure in this module do not do
any error handling -
' this is 'coz it is also used by procedures
that log error
' messages and any error handler will erase
the collection
' of errors!

' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private Const mstrModuleName As String =
".OpenFiles."

Private mOpenFiles As cNodeCollections

Private Const mstrTempDir As String = "\Temp\"

' The maximum number of temporary files that we
can create in a
' session
Private Const mlngMaxFileIndex As Long =
999999
Private Const mstrFileIndexFormat As String =
"000000"
Private Const mstrTempFilePrefix As String =
"SM"
Private Const mstrTempFileSuffix As String =
".cmd"

Private Const merrFileNotFound As Long = 76
Private Function GetFileHandle(strFileName) As
cFileInfo

Dim lngIndex As Long
Dim blnFileOpen As Boolean

If Not mOpenFiles Is Nothing Then

blnFileOpen = False
For lngIndex = 0 To mOpenFiles.Count - 1
If mOpenFiles(lngIndex).FileName =
strFileName Then
blnFileOpen = True
Exit For
End If
Next lngIndex

If blnFileOpen Then
Set GetFileHandle = mOpenFiles(lngIndex)
Else
Set GetFileHandle = Nothing
End If
Else
Set GetFileHandle = Nothing

```

```

End If
End Function

Private Function GetTempFileDir() As String

    Dim strTempFileDir As String

    On Error GoTo GetTempFileDirErr

    strTempFileDir = gstrProjectPath &
mstrTempDir

    If StringEmpty(Dir$(strTempFileDir,
vbDirectory)) Then
        MkDir strTempFileDir
    End If

    GetTempFileDir = strTempFileDir

    Exit Function

GetTempFileDirErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName &
"GetTempFileDir"
    On Error GoTo 0
    Err.Raise vbObjectError +
errProgramError, gstrSource, _
        LoadResString(errProgramError)

End Function
Public Function
MakePathValid(strFileName As String) As
String
    ' Checks if the passed in file path is valid

    Dim strFileDir As String
    Dim strTempDir As String
    Dim strTempFile As String
    Dim intPos As Integer
    Dim intStart As Integer

    On Error GoTo MakePathValidErr
    gstrSource = mstrModuleName &
"MakePathValid"

    strTempFile = strFileName
    intPos = InstrR(strFileName,
gstrFileSeparator)

    If intPos > 0 Then
        strFileDir = Left$(strTempFile, intPos -
1)
        If StringEmpty(Dir$(strFileDir,
vbDirectory)) Then
            ' Loop through the entire path
starting at the root
            ' since Mkdir can create only one
level of sub-directory
            ' at a time
            intStart = Instr(strFileDir,
gstrFileSeparator)

            Do While strTempDir <> strFileDir

                If intStart > 0 Then
                    strTempDir = Left$(strFileDir,
intStart - 1)
                Else
                    strTempDir = strFileDir
                End If
            End While
        End If
    End If

```

```

        If StringEmpty(Dir$(strTempDir,
vbDirectory)) Then
            ' If the specified directory doesn't
exist, try to
            ' create it.
            MkDir strTempDir
        Else
            ' The directory exists - go to it's
sub-directory
        End If
        intStart = Instr(intStart + 1,
strFileDir, gstrFileSeparator)
    Loop

    ' Sanity check
    If StringEmpty(Dir$(strFileDir,
vbDirectory)) Then
        ' We were unable to create the file
directory
        ShowError errCreateDirectoryFailed,
gstrSource, _
            strFileDir, DoWriteError:=False
        MakePathValid = gstrEmptyString
    Else
        MakePathValid = strTempFile
    End If
    Else
        ' The specified directory exists - we
should be able
        ' to create the output file in it
        MakePathValid = strTempFile
    End If
    Else
        ' The user has only specified a filename -
VB will try
        ' to create it in the current directory
        MakePathValid = strTempFile
    End If

    Exit Function

MakePathValidErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName &
"MakePathValid"
    ' Log the filename for debug
    Call WriteError(errInvalidFile, gstrSource,
strTempFile)
    On Error GoTo 0
    Err.Raise vbObjectError + errProgramError,
gstrSource, _
        LoadResString(errProgramError)

End Function
Public Function OpenFileSM(strFileName As
String) As Integer
    Dim intHFile As Integer
    Dim NewFileInfo As cFileInfo

    On Error GoTo OpenFileSMErr
    gstrSource = mstrModuleName &
"OpenFileSM"

    If StringEmpty(strFileName) Then
        On Error GoTo 0
        Err.Raise vbObjectError + errInvalidFile,
gstrSource, _
            LoadResString(errInvalidFile)
    End If

    If mOpenFiles Is Nothing Then
        Set mOpenFiles = New cNodeCollections
    End If

```

```

Set NewFileInfo = GetFileHandle(strFileName)

If NewFileInfo Is Nothing Then
    ' The file has not been opened yet

    ' If the filename has not been initialized, do not
    ' attempt to open it
    strFileName = MakePathValid(strFileName)

    If strFileName <> gstrEmptyString Then
        intHFile = FreeFile
        Open strFileName For Output Shared As
intHFile

        Set NewFileInfo = New cFileInfo
        NewFileInfo.FileHandle = intHFile
        NewFileInfo.FileName = strFileName
        mOpenFiles.Load NewFileInfo
    Else
        ' Either the directory was invalid or s'thing
failed
        ' Display the error to the user instead of
trying
        ' to log to the file
        ShowError errInvalidFile, gstrSource,
strFileName, _
            DoWriteError:=False
        intHFile = 0
    End If
    Else
        intHFile = NewFileInfo.FileHandle
    End If

    OpenFileSM = intHFile

    Exit Function

OpenFileSMErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    ' The Open command failed for some reason -
write an error
    ' and let the calling function handle the error
    ShowError errInvalidFile, gstrSource,
strFileName, _
        DoWriteError:=False
    OpenFileSM = 0

End Function
Public Function CreateTempFile() As String

    Dim strTempFileDir As String
    Dim strTempFileName As String

    Static lngLastFileIndex As Long

    On Error GoTo CreateTempFileErr

    strTempFileDir = GetTempFileDir()

    Do
        If lngLastFileIndex = mlngMaxFileIndex Then
            On Error GoTo 0
            Err.Raise vbObjectError +
errMaxTempFiles, gstrSource, _
                LoadResString(errMaxTempFiles)
        End If

        lngLastFileIndex = lngLastFileIndex + 1
        strTempFileName = mstrTempFilePrefix & _
            Format$(lngLastFileIndex,
mstrFileIndexFormat) & _
            mstrTempFileSuffix
    Loop

```

```

    If Not
StringEmpty(Dir$(strTempFileDir &
strTempFileName)) Then
    ' Remove any files left over from a
previous run,
    ' if they still exist
    Kill strTempFileDir &
strTempFileName
    End If

    ' Looping in case the file delete doesn't go
through for
    ' some reason
    Loop While Not
StringEmpty(Dir$(strTempFileDir &
strTempFileName))

    CreateTempFile =
GetShortName(strTempFileDir)
    CreateTempFile = CreateTempFile &
strTempFileName

    Exit Function

CreateTempFileErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    gstrSource = gstrSource &
"CreateTempFile"
    On Error GoTo 0
    Err.Raise vbObjectError +
errProgramError, gstrSource, _
        LoadResString(errProgramError)

End Function
Public Sub CloseFileSM(strFileName As
String)
    Dim FileToClose As cFileInfo

    If Not mOpenFiles Is Nothing Then

        ' Get the handle to the open file, if it
exists
        Set FileToClose =
GetFileHandle(strFileName)

        If Not FileToClose Is Nothing Then
            Close FileToClose.FileHandle

            ' Remove the file info from the
collection of open files
            mOpenFiles.Unload
FileToClose.Position
        End If
    End If

End Sub

Public Sub CloseOpenFiles()
    Dim lIndex As Long

    If Not mOpenFiles Is Nothing Then
        For lIndex = mOpenFiles.Count - 1 To
0
            CloseFileSM
(mOpenFiles(lIndex).FileName)
        Next lIndex
    End If

End Sub

Attribute VB_Name = "ParameterCommon"
' FILE:    ParameterCommon.bas
'
'    Microsoft TPC-H Kit Ver. 1.00
'    Copyright Microsoft, 1999

```

```

'    All Rights Reserved
'
' PURPOSE:    Contains functionality common
across StepMaster and
'            SMRunOnly, pertaining to parameters
'            Specifically, functions to load
parameter records
'            in an array.
' Contact:    Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"ParameterCommon."

Public Sub
LoadRecordsetInParameterArray(rstWorkSpac
eParameters As Recordset, _
    cParamCol As cArrParameters)

    Dim cNewParameter As cParameter

    On Error GoTo
LoadRecordsetInParameterArrayErr

    If rstWorkspaceParameters.RecordCount =
0 Then
        Exit Sub
    End If

    rstWorkspaceParameters.MoveFirst
    While Not rstWorkspaceParameters.EOF

        Set cNewParameter = New cParameter

        ' Initialize parameter values
        cNewParameter.ParameterId =
rstWorkspaceParameters.Fields(0)

        ' Call a procedure to raise an error if
mandatory fields are
        ' null.
        cNewParameter.ParameterName = CStr( _
ErrorOnNullField(rstWorkspaceParameters,
"parameter_name"))
        cNewParameter.ParameterValue =
CheckForNullField( _
            rstWorkspaceParameters,
"parameter_value")
        cNewParameter.WorkspaceId = CStr( _
ErrorOnNullField(rstWorkspaceParameters,
FLD_ID_WORKSPACE))
        cNewParameter.ParameterType = CStr( _
ErrorOnNullField(rstWorkspaceParameters,
"parameter_type"))
        cNewParameter.Description =
CheckForNullField( _
            rstWorkspaceParameters,
"description")

        cParamCol.Load cNewParameter

        Set cNewParameter = Nothing
        rstWorkspaceParameters.MoveNext
    Wend

Exit Sub

```

```

LoadRecordsetInParameterArrayErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadRecordsetInParameterArray"
    On Error GoTo 0
    Err.Raise vbObjectError +
errLoadRsInArrayFailed, gstrSource, _
        LoadResString(errLoadRsInArrayFailed)
End Sub

Attribute VB_Name = "Public"
' FILE:    Public.bas
'
'    Microsoft TPC-H Kit Ver. 1.00
'    Copyright Microsoft, 1999
'    All Rights Reserved
'
' PURPOSE:    This module contains all the public
constants for this project
' Contact:    Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

Public Const gsVersion01 As String = "0.1"
Public Const gsVersion10 As String = "1.0"
Public Const gsVersion21 As String = "2.1"
Public Const gsVersion23 As String = "2.3"
Public Const gsVersion24 As String = "2.4"
Public Const gsVersion241 As String = "2.4.1"
Public Const gsVersion242 As String = "2.4.2"
Public Const gsVersion243 As String = "2.4.3"
Public Const gsVersion25 As String = "2.5"
Public Const gsVersion251 As String = "2.5.1"
Public Const gsVersion253 As String = "2.5.3"
Public Const gsVersion254 As String = "2.5.4"
Public Const gsVersion255 As String = "2.5.5"
Public Const gsVersion As String = gsVersion255

' The same form is used for the creation of new
nodes and
' updates to existing nodes (where each node can be
a parameter,
' global step, etc.) A tag is set on each flag is used to
indicate
' whether it is being called in the insert or update
mode. The
' constants for these modes are defined below
Public Const gstrInsertMode = "Insert"
Public Const gstrUpdateMode = "Update"
Public Const gstrPropertiesMode = "View"

Public Const gstrEmptyString = ""
Public Const gstrSQ = ""
Public Const gstrDQ = ""
Public Const gstrVerSeparator = "."
Public Const gstrBlank = " "

' Constants used to indicate type of node being
processed
' The constants for the different objects correspond
to the
' indexes in the menu control arrays (for both the
main and popup
' menus) that are used to create new objects. That
way we can
' use the index passed in by the click event to
determine the
' type of node being processed
Public Const gintWorkspace = 1

' Decided to leave it here after some debate over
whether it
' actually belongs in the cStep class definition
Public Enum gintStepType

```

```

gintGlobalStep = 3
gintManagerStep
gintWorkerStep
End Enum

Public Const gintRunManager = 6
Public Const gintRunWorker = 7

Public Enum gintParameterNodeType
    gintParameter = 8
    gintNodeParamConnection
    gintNodeParamExtension
    gintNodeParamBuiltIn
End Enum

' Leave some constants free for newer types
of parameters (?)
Public Const gintConnectionDtl = 15

Public Enum gintLabelNodeType
    gintGlobalsLabel = 21
    gintParameterLabel
    gintParamConnectionLabel
    gintParamExtensionLabel
    gintParamBuiltInLabel
    gintConnDtlLabel
    gintGlobalStepLabel
    gintStepLabel
End Enum

Public Enum ConnectionType
    ConnTypeStatic = 1
    ConnTypeDynamic
End Enum

Public Const giDefaultConnType As Integer
= ConnTypeStatic

' The constants defined below are used to
identify the different
' tabs. If any more step properties and
thereby tabs are added
' to the tabbed dialog on the Step Properties
form, they should
' be defined here and accessed in the code
only using these
' pre-defined constants
' Note: These constants will mainly be used
by the functions that
' initialize, customize and display the Step
Properties form
Public Const gintDefinition = 0
Public Const gintExecution = 1
Public Const gintMgrDefinition = 2
Public Const gintPreExecutionSteps = 3
Public Const gintPostExecutionSteps = 4
Public Const gintFileLocations = 5

' These constants correspond to the index
values in the imagelist
' associated with the tree view control. The
imagelist contains
' the icons that will be displayed for each
node.
Public Enum TreeImages
    gintImageWorkspaceClosed = 1
    gintImageWorkspaceOpen
    gintImageLabelClosed
    gintImageLabelOpen
    gintImageManagerClosedDis
    gintImageManagerClosedEn
    gintImageManagerOpenDis
    gintImageManagerOpenEn
    gintImageWorkerDis
    gintImageWorkerEn

```

```

gintImageGlobalClosed
gintImageGlobalOpen
gintImageParameter
gintImageRun
gintImagePending
gintImageStop
gintImageDisabled
gintImageAborted
gintImageFailed
End Enum

' Public variable used to indicate the name of
the function
' that raises an error
Public gstrSource As String

' Public instances of the different collections
Public gcParameters As cArrParameters
Public gcSteps As cArrSteps
Public gcConstraints As cArrConstraints
Public gcConnections As cConnections
Public gcConnDtls As cConnDtls

' Public constants for the index values of the
different toolbar
' options. Will be used while dynamically
enabling/disabling
' these options.
Public Const tbNew = 1
Public Const tbOpen = 2
Public Const tbSave = 3

Public Const tbCut = 5
Public Const tbCopy = 6
Public Const tbPaste = 7
Public Const tbDelete = 8

Public Const tbProperties = 10
Public Const tbRun = 11
Public Const tbStop = 12

' The initial version #
Public Const gstrMinVersion As String = "0.0"
Public Const gstrGlobalParallelism As String =
"0"
Public Const gintMinParallelism As Integer =
1
Public Const gintMaxParallelism As Integer =
100

' Constant for the minimum identifier, used for
all identifier, viz.
' step, workspace, etc.
Public Const glMinId As Long = 1
Public Const glInvalidId As Long = -1

' A parameter that has a special meaning to
Stepmaster
' The system time will be substituted wherever
it occurs
' (typically as a part of the error, log ... file
names
Public Const gstrTimeStamp As String =
"TIMESTAMP"
Public Const gstrEnvVarSeparator = "%"
Public Const gstrFileSeparator = "\"
Public Const gstrUnderscore = "_"

' Constants used by date and time formatting
functions
Public Const gsTimeSeparator = ":"
Public Const gsDateSeparator = "-"
Public Const gsMsSeparator = "."
Public Const gsDtFormat = "00"
Public Const gsYearFormat = "0000"

```

```

Public Const gsTmFormat = "00"
Public Const gsMSecondFormat = "000"

' Default nothing value for a date variable
Public Const gdtmEmpty As Currency = 0

Public Const FMT_WSP_LOG_FILE As String =
"yyyymmdd-hhnnss"

Public gsContCriteria() As String
' Note: Update the initialization of
gsExecutionStatus in Initialize() if the
' InstanceStatus values are modified - also the
boundary checks
Public gsExecutionStatus() As String

Public Const gsConnTypeStatic As String =
"Static"
Public Const gsConnTypeDynamic As String =
"Dynamic"

#If RUN_ONLY Then
Public Const gsCaptionRunWsp As String = "Run
Workspace"
#End If

' Valid operations on a cNode object
Public Enum Operation
    QueryOp = 1
    InsertOp = 2
    UpdateOp = 3
    DeleteOp = 4
End Enum

Attribute VB_Name = "RunCommon"
' FILE: RunCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains common functions that are
used during the execution
' of a workspace.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private Const mstrModuleName As String =
".RunCommon."

Public Function GetInstanceItValue(cInstanceRec
As cInstance) As String

    ' Returns the iterator value for the instance, if an
' iterator has been defined for it
    Dim cStepIt As cRunCollt
    Dim cRunIterator As cRunItNode

    On Error GoTo GetInstanceItValueErr

    ' Since we create a dummy instance for Disabled
and Pending steps,
' doesn't make sense to look at their iterators
    If cInstanceRec.Status <> gintDisabled And
cInstanceRec.Status <> gintPending Then
        Set cStepIt = cInstanceRec.Iterators

```



```

    If Not
StringEmpty(cInstanceRec.Step.IteratorName) Then
        If cStepIt.Count > 0 Then
            Set cRunIterator = cStepIt(0)
            BugAssert
cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName, _
            "The first iterator in the
collection is the " & _
            "one that has been defined for
the step."
        If cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName Then
            GetInstanceItValue =
cRunIterator.Value
        Else
            GetInstanceItValue =
gstrEmptyString
        End If
        Else
            GetInstanceItValue =
gstrEmptyString
        End If
        Else
            GetInstanceItValue =
gstrEmptyString
        End If
        Else
            GetInstanceItValue =
gstrEmptyString
        End If
        Else
            GetInstanceItValue = gstrEmptyString
        End If

Exit Function

GetInstanceItValueErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
gstrSource = mstrModuleName &
"GetInstanceItValue"
Err.Raise vbObjectError +
errProgramError, gstrSource, _
LoadResString(errProgramError)

End Function

Attribute VB_Name = "RunInstHelper"
' FILE: RunInstHelper.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains helper
procedures that are called by
' cRunInst.cls
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"RunInstHelper."

' Should be equal to the number of steps
defined in cRunInst.cls
Public Const glngNumConcurrentProcesses
As Long = 99
Public Const gintBitsPerByte = 8

```

```

Public Function AnyStepRunning(cFreeSteps
As cVectorLng, arrFree() As Byte) As Boolean

    Dim lngIndex As Long
    Dim intPosInByte As Integer
    Dim lngTemp As Long

    ' Check if there are any running instances to
wait for
    If cFreeSteps.Count <>
glngNumConcurrentProcesses Then

        ' For every free step, reset the
corresponding element
        ' in the byte array to 0
        For lngIndex = 0 To cFreeSteps.Count - 1

            lngTemp = cFreeSteps(lngIndex) \
gintBitsPerByte
            intPosInByte = cFreeSteps(lngIndex)
Mod gintBitsPerByte

            arrFree(lngTemp) = arrFree(lngTemp)
Xor 2 ^ intPosInByte
            Next lngIndex

            AnyStepRunning = False

        ' Check if we have a non-zero bit in the
byte array
        For lngIndex = LBound(arrFree) To
UBound(arrFree) Step 1
            If arrFree(lngIndex) <> 0 Then
                ' We are waiting for a step to
complete

                AnyStepRunning = True
                Exit For
            End If
            Next lngIndex

        Else
            AnyStepRunning = False
        End If

    End Function

Public Function
OrderConstraints(vntTempCons() As Variant,
_
    intConsType As ConstraintType) As
Variant
    ' Returns a variant containing all the
constraint records in the order
    ' in which they should be executed

    Dim vntTemp As Variant
    Dim lngOuter As Long
    Dim lngInner As Long
    Dim cTempConstraint As cConstraint
    Dim cConstraints() As cConstraint
    Dim lngConsCount As Long
    Dim lngLbound As Long
    Dim lngUbound As Long
    Dim lngStep As Long

    On Error GoTo OrderConstraintsErr

    If intConsType = gintPreStep Then
        ' Since we are travelling up and we need
to execute the constraints
        ' for the top-level steps first, reverse the
order that they
        ' have been stored in the array
        lngLbound = UBound(vntTempCons)

```

```

        lngUbound = LBound(vntTempCons)
        lngStep = -1
    Else
        lngLbound = LBound(vntTempCons)
        lngUbound = UBound(vntTempCons)
        lngStep = 1
    End If

    lngConsCount = 0

    For lngOuter = lngLbound To lngUbound Step
lngStep
        vntTemp = vntTempCons(lngOuter)

        If Not IsEmpty(vntTemp) Then
            ' Each of the elements is an array
            For lngInner = LBound(vntTemp) To
UBound(vntTemp) Step 1
                If Not IsEmpty(vntTemp(lngInner)) Then
                    Set cTempConstraint =
vntTemp(lngInner)

                    If Not cTempConstraint Is Nothing
Then
                        ReDim Preserve
cConstraints(lngConsCount)
                        Set cConstraints(lngConsCount) =
cTempConstraint
                        lngConsCount = lngConsCount + 1
                    End If
                End If
            Next lngInner
        End If
        Next lngOuter

        ' Set the return value of the function to the array
of
        ' constraints that has been built above
        If lngConsCount = 0 Then
            OrderConstraints = Empty
        Else
            OrderConstraints = cConstraints()
        End If

    Exit Function

OrderConstraintsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errExecInstanceFailed, _
mstrModuleName,
LoadResString(errExecInstanceFailed)

End Function
Attribute VB_Name = "ShellSM"
' FILE: ShellSM.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains a function
that creates a process and
' waits for it to complete.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public Function SyncShell(CommandLine As
String, Optional Timeout As Long, _
Optional WaitForInputIdle As Boolean) As
Boolean

```

```

Dim proc As
PROCESS_INFORMATION
Dim Start As STARTUPINFO
Dim ret As Long
Dim nMilliseconds As Long

BugMessage "Executing: " &
CommandLine
If Timeout > 0 Then
nMilliseconds = Timeout
Else
nMilliseconds = INFINITE
End If

'Initialize the STARTUPINFO structure:
Start.cb = Len(Start)
Start.dwFlags =
STARTF_USESHOWWINDOW
Start.wShowWindow =
SW_SHOWMINNOACTIVE

'Start the shelled application:
CreateProcessA 0&, CommandLine, 0&,
0&, 1&, _
NORMAL_PRIORITY_CLASS, 0&,
0&, Start, proc

If WaitForInputIdle Then
'Wait for the shelled application to
finish setting up its UI:
ret = InputIdle(proc.hProcess,
nMilliseconds)
Else
'Wait for the shelled application to
terminate:
ret =
WaitForSingleObject(proc.hProcess,
nMilliseconds)
End If

CloseHandle proc.hProcess

'Return True if the application finished.
Otherwise it timed out or erred.
SyncShell = (ret = WAIT_OBJECT_0)
End Function

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cArrConstraints"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrConstraints.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of
cConstraint objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions
that determine all the
' constraints for a step, all
constraints in a workspace,
' validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

```

```

Option Explicit

Private mcarrConstraints As cNodeCollections

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrConstraints."
Public Sub SaveWspConstraints(ByVal
lngWorkspace As Long)
' Calls a procedure to commit all changes to
the constraints
' in the passed in workspace.

Call mcarrConstraints.Save(lngWorkspace)

End Sub
Public Property Set ConstraintDB(vdata As
Database)

Set mcarrConstraints.NodeDB = vdata

End Property
Public Property Get ConstraintDB() As
Database

Set ConstraintDB =
mcarrConstraints.NodeDB

End Property

Public Sub Modify(cConsToUpdate As
cConstraint)

' Modify the constraint record
Call
mcarrConstraints.Modify(cConsToUpdate)

End Sub
Public Sub
CreateNewConstraintVersion(ByVal lngStepId
As Long, _
ByVal strNewVersion As String, _
ByVal strOldVersion As String, _
ByVal intStepType As Integer)

' Does all the processing needed to create
new versions of
' all the constraints for a given step
' It inserts new constraint records in the
database with
' the new version numbers on them
' It also updates the version number on all
constraints
' for the step in the array to the new version
passed in
' Since it handles both global and
manager/worker steps,
' it checks for the step_id or global_step_id
fields,
' depending on the type of step

Dim lngIndex As Long
Dim cUpdateConstraint As cConstraint

On Error GoTo
CreateNewConstraintVersionErr
mstrSource = mstrModuleName &
"CreateNewConstraintVersion"

' Update the version/global version on
Constraint with the
' passed in step/global step id

```

```

For lngIndex = 0 To mcarrConstraints.Count - 1
Set cUpdateConstraint =
mcarrConstraints(lngIndex)
If intStepType = gintGlobalStep Then
If cUpdateConstraint.GlobalStepId =
lngStepId And _
cUpdateConstraint.IndOperation <>
DeleteOp Then
cUpdateConstraint.GlobalVersionNo =
strNewVersion

' Set the operation to indicate an insert
cUpdateConstraint.IndOperation =

InsertOp
End If
Else
If cUpdateConstraint.StepId = lngStepId
And _
cUpdateConstraint.IndOperation <>
DeleteOp Then
cUpdateConstraint.VersionNo =
strNewVersion

' Set the operation to indicate an insert
cUpdateConstraint.IndOperation =

InsertOp
End If
End If
Next lngIndex

Exit Sub

CreateNewConstraintVersionErr:
LogErrors Errors
gstrSource = mstrModuleName &
"CreateNewConstraintVersion"
On Error GoTo 0
Err.Raise vbObjectError +
errCreateNewConstraintVersionFailed, _
mstrSource, _

LoadResString(errCreateNewConstraintVersionFail
ed)

End Sub
Private Sub Class_Initialize()

Set mcarrConstraints = New cNodeCollections
BugMessage "cArrConstraints: Initialize event -
setting Constraint count to 0"

End Sub

Private Sub Class_Terminate()

Set mcarrConstraints = Nothing
BugMessage "cArrConstraints: Terminate event
triggered"

End Sub

Public Sub Add(ByVal cConstraintToAdd As
cConstraint)

Set cConstraintToAdd.NodeDB =
mcarrConstraints.NodeDB

' Retrieve a unique constraint identifier
cConstraintToAdd.ConstraintId =
cConstraintToAdd.NextIdentifier

' Call a procedure to load the constraint record in
the array
Call mcarrConstraints.Add(cConstraintToAdd)

```

```

End Sub
Public Sub Delete(ByVal cOldConstraint As cConstraint)

    Dim lngDeleteElement As Long
    Dim cConsToDelete As cConstraint

    lngDeleteElement =
QueryConstraintIndex(cOldConstraint.ConstraintId)
    Set cConsToDelete =
mcarrConstraints(lngDeleteElement)

    Call
mcarrConstraints.Delete(cConsToDelete.Position)

    Set cConsToDelete = Nothing

End Sub
Private Function
QueryConstraintIndex(lngConstraintId As Long) _
    As Long

    Dim lngIndex As Integer

    ' Find the element in the array to be
deleted
    For lngIndex = 0 To
mcarrConstraints.Count - 1

        ' Note: The constraint id is not a
primary key field in
        ' the database - there can be multiple
records with the
        ' same constraint_id but for different
versions of a step
        ' However, since we'll always load the
constraint information
        ' for the latest version of a step, we'll
have just one
        ' constraint record with a given
constraint_id
        If
mcarrConstraints(lngIndex).ConstraintId =
lngConstraintId Then
            QueryConstraintIndex = lngIndex
            Exit Function
        End If

    Next lngIndex

    ' Raise error that Constraint has not been
found
    ShowError errConstraintNotFound
    On Error GoTo 0
    Err.Raise vbObjectError +
errConstraintNotFound, mstrSource, _
LoadResString(errConstraintNotFound)

End Function

Public Function QueryConstraint(ByVal
lngConstraintId As Long) _
    As cConstraint

    ' Returns a cConstraint object with the
property values
    ' corresponding to the Constraint
Identifier, lngConstraintId

    Dim lngQueryElement As Long

```

```

    lngQueryElement =
QueryConstraintIndex(lngConstraintId)

    ' Set the return value to the queried
Constraint
    Set QueryConstraint =
mcarrConstraints(lngQueryElement)

End Function

Public Sub LoadConstraints(ByVal
lngWorkspaceId As Long, rstStepsInWsp As
Recordset)

    ' Loads the constraints array with all the
constraints
    ' for the workspace
    Dim recConstraints As Recordset
    Dim qryCons As DAO.QueryDef
    Dim strSql As String
    Dim dtStart As Date

    On Error GoTo LoadConstraintsErr
    mstrSource = mstrModuleName &
"LoadConstraints"

    If rstStepsInWsp.RecordCount = 0 Then
        Exit Sub
    End If

    ' First check if the database object has been
set
    If mcarrConstraints.NodeDB Is Nothing
Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errSetDBBeforeLoad, _
mstrSource, _

LoadResString(errSetDBBeforeLoad)
    End If

    dtStart = Now

    ' Select based on the global step id since
there might
    ' be constraints for a global step that run are
executed
    ' for the workspace
    ' This method has the advantage that if the
steps are queried right, everything else follows
    strSql = "Select a.constraint_id, a.step_id,
a.version_no, " & _
        " a.constraint_type, a.global_step_id,
a.global_version_no, " & _
        " a.sequence_no, b.workspace_id " & _
        " from step_constraints a, att_steps b " & _
        " where a.global_step_id = b.step_id " & _
        " and a.global_version_no = b.version_no
" & _
        " and a.global_step_id = [g_s_id] " & _
        " and a.global_version_no = [g_ver_no] "
    & _
        " and b.archived_flag = [archived] "

    ' Find the highest X-component of the
version number
    strSql = strSql & " AND ( a.step_id = 0 or (
cint( mid( a.version_no, 1, instr( a.version_no,
" & gstrDQ & gstrVerSeparator & gstrDQ & "
) - 1 ) ) = " & _

```

```

" ( select max( cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS d " & _
    " WHERE a.step_id = d.step_id " & _
    " and d.archived_flag = [archived] ) "

    ' Find the highest Y-component of the version
number for the highest X-component
    strSql = strSql & " AND cint( mid( a.version_no,
instr( a.version_no, " & gstrDQ & gstrVerSeparator
& gstrDQ & " ) + 1 ) ) = " & _
    " ( select max( cint( mid( version_no, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) + 1 ) ) ) " & _
    " from att_steps AS y " & _
    " Where a.step_id = y.step_id " & _
    " AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) = " & _
    " ( select max( cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS c " & _
    " WHERE y.step_id = c.step_id " & _
    " and c.archived_flag = [archived] ) ) ) "

    ' Order the constraints by sequence within a given
step
    strSql = strSql & " order by a.sequence_no "

    Set qryCons =
mcarrConstraints.NodeDB.CreateQueryDef(gstrEm
ptyString, strSql)
    qryCons.Parameters("archived").Value = False

    rstStepsInWsp.MoveFirst

    While Not rstStepsInWsp.EOF

        If Not (rstStepsInWsp!global_flag) Then
            qryCons.Close
            BugMessage "Query constraints Read +
load took: " & CStr(DateDiff("s", dtStart, Now))
            Exit Sub
        End If

        qryCons.Parameters("g_s_id").Value =
rstStepsInWsp!step_id
        qryCons.Parameters("g_ver_no").Value =
rstStepsInWsp!version_no

        Set recConstraints =
qryCons.OpenRecordset(dbOpenSnapshot)

        Call
LoadRecordsetInConstraintArray(recConstraints)
        recConstraints.Close

        rstStepsInWsp.MoveNext
    Wend

    qryCons.Close
    BugMessage "Query constraints Read + load
took: " & CStr(DateDiff("s", dtStart, Now))

    Exit Sub

LoadConstraintsErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadConstraints"
    On Error GoTo 0
    Err.Raise vbObjectError + errLoadDataFailed, _
mstrSource, _

```

```

LoadResString(errLoadDataFailed)

End Sub
Public Sub UnloadStepConstraints(ByVal lngStepId As Long)

    ' Unloads all the constraints for the workspace from
    ' the constraints array

    Dim lngIndex As Long

    ' Find all constraints in the array with a matching step id
    ' It is important to step in reverse order through the array,
    ' since we delete constraint records!
    For lngIndex = mcarrConstraints.Count - 1 To 0 Step -1
        If mcarrConstraints(lngIndex).GlobalStepId = lngStepId Then

            ' Unload the constraint from the array
            Call mcarrConstraints.Unload(lngIndex)

        End If
    Next lngIndex

End Sub
Public Sub UnloadConstraint(cOldConstraint As cConstraint)
    ' Unloads the constraint from the constraints array

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryConstraintIndex(cOldConstraint.ConstraintId)

    Call mcarrConstraints.Unload(lngDeleteElement)

End Sub
Private Sub LoadRecordsetInConstraintArray(ByVal recConstraints As Recordset)
    ' Loads all the constraint records in the passed in
    ' recordset into the array

    Dim cNewConstraint As cConstraint

    On Error GoTo LoadRecordsetInConsArrayErr
    LoadRecordsetInConsArrayErr
    mstrSource = mstrModuleName & "LoadRecordsetInConstraintArray"

    If recConstraints.RecordCount = 0 Then
        Exit Sub
    End If

    recConstraints.MoveFirst
    While Not recConstraints.EOF
        Set cNewConstraint = New cConstraint

        ' Initialize Constraint values
        cNewConstraint.ConstraintId = CLng(ErrorOnNullField(recConstraints, "Constraint_id"))

```

```

        cNewConstraint.StepId = CLng(ErrorOnNullField(recConstraints, "step_id"))
        cNewConstraint.VersionNo = CStr(ErrorOnNullField(recConstraints, "version_no"))

        cNewConstraint.GlobalStepId = CLng(ErrorOnNullField(recConstraints, "global_step_id"))
        cNewConstraint.GlobalVersionNo = CStr(ErrorOnNullField(recConstraints, "global_version_no"))
        cNewConstraint.SequenceNo = CInt(ErrorOnNullField(recConstraints, "sequence_no"))

        cNewConstraint.WorkspaceId = CLng(ErrorOnNullField(recConstraints, FLD_ID_WORKSPACE))
        cNewConstraint.ConstraintType = CInt(ErrorOnNullField(recConstraints, "constraint_type"))

        ' Add this record to the array of Constraints
        mcarrConstraints.Load cNewConstraint

        Set cNewConstraint = Nothing
        recConstraints.MoveNext
    Wend

Exit Sub

LoadRecordsetInConsArrayErr:
LogErrors Errors
gstrSource = mstrModuleName & "LoadRecordsetInConstraintArray"
On Error GoTo 0
Err.Raise vbObjectError + errLoadRsInArrayFailed, _ mstrSource, _

LoadResString(errLoadRsInArrayFailed)

End Sub

Public Function ConstraintsForStep(_ ByVal lngStepId As Long, _ ByVal strVersionNo As String, _ Optional ByVal intConstraintType As ConstraintType = 0, _ Optional ByVal blnSort As Boolean = True, _ Optional ByVal blnGlobal As Boolean = False, _ Optional ByVal blnGlobalConstraintsOnly As Boolean = False) As Variant

    ' Returns a variant containing an array of cConstraint objects,
    ' containing all the constraints that have been defined for the
    ' given step. If the Global flag is set to true, the
    ' search will be made for all the constraints that have
    ' a matching global_step_id

    Dim lngIndex As Long
    Dim cStepConstraint() As cConstraint
    Dim lngConstraintCount As Long
    Dim cTempConstraint As cConstraint

```

```

    On Error GoTo ConstraintsForStepErr
    mstrSource = mstrModuleName & "ConstraintsForStep"

    lngConstraintCount = 0

    ' Find each element in the constraints array
    For lngIndex = 0 To mcarrConstraints.Count - 1
        ' If a constraint type has been specified then check
        ' if the constraint type for the record matches the
        ' passed in type
        Set cTempConstraint = mcarrConstraints(lngIndex)
        If Not blnGlobal Then
            If cTempConstraint.StepId = lngStepId And _
                cTempConstraint.VersionNo = strVersionNo And _
                cTempConstraint.IndOperation <> DeleteOp And _
                (intConstraintType = 0 Or _ cTempConstraint.ConstraintType = intConstraintType) Then
            ' We have a matching constraint for the given step
            AddArrayElement cStepConstraint, _ cTempConstraint, lngConstraintCount
        End If
        Else
            If cTempConstraint.GlobalStepId = lngStepId And _
                cTempConstraint.GlobalVersionNo = strVersionNo And _
                cTempConstraint.IndOperation <> DeleteOp Then
                If blnGlobalConstraintsOnly = False Or _
                    (blnGlobalConstraintsOnly And _ cTempConstraint.StepId = 0 And _ cTempConstraint.VersionNo = gstrMinVersion) Then
                    ' We have a matching constraint for the global step
                    AddArrayElement cStepConstraint, _ cTempConstraint, lngConstraintCount
                End If
            End If
        End If

    Next lngIndex

    ' Set the return value of the function to the array of
    ' constraints that has been built above
    If lngConstraintCount = 0 Then
        ConstraintsForStep = Empty
    Else
        ConstraintsForStep = cStepConstraint()
    End If

    ' Sort the constraints
    If blnSort Then
        Call QuickSort(ConstraintsForStep)
    End If

Exit Function

ConstraintsForStepErr:
LogErrors Errors
On Error GoTo 0

```

```

Err.Raise vbObjectError +
errConstraintsForStepFailed, _
    mstrSource, _

LoadResString(errConstraintsForStepFailed)

End Function
Private Sub AddArrayElement(ByRef
arrNodes() As cConstraint, _
    ByVal objToAdd As cConstraint, _
    ByRef lngCount As Long)
' Adds the passed in object to the array

' Increase the array dimension and add the
object to it
ReDim Preserve arrNodes(lngCount)
Set arrNodes(lngCount) = objToAdd
lngCount = lngCount + 1

End Sub

Public Function ConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal intConstraintType As
Integer = 0, _
    Optional ByVal blnSort As Boolean =
True, _
    Optional ByVal
blnGlobalConstraintsOnly As Boolean =
False) _
    As Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the constraints that have
been defined for the
' given workspace.

Dim lngIndex As Long
Dim cWspConstraint() As cConstraint
Dim lngConstraintCount As Long
Dim cTempConstraint As cConstraint

On Error GoTo ConstraintsForWspErr
mstrSource = mstrModuleName &
"ConstraintsForWsp"

lngConstraintCount = 0

' Find each element in the constraints
array
For lngIndex = 0 To
mcarrConstraints.Count - 1
' If a constraint type has been specified
then check
' if the constraint type for the record
matches the
' passed in type
Set cTempConstraint =
mcarrConstraints(lngIndex)
If cTempConstraint.WorkspaceId =
lngWorkspaceId And _
    cTempConstraint.IndOperation <>
DeleteOp And _
    (intConstraintType = 0 Or _
        cTempConstraint.ConstraintType
= intConstraintType) Then

    If blnGlobalConstraintsOnly = False
Or _
        (blnGlobalConstraintsOnly And
_
            cTempConstraint.StepId = 0
And _

```

```

cTempConstraint.VersionNo =
gstrMinVersion) Then

' We have a matching constraint for
the workspace
AddArrayElement cWspConstraint,
_
    cTempConstraint,
lngConstraintCount
End If
End If
Next lngIndex

' Set the return value of the function to the
array of
' constraints that has been built above
If lngConstraintCount = 0 Then
    ConstraintsForWsp = Empty
Else
    ConstraintsForWsp = cWspConstraint()
End If

' Sort the constraints
If blnSort Then
    Call QuickSort(ConstraintsForWsp)
End If

Exit Function

ConstraintsForWspErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errConstraintsForWspFailed, _
    mstrSource, _

LoadResString(errConstraintsForWspFailed)

End Function
Public Function PreConstraintsForStep( _
    ByVal lngStepId As Long, _
    ByVal strVersionNo As String, _
    Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the pre-execution constraints
that have
' been defined for the given step_id and
version

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PreConstraintsForStep =
ConstraintsForStep(lngStepId, _
    strVersionNo, gintPreStep, blnSort)

End Function
Public Function PostConstraintsForStep( _
    ByVal lngStepId As Long, _
    ByVal strVersionNo As String, _
    Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Post-execution
constraints that have
' been defined for the given step_id and
version

' Call a function that will return a variant
containing

```

```

' all the constraints of the passed in type
PostConstraintsForStep =
ConstraintsForStep(lngStepId, _
    strVersionNo, gintPostStep, blnSort)

End Function
Public Function PostConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Post-execution globals that
have
' been defined for the workspace

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PostConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
    gintPostStep, blnSort, True)

End Function
Public Function PreConstraintsForWsp( _
    ByVal lngWorkspaceId As Long, _
    Optional ByVal blnSort As Boolean) As
Variant

' Returns a variant containing an array of
cConstraint objects,
' containing all the Pre-execution globals that
have
' been defined for the workspace

' Call a function that will return a variant
containing
' all the constraints of the passed in type
PreConstraintsForWsp =
ConstraintsForWsp(lngWorkspaceId, _
    gintPreStep, blnSort, True)

End Function
Public Property Get ConstraintCount() As Long

    ConstraintCount = mcarrConstraints.Count

End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cArrParameters"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cArrParameters.cls
'
'    Microsoft TPC-H Kit Ver. 1.00
'    Copyright Microsoft, 1999
'    All Rights Reserved
'
'
' PURPOSE:  Implements an array of cParameter
objects.
'
'    Type-safe wrapper around
cNodeCollections.
'
'    Also contains additional functions to
determine parameter
'
'    values, validation functions, etc.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'

```

Option Explicit	Call Validate(cParamToAdd)	End If
Private mcarrParameters As cNodeCollections	' Retrieve a unique parameter identifier cParamToAdd.ParameterId = cParamToAdd.NextIdentifier	Exit Function
' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cArrParameters."	Call mcarrParameters.Add(cParamToAdd)	GetParameterValueErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "GetParameterValue" On Error GoTo 0 Err.Raise vbObjectError + errGetParamValueFailed, _ gstrSource, _ LoadResString(errGetParamValueFailed)
Public Sub InitBuiltInsForRun(lWspId As Long, lRunId As Long)	End Sub	End Function
Dim cParamRec As cParameter	Public Sub Unload(lngParamToDelete As Long)	Public Sub Delete(lngParamToDelete As Long) ' Delete the passed in parameter
' Initialize the values of the run_id and output_dir built-in parameters and save them ' to the database Set cParamRec = GetParameterValue(lWspId, PARAM_RUN_ID) cParamRec.ParameterValue = CStr(lRunId) Call Modify(cParamRec)	Dim lngDeleteElement As Long	Dim lngDeleteElement As Long
Set cParamRec = GetParameterValue(lWspId, PARAM_OUTPUT_DIR) cParamRec.ParameterValue = GetDefaultDir(lWspId, Me) cParamRec.ParameterValue = cParamRec.ParameterValue & gstrFileSeparator & CStr(lRunId) Call Modify(cParamRec)	lngDeleteElement = QueryIndex(lngParamToDelete)	lngDeleteElement = QueryIndex(lngParamToDelete) Call mcarrParameters.Delete(lngDeleteElement)
Call SaveParametersInWsp(lWspId)	Call mcarrParameters.Unload(lngDeleteElement)	End Sub
End Sub	End Sub	Private Function QueryIndex(lngParameterId As Long) As Long
Public Property Set ParamDatabase(vdata As Database)	Public Sub SaveParametersInWsp(ByVal lngWorkspace As Long) ' Calls a procedure to commit all changes to the parameters ' for the passed in workspace.	Dim lngIndex As Long
Set mcarrParameters.NodeDB = vdata	' Call a procedure to save all parameter records for the ' workspace Call mcarrParameters.Save(lngWorkspace)	' Find the matching parameter record in the array For lngIndex = 0 To mcarrParameters.Count - 1 If mcarrParameters(lngIndex).ParameterId = lngParameterId And _ mcarrParameters(lngIndex).IndOperation <> DeleteOp Then QueryIndex = lngIndex Exit Function End If Next lngIndex
End Property	End Sub	' Raise error that parameter has not been found On Error GoTo 0 Err.Raise vbObjectError + errParamNotFound, "cArrParameters.QueryIndex", _ LoadResString(errParamNotFound)
Public Sub Modify(cModifiedParam As cParameter)	Public Function GetParameterValue(ByVal lngWorkspace As Long, _ ByVal strParamName As String) As cParameter ' Returns the value for the passed in workspace parameter	End Function
' First check if the parameter record is valid Call CheckDupParamName(cModifiedParam)	Dim cParamRec As cParameter Dim lngIndex As Long	Public Function QueryParameter(lngParameterId As Long) _ As cParameter
Call mcarrParameters.Modify(cModifiedParam)	On Error GoTo GetParameterValueErr	Dim lngQueryElement As Long
End Sub	' Find all parameters in the array with a matching workspace id For lngIndex = 0 To mcarrParameters.Count - 1 Set cParamRec = mcarrParameters(lngIndex) If cParamRec.WorkspaceId = lngWorkspace And _ cParamRec.ParameterName = strParamName Then	lngQueryElement = QueryIndex(lngParameterId)
Public Sub Load(ByRef cParamToAdd As cParameter)	Set GetParameterValue = cParamRec Exit For End If Next lngIndex	' Return the queried parameter object Set QueryParameter = mcarrParameters(lngQueryElement)
Call mcarrParameters.Load(cParamToAdd)	If lngIndex > mcarrParameters.Count - 1 Then ' The parameter has not been defined for the workspace ' Raise an error On Error GoTo 0 Err.Raise vbObjectError + errParamNameInvalid, _ mstrModuleName & "GetParameterValue", _ LoadResString(errParamNameInvalid)	End Function
End Sub		Public Property Get ParameterCount() As Long
Public Sub Add(ByRef cParamToAdd As cParameter)		ParameterCount = mcarrParameters.Count
Set cParamToAdd.NodeDB = mcarrParameters.NodeDB		End Property
' First check if the parameter record is valid		Public Property Get Item(lngIndex As Long) As cParameter Attribute Item.VB_UserMemId = 0 Set Item = mcarrParameters(lngIndex)
		End Property

```

Public Sub Validate(ByVal
cParamToValidate As cParameter)
' This procedure is necessary since the
class cannot validate
' all the parameter properties on it's own.
This is 'coz we
' might have created new parameters in
the workspace, but not
' saved them to the database yet - hence
the duplicate check
' has to be repeated in the array

Dim lngIndex As Long
Dim cTempParam As cParameter

On Error GoTo ValidateErr

' Check if the parameter name already
exists in the workspace
For lngIndex = 0 To
mcarrParameters.Count - 1
Set cTempParam =
mcarrParameters(lngIndex)
If cTempParam.WorkspaceId =
cParamToValidate.WorkspaceId And _
cTempParam.ParameterName =
cParamToValidate.ParameterName And _
cTempParam.IndOperation <>
DeleteOp Then
On Error GoTo 0
Err.Raise vbObjectError +
errDuplicateParameterName, _
mstrSource,
LoadResString(errDuplicateParameterName
)
End If
Next lngIndex

Exit Sub

ValidateErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Validate"
On Error GoTo 0
Err.Raise vbObjectError +
errValidateFailed, _
mstrSource,
LoadResString(errValidateFailed)

End Sub
Public Sub CheckDupParamName(ByVal
cParamToValidate As cParameter)

Dim lngIndex As Long
Dim cTempParam As cParameter

' Check if the parameter name already
exists in the workspace
For lngIndex = 0 To
mcarrParameters.Count - 1
Set cTempParam =
mcarrParameters(lngIndex)
If cTempParam.WorkspaceId =
cParamToValidate.WorkspaceId And _
cTempParam.ParameterName =
cParamToValidate.ParameterName And _
cTempParam.ParameterId <>
cParamToValidate.ParameterId And _
cTempParam.IndOperation <>
DeleteOp Then
ShowError
errDuplicateParameterName
On Error GoTo 0

```

```

Err.Raise vbObjectError +
errDuplicateParameterName, _
mstrSource,
LoadResString(errDuplicateParameterName)
End If
Next lngIndex

End Sub

Private Sub Class_Initialize()

'bugmessage "cArrParameters: Initialize
event - setting parameter count to 0"
Set mcarrParameters = New
cNodeCollections

End Sub

Private Sub Class_Terminate()

Set mcarrParameters = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cArrSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cArrSteps.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Implements an array of cStep
objects.
' Type-safe wrapper around
cNodeCollections.
' Also contains additional functions to
update parent version
' on substeps, validation functions, etc.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrSteps As cNodeCollections

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cArrSteps."

Public Sub Unload(lngStepToDelete As Long)

Dim lngDeleteElement As Long
Dim cUnloadStep As cStep

lngDeleteElement =
QueryStepIndex(lngStepToDelete)
Set cUnloadStep =
QueryStep(lngStepToDelete)

' First unload all iterators for the step
Call cUnloadStep.UnloadIterators

' Unload the step from the collection
Call mcarrSteps.Unload(lngDeleteElement)

```

```

End Sub
Public Sub Modify(cModifiedStep As cStep)

Dim iAppend As Integer
Dim sLabel As String

On Error GoTo ModifyErr

iAppend = 0
sLabel = cModifiedStep.StepLabel

Validate cModifiedStep

Call mcarrSteps.Modify(cModifiedStep)

Exit Sub

ModifyErr:
' If the error raised by the add function is due to a
duplication
' of the step label, then try to generate a unique
label
If Err.Number - vbObjectError =
errStepLabelUnique Then
iAppend = iAppend + 1
cModifiedStep.StepLabel = sLabel &
CStr(iAppend)
' Try to insert the step record again
Resume
End If

' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errModifyStepFailed,
-
gstrSource, _
LoadResString(errModifyStepFailed)

End Sub
Public Sub UpdateParentVersion(ByVal lngStepId
As Long, _
ByVal strNewVersion As String, _
ByVal strOldVersion As String, _
ByVal intStepType As Integer)

' Does all the processing needed to update the
parent version
' number on all the sub-steps for a given step
' It updates the parent version no in the database
for all
' sub-steps of the passed in step id
' It also updates the parent version number on all
sub-steps
' in the array to the new version passed in

Dim lngIndex As Long
Dim cUpdateStep As cStep

On Error GoTo UpdateParentVersionErr

If intStepType <> gintManagerStep Then
' Only a manager can have sub-steps - if the
passed
' in step is not a manager, exit
Exit Sub
End If

' For all steps in the array
For lngIndex = 0 To mcarrSteps.Count - 1

Set cUpdateStep = mcarrSteps(lngIndex)

```

```

' If the current step is a sub-step of the
passed in step
If cUpdateStep.ParentStepId =
lngStepId And _
    cUpdateStep.ParentVersionNo =
strOldVersion And _
    Not cUpdateStep.ArchivedFlag
Then

    ' Update the parent version number
for the sub-step
    ' in the array
    cUpdateStep.ParentVersionNo =
strNewVersion

    ' Update the parent version number
for the sub-step
    ' in the array
    Call Modify(cUpdateStep)

End If
Next lngIndex

Exit Sub

UpdateParentVersionErr:
LogErrors Errors
mstrSource = mstrModuleName &
"UpdateParentVersion"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateParentVersionFailed, _
    mstrSource, _

LoadResString(errUpdateParentVersionFail
ed)

End Sub
Private Sub Validate(cCheckStep As cStep)

    ' Step validations that depend on other
steps in the collection

    Dim lngIndex As Long

    ' Ensure that the step label is unique in the
workspace
    For lngIndex = 0 To mcarrSteps.Count - 1

        ' If the current step is a sub-step of the
passed in step
        If mcarrSteps(lngIndex).WorkspaceId
= cCheckStep.WorkspaceId And _
            mcarrSteps(lngIndex).StepLabel =
cCheckStep.StepLabel And _
            mcarrSteps(lngIndex).StepId <>
cCheckStep.StepId And _

mcarrSteps(lngIndex).IndOperation <>
DeleteOp Then
            On Error GoTo 0
            Err.Raise vbObjectError +
errStepLabelUnique, _
                mstrModuleName &
"Validate", _

LoadResString(errStepLabelUnique)
End If
Next lngIndex

End Sub

Public Sub ValidateStep(cCheckStep As
cStep)

```

```

On Error GoTo ValidateStepErr

'Public wrapper for Validate function (2
many Validates)
Call Validate(cCheckStep)

Exit Sub

ValidateStepErr:
ShowError errStepLabelUnique
On Error GoTo 0
Err.Raise vbObjectError +
errValidateFailed, _
    gstrSource, _
    LoadResString(errValidateFailed)
End Sub

Private Sub Class_Initialize()

    BugMessage "cArrSteps: Initialize event -
setting step count to 0"
    Set mcarrSteps = New cNodeCollections

End Sub

Private Sub Class_Terminate()

    BugMessage "cArrSteps: Terminate event
triggered"
    Set mcarrSteps = Nothing

End Sub

Public Sub Add(ByVal cStepToAdd As cStep)

    Dim iAppend As Integer
    Dim sLabel As String

    On Error GoTo AddErr

    iAppend = 0
    sLabel = cStepToAdd.StepLabel

    Set cStepToAdd.NodeDB =
mcarrSteps.NodeDB

    ' Retrieve a unique step identifier
    cStepToAdd.StepId =
cStepToAdd.NextStepId

    Validate cStepToAdd

    ' Call a procedure to add the step record
    Call mcarrSteps.Add(cStepToAdd)

    ' Call a procedure to add all iterators for the
step
    cStepToAdd.AddAllIterators

    Exit Sub

AddErr:
' If the error raised by the add function is due
to a duplication
' of the step label, then try to generate a
unique label
If Err.Number - vbObjectError =
errStepLabelUnique Then
    iAppend = iAppend + 1
    cStepToAdd.StepLabel = sLabel &
CStr(iAppend)
    ' Try to insert the step record again
    Resume
End If

```

```

' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errInsertStepFailed, _
    gstrSource, _
    LoadResString(errInsertStepFailed)

End Sub

Public Sub Load(cStepToLoad As cStep)

    Call mcarrSteps.Load(cStepToLoad)

End Sub

Public Sub SaveStepsInWsp(ByVal lngWorkspace
As Long)
    ' Calls a procedure to commit all changes to the
steps
    ' in the passed in workspace.

    Dim lngIndex As Integer

    ' Find all steps in the array with a matching
workspace id
    ' It is important to step in reverse order through
the array,
    ' since we delete step records sometimes!
    For lngIndex = mcarrSteps.Count - 1 To 0 Step -
1
        If mcarrSteps(lngIndex).WorkspaceId =
lngWorkspace Then

            ' Call a procedure to commit all changes to
the
            ' Step record, if any
            Call CommitStep(mcarrSteps(lngIndex),
lngIndex)

        End If
    Next lngIndex

End Sub

Private Sub CommitStep(ByVal cCommitStep As
cStep, _
    ByVal intIndex As Integer)
    ' This procedure checks if any changes have been
made to the
    ' passed in Step. If so, it calls the step methods to
commit
    ' the changes.

    ' First commit all changes to the iterator records
for
    ' the step
    cCommitStep.SaveIterators

    Call mcarrSteps.Commit(cCommitStep, intIndex)

End Sub

Public Sub Delete(lngStepToDelete As Long)

    Dim lngDeleteElement As Long

    lngDeleteElement =
QueryStepIndex(lngStepToDelete)
    Call mcarrSteps.Delete(lngDeleteElement)

End Sub

Public Function QueryStepIndex(lngStepId As
Long) As Long

    Dim lngIndex As Long

    ' Find the element in the array that corresponds to
the

```



```

' passed in step id - note that while there
will be multiple
' versions of a step in the database, only
one version will
' be currently loaded in the array -
meaning that the stepid
' is enough to uniquely identify a step
For lngIndex = 0 To mcarrSteps.Count - 1
    If mcarrSteps(lngIndex).StepId =
lngStepId Then
        QueryStepIndex = lngIndex
        Exit Function
    End If
Next lngIndex

' Raise error that step has not been found
On Error GoTo 0
Err.Raise vbObjectError +
errStepNotFound, mstrSource, _
    LoadResString(errStepNotFound)

End Function

Public Function QueryStep(ByVal lngStepId
As Long) As cStep

    ' Populates the passed in cStep object with
the property
    ' values corresponding to the Step
Identifier, lngStepId

    Dim lngQueryElement As Integer

    lngQueryElement =
QueryStepIndex(lngStepId)

    ' Initialize the passed in step object to the
queried step
    Set QueryStep =
mcarrSteps(lngQueryElement)

End Function
Public Property Get Item(ByVal Position As
Long) As cStep
Attribute Item.VB_UserMemId = 0

    ' Returns the element at the passed in
position in the array
    If Position >= 0 And Position <
mcarrSteps.Count Then
        Set Item = mcarrSteps(Position)
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _

LoadResString(errItemDoesNotExist)
    End If

End Property
Public Property Set Item(ByVal Position As
Long, _
    ByVal cStepRec As cStep)

    ' Returns the element at the passed in
position in the array
    If Position >= 0 And Position <
mcarrSteps.Count Then
        Set mcarrSteps(Position) = cStepRec
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _

LoadResString(errItemDoesNotExist)

```

```

End If

End Property
Public Property Set StepDB(vdata As
Database)

    Set mcarrSteps.NodeDB = vdata

End Property
Public Function SubSteps(ByVal lngStepId As
Long, _
    ByVal strVersionNo As String) As
Variant

    ' Returns a variant containing an array of all
the substeps
    ' for the passed in step

    Dim intIndex As Integer
    Dim cSubSteps() As cStep
    Dim lngStepCount As Long
    Dim cQueryStep As cStep

    On Error GoTo SubStepsErr

    lngStepCount = 0

    Set cQueryStep = QueryStep(lngStepId)

    ' Only a manager can have sub-steps
    If cQueryStep.StepType = gintManagerStep
Then

        ' For each element in the Steps array
        For intIndex = 0 To mcarrSteps.Count - 1
            ' Check if the parent step id and parent
version number
            ' match the passed in step
            If mcarrSteps(intIndex).ParentStepId =
lngStepId And _

mcarrSteps(intIndex).ParentVersionNo =
strVersionNo And _

mcarrSteps(intIndex).IndOperation <>
DeleteOp Then

                ' Increase the array dimension and
add the step
                ' to it
                ReDim Preserve
cSubSteps(lngStepCount)
                Set cSubSteps(lngStepCount) =
mcarrSteps(intIndex)
                lngStepCount = lngStepCount + 1

            End If
        Next intIndex

    End If

    ' Set the return value of the function to the
array of
    ' Steps that has been built above
    If lngStepCount = 0 Then
        SubSteps = Empty
    Else
        SubSteps = cSubSteps()
    End If

    Exit Function

SubStepsErr:
    LogErrors Errors

```

```

mstrSource = mstrModuleName & "SubSteps"
On Error GoTo 0
Err.Raise vbObjectError + errSubStepsFailed, _
mstrSource, _
    LoadResString(errSubStepsFailed)

End Function

Public Property Get StepCount() As Integer

    StepCount = mcarrSteps.Count

End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cAsyncShell"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
'-----
' Copyright © 1997 Microsoft Corporation. All
rights reserved.
'
' You have a royalty-free right to use, modify,
reproduce and distribute the
' Sample Application Files (and/or any modified
version) in any way you find
' useful, provided that you agree that Microsoft has
no warranty, obligations or
' liability for any Sample Application Files.
'-----

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cAsyncShell."

Public Event Terminated()

Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Private proc As PROCESS_INFORMATION
Private mfShelling As Boolean

'-----
'Initialization and cleanup:

Private Sub Class_Initialize()
    Set moTimer = New cTimerSM
End Sub

Private Sub Class_Terminate()
    If mfShelling Then CloseHandle proc.hProcess
End Sub

'-----
'Shelling:

Public Sub Shell(CommandLine As String,
Optional PollingInterval As Long = 1000)
    Dim Start As STARTUPINFO

```

```

If mfShelling Then
    On Error GoTo 0
    Err.Raise vbObjectError +
errInstanceInUse, _
        mstrSource, _
        LoadResString(errInstanceInUse)
End If
mfShelling = True

' Initialize the STARTUPINFO structure:
Start.cb = Len(Start)
Start.dwFlags =
STARTF_USESHOWWINDOW
Start.wShowWindow =
SW_SHOWMINNOACTIVE

' Start the shelled application:
CreateProcessA 0&, CommandLine, 0&,
0&, 1&, _
    NORMAL_PRIORITY_CLASS, 0&,
0&, Start, proc

With moTimer
    If PollingInterval > 0 Then
        .Interval = PollingInterval
    Else
        .Interval = 1000
    End If
    .Enabled = True
End With
End Sub
'-----
'Aborting:
Public Sub Abort()
    Dim nCode As Long
    Dim X As Integer
    Dim ReturnVal As Integer

    On Error GoTo AbortErr

    If Not mfShelling Then
        Call WriteError(errProgramError,
mstrSource)
    Else
        If IsWindow(proc.hProcess) = False
Then Exit Sub
        '
        If (GetWindowLong(proc.hProcess,
GWL_STYLE) And WS_DISABLED)
Then Exit Sub
        '
        If IsWindow(proc.hProcess) Then
            If Not
(GetWindowLong(proc.hProcess,
GWL_STYLE) And WS_DISABLED)
Then
                X = PostMessage(proc.hProcess,
WM_CANCELMODE, 0, 0&)
                X = PostMessage(proc.hProcess,
WM_CLOSE, 0, 0&)
            End If
        End If

        If TerminateProcess(proc.hProcess,
0&) = 0 Then
            Debug.Print "Unable to terminate
process: " & proc.hProcess
            Call
WriteError(errTerminateProcessFailed,
mstrSource, _
                ApiError(GetLastError()))
        Else
            ' Should always come here!

```

```

GetExitCodeProcess proc.hProcess,
nCode
If nCode = STILL_ACTIVE Then
    ' Write an error and close the handles
to the
        ' process anyway
        Call
WriteError(errTerminateProcessFailed,
mstrSource)
    End If
    End If

    ' Close all open handles to the shelled
process, even
    ' if any of the above calls error out
    CloseHandle proc.hProcess
    moTimer.Enabled = False
    mfShelling = False
    RaiseEvent Terminated

End If

Exit Sub

AbortErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName & "Abort"
On Error GoTo 0
Err.Raise vbObjectError + errProgramError,
-
    mstrSource, _
    LoadResString(errProgramError)

End Sub
Private Sub moTimer_Timer()
    Dim nCode As Long

    GetExitCodeProcess proc.hProcess, nCode
    If nCode <> STILL_ACTIVE Then
        CloseHandle proc.hProcess
        moTimer.Enabled = False
        mfShelling = False
        RaiseEvent Terminated
    End If
End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnDtl"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cConnDtl.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved

' PURPOSE:  Encapsulates the properties
and methods of a connection.
'          Contains functions to insert, update
and delete
'          connection_dtls records from the
database.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnNameId As Long

```

```

Public ConnName As String
Public ConnectionString As String
Public ConnType As ConnectionType
Public Position As Long
Public NodeDB As Database

Private mintOperation As Operation

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnDtl."

' The cSequence class is used to generate unique
Connection identifiers
Private mConnectionSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Private Sub AssignParameters(qyExec As
DAO.QueryDef)
    ' Assigns values to the parameters in the querydef
object
    ' The parameter names are cryptic to differentiate
them from the field names.
    ' When the parameter names are the same as the
field names, parameters in the where
    ' clause do not get created.

    Dim prmParam As DAO.Parameter

    On Error GoTo AssignParametersErr

    For Each prmParam In qyExec.Parameters
        Select Case prmParam.Name
            Case "[w_id]"
                prmParam.Value = WorkspaceId

            Case "[c_id]"
                prmParam.Value = ConnNameId

            Case "[c_name]"
                prmParam.Value = ConnName

            Case "[c_str]"
                prmParam.Value = ConnectionString

            Case "[c_type]"
                prmParam.Value = ConnType

            Case Else
                ' Write the parameter name that is faulty
                WriteError errInvalidParameter,
mstrSource, prmParam.Name
                On Error GoTo 0
                Err.Raise errInvalidParameter,
mstrModuleName & "AssignParameters", _
                    LoadResString(errInvalidParameter)

        End Select
    Next prmParam

Exit Sub

AssignParametersErr:

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errAssignParametersFailed, _
        mstrModuleName & "AssignParameters",
LoadResString(errAssignParametersFailed)

```

```

End Sub

Public Function Clone() As cConnDtl

    ' Creates a copy of a given Connection

    Dim cCloneConn As cConnDtl

    On Error GoTo CloneErr

    Set cCloneConn = New cConnDtl

    ' Copy all the Connection properties to the
    newly created Connection
    cCloneConn.WorkspaceId = WorkspaceId
    cCloneConn.ConnNameId =
ConnNameId
    cCloneConn.ConnName = ConnName
    cCloneConn.ConnectionString =
ConnectionString
    cCloneConn.ConnType = ConnType
    cCloneConn.IndOperation =
mintOperation
    cCloneConn.Position = Position

    ' And set the return value to the newly
    created Connection
    Set Clone = cCloneConn
    Set cCloneConn = Nothing

    Exit Function

CloneErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"Clone"
    On Error GoTo 0
    Err.Raise vbObjectError +
errCloneFailed, mstrSource,
LoadResString(errCloneFailed)

End Function

Private Sub CheckDupConnectionName()
    ' Check if the Connection name already
    exists in the workspace

    Dim rstConnection As Recordset
    Dim strSql As String
    Dim qy As DAO.QueryDef

    On Error GoTo
CheckDupConnectionNameErr
    mstrSource = mstrModuleName &
"CheckDupConnectionName"

    ' Create a recordset object to retrieve the
    count of all Connections
    ' for the workspace with the same name
    strSql = "Select count(*) as
Connection_count " & _
        " from " & _
TBL_CONNECTION_DTLS & _
        " where " & FLD_ID_WORKSPACE
& " = [w_id]" & _
        " and " & _
FLD_CONN_DTL_CONNECTION_NAM
E & " = [c_name]" & _
        " and " & FLD_ID_CONN_NAME & "
<> [c_id]"

    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyStrin
g, strSql)
    Call AssignParameters(qy)

```

```

Set rstConnection =
qy.OpenRecordset(dbOpenForwardOnly)

If rstConnection![Connection_count] > 0
Then
    rstConnection.Close
    qy.Close
    ShowError errDupConnDtlName
    On Error GoTo 0
    Err.Raise vbObjectError +
errDupConnDtlName, _
        mstrSource,
LoadResString(errDupConnDtlName)
End If

    rstConnection.Close
    qy.Close

Exit Sub

CheckDupConnectionNameErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"CheckDupConnectionName"
    On Error GoTo 0
    Err.Raise vbObjectError + errProgramError,
        _
        mstrSource,
LoadResString(errProgramError)

End Sub

Public Property Let IndOperation(ByVal vdata
As Operation)

    ' The valid operations are define in the
    cOperations
    ' class. Check if the operation is valid
    Select Case vdata
        Case QueryOp, InsertOp, UpdateOp,
DeleteOp
            mintOperation = vdata

        Case Else
            BugAssert True
    End Select

End Property

Public Sub Validate()
    ' Each distinct object will have a Validate
    method which
    ' will check if the class properties are valid.
    This method
    ' will be used to check interdependant
    properties that
    ' cannot be validated by the let procedures.
    ' It should be called by the add and modify
    methods of the class

    If ConnName = gstrEmptyString Then

        ShowError
errConnectionNameMandatory
        On Error GoTo 0
        ' Propagate this error back to the caller
        Err.Raise vbObjectError +
errConnectionNameMandatory, _
            mstrSource,
LoadResString(errConnectionNameMandatory
)
    End If

    ' Raise an error if the Connection name
    already exists in the workspace
    Call CheckDupConnectionName

```

```

End Sub

Public Sub Add()

    Dim strInsert As String
    Dim qy As DAO.QueryDef

    On Error GoTo AddErr

    ' Validate the record before trying to insert the
    record
    Call Validate

    ' Create a temporary querydef object
    strInsert = "insert into " &
TBL_CONNECTION_DTLS & _
        "( " & FLD_ID_WORKSPACE & _
        ", " & FLD_ID_CONN_NAME & _
        ", " & _
FLD_CONN_DTL_CONNECTION_NAME & _
        ", " & _
FLD_CONN_DTL_CONNECTION_STRING & _
        ", " & _
FLD_CONN_DTL_CONNECTION_TYPE & " ) "
& _
        " values ( [w_id], [c_id], " & _
        " [c_name], [c_str], [c_type] ) "

    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString,
strInsert)

    ' Call a procedure to assign the Connection values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

Exit Sub

AddErr:

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInsertFailed, _
        mstrModuleName & "Add",
LoadResString(errInsertFailed)

End Sub

Public Sub Delete()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteErr

    strDelete = "delete from " &
TBL_CONNECTION_DTLS & _
        " where " & FLD_ID_CONN_NAME & " =
[c_id]"
    Set qy =
dbsAttTool.CreateQueryDef(gstrEmptyString,
strDelete)

    Call AssignParameters(qy)
    qy.Execute dbFailOnError

    qy.Close

Exit Sub

DeleteErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteFailed, _

```

<pre> mstrModuleName & "Delete", LoadResString(errDeleteFailed) End Sub Public Sub Modify() Dim strUpdate As String Dim qy As QueryDef On Error GoTo ModifyErr ' Validate the updated values before trying to modify the db Call Validate ' Create a temporary querydef object with the modify string strUpdate = "update " & TBL_CONNECTION_DTLS & _ " set " & FLD_ID_WORKSPACE & " = [w_id], " & _ FLD_CONN_DTL_CONNECTION_NAM E & " = [c_name], " & _ FLD_CONN_DTL_CONNECTION_STR NG & " = [c_str], " & _ FLD_CONN_DTL_CONNECTION_T YPE & " = [c_type] " & _ " where " & FLD_ID_CONN_NAME & " = [c_id]" Set qy = dbsAttTool.CreateQueryDef(gstrEmptyStrin g, strUpdate) ' Call a procedure to assign the Connection values to the ' querydef object Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close Exit Sub ModifyErr: Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errModifyFailed, _ mstrModuleName & "Modify", LoadResString(errModifyFailed) End Sub Public Property Get NextIdentifier() As Long Dim lngNextId As Long On Error GoTo NextIdentifierErr ' Retrieve the next identifier using the sequence class Set mConnectionSeq = New cSequence Set mConnectionSeq.IdDatabase = dbsAttTool mConnectionSeq.IdentifierColumn = FLD_ID_CONN_NAME lngNextId = mConnectionSeq.Identifier Set mConnectionSeq = Nothing NextIdentifier = lngNextId </pre>	<pre> Exit Property NextIdentifierErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errIdGetFailed, _ mstrModuleName & "NextIdentifier", LoadResString(errIdGetFailed) End Property Public Property Get IndOperation() As Operation IndOperation = mintOperation End Property Private Sub Class_Initialize() Set mFieldValue = New cStringSM ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp ConnType = giDefaultConnType End Sub Private Sub Class_Terminate() Set mFieldValue = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cConnDtls" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cConnDtls.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Implements an array of cConnDtl objects. ' Type-safe wrapper around cNodeCollections. ' Also contains additional functions to determine the connection ' string value, validation functions, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) Option Explicit Private mcarrConnDtls As cNodeCollections ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cConnDtls." Public Property Set ConnDb(vdata As Database) </pre>	<pre> Set mcarrConnDtls.NodeDB = vdata End Property Public Sub Modify(cModifiedConn As cConnDtl) ' First check if the parameter record is valid Call CheckDupConnName(cModifiedConn) Call mcarrConnDtls.Modify(cModifiedConn) End Sub Public Sub Load(ByRef cConnToAdd As cConnDtl) Call mcarrConnDtls.Load(cConnToAdd) End Sub Public Sub Add(ByRef cConnToAdd As cConnDtl) ' First check if the record is valid Call Validate(cConnToAdd) ' Retrieve a unique identifier cConnToAdd.ConnNameId = cConnToAdd.NextIdentifier Call mcarrConnDtls.Add(cConnToAdd) End Sub Public Sub Unload(lConnNameId As Long) Dim lngDeleteElement As Long lngDeleteElement = QueryIndex(lConnNameId) Call mcarrConnDtls.Unload(lngDeleteElement) End Sub Public Sub SaveConnDtlsInWsp(ByVal lngWorkspace As Long) ' Call a procedure to save all connection details records for the workspace Call mcarrConnDtls.Save(lngWorkspace) End Sub Public Function GetConnectionDtl(ByVal lngWorkspace As Long, _ ByVal strConnectionName As String) As cConnDtl ' Returns the connection dtl for the passed in connection name Dim lngIndex As Long ' Find all parameters in the array with a matching workspace id For lngIndex = 0 To mcarrConnDtls.Count - 1 If mcarrConnDtls(lngIndex).WorkspaceId = lngWorkspace And _ mcarrConnDtls(lngIndex).ConnName = strConnectionName Then Set GetConnectionDtl = mcarrConnDtls(lngIndex) Exit For End If Next lngIndex If lngIndex > mcarrConnDtls.Count - 1 Then ' The parameter has not been defined for the workspace ' Raise an error </pre>
--	--	--

```

        On Error GoTo 0
        Err.Raise vbObjectError +
errConnNameInvalid, mstrModuleName &
"GetConnection", _

LoadResString(errConnNameInvalid)
End If

End Function

Public Sub Delete(lConnNameId As Long)
    ' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement =
QueryIndex(lConnNameId)
    Call
mcarrConnDtls.Delete(lngDeleteElement)

End Sub

Private Function QueryIndex(lConnNameId
As Long) As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in
the array
    For lngIndex = 0 To
mcarrConnDtls.Count - 1
        If
mcarrConnDtls(lngIndex).ConnNameId =
lConnNameId And _

mcarrConnDtls(lngIndex).IndOperation <>
DeleteOp Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that parameter has not been
found
    On Error GoTo 0
    Err.Raise vbObjectError +
errQueryIndexFailed,
"cArrParameters.QueryIndex", _
        LoadResString(errQueryIndexFailed)

End Function

Public Function
QueryConnDtl(lConnNameId As Long) As
cConnDtl

    Dim lngQueryElement As Long

    lngQueryElement =
QueryIndex(lConnNameId)

    ' Return the queried connection object
    Set QueryConnDtl =
mcarrConnDtls(lngQueryElement)

End Function

Public Property Get Count() As Long

    Count = mcarrConnDtls.Count

End Property

Public Property Get Item(lngIndex As Long)
As cConnDtl
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrConnDtls(lngIndex)

```

```

End Property

Private Sub Validate(ByVal cConnToValidate
As cConnDtl)
    ' This procedure is necessary since the class
cannot validate
    ' all the connection_dtl properties on it's
own. This is 'coz we
    ' might have created new connections in the
workspace, but not
    ' saved them to the database yet - hence the
duplicate check
    ' has to be repeated in the array

    Dim lngIndex As Long
    Dim cTempParam As cConnDtl

    ' Check if the parameter name already exists
in the workspace
    For lngIndex = 0 To mcarrConnDtls.Count -
1
        Set cTempParam =
mcarrConnDtls(lngIndex)
        If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
            cTempParam.ConnName =
cConnToValidate.ConnName And _
            cTempParam.IndOperation <>
DeleteOp Then
            On Error GoTo 0
            Err.Raise vbObjectError +
errDupConnDtlName, _
                mstrSource,
LoadResString(errDupConnDtlName)
        End If
    Next lngIndex

End Sub

Private Sub CheckDupConnName(ByVal
cConnToValidate As cConnDtl)

    Dim lngIndex As Long
    Dim cTempParam As cConnDtl

    ' Check if the parameter name already exists
in the workspace
    For lngIndex = 0 To mcarrConnDtls.Count -
1
        Set cTempParam =
mcarrConnDtls(lngIndex)
        If cTempParam.WorkspaceId =
cConnToValidate.WorkspaceId And _
            cTempParam.ConnName =
cConnToValidate.ConnName And _
            cTempParam.ConnNameId <>
cConnToValidate.ConnNameId And _
            cTempParam.IndOperation <>
DeleteOp Then
            ShowError errDupConnDtlName
            On Error GoTo 0
            Err.Raise vbObjectError +
errDupConnDtlName, _
                mstrSource,
LoadResString(errDupConnDtlName)
        End If
    Next lngIndex

End Sub

Private Sub Class_Initialize()

    Set mcarrConnDtls = New cNodeCollections

End Sub

```

```

Private Sub Class_Terminate()

    Set mcarrConnDtls = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnection"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cConnection.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   Encapsulates the properties and
methods of a connection string.
'            Contains functions to insert, update and
delete
'            workspace_connections records from the
database.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
Option Base 0

' Local variable(s) to hold property value(s)
Public WorkspaceId As Long
Public ConnectionId As Long
Public ConnectionValue As String
Public Description As String
Public NodeDB As Database
Public Position As Long
Public NoCountDisplay As Boolean
Public NoExecute As Boolean
Public ParseQueryOnly As Boolean
Public QuotedIdentifiers As Boolean
Public AnsiNulls As Boolean
Public ShowQueryPlan As Boolean
Public ShowStatsTime As Boolean
Public ShowStatsIO As Boolean
Public ParseOdbcMsg As Boolean
Public RowCount As Long
Public TsqlBatchSeparator As String
Public QueryTimeOut As Long
Public ServerLanguage As String
Public CharacterTranslation As Boolean
Public RegionalSettings As Boolean

Private mstrConnectionName As String
Private mintOperation As Operation

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnection."

' The cSequence class is used to generate unique
Connection identifiers
Private mConnectionSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Private Sub AssignParameters(qyExec As
DAO.QueryDef)

```

<pre> ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to differentiate them from the field names. ' When the parameter names are the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" prmParam.Value = WorkspaceId Case "[c_id]" prmParam.Value = ConnectionId Case "[c_name]" prmParam.Value = mstrConnectionName Case "[c_value]" prmParam.Value = ConnectionValue Case "[desc]" prmParam.Value = Description Case "[no_count]" prmParam.Value = NoCountDisplay Case "[no_exec]" prmParam.Value = NoExecute Case "[parse_only]" prmParam.Value = ParseQueryOnly Case "[quoted_id]" prmParam.Value = QuotedIdentifiers Case "[a_nulls]" prmParam.Value = AnsiNulls Case "[show_qp]" prmParam.Value = ShowQueryPlan Case "[stats_tm]" prmParam.Value = ShowStatsTime Case "[stats_io]" prmParam.Value = ShowStatsIO Case "[parse_odbc]" prmParam.Value = ParseOdbcMsg Case "[row_cnt]" prmParam.Value = RowCount Case "[batch_sep]" prmParam.Value = TsqlBatchSeparator Case "[qry_tmout]" prmParam.Value = QueryTimeout Case "[lang]" </pre>	<pre> prmParam.Value = ServerLanguage Case "[char_trans]" prmParam.Value = CharacterTranslation Case "[reg_settings]" prmParam.Value = RegionalSettings Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrModuleName & "AssignParameters", _ LoadResString(errInvalidParameter) End Select Next prmParam Exit Sub AssignParametersErr: Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrModuleName & "AssignParameters", LoadResString(errAssignParametersFailed) End Sub Public Function Clone() As cConnection ' Creates a copy of a given Connection Dim cCloneConn As cConnection On Error GoTo CloneErr Set cCloneConn = New cConnection ' Copy all the Connection properties to the newly ' created Connection Set cCloneConn.NodeDB = NodeDB cCloneConn.WorkspaceId = WorkspaceId cCloneConn.ConnectionId = ConnectionId cCloneConn.ConnectionName = mstrConnectionName cCloneConn.ConnectionValue = ConnectionValue cCloneConn.Description = Description cCloneConn.IndOperation = mintOperation cCloneConn.Position = Position cCloneConn.NoCountDisplay = NoCountDisplay cCloneConn.NoExecute = NoExecute cCloneConn.ParseQueryOnly = ParseQueryOnly cCloneConn.QuotedIdentifiers = QuotedIdentifiers cCloneConn.AnsiNulls = AnsiNulls cCloneConn.ShowQueryPlan = ShowQueryPlan cCloneConn.ShowStatsTime = ShowStatsTime cCloneConn.ShowStatsIO = ShowStatsIO cCloneConn.ParseOdbcMsg = ParseOdbcMsg cCloneConn.RowCount = RowCount </pre>	<pre> cCloneConn.TsqlBatchSeparator = TsqlBatchSeparator cCloneConn.QueryTimeout = QueryTimeout cCloneConn.ServerLanguage = ServerLanguage cCloneConn.CharacterTranslation = CharacterTranslation cCloneConn.RegionalSettings = RegionalSettings ' And set the return value to the newly created Connection Set Clone = cCloneConn Set cCloneConn = Nothing Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, mstrSource, LoadResString(errCloneFailed) End Function Private Sub CheckDupConnectionName() ' Check if the Connection name already exists in the workspace Dim rstConnection As Recordset Dim strSql As String Dim qy As DAO.QueryDef On Error GoTo CheckDupConnectionNameErr mstrSource = mstrModuleName & "CheckDupConnectionName" ' Create a recordset object to retrieve the count of all Connections ' for the workspace with the same name strSql = "Select count(*) as Connection_count " & _ " from workspace_connections " & _ " where workspace_id = [w_id]" & _ " and connection_name = [c_name]" & _ " and connection_id <> [c_id]" Set qy = NodeDB.CreateQueryDef(gstrEmptyString, strSql) Call AssignParameters(qy) Set rstConnection = qy.OpenRecordset(dbOpenForwardOnly) If rstConnection![Connection_count] > 0 Then rstConnection.Close qy.Close ShowError errDuplicateConnectionName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateConnectionName, _ mstrSource, LoadResString(errDuplicateConnectionName) End If rstConnection.Close qy.Close Exit Sub CheckDupConnectionNameErr: LogErrors Errors mstrSource = mstrModuleName & "CheckDupConnectionName" On Error GoTo 0 Err.Raise vbObjectError + errProgramError, _ mstrSource, LoadResString(errProgramError) </pre>
---	--	---

```

End Sub
Private Sub CheckDB()
    ' Check if the database object has been
    initialized

    If NodeDB Is Nothing Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errInvalidDB, _
        mstrModuleName & "CheckDB",
LoadResString(errInvalidDB)
    End If

End Sub
Public Property Let ConnectionName(vdata
As String)

    If vdata = gstrEmptyString Then

        ShowError
errConnectionNameMandatory
        On Error GoTo 0
        ' Propagate this error back to the caller
        Err.Raise vbObjectError +
errConnectionNameMandatory, _
        mstrSource,
LoadResString(errConnectionNameMandato
ry)
    Else
        mstrConnectionName = vdata
    End If

End Property

Public Property Let IndOperation(ByVal
vdata As Operation)

    ' The valid operations are define in the
cOperations
    ' class. Check if the operation is valid
    Select Case vdata
        Case QueryOp, InsertOp, UpdateOp,
DeleteOp
            mintOperation = vdata

        Case Else
            BugAssert True
    End Select

End Property
Public Sub Validate()
    ' Each distinct object will have a Validate
method which
    ' will check if the class properties are
valid. This method
    ' will be used to check interdependant
properties that
    ' cannot be validated by the let
procedures.
    ' It should be called by the add and
modify methods of the class

    ' Check if the db object is valid
    Call CheckDB

    ' Raise an error if the Connection name
already exists in the workspace
    Call CheckDupConnectionName

End Sub
Public Sub Add()

    Dim strInsert As String
    Dim qy As DAO.QueryDef

```

```

    On Error GoTo AddErr

    ' Validate the record before trying to insert
    the record
    Call Validate

    ' Create a temporary querydef object
    strInsert = "insert into
workspace_connections " & _
        "( workspace_id, connection_id, " & _
        "connection_name, connection_value,
" & _
        "description, no_count_display, " & _
        "no_execute, parse_query_only, " & _
        "ANSI_quoted_identifiers,
ANSI_nulls, " & _
        "show_query_plan, show_stats_time, "
& _
        "show_stats_io,
parse_odbc_msg_prefixes, " & _
        "row_count, tsq_batch_separator, " & _
        "query_time_out, server_language, " & _
        "character_translation,
regional_settings ) " & _
        "values ( [w_id], [c_id], [c_name],
[c_value], " & _
        "[desc], [no_count], [no_exec],
[parse_only], " & _
        "[quoted_id], [a_nulls], [show_qp],
[stats_tm], " & _
        "[stats_io], [parse_odbc], [row_cnt],
[batch_sep], " & _
        "[qry_tmout], [lang], [char_trans],
[reg_settings] )"

    Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strInsert)

    ' Call a procedure to assign the Connection
values
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close

    Exit Sub

AddErr:

    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errInsertFailed, _
        mstrModuleName & "Add",
LoadResString(errInsertFailed)

End Sub
Public Sub Delete()

    Dim strDelete As String
    Dim qy As DAO.QueryDef

    On Error GoTo DeleteErr

    ' Check if the db object is valid
    Call CheckDB

    strDelete = "delete from
workspace_connections " & _
        " where connection_id = [c_id]"

```

```

    Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strDelete)

    Call AssignParameters(qy)
    qy.Execute dbFailOnError

    qy.Close

    Exit Sub

DeleteErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteFailed, _
        mstrModuleName & "Delete",
LoadResString(errDeleteFailed)

End Sub

Public Sub Modify()

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo ModifyErr

    ' Validate the updated values before trying to
modify the db
    Call Validate

    ' Create a temporary querydef object with the
modify string
    strUpdate = "update workspace_connections " &
_
        " set workspace_id = [w_id], " & _
        "connection_name = [c_name], " & _
        "connection_value = [c_value], " & _
        "description = [desc], " & _
        "no_count_display = [no_count], " & _
        "no_execute = [no_exec], " & _
        "parse_query_only = [parse_only], " & _
        "ANSI_quoted_identifiers = [quoted_id], "
& _
        "ANSI_nulls = [a_nulls], " & _
        "show_query_plan = [show_qp], " & _
        "show_stats_time = [stats_tm], " & _
        "show_stats_io = [stats_io], " & _
        "parse_odbc_msg_prefixes = [parse_odbc],
" & _
        "row_count = [row_cnt], " & _
        "tsq_batch_separator = [batch_sep], " & _
        "query_time_out = [qry_tmout], " & _
        "server_language = [lang], " & _
        "character_translation = [char_trans], " & _
        "regional_settings = [reg_settings] " & _
        " where connection_id = [c_id]"

    Set qy =
NodeDB.CreateQueryDef(gstrEmptyString,
strUpdate)

    ' Call a procedure to assign the Connection values
to the
    ' querydef object
    Call AssignParameters(qy)
    qy.Execute dbFailOnError

    qy.Close

    Exit Sub

ModifyErr:

    Call LogErrors(Errors)
    On Error GoTo 0

```

```

Err.Raise vbObjectError +
errModifyFailed, _
    mstrModuleName & "Modify",
LoadResString(errModifyFailed)

End Sub
Public Property Get ConnectionName() As
String

    ConnectionName = mstrConnectionName

End Property

Public Property Get NextIdentifier() As
Long

    Dim lngNextId As Long

    On Error GoTo NextIdentifierErr

    ' First check if the database object is valid
    Call CheckDB

    ' Retrieve the next identifier using the
sequence class
    Set mConnectionSeq = New cSequence
    Set mConnectionSeq.IdDatabase =
NodeDB
    mConnectionSeq.IdentifierColumn =
"connection_id"
    lngNextId = mConnectionSeq.Identifier
    Set mConnectionSeq = Nothing

    NextIdentifier = lngNextId
    Exit Property

NextIdentifierErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errIdGetFailed,
-
    mstrModuleName & "NextIdentifier",
LoadResString(errIdGetFailed)

End Property
Public Property Get IndOperation() As
Operation

    IndOperation = mintOperation

End Property

Private Sub Class_Initialize()

    Set mFieldValue = New cStringSM

    ' Initialize the operation indicator variable
to Query
    ' It will be modified later by the collection
class when
    ' inserts, updates or deletes are performed
mintOperation = QueryOp

    ' Initialize connection properties to their
default values
    NoCountDisplay =
DEF_NO_COUNT_DISPLAY
    NoExecute = DEF_NO_EXECUTE
    ParseQueryOnly =
DEF_PARSE_QUERY_ONLY
    QuotedIdentifiers =
DEF_ANSI_QUOTED_IDENTIFIERS
    AnsiNulls = DEF_ANSI_NULLS
    ShowQueryPlan =
DEF_SHOW_QUERY_PLAN

```

```

ShowStatsTime =
DEF_SHOW_STATS_TIME
ShowStatsIO = DEF_SHOW_STATS_IO
ParseOdbcMsg =
DEF_PARSE_ODBC_MSG_PREFIXES
RowCount = DEF_ROW_COUNT
TsqlBatchSeparator =
DEF_TSQL_BATCH_SEPARATOR
QueryTimeOut =
DEF_QUERY_TIME_OUT
ServerLanguage =
DEF_SERVER_LANGUAGE
CharacterTranslation =
DEF_CHARACTER_TRANSLATION
RegionalSettings =
DEF_REGIONAL_SETTINGS

End Sub

Private Sub Class_Terminate()

    Set NodeDB = Nothing
    Set mFieldValue = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConnections"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:    cConnections.cls
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Implements an array of
cConnection objects.
'           Type-safe wrapper around
cNodeCollections.
'           Also contains validation functions,
etc.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private mcarrConnections As
cNodeCollections

' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cConnections."

Public Property Set ConnDb(vdata As
Database)

    Set mcarrConnections.NodeDB = vdata

End Property

Public Sub Modify(cModifiedConn As
cConnection)

    ' First check if the parameter record is valid
    Call CheckDupConnName(cModifiedConn)

    Call
mcarrConnections.Modify(cModifiedConn)

```

```

End Sub

Public Sub Load(ByRef cConnToAdd As
cConnection)

    Call mcarrConnections.Load(cConnToAdd)

End Sub

Public Sub Add(ByRef cConnToAdd As
cConnection)

    Set cConnToAdd.NodeDB =
mcarrConnections.NodeDB

    ' First check if the record is valid
    Call Validate(cConnToAdd)

    ' Retrieve a unique identifier
    cConnToAdd.ConnectionId =
cConnToAdd.NextIdentifier

    Call mcarrConnections.Add(cConnToAdd)

End Sub

Public Sub Unload(lngConnId As Long)

    Dim lngDeleteElement As Long

    lngDeleteElement = QueryIndex(lngConnId)

    Call
mcarrConnections.Unload(lngDeleteElement)

End Sub

Public Sub SaveConnectionsInWsp(ByVal
lngWorkspace As Long)
    ' Call a procedure to save all connection records
for the workspace
    Call mcarrConnections.Save(lngWorkspace)

End Sub

Public Function GetConnection(ByVal
lngWorkspace As Long, _
ByVal strConnectionName As String) As
cConnection
    ' Returns the connection string for the passed in
connection name

    Dim lngIndex As Long

    ' Find all parameters in the array with a matching
workspace id
    For lngIndex = 0 To mcarrConnections.Count - 1
        If mcarrConnections(lngIndex).WorkspaceId =
lngWorkspace And _

mcarrConnections(lngIndex).ConnectionName =
strConnectionName Then

            Set GetConnection =
mcarrConnections(lngIndex)
            Exit For
        End If
    Next lngIndex

    If lngIndex > mcarrConnections.Count - 1 Then
        ' The parameter has not been defined for the
workspace
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError +
errConnNameInvalid, mstrModuleName &
"GetConnection", _

```



```

LoadResString(errConnNameInvalid)
End If

End Function

Public Sub Delete(IngConnId As Long)
    ' Delete the passed in parameter

    Dim lngDeleteElement As Long

    lngDeleteElement =
    QueryIndex(IngConnId)
    Call
    mcarrConnections.Delete(lngDeleteElement
    )

End Sub

Private Function QueryIndex(IngConnId As
Long) As Long

    Dim lngIndex As Long

    ' Find the matching parameter record in
the array
    For lngIndex = 0 To
    mcarrConnections.Count - 1
        If
        mcarrConnections(lngIndex).ConnectionId
        = lngConnId And _

        mcarrConnections(lngIndex).IndOperation
        <> DeleteOp Then
            QueryIndex = lngIndex
            Exit Function
        End If
    Next lngIndex

    ' Raise error that parameter has not been
found
    On Error GoTo 0
    Err.Raise vbObjectError +
    errQueryIndexFailed,
    "cArrParameters.QueryIndex", _
    LoadResString(errQueryIndexFailed)

End Function

Public Function
QueryConnection(IngConnId As Long) As
cConnection

    Dim lngQueryElement As Long

    lngQueryElement =
    QueryIndex(IngConnId)

    ' Return the queried connection object
    Set QueryConnection =
    mcarrConnections(lngQueryElement)

End Function

Public Property Get Count() As Long

    Count = mcarrConnections.Count

End Property

Public Property Get Item(lngIndex As Long)
As cConnection
Attribute Item.VB_UserMemId = 0

    Set Item = mcarrConnections(lngIndex)

End Property

```

```

Public Sub Validate(ByVal cConnToValidate
As cConnection)
    ' This procedure is necessary since the class
cannot validate
    ' all the parameter properties on it's own.
This is 'coz we
    ' might have created new parameters in the
workspace, but not
    ' saved them to the database yet - hence the
duplicate check
    ' has to be repeated in the array

    Dim lngIndex As Long
    Dim cTempParam As cConnection

    ' Check if the parameter name already exists
in the workspace
    For lngIndex = 0 To
    mcarrConnections.Count - 1
        Set cTempParam =
        mcarrConnections(lngIndex)
        If cTempParam.WorkspaceId =
        cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
        cConnToValidate.ConnectionName And _
        cTempParam.IndOperation <>
        DeleteOp Then
            On Error GoTo 0
            Err.Raise vbObjectError +
            errDuplicateConnectionName, _
            mstrSource,
            LoadResString(errDuplicateConnectionName)
        End If
    Next lngIndex

End Sub

Public Sub CheckDupConnName(ByVal
cConnToValidate As cConnection)

    Dim lngIndex As Long
    Dim cTempParam As cConnection

    ' Check if the parameter name already exists
in the workspace
    For lngIndex = 0 To
    mcarrConnections.Count - 1
        Set cTempParam =
        mcarrConnections(lngIndex)
        If cTempParam.WorkspaceId =
        cConnToValidate.WorkspaceId And _
        cTempParam.ConnectionName =
        cConnToValidate.ConnectionName And _
        cTempParam.ConnectionId <>
        cConnToValidate.ConnectionId And _
        cTempParam.IndOperation <>
        DeleteOp Then
            ShowError
            errDuplicateConnectionName
            On Error GoTo 0
            Err.Raise vbObjectError +
            errDuplicateConnectionName, _
            mstrSource,
            LoadResString(errDuplicateConnectionName)
        End If
    Next lngIndex

End Sub

Private Sub Class_Initialize()

    Set mcarrConnections = New
    cNodeCollections

End Sub

```

```

Private Sub Class_Terminate()

    Set mcarrConnections = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cConstraint"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cConstraint.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Encapsulates the properties and
methods of a constraint.
' Contains functions to insert, update and
delete
' step_constraints records from the
database.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Module level variables to store the property values
Private mlngConstraintId As Long
Private mlngStepId As Long
Private mstrVersionNo As String
Private mintConstraintType As Integer
Private mlngGlobalStepId As Long
Private mstrGlobalVersionNo As String
Private mintSequenceNo As Integer
Private mdbConstraintDB As Database
Private mlngWorkspaceId As Integer
Private mintOperation As Operation
Private mlngPosition As Long

' The cSequence class is used to generate unique
step identifiers
Private mConstraintSeq As cSequence

Private Const mstrModuleName As String =
"cConstraint."
Private mstrSource As String

Public Enum ConstraintType
    gintPreStep = 1
    gintPostStep = 2
End Enum

Private Const mstrSQ As String = ""
Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property
Public Property Let WorkspaceId(ByVal vdata As
Long)
    mlngWorkspaceId = vdata
End Property

Public Property Get IndOperation() As Operation

    IndOperation = mintOperation

End Property
Public Property Let IndOperation(ByVal vdata As
Operation)

    On Error GoTo IndOperationErr

```

<pre> mstrSource = mstrModuleName & "IndOperation" ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ mstrSource, LoadResString(errInvalidOperation) End Select Exit Property IndOperationErr: LogErrors Errors mstrSource = mstrModuleName & "IndOperation" On Error GoTo 0 Err.Raise vbObjectError + errLetOperationFailed, _ mstrSource, LoadResString(errLetOperationFailed) End Property Public Function Clone() As cConstraint ' Creates a copy of a given constraint Dim cConsClone As cConstraint On Error GoTo CloneErr mstrSource = mstrModuleName & "Clone" Set cConsClone = New cConstraint ' Copy all the workspace properties to the newly ' created workspace cConsClone.ConstraintId = mlngConstraintId cConsClone.StepId = mlngStepId cConsClone.VersionNo = mstrVersionNo cConsClone.ConstraintType = mintConstraintType cConsClone.GlobalStepId = mlngGlobalStepId cConsClone.GlobalVersionNo = mstrGlobalVersionNo cConsClone.SequenceNo = mintSequenceNo cConsClone.WorkspaceId = mlngWorkspaceId cConsClone.IndOperation = mintOperation ' And set the return value to the newly created constraint Set Clone = cConsClone Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" </pre>	<pre> On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Get SequenceNo() As Integer SequenceNo = mintSequenceNo End Property Public Property Let SequenceNo(ByVal vdata As Integer) mintSequenceNo = vdata End Property Public Sub Add() ' Inserts a new step constraint into the database Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo AddErr ' First check if the database object is valid Call CheckDB ' Any record validations Call Validate ' Create a temporary querydef object strInsert = "insert into step_constraints " & _ "(constraint_id, step_id, version_no, " & _ " constraint_type, global_step_id, global_version_no, sequence_no)" & _ " values ([cons_id], [s_id], [ver_no], " & _ " [cons_type], [g_step_id], [g_ver_no], " & _ " [seq_no])" Set qy = mdbsConstraintDB.CreateQueryDef(gstrEmpt yString, strInsert) ' Call a procedure to execute the Querydef object Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' strInsert = "insert into step_constraints " & _ ' "(constraint_id, step_id, version_no, " & _ ' " constraint_type, global_step_id, global_version_no, sequence_no)" & _ ' " values (" & _ ' " Str(mlngConstraintId) & ", " & _ ' Str(mlngStepId) & ", " & _ ' mstrSQ & mstrVersionNo & mstrSQ & ", " & Str(mintConstraintType) & ", " & _ ' Str(mlngGlobalStepId) & ", " & mstrSQ & mstrGlobalVersionNo & mstrSQ & ", " & _ ' Str(mintSequenceNo) & ")" ' BugMessage strInsert ' mdbsConstraintDB.Execute strInsert, dbFailOnError Exit Sub </pre>	<pre> AddErr: LogErrors Errors mstrSource = mstrModuleName & "Add" On Error GoTo 0 Err.Raise vbObjectError + errAddConstraintFailed, _ mstrSource, _ LoadResString(errAddConstraintFailed) End Sub Private Sub AssignParameters(qyExec As DAO.QueryDef) ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to make them different ' from the field names. When the parameter names are ' the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr mstrSource = mstrModuleName & "AssignParameters" For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[cons_id]" prmParam.Value = mlngConstraintId Case "[s_id]" prmParam.Value = mlngStepId Case "[ver_no]" prmParam.Value = mstrVersionNo Case "[cons_type]" prmParam.Value = mintConstraintType Case "[g_step_id]" prmParam.Value = mlngGlobalStepId Case "[g_ver_no]" prmParam.Value = mstrGlobalVersionNo Case "[seq_no]" prmParam.Value = mintSequenceNo Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, _ prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrSource, _ LoadResString(errInvalidParameter) End Select Next prmParam Exit Sub AssignParametersErr: mstrSource = mstrModuleName & "AssignParameters" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrSource, LoadResString(errAssignParametersFailed) </pre>
---	---	--

End Sub Public Property Get NextIdentifier() As Long Dim lngNextId As Long On Error GoTo NextIdentifierErr ' First check if the database object is valid Call CheckDB ' Retrieve the next constraint identifier using the ' sequence class Set mConstraintSeq = New cSequence Set mConstraintSeq.IdDatabase = mdbsConstraintDB mConstraintSeq.IdentifierColumn = "constraint_id" lngNextId = mConstraintSeq.Identifier Set mConstraintSeq = Nothing NextIdentifier = lngNextId Exit Property NextIdentifierErr: LogErrors Errors mstrSource = mstrModuleName & "NextIdentifier" On Error GoTo 0 Err.Raise vbObjectError + errStepIdGetFailed, _ mstrSource, LoadResString(errStepIdGetFailed) End Property Private Sub CheckDB() ' Check if the database object has been initialized If mdbsConstraintDB Is Nothing Then ShowError errInvalidDB On Error GoTo 0 Err.Raise vbObjectError + errInvalidDB, _ mstrModuleName, LoadResString(errInvalidDB) End If End Sub Public Sub Delete() ' Deletes the step constraint record from the database Dim strDelete As String Dim qy As DAO.QueryDef On Error GoTo DeleteErr mstrSource = mstrModuleName & "Delete" ' There can be multiple constraints for a step, ' meaning that there can be multiple constraint records ' with the same constraint_id. Only a combination ' of the step_id, version and constraint_id will be ' unique ' Create a temporary querydef object with the modify string strUpdate = "Update step_constraints " & _ " set sequence_no = [seq_no] " & _ " where constraint_id = [cons_id] " & _ " and step_id = [s_id] " & _ " and version_no = [ver_no] " Set qy = mdbsConstraintDB.CreateQueryDef(gstrEmptyString, strUpdate) ' Call a procedure to assign the parameter values to the ' querydef object	" where constraint_id = [cons_id] " & _ " and step_id = [s_id] " & _ " and version_no = [ver_no] " Set qy = mdbsConstraintDB.CreateQueryDef(gstrEmptyString, strDelete) Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' strDelete = "Delete from step_constraints " & _ ' " where constraint_id = " & Str(mlngConstraintId) & _ ' " and step_id = " & Str(mlngStepId) & _ ' " and version_no = " & mstrSQ & mstrVersionNo & mstrSQ ' 'BugMessage strDelete ' mdbsConstraintDB.Execute strDelete, dbFailOnError Exit Sub DeleteErr: LogErrors Errors mstrSource = mstrModuleName & "Delete" On Error GoTo 0 Err.Raise vbObjectError + errDeleteConstraintFailed, _ mstrSource, _ LoadResString(errDeleteConstraintFailed) End Sub Public Sub Modify() ' Updates the sequence no of the step constraint record ' in the database Dim strUpdate As String Dim qy As QueryDef On Error GoTo Modify ' First check if the database object is valid Call CheckDB ' Any record validations Call Validate ' There can be multiple constraints for a step, ' meaning that there can be multiple constraint records ' with the same constraint_id. Only a combination ' of the step_id, version and constraint_id will be ' unique ' Create a temporary querydef object with the modify string strUpdate = "Update step_constraints " & _ " set sequence_no = [seq_no] " & _ " where constraint_id = [cons_id] " & _ " and step_id = [s_id] " & _ " and version_no = [ver_no] " Set qy = mdbsConstraintDB.CreateQueryDef(gstrEmptyString, strUpdate) ' Call a procedure to assign the parameter values to the ' querydef object	Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' strUpdate = "Update step_constraints " & _ ' " set sequence_no = " & Str(mintSequenceNo) & _ ' " where constraint_id = " & Str(mlngConstraintId) & _ ' " and step_id = " & Str(mlngStepId) & _ ' " and version_no = " & mstrSQ & mstrVersionNo & mstrSQ ' 'BugMessage strUpdate ' mdbsConstraintDB.Execute strUpdate, dbFailOnError Exit Sub Modify: LogErrors Errors mstrSource = mstrModuleName & "Modify" On Error GoTo 0 Err.Raise vbObjectError + errUpdateConstraintFailed, _ mstrSource, _ LoadResString(errUpdateConstraintFailed) End Sub Public Property Get Position() As Long Position = mlngPosition End Property Public Property Let Position(ByVal RHS As Long) mlngPosition = RHS End Property Public Sub Validate() ' Each distinct object will have a Validate method which ' will check if the class properties are valid. This method ' will be used to check interdependant properties that ' cannot be validated by the let procedures. ' It should be called by the add and modify methods of the class ' No validations are necessary for the constraint object End Sub Public Property Set NodeDB(vdata As Database) Set mdbsConstraintDB = vdata End Property Public Property Get NodeDB() As Database Set NodeDB = mdbsConstraintDB End Property Public Property Get GlobalVersionNo() As String GlobalVersionNo = mstrGlobalVersionNo End Property Public Property Let GlobalVersionNo(ByVal vdata As String)
---	---	--

<pre> mstrGlobalVersionNo = vdata End Property Public Property Get GlobalStepId() As Long GlobalStepId = mlngGlobalStepId End Property Public Property Get ConstraintId() As Long ConstraintId = mlngConstraintId End Property Public Property Get VersionNo() As String VersionNo = mstrVersionNo End Property Public Property Get StepId() As Long StepId = mlngStepId End Property Public Property Let VersionNo(ByVal vdata As String) mstrVersionNo = vdata End Property Public Property Let StepId(ByVal vdata As Long) mlngStepId = vdata End Property Public Property Let ConstraintId(ByVal vdata As Long) On Error GoTo ConstraintIdErr mstrSource = mstrModuleName & "ConstraintId" If (vdata > 0) Then mlngConstraintId = vdata Else ' Propagate this error back to the caller On Error GoTo 0 Err.Raise vbObjectError + errConstraintIdInvalid, _ mstrSource, LoadResString(errConstraintIdInvalid) End If Exit Property ConstraintIdErr: LogErrors Errors mstrSource = mstrModuleName & "ConstraintId" On Error GoTo 0 Err.Raise vbObjectError + errConstraintIdSetFailed, _ mstrSource, LoadResString(errConstraintIdSetFailed) End Property </pre>	<pre> Public Property Let GlobalStepId(ByVal vdata As Long) On Error GoTo GlobalStepIdErr mstrSource = mstrModuleName & "GlobalStepId" If (vdata > 0) Then mlngGlobalStepId = vdata Else ' Propagate this error back to the caller On Error GoTo 0 Err.Raise vbObjectError + errGlobalStepIdInvalid, _ mstrSource, LoadResString(errGlobalStepIdInvalid) End If Exit Property GlobalStepIdErr: LogErrors Errors mstrSource = mstrModuleName & "GlobalStepId" On Error GoTo 0 Err.Raise vbObjectError + errGlobalStepIdSetFailed, _ mstrSource, LoadResString(errGlobalStepIdSetFailed) End Property Public Property Let ConstraintType(ByVal vdata As ConstraintType) On Error GoTo ConstraintTypeErr ' A global step can be either a pre- or a post- execution step. ' These constants have been defined in the enumeration, ' ConstraintType, which is exposed Select Case vdata Case gintPreStep, gintPostStep mintConstraintType = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errConstraintTypeInvalid, _ mstrSource, LoadResString(errConstraintTypeInvalid) End Select Exit Property ConstraintTypeErr: LogErrors Errors mstrSource = mstrModuleName & "ConstraintType" On Error GoTo 0 Err.Raise vbObjectError + errConstraintTypeLetFailed, _ mstrSource, LoadResString(errConstraintTypeLetFailed) End Property Public Property Get ConstraintType() As ConstraintType ConstraintType = mintConstraintType End Property </pre>	<pre> Private Sub Class_Initialize() ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cFailedStep" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cFailedStep.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Properties of a step execution failure. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Public InstanceId As Long Public StepId As Long Public ParentStepId As Long Public ContCriteria As ContinuationCriteria Public EndTime As Currency Public AskResponse As Long VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cFailedSteps" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cFailedSteps.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module encapsulates a collection of failed steps. It ' also determines whether sub-steps of a passed in step need ' to be skipped due to a failure. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcFailedSteps As cVector Public Function ExecuteSubStep(IParentStepId As Long) As Boolean ' Returns False if there is any condition that prevents sub-steps of the passed ' in instance from being executed Dim lIndex As Long ExecuteSubStep = True </pre>
---	---	--

```

For lIndex = 0 To Count() - 1
    If mcFailedSteps(lIndex).ContCriteria = gintOnFailureCompleteSiblings And _
        lParentStepId <> mcFailedSteps(lIndex).ParentStepId Then
        ExecuteSubStep = False
        Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria = gintOnFailureAbortSiblings And _
        lParentStepId = mcFailedSteps(lIndex).ParentStepId Then
        ExecuteSubStep = False
        Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria = gintOnFailureSkipSiblings And _
        lParentStepId = mcFailedSteps(lIndex).ParentStepId Then
        ExecuteSubStep = False
        Exit For
    End If

    If mcFailedSteps(lIndex).ContCriteria = gintOnFailureAbort Then
        ExecuteSubStep = False
        Exit For
    End If

Next lIndex

End Function
Public Sub Add(ByVal objItem As cFailedStep)

    mcFailedSteps.Add objItem

End Sub
Public Function Delete(ByVal lPosition As Long) As cFailedStep

    Set Delete = mcFailedSteps.Delete(lPosition)

End Function

Public Sub Clear()

    mcFailedSteps.Clear

End Sub
Public Function Count() As Long

    Count = mcFailedSteps.Count

End Function
Public Property Get Item(ByVal Position As Long) As cFailedStep
Attribute Item.VB_UserMemId = 0

    Set Item = mcFailedSteps.Item(Position)

End Property

Public Function StepFailed(lStepId As Long) As Boolean

    ' Returns True if a failure record already exists for the passed in step
    Dim lIndex As Long

    StepFailed = False

```

```

For lIndex = 0 To Count() - 1
    If mcFailedSteps(lIndex).StepId = lStepId Then
        StepFailed = True
        Exit For
    End If
Next lIndex

End Function

Private Sub Class_Initialize()

    Set mcFailedSteps = New cVector

End Sub

Private Sub Class_Terminate()

    Set mcFailedSteps = Nothing

End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFileInfo"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = ' FILE: cFileInfo.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
' PURPOSE: File Properties viz. name, handle, etc.
' Contact: Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

Private mstrFileName As String
Private mintFileHandle As Integer
Private mdbNodeDb As Database ' Since it is used to form a cNodeCollection
Private mlngPosition As Long ' Since it is used to form a cNodeCollection
Public Property Get FileName() As String

    FileName = mstrFileName

End Property
Public Property Let FileName(ByVal vdata As String)

    mstrFileName = vdata

End Property
Public Property Let FileHandle(ByVal vdata As Integer)

    mintFileHandle = vdata

End Property
Public Property Set NodeDB(vdata As Database)

    Set mdbNodeDb = vdata

End Property
Public Property Get NodeDB() As Database

```

```

Set NodeDB = mdbNodeDb

End Property
Public Property Get Position() As Long

    Position = mlngPosition

End Property
Public Property Let Position(ByVal vdata As Long)

    mlngPosition = vdata

End Property
Public Property Get FileHandle() As Integer

    FileHandle = mintFileHandle

End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cFileSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY = "SavedWithClassBuilder", "Yes"
Attribute VB_Ext_KEY = "Top_Level", "Yes"
' FILE: cFileSM.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Encapsulates functions to open a file and write to it.
' Contact: Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cFileSM."
Private mstrSource As String

Private mstrFileName As String
Private mintHFile As Integer
Private mstrFileHeader As String
Private mstrProjectName As String

Public Sub CloseFile()

    ' Close the file
    If mintHFile > 0 Then
        Call CloseFileSM(mstrFileName)
        mintHFile = 0
    End If

End Sub

Public Property Let ProjectName(ByVal vdata As String)

    ' An optional field - will be appended to the file
    ' header string if specified

    Const strProjectHdr As String = "Project Name:"

    mstrProjectName = vdata

```

```

mstrFileHeader = mstrFileHeader & _
Space$(1) & strProjectHdr &
Space$(1) & _
gstrSQ & vdata & gstrSQ

End Property
Public Property Get ProjectName() As String

    ProjectName = mstrProjectName

End Property
Public Property Get FileName() As String

    FileName = mstrFileName

End Property
Public Property Let FileName(ByVal vdata As String)

    mstrFileName = vdata

End Property
Public Sub WriteLine(strMsg As String)

    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, False)

End Sub

Public Sub WriteField(strMsg As String)

    ' Writes the passed in string to the file
    Call WriteToFile(strMsg, True)

End Sub

Private Sub WriteToFile(strMsg As String, _
    blnContinue As Boolean)
    ' Writes the passed in string to the file -
    the
    ' Continue flag indicates whether the next
    line will
    ' be continued on the same line or printed
    on a new one

    On Error GoTo WriteToFileErr

    ' Open the file if it hasn't been already
    If mintHFile = 0 Then

        ' If the filename has not been
        initialized, do not
        ' attempt to open it
        If mstrFileName <> gstrEmptyString
        Then

            mintHFile =
            OpenFileSM(mstrFileName)

            If mintHFile = 0 Then
                ' The Open File command failed
                for some reason
                ' No point in trying to write the
                file header
            Else
                ' Print a file header, if a header
                string has been
                ' initialized
                If mstrFileHeader <>
                gstrEmptyString Then
                    Print #mintHFile,
                    Print #mintHFile,
                    mstrFileHeader
                    Print #mintHFile,

```

```

End If
End If
End If
End If

If mintHFile <> 0 Then
    If strMsg = gstrEmptyString Then
        Print #mintHFile,
    Else
        If blnContinue Then
            ' Write the message to the file -
            continue
            ' all subsequent characters on the
            same line
            Print #mintHFile, strMsg;
        Else
            ' Write the message to the file
            Print #mintHFile, strMsg
        End If
    End If
Else
    ' Display the string to the user instead of
    ' trying to write it to the file
    ' This could be the project error log that
    we were
    ' trying to open! Play it safe and display
    errors - do
    ' not try to log them.
    MsgBox strMsg, vbOKOnly
End If

Exit Sub

WriteToFileErr:
' Log the error code raised by Visual Basic
Call DisplayErrors(Errors)

' Display the string to the user instead of
' trying to write it to the file
MsgBox strMsg, vbOKOnly

End Sub
Public Property Let FileHeader(ByVal vdata As String)

    mstrFileHeader = vdata

End Property
Public Property Get FileHeader() As String

    FileHeader = mstrFileHeader

End Property

Private Sub Class_Terminate()

    ' Close the file opened by this instance
    Call CloseFile

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cGlobalStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cGlobalStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved

```

```

'
'
' PURPOSE: Encapsulates the properties and
methods of a global step.
' Implements the cStep class - carries out
initializations
' and validations that are specific to global
steps.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

Implements cStep

' Object variable to keep the reference in
Private mcStep As cStep

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cGlobalStep."

Private Sub cStep_AddAllIterators()

    Call mcStep.AddAllIterators

End Sub

Private Sub cStep_AddIterator(cItRecord As
cIterator)

    Call mcStep.AddIterator(cItRecord)

End Sub

Private Property Let cStep_ArchivedFlag(ByVal
RHS As Boolean)

    mcStep.ArchivedFlag = RHS

End Property

Private Property Get cStep_ArchivedFlag() As
Boolean

    cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property

Private Sub Class_Initialize()

    ' Create the object
    Set mcStep = New cStep

    ' Initialize the object with valid values for a
    global step
    ' The global flag should be the first field to be
    initialized
    ' since subsequent validations might try to check
    if the
    ' step being created is global
    mcStep.GlobalFlag = True
    mcStep.StepType = gintGlobalStep

    ' A global step cannot have any sub-steps
    associated with it
    ' Hence, it will always be at Step Level 0
    mcStep.ParentStepId = 0
    mcStep.ParentVersionNo = gstrMinVersion
    mcStep.StepLevel = 0

```

```

' The enabled flag must be False for all
global steps
' Global steps can be of two types
' a. Those that are run globally within a
workspace either
' before every step, after every step or
during the entire
' run, depending on the global run
method
' b. Those that are not run globally, but
qualify to be either
' pre or post-execution steps for other
steps in the workspace.
' Whether or not such a step will be
executed depends on
' whether the step for which it is defined
as a pre/post
' step will be executed
mcStep.EnabledFlag = False

mcStep.ContinuationCriteria =
gintNoOption
mcStep.DegreeParallelism =
gstrGlobalParallelism

End Sub
Private Sub Class_Terminate()

' Remove the step object
Set mcStep = Nothing

End Sub

Private Sub cStep_Add()

' Call a private procedure to see if the step
text has been
' entered - since a global step actually
executes a step, entry
' of the text is mandatory
Call StepTextOrFileEntered

' Call the Add method of the step class to
carry out the insert
mcStep.Add

End Sub

Private Function cStep_Clone(Optional
cCloneStep As cStep) As cStep

Dim cNewGlobal As cGlobalStep

Set cNewGlobal = New cGlobalStep
Set cStep_Clone =
mcStep.Clone(cNewGlobal)

End Function

Private Property Get
cStep_ContinuationCriteria() As
ContinuationCriteria

cStep_ContinuationCriteria =
mcStep.ContinuationCriteria

End Property

Private Property Let
cStep_ContinuationCriteria(ByVal RHS As
ContinuationCriteria)

' The continuation criteria field will
always be empty for a

```

```

' global step
mcStep.ContinuationCriteria = 0

End Property

Private Property Let
cStep_DegreeParallelism(ByVal RHS As
String)

' Will always be zero for a global step
mcStep.DegreeParallelism =
gstrGlobalParallelism

End Property

Private Property Get
cStep_DegreeParallelism() As String

cStep_DegreeParallelism =
mcStep.DegreeParallelism

End Property

Private Sub cStep_DeleteIterator(cItRecord As
cIterator)

Call mcStep.DeleteIterator(cItRecord)

End Sub

Private Sub cStep_Delete()

mcStep.Delete

End Sub

Private Property Get cStep_EnabledFlag() As
Boolean

cStep_EnabledFlag = mcStep.EnabledFlag

End Property

Private Property Let
cStep_EnabledFlag(ByVal RHS As Boolean)

' The enabled flag must be False for all
global steps
' Global steps can be of two types
' a. Those that are run globally within a
workspace either
' before every step, after every step or
during the entire
' run, depending on the global run method
' b. Those that are not run globally, but
qualify to be either
' pre or post-execution steps for other steps
in the workspace.
' Whether or not such a step will be
executed depends on
' whether the step for which it is defined as
a pre/post
' step will be executed
mcStep.EnabledFlag = False

End Property

Private Property Let cStep_ErrorFile(ByVal
RHS As String)

mcStep.ErrorFile = RHS

End Property

```

```

Private Property Get cStep_ErrorFile() As String

cStep_ErrorFile = mcStep.ErrorFile

End Property

Private Property Let
cStep_ExecutionMechanism(ByVal RHS As
ExecutionMethod)

' Whether or not the Execution Mechanism is
valid will be
' checked by the Step class
mcStep.ExecutionMechanism = RHS

End Property

Private Property Get cStep_ExecutionMechanism()
As ExecutionMethod

cStep_ExecutionMechanism =
mcStep.ExecutionMechanism

End Property

Private Property Let cStep_FailureDetails(ByVal
RHS As String)

' Whether or not the Failure Details are valid for
the
' selected failure criteria will be checked by the
Step class
mcStep.FailureDetails = RHS

End Property

Private Property Get cStep_FailureDetails() As
String

cStep_FailureDetails = mcStep.FailureDetails

End Property

Private Property Get cStep_GlobalFlag() As
Boolean

cStep_GlobalFlag = mcStep.GlobalFlag

End Property

Private Property Let cStep_GlobalFlag(ByVal RHS
As Boolean)

' Set the global flag to true
mcStep.GlobalFlag = True

End Property

Private Function cStep_IncVersionX() As String

cStep_IncVersionX = mcStep.IncVersionX

End Function

Private Function cStep_IncVersionY() As String

cStep_IncVersionY = mcStep.IncVersionY

End Function

Private Property Let
cStep_GlobalRunMethod(ByVal RHS As Integer)
'

```

```

' Whether or not the Global Run Method
is valid for the step
' will be checked by the Step class
' mcStep.GlobalRunMethod = RHS
'
End Property
'
Private Property Get
cStep_GlobalRunMethod() As Integer
'
' cStep_GlobalRunMethod =
mcStep.GlobalRunMethod
'
End Property
'
Private Property Get cStep_IndOperation()
As Operation
'
' cStep_IndOperation =
mcStep.IndOperation
'
End Property
'
Private Property Let
cStep_IndOperation(ByVal RHS As
Operation)
'
' mcStep.IndOperation = RHS
'
End Property
'
Private Sub cStep_InsertIterator(cItRecord
As cIterator)
'
' Call mcStep.InsertIterator(cItRecord)
'
End Sub
'
Private Function cStep_IsNewVersion() As
Boolean
'
' cStep_IsNewVersion =
mcStep.IsNewVersion
'
End Function
'
Private Function cStep_IteratorCount() As
Long
'
' cStep_IteratorCount =
mcStep.IteratorCount
'
End Function
'
Private Property Let
cStep_IteratorName(ByVal RHS As String)
'
' mcStep.IteratorName = RHS
'
End Property
'
Private Property Get cStep_IteratorName()
As String
'
' cStep_IteratorName =
mcStep.IteratorName
'
End Property
'
Private Function cStep_Iterators() As
Variant
'
' cStep_Iterators = mcStep.Iterators
'
End Function

```

```

Private Sub cStep_LoadIterator(cItRecord As
cIterator)
'
' Call mcStep.LoadIterator(cItRecord)
'
End Sub
'
Private Property Let cStep_LogFile(ByVal
RHS As String)
'
' mcStep.LogFile = RHS
'
End Property
'
Private Property Get cStep_LogFile() As
String
'
' cStep_LogFile = mcStep.LogFile
'
End Property
'
Private Sub cStep_ModifyIterator(cItRecord
As cIterator)
'
' Call mcStep.ModifyIterator(cItRecord)
'
End Sub
'
Private Sub cStep_Modify()
'
' Call a private procedure to see if the step
text has been
' entered - since a global step actually
executes a step,
' entry of the text is mandatory
' Call StepTextOrFileEntered
'
' Call the Modify method of the step class to
carry out the update
' mcStep.Modify
'
End Sub
'
Private Property Get cStep_NextStepId() As
Long
'
' cStep_NextStepId = mcStep.NextStepId
'
End Property
'
Private Property Set cStep_NodeDB(RHS As
DAO.Database)
'
' Set mcStep.NodeDB = RHS
'
End Property
'
Private Property Get cStep_NodeDB() As
DAO.Database
'
' Set cStep_NodeDB = mcStep.NodeDB
'
End Property
'
Private Function cStep_OldVersionNo() As
String
'
' cStep_OldVersionNo =
mcStep.OldVersionNo
'
End Function
'
Private Property Let cStep_OutputFile(ByVal
RHS As String)
'
' mcStep.OutputFile = RHS
'

```

```

End Property
'
Private Property Get cStep_OutputFile() As
String
'
' cStep_OutputFile = mcStep.OutputFile
'
End Property
'
Private Property Let cStep_ParentStepId(ByVal
RHS As Long)
'
' A global step cannot have any sub-steps
associated with it
' Hence, the parent step id and parent version
number will be zero
' mcStep.ParentStepId = 0
'
End Property
'
Private Property Get cStep_ParentStepId() As
Long
'
' cStep_ParentStepId = mcStep.ParentStepId
'
End Property
'
Private Property Let cStep_ParentVersionNo(ByVal
RHS As String)
'
' A global step cannot have any sub-steps
associated with it
' Hence, the parent step id and parent version
number will be zero
' mcStep.ParentVersionNo = gstrMinVersion
'
End Property
'
Private Property Get cStep_ParentVersionNo() As
String
'
' cStep_ParentVersionNo =
mcStep.ParentVersionNo
'
End Property
'
Private Property Let cStep_Position(ByVal RHS As
Long)
'
' mcStep.Position = RHS
'
End Property
'
Private Property Get cStep_Position() As Long
'
' cStep_Position = mcStep.Position
'
End Property
'
Private Sub cStep_RemoveIterator(cItRecord As
cIterator)
'
' Call mcStep.RemoveIterator(cItRecord)
'
End Sub
'
Private Sub cStep_SaveIterators()
'
' Call mcStep.SaveIterators
'
End Sub
'
Private Property Let cStep_SequenceNo(ByVal
RHS As Integer)
'
' mcStep.SequenceNo = RHS
'

```


End Property	Private Property Get cStep_StepText() As String	ShowError errStepLevelZeroForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)
Private Property Get cStep_SequenceNo() As Integer	cStep_StepText = mcStep.StepText	End If
cStep_SequenceNo = mcStep.SequenceNo	End Property	If mcStep.EnabledFlag Then
End Property	Private Property Let cStep_StepTextFile(ByVal RHS As String)	ShowError errEnabledFlagFalseForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)
Private Property Let cStep_StepId(ByVal RHS As Long)	mcStep.StepTextFile = RHS	End If
mcStep.StepId = RHS	End Property	If mcStep.DegreeParallelism > 0 Then
End Property	Private Property Get cStep_StepTextFile() As String	ShowError errDegParallelismNullForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)
Private Property Get cStep_StepId() As Long	cStep_StepTextFile = mcStep.StepTextFile	End If
cStep_StepId = mcStep.StepId	End Property	If mcStep.ContinuationCriteria > 0 Then
End Property	Private Property Let cStep_StepType(RHS As gintStepType)	ShowError errContCriteriaNullForGlobal On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)
Private Property Let cStep_StepLabel(ByVal RHS As String)	mcStep.StepType = gintGlobalStep	End If
mcStep.StepLabel = RHS	End Property	mcStep.Validate
End Property	Private Property Get cStep_StepType() As gintStepType	Exit Sub
Private Property Get cStep_StepLabel() As String	cStep_StepType = mcStep.StepType	cStep_ValidateErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_Validate" On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ mstrSource, _ LoadResString(errValidateFailed)
cStep_StepLabel = mcStep.StepLabel	End Property	End Sub
End Property	Private Sub cStep_UnloadIterators()	Private Sub StepTextOrFileEntered() ' Checks if either the step text or the name of the file containing ' the text has been entered ' If both of them are null or both of them are not null, ' the global step is invalid and an error is raised
Private Property Let cStep_StartDir(ByVal RHS As String)	Call mcStep.UnloadIterators	If StringEmpty(mcStep.StepText) And StringEmpty(mcStep.StepTextFile) Then ShowError errStepTextAndFileNull On Error GoTo 0 Err.Raise vbObjectError + errStepTextAndFileNull, _ mstrSource, LoadResString(errStepTextAndFileNull) ElseIf Not StringEmpty(mcStep.StepText) And Not StringEmpty(mcStep.StepTextFile) Then ShowError errStepTextOrFile On Error GoTo 0 Err.Raise vbObjectError + errStepTextOrFile, — mstrSource, LoadResString(errStepTextOrFile)
mcStep.StartDir = RHS	End Sub	End If
End Property	Private Sub cStep_UpdateIterator(cItRecord As cIterator)	End Sub
Private Property Get cStep_StartDir() As String	Call mcStep.UpdateIterator(cItRecord)	Private Property Let cStep_VersionNo(ByVal RHS As String)
cStep_StartDir = mcStep.StartDir	End Sub	
End Property	Private Sub cStep_UpdateIteratorVersion()	
Private Property Let cStep_StepLevel(ByVal RHS As Integer)	Call mcStep.UpdateIteratorVersion	
' A global step cannot have any sub-steps associated with it ' Hence, it will always be at step level 0 mcStep.StepLevel = 0	End Sub	
End Property	Private Sub cStep_Validate() ' The validate routines for each of the steps will ' carry out the specific validations for the type and ' call the generic validation routine	
Private Property Get cStep_StepLevel() As Integer	On Error GoTo cStep_ValidateErr mstrSource = mstrModuleName & "cStep_Validate"	
cStep_StepLevel = mcStep.StepLevel	' Validations specific to global steps	
End Property	' Check if the step text or a file name has been ' specified Call StepTextOrFileEntered	
Private Property Let cStep_StepText(ByVal RHS As String)	' The step level must be zero for all globals If mcStep.StepLevel <> 0 Then	
mcStep.StepText = RHS		
End Property		

<pre> mcStep.VersionNo = RHS End Property Private Property Get cStep_VersionNo() As String cStep_VersionNo = mcStep.VersionNo End Property Private Property Let cStep_WorkspaceId(ByVal RHS As Long) mcStep.WorkspaceId = RHS End Property Private Property Get cStep_WorkspaceId() As Long cStep_WorkspaceId = mcStep.WorkspaceId End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cInstance" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cInstance.cls ' ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of an instance. ' An instance is created when a step is executed for a ' particular iterator value (if applicable) at 'run' time. ' Contains functions to determine if an instance is running, ' complete, and so on. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cInstance." Private mstrSource As String Private mcStep As cStep Public Key As String ' Node key for the step being executed Public InstanceId As Long Public ParentInstanceId As Long ' The parent instance Private mblnNoMoreToStart As Boolean Private mblnComplete As Boolean Public StartTime As Currency Public EndTime As Currency Public ElapsedTime As Currency Private mintStatus As InstanceStatus Public DegreeParallelism As Integer Private mclIterators As cRunCollt </pre>	<pre> ' A collection of all the sub-steps for this step Private mcSubSteps As cSubSteps Public Sub UpdateStartTime(lStepId As Long, Optional ByVal StartTm As Currency = gdtmEmpty, _ Optional ByVal EndTm As Currency = gdtmEmpty, _ Optional ByVal Elapsed As Currency = 0) ' We do not maintain start and end timestamps for the constraint ' of a step. Hence we check if the process that just started/ ' terminated is the worker step that is being executed. If so, ' we update the start/end time and status on the instance record. BugAssert (StartTm <> gdtmEmpty) Or (EndTm <> gdtmEmpty), "Mandatory parameter missing." ' Make sure that we are executing the actual step and not ' a pre or post-execution constraint If mcStep.StepId = lStepId Then If StartTm <> 0 Then StartTime = StartTm mintStatus = gintRunning Else EndTime = EndTm ElapsedTime = Elapsed mintStatus = gintComplete End If End If End Sub Public Function ValidForIteration(cParentInstance As cInstance, _ ByVal intConsType As ConstraintType) As Boolean ' Returns true if the instance passed in is the first or ' last iteration for the step, depending on the constraint type Dim cSubStepRec As cSubStep Dim vntIterators As Variant On Error GoTo ValidForIterationErr If cParentInstance Is Nothing Then ' This will only be true for the dummy instance, which ' cannot have any iterators defined for it ValidForIteration = True Exit Function End If vntIterators = mcStep.Iterators If Not StringEmpty(mcStep.IteratorName) And Not IsEmpty(vntIterators) Then Set cSubStepRec = cParentInstance.QuerySubStep(mcStep.StepId) If intConsType = gintPreStep Then ' Pre-execution constraints will only be executed ' before the first iteration If cSubStepRec.LastIterator.IteratorType = gintValue Then </pre>	<pre> ValidForIteration = (cSubStepRec.LastIterator.Sequence = _ gintMinIteratorSequence) Else ValidForIteration = (cSubStepRec.LastIterator.Value = _ cSubStepRec.LastIterator.RangeFrom) End If Else ' Post-execution constraints will only be executed ' after the last iteration - check if there are any ' pending iterations ValidForIteration = cSubStepRec.NextIteration(mcStep) Is Nothing End If Else ValidForIteration = True End If Exit Function ValidForIterationErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "ValidForIteration" Err.Raise vbObjectError + errExecInstanceFailed, _ mstrSource, LoadResString(errExecInstanceFailed) End Function Public Sub CreateSubStep(cSubStepDtls As cStep, RunParams As cArrParameters) Dim cNewSubStep As cSubStep On Error GoTo CreateSubStepErr Set cNewSubStep = New cSubStep cNewSubStep.StepId = cSubStepDtls.StepId cNewSubStep.TasksComplete = 0 cNewSubStep.TasksRunning = 0 ' Initialize the iterator for the instance Set cNewSubStep.LastIterator = New cRunItDetails Call cNewSubStep.InitializeIt(cSubStepDtls, RunParams) ' Add add the substep to the collection mcSubSteps.Add cNewSubStep Set cNewSubStep = Nothing Exit Sub CreateSubStepErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "CreateSubStep" Err.Raise vbObjectError + errProgramError, mstrSource, _ LoadResString(errProgramError) End Sub </pre>
--	--	---

<pre> Public Function QuerySubStep(ByVal SubStepId As Long) As cSubStep ' Retrieves the sub-step record for the passed in sub-step id Dim lngIndex As Long On Error GoTo QuerySubStepErr ' Find the sub-step node with the matching step id For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).StepId = SubStepId Then Set QuerySubStep = mcSubSteps(lngIndex) Exit For End If Next lngIndex Exit Function QuerySubStepErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "QuerySubStep" Err.Raise vbObjectError + errNavInstancesFailed, _ mstrSource, LoadResString(errNavInstancesFailed) End Function Public Property Let AllStarted(ByVal vdata As Boolean) 'bugmessage "Set All Started to " & vData & " for : " & _ mstrKey mblnNoMoreToStart = vdata End Property Public Property Get AllStarted() As Boolean AllStarted = mblnNoMoreToStart End Property Public Property Let AllComplete(ByVal vdata As Boolean) 'bugmessage "Set All Complete to " & vData & " for : " & _ mstrKey mblnComplete = vdata End Property Public Property Get AllComplete() As Boolean AllComplete = mblnComplete End Property Public Sub ChildExecuted(mlngStepId As Long) ' This procedure is called when a sub-step executes. Dim lngIndex As Long </pre>	<pre> On Error GoTo ChildExecutedErr BugAssert mcStep.StepType = gintManagerStep For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).StepId = mlngStepId Then mcSubSteps(lngIndex).TasksRunning = - mcSubSteps(lngIndex).TasksRunning + 1 ' BugMessage "Tasks Running for Step Id : " & _ ' CStr(mcSubSteps(lngIndex).StepId) & _ ' " Instance Id: " & InstanceId & _ ' " = " & mcSubSteps(lngIndex).TasksRunning Exit For End If Next lngIndex If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise vbObjectError + errInvalidChild, mstrModuleName, _ LoadResString(errInvalidChild) End If Exit Sub ChildExecutedErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errInstanceOpFailed, mstrModuleName & "ChildExecuted", _ LoadResString(errInstanceOpFailed) End Sub Public Sub ChildTerminated(mlngStepId As Long) ' This procedure is called when any sub-step process ' terminates. Note: The TasksComplete field will be ' updated only when all the instances for a sub-step ' complete execution. Dim lngIndex As Long On Error GoTo ChildTerminatedErr BugAssert mcStep.StepType = gintManagerStep For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).StepId = mlngStepId Then mcSubSteps(lngIndex).TasksRunning = - mcSubSteps(lngIndex).TasksRunning - 1 ' BugMessage "Tasks Running for Step Id : " & _ ' CStr(mcSubSteps(lngIndex).StepId) & _ ' " Instance Id: " & InstanceId & _ </pre>	<pre> ' " = " & mcSubSteps(lngIndex).TasksRunning BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mlngStepId) & _ " Instance Id " & InstanceId & " is less than 0." Exit For End If Next lngIndex If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise errInvalidChild, mstrModuleName & "ChildTerminated", _ LoadResString(errInvalidChild) End If Exit Sub ChildTerminatedErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "ChildTerminated" Err.Raise vbObjectError + errInstanceOpFailed, mstrSource, _ LoadResString(errInstanceOpFailed) End Sub Public Sub ChildCompleted(mlngStepId As Long) ' This procedure is called when any a sub-step completes ' execution. Note: The TasksComplete field will be ' incremented. Dim lngIndex As Long On Error GoTo ChildCompletedErr BugAssert mcStep.StepType = gintManagerStep For lngIndex = 0 To mcSubSteps.Count - 1 BugAssert mcSubSteps(lngIndex).TasksComplete >= 0, _ "Tasks complete for " & CStr(mcSubSteps(lngIndex).StepId) & _ " Instance Id " & InstanceId & " is less than 0." If mcSubSteps(lngIndex).StepId = mlngStepId Then mcSubSteps(lngIndex).TasksComplete = _ mcSubSteps(lngIndex).TasksComplete + 1 ' BugMessage "Tasks Complete for Step Id : " & _ ' CStr(mcSubSteps(lngIndex).StepId) & _ ' " Instance Id: " & InstanceId & _ ' " = " & mcSubSteps(lngIndex).TasksComplete Exit For End If Next lngIndex If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise errInvalidChild, mstrModuleName, _ LoadResString(errInvalidChild) </pre>
---	--	--

<pre> End If Exit Sub ChildCompletedErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errInstanceOpFailed, mstrModuleName & "ChildCompleted", _ LoadResString(errInstanceOpFailed) End Sub Public Sub ChildDeleted(mlngStepId As Long) ' This procedure is called when a sub-step needs to be re-executed ' Note: The TasksComplete field is decremented. We needn't worry about ' the TasksRunning field since no steps are currently running. Dim lngIndex As Long On Error GoTo ChildDeletedErr BugAssert mcStep.StepType = gintManagerStep For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).StepId = mlngStepId Then mcSubSteps(lngIndex).TasksRunning = _ mcSubSteps(lngIndex).TasksRunning - 1 BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mcSubSteps(lngIndex).StepId) & _ " Instance Id " & InstanceId & " is less than 0." Exit For End If Next lngIndex If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise errInvalidChild, mstrModuleName, _ LoadResString(errInvalidChild) End If Exit Sub ChildDeletedErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errInstanceOpFailed, mstrModuleName & "ChildDeleted", _ LoadResString(errInstanceOpFailed) End Sub Private Sub RaiseErrForWorker() </pre>	<pre> If mcStep.StepType <> gintManagerStep Then On Error GoTo 0 mstrSource = mstrModuleName & "RaiseErrForWorker" Err.Raise vbObjectError + errInvalidForWorker, _ mstrSource, _ LoadResString(errInvalidForWorker) End If End Sub Public Property Get Step() As cStep Set Step = mcStep End Property Public Property Get Iterators() As cRunColIt Set Iterators = mcIterators End Property Public Property Get SubSteps() As cSubSteps Call RaiseErrForWorker Set SubSteps = mcSubSteps End Property Public Property Set Step(cRunStep As cStep) Set mcStep = cRunStep End Property Public Property Set Iterators(cIts As cRunColIt) Set mcIterators = cIts End Property Public Property Get IsPending() As Boolean ' Returns true if the step has any substeps that need ' execution Dim lngIndex As Long Dim lngRunning As Long Call RaiseErrForWorker If Not mblnComplete And Not mblnNoMoreToStart Then ' Get a count of all the substeps that are already being ' executed lngRunning = 0 For lngIndex = 0 To mcSubSteps.Count - 1 lngRunning = lngRunning + mcSubSteps(lngIndex).TasksRunning Next lngIndex IsPending = (lngRunning < DegreeParallelism) Else ' This should be sufficient to prove that there r no ' more sub-steps to be executed. ' mblnComplete: Handles the case where all steps have ' been executed ' mblnNoMoreToStart: Handles the case where the step </pre>	<pre> ' has a degree of parallelism greater than the total ' number of sub-steps available to execute IsPending = False End If End Property Public Property Get IsRunning() As Boolean ' Returns true if the any one of the substeps is still ' executing Dim lngIndex As Long Call RaiseErrForWorker IsRunning = False ' If a substep has no currently executing tasks and ' the tasks completed is greater than zero, then we can ' assume that it has completed execution (otherwise we ' would've run a new task the moment one completed!) For lngIndex = 0 To mcSubSteps.Count - 1 If mcSubSteps(lngIndex).TasksRunning > 0 Then IsRunning = True Exit For End If Next lngIndex End Property Public Property Get TotalRunning() As Long ' Returns the total number of substeps that are executing Dim lngTotalProcesses As Long Dim lngIndex As Long Call RaiseErrForWorker lngTotalProcesses = 0 For lngIndex = 0 To mcSubSteps.Count - 1 BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mcSubSteps(lngIndex).StepId) & _ " is less than 0." lngTotalProcesses = lngTotalProcesses + mcSubSteps(lngIndex).TasksRunning Next lngIndex TotalRunning = lngTotalProcesses End Property Public Property Get RunningForStep(lngSubStepId As Long) As Long ' Returns the total number of instances of the substep ' that are executing Dim lngIndex As Long Call RaiseErrForWorker For lngIndex = 0 To mcSubSteps.Count - 1 BugAssert mcSubSteps(lngIndex).TasksRunning >= 0, _ "Tasks running for " & CStr(mcSubSteps(lngIndex).StepId) & _ " is less than 0." If mcSubSteps(lngIndex).StepId = lngSubStepId Then RunningForStep = mcSubSteps(lngIndex).TasksRunning Exit For End If </pre>
--	---	---

<pre> Next lngIndex If lngIndex > mcSubSteps.Count - 1 Then ' The child step wasn't found - raise an error On Error GoTo 0 Err.Raise errInvalidChild, mstrSource, - LoadResString(errInvalidChild) End If End Property Public Property Let Status(ByVal vdata As InstanceStatus) mintStatus = vdata End Property Public Property Get Status() As InstanceStatus Status = mintStatus End Property Private Sub Class_Initialize() Set mcSubSteps = New cSubSteps mblnNoMoreToStart = False mblnComplete = False StartTime = gdtmEmpty EndTime = gdtmEmpty End Sub Private Sub Class_Terminate() mcSubSteps.Clear Set mcSubSteps = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cInstances" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cInstances.cls ' ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: Implements a collection of cInstance objects. ' ' Type-safe wrapper around cVector. ' Also contains additional functions to query an instance, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cInstance." Private mstrSource As String </pre>	<pre> Private mcInstances As cVector Public Function QueryInstance(ByVal InstanceId As Long) As cInstance ' Retrieves the record for the passed in instance from ' the collection Dim lngIndex As Long On Error GoTo QueryInstanceErr ' Check for valid values of the instance id If InstanceId > 0 Then ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).InstanceId = InstanceId Then Set QueryInstance = mcInstances(lngIndex) Exit For End If Next lngIndex If lngIndex > mcInstances.Count - 1 Then On Error GoTo 0 Err.Raise vbObjectError + errQueryFailed, mstrSource, _ LoadResString(errQueryFailed) End If Else On Error GoTo 0 Err.Raise vbObjectError + errQueryFailed, mstrSource, _ LoadResString(errQueryFailed) End If Exit Function QueryInstanceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "QueryInstance" Err.Raise vbObjectError + errQueryFailed, _ mstrSource, LoadResString(errQueryFailed) End Function Public Function QueryPendingInstance(ByVal ParentInstanceId As Long, _ ByVal lngSubStepId As Long) As cInstance ' Retrieves a pending instance for the passed in substep ' and the given parent instance id. Dim lngIndex As Long On Error GoTo QueryPendingInstanceErr ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).ParentInstanceId = ParentInstanceId And _ mcInstances(lngIndex).Step.StepId = lngSubStepId Then ' Put in a separate if condition since the IsPending ' property is valid only for manager steps. If the </pre>	<pre> ' calling procedure does not pass a manager step ' identifier, the procedure will error out. If mcInstances(lngIndex).IsPending Then Set QueryPendingInstance = mcInstances(lngIndex) Exit For End If Next lngIndex Exit Function QueryPendingInstanceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 mstrSource = mstrModuleName & "QueryPendingInstance" Err.Raise vbObjectError + errQueryFailed, _ mstrSource, LoadResString(errQueryFailed) End Function Public Function InstanceAborted(cSubStepRec As cSubStep) As Boolean Dim lngIndex As Long InstanceAborted = False For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).Step.StepId = cSubStepRec.StepId And _ mcInstances(lngIndex).Status = gintAborted Then InstanceAborted = True Exit For End If Next lngIndex End Function Public Function CompletedInstanceExists(IParentInstance As Long, - cSubStepDtls As cStep) As Boolean ' Checks if there is a completed instance of the passed in step Dim lngIndex As Long CompletedInstanceExists = False If cSubStepDtls.StepType = gintManagerStep Then ' Find the run node with the matching step id For lngIndex = 0 To Count() - 1 If mcInstances(lngIndex).ParentInstanceId = IParentInstance And _ mcInstances(lngIndex).Step.StepId = cSubStepDtls.StepId Then ' Put in a separate if condition since the IsPending ' property is valid only for manager steps. BugAssert (Not mcInstances(lngIndex).IsPending), "Pending instance exists!" CompletedInstanceExists = True Exit Function End If Next lngIndex End If End Function Public Sub Add(ByVal objItem As cInstance) </pre>
---	--	--

<pre> mcInstances.Add objItem End Sub Public Sub Clear() mcInstances.Clear End Sub Public Function Count() As Long Count = mcInstances.Count End Function Public Function Delete(ByVal lngDelete As Long) As cInstance Set Delete = mcInstances.Delete(lngDelete) End Function Public Property Set Item(Optional ByVal Position As Long, _ RHS As cInstance) If Position = -1 Then Position = 0 End If Set mcInstances(Position) = RHS End Property Public Property Get Item(Optional ByVal Position As Long = -1) _ As cInstance Attribute Item.VB_UserMemId = 0 If Position = -1 Then Position = 0 End If Set Item = mcInstances.Item(Position) End Property Private Sub Class_Initialize() Set mcInstances = New cVector End Sub Private Sub Class_Terminate() Set mcInstances = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cIterator" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False </pre>	<pre> ' FILE: cIterator.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: Encapsulates the properties and methods of an iterator. ' Contains functions to insert, update and delete ' iterator_values records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Implements cNode ' Module level variables to store the property values Private mintType As Integer Private mintSequenceNo As Integer Private mstrValue As String Private mdbIteratorDB As Database Private mintOperation As Integer Private mlngPosition As Long Private Const mstrModuleName As String = "cIterator." Private mstrSource As String Public Enum ValueType gintFrom = 1 gintTo gintStep gintValue End Enum Public Property Get Value() As String Value = mstrValue End Property Public Property Let Value(ByVal vdata As String) mstrValue = vdata End Property Public Property Get IndOperation() As Operation IndOperation = mintOperation End Property Public Property Let IndOperation(ByVal vdata As Operation) On Error GoTo IndOperationErr mstrSource = mstrModuleName & "IndOperation" ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ </pre>	<pre> mstrSource, LoadResString(errInvalidOperation) End Select Exit Property IndOperationErr: LogErrors Errors mstrSource = mstrModuleName & "IndOperation" On Error GoTo 0 Err.Raise vbObjectError + errLetOperationFailed, _ mstrSource, LoadResString(errLetOperationFailed) End Property Public Function Clone() As cIterator ' Creates a copy of a given Iterator Dim cltClone As cIterator On Error GoTo CloneErr Set cltClone = New cIterator ' Copy all the iterator properties to the newly ' created object cltClone.IteratorType = mintType cltClone.SequenceNo = mintSequenceNo cltClone.IndOperation = mintOperation cltClone.Value = mstrValue ' And set the return value to the newly created Iterator Set Clone = cltClone Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Get SequenceNo() As Integer SequenceNo = mintSequenceNo End Property Public Property Let SequenceNo(ByVal vdata As Integer) mintSequenceNo = vdata End Property Public Sub Add(ByVal lngStepId As Long, _ strVersion As String) ' Inserts a new iterator values record into the database Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo AddIteratorErr ' First check if the database object is valid Call CheckDB ' Create a temporary querydef object strInsert = "insert into iterator_values " & _ </pre>
---	---	--

```

        "( step_id, version_no, type, " & _
        " iterator_value, sequence_no )" & _
        " values ( [st_id], [ver_no], [it_typ],
" & _
        " [it_val], [seq_no] )"
        Set qy =
mdbsIteratorDB.CreateQueryDef(gstrEmpty
String, strInsert)

' Call a procedure to execute the Querydef
object
Call AssignParameters(qy, lngStepId,
strVersion)

qy.Execute dbFailOnError
qy.Close

Exit Sub

AddIteratorErr:
LogErrors Errors
mstrSource = mstrModuleName &
"AddIterator"
On Error GoTo 0
Err.Raise vbObjectError +
errInsertIteratorFailed, _
mstrSource, _

LoadResString(errInsertIteratorFailed)
End Sub

Private Sub AssignParameters(qyExec As
DAO.QueryDef, _
ByVal lngStepId As Long, _
strVersion As String)
' Assigns values to the parameters in the
querydef object
' The parameter names are cryptic to make
them different
' from the field names. When the
parameter names are
' the same as the field names, parameters
in the where
' clause do not get created.

Dim prmParam As DAO.Parameter

On Error GoTo AssignParametersErr
mstrSource = mstrModuleName &
"AssignParameters"

For Each prmParam In
qyExec.Parameters
Select Case prmParam.Name
Case "[st_id]"
prmParam.Value = lngStepId

Case "[ver_no]"
prmParam.Value = strVersion

Case "[it_typ]"
prmParam.Value = mintType

Case "[it_val]"
prmParam.Value = mstrValue

Case "[seq_no]"
prmParam.Value =
mintSequenceNo

Case Else
' Write the parameter name that is
faulty
WriteError errInvalidParameter,
mstrSource, _

```

```

        prmParam.Name
On Error GoTo 0
Err.Raise errInvalidParameter,
mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:
mstrSource = mstrModuleName &
"AssignParameters"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errAssignParametersFailed, _
mstrSource,
LoadResString(errAssignParametersFailed)

End Sub

Private Sub CheckDB()
' Check if the database object has been
initialized

If mdbsIteratorDB Is Nothing Then
ShowError errInvalidDB
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB,
_
mstrModuleName,
LoadResString(errInvalidDB)
End If

End Sub

Public Sub Delete(ByVal lngStepId As Long, _
strVersion As String)
' Deletes the step iterator record from the
database

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteIteratorErr
mstrSource = mstrModuleName &
"DeleteIterator"

' There can be multiple iterators for a step.
' However the values that an iterator for a
step can
' assume will be unique, meaning that a
combination of
' the iterator_id and value will be unique.
strDelete = "delete from iterator_values " &
_
" where step_id = [st_id]" & _
" and version_no = [ver_no]" & _
" and iterator_value = [it_val] "

Set qy =
mdbsIteratorDB.CreateQueryDef(gstrEmptyStr
ing, strDelete)

Call AssignParameters(qy, lngStepId,
strVersion)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteIteratorErr:
LogErrors Errors

```

```

mstrSource = mstrModuleName &
"DeleteIterator"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteIteratorFailed, _
mstrSource, _
LoadResString(errDeleteIteratorFailed)
End Sub

Public Sub Update(ByVal lngStepId As Long,
strVersion As String)
' Updates the sequence no of the step iterator
record
' in the database

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo UpdateErr

' First check if the database object is valid
Call CheckDB

If mintType = gintValue Then
' If the iterator is of type value, only the
sequence of the values can get updated
strUpdate = "Update iterator_values " & _
" set sequence_no = [seq_no]" & _
" where step_id = [st_id]" & _
" and version_no = [ver_no]" & _
" and iterator_value = [it_val] "
Else
' If the iterator is of type range, only the values
can get updated
strUpdate = "Update iterator_values " & _
" set iterator_value = [it_val]" & _
" where step_id = [st_id]" & _
" and version_no = [ver_no]" & _
" and type = [it_typ] "
End If

Set qy =
mdbsIteratorDB.CreateQueryDef(gstrEmptyString,
strUpdate)

' Call a procedure to assign the parameter values
to the
' querydef object
Call AssignParameters(qy, lngStepId, strVersion)
qy.Execute dbFailOnError

qy.Close

Exit Sub

UpdateErr:
LogErrors Errors
mstrSource = mstrModuleName & "Update"
On Error GoTo 0
Err.Raise vbObjectError +
errUpdateConstraintFailed, _
mstrSource, _
LoadResString(errUpdateConstraintFailed)

End Sub

Public Property Set NodeDB(vdata As Database)

Set mdbsIteratorDB = vdata

End Property

Public Property Get NodeDB() As Database

Set NodeDB = mdbsIteratorDB

End Property

```

<pre> Public Property Get Position() As Long Position = mlngPosition End Property Public Property Let Position(ByVal vdata As Long) mlngPosition = vdata End Property Public Property Let IteratorType(ByVal vdata As ValueType) On Error GoTo TypeErr mstrSource = mstrModuleName & "Type" ' These constants have been defined in the enumeration, ' Type, which is exposed Select Case vdata Case gintFrom, gintTo, gintStep, gintValue mintType = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, _ mstrSource, LoadResString(errTypeInvalid) End Select Exit Property TypeErr: LogErrors Errors mstrSource = mstrModuleName & "Type" On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, _ mstrSource, LoadResString(errTypeInvalid) End Property Public Property Get IteratorType() As ValueType IteratorType = mintType End Property Public Sub Validate() ' No validations necessary for the iterator class End Sub Private Sub Class_Initialize() ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp End Sub </pre>	<pre> Private Property Let cNode_IndOperation(ByVal vdata As Operation) On Error GoTo IndOperationErr mstrSource = mstrModuleName & "IndOperation" ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ mstrSource, LoadResString(errInvalidOperation) End Select Exit Property IndOperationErr: LogErrors Errors mstrSource = mstrModuleName & "IndOperation" On Error GoTo 0 Err.Raise vbObjectError + errLetOperationFailed, _ mstrSource, LoadResString(errLetOperationFailed) End Property Private Property Get cNode_IndOperation() As Operation IndOperation = mintOperation End Property Private Property Set cNode_NodeDB(RHS As DAO.Database) Set mdbIteratorDB = RHS End Property Private Property Get cNode_NodeDB() As DAO.Database Set cNode_NodeDB = mdbIteratorDB End Property Private Property Let cNode_Position(ByVal vdata As Long) mlngPosition = vdata End Property Private Property Get cNode_Position() As Long cNode_Position = mlngPosition End Property </pre>	<pre> Private Sub cNode_Validate() ' No validations necessary for the iterator class End Sub Private Property Let cNode_Value(ByVal vdata As String) mstrValue = vdata End Property Private Property Get cNode_Value() As String Value = mstrValue End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cManager" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cManager.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and ' methods of a manager step. ' Implements the cStep class - carries out ' initializations ' and validations that are specific to ' manager steps. ' Contact: Reshma Tharamal ' (reshmat@microsoft.com) ' Option Explicit Implements cStep ' Object variable to keep the step reference in Private mcStep As cStep ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cManager." Private Sub cStep_AddAllIterators() Call mcStep.AddAllIterators End Sub Private Property Let cStep_StartDir(ByVal RHS As String) mcStep.StartDir = RHS End Property Private Property Get cStep_StartDir() As String cStep_StartDir = mcStep.StartDir End Property </pre>
---	---	---

Private Sub cStep_Delete() Call mcStep.Delete End Sub Private Property Set cStep_NodeDB(RHS As DAO.Database) Set mcStep.NodeDB = RHS End Property Private Function cStep_IncVersionY() As String cStep_IncVersionY = mcStep.IncVersionY End Function Private Function cStep_IsNewVersion() As Boolean cStep_IsNewVersion = mcStep.IsNewVersion End Function Private Function cStep_OldVersionNo() As String cStep_OldVersionNo = mcStep.OldVersionNo End Function Private Function cStep_IncVersionX() As String cStep_IncVersionX = mcStep.IncVersionX End Function Private Sub cStep_UpdateIteratorVersion() Call mcStep.UpdateIteratorVersion End Sub Private Function cStep_IteratorCount() As Long cStep_IteratorCount = mcStep.IteratorCount End Function Private Sub cStep_UnloadIterators() Call mcStep.UnloadIterators End Sub Private Sub cStep_DeleteIterator(cItRecord As cIterator) Call mcStep.DeleteIterator(cItRecord) End Sub Private Property Get cStep_IteratorName() As String cStep_IteratorName = mcStep.IteratorName End Property Private Property Let cStep_IteratorName(ByVal RHS As String) mcStep.IteratorName = RHS	End Property Private Sub cStep_SaveIterators() Call mcStep.SaveIterators End Sub Private Sub cStep_LoadIterator(cItRecord As cIterator) Call mcStep.LoadIterator(cItRecord) End Sub Private Property Let cStep_Position(ByVal RHS As Long) mcStep.Position = RHS End Property Private Sub cStep_InsertIterator(cItRecord As cIterator) Call mcStep.InsertIterator(cItRecord) End Sub Private Function cStep_Iterators() As Variant cStep_Iterators = mcStep.Iterators End Function Private Sub cStep_ModifyIterator(cItRecord As cIterator) Call mcStep.ModifyIterator(cItRecord) End Sub Private Sub cStep_RemoveIterator(cItRecord As cIterator) Call mcStep.RemoveIterator(cItRecord) End Sub Private Sub cStep_UpdateIterator(cItRecord As cIterator) Call mcStep.UpdateIterator(cItRecord) End Sub Private Sub cStep_AddIterator(cItRecord As cIterator) Call mcStep.AddIterator(cItRecord) End Sub Private Property Get cStep_Position() As Long cStep_Position = mcStep.Position End Property Private Function cStep_Clone(Optional cCloneStep As cStep) As cStep Dim cNewManager As cManager Set cNewManager = New cManager Set cStep_Clone = mcStep.Clone(cNewManager) End Function	Private Property Get cStep_IndOperation() As Operation cStep_IndOperation = mcStep.IndOperation End Property Private Property Let cStep_IndOperation(ByVal RHS As Operation) mcStep.IndOperation = RHS End Property Private Property Get cStep_NextStepId() As Long cStep_NextStepId = mcStep.NextStepId End Property Private Property Let cStep_OutputFile(ByVal RHS As String) mcStep.OutputFile = RHS End Property Private Property Get cStep_OutputFile() As String cStep_OutputFile = mcStep.OutputFile End Property Private Property Let cStep_ErrorFile(ByVal RHS As String) mcStep.ErrorFile = RHS End Property Private Property Get cStep_ErrorFile() As String cStep_ErrorFile = mcStep.ErrorFile End Property Private Property Let cStep_LogFile(ByVal RHS As String) ' mcStep.LogFile = RHS End Property Private Property Get cStep_LogFile() As String ' cStep_LogFile = mcStep.LogFile End Property Private Property Let cStep_ArchivedFlag(ByVal RHS As Boolean) mcStep.ArchivedFlag = RHS End Property Private Property Get cStep_ArchivedFlag() As Boolean cStep_ArchivedFlag = mcStep.ArchivedFlag End Property Private Property Get cStep_NodeDB() As DAO.Database
---	---	--

Set cStep_NodeDB = mcStep.NodeDB End Property Private Sub Class_Initialize() ' Create the object Set mcStep = New cStep ' Initialize the object with valid values for a manager step ' The global flag should be the first field to be initialized ' since subsequent validations might try to check if the ' step being created is global mcStep.GlobalFlag = False ' mcStep.GlobalRunMethod = gintNoOption mcStep.StepType = gintManagerStep ' Since the manager step does not take any action, the step ' text and file name will always be empty mcStep.StepText = gstrEmptyString mcStep.StepTextFile = gstrEmptyString ' Since the manager step does not take any action, execution ' properties for the step will be empty mcStep.ExecutionMechanism = gintNoOption mcStep.FailureDetails = gstrEmptyString mcStep.ContinuationCriteria = gintNoOption End Sub Private Sub Class_Terminate() ' Remove the step object Set mcStep = Nothing End Sub Private Sub cStep_Add() ' Call the Add method of the step class to carry out the insert mcStep.Add End Sub Private Property Get cStep_ContinuationCriteria() As ContinuationCriteria cStep_ContinuationCriteria = mcStep.ContinuationCriteria End Property Private Property Let cStep_ContinuationCriteria(ByVal RHS As ContinuationCriteria) ' Since a manager step cannot take any action, the continuation ' criteria property does not apply to it mcStep.ContinuationCriteria = gintNoOption End Property Private Property Let cStep_DegreeParallelism(ByVal RHS As String)	mcStep.DegreeParallelism = RHS End Property Private Property Get cStep_DegreeParallelism() As String cStep_DegreeParallelism = mcStep.DegreeParallelism End Property Private Sub cStep_DeleteStep() On Error GoTo cStep_DeleteStepErr mstrSource = mstrModuleName & "cStep_DeleteStep" mcStep.Delete Exit Sub cStep_DeleteStepErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_DeleteStep" On Error GoTo 0 Err.Raise vbObjectError + errDeleteStepFailed, _ mstrSource, _ LoadResString(errDeleteStepFailed) End Sub Private Property Get cStep_EnabledFlag() As Boolean cStep_EnabledFlag = mcStep.EnabledFlag End Property Private Property Let cStep_EnabledFlag(ByVal RHS As Boolean) mcStep.EnabledFlag = RHS End Property Private Property Let cStep_ExecutionMechanism(ByVal RHS As ExecutionMethod) ' Since a manager step cannot take any action, the Execution ' Mechanism property does not apply to it mcStep.ExecutionMechanism = gintNoOption End Property Private Property Get cStep_ExecutionMechanism() As ExecutionMethod cStep_ExecutionMechanism = mcStep.ExecutionMechanism End Property Private Property Let cStep_FailureDetails(ByVal RHS As String) ' Since a manager step cannot take any action, the Failure ' Details property does not apply to it mcStep.FailureDetails = gstrEmptyString	End Property Private Property Get cStep_FailureDetails() As String cStep_FailureDetails = mcStep.FailureDetails End Property Private Property Get cStep_GlobalFlag() As Boolean cStep_GlobalFlag = mcStep.GlobalFlag End Property Private Property Let cStep_GlobalFlag(ByVal RHS As Boolean) ' Set the global flag to false - this flag is initialized when ' an instance of the class is created. Just making sure that ' nobody changes the value inadvertently mcStep.GlobalFlag = False End Property Private Sub cStep_Modify() ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Let cStep_ParentStepId(ByVal RHS As Long) mcStep.ParentStepId = RHS End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String) mcStep.ParentVersionNo = RHS End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo
---	--	--

End Property	Private Property Get cStep_StepTextFile() As String	gstrSource, _ LoadResString(errValidateFailed)
Private Property Let cStep_StepId(ByVal RHS As Long)	cStep_StepTextFile = mcStep.StepTextFile	End If
mcStep.StepId = RHS	End Property	mcStep.Validate
End Property	Private Property Let cStep_StepType(RHS As gintStepType)	Exit Sub
Private Property Get cStep_StepId() As Long	mcStep.StepType = gintManagerStep	cStep_ValidateErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_Validate"
cStep_StepId = mcStep.StepId	End Property	On Error GoTo 0
End Property	Private Property Get cStep_StepType() As gintStepType	Err.Raise vbObjectError + errValidateFailed, _ mstrSource, _ LoadResString(errValidateFailed)
Private Property Let cStep_StepLabel(ByVal RHS As String)	cStep_StepType = mcStep.StepType	End Sub
mcStep.StepLabel = RHS	End Property	Private Property Let cStep_VersionNo(ByVal RHS As String)
End Property	Private Sub cStep_Validate() ' The validate routines for each of the steps will ' carry out the specific validations for the type and ' call the generic validation routine	mcStep.VersionNo = RHS
Private Property Get cStep_StepLabel() As String	On Error GoTo cStep_ValidateErr mstrSource = mstrModuleName & "cStep_Validate"	End Property
cStep_StepLabel = mcStep.StepLabel	' Validations specific to manager steps	Private Property Get cStep_VersionNo() As String
End Property	' Check if the step text or a file name has been ' specified If Not StringEmpty(mcStep.StepText) Or Not StringEmpty(mcStep.StepTextFile) Then ShowError	cStep_VersionNo = mcStep.VersionNo
Private Property Let cStep_StepLevel(ByVal RHS As Integer)	errTextAndFileNullForManager On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	End Property
mcStep.StepLevel = RHS	End If	Private Property Let cStep_WorkspaceId(ByVal RHS As Long)
End Property	If mcStep.ExecutionMechanism <> gintNoOption Then ShowError errExecutionMechanismInvalid On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	mcStep.WorkspaceId = RHS
Private Property Get cStep_StepLevel() As Integer	End If	End Property
cStep_StepLevel = mcStep.StepLevel	If mcStep.FailureDetails <> gstrEmptyString Then ShowError errFailureDetailsNullForMgr On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ gstrSource, _ LoadResString(errValidateFailed)	Private Property Get cStep_WorkspaceId() As Long
End Property	End If	cStep_WorkspaceId = mcStep.WorkspaceId
Private Property Let cStep_StepText(ByVal RHS As String)		End Property
' Since the manager step does not take any action, the step ' text and file name will always be empty mcStep.StepText = gstrEmptyString		VERSION 1.0 CLASS BEGIN MultiUse = -1 True END Attribute VB_Name = "cNode" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cNode.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Defines the properties that an object has to implement. ' Contact: Reshma Tharamal (reshmat@microsoft.com) '
End Property		Option Explicit
Private Property Get cStep_StepText() As String		Public Property Get IndOperation() As Operation
cStep_StepText = mcStep.StepText		End Property
End Property		Public Property Let IndOperation(ByVal vdata As Operation)
Private Property Let cStep_StepTextFile(ByVal RHS As String)		End Property
' Since the manager step does not take any action, the step ' text and file name will always be empty mcStep.StepTextFile = gstrEmptyString		Public Sub Validate() End Sub
End Property		Public Property Get Value() As String
		End Property
		Public Property Let Value(ByVal vdata As String)

End Property Public Property Get NodeDB() As Database End Property Public Property Set NodeDB(vdata As Database) End Property Public Property Get Position() As Long End Property Public Property Let Position(ByVal vdata As Long) End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 True END Attribute VB_Name = "cNodeCollections" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cNodeCollections.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Implements an array of objects. ' Contact: Reshma Tharamal '(reshmat@microsoft.com) Option Explicit ' Node counter Private mlngNodeCount As Long Private mdbNodeDb As Database Private mcarrNodes() As Object ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cNodeCollections." Public Property Set Item(ByVal Position As Long, _ ByVal objNode As Object) ' Returns the element at the passed in position in the array If Position >= 0 And Position < mlngNodeCount Then Set mcarrNodes(Position) = objNode Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist) End If End Property Public Property Get Item(ByVal Position As Long) As Object Attribute Item.VB_UserMemId = 0 ' Returns the element at the passed in position in the array If Position >= 0 And Position < mlngNodeCount Then Set Item = mcarrNodes(Position)	Else On Error GoTo 0 Err.Raise vbObjectError + errItemDoesNotExist, mstrSource, _ LoadResString(errItemDoesNotExist) End If End Property Public Sub Commit(ByVal cSaveObj As Object, _ ByVal lngIndex As Long) ' This procedure checks if any changes have been made to the ' passed in object. If so, it calls the corresponding method ' to commit the changes. On Error GoTo CommitErr mstrSource = mstrModuleName & "Commit" Select Case cSaveObj.IndOperation Case QueryOp ' No changes were made to the queried parameter. ' Do nothing Case InsertOp cSaveObj.Add cSaveObj.IndOperation = QueryOp Case UpdateOp cSaveObj.Modify cSaveObj.IndOperation = QueryOp Case DeleteOp cSaveObj.Delete ' Now we can remove the record from the array Call Unload(lngIndex) End Select Exit Sub CommitErr: LogErrors Errors mstrSource = mstrModuleName & "Commit" On Error GoTo 0 Err.Raise vbObjectError + errCommitFailed, _ mstrSource, _ LoadResString(errCommitFailed) End Sub Public Sub Save(ByVal lngWorkspace As Long) ' Calls a procedure to commit all changes for the passed ' in workspace. Dim lngIndex As Long On Error GoTo SaveErr ' Find all parameters in the array with a matching workspace id ' It is important to step backwards through the array, since ' we delete parameter records as we go along! For lngIndex = mlngNodeCount - 1 To 0 Step -1	If mcarrNodes(lngIndex).WorkspaceId = lngWorkspace Then ' Call a procedure to commit all changes to the ' parameter record, if any Call Commit(mcarrNodes(lngIndex), lngIndex) End If Next lngIndex Exit Sub SaveErr: LogErrors Errors mstrSource = mstrModuleName & "Save" On Error GoTo 0 Err.Raise vbObjectError + errSaveFailed, _ mstrSource, _ LoadResString(errSaveFailed) End Sub Public Property Get Count() As Long Count = mlngNodeCount End Property Public Property Get NodeDB() As Database Set NodeDB = mdbNodeDb End Property Public Property Set NodeDB(vdata As Database) Set mdbNodeDb = vdata End Property Public Sub Load(cNodeToLoad As Object) ' Adds the passed in object to the array On Error GoTo LoadErr ' If this procedure is called by the add to array procedure, ' the database object has already been initialized If cNodeToLoad.NodeDB Is Nothing Then ' All the Nodes will be initialized with the database ' objects before being added to the array Set cNodeToLoad.NodeDB = mdbNodeDb End If ReDim Preserve mcarrNodes(mlngNodeCount) ' Set the newly added element in the array to the passed in Node cNodeToLoad.Position = mlngNodeCount Set mcarrNodes(mlngNodeCount) = cNodeToLoad mlngNodeCount = mlngNodeCount + 1 Exit Sub LoadErr: LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errLoadFailed, mstrModuleName & "Load", _ LoadResString(errLoadFailed)
---	---	---

```

End Sub
Public Sub Unload(IngDeletePosition As Long)
    ' Unloads the passed in object from the array

    On Error GoTo UnloadErr

    If IngDeletePosition < (mLngNodeCount - 1) Then

        ' Set the Node at the position being deleted to
        ' the last Node in the Node array
        Set mcarrNodes(IngDeletePosition) = mcarrNodes(mLngNodeCount - 1)

    mcarrNodes(IngDeletePosition).Position = IngDeletePosition
    End If

    ' Delete the last Node from the array
    mLngNodeCount = mLngNodeCount - 1
    If mLngNodeCount > 0 Then
        ReDim Preserve mcarrNodes(0 To mLngNodeCount - 1)
    Else
        ReDim mcarrNodes(0)
    End If

    Exit Sub

UnloadErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Unload"
    On Error GoTo 0
    Err.Raise vbObjectError + errUnloadFailed, _
        mstrSource, _
        LoadResString(errUnloadFailed)

End Sub
Public Sub Delete(IngDeletePosition As Long)
    ' Deletes the object at the specified position in the
    ' array

    Dim cDeleteObj As Object

    On Error GoTo DeleteErr
    mstrSource = mstrModuleName & "Delete"

    Set cDeleteObj = mcarrNodes(IngDeletePosition)

    If cDeleteObj.IndOperation = InsertOp Then
        ' If we are deleting a record that has just been inserted,
        ' blow it away
        Call Unload(IngDeletePosition)
    Else
        ' Set the operation for the deleted object to indicate a
        ' delete - we actually delete the element only at the time
        ' of a save operation
        cDeleteObj.IndOperation = DeleteOp
    End If

    Exit Sub

```

```

DeleteErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Delete"
    On Error GoTo 0
    Err.Raise vbObjectError + errDeleteFailed, _
        mstrSource, _
        LoadResString(errDeleteFailed)

End Sub
Public Sub Modify(cModifiedNode As Object)
    ' Sets the object at the passed in position to the
    ' modified object passed in

    On Error GoTo ModifyErr

    ' First check if the record is valid - all objects that
    ' use this collection class must have a
    ' Validate routine
    cModifiedNode.Validate

    ' If we are updating a record that hasn't yet been inserted,
    ' do not change the operation indicator - or we try to update
    ' a non-existent record
    If cModifiedNode.IndOperation <> InsertOp Then
        ' Set the operations to indicate an update
        cModifiedNode.IndOperation = UpdateOp
    End If

    ' Modify the object at the queried position - the Position
    ' will be maintained by this class
    Set mcarrNodes(cModifiedNode.Position) = cModifiedNode

    Exit Sub

ModifyErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Modify"
    On Error GoTo 0
    Err.Raise vbObjectError + errModifyFailed, _
        mstrSource, _
        LoadResString(errModifyFailed)

End Sub
Public Sub Add(cNodeToAdd As Object)

    On Error GoTo AddErr

    Set cNodeToAdd.NodeDB = mdbNodeDb

    ' First check if the record is valid
    cNodeToAdd.Validate

    ' Set the operation to indicate an insert
    cNodeToAdd.IndOperation = InsertOp

    ' Call a procedure to load the record in the array
    Call Load(cNodeToAdd)

    Exit Sub

AddErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Add"
    On Error GoTo 0

```

```

Err.Raise vbObjectError + errAddFailed, _
    mstrSource, _
    LoadResString(errAddFailed)

End Sub

Private Sub Class_Terminate()

    ReDim mcarrNodes(0)
    mLngNodeCount = 0

End Sub

Attribute VB_Name = "Common"
' FILE: Common.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Module containing common functionality throughout
' StepMaster
' Contact: Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

Private Const mstrModuleName As String = "Common."

' Used to separate the variable data from the constant error
' message being raised when a context-sensitive error is displayed
Private Const mintDelimiter As String = " : "
Private Const mstrFormatString = "mmdyy"

' Identifiers for the different labels that need to be loaded
' into the tree view for each workspace
Public Const mstrWorkspacePrefix = "W"
Public Const mstrParameterPrefix = "P"
Public Const mstrParamConnectionPrefix = "C"
Public Const mstrConnectionDtlPrefix = "N"
Public Const mstrParamExtensionPrefix = "E"
Public Const mstrParamBuiltInPrefix = "B"
Public Const gstrGlobalStepPrefix = "G"
Public Const gstrManagerStepPrefix = "M"
Public Const gstrWorkerStepPrefix = "S"
Public Const gstrDummyPrefix = "D"
Public Const mstrLabelPrefix = "L"
Public Const mstrInstancePrefix = "I"
Public Function LabelStep(IngWorkspaceIdentifier As Long) As String
    ' Returns the step label for the workspace identifier passed in
    ' Basically this is a wrapper around the MakeKeyValid function

    LabelStep = MakeKeyValid(gintStepLabel, gintStepLabel, IngWorkspaceIdentifier)

End Function

Public Function JulianDateToString(dt64Bit As Currency) As String

    Dim lYear As Long
    Dim lMonth As Long
    Dim lDay As Long
    Dim lHour As Long
    Dim lMin As Long

```

<pre> Dim lSec As Long Dim lMs As Long Call JulianToTime(dt64Bit, lYear, lMonth, lDay, lHour, lMin, lSec, lMs) JulianDateToString = Format\$(lYear, gsYearFormat) & gsDateSeparator & _ Format\$(lMonth, gsDtFormat) & gsDateSeparator & _ Format\$(lDay, gsDtFormat) & gstrBlank & _ Format\$(lHour, gsTmFormat) & gsTimeSeparator & _ Format\$(lMin, gsTmFormat) & gsTimeSeparator & _ Format\$(lSec, gsTmFormat) & gsMsSeparator & _ Format\$(lMs, gsMSecondFormat) End Function Public Sub DeleteFile(strFile As String, Optional ByVal bCheckIfEmpty As Boolean = False) ' Ensure that there is only a single file of the name before delete, since ' Kill supports wildcards and can potentially delete a number of files Dim strTemp As String If CheckFileExists(strFile) Then If bCheckIfEmpty Then If FileLen(strFile) = 0 Then Kill strFile End If Else Kill strFile End If End If End Sub Public Function CheckFileExists(strFile As String) As Boolean ' Returns true if the passed in file exists ' Raises an error if multiple files are found (filename contains a wildcard) CheckFileExists = False If Not StringEmpty(Dir(strFile)) Then If Not StringEmpty(Dir()) Then On Error GoTo 0 Err.Raise vbObjectError + errDeleteSingleFile, _ mstrModuleName & "DeleteFile", LoadResString(errDeleteSingleFile) End If CheckFileExists = True End If End Function Public Function GetVersionString() As String GetVersionString = "Version " & gsVersion End Function Function IsLabel(strKey As String) As Boolean ' The tree view control on frmMain can contain two types of ' nodes - </pre>	<pre> ' 1. Nodes that contain data for the workspace - this could ' be data for the different types of steps or parameters ' 2. Nodes that display static data - these kind of nodes ' are referred to as label nodes e.g. "Global Steps" is a ' label node ' This function returns True if the passed in key corresponds ' to a label node IsLabel = InStr(strKey, mstrLabelPrefix) > 0 End Function Function MakeKeyValid(lngIdentifier As Long, _ intTypeOfNode As Integer, _ Optional ByVal WorkspaceId As Long = 0, _ Optional ByVal InstanceId As Long = 0) As String ' We use a numbering scheme while loading the tree view with ' all node data, since it needs a unique key and we want to ' use the key to identify the data it contains. ' Moreover, add a character to the beginning of the identifier ' so that the tree view control accepts it as a valid string, ' viz. "456" doesn't work, so change it to "W456" ' The general scheme is to concatenate a Label with the Identifier ' e.g A Global Step Node will have the Label, G and the Step Id ' concatenated to form the unique key ' The list of all such node types is given below ' 1. "W" + Workspace_Id for Workspace nodes ' 2. "P" + Parameter_Id for Parameter nodes ' 3. "M" + Step_Id for Manager Step nodes ' 4. "S" + Step_Id for Worker Step nodes ' 5. "G" + Step_Id for Global Step nodes ' 6. Instance_id + "I" + Step_Id for Instance nodes ' 7. Workspace_id + "L" + the label identifier = node type for all Label nodes ' Since the manager, worker and global steps are stored in the ' same table and the step identifiers will always be unique, we ' can use the same character as the prefix, but this is a ' convenient way to know the type of step being processed. ' The workspace id is appended to the label identifier to make ' it unique, since multiple workspaces may be open during a session ' Strip the prefix characters off while saving the Ids to the db Dim strPrefixChar As String On Error GoTo MakeKeyValidErr gstrSource = mstrModuleName & "MakeKeyValid" Select Case intTypeOfNode </pre>	<pre> Case gintWorkspace strPrefixChar = mstrWorkspacePrefix Case gintGlobalStep strPrefixChar = gstrGlobalStepPrefix Case gintManagerStep strPrefixChar = gstrManagerStepPrefix Case gintWorkerStep strPrefixChar = gstrWorkerStepPrefix Case gintRunManager, gintRunWorker If InstanceId = 0 Then On Error GoTo 0 Err.Raise vbObjectError + errMandatoryParameterMissing, _ gstrSource, _ LoadResString(errMandatoryParameterMissing) End If ' Concatenate the instance identifier and the step ' identifier to form a unique key strPrefixChar = Trim\$(Str\$(InstanceId)) & mstrInstancePrefix Case gintParameter strPrefixChar = mstrParameterPrefix Case gintNodeParamConnection strPrefixChar = mstrParamConnectionPrefix Case gintConnectionDtl strPrefixChar = mstrConnectionDtlPrefix Case gintNodeParamExtension strPrefixChar = mstrParamExtensionPrefix Case gintNodeParamBuiltIn strPrefixChar = mstrParamBuiltInPrefix Case gintGlobalsLabel, gintParameterLabel, gintParamConnectionLabel, _ gintConnDtlLabel, _ gintParamExtensionLabel, gintParamBuiltInLabel, gintGlobalStepLabel, _ gintStepLabel If WorkspaceId = 0 Then ' The Workspace Id has to be specified for a label node ' Otherwise it will not be possible to generate unique label ' identifiers if multiple workspaces are open On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceIdMandatory, _ gstrSource, _ LoadResString(errWorkspaceIdMandatory) End If ' For all labels, the workspace identifier and the ' label prefix are concatenated to form the key strPrefixChar = Trim\$(Str\$(WorkspaceId)) & mstrLabelPrefix Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidNodeType, _ gstrSource, _ LoadResString(errInvalidNodeType) End Select MakeKeyValid = strPrefixChar & Trim\$(Str\$(lngIdentifier)) Exit Function MakeKeyValidErr: Call LogErrors(Errors) On Error GoTo 0 </pre>
---	--	--

<pre> Err.Raise vbObjectError + errMakeKeyValidFailed, _ gstrSource, _ LoadResString(errMakeKeyValidFailed) End Function Function MakeIdentifierValid(strKey As String) As Long ' Returns the Identifier corresponding to ' the passed in key ' (Reverse of what was done in ' MakeKeyValid) On Error GoTo MakeIdentifierValidErr If IsLabel(strKey) Then ' If the key corresponds to a label node, ' the identifier ' appears to the right of the label prefix MakeIdentifierValid = Val(Mid(strKey, InStr(strKey, mstrLabelPrefix) + 1)) ElseIf InStr(strKey, mstrInstancePrefix) = 0 Then ' For all other nodes, stripping the first ' character off ' returns a valid Id MakeIdentifierValid = Val(Mid(strKey, 2)) Else ' Instance node - strip of all characters ' till the ' instance prefix MakeIdentifierValid = Val(Mid(strKey, InStr(strKey, mstrInstancePrefix) + 1)) End If Exit Function MakeIdentifierValidErr: Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errMakeIdentifierValidFailed, _ mstrModuleName & "MakeIdentifierValid", _ LoadResString(errMakeIdentifierValidFailed) End Function Public Function IsInstanceNode(strNodeKey As String) As Boolean ' Returns true if the passed in node key ' corresponds to a step instance IsInstanceNode = InStr(strNodeKey, mstrInstancePrefix) > 0 End Function Public Function IsBuiltInLabel(strNodeKey As String) As Boolean ' Returns true if the passed in node key ' corresponds to a step instance IsBuiltInLabel = (IsLabel(strNodeKey) And _ (MakeIdentifierValid(strNodeKey) = gintParamBuiltInLabel)) End Function Public Sub ShowBusy() </pre>	<pre> ' Modifies the mousepointer to indicate that the ' application is busy On Error Resume Next Screen.MousePointer = vbHourglass End Sub Public Sub ShowFree() ' Modifies the mousepointer to indicate that ' the ' application has finished processing and is ' ready ' to accept user input On Error Resume Next Screen.MousePointer = vbDefault End Sub Public Function InstrR(strMain As String, _ strSearch As String) As Integer ' Finds the last occurrence of the passed in ' string Dim intPos As Integer Dim intPrev As Integer On Error GoTo InstrRErr intPrev = intPos intPos = InStr(1, strMain, strSearch) Do While intPos > 0 intPrev = intPos intPos = InStr(intPos + 1, strMain, strSearch) Loop InstrR = intPrev Exit Function InstrRErr: Call LogErrors(Errors) gstrSource = mstrModuleName & "InstrR" On Error GoTo 0 Err.Raise vbObjectError + errInstrRFailed, _ gstrSource, _ LoadResString(errInstrRFailed) End Function Public Function GetDefaultDir(lWspId As Long, WspParameters As cArrParameters) As String Dim sDir As String sDir = SubstituteParameters(_ gstrEnvVarSeparator & PARAM_DEFAULT_DIR & gstrEnvVarSeparator, _ lWspId, WspParameters:=WspParameters) MakePathValid (sDir & gstrFileSeparator & "a.txt") GetDefaultDir = GetShortName(sDir) If StringEmpty(GetDefaultDir) Then GetDefaultDir = App.Path End If End Function </pre>	<pre> Public Sub AddArrayElement(ByRef arrNodes() As Object, _ ByVal objToAdd As Object, _ ByRef lngCount As Long) ' Adds the passed in object to the array On Error GoTo AddArrayElementErr ' Increase the array dimension and add the object ' to it ReDim Preserve arrNodes(lngCount) Set arrNodes(lngCount) = objToAdd lngCount = lngCount + 1 Exit Sub AddArrayElementErr: LogErrors Errors gstrSource = mstrModuleName & "AddArrayElement" On Error GoTo 0 Err.Raise vbObjectError + errAddArrayElementFailed, _ gstrSource, _ LoadResString(errAddArrayElementFailed) End Sub Public Function CheckForNullField(rstRecords As Recordset, strFieldName As String) As String ' Returns an empty string if a given field is null On Error GoTo CheckForNullFieldErr If IsNull(rstRecords.Fields(strFieldName)) Then CheckForNullField = gstrEmptyString Else CheckForNullField = rstRecords.Fields(strFieldName) End If Exit Function CheckForNullFieldErr: Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errCheckForNullFieldFailed, _ mstrModuleName & "CheckForNullField", _ _ LoadResString(errCheckForNullFieldFailed) End Function Public Function ErrorOnNullField(rstRecords As Recordset, strFieldName As String) As Variant ' If a given field is null, raises an error ' Else, returns the field value in a variant ' The calling function must convert the return ' value to the ' appropriate type On Error GoTo ErrorOnNullFieldErr gstrSource = mstrModuleName & "ErrorOnNullField" If IsNull(rstRecords.Fields(strFieldName)) Then On Error GoTo 0 Err.Raise vbObjectError + errMandatoryFieldNull, _ gstrSource, _ strFieldName & mintDelimiter & LoadResString(errMandatoryFieldNull) Else </pre>
--	--	---

```

        ErrorOnNullField =
rstRecords.Fields(strFieldName)
    End If
    Exit Function

ErrorOnNullFieldErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError +
errUnableToCheckNull, _
        gstrSource, _
        strFieldName & mintDelimiter &
LoadResString(errUnableToCheckNull)

End Function
Public Function
StringEmpty(strCheckString As String) As
Boolean

    StringEmpty = (strCheckString =
gstrEmptyString)

End Function
Public Function
GetIteratorValue(cStepIterators As
cRunCollt, _
    ByVal strItName As String)

    Dim lngIndex As Long
    Dim strValue As String

    On Error GoTo GetIteratorValueErr
    gstrSource = mstrModuleName &
"GetIteratorValue"

    ' Find the iterator in the Iterators
collection
    For lngIndex = 0 To cStepIterators.Count
- 1
        If
cStepIterators(lngIndex).IteratorName =
strItName Then
            strValue =
cStepIterators(lngIndex).Value
            Exit For
        End If
    Next lngIndex

    If lngIndex > cStepIterators.Count - 1
Then
        ' The iterator has not been defined for
the branch
        ' Raise an error
        On Error GoTo 0
        Err.Raise vbObjectError +
errParamNameInvalid, _
            gstrSource, _

LoadResString(errParamNameInvalid)
    End If

    GetIteratorValue = strValue
    Exit Function

GetIteratorValueErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    gstrSource = mstrModuleName &
"GetIteratorValue"
    On Error GoTo 0
    Err.Raise vbObjectError +
errGetParamValueFailed, _
        gstrSource, _

```

```

LoadResString(errGetParamValueFailed)

End Function
Public Function SubstituteParameters(ByVal
strComString As String, _
    ByVal lngWorkspaceId As Long, _
    Optional StepIterators As cRunCollt =
Nothing, _
    Optional WspParameters As
cArrParameters = Nothing) As String
    ' This function substitutes all parameter
names and
    ' environment variables in the passed in
string with
    ' their values. It also substitutes the value for
the
    ' iterators, if any.
    ' Since the syntax is to enclose parameter
names and
    ' environment variables in "%", we check if
a given
    ' variable is a parameter - if so, we substitute
the
    ' parameter value - else we try to get the
value from
    ' the environment

    Dim intPos As Integer
    Dim intEndPos As Integer
    Dim strEnvVariable As String
    Dim strValue As String
    Dim strCommand As String
    Dim cTempStr As cStringSM

    ' Initialize the return value of the function to
the
    ' passed in command
    strCommand = strComString

    If WspParameters Is Nothing Then Set
WspParameters = gcParameters

    Set cTempStr = New cStringSM

    intPos = InStr(strCommand,
gstrEnvVarSeparator)
    Do While intPos <> 0
        If Mid(strCommand, intPos + 1, 1) =
gstrEnvVarSeparator Then
            ' Wildcard character - to be substituted
by a single % - later!
            intPos = intPos + 2
            If intPos > Len(strCommand) Then
Exit Do
            Else
                ' Extract the environment variable from
the passed
                ' in string
                intEndPos = InStr(intPos + 1,
strCommand, gstrEnvVarSeparator)

                If intEndPos > 0 Then
                    strEnvVariable = Mid(strCommand,
intPos + 1, intEndPos - intPos - 1)
                Else
                    On Error GoTo 0
                    Err.Raise vbObjectError +
errParamSeparatorMissing, _
                        gstrSource, _

LoadResString(errParamSeparatorMissing)
                End If
                strValue = gstrEmptyString

```

```

        ' Get the value of the variable and call a
function
        ' to replace the variable with it's value
        strValue = GetValue(strEnvVariable,
lngWorkspaceId, StepIterators, WspParameters)
        ' The function raises an error if the variable
is
        ' not found
        strCommand =
cTempStr.ReplaceSubString(strCommand, _
            gstrEnvVarSeparator & strEnvVariable
& gstrEnvVarSeparator, _
                strValue)
        End If

        intPos = InStr(intPos, strCommand,
gstrEnvVarSeparator)
        Loop

        strCommand =
cTempStr.ReplaceSubString(strCommand, _
            gstrEnvVarSeparator &
gstrEnvVarSeparator, gstrEnvVarSeparator)

        Set cTempStr = Nothing
        SubstituteParameters = strCommand

End Function
Private Function GetValue(ByVal strParameter As
String, _
    ByVal lngWorkspaceId As Long, _
    cStepIterators As cRunCollt, _
    WspParameters As cArrParameters) As String
    ' This function returns the value for the passed in
' parameter - it may be a workspace parameter, an
' environment variable or an iterator

    Dim intPos As Integer
    Dim intEndPos As Integer
    Dim strVariable As String
    Dim strValue As String
    Dim cParamRec As cParameter

    On Error GoTo GetValueErr

    ' Initialize the return value of the function to the
' empty
    strValue = gstrEmptyString

    intPos = InStr(strParameter,
gstrEnvVarSeparator)
    If intPos > 0 Then
        ' Extract the variable from the passed in string
        intEndPos = InStr(intPos + 1, strParameter,
gstrEnvVarSeparator)
        If intEndPos = 0 Then
            intEndPos = Len(strParameter)
        End If

        strVariable = Mid(strParameter, intPos + 1,
intEndPos - intPos - 1)
        Else
            ' The separator charactor has not been passed
in -
            ' try to find the value of the passed in
parameter
            strVariable = strParameter
        End If

        If Not StringEmpty(strVariable) Then
            ' Check if this is the timestamp parameter first
            If strVariable = gstrTimeStamp Then
                strValue = Format$(Now, mstrFormatString,
_

```



```

vbUseSystemDayOfWeek,
vbUseSystem)
Else
' Try to find a parameter for the
workspace with
' the same name
Set cParamRec =
WspParameters.GetParameterValue(IngWor
kspaceId, _
strVariable)
If cParamRec Is Nothing Then
If Not cStepIterators Is Nothing
Then
' If the string is not a parameter,
then check
' if it is an iterator
strValue =
GetIteratorValue(cStepIterators, strVariable)
End If

If StringEmpty(strValue) Then
' Neither - Check if it is an
environment variable
strValue =
Environ$(strVariable)
If StringEmpty(strValue) Then
On Error GoTo 0
WriteError
errSubValuesFailed, _
OptArgs:="Invalid
parameter: " & gstrSQ & strVariable &
gstrSQ
Err.Raise vbObjectError +
errSubValuesFailed, _
mstrModuleName &
"GetValue", _

LoadResString(errSubValuesFailed) &
"Invalid parameter: " & gstrSQ &
strVariable & gstrSQ
End If
End If
Else
strValue =
cParamRec.ParameterValue
End If
End If
End If

GetValue = strValue

Exit Function

GetValueErr:
If Err.Number = vbObjectError +
errParamNameInvalid Then
' If the parameter has not been defined
for the
' workspace then check if it is an
environment
' variable
Resume Next
End If

' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName &
"GetValue"
WriteError errSubValuesFailed,
gstrSource, "Parameter: " & gstrSQ &
strVariable & gstrSQ
On Error GoTo 0
Err.Raise vbObjectError +
errSubValuesFailed, _

```

```

gstrSource, _
LoadResString(errSubValuesFailed) &
"Parameter: " & gstrSQ & strVariable &
gstrSQ

End Function

Public Function SQLFixup(strField As String)
As String
' Returns a string that can be executed by
SQL Server

Dim cMyStr As New cStringSM
Dim strTemp As String

On Error GoTo SQLFixupErr

strTemp = strField
SQLFixup = strTemp

' Single-quotes have to be replaced by two
single-quotes,
' since a single-quote is the identifier
delimiter
' character - call a procedure to do the
replace
' SQLFixup =
cMyStr.ReplaceSubString(strTemp, gstrDQ,
"\\" & gstrDQ)

' Replace pipe characters with the
corresponding chr function
' SQLFixup =
cMyStr.ReplaceSubString(strTemp, gstrDQ,
gstrDQ & gstrDQ)

Exit Function

SQLFixupErr:
gstrSource = mstrModuleName &
"SQLFixup"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errMakeFieldValidFailed, _
gstrSource,
LoadResString(errMakeFieldValidFailed)

End Function

Public Function TranslateStepLabel(sLabel As
String) As String
' Translates the passed in step label to a valid
file name
' All characters in the label that are invalid
for filenames (viz. \ / : * ? " < > |)
' and spaces are substituted with underscores
- also ensure that the resulting filename
' is not greater than 255 characters
Dim cTempStr As New cStringSM
TranslateStepLabel =
cTempStr.ReplaceSubString(sLabel,
gstrFileSeparator, "_")
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "/", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, ":", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "*", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLab
el, "?", gstrUnderscore)

```

```

TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
gstrDQ, gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
"<", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
">", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
"|", gstrUnderscore)
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
gstrBlank, gstrUnderscore)

' Commas are substituted with underscores since
the command shell uses a comma to
' delimit commands
TranslateStepLabel =
cTempStr.ReplaceSubString(TranslateStepLabel,
",", gstrUnderscore)

If Len(TranslateStepLabel) > MAX_PATH Then
TranslateStepLabel = Mid(TranslateStepLabel,
1, MAX_PATH)
End If

End Function

Public Function TypeOfObject(ByVal objNode As
Object) As Integer
' Determines the type of object that is passed in

On Error GoTo TypeOfObjectErr
gstrSource = mstrModuleName &
"TypeOfObject"

Select Case TypeName(objNode)
Case "cWorkspace"
TypeOfObject = gintWorkspace

Case "cParameter"
TypeOfObject = gintParameter

Case "cConnection"
TypeOfObject = gintParameterConnect

Case "cConnDtl"
TypeOfObject = gintConnectionDtl

Case "cGlobalStep"
TypeOfObject = gintGlobalStep

Case "cManager"
TypeOfObject = gintManagerStep

Case "cWorker"
TypeOfObject = gintWorkerStep

Case "cStep"
' If a step record is passed in, call a function
' to determine the type of step
TypeOfObject =
TypeOfStep(StepClass:=objNode)

Case Else
WriteError errTypeOfObjectFailed,
gstrSource, _
TypeName(objNode)
On Error GoTo 0
Err.Raise vbObjectError +
errTypeOfObjectFailed, _
gstrSource, _

```

<pre> LoadResString(errTypeOfObjectFailed) End Select Exit Function TypeOfObjectErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errTypeOfObjectFailed, _ gstrSource, _ LoadResString(errTypeOfObjectFailed) End Function Attribute VB_Name = "ConnDtlCommon" ' FILE: ConnDtlCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains functionality common across StepMaster and SMRunOnly, pertaining to connections ' Specifically, functions to load connections in an array and so on. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "ConnDtlCommon." Public Sub LoadRSInConnDtlArray(rstConns As Recordset, cConns As cConnDtls) Dim cNewConnDtl As cConnDtl On Error GoTo LoadRSInConnDtlArrayErr If rstConns.RecordCount = 0 Then Exit Sub End If rstConns.MoveFirst While Not rstConns.EOF Set cNewConnDtl = New cConnDtl ' Initialize ConnDtl values ' Call a procedure to raise an error if mandatory fields are null. cNewConnDtl.ConnNameId = ErrorOnNullField(rstConns, FLD_ID_CONN_NAME) cNewConnDtl.WorkspaceId = ErrorOnNullField(rstConns, FLD_ID_WORKSPACE) cNewConnDtl.ConnName = CStr(ErrorOnNullField(rstConns, FLD_CONN_DTL_CONNECTION_NAM E)) </pre>	<pre> cNewConnDtl.ConnectionString = CheckForNullField(rstConns, FLD_CONN_DTL_CONNECTION_STRING) cNewConnDtl.ConnType = CheckForNullField(rstConns, FLD_CONN_DTL_CONNECTION_TYPE) cConns.Load cNewConnDtl Set cNewConnDtl = Nothing rstConns.MoveNext Wend Exit Sub LoadRSInConnDtlArrayErr: LogErrors Errors gstrSource = mstrModuleName & "LoadRSInConnDtlArray" On Error GoTo 0 Err.Raise vbObjectError + errLoadRsInArrayFailed, gstrSource, _ LoadResString(errLoadRsInArrayFailed) End Sub Attribute VB_Name = "ConnectionCommon" ' FILE: ConnectionCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains functionality common across StepMaster and SMRunOnly, pertaining to connection strings ' Specifically, functions to load connections strings in an array and so on. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "ConnectionCommon." Public Sub LoadRecordsetInConnectionArray(rstConns As Recordset, cConns As cConnections) Dim cNewConnection As cConnection On Error GoTo LoadRecordsetInConnectionArrayErr If rstConns.RecordCount = 0 Then Exit Sub End If rstConns.MoveFirst While Not rstConns.EOF Set cNewConnection = New cConnection ' Initialize Connection values ' Call a procedure to raise an error if mandatory fields are null. cNewConnection.ConnectionId = ErrorOnNullField(rstConns, "connection_id") </pre>	<pre> cNewConnection.WorkspaceId = CStr(ErrorOnNullField(rstConns, FLD_ID_WORKSPACE)) cNewConnection.ConnectionName = CStr(ErrorOnNullField(rstConns, "connection_name")) cNewConnection.ConnectionValue = CheckForNullField(rstConns, "connection_value") cNewConnection.Description = CheckForNullField(rstConns, "description") cNewConnection.NoCountDisplay = CheckForNullField(rstConns, "no_count_display") cNewConnection.NoExecute = CheckForNullField(rstConns, "no_execute") cNewConnection.ParseQueryOnly = CheckForNullField(rstConns, "parse_query_only") cNewConnection.QuotedIdentifiers = CheckForNullField(rstConns, "ANSI_quoted_identifiers") cNewConnection.AnsiNulls = CheckForNullField(rstConns, "ANSI_nulls") cNewConnection.ShowQueryPlan = CheckForNullField(rstConns, "show_query_plan") cNewConnection.ShowStatsTime = CheckForNullField(rstConns, "show_stats_time") cNewConnection.ShowStatsIO = CheckForNullField(rstConns, "show_stats_io") cNewConnection.ParseOdbcMsg = CheckForNullField(rstConns, "parse_odbc_msg_prefixes") cNewConnection.RowCount = CheckForNullField(rstConns, "row_count") cNewConnection.TsqlBatchSeparator = CheckForNullField(rstConns, "tsql_batch_separator") cNewConnection.QueryTimeOut = CheckForNullField(rstConns, "query_time_out") cNewConnection.ServerLanguage = CheckForNullField(rstConns, "server_language") cNewConnection.CharacterTranslation = CheckForNullField(rstConns, "character_translation") cNewConnection.RegionalSettings = CheckForNullField(rstConns, "regional_settings") cConns.Load cNewConnection Set cNewConnection = Nothing rstConns.MoveNext Wend Exit Sub LoadRecordsetInConnectionArrayErr: LogErrors Errors gstrSource = mstrModuleName & "LoadRecordsetInConnectionArray" On Error GoTo 0 Err.Raise vbObjectError + errLoadRsInArrayFailed, gstrSource, _ LoadResString(errLoadRsInArrayFailed) End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cParameter" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cParameter.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 </pre>
--	---	---

<pre> ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a parameter. ' Contains functions to insert, update and delete ' workspace_parameters records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Option Base 0 ' Local variable(s) to hold property value(s) Private mlngWorkspaceId As Long Private mlngParameterId As Long Private mstrParameterName As String Private mstrParameterValue As String Private mstrDescription As String Private mintParameterType As Integer Private mdbStepMaster As Database Private mintOperation As Operation Private mlngPosition As Long ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cParameter." ' The cSequence class is used to generate unique parameter identifiers Private mParameterSeq As cSequence ' The StringSM class is used to carry out string operations Private mFieldValue As cStringSM ' Parameter types Public Enum ParameterType gintParameterGeneric = 0 gintParameterConnect gintParameterApplication gintParameterBuiltIn End Enum Private Sub AssignParameters(qyExec As DAO.QueryDef) ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to make them different ' from the field names. When the parameter names are ' the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" mlngWorkspaceId = prmParam.Value = Case "[p_id]" </pre>	<pre> prmParam.Value = mlngParameterId Case "[p_name]" prmParam.Value = mstrParameterName Case "[p_value]" prmParam.Value = mstrParameterValue Case "[desc]" prmParam.Value = mstrDescription Case "[p_type]" prmParam.Value = mintParameterType Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, _ prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrModuleName & "AssignParameters", _ LoadResString(errInvalidParameter) End Select Next prmParam ' qyExec.Parameters("w_id").Value = mlngWorkspaceId ' qyExec.Parameters("p_id").Value = mlngParameterId ' qyExec.Parameters("p_name").Value = mstrParameterName ' qyExec.Parameters("p_value").Value = mstrParameterValue Exit Sub AssignParametersErr: mstrSource = mstrModuleName & "AssignParameters" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrSource, LoadResString(errAssignParametersFailed) End Sub Public Property Let Position(ByVal RHS As Long) mlngPosition = RHS End Property Public Property Get Position() As Long Position = mlngPosition End Property Public Function Clone() As cParameter ' Creates a copy of a given parameter Dim cCloneParam As cParameter </pre>	<pre> On Error GoTo CloneErr mstrSource = mstrModuleName & "Clone" Set cCloneParam = New cParameter ' Copy all the parameter properties to the newly ' created parameter Set cCloneParam.NodeDB = mdbStepMaster cCloneParam.WorkspaceId = mlngWorkspaceId cCloneParam.ParameterId = mlngParameterId cCloneParam.ParameterName = mstrParameterName cCloneParam.ParameterValue = mstrParameterValue cCloneParam.Description = mstrDescription cCloneParam.ParameterType = mintParameterType cCloneParam.IndOperation = mintOperation cCloneParam.Position = mlngPosition ' And set the return value to the newly created parameter Set Clone = cCloneParam Set cCloneParam = Nothing Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function Public Property Set NodeDB(vdata As Database) Set mdbStepMaster = vdata End Property Public Property Get NodeDB() As Database Set NodeDB = mdbStepMaster End Property Private Sub CheckDupParameterName() ' Check if the parameter name already exists in the workspace Dim rstParameter As Recordset Dim strSql As String Dim qy As DAO.QueryDef On Error GoTo CheckDupParameterNameErr mstrSource = mstrModuleName & "CheckDupParameterName" ' Create a recordset object to retrieve the count of all parameters ' for the workspace with the same name strSql = "Select count(*) as parameter_count " & - " from workspace_parameters " & _ " where workspace_id = [w_id]" & _ " and parameter_name = [p_name]" & _ " and parameter_id <> [p_id]" Set qy = mdbStepMaster.CreateQueryDef(gstrEmptyString, strSql) Call AssignParameters(qy) Set rstParameter = qy.OpenRecordset(dbOpenForwardOnly) </pre>
--	---	--

<pre> If rstParameter![parameter_count] > 0 Then rstParameter.Close qy.Close ShowError errDuplicateParameterName On Error GoTo 0 Err.Raise vbObjectError + errDuplicateParameterName, _ mstrSource, LoadResString(errDuplicateParameterName) End If rstParameter.Close qy.Close Exit Sub CheckDupParameterNameErr: LogErrors Errors mstrSource = mstrModuleName & "CheckDupParameterName" On Error GoTo 0 Err.Raise vbObjectError + errCheckDupParameterNameFailed, _ mstrSource, LoadResString(errCheckDupParameterNam eFailed) End Sub Private Sub CheckDB() ' Check if the database object has been initialized If mdbStepMaster Is Nothing Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidDB, _ mstrModuleName & "CheckDB", LoadResString(errInvalidDB) End If End Sub Public Property Let ParameterValue(vdata As String) mstrParameterValue = vdata End Property Public Property Let Description(vdata As String) mstrDescription = vdata End Property Public Property Let ParameterType(vdata As ParameterType) mintParameterType = vdata End Property Public Property Let ParameterName(vdata As String) If vdata = gstrEmptyString Then ShowError errParameterNameMandatory On Error GoTo 0 ' Propagate this error back to the caller Err.Raise vbObjectError + errParameterNameMandatory, _ </pre>	<pre> mstrSource, LoadResString(errParameterNameMandatory) Else mstrParameterName = vdata End If End Property Public Property Let ParameterId(vdata As Long) mlngParameterId = vdata End Property Public Property Let IndOperation(ByVal vdata As Operation) ' The valid operations are define in the cOperations ' class. Check if the operation is valid Select Case vdata Case QueryOp, InsertOp, UpdateOp, DeleteOp mintOperation = vdata Case Else On Error GoTo 0 Err.Raise vbObjectError + errInvalidOperation, _ mstrSource, LoadResString(errInvalidOperation) End Select End Property Public Sub Validate() ' Each distinct object will have a Validate method which ' will check if the class properties are valid. This method ' will be used to check interdependant properties that ' cannot be validated by the let procedures. ' It should be called by the add and modify methods of the class On Error GoTo ValidateErr ' Check if the db object is valid Call CheckDB ' Call procedure to raise an error if the parameter name ' already exists in the workspace - ' if there are duplicates, we don't know what value for the ' parameter to use at runtime Call CheckDupParameterName Exit Sub ValidateErr: mstrSource = mstrModuleName & "Validate" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ mstrSource, LoadResString(errValidateFailed) End Sub Public Property Let WorkspaceId(vdata As Long) mlngWorkspaceId = vdata </pre>	<pre> End Property Public Sub Add() Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo AddErr ' Validate the record before trying to insert the record Call Validate ' Create a temporary querydef object strInsert = "insert into workspace_parameters " & - "(workspace_id, parameter_id, " & _ " parameter_name, parameter_value, " & _ " description, parameter_type) " & _ " values ([w_id], [p_id], [p_name], [p_value], [desc], [p_type])" Set qy = mdbStepMaster.CreateQueryDef(gstrEmptyString, strInsert) ' Call a procedure to assign the parameter values Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' strInsert = "insert into workspace_parameters " & _ ' "(workspace_id, parameter_id, " & _ ' " parameter_name, parameter_value) " & _ ' " values (" & _ ' Str(mlngWorkspaceId) & ", " & Str(mlngParameterId) & _ ' ", " & mFieldValue.MakeStringFieldValid(mstrParameter Name) & _ ' ", " & mFieldValue.MakeStringFieldValid(mstrParameter Value) & ")" ' mdbStepMaster.Execute strInsert, dbFailOnError + dbSQLPassThrough Exit Sub AddErr: mstrSource = mstrModuleName & "Add" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errParameterInsertFailed, _ mstrSource, LoadResString(errParameterInsertFailed) End Sub Public Sub Delete() Dim strDelete As String Dim qy As DAO.QueryDef On Error GoTo DeleteErr ' Check if the db object is valid Call CheckDB strDelete = "delete from workspace_parameters " & _ " where parameter_id = [p_id]" </pre>
---	--	--

```

Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString, strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteParameterFailed, _
mstrSource, _

LoadResString(errDeleteParameterFailed)

End Sub

Public Sub Modify()

Dim strUpdate As String
Dim qy As QueryDef

On Error GoTo ModifyErr

' Validate the updated values before trying
to modify the db
Call Validate

' Create a temporary querydef object with
the modify string
strUpdate = "update
workspace_parameters " & _
" set workspace_id = [w_id], " & _
"parameter_name = [p_name], " & _
"parameter_value = [p_value], " & _
"description = [desc], " & _
"parameter_type = [p_type] " & _
" where parameter_id = [p_id]"

Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString, strUpdate)

' Call a procedure to assign the parameter
values to the
' querydef object
Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

' mdbsStepMaster.Execute strUpdate,
dbFailOnError

Exit Sub

ModifyErr:

mstrSource = mstrModuleName &
"Modify"
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errParameterUpdateFailed, _
mstrSource,
LoadResString(errParameterUpdateFailed)

End Sub

```

```

Public Property Get ParameterName() As String

ParameterName = mstrParameterName

End Property

Public Property Get ParameterId() As Long

ParameterId = lngParameterId

End Property

Public Property Get NextIdentifier() As Long

Dim lngNextId As Long

On Error GoTo NextIdentifierErr

' First check if the database object is valid
Call CheckDB

' Retrieve the next identifier using the
sequence class
Set mParameterSeq = New cSequence
Set mParameterSeq.IdDatabase =
mdbsStepMaster
mParameterSeq.IdentifierColumn =
FLD_ID_PARAMETER
lngNextId = mParameterSeq.Identifier
Set mParameterSeq = Nothing

NextIdentifier = lngNextId
Exit Property

NextIdentifierErr:
LogErrors Errors
mstrSource = mstrModuleName &
"NextIdentifier"
On Error GoTo 0
Err.Raise vbObjectError + errIdGetFailed, _
mstrSource,
LoadResString(errIdGetFailed)

End Property

Public Property Get IndOperation() As Operation

IndOperation = mintOperation

End Property

Public Property Get WorkspaceId() As Long

WorkspaceId = lngWorkspaceId

End Property

Public Property Get ParameterValue() As String

ParameterValue = mstrParameterValue

End Property

Public Property Get Description() As String

Description = mstrDescription

End Property

Public Property Get ParameterType() As ParameterType

ParameterType = mintParameterType

End Property

```

```

Private Sub Class_Initialize()

Set mFieldValue = New cStringSM

' Initialize the operation indicator variable to
Query
' It will be modified later by the collection class
when
' inserts, updates or deletes are performed
mintOperation = QueryOp

End Sub

Private Sub Class_Terminate()

Set mdbsStepMaster = Nothing
Set mFieldValue = Nothing

End Sub

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cRunColIt"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunColIt.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module implements a stack of
Iterator nodes.
' Ensures that only cRunItNode objects are
stored in the stack.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private Const mstrModuleName As String =
"cRunColIt."
Private mstrSource As String

Private mcIterators As cStack
Public Sub Clear()

mcIterators.Clear

End Sub

Private Sub Class_Initialize()

Set mcIterators = New cStack

End Sub

Private Sub Class_Terminate()

Set mcIterators = Nothing

End Sub

Public Function Value(strItName As String) As String

Dim lngIndex As Long

```

```

For lngIndex = 0 To mcIterators.Count - 1
    If mcIterators(lngIndex).IteratorName = strItName Then
        Value = mcIterators(lngIndex).Value
        Exit For
    End If
Next lngIndex

End Function

Public Property Get Item(ByVal Position As Long) As cRunItNode
Attribute Item.VB_UserMemId = 0

    Set Item = mcIterators(Position)

End Property

Public Function Count() As Long

    Count = mcIterators.Count

End Function

Public Function Pop() As cRunItNode

    Set Pop = mcIterators.Pop

End Function

Public Sub Push(objToPush As cRunItNode)

    Call mcIterators.Push(objToPush)

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
    Persistable = 0 'NotPersistable
    DataBindingBehavior = 0 'vbNone
    DataSourceBehavior = 0 'vbNone
    MTSTransactionMode = 0
    NotAnMTSObject
END
Attribute VB_Name = "cRunInst"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cRunColIt.cls
'            Microsoft TPC-H Kit Ver. 1.00
'            Copyright Microsoft, 1999
'            All Rights Reserved
'
' PURPOSE:   This module controls the
run processing. It runs a branch
'            at a time and raises events when
each step completes execution.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"cRunInst."
Private mstrSource As String

```

```

' Local variable(s) to hold property value(s)
Private mstrRootKey As String
Public WspId As Long
Private mcParameters As cArrParameters
Private mcRunSteps As cArrSteps
Private mcRunConstraints As cArrConstraints
Public RunConnDtls As cConnDtls
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mcNavSteps As cStepTree

Private mcInstances As cInstances
Private mcFreeSteps As cVectorLng
Private mcFailures As cFailedSteps
Private mblnAsk As Boolean ' Set to True
when the a step with continuation criteria=Ask
fails
Private mblnAbort As Boolean ' Set to True
when the run is aborted
Private msAbortDtls As String
Private mbarrFree() As Byte
Private WithEvents mcTermSteps As
cTermSteps
Attribute mcTermSteps.VB_VarHelpID = -1
Public RunId As Long
Public CreateInputFiles As Boolean
Private Enum WspLogEvents
    mintRunStart
    mintRunComplete
    mintStepStart
    mintStepComplete
End Enum

Private mcWspLog As cFileSM
Private mstrCurBranchRoot As String
Private mcDummyRootInstance As cInstance
' Key for the dummy root instance - Should be
a key that is invalid for an actual step record
Private Const mstrDummyRootKey As String =
"D"
' Public events to notify the calling function of
the
' start and end time for each step
Public Event RunStart(dtmStartTime As
Currency, strWspLog As String)
Public Event RunComplete(dtmEndTime As
Currency)
Public Event StepStart(cStepRecord As cStep,
dtmStartTime As Currency, _
    lngInstanceId As Long, lParentInstanceId
As Long, sPath As String, _
    slts As String, sltValue As String)
Public Event StepComplete(cStepRecord As
cStep, dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)
Public Event ProcessStart(cStepRecord As
cStep, strCommand As String, _
    dtmStartTime As Currency, lngInstanceId
As Long, lParentInstanceId As Long, _
    sltValue As String)
Public Event ProcessComplete(cStepRecord
As cStep, dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)
' The class that will execute each step - we trap
the events
' that are raised by it when a step
starts/completes
' execution
Private WithEvents cExecStep1 As cRunStep
Attribute cExecStep1.VB_VarHelpID = -1
Private WithEvents cExecStep2 As cRunStep
Attribute cExecStep2.VB_VarHelpID = -1
Private WithEvents cExecStep3 As cRunStep

```

```

Attribute cExecStep3.VB_VarHelpID = -1
Private WithEvents cExecStep4 As cRunStep
Attribute cExecStep4.VB_VarHelpID = -1
Private WithEvents cExecStep5 As cRunStep
Attribute cExecStep5.VB_VarHelpID = -1
Private WithEvents cExecStep6 As cRunStep
Attribute cExecStep6.VB_VarHelpID = -1
Private WithEvents cExecStep7 As cRunStep
Attribute cExecStep7.VB_VarHelpID = -1
Private WithEvents cExecStep8 As cRunStep
Attribute cExecStep8.VB_VarHelpID = -1
Private WithEvents cExecStep9 As cRunStep
Attribute cExecStep9.VB_VarHelpID = -1

Private WithEvents cExecStep10 As cRunStep
Attribute cExecStep10.VB_VarHelpID = -1
Private WithEvents cExecStep11 As cRunStep
Attribute cExecStep11.VB_VarHelpID = -1
Private WithEvents cExecStep12 As cRunStep
Attribute cExecStep12.VB_VarHelpID = -1
Private WithEvents cExecStep13 As cRunStep
Attribute cExecStep13.VB_VarHelpID = -1
Private WithEvents cExecStep14 As cRunStep
Attribute cExecStep14.VB_VarHelpID = -1
Private WithEvents cExecStep15 As cRunStep
Attribute cExecStep15.VB_VarHelpID = -1
Private WithEvents cExecStep16 As cRunStep
Attribute cExecStep16.VB_VarHelpID = -1
Private WithEvents cExecStep17 As cRunStep
Attribute cExecStep17.VB_VarHelpID = -1
Private WithEvents cExecStep18 As cRunStep
Attribute cExecStep18.VB_VarHelpID = -1
Private WithEvents cExecStep19 As cRunStep
Attribute cExecStep19.VB_VarHelpID = -1

Private WithEvents cExecStep20 As cRunStep
Attribute cExecStep20.VB_VarHelpID = -1
Private WithEvents cExecStep21 As cRunStep
Attribute cExecStep21.VB_VarHelpID = -1
Private WithEvents cExecStep22 As cRunStep
Attribute cExecStep22.VB_VarHelpID = -1
Private WithEvents cExecStep23 As cRunStep
Attribute cExecStep23.VB_VarHelpID = -1
Private WithEvents cExecStep24 As cRunStep
Attribute cExecStep24.VB_VarHelpID = -1
Private WithEvents cExecStep25 As cRunStep
Attribute cExecStep25.VB_VarHelpID = -1
Private WithEvents cExecStep26 As cRunStep
Attribute cExecStep26.VB_VarHelpID = -1
Private WithEvents cExecStep27 As cRunStep
Attribute cExecStep27.VB_VarHelpID = -1
Private WithEvents cExecStep28 As cRunStep
Attribute cExecStep28.VB_VarHelpID = -1
Private WithEvents cExecStep29 As cRunStep
Attribute cExecStep29.VB_VarHelpID = -1

Private WithEvents cExecStep30 As cRunStep
Attribute cExecStep30.VB_VarHelpID = -1
Private WithEvents cExecStep31 As cRunStep
Attribute cExecStep31.VB_VarHelpID = -1
Private WithEvents cExecStep32 As cRunStep
Attribute cExecStep32.VB_VarHelpID = -1
Private WithEvents cExecStep33 As cRunStep
Attribute cExecStep33.VB_VarHelpID = -1
Private WithEvents cExecStep34 As cRunStep
Attribute cExecStep34.VB_VarHelpID = -1
Private WithEvents cExecStep35 As cRunStep
Attribute cExecStep35.VB_VarHelpID = -1
Private WithEvents cExecStep36 As cRunStep
Attribute cExecStep36.VB_VarHelpID = -1
Private WithEvents cExecStep37 As cRunStep
Attribute cExecStep37.VB_VarHelpID = -1
Private WithEvents cExecStep38 As cRunStep
Attribute cExecStep38.VB_VarHelpID = -1
Private WithEvents cExecStep39 As cRunStep

```

```
Private WithEvents cExecStep60 As
cRunStep
Attribute cExecStep60.VB_VarHelpID = -1
Private WithEvents cExecStep61 As
cRunStep
Attribute cExecStep61.VB_VarHelpID = -1
Private WithEvents cExecStep62 As
cRunStep
Attribute cExecStep62.VB_VarHelpID = -1
Private WithEvents cExecStep63 As
cRunStep
```

```
Private WithEvents cExecStep90 As cRunStep
Attribute cExecStep90.VB_VarHelpID = -1
Private WithEvents cExecStep91 As cRunStep
Attribute cExecStep91.VB_VarHelpID = -1
Private WithEvents cExecStep92 As cRunStep
Attribute cExecStep92.VB_VarHelpID = -1
Private WithEvents cExecStep93 As cRunStep
Attribute cExecStep93.VB_VarHelpID = -1
Private WithEvents cExecStep94 As cRunStep
Attribute cExecStep94.VB_VarHelpID = -1
Private WithEvents cExecStep95 As cRunStep
Attribute cExecStep95.VB_VarHelpID = -1
Private WithEvents cExecStep96 As cRunStep
Attribute cExecStep96.VB_VarHelpID = -1
Private WithEvents cExecStep97 As cRunStep
Attribute cExecStep97.VB_VarHelpID = -1
Private WithEvents cExecStep98 As cRunStep
Attribute cExecStep98.VB_VarHelpID = -1
Private WithEvents cExecStep99 As cRunStep
```

```

cExecStep90 Is Nothing And cExecStep91 Is
Nothing And cExecStep92 Is Nothing And

```

```

cExecStep93 Is Nothing And cExecStep94
Is Nothing And cExecStep95 Is Nothing
And cExecStep96 Is Nothing And
cExecStep97 Is Nothing And cExecStep98
Is Nothing And cExecStep99 Is Nothing
Then
    ' Then...
    WriteToWspLog (mintRunComplete)
    RaiseEvent
RunComplete(Determine64BitTime())
Else
    ' Abort each of the steps that is
currently executing.
    If Not cExecStep1 Is Nothing Then
        cExecStep1.Abort
    End If
    If Not cExecStep2 Is Nothing Then
        cExecStep2.Abort
    End If
    If Not cExecStep3 Is Nothing Then
        cExecStep3.Abort
    End If
    If Not cExecStep4 Is Nothing Then
        cExecStep4.Abort
    End If
    If Not cExecStep5 Is Nothing Then
        cExecStep5.Abort
    End If
    If Not cExecStep6 Is Nothing Then
        cExecStep6.Abort
    End If
    If Not cExecStep7 Is Nothing Then
        cExecStep7.Abort
    End If
    If Not cExecStep8 Is Nothing Then
        cExecStep8.Abort
    End If
    If Not cExecStep9 Is Nothing Then
        cExecStep9.Abort
    End If
    If Not cExecStep10 Is Nothing Then
        cExecStep10.Abort
    End If
    If Not cExecStep11 Is Nothing Then
        cExecStep11.Abort
    End If
    If Not cExecStep12 Is Nothing Then
        cExecStep12.Abort
    End If
    If Not cExecStep13 Is Nothing Then
        cExecStep13.Abort
    End If

    If Not cExecStep14 Is Nothing Then
        cExecStep14.Abort
    End If

    If Not cExecStep15 Is Nothing Then
        cExecStep15.Abort
    End If

    If Not cExecStep16 Is Nothing Then
        cExecStep16.Abort
    End If

    If Not cExecStep17 Is Nothing Then
        cExecStep17.Abort
    End If

    If Not cExecStep18 Is Nothing Then
        cExecStep18.Abort
    End If

    If Not cExecStep19 Is Nothing Then
        cExecStep19.Abort

```

```

End If

If Not cExecStep20 Is Nothing Then
    cExecStep20.Abort
End If

If Not cExecStep21 Is Nothing Then
    cExecStep21.Abort
End If

If Not cExecStep22 Is Nothing Then
    cExecStep22.Abort
End If

If Not cExecStep23 Is Nothing Then
    cExecStep23.Abort
End If

If Not cExecStep24 Is Nothing Then
    cExecStep24.Abort
End If

If Not cExecStep25 Is Nothing Then
    cExecStep25.Abort
End If

If Not cExecStep26 Is Nothing Then
    cExecStep26.Abort
End If

If Not cExecStep27 Is Nothing Then
    cExecStep27.Abort
End If

If Not cExecStep28 Is Nothing Then
    cExecStep28.Abort
End If

If Not cExecStep29 Is Nothing Then
    cExecStep29.Abort
End If

' ===== 30 - 39
=====
If Not cExecStep30 Is Nothing Then
    cExecStep30.Abort
End If

If Not cExecStep31 Is Nothing Then
    cExecStep31.Abort
End If

If Not cExecStep32 Is Nothing Then
    cExecStep32.Abort
End If

If Not cExecStep33 Is Nothing Then
    cExecStep33.Abort
End If

If Not cExecStep34 Is Nothing Then
    cExecStep34.Abort
End If

If Not cExecStep35 Is Nothing Then
    cExecStep35.Abort
End If

If Not cExecStep36 Is Nothing Then
    cExecStep36.Abort
End If

If Not cExecStep37 Is Nothing Then
    cExecStep37.Abort
End If

```

```

If Not cExecStep38 Is Nothing Then
    cExecStep38.Abort
End If

If Not cExecStep39 Is Nothing Then
    cExecStep39.Abort
End If

' ===== 40 - 49
=====
If Not cExecStep40 Is Nothing Then
    cExecStep40.Abort
End If

If Not cExecStep41 Is Nothing Then
    cExecStep41.Abort
End If

If Not cExecStep42 Is Nothing Then
    cExecStep42.Abort
End If

If Not cExecStep43 Is Nothing Then
    cExecStep43.Abort
End If

If Not cExecStep44 Is Nothing Then
    cExecStep44.Abort
End If

If Not cExecStep45 Is Nothing Then
    cExecStep45.Abort
End If

If Not cExecStep46 Is Nothing Then
    cExecStep46.Abort
End If

If Not cExecStep47 Is Nothing Then
    cExecStep47.Abort
End If

If Not cExecStep48 Is Nothing Then
    cExecStep48.Abort
End If

If Not cExecStep49 Is Nothing Then
    cExecStep49.Abort
End If

' ===== 50 - 59
=====
If Not cExecStep50 Is Nothing Then
    cExecStep50.Abort
End If

If Not cExecStep51 Is Nothing Then
    cExecStep51.Abort
End If

If Not cExecStep52 Is Nothing Then
    cExecStep52.Abort
End If

If Not cExecStep53 Is Nothing Then
    cExecStep53.Abort
End If

If Not cExecStep54 Is Nothing Then
    cExecStep54.Abort
End If

If Not cExecStep55 Is Nothing Then
    cExecStep55.Abort

```


End If If Not cExecStep56 Is Nothing Then cExecStep56.Abort End If If Not cExecStep57 Is Nothing Then cExecStep57.Abort End If If Not cExecStep58 Is Nothing Then cExecStep58.Abort End If If Not cExecStep59 Is Nothing Then cExecStep59.Abort End If ' ===== 60 - 69 ===== If Not cExecStep60 Is Nothing Then cExecStep60.Abort End If If Not cExecStep61 Is Nothing Then cExecStep61.Abort End If If Not cExecStep62 Is Nothing Then cExecStep62.Abort End If If Not cExecStep63 Is Nothing Then cExecStep63.Abort End If If Not cExecStep64 Is Nothing Then cExecStep64.Abort End If If Not cExecStep65 Is Nothing Then cExecStep65.Abort End If If Not cExecStep66 Is Nothing Then cExecStep66.Abort End If If Not cExecStep67 Is Nothing Then cExecStep67.Abort End If If Not cExecStep68 Is Nothing Then cExecStep68.Abort End If If Not cExecStep69 Is Nothing Then cExecStep69.Abort End If ' ===== 70 - 79 ===== If Not cExecStep70 Is Nothing Then cExecStep70.Abort End If If Not cExecStep71 Is Nothing Then cExecStep71.Abort End If If Not cExecStep72 Is Nothing Then cExecStep72.Abort End If If Not cExecStep73 Is Nothing Then	cExecStep73.Abort End If If Not cExecStep74 Is Nothing Then cExecStep74.Abort End If If Not cExecStep75 Is Nothing Then cExecStep75.Abort End If If Not cExecStep76 Is Nothing Then cExecStep76.Abort End If If Not cExecStep77 Is Nothing Then cExecStep77.Abort End If If Not cExecStep78 Is Nothing Then cExecStep78.Abort End If If Not cExecStep79 Is Nothing Then cExecStep79.Abort End If ' ===== 80 - 89 ===== If Not cExecStep80 Is Nothing Then cExecStep80.Abort End If If Not cExecStep81 Is Nothing Then cExecStep81.Abort End If If Not cExecStep82 Is Nothing Then cExecStep82.Abort End If If Not cExecStep83 Is Nothing Then cExecStep83.Abort End If If Not cExecStep84 Is Nothing Then cExecStep84.Abort End If If Not cExecStep85 Is Nothing Then cExecStep85.Abort End If If Not cExecStep86 Is Nothing Then cExecStep86.Abort End If If Not cExecStep87 Is Nothing Then cExecStep87.Abort End If If Not cExecStep88 Is Nothing Then cExecStep88.Abort End If If Not cExecStep89 Is Nothing Then cExecStep89.Abort End If ' ===== 90 - 99 ===== If Not cExecStep90 Is Nothing Then cExecStep90.Abort End If	If Not cExecStep91 Is Nothing Then cExecStep91.Abort End If If Not cExecStep92 Is Nothing Then cExecStep92.Abort End If If Not cExecStep93 Is Nothing Then cExecStep93.Abort End If If Not cExecStep94 Is Nothing Then cExecStep94.Abort End If If Not cExecStep95 Is Nothing Then cExecStep95.Abort End If If Not cExecStep96 Is Nothing Then cExecStep96.Abort End If If Not cExecStep97 Is Nothing Then cExecStep97.Abort End If If Not cExecStep98 Is Nothing Then cExecStep98.Abort End If If Not cExecStep99 Is Nothing Then cExecStep99.Abort End If End If Exit Sub AbortErr: Call LogErrors(Errors) On Error GoTo 0 ShowError errAbortFailed ' Try to abort the remaining steps, if any Resume Next End Sub Public Sub AbortSiblings(cTermInstance As cInstance) On Error GoTo AbortSiblingsErr ' Abort each of the steps that is currently executing. If Not cExecStep1 Is Nothing Then If cExecStep1.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep1.Abort End If End If If Not cExecStep2 Is Nothing Then If cExecStep2.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep2.Abort End If End If If Not cExecStep3 Is Nothing Then If cExecStep3.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep3.Abort End If End If
--	--	---

```

If cExecStep13.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
    cExecStep13.Abort
End If
End If

If Not cExecStep14.Is Nothing Then
    If cExecStep14.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep14.Abort
    End If
End If

If Not cExecStep15.Is Nothing Then
    If cExecStep15.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep15.Abort
    End If
End If

If Not cExecStep16.Is Nothing Then
    If cExecStep16.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep16.Abort
    End If
End If

If Not cExecStep17.Is Nothing Then
    If cExecStep17.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep17.Abort
    End If
End If

If Not cExecStep18.Is Nothing Then
    If cExecStep18.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep18.Abort
    End If
End If

If Not cExecStep19.Is Nothing Then
    If cExecStep19.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep19.Abort
    End If
End If

If Not cExecStep20.Is Nothing Then
    If cExecStep20.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep20.Abort
    End If
End If

If Not cExecStep21.Is Nothing Then
    If cExecStep21.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep21.Abort
    End If
End If

If Not cExecStep22.Is Nothing Then
    If cExecStep22.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep22.Abort
    End If
End If

If Not cExecStep23.Is Nothing Then
    If cExecStep23.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep23.Abort
    End If
End If

```

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.


```

End If

If Not cExecStep74 Is Nothing Then
    If cExecStep74.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep74.Abort
    End If
End If

If Not cExecStep75 Is Nothing Then
    If cExecStep75.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep75.Abort
    End If
End If

If Not cExecStep76 Is Nothing Then
    If cExecStep76.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep76.Abort
    End If
End If

If Not cExecStep77 Is Nothing Then
    If cExecStep77.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep77.Abort
    End If
End If

If Not cExecStep78 Is Nothing Then
    If cExecStep78.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep78.Abort
    End If
End If

If Not cExecStep79 Is Nothing Then
    If cExecStep79.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep79.Abort
    End If
End If

' ===== 80
=====
If Not cExecStep80 Is Nothing Then
    If cExecStep80.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep80.Abort
    End If
End If

If Not cExecStep81 Is Nothing Then
    If cExecStep81.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep81.Abort
    End If
End If

If Not cExecStep82 Is Nothing Then
    If cExecStep82.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep82.Abort
    End If
End If

If Not cExecStep83 Is Nothing Then
    If cExecStep83.ExecuteStep.ParentStepId
= cTermInstance.Step.ParentStepId Then
        cExecStep83.Abort
    End If
End If

If Not cExecStep84 Is Nothing Then

```

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

End If If Not cExecStep95 Is Nothing Then If cExecStep95.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep95.Abort End If End If If Not cExecStep96 Is Nothing Then If cExecStep96.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep96.Abort End If End If If Not cExecStep97 Is Nothing Then If cExecStep97.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep97.Abort End If End If If Not cExecStep98 Is Nothing Then If cExecStep98.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep98.Abort End If End If If Not cExecStep99 Is Nothing Then If cExecStep99.ExecuteStep.ParentStepId = cTermInstance.Step.ParentStepId Then cExecStep99.Abort End If End If Exit Sub AbortSiblingsErr: Call LogErrors(Errors) On Error GoTo 0 ShowError errAbortFailed ' Try to abort the remaining steps, if any Resume Next End Sub Private Sub ExecutionFailed(cTermStep As cRunStep) ' Called when execution of a step fails for any reason - ensure that execution ' continues On Error GoTo ExecutionFailedErr Call AddFreeProcess(cTermStep.Index) Call RunBranch(mstrCurBranchRoot) Exit Sub ExecutionFailedErr: ' Log the error code raised by Visual Basic - do not raise an error here! Call LogErrors(Errors) End Sub Private Sub FreeExecStep(lnIndex As Long)	' Frees an instance of a cExecuteSM object depending on the index On Error GoTo FreeExecStepErr Select Case lngIndex + 1 Case 1 Set cExecStep1 = Nothing Case 2 Set cExecStep2 = Nothing Case 3 Set cExecStep3 = Nothing Case 4 Set cExecStep4 = Nothing Case 5 Set cExecStep5 = Nothing Case 6 Set cExecStep6 = Nothing Case 7 Set cExecStep7 = Nothing Case 8 Set cExecStep8 = Nothing Case 9 Set cExecStep9 = Nothing Case 10 Set cExecStep10 = Nothing Case 11 Set cExecStep11 = Nothing Case 12 Set cExecStep12 = Nothing Case 13 Set cExecStep13 = Nothing Case 14 Set cExecStep14 = Nothing Case 15 Set cExecStep15 = Nothing Case 16 Set cExecStep16 = Nothing Case 17 Set cExecStep17 = Nothing Case 18 Set cExecStep18 = Nothing Case 19 Set cExecStep19 = Nothing Case 20 Set cExecStep20 = Nothing Case 21 Set cExecStep21 = Nothing Case 22 Set cExecStep22 = Nothing Case 23 Set cExecStep23 = Nothing Case 24 Set cExecStep24 = Nothing Case 25 Set cExecStep25 = Nothing Case 26 Set cExecStep26 = Nothing Case 27 Set cExecStep27 = Nothing Case 28 Set cExecStep28 = Nothing Case 29 Set cExecStep29 = Nothing Case 30 Set cExecStep30 = Nothing Case 31 Set cExecStep31 = Nothing Case 32 Set cExecStep32 = Nothing Case 33 Set cExecStep33 = Nothing Case 34 Set cExecStep34 = Nothing Case 35 Set cExecStep35 = Nothing	Case 36 Set cExecStep36 = Nothing Case 37 Set cExecStep37 = Nothing Case 38 Set cExecStep38 = Nothing Case 39 Set cExecStep39 = Nothing Case 40 Set cExecStep40 = Nothing Case 41 Set cExecStep41 = Nothing Case 42 Set cExecStep42 = Nothing Case 43 Set cExecStep43 = Nothing Case 44 Set cExecStep44 = Nothing Case 45 Set cExecStep45 = Nothing Case 46 Set cExecStep46 = Nothing Case 47 Set cExecStep47 = Nothing Case 48 Set cExecStep48 = Nothing Case 49 Set cExecStep49 = Nothing Case 50 Set cExecStep50 = Nothing Case 51 Set cExecStep51 = Nothing Case 52 Set cExecStep52 = Nothing Case 53 Set cExecStep53 = Nothing Case 54 Set cExecStep54 = Nothing Case 55 Set cExecStep55 = Nothing Case 56 Set cExecStep56 = Nothing Case 57 Set cExecStep57 = Nothing Case 58 Set cExecStep58 = Nothing Case 59 Set cExecStep59 = Nothing Case 60 Set cExecStep60 = Nothing Case 61 Set cExecStep61 = Nothing Case 62 Set cExecStep62 = Nothing Case 63 Set cExecStep63 = Nothing Case 64 Set cExecStep64 = Nothing Case 65 Set cExecStep65 = Nothing Case 66 Set cExecStep66 = Nothing Case 67 Set cExecStep67 = Nothing Case 68 Set cExecStep68 = Nothing Case 69 Set cExecStep69 = Nothing Case 70 Set cExecStep70 = Nothing Case 71 Set cExecStep71 = Nothing Case 72 Set cExecStep72 = Nothing Case 73
---	---	---

```

Set cExecStep73 = Nothing
Case 74
Set cExecStep74 = Nothing
Case 75
Set cExecStep75 = Nothing
Case 76
Set cExecStep76 = Nothing
Case 77
Set cExecStep77 = Nothing
Case 78
Set cExecStep78 = Nothing
Case 79
Set cExecStep79 = Nothing
Case 80
Set cExecStep80 = Nothing
Case 81
Set cExecStep81 = Nothing
Case 82
Set cExecStep82 = Nothing
Case 83
Set cExecStep83 = Nothing
Case 84
Set cExecStep84 = Nothing
Case 85
Set cExecStep85 = Nothing
Case 86
Set cExecStep86 = Nothing
Case 87
Set cExecStep87 = Nothing
Case 88
Set cExecStep88 = Nothing
Case 89
Set cExecStep89 = Nothing
Case 90
Set cExecStep90 = Nothing
Case 91
Set cExecStep91 = Nothing
Case 92
Set cExecStep92 = Nothing
Case 93
Set cExecStep93 = Nothing
Case 94
Set cExecStep94 = Nothing
Case 95
Set cExecStep95 = Nothing
Case 96
Set cExecStep96 = Nothing
Case 97
Set cExecStep97 = Nothing
Case 98
Set cExecStep98 = Nothing
Case 99
Set cExecStep99 = Nothing
Case Else
BugAssert False, "FreeExecStep:
Invalid value!"
End Select

Exit Sub

FreeExecStepErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)

End Sub
Private Sub ProcessAskFailures()
' This procedure is called when a step
with a continuation criteria = Ask has failed.
' Wait for all running processes to
complete before displaying an
Abort/Retry/Fail
' message to the user. We process every
Ask step that has failed and use a simple
' algorithm to determine what to do next.

```

```

' 1. An abort response to any failure results
in an immediate abort of the run
' 2. A continue means the run continues - this
failure is popped off the failure list.
' 3. A retry means that the execution details
for the instance are cleared and the
' step is re-executed.
Dim lIndex As Long
Dim cStepRec As cStep
Dim cNextInst As cInstance
Dim cFailureRec As cFailedStep

On Error GoTo ProcessAskFailuresErr

' Display a popup message for all steps that
have failed with a continuation
' criteria of Ask
For lIndex = mcFailures.Count - 1 To 0 Step
-1

Set cFailureRec = mcFailures(lIndex)

If cFailureRec.ContCriteria =
gintOnFailureAsk Then
Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)
' Ask the user whether to
abort/retry/continue
#If RUN_ONLY Then
cFailureRec.AskResponse =
ShowMessageBox(0, _
"Step " &
GetStepNodeText(cStepRec) & " failed. " & _
"Select Abort to abort run and
Ignore to continue. " & _
"Select Retry to re-execute the
failed step.", _
"Step Failure", _
MB_ABORTRETRYIGNORE
+ MB_APPLMODAL +
MB_ICONEXCLAMATION)
#Else
cFailureRec.AskResponse =
ShowMessageBox(frmRunning.hWnd, _
"Step " &
GetStepNodeText(cStepRec) & " failed. " & _
"Select Abort to abort run and
Ignore to continue. " & _
"Select Retry to re-execute the
failed step.", _
"Step Failure", _
MB_ABORTRETRYIGNORE
+ MB_APPLMODAL +
MB_ICONEXCLAMATION)
#End If

' Process an abort response immediately
If cFailureRec.AskResponse =
IDABORT Then
mblnAbort = True
Set cNextInst =
mcInstances.QueryInstance(cFailureRec.Instan
ceId)
Call RunPendingSiblings(cNextInst,
cFailureRec.EndTime)
Exit For
End If
End If

Next lIndex

' Process all failed steps for which we have
Ignore and Retry responses.
If Not mblnAbort Then

```

```

' Navigate in reverse order since we'll be
deleting items from the collection
For lIndex = mcFailures.Count - 1 To 0 Step -1
If mcFailures(lIndex).ContCriteria =
gintOnFailureAsk Then
mblnAsk = False
Set cFailureRec =
mcFailures.Delete(lIndex)

Select Case cFailureRec.AskResponse
Case IDABORT
BugAssert True

Case IDRETRY
' Delete all instances for the failed
step and re-try
' Returns a parent instance reference
Set cNextInst =
ProcessRetryStep(cFailureRec)
Call
RunPendingStepInBranch(mstrCurBranchRoot,
cNextInst)

Case IDIGNORE
Set cNextInst =
mcInstances.QueryInstance(cFailureRec.InstanceId)
Call RunPendingSiblings(cNextInst,
cFailureRec.EndTime)

End Select
End If
Next lIndex
End If

Exit Sub

ProcessAskFailuresErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName, _
LoadResString(errExecuteBranchFailed)

End Sub
Private Function ProcessRetryStep(cFailureRec As
cFailedStep) As cInstance
' This procedure is called when a step with a
continuation criteria = Ask has failed
' and the user wants to re-execute the step.
' We delete all existing instances for the step and
reset the iterator, if
' any on the parent instance - this way we ensure
that the step will be executed
' in the next pass.
Dim lIndex As Long
Dim cParentInstance As cInstance
Dim cSubStepRec As cSubStep
Dim cStepRec As cStep

On Error GoTo ProcessRetryStepErr

' Navigate in reverse order since we'll be deleting
items from the collection
For lIndex = mcInstances.Count - 1 To 0 Step -1

If mcInstances(lIndex).Step.StepId =
cFailureRec.StepId Then
Set cParentInstance =
mcInstances.QueryInstance(mcInstances(lIndex).Pa
rentInstanceId)
Set cSubStepRec =
cParentInstance.QuerySubStep(cFailureRec.StepId)
Set cStepRec =
mcRunSteps.QueryStep(cFailureRec.StepId)

```

```

        ' Decrement the child count on the
parent instance and reset the
        ' step iterators on the sub-step record,
if any -
        ' all the iterations of the step will be
re-executed.
        cParentInstance.ChildDeleted
cFailureRec.StepId
        cParentInstance.AllComplete = False
        cParentInstance.AllStarted = False

        cSubStepRec.InitializeIt cStepRec,
mcParameters

        ' Now delete the current instance
        Set ProcessRetryStep =
mcInstances.Delete(lIndex)
        End If
        Next lIndex

    Exit Function

ProcessRetryStepErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName,
-

    LoadResString(errExecuteBranchFailed)

End Function

Private Sub RunNextStep(ByVal
dtmCompleteTime As Currency, ByVal
lngIndex As Long, _
        ByVal InstanceId As Long, ByVal
ExecutionStatus As InstanceStatus)
    ' Checks if there are any steps remaining
to be
    ' executed in the current branch. If so, it
executes
    ' the step.
    Dim cTermInstance As cInstance
    Dim cFailure As cFailedStep

    On Error GoTo RunNextStepErr

    BugMessage "RunNextStep: cExecStep"
& CStr(lngIndex + 1) & " has completed."

    Call mcTermSteps.Delete
    Call FreeExecStep(lngIndex)

    ' Call a procedure to add the freed up
object to the list
    Call AddFreeProcess(lngIndex)

    Set cTermInstance =
mcInstances.QueryInstance(InstanceId)
    cTermInstance.Status = ExecutionStatus

    If ExecutionStatus = gintFailed Then
        If
cTermInstance.Step.ContinuationCriteria =
gintOnFailureAbortSiblings Then
            Call AbortSiblings(cTermInstance)
        End If

        If Not
mcFailures.StepFailed(cTermInstance.Step.
StepId) Then
            Set cFailure = New cFailedStep

```

```

        cFailure.InstanceId =
cTermInstance.InstanceId
        cFailure.StepId =
cTermInstance.Step.StepId
        cFailure.ParentStepId =
cTermInstance.Step.ParentStepId
        cFailure.ContCriteria =
cTermInstance.Step.ContinuationCriteria
        cFailure.EndTime = dtmCompleteTime
        mcFailures.Add cFailure
        Set cFailure = Nothing
    End If
End If

    If ExecutionStatus = gintFailed And
cTermInstance.Step.ContinuationCriteria =
gintOnFailureAbort Then
        If StringEmpty(msAbortDtls) Then
            ' Initialize the abort message
            msAbortDtls = "Step " &
GetStepNodeText(cTermInstance.Step) & "
failed." & _
                "Aborting execution. Please check
the error file for details."
        End If
        Call Abort
        ElseIf ExecutionStatus = gintFailed And
cTermInstance.Step.ContinuationCriteria =
gintOnFailureAsk Then
            mblnAsk = True

            ' If the step failed due to a Cancel
operation (Abort), abort the run
            If mblnAbort Then
                Call
RunPendingSiblings(cTermInstance,
dtmCompleteTime)
            End If
            Else
                Call RunPendingSiblings(cTermInstance,
dtmCompleteTime)
            End If

            If mblnAbort Then
                If Not AnyStepRunning(mcFreeSteps,
mbarrFree) And Not
StringEmpty(msAbortDtls) Then
                    ' Display an error only if the abort is
due to a failure
                    ' We had to abort since a step failed -
since no other steps are currently
                    ' running, we can display a message to
the user saying that we had to abort
                    #If RUN_ONLY Then
                        Call ShowMessageBox(0,
msAbortDtls, "Run Aborted", _
                            MB_APPLMODAL + MB_OK
+ MB_ICONEXCLAMATION)
                    #Else
                        Call
ShowMessageBox(frmRunning.hWnd,
msAbortDtls, "Run Aborted", _
                            MB_APPLMODAL + MB_OK
+ MB_ICONEXCLAMATION)
                    #End If
                    ' MsgBox msAbortDtls, vbOKOnly,
"Run Aborted"
                End If
                ElseIf mblnAsk Then
                    If Not AnyStepRunning(mcFreeSteps,
mbarrFree) Then
                        ' Ask the user whether to
abort/retry/ignore failed steps
                        Call ProcessAskFailures
                    End If

```

```

    End If

    Exit Sub

RunNextStepErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    WriteError errExecuteBranchFailed, mstrSource
    Call ResetForm(lngIndex)

End Sub
Public Sub StopRun()

    ' Setting the Abort flag to True will ensure that
we
    ' don't execute any more steps
    mblnAbort = True

End Sub

Private Sub CreateDummyInstance(strRootKey As
String)

    Dim cNewInstance As cInstance
    Dim cSubStepDtls As cStep
    Dim lngSubStepId As Long

    On Error GoTo CreateDummyInstanceErr

    ' Create a new instance of the step
    ' initialize substeps for the step
    Set cNewInstance = New cInstance

    ' There can be multiple iterations of the top level
nodes
    ' running at the same time, but only one branch at
any
    ' time - so enforce a degree of parallelism of 1 on
this
    ' node!
    Set cNewInstance.Step = New cStep
    cNewInstance.DegreeParallelism = 1
    cNewInstance.Key = mstrDummyRootKey

    cNewInstance.InstanceId = NewInstanceId
    cNewInstance.ParentInstanceId = 0

    lngSubStepId =
MakeIdentifierValid(strRootKey)

    Set cSubStepDtls =
mcRunSteps.QueryStep(lngSubStepId)
    If cSubStepDtls.EnabledFlag Then
        ' Create a child node for the step corresponding
to
        ' the root node of the branch being currently
executed,
        ' only if it has been enabled
        Call
cNewInstance.CreateSubStep(cSubStepDtls,
mcParameters)
    End If

    mcInstances.Add cNewInstance
    Set cNewInstance.Iterators =
DetermineIterators(cNewInstance)

    ' Set a reference to the newly created dummy
instance
    Set mcDummyRootInstance = cNewInstance

    Set cNewInstance = Nothing

    Exit Sub

```

```

CreateDummyInstanceErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"CreateDummyInstance"
Err.Raise vbObjectError +
errCreateInstanceFailed, _
mstrSource,
LoadResString(errCreateInstanceFailed)

End Sub
Private Function CreateInstance(cExecStep
As cStep, _
cParentInstance As cInstance) As
cInstance
' Creates a new instance of the passed in
step. Returns
' a reference to the newly created instance
object.

Dim cNewInstance As cInstance
Dim nodChild As cStep
Dim lngSubStepId As Long

On Error GoTo CreateInstanceErr

' Create a new instance of the step
' initialize substeps for the step
Set cNewInstance = New cInstance
Set cNewInstance.Step = cExecStep
cNewInstance.Key =
MakeKeyValid(cExecStep.StepId,
cExecStep.StepType)
cNewInstance.ParentInstanceId =
cParentInstance.InstanceId
cNewInstance.InstanceId =
NewInstanceId
' Validate the degree of parallelism field
before assigning it to the instance -
' (the parameter value might have been set
to an invalid value at runtime)
Call
ValidateParallelism(cExecStep.DegreeParall
elism, _
cExecStep.WorkspaceId,
ParamsInWsp:=mcParameters)
cNewInstance.DegreeParallelism =
SubstituteParameters(cExecStep.DegreePara
llemism, _
cExecStep.WorkspaceId,
WspParameters:=mcParameters)

If
mcNavSteps.HasChild(StepKey:=cNewInsta
nce.Key) Then
Set nodChild =
mcNavSteps.ChildStep(StepKey:=cNewInst
ance.Key)
Do
If nodChild.EnabledFlag Then
' Create nodes for all it's substeps
only
' if the substeps have been enabled
Call
cNewInstance.CreateSubStep(nodChild,
mcParameters)
End If

Set nodChild =
mcNavSteps.NextStep(StepId:=nodChild.St
epId)
Loop While (Not nodChild Is Nothing)
End If

```

```

mcInstances.Add cNewInstance
Set cNewInstance.Iterators =
DetermineIterators(cNewInstance)

' Increment the number of executing steps on
the parent
cParentInstance.ChildExecuted
(cExecStep.StepId)

Set CreateInstance = cNewInstance

Exit Function

CreateInstanceErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"CreateInstance"
Err.Raise vbObjectError +
errCreateInstanceFailed, _
mstrSource,
LoadResString(errCreateInstanceFailed)

End Function
Private Function
DetermineIterators(cInstanceRec As cInstance)
As cRunCollt
' Returns a collection of all the iterator
values for this
' instance - since an iterator that is defined at
a
' particular level can be used in all it's
substeps, we
' need to navigate the step tree all the way to
the root

Dim cRunIts As cRunCollt
Dim cRunIt As cRunItNode
Dim cStepIt As cIterator
Dim cParentInst As cInstance
Dim cSubStepRec As cSubStep
Dim cSubStepDtls As cStep
Dim lngSubStepId As Long
Dim lngIndex As Long

On Error GoTo DetermineIteratorsErr

Set cRunIts = New cRunCollt

If cInstanceRec.ParentInstanceId > 0 Then
' The last iterator for an instance of a step
is stored
' on it's parent! So navigate up before
beginning the
' search for iterator values.
Set cParentInst =
mcInstances.QueryInstance(cInstanceRec.Pare
ntInstanceId)

' Get the sub-step record for the current
step
' on it's parent's instance!
lngSubStepId = cInstanceRec.Step.StepId
Set cSubStepRec =
cParentInst.QuerySubStep(lngSubStepId)
Set cSubStepDtls =
mcRunSteps.QueryStep(lngSubStepId)

' And determine the next iteration value
for the
' substep in this instance
Set cStepIt =
cSubStepRec.NewIteration(cSubStepDtls)

```

```

If Not cStepIt Is Nothing Then
' Add the iterator details to the collection
since
' an iterator has been defined for the step
Set cRunIt = New cRunItNode
cRunIt.IteratorName =
cSubStepDtls.IteratorName
cRunIt.Value =
SubstituteParameters(cStepIt.Value,
cSubStepDtls.WorkspaceId,
WspParameters:=mcParameters)
cRunIt.StepId = cSubStepRec.StepId
cRunIts.Push cRunIt
End If

' Since the parent instance has all the iterators
upto
' that level, read them and push them on to the
stack for
' this instance
For lngIndex = 0 To
cParentInst.Iterators.Count - 1
Set cRunIt = cParentInst.Iterators(lngIndex)
cRunIts.Push cRunIt
Next lngIndex
End If

Set DetermineIterators = cRunIts

Exit Function

DetermineIteratorsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"DetermineIterators"
Err.Raise vbObjectError +
errExecInstanceFailed, _
mstrSource,
LoadResString(errExecInstanceFailed)

End Function
Private Function
DetermineConstraints(cInstanceRec As cInstance, _
intConsType As ConstraintType) As Variant
' Returns a collection of all the constraints for this
' instance of the passed in type - all the
constraints defined
' for the manager are executed first, followed by
those defined
' for the step. If a step has an iterator defined for
it, each
' constraint is executed only once.

Dim cParentInst As cInstance
Dim cTempInst As cInstance
Dim vntConstraints As Variant
Dim vntTempCons As Variant
Dim cColConstraints() As Variant
Dim lngConsCount As Long

On Error GoTo DetermineConstraintsErr

Set cTempInst = cInstanceRec
lngConsCount = 0

' Go all the way to the root
Do
If cTempInst.ParentInstanceId > 0 Then
Set cParentInst =
mcInstances.QueryInstance(cTempInst.ParentInstan
ceId)
Else

```



```

        Set cParentInst = Nothing
    End If

    ' Check if the step has an iterator
    defined for it
    If
    cTempInst.ValidForIteration(cParentInst,
    intConsType) Then
        vntTempCons =
    mcRunConstraints.ConstraintsForStep( _
        cTempInst.Step.StepId,
    cTempInst.Step.VersionNo, _
        intConsType, blnSort:=True, _
        blnGlobal:=False,
    blnGlobalConstraintsOnly:=False)

        If Not IsEmpty(vntTempCons) Then
            ReDim Preserve
    cColConstraints(lngConsCount)
            cColConstraints(lngConsCount) =
    vntTempCons
            lngConsCount = lngConsCount +
    1
        End If
    End If

    Set cTempInst = cParentInst

    Loop While Not cTempInst Is Nothing

    If lngConsCount > 0 Then
        vntTempCons =
    OrderConstraints(cColConstraints,
    intConsType)
    End If

    DetermineConstraints = vntTempCons

    Exit Function

DetermineConstraintsErr:
    ' Log the error code raised by Visual
    Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
    "DetermineConstraints"
    Err.Raise vbObjectError +
    errExecInstanceFailed, _
        mstrSource,
    LoadResString(errExecInstanceFailed)

End Function
Private Function
GetInstanceToExecute(cParentNode As
cInstance, _
    cSubStepRec As cSubStep, _
    cSubStepDtIs As cStep) As cInstance

    Dim cSubStepInst As cInstance

    On Error GoTo GetInstanceToExecuteErr

    BugAssert Not (cParentNode Is Nothing
    Or _
        cSubStepRec Is Nothing Or _
        cSubStepDtIs Is Nothing), _
        "GetInstanceToExecute: Input
    invalid"

    ' Check if it has iterators
    If cSubStepDtIs.IteratorCount = 0 Then
        ' Check if the step has been executed
        If cSubStepRec.TasksRunning = 0 And
    cSubStepRec.TasksComplete = 0 And _

```

```

        Not
    mcInstances.CompletedInstanceExists(cParent
    Node.InstanceId, cSubStepDtIs) Then
        ' The sub-step hasn't been executed yet.
        ' Create an instance for it and exit
        Set cSubStepInst =
    CreateInstance(cSubStepDtIs, cParentNode)
    Else
        Set cSubStepInst = Nothing
    End If
    Else
        ' Check if there are pending iterations for
    the sub-step
        If Not
    cSubStepRec.NextIteration(cSubStepDtIs) Is
    Nothing Then
            ' Pending iterations exist - create an
    instance for the sub-step and exit
            Set cSubStepInst =
    CreateInstance(cSubStepDtIs, cParentNode)
        Else
            ' No more iterations - continue with the
    next substep
            Set cSubStepInst = Nothing
        End If
    End If

    Set GetInstanceToExecute = cSubStepInst
    Exit Function

GetInstanceToExecuteErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
    "GetInstanceToExecute"
    Err.Raise vbObjectError +
    errNavInstancesFailed, _
        mstrSource,
    LoadResString(errNavInstancesFailed)

End Function

Public Function InstancesForStep(lngStepId
    As Long, ByRef StepStatus As InstanceStatus)
    As cInstances
    ' Returns an array of all the instances for a
    step
    Dim lngIndex As Long
    Dim cTempInst As cInstance
    Dim cStepInstances As cInstances
    Dim cStepRec As cStep

    On Error GoTo InstancesForStepErr

    Set cStepInstances = New cInstances

    For lngIndex = 0 To mcInstances.Count - 1
        Set cTempInst = mcInstances(lngIndex)

        If cTempInst.Step.StepId = lngStepId
    Then
            cStepInstances.Add cTempInst
        End If
    Next lngIndex

    If cStepInstances.Count = 0 Then
        Set cStepRec =
    mcRunSteps.QueryStep(lngStepId)
        If Not
    mcFailures.ExecuteSubStep(cStepRec.ParentSt
    epld) Then
            StepStatus = gintAborted
        End If
        Set cStepRec = Nothing
    End If

```

```

    End If

    ' Set the return value of the function to the array
    of
    ' constraints that has been built above
    Set InstancesForStep = cStepInstances

    Set cStepInstances = Nothing
    Exit Function

InstancesForStepErr:
    ' Log the error code raised by Visual Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
    "InstancesForStep"
    Err.Raise vbObjectError +
    errNavInstancesFailed, mstrSource, _
        LoadResString(errNavInstancesFailed)

End Function
Private Sub
RemoveFreeProcess(lngRunningProcess As Long)
    ' Removes the passed in element from the
    collection of
    ' free objects

    ' Confirm that the last element in the array is the
    one
    ' we need to delete
    If mcFreeSteps(mcFreeSteps.Count - 1) =
    lngRunningProcess Then
        mcFreeSteps.Delete
    Position:=mcFreeSteps.Count - 1
    Else
        ' Ask the class to find the element and delete it
        mcFreeSteps.Delete Item:=lngRunningProcess
    End If

End Sub
Private Sub AddFreeProcess(lngTerminatedProcess
    As Long)
    ' Adds the passed in element to the collection of
    ' free objects

    mcFreeSteps.Add lngTerminatedProcess

End Sub

Private Sub ResetForm(Optional ByVal lngIndex
    As Long)

    Dim lngTemp As Long

    On Error GoTo ResetFormErr

    ' Check if there are any running instances to wait
    for
    If mcFreeSteps.Count <>
    glngNumConcurrentProcesses Then

        For lngTemp = 0 To mcFreeSteps.Count - 1
            If mcFreeSteps(lngTemp) = lngIndex Then
                Exit For
            End If
        Next lngTemp

        If lngTemp <= mcFreeSteps.Count - 1 Then
            ' This process that just completed did not
            exist in the list of
            ' free processes
            Call AddFreeProcess(lngIndex)
        End If
    End If

```

<pre> If Not AnyStepRunning(mcFreeSteps, mbarFree) Then WriteToWspLog (mintRunComplete) ' All steps are complete RaiseEvent RunComplete(Determine64BitTime()) End If Else WriteToWspLog (mintRunComplete) RaiseEvent RunComplete(Determine64BitTime()) End If Exit Sub ResetFormErr: End Sub Private Function NewInstanceId() As Long ' Will return new instance id's - uses a static counter ' that it increments each time Static lngInstance As Long lngInstance = lngInstance + 1 NewInstanceId = lngInstance End Function Private Function RunPendingStepInBranch(strCurBranchRoot As String, _ Optional cExecInstance As cInstance = Nothing) As cInstance ' Runs a worker step in the branch being executed, if ' there are any pending execution ' This function is also called when a step has just completed ' execution - in which case the terminated instance is ' passed in as the optional parameter. When that happens, ' we first try to execute the siblings of the terminated ' step if any are pending execution. ' If the terminated instance has not been passed in, we ' start with the dummy root instance and navigate down, ' trying to find a pending worker step. Dim cExecSubStep As cStep Dim cParentInstance As cInstance Dim cNextInst As cInstance On Error GoTo RunPendingStepInBranchErr If Not cExecInstance Is Nothing Then ' Called when an instance has terminated ' When a worker step terminates, then we need to ' decrement the number of running steps on it's ' manager Set cParentInstance = _ mcInstances.QueryInstance(cExecInstance.P arentInstanceId) Else </pre>	<pre> If StringEmpty(strCurBranchRoot) Or mcDummyRootInstance Is Nothing Then ' Run complete - event raised by Run method Set RunPendingStepInBranch = Nothing Exit Function End If ' If there are no pending steps on the root instance, ' then there are no steps within the branch that need ' to be executed If mcDummyRootInstance.AllComplete Or mcDummyRootInstance.AllStarted Then Set RunPendingStepInBranch = Nothing Exit Function End If Set cParentInstance = mcDummyRootInstance End If Do Set cNextInst = GetSubStepToExecute(cParentInstance) If cNextInst Is Nothing Then ' There are no steps within the branch that can ' be executed - If we are at the dummy instance, ' this branch has completed executing If cParentInstance.Key = mstrDummyRootKey Then Set cNextInst = Nothing Exit Do Else ' Go to the parent instance and try to find ' some other sibling is pending execution Set cNextInst = mcInstances.QueryInstance(cParentInstance.Pa rentInstanceId) If cParentInstance.SubSteps.Count = 0 Then cNextInst.ChildTerminated cParentInstance.Step.StepId End If End If End If BugAssert Not cNextInst Is Nothing Set cParentInstance = cNextInst Loop While cNextInst.Step.StepType <> gintWorkerStep If Not cNextInst Is Nothing Then Call ExecuteStep(cNextInst) End If Set RunPendingStepInBranch = cNextInst Exit Function RunPendingStepInBranchErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errNavInstancesFailed, _ </pre>	<pre> mstrModuleName & "RunPendingStepInBranch", LoadResString(errNavInstancesFailed) End Function Private Function RunPendingSibling(cTermInstance As cInstance, _ dtmCompleteTime As Currency) As cInstance ' This process is called when a step terminates. Tries to ' run a sibling of the terminated step, if one is pending ' execution. Dim cParentInstance As cInstance Dim cNextInst As cInstance On Error GoTo RunPendingSiblingErr If StringEmpty(mstrCurBranchRoot) Or mcDummyRootInstance Is Nothing Then ' Run complete - event raised by Run method Set RunPendingSibling = Nothing Exit Function End If BugAssert cTermInstance.ParentInstanceId > 0, "Orphaned instance in array!" ' When a worker step terminates, then we need to ' decrement the number of running steps on it's ' manager Set cParentInstance = mcInstances.QueryInstance(cTermInstance.ParentIn stanceId) ' Decrement the number of running processes on the ' parent by 1 Call cParentInstance.ChildTerminated(cTermInstance.St ep.StepId) ' The first step that terminates has to be a worker ' If it is complete, update the completed steps on the ' parent by 1. Call cParentInstance.ChildCompleted(cTermInstance.St ep.StepId) cParentInstance.AllStarted = False Do Set cNextInst = GetSubStepToExecute(cParentInstance, dtmCompleteTime) If cNextInst Is Nothing Then If cParentInstance.Key = mstrDummyRootKey Then Set cNextInst = Nothing Exit Do Else ' Go to the parent instance and try to find ' some other sibling is pending execution Set cNextInst = mcInstances.QueryInstance(cParentInstance.ParentI nstanceId) If cParentInstance.IsRunning Then cNextInst.AllStarted = True Else ' No more sub-steps to execute Call cNextInst.ChildCompleted(cParentInstance.Step.St epId) </pre>
---	---	--

```

        Call
cNextInst.ChildTerminated(cParentInstance.
Step.StepId)
        cNextInst.AllStarted = False
        End If
        End If
        End If

        BugAssert Not cNextInst Is Nothing
        Set cParentInstance = cNextInst

        Loop While cNextInst.Step.StepType <>
gintWorkerStep

        If Not cNextInst Is Nothing Then
            Call ExecuteStep(cNextInst)
        End If

        Set RunPendingSibling = cNextInst

        Exit Function

RunPendingSiblingErr:
' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    On Error GoTo 0
    mstrSource = mstrModuleName &
"RunPendingSibling"
    Err.Raise vbObjectError +
errNavInstancesFailed, mstrSource, _
        LoadResString(errNavInstancesFailed)

End Function
Private Sub
RunPendingSiblings(cTermInstance As
cInstance, _
    dtmCompleteTime As Currency)
' This process is called when a step
terminates. Tries to
' run siblings of the terminated step, if
they are pending
' execution.

    Dim cExecInst As cInstance

    On Error GoTo RunPendingSiblingsErr
    BugMessage "In RunPendingSiblings"

' Call a procedure to run the sibling of the
terminated
' step, if any. This procedure will also
update the
' number of complete/running tasks on the
manager steps.
    Set cExecInst =
RunPendingSibling(cTermInstance,
dtmCompleteTime)

    If Not cExecInst Is Nothing Then
        Do
            ' Execute any other pending steps in
the branch.
            ' The step that has just terminated
might be
            ' the last one that was executing in a
sub-branch.
            ' That would mean that we can
execute another
            ' sub-branch that might involve more
than 1 step.
            ' Pass the just executed step as a
parameter.

```

```

        Set cExecInst =
RunPendingStepInBranch(mstrCurBranchRoot
, cExecInst)
        Loop While Not cExecInst Is Nothing
        Else
            If Not mcDummyRootInstance.IsRunning
Then
                ' All steps have been executed in the
branch - run
                ' a new branch
                Call RunNewBranch
            Else
                ' There are no more steps to execute in
the current
                ' branch but we have running processes.
                End If
            End If

        Exit Sub

RunPendingSiblingsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunPendingSiblings"
Err.Raise vbObjectError +
errNavInstancesFailed, _
    mstrSource,
LoadResString(errNavInstancesFailed)

End Sub

Private Sub
NoSubStepsToExecute(cMgrInstance As
cInstance, Optional dtmCompleteTime As
Currency = gdtmEmpty)
' Called when we cannot find any more
substeps to run for
' manager step - set the allcomplete or
allstarted
' properties to true

    If cMgrInstance.IsRunning() Then
        cMgrInstance.AllStarted = True
    Else
        cMgrInstance.AllComplete = True
        If dtmCompleteTime <> gdtmEmpty
Then
            ' Update the end time on the manager
step
            Call
TimeCompleteUpdateForStep(cMgrInstance,
dtmCompleteTime)
        End If
    End If

End Sub

Private Function
GetSubStepToExecute(cParentNode As
cInstance, _
    Optional dtmCompleteTime As Currency
= 0) As cInstance
' Returns the child of the passed in node that
is to be
' executed next. Checks if we are in the
middle of an instance
' being executed in which case it returns the
pending
' instance. Creates a new instance if there are
pending
' instances for a sub-step.

    Dim lngIndex As Long

```

```

    Dim cSubStepRec As cSubStep
    Dim cSubStepDtls As cStep
    Dim cSubStepInst As cInstance

    On Error GoTo GetSubStepToExecuteErr

' There are a number of cases that need to be
accounted
' for here.
' 1. While traversing through all enabled nodes
for the
' first time - instance records may not exist for the
' substeps.
' 2. Instance records exist, and there are processes
' that need to be executed for a sub-step
' 3. There are no more processes that need to be
currently
' executed (till a process completes)
' 4. There are no more processes that need to be
executed
' (All substeps have completed execution)

' This is the only point where we check the Abort
flag -
' since this is the heart of the navigation routine
that
' selects processes to execute. Also, when a step
terminates
' selection of the next process goes through here.
If mblnAbort Then
    Set GetSubStepToExecute = Nothing
    cParentNode.Status = gintAborted
    Exit Function
End If

If mblnAsk Then
    Set GetSubStepToExecute = Nothing
    Exit Function
End If

If Not
mcFailures.ExecuteSubStep(cParentNode.Step.Step
Id) Then
    Set GetSubStepToExecute = Nothing
    cParentNode.Status = gintAborted
    Exit Function
End If

' First check if there are pending steps for the
parent!
If cParentNode.IsPending Then
' Loop through all the sub-steps for the parent
node
    For lngIndex = 0 To
cParentNode.SubSteps.Count - 1
        Set cSubStepRec =
cParentNode.SubSteps(lngIndex)
        Set cSubStepDtls =
mcRunSteps.QueryStep(cSubStepRec.StepId)
        If Not
mcInstances.InstanceAborted(cSubStepRec) Then
            ' Check if the sub-step is a worker
            If cSubStepDtls.StepType =
gintWorkerStep Then
                ' Find/create an instance to execute
                Set cSubStepInst =
GetInstanceToExecute(_
                    cParentNode, cSubStepRec,
cSubStepDtls)
                If Not cSubStepInst Is Nothing Then
                    Exit For
                Else
                    ' Continue w/ the next sub-step
                End If
            Else

```

```

' The sub-step is a manager step
' Check if there are any pending
instances for
' the manager
Set cSubStepInst =
mcInstances.QueryPendingInstance( _
    cParentNode.InstanceId,
cSubStepRec.StepId)
If cSubStepInst Is Nothing Then
' Find/create an instance to
execute
Set cSubStepInst =
GetInstanceToExecute( _
    cParentNode,
cSubStepRec, cSubStepDtls)
If Not cSubStepInst Is
Nothing Then
Exit For
Else
' Continue w/ the next sub-
step
End If
Else
' We have found a pending
instance for the
sub-step (manager) - exit the
loop
Exit For
End If
End If
End If
Next lngIndex

If lngIndex >
cParentNode.SubSteps.Count - 1 Or
cParentNode.SubSteps.Count = 0 Then
' If we could not find any sub-steps
to execute,
' mark the parent node as
complete/all started
Call
NoSubStepsToExecute(cParentNode,
dtmCompleteTime)
Set cSubStepInst = Nothing
End If
End If

Set GetSubStepToExecute = cSubStepInst
Exit Function

GetSubStepToExecuteErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"GetSubStepToExecute"
Err.Raise vbObjectError +
errNavInstancesFailed, mstrSource, _
LoadResString(errNavInstancesFailed)

End Function

Private Sub
TimeCompleteUpdateForStep(cMgrInstance
As cInstance, ByVal endTime As Currency)

' Called when there are no more sub-steps
to execute for
' the manager step. It updates the end time
and status on
' the manager.
Dim lElapsed As Long

```

```

On Error GoTo
TimeCompleteUpdateForStepErr

If cMgrInstance.Key <>
mstrDummyRootKey Then
cMgrInstance.EndTime = endTime
cMgrInstance.Status = gintComplete
lElapsed = (endTime -
cMgrInstance.StartTime) * 10000
cMgrInstance.ElapsedTime = lElapsed
RaiseEvent
StepComplete(cMgrInstance.Step, endTime,
cMgrInstance.InstanceId, lElapsed)
End If

Exit Sub

TimeCompleteUpdateForStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed,
mstrModuleName &
"TimeCompleteUpdateForStep"

End Sub

Private Function GetFreeObject() As Long

' Check the array of free objects and retrieve
the first one
If mcFreeSteps.Count > 0 Then
GetFreeObject =
mcFreeSteps(mcFreeSteps.Count - 1)
Else
mstrSource = mstrModuleName &
"GetFreeObject"
ShowError errMaxProcessesExceeded
On Error GoTo 0
Err.Raise vbObjectError +
errMaxProcessesExceeded, _
mstrSource, _

LoadResString(errMaxProcessesExceeded)
End If

End Function

Private Function
StepTerminated(cCompleteStep As cStep,
ByVal dtmCompleteTime As Currency, _
ByVal lngIndex As Long, ByVal
InstanceId As Long, ByVal ExecutionStatus
As InstanceStatus) As cStep
' This procedure is called whenever a step
terminates.
Dim cTermRec As cTermStep
Dim cInstRec As cInstance
Dim cStartInst As cInstance
Dim lElapsed As Long
Dim sLogLabel As String
Dim LogLabels As New cVectorStr
Dim iItIndex As Long

On Error GoTo StepTerminatedErr

Set cInstRec =
mcInstances.QueryInstance(InstanceId)
If dtmCompleteTime <> 0 And
cInstRec.StartTime <> 0 Then
' Convert to milliseconds since that is the
default precision
lElapsed = (dtmCompleteTime -
cInstRec.StartTime) * 10000
Else
lElapsed = 0
End If

```

```

Set cStartInst = cInstRec
iItIndex = 0
Do While cInstRec.Key <> mstrDummyRootKey
sLogLabel = gstrSQ &
cInstRec.Step.StepLabel & gstrSQ

If iItIndex < cInstRec.Iterators.Count Then
If cStartInst.Iterators(iItIndex).StepId =
cInstRec.Step.StepId Then
sLogLabel = sLogLabel & msIt & gstrSQ
& cStartInst.Iterators(iItIndex).IteratorName &
gstrSQ & _
msItValue & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
iItIndex = iItIndex + 1
End If
End If

If cInstRec.Key = cStartInst.Key Then
' Append the execution status
sLogLabel = sLogLabel & " Status: " &
gstrSQ & gsExecutionStatus(ExecutionStatus) &
gstrSQ
If ExecutionStatus = gintFailed Then
' Append the continuation criteria for the
step since it failed
sLogLabel = sLogLabel & " Continuation
Criteria: " & gstrSQ &
gsContCriteria(cInstRec.Step.ContinuationCriteria)
& gstrSQ
End If
End If
LogLabels.Add sLogLabel

Set cInstRec =
mcInstances.QueryInstance(cInstRec.ParentInstanc
eld)
Loop

Call WriteToWspLog(mintStepComplete,
LogLabels, dtmCompleteTime)
Set LogLabels = Nothing

' Adds the terminated step details to a queue.
Set cTermRec = New cTermStep
cTermRec.ExecutionStatus = ExecutionStatus
cTermRec.Index = lngIndex
cTermRec.InstanceId = InstanceId
cTermRec.TimeComplete = dtmCompleteTime
Call mcTermSteps.Add(cTermRec)
Set cTermRec = Nothing

RaiseEvent StepComplete(cCompleteStep,
dtmCompleteTime, InstanceId, lElapsed)

Exit Function

StepTerminatedErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errExecuteBranchFailed, mstrSource
Call ResetForm(lngIndex)

End Function

Public Property Let RootKey(ByVal vdata As
String)

mstrRootKey = vdata

End Property

Public Property Get RootKey() As String
RootKey = mstrRootKey
End Property

```

```

Private Function InitExecStep() As
cRunStep
' Since arrays of objects cannot be
declared as WithEvents,
' we use a limited number of objects and
set a maximum
' on the number of steps that can run in
parallel
' This is a wrapper that will create an
instance of
' a cExecuteSM object depending on the
index
Dim lngIndex As Long

On Error GoTo InitExecStepErr

lngIndex = GetFreeObject

Select Case lngIndex + 1
Case 1
Set cExecStep1 = New cRunStep
Set InitExecStep = cExecStep1
Case 2
Set cExecStep2 = New cRunStep
Set InitExecStep = cExecStep2
Case 3
Set cExecStep3 = New cRunStep
Set InitExecStep = cExecStep3
Case 4
Set cExecStep4 = New cRunStep
Set InitExecStep = cExecStep4
Case 5
Set cExecStep5 = New cRunStep
Set InitExecStep = cExecStep5
Case 6
Set cExecStep6 = New cRunStep
Set InitExecStep = cExecStep6
Case 7
Set cExecStep7 = New cRunStep
Set InitExecStep = cExecStep7
Case 8
Set cExecStep8 = New cRunStep
Set InitExecStep = cExecStep8
Case 9
Set cExecStep9 = New cRunStep
Set InitExecStep = cExecStep9
Case 10
Set cExecStep10 = New cRunStep
Set InitExecStep = cExecStep10
Case 11
Set cExecStep11 = New cRunStep
Set InitExecStep = cExecStep11
Case 12
Set cExecStep12 = New cRunStep
Set InitExecStep = cExecStep12
Case 13
Set cExecStep13 = New cRunStep
Set InitExecStep = cExecStep13
Case 14
Set cExecStep14 = New cRunStep
Set InitExecStep = cExecStep14
Case 15
Set cExecStep15 = New cRunStep
Set InitExecStep = cExecStep15
Case 16
Set cExecStep16 = New cRunStep
Set InitExecStep = cExecStep16
Case 17
Set cExecStep17 = New cRunStep
Set InitExecStep = cExecStep17
Case 18
Set cExecStep18 = New cRunStep
Set InitExecStep = cExecStep18
Case 19

```

```

Set cExecStep19 = New cRunStep
Set InitExecStep = cExecStep19
Case 20
Set cExecStep20 = New cRunStep
Set InitExecStep = cExecStep20
Case 21
Set cExecStep21 = New cRunStep
Set InitExecStep = cExecStep21
Case 22
Set cExecStep22 = New cRunStep
Set InitExecStep = cExecStep22
Case 23
Set cExecStep23 = New cRunStep
Set InitExecStep = cExecStep23
Case 24
Set cExecStep24 = New cRunStep
Set InitExecStep = cExecStep24
Case 25
Set cExecStep25 = New cRunStep
Set InitExecStep = cExecStep25
Case 26
Set cExecStep26 = New cRunStep
Set InitExecStep = cExecStep26
Case 27
Set cExecStep27 = New cRunStep
Set InitExecStep = cExecStep27
Case 28
Set cExecStep28 = New cRunStep
Set InitExecStep = cExecStep28
Case 29
Set cExecStep29 = New cRunStep
Set InitExecStep = cExecStep29
Case 30
Set cExecStep30 = New cRunStep
Set InitExecStep = cExecStep30
Case 31
Set cExecStep31 = New cRunStep
Set InitExecStep = cExecStep31
Case 32
Set cExecStep32 = New cRunStep
Set InitExecStep = cExecStep32
Case 33
Set cExecStep33 = New cRunStep
Set InitExecStep = cExecStep33
Case 34
Set cExecStep34 = New cRunStep
Set InitExecStep = cExecStep34
Case 35
Set cExecStep35 = New cRunStep
Set InitExecStep = cExecStep35
Case 36
Set cExecStep36 = New cRunStep
Set InitExecStep = cExecStep36
Case 37
Set cExecStep37 = New cRunStep
Set InitExecStep = cExecStep37
Case 38
Set cExecStep38 = New cRunStep
Set InitExecStep = cExecStep38
Case 39
Set cExecStep39 = New cRunStep
Set InitExecStep = cExecStep39
Case 40
Set cExecStep40 = New cRunStep
Set InitExecStep = cExecStep40
Case 41
Set cExecStep41 = New cRunStep
Set InitExecStep = cExecStep41
Case 42
Set cExecStep42 = New cRunStep
Set InitExecStep = cExecStep42
Case 43
Set cExecStep43 = New cRunStep
Set InitExecStep = cExecStep43
Case 44

```

```

Set cExecStep44 = New cRunStep
Set InitExecStep = cExecStep44
Case 45
Set cExecStep45 = New cRunStep
Set InitExecStep = cExecStep45
Case 46
Set cExecStep46 = New cRunStep
Set InitExecStep = cExecStep46
Case 47
Set cExecStep47 = New cRunStep
Set InitExecStep = cExecStep47
Case 48
Set cExecStep48 = New cRunStep
Set InitExecStep = cExecStep48
Case 49
Set cExecStep49 = New cRunStep
Set InitExecStep = cExecStep49
Case 50
Set cExecStep50 = New cRunStep
Set InitExecStep = cExecStep50
Case 51
Set cExecStep51 = New cRunStep
Set InitExecStep = cExecStep51
Case 52
Set cExecStep52 = New cRunStep
Set InitExecStep = cExecStep52
Case 53
Set cExecStep53 = New cRunStep
Set InitExecStep = cExecStep53
Case 54
Set cExecStep54 = New cRunStep
Set InitExecStep = cExecStep54
Case 55
Set cExecStep55 = New cRunStep
Set InitExecStep = cExecStep55
Case 56
Set cExecStep56 = New cRunStep
Set InitExecStep = cExecStep56
Case 57
Set cExecStep57 = New cRunStep
Set InitExecStep = cExecStep57
Case 58
Set cExecStep58 = New cRunStep
Set InitExecStep = cExecStep58
Case 59
Set cExecStep59 = New cRunStep
Set InitExecStep = cExecStep59
Case 60
Set cExecStep60 = New cRunStep
Set InitExecStep = cExecStep60
Case 61
Set cExecStep61 = New cRunStep
Set InitExecStep = cExecStep61
Case 62
Set cExecStep62 = New cRunStep
Set InitExecStep = cExecStep62
Case 63
Set cExecStep63 = New cRunStep
Set InitExecStep = cExecStep63
Case 64
Set cExecStep64 = New cRunStep
Set InitExecStep = cExecStep64
Case 65
Set cExecStep65 = New cRunStep
Set InitExecStep = cExecStep65
Case 66
Set cExecStep66 = New cRunStep
Set InitExecStep = cExecStep66
Case 67
Set cExecStep67 = New cRunStep
Set InitExecStep = cExecStep67
Case 68
Set cExecStep68 = New cRunStep
Set InitExecStep = cExecStep68
Case 69

```

```

Set cExecStep69 = New cRunStep
Set InitExecStep = cExecStep69
Case 70
Set cExecStep70 = New cRunStep
Set InitExecStep = cExecStep70
Case 71
Set cExecStep71 = New cRunStep
Set InitExecStep = cExecStep71
Case 72
Set cExecStep72 = New cRunStep
Set InitExecStep = cExecStep72
Case 73
Set cExecStep73 = New cRunStep
Set InitExecStep = cExecStep73
Case 74
Set cExecStep74 = New cRunStep
Set InitExecStep = cExecStep74
Case 75
Set cExecStep75 = New cRunStep
Set InitExecStep = cExecStep75
Case 76
Set cExecStep76 = New cRunStep
Set InitExecStep = cExecStep76
Case 77
Set cExecStep77 = New cRunStep
Set InitExecStep = cExecStep77
Case 78
Set cExecStep78 = New cRunStep
Set InitExecStep = cExecStep78
Case 79
Set cExecStep79 = New cRunStep
Set InitExecStep = cExecStep79
Case 80
Set cExecStep80 = New cRunStep
Set InitExecStep = cExecStep80
Case 81
Set cExecStep81 = New cRunStep
Set InitExecStep = cExecStep81
Case 82
Set cExecStep82 = New cRunStep
Set InitExecStep = cExecStep82
Case 83
Set cExecStep83 = New cRunStep
Set InitExecStep = cExecStep83
Case 84
Set cExecStep84 = New cRunStep
Set InitExecStep = cExecStep84
Case 85
Set cExecStep85 = New cRunStep
Set InitExecStep = cExecStep85
Case 86
Set cExecStep86 = New cRunStep
Set InitExecStep = cExecStep86
Case 87
Set cExecStep87 = New cRunStep
Set InitExecStep = cExecStep87
Case 88
Set cExecStep88 = New cRunStep
Set InitExecStep = cExecStep88
Case 89
Set cExecStep89 = New cRunStep
Set InitExecStep = cExecStep89
Case 90
Set cExecStep90 = New cRunStep
Set InitExecStep = cExecStep90
Case 91
Set cExecStep91 = New cRunStep
Set InitExecStep = cExecStep91
Case 92
Set cExecStep92 = New cRunStep
Set InitExecStep = cExecStep92
Case 93
Set cExecStep93 = New cRunStep
Set InitExecStep = cExecStep93
Case 94

```

```

Set cExecStep94 = New cRunStep
Set InitExecStep = cExecStep94
Case 95
Set cExecStep95 = New cRunStep
Set InitExecStep = cExecStep95
Case 96
Set cExecStep96 = New cRunStep
Set InitExecStep = cExecStep96
Case 97
Set cExecStep97 = New cRunStep
Set InitExecStep = cExecStep97
Case 98
Set cExecStep98 = New cRunStep
Set InitExecStep = cExecStep98
Case 99
Set cExecStep99 = New cRunStep
Set InitExecStep = cExecStep99
Case Else
Set InitExecStep = Nothing
End Select

BugMessage "Sending cExecStep" &
(lngIndex + 1) & "!"

If Not InitExecStep Is Nothing Then
InitExecStep.Index = lngIndex

' Remove this element from the collection
of free objects
Call RemoveFreeProcess(lngIndex)
End If

Exit Function

InitExecStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Set InitExecStep = Nothing

End Function
Public Sub Run()
' Calls procedures to build a list of all the
steps that
' need to be executed and to execute them
' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cTempStep As cStep

On Error GoTo RunErr

If StringEmpty(mstrRootKey) Then
Call ShowError(errExecuteBranchFailed)
On Error GoTo 0
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrModuleName &
"Run", _

LoadResString(errExecuteBranchFailed)
Else
' Execute the first branch
WriteToWspLog (mintRunStart)
RaiseEvent
RunStart(Determine64BitTime(),
mcWspLog.FileName)

If
mcNavSteps.HasChild(StepKey:=mstrRootKey) Then
Set cTempStep =
mcNavSteps.ChildStep(StepKey:=mstrRootKey)

mstrCurBranchRoot =
MakeKeyValid(cTempStep.StepId,
cTempStep.StepType)

```

```

Call
CreateDummyInstance(mstrCurBranchRoot)

' Run all pending steps in the branch
If Not RunBranch(mstrCurBranchRoot)
Then
' Execute a new branch if there aren't any
' steps to run
Call RunNewBranch
End If
Else
WriteToWspLog (mintRunComplete)
' No children to execute - the run is complete
RaiseEvent
RunComplete(Determine64BitTime())
End If
End If

Exit Sub

RunErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
Call ResetForm

End Sub
Private Sub RunNewBranch()
' We will build a tree of all instances that occur
and
' the count of the sub-steps that are running will
be
' stored at each node in the tree (maintained
internally
' as an array). Since there can be multiple
iterations
' of the top level nodes running at the same time,
we
' create a dummy node at the root that keeps a
record of
' the instances of the top level node.

' Determines whether the run has
started/terminated and
' raises the Run Start and Complete events.
Dim cNextStep As cStep
Dim bRunComplete As Boolean

On Error GoTo RunNewBranchErr

bRunComplete = False

Do
If StringEmpty(mstrCurBranchRoot) Then
Exit Do
On Error GoTo 0
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrSource, _
LoadResString(errExecuteBranchFailed)
Else
Set cNextStep =
mcNavSteps.NextStep(StepKey:=mstrCurBranchRoot)

If cNextStep Is Nothing Then
mstrCurBranchRoot = gstrEmptyString
bRunComplete = True
Exit Do
Else
' Starting execution of a new branch -
initialize the
' module-level variable

```

```

mstrCurBranchRoot =
MakeKeyValid(cNextStep.StepId,
cNextStep.StepType)
Call
CreateDummyInstance(mstrCurBranchRoot)
End If
End If
Debug.Print "Running new branch: " &
mstrCurBranchRoot

' Loop until we find a branch that has
steps to execute
Loop While Not
RunBranch(mstrCurBranchRoot)

If bRunComplete Then
WriteToWspLog (mintRunComplete)
' Run is complete
RaiseEvent
RunComplete(Determine64BitTime())
End If

Exit Sub

RunNewBranchErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
Call ShowError(errExecuteBranchFailed,
OptArgs:=mstrCurBranchRoot)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunNewBranch"
Err.Raise vbObjectError +
errExecuteBranchFailed, mstrSource, _

LoadResString(errExecuteBranchFailed)

End Sub
Private Function RunBranch(strRootNode
As String) As Boolean
' This procedure is called to run all the
necessary steps
' in a branch. It can also be called when a
step terminates,
' in which case the terminated step is
passed in as the
' optional parameter. When a step
terminates, we need to
' either wait for some other steps to
terminate before
' we execute more steps or run as many
steps as necessary
' Returns True if there are steps currently
executing
' in the branch, else returns False
Dim cRunning As cInstance

On Error GoTo RunBranchErr

If Not StringEmpty(strRootNode) Then
' Call a procedure to execute all the
enabled steps
' in the branch - will return the step
node that is
' being executed - nothing means 'No
more steps to
' execute in the branch'.
Do
Set cRunning =
RunPendingStepInBranch(strRootNode,
cRunning)

Loop While Not cRunning Is Nothing

```

```

RunBranch =
mcDummyRootInstance.IsRunning
End If

Exit Function

RunBranchErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"RunBranch"
Err.Raise vbObjectError +
errExecuteBranchFailed, _
mstrSource,
LoadResString(errExecuteBranchFailed)

End Function
Private Sub
TimeUpdateForProcess(StepRecord As cStep,
_
ByVal InstanceId As Long, _
Optional ByVal StartTime As Currency =
0, _
Optional ByVal EndTime As Currency =
0, _
Optional ByVal ElapsedTime As Long =
0, _
Optional Command As String)
' We do not maintain start and end
timestamps for the constraint
' of a step. Hence we check if the process
that just started/
' terminated is the worker step that is being
executed. If so,
' we update the start/end time and status on
the instance record.

Dim cInstanceRec As cInstance
Dim sItVal As String

On Error GoTo TimeUpdateForProcessErr

Set cInstanceRec =
mcInstances.QueryInstance(InstanceId)

If StartTime = 0 Then
RaiseEvent ProcessComplete(StepRecord,
EndTime, InstanceId, ElapsedTime)
Else
sItVal =
GetInstanceItValue(cInstanceRec)
RaiseEvent ProcessStart(StepRecord,
Command, StartTime, InstanceId, _
cInstanceRec.ParentInstanceId,
sItVal)
End If

Call
cInstanceRec.UpdateStartTime(StepRecord.Ste
pId, StartTime, EndTime, ElapsedTime)

Exit Sub

TimeUpdateForProcessErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
WriteError errUpdateDisplayFailed,
mstrModuleName & "TimeUpdateForProcess"

End Sub
Private Sub
TimeStartUpdateForStep(StepRecord As
cStep, _
ByVal InstanceId As Long, _

```

```

ByVal StartTime As Currency)

' Called when a step starts execution. Checks if
this is the
' first enabled child of the manager step. If so,
updates
' the start time and status on the manager.
' Also raises the Step Start event for the
completed step.

Dim cStartInst As cInstance
Dim cInstanceRec As cInstance
Dim LogLabels As New cVectorStr
Dim iItIndex As Long
Dim sLogLabel As String
Dim sPath As String
Dim sIt As String
Dim sItVal As String

On Error GoTo TimeStartUpdateForStepErr

Set cStartInst =
mcInstances.QueryInstance(InstanceId)

' Determine the step path and iterator values for
the step and raise a step start event
Set cInstanceRec = cStartInst
Do While cInstanceRec.Key <>
mstrDummyRootKey
If Not StringEmpty(sPath) Then
sPath = sPath & gstrFileSeparator
End If
sPath = sPath & gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.ParentIns
tancedId)
Loop

For iItIndex = cStartInst.Iterators.Count - 1 To 0
Step -1
If Not StringEmpty(sIt) Then
sIt = sIt & gstrFileSeparator
End If
sIt = sIt & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
Next iItIndex

sItVal = GetInstanceItValue(cStartInst)
RaiseEvent StepStart(StepRecord, StartTime,
InstanceId, cStartInst.ParentInstanceId, _
sPath, sIt, sItVal)

iItIndex = 0
Set cInstanceRec = cStartInst
' Raise a StepStart event for the manager step, if
this is it's first sub-step being executed
Do While cInstanceRec.Key <>
mstrDummyRootKey

sLogLabel = gstrSQ &
cInstanceRec.Step.StepLabel & gstrSQ
If iItIndex < cStartInst.Iterators.Count Then
If cStartInst.Iterators(iItIndex).StepId =
cInstanceRec.Step.StepId Then
sLogLabel = sLogLabel & msIt & gstrSQ
& cStartInst.Iterators(iItIndex).IteratorName &
gstrSQ & _
msItValue & gstrSQ &
cStartInst.Iterators(iItIndex).Value & gstrSQ
iItIndex = iItIndex + 1
End If
End If
LogLabels.Add sLogLabel

```

```

    If cInstanceRec.Key <> cStartInst.Key
    And cInstanceRec.StartTime = 0 Then
        cInstanceRec.StartTime = StartTime
        cInstanceRec.Status = gintRunning
        sItVal =
GetInstancelValue(cInstanceRec)
        ' The step path and iterator values are
not needed for manager steps, since
        ' they are primarily used by the run
status form
        RaiseEvent
StepStart(cInstanceRec.Step, StartTime,
cInstanceRec.InstanceId, _
        cInstanceRec.ParentInstanceId,
gstrEmptyString, gstrEmptyString, _
        sItVal)
    End If

    Set cInstanceRec =
mcInstances.QueryInstance(cInstanceRec.Pa
rentInstanceId)
    Loop

    Call WriteToWspLog(mintStepStart,
LogLabels, StartTime)
    Set LogLabels = Nothing

    Exit Sub

TimeStartUpdateForStepErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    WriteError errUpdateDisplayFailed,
mstrModuleName &
"TimeStartUpdateForStep"

End Sub
Private Sub WriteToWspLog(iLogEvent As
WspLogEvents, Optional StepDtls As
cVectorStr, _
        Optional dtStamp As Currency =
gdtmEmpty)

    ' Writes to the workspace log that is
generated for the run. The last three
    ' parameters are valid only for Step Start
and Step Complete events.
    Static bError As Boolean
    Dim sLabel As String
    Dim lIndex As Long
    Dim bHdr As Boolean
    Dim cTempConn As cConnection

    On Error GoTo WriteToWspLogErr

    Select Case iLogEvent
        Case mintRunStart
            Set mcWspLog = New cFileSM
            mcWspLog.FileName =
GetDefaultDir(WspId, mcParameters) &
gstrFileSeparator & _
                Trim(Str(RunId)) &
gstrFileSeparator & "SMLog-" &
Format(Now, FMT_WSP_LOG_FILE) &
gstrLogFileSuffix
            mcWspLog.WriteLine
(JulianDateToString(Determine64BitTime()
) & " Start Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId
)) & gstrSQ

            ' Write all current parameter values
to the log
            bHdr = False

```

```

        For lIndex = 0 To
mcParameters.ParameterCount - 1
            If
mcParameters(lIndex).ParameterType <>
gintParameterApplication Then
                If Not bHdr Then
                    mcWspLog.WriteField
JulianDateToString(Determine64BitTime()) &
" Parameters: "
                    bHdr = True
                Else
                    mcWspLog.WriteField vbTab
& vbTab & vbTab
                End If
                mcWspLog.WriteLine vbTab &
gstrSQ &
mcParameters(lIndex).ParameterName &
gstrSQ & vbTab & vbTab & gstrSQ &
mcParameters(lIndex).ParameterValue &
gstrSQ
            End If
        Next lIndex

        ' Write all connection properties to the
log
        For lIndex = 0 To
RunConnections.Count - 1
            Set cTempConn =
RunConnections(lIndex)
            If lIndex = 0 Then
                mcWspLog.WriteField
JulianDateToString(Determine64BitTime()) &
" Connections: "
            Else
                mcWspLog.WriteField vbTab &
vbTab & vbTab
            End If
            mcWspLog.WriteLine vbTab &
gstrSQ & cTempConn.ConnectionName &
gstrSQ & _
                vbTab & vbTab & gstrSQ &
cTempConn.ConnectionValue & gstrSQ & _
                vbTab & "No Count: " &
gstrSQ & cTempConn.NoCountDisplay &
gstrSQ & gstrBlank & _
                "No Execute: " & gstrSQ &
cTempConn.NoExecute & gstrSQ & gstrBlank
& _
                "Parse Query Only: " & gstrSQ
& cTempConn.ParseQueryOnly & gstrSQ &
gstrBlank & _
                "Quoted Identifiers: " & gstrSQ
& cTempConn.QuotedIdentifiers & gstrSQ &
gstrBlank & _
                "ANSI Nulls: " & gstrSQ &
cTempConn.AnsiNulls & gstrSQ & gstrBlank
& _
                "Show Query Plan: " & gstrSQ
& cTempConn.ShowQueryPlan & gstrSQ &
gstrBlank & _
                "Show Stats Time: " & gstrSQ
& cTempConn.ShowStatsTime & gstrSQ &
gstrBlank & _
                "Show Stats IO: " & gstrSQ &
cTempConn.ShowStatsIO & gstrSQ &
gstrBlank & _
                "Row Count" & gstrSQ &
cTempConn.RowCount & gstrSQ & gstrBlank
& _
                "Query Timeout" & gstrSQ &
cTempConn.QueryTimeout & gstrSQ
            Next lIndex

        Case mintRunComplete
            BugAssert Not mcWspLog Is Nothing

```

```

        mcWspLog.WriteLine
(JulianDateToString(Determine64BitTime()) &
" Comp. Run: " & vbTab & gstrSQ &
GetWorkspaceDetails(WorkspaceId:=WspId)) &
gstrSQ
        Set mcWspLog = Nothing

        Case mintStepStart
            For lIndex = StepDtls.Count - 1 To 0 Step -1
                sLabel = StepDtls(lIndex)
                If lIndex = StepDtls.Count - 1 Then
                    mcWspLog.WriteLine
JulianDateToString(dtStamp) & " Start Step: " &
vbTab & sLabel
                Else
                    mcWspLog.WriteLine vbTab & vbTab
& vbTab & vbTab & sLabel
                End If
            Next lIndex

        Case mintStepComplete
            For lIndex = StepDtls.Count - 1 To 0 Step -1
                sLabel = StepDtls(lIndex)
                If lIndex = StepDtls.Count - 1 Then
                    mcWspLog.WriteLine
JulianDateToString(dtStamp) & " Comp. Step: " &
vbTab & sLabel
                Else
                    mcWspLog.WriteLine vbTab & vbTab
& vbTab & vbTab & sLabel
                End If
            Next lIndex

        End Select

    Exit Sub

WriteToWspLogErr:
    If Not bError Then
        bError = True
    End If

End Sub
'Private Sub WriteToWspLog(iLogEvent As
WspLogEvents, Optional StepDtls As cVectorStr, _
        ' Optional dtStamp As Date = gdtmEmpty)
'
' This function uses the LogWriter dll - memory
corruption problems since the vb exe
' and the vc Execute Dll both use the same dll to
write.
' ' Writes to the workspace log that is generated
for the run. The last three
' ' parameters are valid only for StepStart and
StepComplete events.
' Static bError As Boolean
' Static sFile As String
' Dim sLabel As String
' Dim lIndex As Long
' Dim bHdr As Boolean
'
' On Error GoTo WriteToWspLogErr
'
' Select Case iLogEvent
' Case mintRunStart
' Set mcWspLog = New
LOGWRITERLib.SMLog
' sFile = App.Path & "\" & "SMLog-" &
Format(Now, FMT_WSP_LOG_FILE) &
gstrLogFileSuffix
' mcWspLog.FileName = sFile
' mcWspLog.Init
' mcWspLog.WriteLine (Format(Now,
FMT_WSP_LOG_DATE) & " Start Run: " &
vbTab & gstrSQ &

```


<pre> GetWorkspaceDetails(WorkspaceId:=WspId)) & gstrSQ ' ' Write all current parameter values to the log ' ' bHdr = False ' For lIndex = 0 To mcParameters.ParameterCount - 1 ' ' If mcParameters(lIndex).ParameterType <> gintParameterApplication Then ' ' If Not bHdr Then ' ' mcWspLog.WriteLine Format(Now, FMT_WSP_LOG_DATE) & " Parameters: " & vbTab & gstrSQ & mcParameters(lIndex).ParameterName & gstrSQ & vbTab & vbTab & gstrSQ & mcParameters(lIndex).ParameterValue & gstrSQ ' ' bHdr = True ' ' Else ' ' mcWspLog.WriteLine vbTab & vbTab & vbTab & vbTab & gstrSQ & mcParameters(lIndex).ParameterName & gstrSQ & vbTab & vbTab & gstrSQ & mcParameters(lIndex).ParameterValue & gstrSQ ' ' End If ' ' End If ' ' Next lIndex ' ' Case mintRunComplete ' ' BugAssert Not mcWspLog Is Nothing ' ' mcWspLog.WriteLine Format(Now, FMT_WSP_LOG_DATE) & " Comp. Run: " & vbTab & gstrSQ & GetWorkspaceDetails(WorkspaceId:=WspId)) & gstrSQ ' ' Set mcWspLog = Nothing ' ' ' Case mintStepStart ' ' For lIndex = StepDtls.Count - 1 To 0 Step -1 ' ' sLabel = StepDtls(lIndex) ' ' If lIndex = StepDtls.Count - 1 Then ' ' mcWspLog.WriteLine Format(dtStamp, FMT_WSP_LOG_DATE) & " Start Step: " & vbTab & sLabel ' ' Else ' ' mcWspLog.WriteLine vbTab & vbTab & vbTab & vbTab & sLabel ' ' End If ' ' Next lIndex ' ' Case mintStepComplete ' ' For lIndex = StepDtls.Count - 1 To 0 Step -1 ' ' sLabel = StepDtls(lIndex) ' ' If lIndex = StepDtls.Count - 1 Then ' ' mcWspLog.WriteLine Format(dtStamp, FMT_WSP_LOG_DATE) & " Comp. Step: " & vbTab & sLabel ' ' Else ' ' mcWspLog.WriteLine vbTab & vbTab & vbTab & vbTab & sLabel ' ' End If ' ' Next lIndex ' ' End Select ' ' Exit Sub </pre>	<pre> ' 'WriteToWspLogErr: ' ' If Not bError Then ' ' bError = True ' ' End If ' 'End Sub ' Public Property Get WspPreExecution() As Variant ' WspPreExecution = mcvntWspPreCons End Property Public Property Let WspPreExecution(ByVal vdata As Variant) ' mcvntWspPreCons = vdata End Property ' Public Property Get WspPostExecution() As Variant ' WspPostExecution = mcvntWspPostCons End Property Public Property Let WspPostExecution(ByVal vdata As Variant) ' mcvntWspPostCons = vdata End Property ' Private Sub ExecuteStep(cCurStep As cInstance) ' ' Initializes a cRunStep object with all the properties ' ' corresponding to the step to be executed and calls it's ' ' execute method to execute the step ' Dim cExecStep As cRunStep ' On Error GoTo ExecuteStepErr mstrSource = mstrModuleName & "ExecuteStep" ' ' Confirm that the step is a worker ' If cCurStep.Step.StepType <> gintWorkerStep Then On Error GoTo 0 Err.Raise vbObjectError + errExecInstanceFailed, mstrSource, _ LoadResString(errExecInstanceFailed) End If ' Set cExecStep = InitExecStep() ' ' Exceeded the number of processes that we can run simultaneously ' If cExecStep Is Nothing Then ' ' Raise an error ' On Error GoTo 0 Err.Raise vbObjectError + errProgramError, mstrSource, _ LoadResString(errProgramError) End If ' ' Initialize the instance id - not needed for step execution ' ' but necessary to identify later which instance completed ' cExecStep.InstanceId = cCurStep.InstanceId ' Set cExecStep.ExecuteStep = cCurStep.Step Set cExecStep.Iterators = cCurStep.Iterators Set cExecStep.Globals = mcRunSteps Set cExecStep.WspParameters = mcParameters Set cExecStep.WspConnections = RunConnections Set cExecStep.WspConnDtls = RunConnDtls </pre>	<pre> ' Initialize all the pre and post-execution constraints that ' ' have been defined globally for the workspace ' cExecStep.WspPreCons = mcvntWspPreCons cExecStep.WspPostCons = mcvntWspPostCons ' ' Initialize all the pre and post-execution constraints for ' ' the step being executed ' cExecStep.PreCons = DetermineConstraints(cCurStep, gintPreStep) cExecStep.PostCons = DetermineConstraints(cCurStep, gintPostStep) ' cExecStep.RunId = RunId cExecStep.CreateInputFiles = CreateInputFiles ' ' Call the execute method to execute the step ' cExecStep.Execute ' Set cExecStep = Nothing ' Exit Sub ' ExecuteStepErr: ' ' Log the error code raised by Visual Basic ' Call LogErrors(Errors) On Error GoTo 0 Call ExecutionFailed(cExecStep) ' End Sub ' Public Property Set Steps(cRunSteps As cArrSteps) ' Set mcRunSteps = cRunSteps Set mcNavSteps.StepRecords = cRunSteps ' End Property Public Property Set Parameters(cParameters As cArrParameters) ' ' A reference to the parameter array - we use it to ' ' substitute parameter values in the step text ' Set mcParameters = cParameters ' End Property Public Property Get Steps() As cArrSteps ' Set Steps = mcRunSteps ' End Property Public Property Get Constraints() As cArrConstraints ' Set Constraints = mcRunConstraints ' End Property Public Property Set Constraints(vdata As cArrConstraints) ' Set mcRunConstraints = vdata ' End Property ' Private Sub cExecStep1_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) ' Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) </pre>
--	--	--


```

Private Sub
cExecStep12_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
    TimeStartUpdateForStep(cStepRecord,
    InstanceId, dtmStartTime)

End Sub
Private Sub
cExecStep13_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
    TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep13_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
    TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep13_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep13.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep13_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
    TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub
cExecStep14_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
    TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub
cExecStep14_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep14_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep14.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep14_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub
cExecStep15_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep15_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep15_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep15.Index, InstanceId,
Status)

End Sub

```

```

Private Sub cExecStep15_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub
cExecStep16_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep16_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep16_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep16.Index, InstanceId, Status)

End Sub

Private Sub cExecStep16_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub
Private Sub
cExecStep17_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep17_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

```

End Sub	Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)	End Sub
Private Sub cExecStep17_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	End Sub	Private Sub cExecStep20_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)
Call StepTerminated(cStepRecord, dtmEndTime, cExecStep17.Index, InstanceId, Status)	Private Sub cExecStep19_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep20.Index, InstanceId, Status)
End Sub	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	End Sub
Private Sub cExecStep17_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)	End Sub	Private Sub cExecStep20_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)
Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)	Private Sub cExecStep19_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)	Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)
End Sub	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)	End Sub
Private Sub cExecStep18_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)	End Sub	Private Sub cExecStep21_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)
Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	Private Sub cExecStep19_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)
End Sub	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep19.Index, InstanceId, Status)	End Sub
Private Sub cExecStep18_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)	End Sub	Private Sub cExecStep21_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)
Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)	Private Sub cExecStep19_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)
End Sub	Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)	End Sub
Private Sub cExecStep18_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	Private Sub cExecStep20_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)	Private Sub cExecStep21_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)
Call StepTerminated(cStepRecord, dtmEndTime, cExecStep18.Index, InstanceId, Status)	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep21.Index, InstanceId, Status)
End Sub	End Sub	End Sub
Private Sub cExecStep18_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)	Private Sub cExecStep20_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)	Private Sub cExecStep22_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)
	Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand)	

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep22_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep22_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep22.Index, InstanceId, Status) End Sub Private Sub cExecStep22_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep23_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep23_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep23_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep23.Index, InstanceId, Status) End Sub Private Sub cExecStep23_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep24_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep24_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep24_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep24.Index, InstanceId, Status) End Sub Private Sub cExecStep24_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep25_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	End Sub Private Sub cExecStep25_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep25_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep25.Index, InstanceId, Status) End Sub Private Sub cExecStep25_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep26_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep26_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep26_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep26.Index, InstanceId, Status) End Sub Private Sub cExecStep26_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)
---	---	---

HP TPC-H FULL DISCLOSURE REPORT
© 2007 Hewlett-Packard Company. All rights reserved.

```

End Sub

Private Sub
cExecStep31_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep32_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep32_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep32_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep32.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep32_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep33_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

End Sub

Private Sub
cExecStep33_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep33_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep33.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep33_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep34_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep34_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep34_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep34.Index, InstanceId,
Status)

End Sub

```

```

Private Sub cExecStep34_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep35_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep35_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep35_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep35.Index, InstanceId, Status)

End Sub

Private Sub cExecStep35_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep36_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep36_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

```

End Sub Private Sub cExecStep36_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep36.Index, InstanceId, Status) End Sub Private Sub cExecStep36_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep37_ProcessComplete(cStepReco rd As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep37_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep37_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep37.Index, InstanceId, Status) End Sub Private Sub cExecStep37_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	Private Sub cExecStep38_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep38_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep38_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep38.Index, InstanceId, Status) End Sub Private Sub cExecStep38_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep39_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep39_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep39_StepComplete(cStepRecord As cStep, _	dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep39.Index, InstanceId, Status) End Sub Private Sub cExecStep39_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep40_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep40_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep40_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep40.Index, InstanceId, Status) End Sub Private Sub cExecStep40_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep41_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub
--	---	---


```

Private Sub
cExecStep41_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep41_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep41.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep41_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep42_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep42_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep42_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep42.Index,
InstanceId, Status)

End Sub

```

```

Private Sub
cExecStep42_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep43_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep43_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep43_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep43.Index, lngInstanceId,
Status)

End Sub

Private Sub
cExecStep43_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep44_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep44_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep44_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep44.Index, lngInstanceId, Status)

End Sub

Private Sub cExecStep44_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep45_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep45_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep45_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep45.Index, lngInstanceId, Status)

End Sub

Private Sub cExecStep45_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, lngInstanceId
As Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep46_ProcessComplete(cStepRecord As
cStep, _

```


<pre> dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep51_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep51_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep51_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep51.Index, InstanceId, Status) End Sub Private Sub cExecStep51_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep52_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep52_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub </pre>	<pre> strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep52_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep52.Index, InstanceId, Status) End Sub Private Sub cExecStep52_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep53_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep53_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep53_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep53.Index, InstanceId, Status) End Sub Private Sub cExecStep53_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) End Sub </pre>	<pre> Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep54_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep54_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep54_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep54.Index, InstanceId, Status) End Sub Private Sub cExecStep54_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep55_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep55_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep55_StepComplete(cStepRecord As cStep, _ </pre>
--	--	--

dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep55.Index, InstanceId, Status) End Sub Private Sub cExecStep55_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep56_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep56_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep56_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep56.Index, InstanceId, Status) End Sub Private Sub cExecStep56_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep57_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, Status As InstanceStatus)	dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep57_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep57_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep57.Index, InstanceId, Status) End Sub Private Sub cExecStep57_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep58_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep58_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep58_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep58.Index, InstanceId, Status) End Sub Private Sub cExecStep58_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep59_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep59_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep59_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep59.Index, InstanceId, Status) End Sub Private Sub cExecStep59_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep60_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep60_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long)
---	---	---

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep60_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep60.Index, InstanceId, Status) End Sub Private Sub cExecStep60_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep61_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep61_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep61_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep61.Index, InstanceId, Status) End Sub Private Sub cExecStep61_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long)	Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep62_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep62_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep62_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep62.Index, InstanceId, Status) End Sub Private Sub cExecStep62_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep63_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep63_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep63_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep63.Index, InstanceId, Status) End Sub Private Sub cExecStep63_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	End Sub Private Sub cExecStep63_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep63.Index, InstanceId, Status) End Sub Private Sub cExecStep63_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep64_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep64_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep64_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep64.Index, InstanceId, Status) End Sub Private Sub cExecStep64_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep65_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long)
---	--	---

Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep65_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep65_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep65.Index, InstanceId, Status) End Sub Private Sub cExecStep65_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep66_ProcessComplete(cStepReco rd As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep66_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep66_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, lElapsed As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)	Call StepTerminated(cStepRecord, dtmEndTime, cExecStep66.Index, InstanceId, Status) End Sub Private Sub cExecStep66_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep67_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep67_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep67_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep67.Index, InstanceId, Status) End Sub Private Sub cExecStep67_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep68_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)	End Sub Private Sub cExecStep68_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep68_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep68.Index, InstanceId, Status) End Sub Private Sub cExecStep68_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep69_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep69_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep69_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep69.Index, InstanceId, Status) End Sub Private Sub cExecStep69_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime)
--	---	---

<pre> End Sub Private Sub cExecStep74_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep75_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep75_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep75_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep75.Index, InstanceId, Status) End Sub Private Sub cExecStep75_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep76_ProcessComplete(cStepRecor d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub </pre>	<pre> End Sub Private Sub cExecStep76_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep76_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep76.Index, InstanceId, Status) End Sub Private Sub cExecStep76_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep77_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep77_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep77_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep77.Index, InstanceId, Status) End Sub </pre>	<pre> Private Sub cExecStep77_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep78_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep78_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep78_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep78.Index, InstanceId, Status) End Sub Private Sub cExecStep78_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep79_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep79_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) </pre>
---	--	--

End Sub Private Sub cExecStep79_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep79.Index, InstanceId, Status) End Sub Private Sub cExecStep79_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep80_ProcessComplete(cStepReco r d As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep80_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep80_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep80.Index, InstanceId, Status) End Sub Private Sub cExecStep80_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub	Private Sub cExecStep81_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep81_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep81_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep81.Index, InstanceId, Status) End Sub Private Sub cExecStep81_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep82_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep82_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep82_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus)	dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep82.Index, InstanceId, Status) End Sub Private Sub cExecStep82_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep83_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep83_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep83_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep83.Index, InstanceId, Status) End Sub Private Sub cExecStep83_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep84_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub
---	---	---

```

Private Sub
cExecStep84_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep84_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep84.Index,
InstanceId, Status)

End Sub

Private Sub
cExecStep84_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep85_ProcessComplete(cStepRecor
d As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep85_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep85_StepComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep85.Index,
InstanceId, Status)

End Sub

```

```

Private Sub
cExecStep85_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep86_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep86_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep86_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep86.Index, InstanceId,
Status)

End Sub

Private Sub
cExecStep86_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep87_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep87_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

```

```

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep87_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep87.Index, InstanceId, Status)

End Sub

Private Sub cExecStep87_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep88_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId As
Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep88_ProcessStart(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep88_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep88.Index, InstanceId, Status)

End Sub

Private Sub cExecStep88_StepStart(cStepRecord
As cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep89_ProcessComplete(cStepRecord As
cStep, _

```



```
Private Sub
cExecStep95_ProcessStart(cStepRecord As
cStep, _
```

```
Private Sub
cExecStep96_StepStart(cStepRecord As cStep,
    dtmStartTime As Currency, InstanceId As
Long)
```

```
Private Sub
cExecStep98_StepComplete(cStepRecord As cStep,
_
```

dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep98.Index, InstanceId, Status) End Sub Private Sub cExecStep98_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep99_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep99_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep99_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep99.Index, InstanceId, Status) End Sub Private Sub cExecStep99_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep2_ProcessComplete(cStepRecord As cStep, _	dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep2_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep2_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep2.Index, _ InstanceId, Status) End Sub Private Sub cExecStep2_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep3_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep3_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep3_StepComplete(cStepRecord As cStep, _	dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep3.Index, _ InstanceId, Status) End Sub Private Sub cExecStep3_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep4_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed) End Sub Private Sub cExecStep4_ProcessStart(cStepRecord As cStep, _ strCommand As String, dtmStartTime As Currency, lngInstanceId As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, StartTime:=dtmStartTime, Command:=strCommand) End Sub Private Sub cExecStep4_StepComplete(cStepRecord As cStep, _ dtmEndTime As Currency, InstanceId As Long, Status As InstanceStatus) Call StepTerminated(cStepRecord, dtmEndTime, cExecStep4.Index, _ InstanceId, Status) End Sub Private Sub cExecStep4_StepStart(cStepRecord As cStep, _ dtmStartTime As Currency, InstanceId As Long) Call TimeStartUpdateForStep(cStepRecord, InstanceId, dtmStartTime) End Sub Private Sub cExecStep5_ProcessComplete(cStepRecord As cStep, _ dtmEndTime As Currency, lngInstanceId As Long, lElapsed As Long) Call TimeUpdateForProcess(cStepRecord, lngInstanceId, EndTime:=dtmEndTime, ElapsedTime:=lElapsed)
---	--	--

```

End Sub

Private Sub
cExecStep5_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep5_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep5.Index, _
    InstanceId, Status)

End Sub

Private Sub
cExecStep5_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId
As Long)

    Call
TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep6_ProcessComplete(cStepRecord
As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep6_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long)

    Call
TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep6_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId
As Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep6.Index, _
    InstanceId, Status)

```

```

End Sub

Private Sub
cExecStep6_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep7_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

Private Sub
cExecStep7_ProcessStart(cStepRecord As
cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep7_StepComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord,
dtmEndTime, cExecStep7.Index, _
    InstanceId, Status)

End Sub

Private Sub
cExecStep7_StepStart(cStepRecord As cStep,
_
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub
cExecStep8_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, EndTime:=dtmEndTime,
ElapsedTime:=lElapsed)

End Sub

```

```

Private Sub cExecStep8_ProcessStart(cStepRecord
As cStep, _
    strCommand As String, dtmStartTime As
Currency, lngInstanceId As Long)

    Call TimeUpdateForProcess(cStepRecord,
lngInstanceId, StartTime:=dtmStartTime,
Command:=strCommand)

End Sub

Private Sub
cExecStep8_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

    Call StepTerminated(cStepRecord, dtmEndTime,
cExecStep8.Index, _
    InstanceId, Status)

End Sub

Private Sub cExecStep8_StepStart(cStepRecord As
cStep, _
    dtmStartTime As Currency, InstanceId As
Long)

    Call TimeStartUpdateForStep(cStepRecord,
InstanceId, dtmStartTime)

End Sub

Private Sub Class_Initialize()

    Dim lngCount As Long
    Dim lngTemp As Long

    On Error GoTo InitializeErr

    Set mcFreeSteps = New cVectorLng
    ' Initialize the array of free objects with all
elements
    ' for now
    For lngCount = 0 To
glngNumConcurrentProcesses - 1 Step 1
        mcFreeSteps.Add lngCount
    Next lngCount

    ' Initialize a byte array with the number of free
processes. It will
    ' be used later to determine if any step is running
    ' Each element in the array can represent 8 steps,
1 for each bit
    ReDim mbarrFree(glngNumConcurrentProcesses
\ gintBitsPerByte)

    ' Initialize each element in the byte array w/ all
1's
    ' (upto glngNumConcurrentProcesses)
    For lngCount = LBound(mbarrFree) To
UBound(mbarrFree) Step 1
        lngTemp = IIf( _
            glngNumConcurrentProcesses -
(gintBitsPerByte * lngCount) > gintBitsPerByte, _
            gintBitsPerByte, _
            glngNumConcurrentProcesses -
(gintBitsPerByte * lngCount))

        mbarrFree(lngCount) = (2 ^ lngTemp) - 1
    Next lngCount

    Set mcInstances = New cInstances
    Set mcFailures = New cFailedSteps
    Set mcNavSteps = New cStepTree

```

```

Set mcTermSteps = New cTermSteps

' Initialize the Abort flag to False
mblnAbort = False
mblnAsk = False

Exit Sub

InitializeErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errInitializeFailed, mstrModuleName &
"Initialize", _
LoadResString(errInitializeFailed)

End Sub
Private Sub Class_Terminate()

On Error GoTo Class_TerminateErr

mcFreeSteps.Clear
Set mcFreeSteps = Nothing
ReDim mbarrFree(0)

mcInstances.Clear
Set mcInstances = Nothing

Set mcFailures = Nothing
Set mcNavSteps = Nothing
Set mcTermSteps = Nothing

Exit Sub

Class_TerminateErr:
Call LogErrors(Errors)

End Sub

Private Sub
mcTermSteps_TermStepExists(cStepDetails
As cTermStep)

Call
RunNextStep(cStepDetails.TimeComplete,
cStepDetails.Index, _
cStepDetails.InstanceId,
cStepDetails.ExecutionStatus)

End Sub

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cRunItDetails"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunItDetails.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates
the properties of iterator values
that are used by the step being
executed at runtime.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

```

```

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"cRunItDetails."
Private mstrSource As String

Private mstrIteratorName As String
Private mintType As ValueType
Private mlngSequence As Long
Private mlngFrom As Long
Private mlngTo As Long
Private mlngStep As Long
Private mstrValue As String

Public Property Get RangeTo() As Long

RangeTo = mlngTo

End Property
Public Property Let RangeTo(ByVal vdata As
Long)

mlngTo = vdata

End Property

Public Property Get RangeFrom() As Long

RangeFrom = mlngFrom

End Property
Public Property Get Sequence() As Long

Sequence = mlngSequence

End Property

Public Property Get RangeStep() As Long

RangeStep = mlngStep

End Property
Public Property Let RangeStep(vdata As Long)

mlngStep = vdata

End Property

Public Property Let RangeFrom(ByVal vdata
As Long)

mlngFrom = vdata

End Property
Public Property Let Sequence(ByVal vdata As
Long)

mlngSequence = vdata

End Property

Public Property Get IteratorType() As
ValueType

IteratorType = mintType

End Property
Public Property Let IteratorType(ByVal vdata
As ValueType)

On Error GoTo TypeErr

```

```

mstrSource = mstrModuleName & "Type"

' These constants have been defined in the
enumeration,
' Type, which is exposed
Select Case vdata
Case gintFrom, gintTo, gintStep, gintValue
mintType = vdata

Case Else
On Error GoTo 0
Err.Raise vbObjectError + errTypeInvalid, _
mstrSource,
LoadResString(errTypeInvalid)
End Select

Exit Property

TypeErr:
LogErrors Errors
mstrSource = mstrModuleName & "Type"
On Error GoTo 0
Err.Raise vbObjectError + errTypeInvalid, _
mstrSource, LoadResString(errTypeInvalid)

End Property
Private Sub IsList()

If mintType <> gintValue Then
On Error GoTo 0
Err.Raise vbObjectError + errInvalidProperty,
mstrSource, _
LoadResString(errInvalidProperty)
End If

End Sub
Private Sub IsRange()

If mintType = gintValue Then
On Error GoTo 0
Err.Raise vbObjectError + errInvalidProperty,
mstrSource, _
LoadResString(errInvalidProperty)
End If

End Sub

Public Property Get Value() As String

Value = mstrValue

End Property
Public Property Let Value(vdata As String)

mstrValue = vdata

End Property

Public Property Get IteratorName() As String

IteratorName = mstrIteratorName

End Property
Public Property Let IteratorName(ByVal vdata As
String)

mstrIteratorName = vdata

End Property

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END

```

```

Attribute VB_Name = "cRunItNode"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' An iterator class containing the properties
that are used
' by the stpe being executed.
' These iterators might actually come from
steps that are at
' a higher level than the step actually being
executed (viz.
' direct ascendants of the step at any level).

```

Option Explicit

```

Public IteratorName As String
Public Value As String
Public StepId As Long

```

VERSION 1.0 CLASS

BEGIN

MultiUse = -1 'True

END

```

Attribute VB_Name = "cRunOnly"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Option Explicit

```

Public Event Done()

```

Private WithEvents mcRunWsp As
cRunWorkspace
Attribute mcRunWsp.VB_VarHelpID = -1

```

```

Public WspName As String
Public WorkspaceId As Long
Public WspLog As String

```

Public Sub RunWsp()

On Error GoTo RunWspErr

```

Set mcRunWsp = New cRunWorkspace
Set mcRunWsp.LoadDb = dbsAttTool
mcRunWsp.WorkspaceId = WorkspaceId
mcRunWsp.CreateInputFiles = True
mcRunWsp.RunWorkspace

```

Exit Sub

RunWspErr:

```

' Log the VB error code
LogErrors Errors

```

End Sub

```

Private Sub
mcRunWsp_RunComplete(dtmEndTime As
Currency)

```

```

MsgBox "Completed executing
workspace: " & gstrSQ & WspName &
gstrSQ & " at " & _
JulianDateToString(dtmEndTime) &
"." & vbCrLf & vbCrLf & _
"The log file for the run is: " &
gstrSQ & WspLog & gstrSQ & "."
RaiseEvent Done

```

End Sub

```

Private Sub
mcRunWsp_RunStart(dtmStartTime As

```

```

Currency, strWspLog As String, lRunId As
Long)

```

```

WspLog = strWspLog
End Sub

```

VERSION 1.0 CLASS

BEGIN

MultiUse = -1 'True

END

```

Attribute VB_Name = "cRunStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved

```

' PURPOSE: This class executes the step that is assigned to the

' ExecuteStep property. It executes the

' pre-execution constraints

' in sequence and then the step itself.

At the end it executes

' the post-execution constraints. Since

' these steps should always

' be executed in sequence, each step is

' only fired on the

' completion of the previous step.

' Contact: Reshma Tharamal

(reshmat@microsoft.com)

'

Option Explicit

' Used to indicate the source module name when errors

' are raised by this class

Private Const mstrModuleName As String = "cRunStep."

Private mstrSource As String

' Local variable(s) to hold property value(s)

Private mcStep As cStep

Private mcGlobals As cArrSteps

Private mcvntWspPreCons As Variant

Private mcvntWspPostCons As Variant

Private mcvntPreCons As Variant

Private mcvntPostCons As Variant

Private mcIterators As cRunCollt

Private mlngInstanceId As Long ' Identifier for the current instance

Private mlngIndex As Long ' Index value for the current instance

Private mstrCommand As String ' The command string

Private msRunStepDtl As String ' Step text/file name that will go into the run_step_details table

Private mblnAbort As Boolean ' Set to True

when the user aborts the run

Private msOutputFile As String

Private msErrorFile As String

Private miStatus As InstanceStatus

Private mcVBErr As cVBErrorsSM

Public WspParameters As cArrParameters

Public WspConnections As cConnections

Public WspConnDtls As cConnDtls

```

Private WithEvents mcTermProcess As
cTermProcess

```

Attribute mcTermProcess.VB_VarHelpID = -1

Public RunId As Long

```

Public CreateInputFiles As Boolean
Private msOutputDir As String

```

```

' Object that will execute the step
Private WithEvents mcExecObj As
EXECUTEDLLLib.Execute
Attribute mcExecObj.VB_VarHelpID = -1

```

```

' Holds the step that is currently being executed
(constraint or
' worker step)
Private mcExecStep As cStep

```

```

Private Const msCompareExe As String =
"diff.exe"

```

Private Enum NextNodeType

mintWspPreConstraint = 1

mintPreConstraint

mintStep

mintWspPostConstraint

mintPostConstraint

End Enum

' Public events to notify the calling function of the ' start and end time for each step

```

Public Event StepStart(cStepRecord As cStep, _
dtmStartTime As Currency, InstanceId As
Long)

```

```

Public Event StepComplete(cStepRecord As cStep,

```

```

- dtmEndTime As Currency, InstanceId As
Long, Status As InstanceStatus)

```

```

Public Event ProcessStart(cStepRecord As cStep, _
strCommand As String, dtmStartTime As

```

Currency, _

InstanceId As Long)

```

Public Event ProcessComplete(cStepRecord As
cStep, _

```

```

dtmStartTime As Currency, InstanceId As
Long, lElapsed As Long)

```

```

Private Function AppendDiffErrors(sDiffFile As
String)

```

' The file containing the errors generated by the diff utility is passed in

' These errors are appended to the error file for the step

Dim sTemp As String

Dim InputFile As Integer

If Not StringEmpty(sDiffFile) Then

InputFile = FreeFile

```

Open sDiffFile For Input Access Read As
InputFile

```

```

Do While Not EOF(InputFile) ' Loop
until end of file.

```

```

Line Input #InputFile, sTemp ' Read line
into variable.

```

mcVBErr.LogMessage sTemp

Loop

Close InputFile

End If

End Function

```

Private Sub CreateStepTextFile()

```

' Creates a file containing the step text being executed

```

On Error GoTo CreateStepTextFileErr

```



```

Dim sInputFile As String

If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
    sInputFile =
GetOutputFile(gsCmdFileSuffix)
Else
    sInputFile =
GetOutputFile(gsSqlFileSuffix)
End If

' Generate a file containing the step text
being executed
If Not
StringEmpty(mcExecStep.StepTextFile) Or
mcExecStep.ExecutionMechanism =
gintExecuteShell Then
    FileCopy mstrCommand, sInputFile
Else
    Call
WriteCommandToFile(mstrCommand,
sInputFile)
End If

Exit Sub

CreateStepTextFileErr:

    mcVBErr.LogVBErrors

End Sub
Private Function GetOutputFile(strFileExt
As String) As String
' This function generates the output file
name for the step currently being executed
' The value of the built-in parameter
'DefaultDir' is appended with the run
identifier
' for the file location
' The step label is used for the file name
and a combination of all iterator values
' for the step is used to make the output
files unique for each instance
Dim sFile As String
Dim sIt As String
Dim lIt As Long

On Error GoTo GetOutputFileErr

sFile =
SubstituteParametersIfPossible(mcExecStep
.StepLabel)

sFile = TranslateStepLabel(sFile)

If mcExecStep Is mcStep Then
' Use iterators that have been defined
for the worker or any of it's managers
' to make the error/log file unique for
this instance
For lIt = mcIterators.Count - 1 To 0
Step -1
    sIt = sIt & gsExtSeparator &
mcIterators(lIt).Value
Next lIt
End If
sIt = sIt & strFileExt

' Ensure that the length of the complete
path does not exceed 255 characters
If Len(msOutputDir) + Len(sFile) +
Len(sIt) > MAX_PATH Then
    sFile = Mid(sFile, 1, MAX_PATH -
Len(sIt) - Len(msOutputDir))
End If

```

```

GetOutputFile = msOutputDir & sFile & sIt
Exit Function

GetOutputFileErr:

' Does not make sense to log error to the
error file yet. Write to the project
' log and return the step label as default
GetOutputFile = mcExecStep.StepLabel &
gsExtSeparator & strFileExt

End Function

Private Sub HandleExecutionError()

On Error GoTo HandleExecutionError

' Log the error code raised by Visual Basic
miStatus = gintFailed
mcVBErr.LogVBErrors
Call
mcVBErr.WriteError(errExecuteStepFailed, _
OptArgs:="Continuation criteria for the
step is: " &
gsContCriteria(mcStep.ContinuationCriteria))

HandleExecutionError:

' Logging failed - return

End Sub

Public Property Get Index() As Long

Index = mlngIndex

End Property
Public Property Let Index(ByVal vdata As
Long)

mlngIndex = vdata

End Property
Private Function InitializeExecStatus() As
InstanceStatus
Dim sCompareFile As String

On Error GoTo InitializeExecStatusErr

InitializeExecStatus =
mcExecObj.StepStatus

If InitializeExecStatus = gintComplete Then
If Not
StringEmpty(mcExecStep.FailureDetails) Then
' Compare output to determine whether
the step failed
sCompareFile =
GetShortName(SubstituteParameters( _
mcExecStep.FailureDetails,
mcExecStep.WorkspaceId, mcIterators, _
WspParameters))
InitializeExecStatus =
IIf(CompareOutput(sCompareFile,
msOutputFile), gintComplete, gintFailed)
End If
End If

Exit Function

InitializeExecStatusErr:
mcVBErr.LogVBErrors
' Call LogErrors(Errors)

```

```

InitializeExecStatus = mcExecObj.StepStatus

End Function
Private Function CompareOutput(sCompareFile As
String, sOutputFile As String) As Boolean

Dim sCmpOutput As String
Dim sDiffOutput As String

On Error GoTo CompareOutputErr

' Create temporary files to store the file compare
output and
' the errors generated by the compare function
sCmpOutput = CreateTempFile()
sDiffOutput = CreateTempFile()

' Run the compare utility and redirect it's output
and errors
SyncShell ("cmd /c " & _
GetShortName(App.Path &
msCompareExe) & gstrBlank & _
sCompareFile & gstrBlank & sOutputFile &
_
" > " & sCmpOutput & " 2> " &
sDiffOutput)

If FileLen(sDiffOutput) > 0 Then
' The compare generated errors - append error
msgs to the error file
Call AppendDiffErrors(sDiffOutput)
CompareOutput = False
Else
    CompareOutput = (FileLen(sCmpOutput) = 0)
End If

If Not CompareOutput Then
    mcVBErr.WriteError errDiffFailed
End If

' Delete the temporary files used to store the
output of the compare and
' the errors generated by the compare
Kill sDiffOutput
Kill sCmpOutput

Exit Function

CompareOutputErr:
mcVBErr.LogVBErrors
CompareOutput = False

End Function
Public Property Get InstanceId() As Long

InstanceId = mlngInstanceId

End Property
Public Property Let InstanceId(ByVal vdata As
Long)

mlngInstanceId = vdata

End Property

Private Function ExecuteConstraint(vntConstraints
As Variant, _
ByRef intLoopIndex As Integer) As Boolean

' Returns True if there is a constraint in the
passed in
' array that remains to be executed

If IsArray(vntConstraints) And Not
IsEmpty(vntConstraints) Then

```

```

ExecuteConstraint =
(LBound(vntConstraints) <= intLoopIndex)
And (intLoopIndex <=
UBound(vntConstraints))
Else
ExecuteConstraint = False
End If

End Function
Private Function NextStep() As cStep

' Determines which is the next step to be
executed - it could
' be either a pre-execution step, the
worker step itself
' or a post-execution step

Dim cConsRec As cConstraint
Dim cNextStepRec As cStep
Dim vntStepConstraints As Variant

' Static variable to remember exactly
where we are in the
' processing
Static intIndex As Integer
Static intNextStepType As
NextNodeType

On Error GoTo NextStepErr

If mblnAbort = True Then
' The user has aborted the run - do not
run any more
' processes for the step
Set NextStep = Nothing
Exit Function
End If

If intNextStepType = 0 Then
' First time through this function - set
the Index and
' node type to initial values
intNextStepType =
mintWspPreConstraint
intIndex = 0
RaiseEvent StepStart(mcStep,
Determine64BitTime(), mlngInstanceId)
End If

Do
Select Case intNextStepType
Case mintWspPreConstraint
vntStepConstraints =
mcvntWspPreCons

Case mintPreConstraint
vntStepConstraints =
mcvntPreCons

Case mintStep
' CONS:
If mcStep.StepType =
gintWorkerStep Then
Set cNextStepRec = mcStep
End If

Case mintWspPostConstraint
vntStepConstraints =
mcvntWspPostCons

Case mintPostConstraint
vntStepConstraints =
mcvntPostCons

End Select

```

```

If intNextStepType <> mintStep Then
' Check if there is a constraint to be
executed
If
ExecuteConstraint(vntStepConstraints,
intIndex) Then
' Get the corresponding step record to
be executed
' Query the global step record for the
current
' constraint
Set cConsRec =
vntStepConstraints(intIndex)

Set cNextStepRec =
mcGlobals.QueryStep(cConsRec.GlobalStepId
)
intIndex = intIndex + 1
Else
If intNextStepType =
mintPostConstraint Then
' No more stuff to be executed for
the step
' Raise a Done event
Set cNextStepRec = Nothing

' Set the next step type to an
invalid value
intNextStepType = -1
Else
Call NextType(intNextStepType,
intIndex)
End If
End If
Else
' Increment the step type so we look at
the post-
' execution steps the next time through
Call NextType(intNextStepType,
intIndex)
End If

Loop Until (Not cNextStepRec Is Nothing)
Or _
intNextStepType = -1

Set NextStep = cNextStepRec

Exit Function

NextStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
mstrSource = mstrModuleName &
"NextStep"
Err.Raise vbObjectError +
errNextStepFailed, mstrSource, _
LoadResString(errNextStepFailed)

End Function
Public Sub Execute()
' This procedure is the method that executes
the step that
' is assigned to the ExecuteStep property. It
call a procedure
' to determine the next step to be executed.
' Then it initializes all the properties of the
cExecuteSM object
' and calls it's run method to execute it.
Dim cConn As cConnection
Dim cRunConnDtl As cConnDtl

On Error GoTo ExecuteErr

```

```

' If this procedure is called after a step has
completed,
' we would have to check if we created any
temporary files
' while executing that step
If Not mcExecStep Is Nothing Then
If Not StringEmpty(mcExecStep.StepTextFile)
Or mcExecStep.ExecutionMechanism =
gintExecuteShell Then
' Remove the temporary file that we created
while
' running this command
Kill mstrCommand
End If

Call StepCompleted

' The VB errors class stores a reference to the
Execute class since it uses
' a method of the class to write errors to the
error log. Hence,
' release all references to the Execute object
before destroying it.
Set mcVBErr.ErrorFile = Nothing
Set mcExecObj = Nothing

' Delete empty output and error files (generated
by shell commands)
' (Can be done only after cleaning up
cExecObj)
Call DeleteEmptyOutputFiles
Else
' First time through - initialize the location of
output files
msOutputDir =
GetDefaultDir(mcStep.WorkspaceId,
WspParameters)
msOutputDir = msOutputDir &
gstrFileSeparator & Trim(Str(RunId)) &
gstrFileSeparator
' Dummy file since the function expects a file
name
MakePathValid (msOutputDir & "a.txt")
End If

' Call a procedure to determine the next step to be
executed
' - could be a constraint or the step itself
' Initialize a module-level variable to the step
being
' executed
Set mcExecStep = NextStep
If mcExecStep Is Nothing Then
RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mlngInstanceId, miStatus)
' No more stuff to execute
Exit Sub
End If

Dim sStartDir As String

Set mcExecObj = New
EXECUTEDLLLib.Execute

' The VB errors class uses the WriteError method
of the Execute class to write
' all VB errors to the error file for the step (this
prevents a clash when the
' VB errors and Execution errors have to be
written to the same log). Hence, store
' a reference to the Execute object in mcVBErr
msErrorFile = GetOutputFile(gsErrorFileSuffix)
mcExecObj.ErrorFile = msErrorFile

```

```

    Call DeleteFile(msErrorFile,
bCheckIfEmpty:=False)
    Set mcVBErr.ErrorFile = mcExecObj

    If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
        sStartDir =
Trim$(GetShortName(SubstituteParameters(
-
        mcExecStep.StartDir,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters)))
        ' Dummy connection object
        Set cConn = New cConnection
        Set cRunConnDtl = New cConnDtl
    Else
        ' Find the connection string value and
substitute parameter values in it
        Set cRunConnDtl =
WspConnDtls.GetConnectionDtl(mcExecSt
ep.WorkspaceId, mcExecStep.StartDir)
        Set cConn =
WspConnections.GetConnection(mcExecSte
p.WorkspaceId,
cRunConnDtl.ConnectionString)
        sStartDir =
Trim$(SubstituteParameters(cConn.Connect
ionValue, _
        mcExecStep.WorkspaceId,
mcIterators,
WspParameters:=WspParameters))
    End If

    msOutputFile =
GetOutputFile(gsOutputFileSuffix)
    Call DeleteFile(msOutputFile,
bCheckIfEmpty:=False)
    mcExecObj.OutputFile = msOutputFile
    ' mcExecObj.LogFile =
GetShortName(SubstituteParameters( _
    ' mcExecStep.LogFile,
mcExecStep.WorkspaceId, mcIterators,
WspParameters:=WspParameters))
    If mcExecStep.ExecutionMechanism =
gintExecuteODBC And _
        cRunConnDtl.ConnType =
ConnTypeDynamic Then
        Call
mcExecObj.DoExecute(BuildCommandStri
ng(), sStartDir,
mcExecStep.ExecutionMechanism, _
        cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
        cConn.AnsiNulls,
cConn.ShowQueryPlan,
cConn.ShowStatsTime,
cConn.ShowStatsIO, _
        cConn.RowCount,
cConn.QueryTimeout, gstrEmptyString)
    Else
        Call
mcExecObj.DoExecute(BuildCommandStri
ng(), sStartDir,
mcExecStep.ExecutionMechanism, _
        cConn.NoCountDisplay,
cConn.NoExecute, cConn.ParseQueryOnly,
cConn.QuotedIdentifiers, _
        cConn.AnsiNulls,
cConn.ShowQueryPlan,
cConn.ShowStatsTime,
cConn.ShowStatsIO, _
        cConn.RowCount,
cConn.QueryTimeout,
mcExecStep.StartDir)

```

```

    End If

    Exit Sub

ExecuteErr:
    Call HandleExecutionError

    ' We can assume that if we are in this
function, a StepStart event has been triggered
already.
    RaiseEvent StepComplete(mcStep,
Determine64BitTime(), mlngInstanceId,
miStatus)

End Sub
Private Function BuildCommandString() As
String
    ' Process text to be executed - either from the
text
    ' field or read it from a file.
    ' This function will always return the
command text for ODBC commands
    ' and a file name for Shell commands
    Dim sFile As String
    Dim sCommand As String
    Dim sTemp As String

    On Error GoTo BuildCommandStringErr

    If Not
StringEmpty(mcExecStep.StepTextFile) Then
        ' Substitute parameter values and
environment variables
        ' in the filename
        msRunStepDtl =
SubstituteParameters(mcExecStep.StepTextFil
e, _
            mcExecStep.WorkspaceId,
mcIterators, WspParameters:=WspParameters)

        sFile = GetShortName(msRunStepDtl)

        mstrCommand =
SubstituteParametersInText(sFile,
mcExecStep.WorkspaceId)

        If mcExecStep.ExecutionMechanism =
gintExecuteODBC Then
            ' Read the contents of the file and pass
it to ODBC
            BuildCommandString =
ReadCommandFromFile(mstrCommand)
        Else
            BuildCommandString = mstrCommand
        End If
    Else
        ' Substitute parameter values and
environment variables
        ' in the step text
        msRunStepDtl =
SubstituteParameters(mcExecStep.StepText, _
            mcExecStep.WorkspaceId,
mcIterators, WspParameters:=WspParameters)
        mstrCommand = msRunStepDtl

        If mcExecStep.ExecutionMechanism =
gintExecuteShell Then
            ' Write the command to a temp file
(enables us to execute multiple
            ' commands via the command
interpreter)
            mstrCommand =
WriteCommandToFile(msRunStepDtl)
            BuildCommandString = mstrCommand
        Else

```

```

        BuildCommandString =
SQLFixup(msRunStepDtl)
    End If
End If

    If CreateInputFiles Then
        Call CreateStepTextFile
    End If

    Exit Function

BuildCommandStringErr:
    ' Log the error code raised by the Execute
procedure
    ' Call LogErrors(Errors)
    mcVBErr.LogVBErrors

    On Error GoTo 0
    mstrSource = mstrModuleName & "Execute"
    Err.Raise vbObjectError + errExecuteStepFailed,
mstrSource, _
        LoadResString(errExecuteStepFailed) &
mstrCommand

End Function
Public Sub Abort()

    On Error GoTo AbortErr

    ' Setting the Abort flag to True will ensure that
we
    ' don't execute any more processes for this step
    mblnAbort = True

    If Not mcExecObj Is Nothing Then
        mcExecObj.Abort
    Else
        ' We are not in the middle of execution yet
    End If

    Exit Sub

AbortErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errProgramError, _
mstrModuleName & "Abort", _
        LoadResString(errProgramError)

End Sub
Private Sub NextType(ByRef StepType As
NextNodeType, _
    ByRef Position As Integer)

    StepType = StepType + 1
    Position = 0

End Sub
Private Sub StepCompleted()

    On Error GoTo StepCompletedErr

    If Not mcExecStep Is Nothing Then
        If mcExecStep Is mcStep Then
            miStatus = InitializeExecStatus
            If miStatus = gintFailed Then
                ' Create input files if the step failed
execution and one hasn't been created already
                If Not CreateInputFiles Then
                    CreateStepTextFile
                    Call
mcVBErr.WriteError(errExecuteStepFailed, _
                        OptArgs:="Continuation criteria for
the step is: " &
                        gsContCriteria(mcStep.ContinuationCriteria))

```

<pre> End If End If End If Exit Sub StepCompletedErr: ' Log the error code raised by Visual Basic miStatus = gintFailed mcVBErr.LogVBErrors Call mcVBErr.WriteError(errExecuteStepFailed, - OptArgs:="Continuation criteria for the step is: " & gsContCriteria(mcStep.ContinuationCriteria)) End Sub Private Sub DeleteEmptyOutputFiles() On Error GoTo DeleteEmptyOutputFilesErr ' Delete empty output and error files If Not mcExecStep.Is Nothing Then Call DeleteFile(msErrorFile, bCheckIfEmpty:=True) Call DeleteFile(msOutputFile, bCheckIfEmpty:=True) End If Exit Sub DeleteEmptyOutputFilesErr: ' Not a critical error - continue End Sub Private Function ReadCommandFromFile(strFileName As String) As String ' Returns the contents of the passed in file Dim sCommand As String Dim sTemp As String Dim InputFile As Integer On Error GoTo ReadCommandFromFileErr If Not StringEmpty(strFileName) Then InputFile = FreeFile Open strFileName For Input Access Read As InputFile Line Input #InputFile, sCommand ' Read line into variable. Do While Not EOF(InputFile) ' Loop until end of file. Line Input #InputFile, sTemp ' Read line into variable. sCommand = sCommand & vbCrLf & sTemp Loop Close InputFile End If ReadCommandFromFile = sCommand Exit Function </pre>	<pre> ReadCommandFromFileErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) mstrSource = mstrModuleName & "ReadCommandFromFile" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function Private Function SubstituteParametersIfPossible(strLabel As String) On Error GoTo SubstituteParametersIfPossibleErr SubstituteParametersIfPossible = SubstituteParameters(strLabel, _ mcExecStep.WorkspaceId, mcIterators, WspParameters:=WspParameters) Exit Function SubstituteParametersIfPossibleErr: SubstituteParametersIfPossible = strLabel End Function Private Function SubstituteParametersInText(strFileName As String, _ lngWorkspace As Long) As String ' Reads each line in the passed in file, substitutes parameter ' values in the line and writes out the modified line to a ' temporary file that we create. The temporary file will be ' removed once the step completes execution. ' Returns the name of the newly created temporary file. Dim strTempFile As String Dim strTemp As String Dim strOutput As String Dim InputFile As Integer Dim OutputFile As Integer On Error GoTo SubstituteParametersInTextErr strTempFile = CreateTempFile() If Not StringEmpty(strFileName) Then InputFile = FreeFile Open strFileName For Input Access Read As InputFile OutputFile = FreeFile Open strTempFile For Output Access Write As OutputFile Do While Not EOF(InputFile) ' Loop until end of file. Line Input #InputFile, strTemp ' Read line into variable. strOutput = SubstituteParameters(strTemp, lngWorkspace, mcIterators, WspParameters:=WspParameters) </pre>	<pre> If mcExecStep.ExecutionMechanism = gintExecuteODBC Then strOutput = SQLFixup(strOutput) Print #OutputFile, strOutput BugMessage strOutput Loop End If Close InputFile Close OutputFile SubstituteParametersInText = strTempFile Exit Function SubstituteParametersInTextErr: ' Log the error code raised by Visual Basic ' Call LogErrors(Errors) mcVBErr.LogVBErrors mstrSource = mstrModuleName & "SubstituteParametersInText" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function Private Function WriteCommandToFile(sCommand As String, Optional sFile As String = gstrEmptyString) As String ' Writes the command text to a temporary file ' Returns the name of the temporary file Dim OutputFile As Integer On Error GoTo WriteCommandToFileErr If StringEmpty(sFile) Then sFile = CreateTempFile() End If OutputFile = FreeFile Open sFile For Output Access Write As OutputFile Print #OutputFile, sCommand Close OutputFile WriteCommandToFile = sFile Exit Function WriteCommandToFileErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) mstrSource = mstrModuleName & "WriteCommandToFile" On Error GoTo 0 Err.Raise vbObjectError + errSubValuesFailed, _ gstrSource, _ LoadResString(errSubValuesFailed) End Function Public Property Get WspPreCons() As Variant WspPreCons = mcvntWspPreCons </pre>
---	---	--

```

End Property
Public Property Let WspPreCons(ByVal vdata As Variant)
    mcvntWspPreCons = vdata
End Property

Public Property Get WspPostCons() As Variant
    WspPostCons = mcvntWspPostCons
End Property
Public Property Let WspPostCons(ByVal vdata As Variant)
    mcvntWspPostCons = vdata
End Property

Public Property Get PreCons() As Variant
    PreCons = mcvntPreCons
End Property
Public Property Let PreCons(ByVal vdata As Variant)
    mcvntPreCons = vdata
End Property

Public Property Get PostCons() As Variant
    PostCons = mcvntPostCons
End Property
Public Property Let PostCons(ByVal vdata As Variant)
    mcvntPostCons = vdata
End Property

Public Property Set Globals(cRunSteps As cArrSteps)

    Set mcGlobals = cRunSteps

End Property
Public Property Set ExecuteStep(cRunStep As cStep)

    Set mcStep = cRunStep

End Property
Public Property Get Globals() As cArrSteps

    Set Globals = mcGlobals

End Property
Public Property Get ExecuteStep() As cStep

    Set ExecuteStep = mcStep

End Property
Public Property Set Iterators(vdata As cRunColIt)

    Set mcIterators = vdata

End Property
Private Sub Class_Initialize()

    ' Initialize the Abort flag to False
    mblnAbort = False
    Set mcVBErr = New cVBErrorsSM
    Set mcTermProcess = New cTermProcess

End Sub
Private Sub Class_Terminate()

    On Error GoTo Class_TerminateErr

    Set mcExecObj = Nothing
    Set mcVBErr = Nothing
    Set mcTermProcess = Nothing

```

```

Exit Sub

Class_TerminateErr:
    Call LogErrors(Errors)

End Sub

Private Sub mcExecObj_Start(ByVal StartTime As Currency)
    ' Raise an event indicating that the step has begun execution
    RaiseEvent ProcessStart(mcExecStep, msRunStepDtl, StartTime, mlngInstanceId)
End Sub

Private Sub mcExecObj_Complete(ByVal EndTime As Currency, ByVal Elapsed As Long)

    On Error GoTo mcExecObj_CompleteErr

    Debug.Print Elapsed
    RaiseEvent ProcessComplete(mcExecStep, EndTime, mlngInstanceId, Elapsed)
    mcTermProcess.ProcessTerminated

Exit Sub

mcExecObj_CompleteErr:
    Call LogErrors(Errors)

End Sub

Private Sub mcTermProcess_TermProcessExists()

    On Error GoTo TermProcessExistsErr

    ' Call a procedure to execute the next step, if any
    Call Execute

Exit Sub

TermProcessExistsErr:
    ' Log the error code raised by the Execute procedure
    Call LogErrors(Errors)

End Sub
VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cRunWorkspace"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cRunWorkspace.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class loads all the information necessary to execute a workspace and calls cRunInst to execute the workspace.
' It also propagates Step start and complete and
' Run start and complete events.
' Contact: Reshma Tharamal (reshmat@microsoft.com)

```

```

Option Explicit

' Used to indicate the source module name when errors
' are raised by this module
Private Const mstrModuleName As String = "cRunWorkspace."
Private mstrSource As String

Private mcRunSteps As cArrSteps
Private mcRunParams As cArrParameters
Private mcRunConstraints As cArrConstraints
Private mcRunConnections As cConnections
Private mcRunConnDtls As cConnDtls
Private mcvntWspPreCons As Variant
Private mcvntWspPostCons As Variant
Private mdbLoadDb As Database
Private mlngRunId As Long
Private mlngWorkspaceId As Long
Private mField As cStringSM
Public CreateInputFiles As Boolean

Private WithEvents mcRun As cRunInst
Attribute mcRun.VB_VarHelpID = -1

Public Event RunStart(dtmStartTime As Currency, strWspLog As String, lRunId As Long)
Public Event RunComplete(dtmEndTime As Currency)
Public Event StepStart(cStepRecord As cStep, dtmStartTime As Currency, lngInstanceId As Long, _
    sPath As String, slts As String)
Public Event StepComplete(cStepRecord As cStep, dtmEndTime As Currency, lngInstanceId As Long)
Public Event ProcessStart(cStepRecord As cStep, strCommand As String, _
    dtmStartTime As Currency, lngInstanceId As Long)
Public Event ProcessComplete(cStepRecord As cStep, dtmEndTime As Currency, lngInstanceId As Long)
Public Function InstancesForStep(lngStepId As Long, iStatus As InstanceStatus) As cInstances
    ' Returns an array of all the instances for a step

    If mcRun Is Nothing Then
        Set InstancesForStep = Nothing
    Else
        Set InstancesForStep = mcRun.InstancesForStep(lngStepId, iStatus)
    End If

End Function
Private Sub InsertRunDetail(cStepRecord As cStep, _
    strCommand As String, dtmStartTime As Currency, _
    lngInstanceId As Long, lParentInstanceId As Long, sltValue As String)
    ' Inserts a new run detail record into the database

    Dim strInsert As String
    Dim qy As QueryDef

    On Error GoTo InsertRunDetailErr
    mstrSource = mstrModuleName & "InsertRunDetail"

    strInsert = "insert into run_step_details " & _
        "(" & run_id, step_id, version_no, instance_id, parent_instance_id, " & _
        " command, start_time, iterator_value )" & _

```

```

" values ( "
#If USE_JET Then

    strInsert = strInsert & " [r_id], [s_id],
[ver_no], [i_id], [p_i_id], " & _
    " [com], [s_date], [it_val] )"

    Set qy = mdbLoadDb.CreateQueryDef( _
        gstrEmptyString, strInsert)

    ' Call a procedure to assign the Querydef
parameters
    Call AssignParameters(qy,
        StartTime:=dtmStartTime, _
        StepId:=cStepRecord.StepId, _
        Version:=cStepRecord.VersionNo, _
        InstanceId:=lngInstanceId, _
        Command:=strCommand)

    qy.Execute dbFailOnError
    qy.Close

#Else

    strInsert = strInsert & Str(mlngRunId) _
        & ", " & Str(cStepRecord.StepId) _
        & ", " &
mField.MakeStringFieldValid(cStepRecord.
VersionNo) _
        & ", " & Str(lngInstanceId) _
        & ", " & Str(lParentInstanceId) _
        & ", " &
mField.MakeStringFieldValid(strCommand)
    _
        & ", " & Str(dtmStartTime) _
        & ", " &
mField.MakeStringFieldValid(sIfValue)

    strInsert = strInsert & " ) "

    mdbLoadDb.Execute strInsert,
dbFailOnError

#End If

Exit Sub

InsertRunDetailErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"InsertRunDetail"
    On Error GoTo 0
    Err.Raise vbObjectError +
errUpdateRunDataFailed, _
        mstrSource, _

LoadResString(errUpdateRunDataFailed)

End Sub
Private Sub UpdateRunDetail(cStepRecord
As cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)
    ' Updates the run detail record in the
database

    Dim strUpdate As String
    Dim qy As QueryDef

    On Error GoTo UpdateRunDetailErr

    strUpdate = "update run_step_details " &
_

```

```

" set end_time = [e_date], elapsed_time
= [elapsed] " & _
    " where run_id = [r_id] " & _
    " and step_id = [s_id] " & _
    " and version_no = [ver_no] " & _
    " and instance_id = [i_id] "

    Set qy = mdbLoadDb.CreateQueryDef( _
        gstrEmptyString, strUpdate)

    ' Call a procedure to assign the Querydef
parameters
    Call AssignParameters(qy,
        EndTime:=dtmEndTime, _
        StepId:=cStepRecord.StepId, _
        Version:=cStepRecord.VersionNo, _
        InstanceId:=lngInstanceId,
        Elapsed:=lElapsed)

    qy.Execute dbFailOnError
    qy.Close

Exit Sub

UpdateRunDetailErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"UpdateRunDetail"
    On Error GoTo 0
    Err.Raise vbObjectError +
errUpdateRunDataFailed, _
        mstrSource, _

LoadResString(errUpdateRunDataFailed)

End Sub
Private Function
InsertRunHeader(dtmStartTime As Currency)
As Long
    ' Inserts a new run header record into the
database
    ' and returns the id for the run

    Dim strInsert As String
    Dim qy As QueryDef

    On Error GoTo InsertRunHeaderErr

    strInsert = "insert into run_header " & _
        "( run_id, workspace_id, start_time ) " &
_
        " values ( " & _
        " [r_id], [w_id], [s_date] )"

    Set qy = mdbLoadDb.CreateQueryDef( _
        gstrEmptyString, strInsert)

    ' Call a procedure to execute the Querydef
object
    Call AssignParameters(qy,
        StartTime:=dtmStartTime)

    qy.Execute dbFailOnError
    qy.Close

    InsertRunHeader = mlngRunId
    Exit Function

InsertRunHeaderErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"InsertRunHeader"
    On Error GoTo 0
    Err.Raise vbObjectError +
errUpdateRunDataFailed, _

```

```

mstrSource, _
    LoadResString(errUpdateRunDataFailed)

End Function
Private Sub InsertRunParameters(dtmStartTime As
Currency)
    ' Inserts a new run header record into the database
    ' and returns the id for the run

    Dim strInsert As String
    Dim qy As QueryDef
    Dim cParamRec As cParameter
    Dim lngIndex As Long

    On Error GoTo InsertRunParametersErr

    strInsert = "insert into run_parameters " & _
        "( run_id, parameter_name, parameter_value )
" & _
        " values ( " & _
        " [r_id], [p_name], [p_value] )"

    Set qy = mdbLoadDb.CreateQueryDef( _
        gstrEmptyString, strInsert)
    qy.Parameters("r_id").Value = mlngRunId

    For lngIndex = 0 To
mcRunParams.ParameterCount - 1
        Set cParamRec = mcRunParams(lngIndex)

        qy.Parameters("p_name").Value =
cParamRec.ParameterName
        qy.Parameters("p_value").Value =
cParamRec.ParameterValue
        qy.Execute dbFailOnError

    Next lngIndex

    qy.Close

Exit Sub

InsertRunParametersErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"InsertRunParameters"
    On Error GoTo 0
    Err.Raise vbObjectError +
errUpdateRunDataFailed, _
        mstrSource, _
        LoadResString(errUpdateRunDataFailed)

End Sub
Private Sub AssignParameters(qyExec As
DAO.QueryDef, _
    Optional StartTime As Currency = 0, _
    Optional EndTime As Currency = 0, _
    Optional StepId As Long = 0, _
    Optional Version As String = gstrEmptyString,
_
    Optional InstanceId As Long = 0, _
    Optional ParentInstanceId As Long = 0, _
    Optional Command As String =
gstrEmptyString, _
    Optional Elapsed As Long = 0, _
    Optional ItValue As String = gstrEmptyString)
    ' Assigns values to the parameters in the querydef
object

    Dim prmParam As DAO.Parameter

    On Error GoTo AssignParametersErr
    mstrSource = mstrModuleName &
"AssignParameters"

```

```

For Each prmParam In
  qyExec.Parameters
  Select Case prmParam.Name
    Case "[w_id]"
      prmParam.Value =
        mlngWorkspaceld

    Case "[r_id]"
      prmParam.Value = mlngRunId

    Case "[s_id]"
      BugAssert StepId <> 0
      prmParam.Value = StepId

    Case "[ver_no]"
      BugAssert Not
        StringEmpty(Version)
      prmParam.Value = Version

    Case "[i_id]"
      BugAssert InstanceId <> 0
      prmParam.Value = InstanceId

    Case "[p_i_id]"
      prmParam.Value =
        ParentInstanceId

    Case "[com]"
      BugAssert Not
        StringEmpty(Command)
      prmParam.Value = Command

    Case "[s_date]"
      BugAssert StartTime <> 0
      prmParam.Value = StartTime

    Case "[e_date]"
      BugAssert EndTime <> 0
      prmParam.Value = EndTime

    Case "[elapsed]"
      prmParam.Value = Elapsed

    Case "[it_val]"
      prmParam.Value = ItValue

    Case Else
      ' Write the parameter name that is
      faulty
      WriteError errInvalidParameter,
        mstrSource, _
        prmParam.Name
      On Error GoTo 0
      Err.Raise errInvalidParameter,
        mstrSource, _

LoadResString(errInvalidParameter)
End Select
Next prmParam

Exit Sub

AssignParametersErr:
  mstrSource = mstrModuleName &
  "AssignParameters"
  Call LogErrors(Errors)
  On Error GoTo 0
  Err.Raise vbObjectError +
  errAssignParametersFailed, _
  mstrSource,
  LoadResString(errAssignParametersFailed)

End Sub

```

```

Private Sub RunStartProcessing(dtmStartTime
As Currency)

  On Error GoTo RunStartProcessingErr

  ' Insert the run header into the database
  Call InsertRunHeader(dtmStartTime)

  ' Insert the run parameters into the database
  Call InsertRunParameters(dtmStartTime)

  Exit Sub

RunStartProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  mstrSource = mstrModuleName &
  "RunStartProcessing"
  ShowError errUpdateRunDataFailed
  WriteError errUpdateRunDataFailed,
  mstrSource

End Sub

Private Sub
  ProcessStartProcessing(cStepRecord As cStep,
  _
  strCommand As String, dtmStartTime As
  Currency, lngInstanceId As Long, _
  lParentInstanceId As Long, sltValue As
  String)

  On Error GoTo ProcessStartProcessingErr

  ' Insert the run detail into the database
  Call InsertRunDetail(cStepRecord,
  strCommand, dtmStartTime, lngInstanceId, _
  lParentInstanceId, sltValue)

  Exit Sub

ProcessStartProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  mstrSource = mstrModuleName &
  "ProcessStartProcessing"
  ShowError errUpdateRunDataFailed
  WriteError errUpdateRunDataFailed,
  mstrSource

End Sub

Private Sub StepStartProcessing(cStepRecord
As cStep, dtmStartTime As Currency, _
  lngInstanceId As Long, lParentInstanceId
As Long, sltValue As String)

  On Error GoTo StepStartProcessingErr

  ' Since ProcessStart events won't be
  triggered for manager steps
  If cStepRecord.StepType = gintManagerStep
  Then
    ' Insert the run detail into the database
    Call InsertRunDetail(cStepRecord,
    cStepRecord.StepLabel, _
    dtmStartTime, lngInstanceId,
    lParentInstanceId, sltValue)
  End If

  Exit Sub

StepStartProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  mstrSource = mstrModuleName &
  "StepStartProcessing"

```

```

  ShowError errUpdateRunDataFailed

End Sub

Private Sub
  ProcessCompleteProcessing(cStepRecord As cStep,
  _
  dtmStartTime As Currency, lngInstanceId As
  Long, lElapsed As Long)

  On Error GoTo ProcessCompleteProcessingErr

  ' Insert the run detail into the database
  Call UpdateRunDetail(cStepRecord,
  dtmStartTime, lngInstanceId, lElapsed)

  Exit Sub

ProcessCompleteProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  mstrSource = mstrModuleName &
  "ProcessCompleteProcessing"
  ShowError errUpdateRunDataFailed

End Sub

Private Sub StepCompleteProcessing(cStepRecord
As cStep, _
  dtmEndTime As Currency, lngInstanceId As
  Long, lElapsed As Long)

  On Error GoTo StepCompleteProcessingErr

  ' Since ProcessComplete events won't be
  triggered for manager steps
  If cStepRecord.StepType = gintManagerStep
  Then
    ' Update the run detail in the database
    Call UpdateRunDetail(cStepRecord,
    dtmEndTime, lngInstanceId, lElapsed)
  End If

  Exit Sub

StepCompleteProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  ShowError errUpdateRunDataFailed

End Sub

Private Sub RunCompleteProcessing(dtmEndTime
As Currency)

  On Error GoTo RunCompleteProcessingErr

  ' Update the header record with the end time for
  the run
  Call UpdateRunHeader(dtmEndTime)

  Exit Sub

RunCompleteProcessingErr:
  ' Log the error code raised by Visual Basic
  Call LogErrors(Errors)
  ShowError errUpdateRunDataFailed

End Sub

Private Sub UpdateRunHeader(ByVal dtmEndTime
As Currency)
  ' Updates the run header record with the end date

  Dim strUpdate As String
  Dim qy As QueryDef

  On Error GoTo UpdateRunHeaderErr

```

<pre> strUpdate = "update run_header " & _ " set end_time = [e_date] " & _ " where run_id = [r_id] " Set qy = mdbLoadDb.CreateQueryDef(_ gstrEmptyString, strUpdate) ' Call a procedure to execute the Querydef object Call AssignParameters(qy, EndTime:=dtmEndTime) qy.Execute dbFailOnError qy.Close Exit Sub UpdateRunHeaderErr: LogErrors Errors mstrSource = mstrModuleName & "UpdateRunHeader" On Error GoTo 0 Err.Raise vbObjectError + errUpdateRunDataFailed, _ mstrSource, _ LoadResString(errUpdateRunDataFailed) End Sub Public Property Let WorkspaceId(ByVal vdata As Long) mngWorkspaceId = vdata End Property Public Property Get WorkspaceId() As Long WorkspaceId = mngWorkspaceId End Property Public Sub RunWorkspace() Dim cRunSeq As cSequence On Error GoTo RunWorkspaceErr ' Call a procedure to load the module- level structures ' with all the step and parameter data for the run If LoadRunData = False Then ' Error handled by the function already Exit Sub End If ' Retrieve the next run identifier using the sequence class Set cRunSeq = New cSequence Set cRunSeq.IdDatabase = dbsAttTool cRunSeq.IdentifierColumn = "run_id" mngRunId = cRunSeq.Identifier Set cRunSeq = Nothing Call mcRunParams.InitBuiltInsForRun(mngWor kspaceId, mngRunId) Set mcRun.Constraints = mcRunConstraints mcRun.WspPreExecution = mcvntWspPreCons mcRun.WspPostExecution = mcvntWspPostCons Set mcRun.Steps = mcRunSteps Set mcRun.Parameters = mcRunParams </pre>	<pre> Set mcRun.RunConnections = mcRunConnections Set mcRun.RunConnDtls = mcRunConnDtls mcRun.WspId = mngWorkspaceId mcRun.RootKey = LabelStep(mngWorkspaceId) mcRun.RunId = mngRunId mcRun.CreateInputFiles = CreateInputFiles mcRun.Run Exit Sub RunWorkspaceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) End Sub Public Property Get LoadDb() As Database Set LoadDb = mdbLoadDb End Property Public Property Set LoadDb(vdata As Database) Set mdbLoadDb = vdata End Property Private Function LoadRunData() As Boolean ' Loads the step, parameter and constraint arrays ' with all the data for the workspace. Returns False ' if a failure occurs Dim strWorkspaceName As String Dim recWspSteps As Recordset Dim qySteps As DAO.QueryDef Dim recWspParams As Recordset Dim qyParams As DAO.QueryDef Dim recWspConns As Recordset Dim qyConns As DAO.QueryDef Dim recWspConnDtls As Recordset Dim qyConnDtls As DAO.QueryDef On Error GoTo LoadRunDataErr Set mcRunSteps.StepDB = mdbLoadDb Set mcRunParams.ParamDatabase = mdbLoadDb Set mcRunConstraints.ConstraintDB = mdbLoadDb Set mcRunConnections.ConnDb = mdbLoadDb Set mcRunConnDtls.ConnDb = mdbLoadDb ' Read all the step and parameter data for the workspace Call ReadWorkspaceData(mngWorkspaceId, mcRunSteps, _ mcRunParams, mcRunConstraints, mcRunConnections, mcRunConnDtls, _ recWspSteps, qySteps, recWspParams, qyParams, recWspConns, qyConns, _ recWspConnDtls, qyConnDtls) ' Load all the pre- and post-execution constraints that ' have been defined for the workspace </pre>	<pre> mcvntWspPreCons = mcRunConstraints.ConstraintsForWsp(_ mngWorkspaceId, _ gintPreStep, _ blnSort:=True, _ blnGlobalConstraintsOnly:=True) mcvntWspPostCons = mcRunConstraints.ConstraintsForWsp(_ mngWorkspaceId, _ gintPostStep, _ blnSort:=True, _ blnGlobalConstraintsOnly:=True) On Error Resume Next recWspSteps.Close qySteps.Close recWspParams.Close qyParams.Close recWspConns.Close qyConns.Close LoadRunData = True Exit Function LoadRunDataErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) ShowError errLoadRunDataFailed LoadRunData = False End Function Public Sub StopRun() On Error GoTo StopRunErr If mcRun Is Nothing Then ' We haven't been the run yet, so do nothing Else mcRun.StopRun End If Exit Sub StopRunErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) ' Errors would have been displayed by the called process End Sub Public Sub AbortRun() On Error GoTo AbortRunErr If mcRun Is Nothing Then ' We haven't been the run yet, so do nothing Else mcRun.Abort End If Exit Sub AbortRunErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) ' Errors would have been displayed by the called process End Sub Private Sub Class_Initialize() ' Create instances of the step, parameter and constraint arrays </pre>
---	--	--


```

Set mcRunSteps = New cArrSteps
Set mcRunParams = New cArrParameters
Set mcRunConstraints = New
cArrConstraints
Set mcRunConnections = New
cConnections
Set mcRunConnDtls = New cConnDtls
Set mcRun = New cRunInst
Set mField = New cStringSM

End Sub
Private Sub Class_Terminate()

    On Error GoTo UnLoadRunDataErr

    ' Clears the step, parameter and constraint
    arrays
    Set mcRunSteps = Nothing
    Set mcRunParams = Nothing
    Set mcRunConstraints = Nothing
    Set mcRunConnections = Nothing
    Set mcRunConnDtls = Nothing

    Set mcRun = Nothing
    Set mdbsLoadDb = Nothing
    Set mField = Nothing

    Exit Sub

UnLoadRunDataErr:
    ' Log the error code raised by Visual
    Basic
    Call LogErrors(Errors)
    ' Not a critical error - continue
    Resume Next

End Sub

Private Sub
mcRun_ProcessComplete(cStepRecord As
cStep, _
    dtmEndTime As Currency,
lngInstanceId As Long, lElapsed As Long)

    RaiseEvent
ProcessComplete(cStepRecord,
dtmEndTime, lngInstanceId)
    Call
ProcessCompleteProcessing(cStepRecord,
dtmEndTime, lngInstanceId, lElapsed)

End Sub

Private Sub
mcRun_ProcessStart(cStepRecord As cStep,
_
    strCommand As String, dtmStartTime
As Currency, lngInstanceId As Long, _
    lParentInstanceId As Long, sltValue As
String)

    RaiseEvent ProcessStart(cStepRecord,
strCommand, dtmStartTime, lngInstanceId)
    Call ProcessStartProcessing(cStepRecord,
strCommand, dtmStartTime, lngInstanceId,
_
    lParentInstanceId, sltValue)

End Sub

Private Sub
mcRun_RunComplete(dtmEndTime As
Currency)

```

```

Debug.Print "Run ended at: " &
CStr(dtmEndTime)
    Call RunCompleteProcessing(dtmEndTime)

    RaiseEvent RunComplete(dtmEndTime)

End Sub
Private Sub mcRun_RunStart(dtmStartTime
As Currency, strWspLog As String)

    RaiseEvent RunStart(dtmStartTime,
strWspLog, mlngRunId)
    Debug.Print "Run started at: " &
CStr(dtmStartTime)

    Call RunStartProcessing(dtmStartTime)

End Sub
Private Sub
mcRun_StepComplete(cStepRecord As cStep,
_
    dtmEndTime As Currency, lngInstanceId
As Long, lElapsed As Long)

    RaiseEvent StepComplete(cStepRecord,
dtmEndTime, lngInstanceId)
    ' BugMessage "Step: " &
cStepRecord.StepLabel & " has completed!"

    Call StepCompleteProcessing(cStepRecord,
dtmEndTime, lngInstanceId, lElapsed)

End Sub
Private Sub mcRun_StepStart(cStepRecord As
cStep, dtmStartTime As Currency, _
    lngInstanceId As Long, lParentInstanceId
As Long, sPath As String, slts As String,
sltValue As String)

    RaiseEvent StepStart(cStepRecord,
dtmStartTime, lngInstanceId, sPath, slts)
    'bugmessage "Step: " &
cStepRecord.StepLabel & " has started."

    Call StepStartProcessing(cStepRecord,
dtmStartTime, lngInstanceId,
lParentInstanceId, sltValue)

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cSequence"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cSequence.cls
'
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   This class uses the
att_identifiers table to generate unique
identifiers.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Private mlngIdentifier As Long
Private mstrIdentifierColumn As String

```

```

Private mrecIdentifiers As Recordset
Private mdbsDatabase As Database

Private Const mstrEmptyString = ""

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cSequence."

Private Sub CreateIdRecord()
    ' Creates a record with all identifiers having an
    initial value of 1

    Dim sSql As String
    Dim pId As DAO.Parameter
    Dim qyId As DAO.QueryDef

    sSql = "insert into att_identifiers (" & _
        " workspace_id, parameter_id, step_id, " &
_
        " constraint_id, run_id, connection_id " & _
        ", " & FLD_ID_CONN_NAME & _
        ") values (" & _
        "[w_id], [p_id], [s_id], [c_id], [r_id],
[conn_id], [conn_dtl_id] )"
    Set qyId =
mdbsDatabase.CreateQueryDef(gstrEmptyString,
sSql)
    For Each pId In qyId.Parameters
        pId.Value = glMinId
    Next pId
    qyId.Execute dbFailOnError
    qyId.Close

End Sub
Private Sub CreateIdRecordset()

    Dim strSql As String

    ' Initialize the recordset with all identifiers
    strSql = "select * from att_identifiers"
    Set mrecIdentifiers =
mdbsDatabase.OpenRecordset(strSql,
dbOpenForwardOnly)

    If mrecIdentifiers.RecordCount = 0 Then
        CreateIdRecord
        Set mrecIdentifiers =
mdbsDatabase.OpenRecordset(strSql,
dbOpenForwardOnly)
    End If

    BugAssert mrecIdentifiers.RecordCount <> 0

End Sub

Public Property Set IdDatabase(vdata As Database)

    Set mdbsDatabase = vdata

End Property

Public Property Let IdentifierColumn(vdata As
String)

    Dim intIndex As Integer

    On Error GoTo IdentifierColumnErr

    ' Initialize the return value to an empty string
    mstrIdentifierColumn = mstrEmptyString
    Call CreateIdRecordset

```

<pre> For intIndex = 0 To mrecIdentifiers.Fields.Count - 1 If LCase(Trim(mrecIdentifiers.Fields(intIndex).Name)) = _ LCase(Trim(vdata)) Then ' Valid column name mstrIdentifierColumn = vdata Exit Property End If Next intIndex BugAssert True, "Invalid column name!" Exit Property IdentifierColumnErr: LogErrors Errors mstrSource = mstrModuleName & "IdentifierColumn" On Error GoTo 0 Err.Raise vbObjectError + errIdentifierColumnFailed, _ mstrSource, _ LoadResString(errIdentifierColumnFailed) End Property Public Property Get Identifier() As Long Dim strSql As String On Error GoTo GetIdentifierErr BugAssert mstrIdentifierColumn <> mstrEmptyString ' Increment the identifier column by 1 strSql = "update att_identifiers " & _ " set " & mstrIdentifierColumn & _ " = " & mstrIdentifierColumn & " + 1" mdbsDatabase.Execute strSql, dbFailOnError ' Refresh the recordset with identifier values Call CreateIdRecordset mlngIdentifier = mrecIdentifiers.Fields(mstrIdentifierColumn).Value Identifier = mlngIdentifier Exit Property GetIdentifierErr: LogErrors Errors mstrSource = mstrModuleName & "Identifier" On Error GoTo 0 Err.Raise vbObjectError + errGetIdentifierFailed, _ mstrSource, _ LoadResString(errGetIdentifierFailed) End Property Private Sub Class_Terminate() mrecIdentifiers.Close </pre>	<pre> End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStack" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cStack.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' PURPOSE: This class implements a stack of objects. ' Contact: Reshma Tharamal (reshmat@microsoft.com) Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cStack." Private mstrSource As String Private mcVector As cVector Private mlngCount As Long Public Property Get Item(ByVal Position As Long) As Object Attribute Item.VB_UserMemId = 0 Set Item = mcVector(Position) End Property Public Sub Push(objToPush As Object) mcVector.Add objToPush End Sub Public Sub Clear() mcVector.Clear End Sub Public Function Pop() As Object If mcVector.Count > 0 Then Set Pop = mcVector.Delete(mcVector.Count - 1) Else Set Pop = Nothing End If End Function Public Function Count() As Long Count = mcVector.Count End Function Private Sub Class_Initialize() Set mcVector = New cVector End Sub </pre>	<pre> Private Sub Class_Terminate() Set mcVector = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStep" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False Attribute VB_Ext_KEY = "SavedWithClassBuilder", "Yes" Attribute VB_Ext_KEY = "Top_Level", "Yes" ' FILE: cStep.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' PURPOSE: Encapsulates the properties and methods of a step. ' Contains functions to insert, update and delete ' att_steps records from the database. ' Contact: Reshma Tharamal (reshmat@microsoft.com) Option Explicit ' Local variable(s) to hold property value(s) Private mlngStepId As Long Private mstrVersionNo As String Private mstrStepLabel As String Private mstrStepTextFile As String Private mstrStepText As String Private mstrStartDir As String Private mlngWorkspaceId As Integer Private mlngParentStepId As Integer Private mstrParentVersionNo As String Private mintSequenceNo As Integer Private mintStepLevel As Integer Private mblnEnabledFlag As Boolean Private mstrDegreeParallelism As String Private mintExecutionMechanism As Integer Private mstrFailureDetails As String Private mintContinuationCriteria As Integer Private mblnGlobalFlag As Boolean Private mblnArchivedFlag As Boolean Private mstrOutputFile As String Private mstrLogFile As String Private mstrErrorFile As String Private mdbsDatabase As Database Private mintStepType As Integer Private mintOperation As Operation Private mlngPosition As Long Private mstrIteratorName As String Private mclterators As cNodeCollections Private mblsNewVersion As Boolean Private msOldVersion As String ' The following constants are used throughout the project to ' indicate the different options selected by the user ' The options are presented to the user as control arrays of ' option buttons. These constants have to be in sync with the ' indexes of the option buttons. </pre>
---	---	--

```

' All the control arrays have an lbound of 1.
The value 0 is
' used to indicate that the property being
represented by the
' control array is not valid for the step
' Public enums are used since we cannot
expose public constants
' in class modules. gintNoOption is
applicable to all enums,
' but declared in the Execution method
enum, since we cannot
' declare it more than once.

' Is here as a comment
' Has been defined in public.bas with the
other object types
Public Enum gintStepType
    gintGlobalStep = 3
    gintManagerStep
    gintWorkerStep
End Enum

' Execution Method options
Public Enum ExecutionMethod
    gintNoOption = 0
    gintExecuteODBC
    gintExecuteShell
End Enum

' Failure criteria options
Public Enum FailureCriteria
    gintFailureODBC = 1
    gintFailureTextCompare
End Enum

' Continuation criteria options
' Note: Update the initialization of
gsContCriteria in Initialize() if the
' continuation criteria are modified
Public Enum ContinuationCriteria
    gintOnFailureAbort = 1
    gintOnFailureContinue
    gintOnFailureCompleteSiblings
    gintOnFailureAbortSiblings
    gintOnFailureSkipSiblings
    gintOnFailureAsk
End Enum

' The initial version #
Private Const mstrMinVersion As String =
"0.0"

' End of constants for option button control
arrays
' Used to indicate the source module name
when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cStep."

' The cSequence class is used to generate
unique step identifiers
Private mStepSeq As cSequence

' The StringSM class is used to carry out
string operations
Private mFieldValue As cStringSM
Private Sub NewVersion()

    mbIsNewVersion = True
    msOldVersion = mstrVersionNo

End Sub
Public Function IsNewVersion() As Boolean

```

```

    IsNewVersion = mbIsNewVersion
End Function

Public Function OldVersionNo() As String
    OldVersionNo = msOldVersion
End Function

Public Sub SaveIterators()
    ' This procedure checks if any changes have
been made
    ' to the iterators for the step. If so, it calls the
    ' methods of the iterator class to commit the
changes
    Dim cltRec As cIterator
    Dim lngIndex As Long

    On Error GoTo SaveIteratorsErr

    For lngIndex = 0 To mcIterators.Count - 1
        Set cltRec = mcIterators(lngIndex)

        Select Case cltRec.IndOperation
            Case QueryOp
                ' No changes were made to the
queried Step.
                ' Do nothing

            Case InsertOp
                cltRec.Add mlngStepId,
mstrVersionNo
                cltRec.IndOperation = QueryOp

            Case UpdateOp
                cltRec.Update mlngStepId,
mstrVersionNo
                cltRec.IndOperation = QueryOp

            Case DeleteOp
                cltRec.Delete mlngStepId,
mstrVersionNo
                ' Remove the record from the
collection
                mcIterators.Delete lngIndex

        End Select
    Next lngIndex

Exit Sub

SaveIteratorsErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"SaveIterators"
    On Error GoTo 0
    Err.Raise vbObjectError + errSaveFailed, _
mstrSource, _
LoadResString(errSaveFailed)

End Sub
Public Property Get IndOperation() As
Operation

    IndOperation = mintOperation

End Property
Public Property Let IndOperation(ByVal vdata
As Operation)

    BugAssert vdata = QueryOp Or vdata =
InsertOp Or vdata = UpdateOp Or vdata =
DeleteOp, "Invalid operation"
    mintOperation = vdata

End Property

```

```

Public Function Iterators() As Variant
    ' Returns a variant containing all the iterators that
    ' have been defined for the step

    Dim cStepIterators() As cIterator
    Dim cTemplt As cIterator
    Dim lngIndex As Long
    Dim lngItCount As Long

    On Error GoTo IteratorsErr

    lngItCount = 0
    For lngIndex = 0 To mcIterators.Count - 1
        ' Increase the array dimension and add the
constraint
        ' to it
        Set cTemplt = mcIterators(lngIndex)

        If cTemplt.IndOperation <> DeleteOp Then
            ReDim Preserve cStepIterators(lngItCount)
            Set cStepIterators(lngItCount) = cTemplt
            lngItCount = lngItCount + 1
        End If

    Next lngIndex

    If lngItCount = 0 Then
        Iterators = Empty
    Else
        Iterators = cStepIterators()
    End If

    Call QuickSort(Iterators)

Exit Function

IteratorsErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errIteratorsFailed, _
mstrModuleName & "Iterators", _
LoadResString(errIteratorsFailed)

End Function
Public Function IteratorCount() As Long
    ' Returns a count of all the iterators for the step

    Dim lngItCount As Long
    Dim lngIndex As Long
    Dim cTemplt As cIterator

    On Error GoTo IteratorsErr

    lngItCount = 0
    For lngIndex = 0 To mcIterators.Count - 1

        If mcIterators(lngIndex).IndOperation <>
DeleteOp Then
            lngItCount = lngItCount + 1
        End If

    Next lngIndex

    IteratorCount = lngItCount

Exit Function

IteratorsErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError + errIteratorsFailed, _
mstrSource, _
LoadResString(errIteratorsFailed)

End Function

```

<pre> Public Sub Validate() ' Each distinct object will have a Validate method which ' will check if the class properties are valid. This method ' will be used to check interdependant properties that ' cannot be validated by the let procedures. ' It should be called by the add and modify methods of the class ' Check if the step label has been specified If StringEmpty(mstrStepLabel) Then ShowError errStepLabelMandatory On Error GoTo 0 Err.Raise vbObjectError + errValidateFailed, _ "Validate", LoadResString(errValidateFailed) End If If Not IsStringEmpty(mstrStepText) And Not IsStringEmpty(mstrStepTextFile) Then ShowError errStepTextOrFile On Error GoTo 0 Err.Raise vbObjectError + errStepTextOrFile, _ "Validate", LoadResString(errStepTextOrFile) End If End Sub Public Function IncVersionY() As String ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. This function will increment ' the y component of the step by 1 On Error GoTo IncVersionYErr ' Store the old version number for the step Call NewVersion mstrVersionNo = Trim\$(Str\$(GetX(mstrVersionNo))) & gstrVerSeparator & _ Trim\$(Str\$(GetY(mstrVersionNo) + 1)) IncVersionY = mstrVersionNo Exit Function IncVersionYErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "IncVersionY" On Error GoTo 0 Err.Raise vbObjectError + errIncVersionYFailed, _ gstrSource, _ LoadResString(errIncVersionYFailed) End Function Public Function IncVersionX() As String ' The version number for a step is stored in the x.y </pre>	<pre> ' format where x is the parent component and y is the ' child component of the step. This function will increment ' the y component of the step by 1 and reset the x component ' to 0 On Error GoTo IncVersionXErr ' Store the old version number for the step Call NewVersion mstrVersionNo = Trim\$(Str\$(GetX(mstrVersionNo) + 1)) & gstrVerSeparator & "0" IncVersionX = mstrVersionNo Exit Function IncVersionXErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "IncVersionX" On Error GoTo 0 Err.Raise vbObjectError + errIncVersionXFailed, _ gstrSource, _ LoadResString(errIncVersionXFailed) End Function Private Function GetY(strVersion As String) As Long ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. Given an argument of type ' x.y, it returns y ' Truncate the fractional part to get the parent component ' of the version number (x.y) GetY = Val(Mid(strVersion, InStr(strVersion, gstrVerSeparator) + 1)) End Function Private Function GetX(strVersion As String) As Long ' The version number for a step is stored in the x.y ' format where x is the parent component and y is the ' child component of the step. Given an argument of type ' x.y, it returns x ' Truncate the fractional part to get the parent component ' of the version number (x.y) GetX = Val(Left(strVersion, InStr(strVersion, gstrVerSeparator) - 1)) End Function Public Function Clone(Optional cCloneStep As cStep) As cStep ' Creates a copy of a given step Dim lngIndex As Long </pre>	<pre> Dim cItRec As cIterator Dim cItClone As cIterator On Error GoTo CloneErr If cCloneStep Is Nothing Then Set cCloneStep = New cStep End If ' Copy all the step properties to the newly created step ' Initialize the global flag first since subsequent ' validations might depend on it cCloneStep.GlobalFlag = mblnGlobalFlag ' cCloneStep.GlobalRunMethod = mintGlobalRunMethod cCloneStep.StepType = mintStepType cCloneStep.StepId = mlngStepId cCloneStep.VersionNo = mstrVersionNo cCloneStep.StepLabel = mstrStepLabel cCloneStep.StepTextFile = mstrStepTextFile cCloneStep.StepText = mstrStepText cCloneStep.StartDir = mstrStartDir cCloneStep.WorkspaceId = mlngWorkspaceId cCloneStep.ParentStepId = mlngParentStepId cCloneStep.ParentVersionNo = mstrParentVersionNo cCloneStep.StepLevel = mintStepLevel cCloneStep.SequenceNo = mintSequenceNo cCloneStep.EnabledFlag = mblnEnabledFlag cCloneStep.DegreeParallelism = mstrDegreeParallelism cCloneStep.ExecutionMechanism = mintExecutionMechanism cCloneStep.FailureDetails = mstrFailureDetails cCloneStep.ContinuationCriteria = mintContinuationCriteria cCloneStep.ArchivedFlag = mblnArchivedFlag cCloneStep.OutputFile = mstrOutputFile ' cCloneStep.LogFile = mstrLogFile cCloneStep.ErrorFile = mstrErrorFile cCloneStep.IteratorName = mstrIteratorName cCloneStep.IndOperation = mintOperation cCloneStep.Position = mlngPosition Set cCloneStep.NodeDB = mdbDatabase ' Clone all the iterators for the step For lngIndex = 0 To mclIterators.Count - 1 Set cItRec = mclIterators(lngIndex) Set cItClone = cItRec.Clone cCloneStep.LoadIterator cItClone Next lngIndex ' And set the return value to the newly created step Set Clone = cCloneStep Exit Function CloneErr: LogErrors Errors mstrSource = mstrModuleName & "Clone" On Error GoTo 0 Err.Raise vbObjectError + errCloneFailed, _ mstrSource, LoadResString(errCloneFailed) End Function 'End Sub ' Public Property Let OutputFile(ByVal vdata As String) </pre>
---	--	--

```

    mstrOutputFile = vdata
End Property

Public Property Get OutputFile() As String

    OutputFile = mstrOutputFile
End Property

'Public Property Let LogFile(ByVal vdata
As String)
'
'    mstrLogFile = vdata
'End Property

'Public Property Get LogFile() As String
'
'    LogFile = mstrLogFile
'End Property

Public Property Let ErrorFile(ByVal vdata
As String)

    mstrErrorFile = vdata

End Property
Public Property Let IteratorName(ByVal
vdata As String)

    mstrIteratorName = vdata
End Property

Public Property Get ErrorFile() As String

    ErrorFile = mstrErrorFile

End Property
Public Property Get IteratorName() As
String

    IteratorName = mstrIteratorName
End Property

Public Property Set NodeDB(vdata As
Database)

    Set mddbDatabase = vdata
    Set mclIterators.NodeDB = vdata

End Property
Public Property Get NodeDB() As Database

    Set NodeDB = mddbDatabase
End Property

Private Function IsStringEmpty(strToCheck
As String) As Boolean

    IsStringEmpty = (strToCheck =
gstrEmptyString)

End Function

Public Property Let EnabledFlag(ByVal
vdata As Boolean)

    ' The enabled flag must be False for all
    global steps.

```

```

    ' This check must be made by the global step
    class. Only
    ' generic step validations will be carried out
    by this
    ' class
    mblnEnabledFlag = vdata
End Property

Public Property Let GlobalFlag(ByVal vdata
As Boolean)

    mblnGlobalFlag = vdata
End Property
Public Property Get EnabledFlag() As Boolean

    EnabledFlag = mblnEnabledFlag
End Property

Public Property Let ArchivedFlag(ByVal vdata
As Boolean)

    mblnArchivedFlag = vdata
End Property

Public Property Get ArchivedFlag() As
Boolean

    ArchivedFlag = mblnArchivedFlag
End Property

Public Property Get GlobalFlag() As Boolean

    GlobalFlag = mblnGlobalFlag
End Property

Public Sub Add()
    ' Inserts a step record into the database - it
    initializes
    ' the necessary properties for the step and
    calls InsertStepRec
    ' to do the database work

    On Error GoTo AddErr

    ' A new record would have the deleted_flag
    turned off!
    mblnArchivedFlag = False

    Call InsertStepRec

    ' If a new version of a step has been created,
    reset the old version info, since
    ' it's already been saved to the db
    If IsNewVersion() Then
        mblsNewVersion = False
        msOldVersion = gstrEmptyString
    End If

    Exit Sub

AddErr:
    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errAddStepFailed, _
        mstrModuleName & "Add",
    LoadResString(errAddStepFailed)
End Sub

Private Sub InsertStepRec()

```

```

    ' Inserts a step record into the database
    ' It first generates the insert statement using the
    different
    ' step properties and then executes it

    Dim strInsert As String
    Dim qy As DAO.QueryDef

    On Error GoTo InsertStepRecErr

    ' First check if the database object is valid
    Call CheckDB

    ' Check if the step record is valid
    Call Validate

    If IsNewVersion() Then
        Call UpdOldVersionsArchFlg
    End If

    ' Create a temporary querydef object
    strInsert = "insert into att_steps " & _
        "( workspace_id, step_id, version_no, " & _
        " step_label, step_file_name, step_text,
    start_directory, " & _
        " parent_step_id, parent_version_no,
    sequence_no, " & _
        " enabled_flag, step_level, " & _
        " degree_parallelism, execution_mechanism, "
    & _
        " failure_details, " & _
        " continuation_criteria, global_flag, " & _
        " archived_flag, " & _
        " output_file_name, error_file_name, " & _
        " iterator_name ) values ( "

    ' log_file_name,

    #If USE_JET Then

        strInsert = strInsert & " [w_id], [s_id], [ver_no], "
    & _
        " [s_label], [s_file_name], [s_text],
    [s_start_dir], " & _
        " [p_step_id], [p_version_no], [seq_no], " & _
        " [enabled], [s_level], [deg_parallelism], " & _
        " [exec_mechanism], [fail_dtls], " & _
        " [cont_criteria], [global], [archived], " & _
        " [output_file], [error_file], " & _
        " [it_name] ) "

    ' [log_file],

    Set qy =
mddbDatabase.CreateQueryDef(gstrEmptyString,
strInsert)

    ' Call a procedure to execute the Querydef object
    Call AssignParameters(qy)

    qy.Execute dbFailOnError
    qy.Close
    #Else

        strInsert = strInsert & Str(mlngWorkspaceId)
    & ", " & Str(mlngStepId) & _
        ", " &
mFieldValue.MakeStringFieldValid(mstrVersionNo
)

    ' For fields that may be null, call a function to
    determine
    ' the string to be appended to the insert statement
    strInsert = strInsert & ", " &
mFieldValue.MakeStringFieldValid(mstrStepLabel)

```

<pre> strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStepTextFile) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStepText) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrStartDir) strInsert = strInsert & ", " & Str(mlngParentStepId) & _ ", " & mFieldValue.MakeStringFieldValid(mstrParentVersionNo) & _ ", " & Str(mintSequenceNo) & _ ", " & Str(mblnEnabledFlag) & ", " & Str(mintStepLevel) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrDegreeParallelism) strInsert = strInsert & ", " & Str(mintExecutionMechanism) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrFailureDetails) & _ ", " & Str(mintContinuationCriteria) & _ ", " & Str(mblnGlobalFlag) & _ ", " & Str(mblnArchivedFlag) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrOutputFile) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrLogFile) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrErrorFile) strInsert = strInsert & ", " & mFieldValue.MakeStringFieldValid(mstrIteratorName) strInsert = strInsert & ") " BugMessage strInsert mdbsDatabase.Execute strInsert, dbFailOnError #End If Exit Sub InsertStepRecErr: mstrSource = mstrModuleName & "InsertStepRec" LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errInsertStepFailed, _ mstrSource, LoadResString(errInsertStepFailed) End Sub Private Sub UpdOldVersionsArchFlg() ' Updates the archived flag on all old version for the step to True Dim sUpdate As String Dim qy As DAO.QueryDef On Error GoTo UpdOldVersionsArchFlgErr </pre>	<pre> mstrSource = mstrModuleName & "UpdOldVersionsArchFlg" #If USE_JET Then sUpdate = "update att_steps " & _ " set archived_flag = True " ' Append the Where clause sUpdate = sUpdate & " where step_id = [s_id] " & _ " and version_no <> [ver_no]" Set qy = mdbsDatabase.CreateQueryDef(gstrEmptyString, sUpdate) ' Call a procedure to execute the Querydef object Call AssignParameters(qy) qy.Execute dbFailOnError If qy.RecordsAffected = 0 Then On Error GoTo 0 Err.Raise vbObjectError + errModifyStepFailed, _ mstrSource, LoadResString(errModifyStepFailed) End If qy.Close #Else sUpdate = "update att_steps " & _ " set archived_flag = True " sUpdate = sUpdate & " where step_id = " & Str(mlngStepId) & _ " and version_no <> " & mFieldValue.MakeStringFieldValid(mstrVersionNo) BugMessage sUpdate mdbsDatabase.Execute sUpdate, dbFailOnError #End If Exit Sub UpdOldVersionsArchFlgErr: mstrSource = mstrModuleName & "UpdOldVersionsArchFlg" LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errModifyStepFailed, _ mstrSource, LoadResString(errModifyStepFailed) End Sub Public Sub InsertIterator(cItRecord As cIterator) ' Inserts the iterator record into the database Call cItRecord.Add(mlngStepId, mstrVersionNo) End Sub Public Sub UpdateIterator(cItRecord As cIterator) ' Updates the iterator record in the database Call cItRecord.Update(mlngStepId, mstrVersionNo) </pre>	<pre> End Sub Public Sub UpdateIteratorVersion() ' Updates the iterator record in the database Dim lngIndex As Long Dim cTempIt As cIterator On Error GoTo UpdateIteratorVersionErr For lngIndex = 0 To mcIterators.Count - 1 ' Increase the array dimension and add the constraint ' to it Set cTempIt = mcIterators(lngIndex) If cTempIt.IndOperation <> DeleteOp Then ' Set the operation to indicate an insert cTempIt.IndOperation = InsertOp End If Next lngIndex Exit Sub UpdateIteratorVersionErr: mstrSource = mstrModuleName & "UpdateIteratorVersion" LogErrors Errors On Error GoTo 0 Err.Raise vbObjectError + errUpdateFailed, _ mstrSource, LoadResString(errUpdateFailed) End Sub Public Sub AddIterator(cItRecord As cIterator) ' Adds the iterator record to the collection of iterators ' for the step Call mcIterators.Add(cItRecord) End Sub Public Sub AddAllIterators() ' Sets the indicator variable for all iterators to insert Dim lngIndex As Long For lngIndex = 0 To mcIterators.Count - 1 mcIterators(lngIndex).Validate mcIterators(lngIndex).IndOperation = InsertOp Next lngIndex End Sub Public Sub LoadIterator(cItRecord As cIterator) ' Adds the iterator record to the collection of iterators ' for the step Call mcIterators.Load(cItRecord) End Sub Public Sub UnloadIterators() ' Unloads all iterator records for the step Dim lngIndex As Long For lngIndex = mcIterators.Count - 1 To 0 Step - 1 ' Calls the collection method to unload the node ' from the array mcIterators.Unload lngIndex Next lngIndex </pre>
---	---	---

<pre> End Sub Public Sub ModifyIterator(cItRecord As cIterator) ' Modifies the iterator record in the collection Call mcIterators.Modify(cItRecord) End Sub Public Sub DeleteIterator(cItRecord As cIterator) ' Deletes the iterator record from the database Call cItRecord.Delete(mlngStepId, mstrVersionNo) End Sub Public Sub RemoveIterator(cItRecord As cIterator) ' Marks the iterator record in the collection to ' indicate a delete Call mcIterators.Delete(cItRecord.Position) End Sub Private Sub AssignParameters(qyExec As DAO.QueryDef) ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to make them different ' from the actual field names. When the parameter names ' are the same as the field names, parameters in the ' where clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr mstrSource = mstrModuleName & "AssignParameters" For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" prmParam.Value = mlngWorkspaceId Case "[s_id]" prmParam.Value = mlngStepId Case "[ver_no]" prmParam.Value = mstrVersionNo Case "[s_label]" prmParam.Value = mstrStepLabel Case "[s_file_name]" prmParam.Value = mstrStepTextFile Case "[s_text]" prmParam.Value = mstrStepText Case "[s_start_dir]" prmParam.Value = mstrStartDir Case "[p_step_id]" prmParam.Value = mlngParentStepId Case "[p_version_no]" prmParam.Value = mstrParentVersionNo </pre>	<pre> Case "[seq_no]" prmParam.Value = mintSequenceNo Case "[enabled]" prmParam.Value = mblnEnabledFlag Case "[s_level]" prmParam.Value = mintStepLevel Case "[deg_parallelism]" prmParam.Value = mstrDegreeParallelism Case "[exec_mechanism]" prmParam.Value = mintExecutionMechanism Case "[fail_dtls]" prmParam.Value = mstrFailureDetails Case "[cont_criteria]" prmParam.Value = mintContinuationCriteria Case "[global]" prmParam.Value = mblnGlobalFlag Case "[archived]" prmParam.Value = mblnArchivedFlag Case "[output_file]" prmParam.Value = mstrOutputFile Case "[log_file]" prmParam.Value = mstrLogFile Case "[error_file]" prmParam.Value = mstrErrorFile Case "[it_name]" prmParam.Value = mstrIteratorName Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, _ prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrSource, _ LoadResString(errInvalidParameter) End Select Next prmParam If qyExec.Parameters("[s_id]") = 0 Or StringEmpty(qyExec.Parameters("[ver_no]")) Then WriteError errInvalidParameter, mstrSource On Error GoTo 0 Err.Raise errInvalidParameter, mstrSource, LoadResString(errInvalidParameter) End If Exit Sub AssignParametersErr: mstrSource = mstrModuleName & "AssignParameters" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrSource, LoadResString(errAssignParametersFailed) End Sub Public Sub Modify() Dim strUpdate As String Dim qy As QueryDef </pre>	<pre> On Error GoTo ModifyErr mstrSource = mstrModuleName & "Modify" ' Check if the database object is valid Call CheckDB ' Check if the step record is valid Call Validate ' The step_id and version_no will never be updated - ' whenever a step is modified a copy of the old step will ' be created with an incremented version_no #If USE_JET Then strUpdate = "update att_steps " & _ " set step_label = [s_label] " & _ " , step_file_name = [s_file_name] " & _ " , step_text = [s_text] " & _ " , start_directory = [s_start_dir] " & _ " , workspace_id = [w_id] " & _ " , parent_step_id = [p_step_id] " & _ " , parent_version_no = [p_version_no] " & _ " , sequence_no = [seq_no] " & _ " , step_level = [s_level] " & _ " , enabled_flag = [enabled] " & _ " , degree_parallelism = [deg_parallelism] " & _ _ " , execution_mechanism = [exec_mechanism] " & _ " , failure_details = [fail_dtls] " & _ " , continuation_criteria = [cont_criteria] " & _ " , global_flag = [global] " & _ " , archived_flag = [archived] " & _ " , output_file_name = [output_file] " & _ " , error_file_name = [error_file] " & _ " , iterator_name = [it_name] " ' " , log_file_name = [log_file] " & _ ' Append the Where clause strUpdate = strUpdate & " where step_id = [s_id] " & _ " and version_no = [ver_no]" Set qy = mdbsDatabase.CreateQueryDef(gstrEmptyString, strUpdate) ' Call a procedure to execute the Querydef object Call AssignParameters(qy) qy.Execute dbFailOnError If qy.RecordsAffected = 0 Then On Error GoTo 0 Err.Raise vbObjectError + errModifyStepFailed, _ mstrSource, LoadResString(errModifyStepFailed) End If qy.Close #Else strUpdate = "update att_steps " & _ " set step_label = " ' For fields that may be null, call a function to determine ' the string to be appended to the update statement </pre>
--	---	---

```

strUpdate = strUpdate &
mFieldValue.MakeStringFieldValid(mstrStepLabel)

strUpdate = strUpdate & " ,
step_file_name = " &
mFieldValue.MakeStringFieldValid(mstrStepTextFile)
strUpdate = strUpdate & " , step_text = "
&
mFieldValue.MakeStringFieldValid(mstrStepText)
strUpdate = strUpdate & " ,
start_directory = " &
mFieldValue.MakeStringFieldValid(mstrStartDir)

strUpdate = strUpdate & " , workspace_id
= " & Str(mlngWorkspaceId) & _
" , parent_step_id = " &
Str(mlngParentStepId) & _
" , parent_version_no = " &
mFieldValue.MakeStringFieldValid(mstrParentVersionNo) & _
" , sequence_no = " &
Str(mintSequenceNo) & _
" , step_level = " & Str(mintStepLevel)
& _
" , enabled_flag = " &
Str(mblnEnabledFlag) & _
" , degree_parallelism = " &
mFieldValue.MakeStringFieldValid(mstrDegreeParallelism) & _
" , execution_mechanism = " &
Str(mintExecutionMechanism) & _
" , failure_details = " &
mFieldValue.MakeStringFieldValid(mstrFailureDetails) & _
" , continuation_criteria = " &
Str(mintContinuationCriteria) & _
" , global_flag = " &
Str(mblnGlobalFlag) & _
" , archived_flag = " &
Str(mblnArchivedFlag) & _
" , output_file_name = " &
mFieldValue.MakeStringFieldValid(mstrOutputFile) & _
" , error_file_name = " &
mFieldValue.MakeStringFieldValid(mstrErrorFile) & _
" , iterator_name = " &
mFieldValue.MakeStringFieldValid(mstrIteratorName)

' " , log_file_name = " &
mFieldValue.MakeStringFieldValid(mstrLogFile) & _

strUpdate = strUpdate & " where step_id
= " & Str(mlngStepId) & _
" and version_no = " &
mFieldValue.MakeStringFieldValid(mstrVersionNo)

BugMessage strUpdate
mdbsDatabase.Execute strUpdate,
dbFailOnError
#End If

Exit Sub

ModifyErr:
LogErrors Errors
mstrSource = mstrModuleName &
"Modify"

```

```

On Error GoTo 0
Err.Raise vbObjectError +
errModifyStepFailed, _
mstrSource,
LoadResString(errModifyStepFailed)
End Sub
Private Sub CheckDB()
' Check if the database object has been
initialized

If mdbsDatabase Is Nothing Then
ShowError errInvalidDB
On Error GoTo 0
Err.Raise vbObjectError + errInvalidDB,
-
mstrModuleName,
LoadResString(errInvalidDB)
End If

End Sub

Public Sub Delete()

Dim strDelete As String
Dim qy As DAO.QueryDef

On Error GoTo DeleteErr

Call CheckDB

strDelete = "delete from att_steps " & _
" where step_id = [s_id] " & _
" and version_no = [ver_no] "
' mdbsDatabase.Execute strDelete,
dbFailOnError

Set qy =
mdbsDatabase.CreateQueryDef(gstrEmptyString, strDelete)

Call AssignParameters(qy)
qy.Execute dbFailOnError

qy.Close

Exit Sub

DeleteErr:
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteStepFailed, _
mstrModuleName & "Delete",
LoadResString(errDeleteStepFailed)
End Sub

Public Property Get DegreeParallelism() As String

DegreeParallelism = mstrDegreeParallelism

End Property

Public Property Get Position() As Long

Position = mlngPosition

End Property

Public Property Let DegreeParallelism(ByVal vdata As String)

' The degree of parallelism must be zero for
all global steps
' This check must be made by the global step
class. Only
' generic step validations will be carried out
by this

```

```

' class
mstrDegreeParallelism = vdata

End Property

Public Property Let ExecutionMechanism(ByVal vdata As ExecutionMethod)

BugAssert vdata = gintExecuteODBC Or vdata =
gintExecuteShell Or vdata = gintNoOption, _
"Execution mechanism invalid"
mintExecutionMechanism = vdata

End Property

Public Property Let FailureDetails(ByVal vdata As String)

mstrFailureDetails = vdata

End Property

Public Property Let SequenceNo(ByVal vdata As Integer)

mintSequenceNo = vdata
End Property

Public Property Let Position(ByVal vdata As Long)

mlngPosition = vdata
End Property

Public Property Let ParentStepId(ByVal vdata As Long)

mlngParentStepId = vdata
End Property

Public Property Get SequenceNo() As Integer

SequenceNo = mintSequenceNo

End Property

Public Property Get StepLevel() As Integer

StepLevel = mintStepLevel
End Property

Public Property Get ParentVersionNo() As String

ParentVersionNo = mstrParentVersionNo
End Property

Public Property Let ParentVersionNo(ByVal vdata As String)

mstrParentVersionNo = vdata
End Property

Public Property Get ParentStepId() As Long

ParentStepId = mlngParentStepId
End Property

Public Property Let WorkspaceId(ByVal vdata As Long)

mlngWorkspaceId = vdata
End Property

Public Property Let VersionNo(ByVal vdata As String)

' The version number of a step is stored in the x.y
format where
' x represents a change to the step as a result of
modifications
' to any of the step properties
' y represents a change to the step as a result of
modifications
' to the sub-steps associated with it. Hence the y-
component

```



```

' of the version will be incremented when
a sub-step is added,
' modified or deleted
' x will be referred to throughout this code
as the parent
' component of the version and y will be
referred to as the
' child component of the version
' The version information for a step is
maintained by the
' calling function

mstrVersionNo = vdata

End Property

Public Property Get StepType() As
gintStepType

    On Error GoTo StepTypeError

    If mintStepType = 0 Then
        ' The step type variable has not been
        initialized -
        If mblnGlobalFlag Then
            mintStepType = gintGlobalStep
        ElseIf IsStringEmpty(mstrStepText)
            And _
                IsStringEmpty(mstrStepTextFile)
        Then
            mintStepType = gintManagerStep
        Else
            mintStepType = gintWorkerStep
        End If
    End If

    StepType = mintStepType

Exit Property

StepTypeError:
    LogErrors Errors
    mstrSource = mstrModuleName &
"StepType"
    On Error GoTo 0
    Err.Raise vbObjectError +
errLetStepTypeFailed, _
        mstrSource, _
        LoadResString(errGetStepTypeFailed)

End Property

Public Property Let StepType(vdata As
gintStepType)

    On Error GoTo StepTypeError

    Select Case vdata
        Case gintGlobalStep, gintManagerStep,
gintWorkerStep
            mintStepType = vdata

        Case Else
            On Error GoTo 0
            Err.Raise vbObjectError +
errStepTypeInvalid, _
                mstrModuleName &
"StepType",
                LoadResString(errStepTypeInvalid)
            Exit Select
    End Select

Exit Property

StepTypeError:
    LogErrors Errors

```

```

mstrSource = mstrModuleName &
"StepType"
    On Error GoTo 0
    Err.Raise vbObjectError +
errLetStepTypeFailed, _
        mstrSource, _
        LoadResString(errLetStepTypeFailed)

End Property

Public Property Get WorkspaceId() As Long
    WorkspaceId = mlngWorkspaceId
End Property

Public Property Get ContinuationCriteria() As
ContinuationCriteria

    ContinuationCriteria =
mintContinuationCriteria

End Property

Public Property Let
ContinuationCriteria(ByVal vdata As
ContinuationCriteria)

    ' The Continuation criteria must be null for
all global steps
    ' and non-null for all manager and worker
steps
    ' These checks will have to be made by the
corresponding
    ' classes - only generic step validations will
be made
    ' by this class
    BugAssert vdata =
gintOnFailureAbortSiblings Or vdata =
gintOnFailureCompleteSiblings _
        Or vdata =
gintOnFailureSkipSiblings Or vdata =
gintOnFailureAbort _
        Or vdata = gintOnFailureContinue
Or vdata = gintOnFailureAsk _
        Or vdata = gintNoOption, _
        "Invalid continuation criteria"
    mintContinuationCriteria = vdata

End Property

Public Property Get ExecutionMechanism() As
ExecutionMethod

    ExecutionMechanism =
mintExecutionMechanism

End Property

Public Property Get FailureDetails() As String

    FailureDetails = mstrFailureDetails

End Property

Public Property Let StepText(ByVal vdata As
String)
    ' Has to be null for manager steps
    ' The check will have to be made by the user
interface or
    ' by the manager step class
    mstrStepText = vdata
End Property

Public Property Let StepLevel(ByVal vdata As
Integer)

```

```

' The step level must be zero for all global steps
' This check must be made in the global step class
mintStepLevel = vdata

End Property

Public Property Get StepText() As String
    StepText = mstrStepText
End Property

Public Property Let StepTextFile(ByVal vdata As
String)
    ' Has to be null for manager steps
    ' The check will have to be made by the user
interface and
    ' by the manager step class
    mstrStepTextFile = vdata
End Property

Public Property Get StepTextFile() As String
    StepTextFile = mstrStepTextFile
End Property

Public Property Let StepLabel(ByVal vdata As
String)
    ' Cannot be null for manager steps
    ' But this check cannot be made here since we do
not know
    ' at this point if the step being created is a
manager
    ' or a worker step
    ' The check will have to be made by the user
interface and
    ' by the manager step class
    mstrStepLabel = vdata
End Property

Public Property Get StepLabel() As String
    StepLabel = mstrStepLabel
End Property

Public Property Let StartDir(ByVal vdata As
String)
    mstrStartDir = vdata
End Property

Public Property Get StartDir() As String
    StartDir = mstrStartDir
End Property

Public Property Get VersionNo() As String
    ' The version number of a step is stored in the x.y
format where
    ' x represents a change to the step as a result of
modifications
    ' to any of the step properties
    ' y represents a change to the step as a result of
modifications
    ' to the sub-steps associated with it. Hence the y-
component
    ' of the version will be incremented when a sub-
step is added,
    ' modified or deleted
    ' x will be referred to throughout this code as the
parent
    ' component of the version and y will be referred
to as the
    ' child component of the version
    ' The version information for a step is maintained
by the
    ' calling function

    VersionNo = mstrVersionNo

End Property

```

<pre> Public Property Get StepId() As Long StepId = mlngStepId End Property Public Property Get NextStepId() As Long Dim lngNextId As Long On Error GoTo NextStepIdErr ' First check if the database object is valid Call CheckDB ' Retrieve the next identifier using the sequence class Set mStepSeq = New cSequence Set mStepSeq.IdDatabase = mdbsDatabase mStepSeq.IdentifierColumn = "step_id" lngNextId = mStepSeq.Identifier Set mStepSeq = Nothing NextStepId = lngNextId Exit Property NextStepIdErr: LogErrors Errors mstrSource = mstrModuleName & "NextStepId" On Error GoTo 0 Err.Raise vbObjectError + errStepIdGetFailed, _ mstrSource, LoadResString(errStepIdGetFailed) End Property Public Property Let StepId(ByVal vdata As Long) mlngStepId = vdata End Property Private Sub Class_Initialize() ' Initialize the operation indicator variable to Query ' It will be modified later by the collection class when ' inserts, updates or deletes are performed mintOperation = QueryOp mbIsNewVersion = False msOldVersion = gstrEmptyString Set mFieldValue = New cStringSM Set mclIterators = New cNodeCollections End Sub Private Sub Class_Terminate() Set mFieldValue = Nothing Set mclIterators = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStepTree" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True </pre>	<pre> Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cStepTree.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: Implements step navigation functions such as determining ' the child of a step and so on. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private Const mstrModuleName As String = "cStepTree." Private mstrSource As String Public StepRecords As cArrSteps Public Property Get HasChild(Optional ByVal StepKey As String, _ Optional ByVal StepId As Long = 0) As Boolean Dim lTemp As Long HasChild = False StepId = GetStepId(StepKey, StepId) For lTemp = 0 To StepRecords.StepCount - 1 If StepRecords(lTemp).StepType <> gintGlobalStep And StepRecords(lTemp).ParentStepId = StepId Then HasChild = True Exit For End If Next lTemp End Property Public Property Get ChildStep(Optional ByVal StepKey As String, _ Optional ByVal StepId As Long = 0) As cStep Dim lTemp As Long Set ChildStep = Nothing StepId = GetStepId(StepKey, StepId) For lTemp = 0 To StepRecords.StepCount - 1 If StepRecords(lTemp).StepType <> gintGlobalStep And StepRecords(lTemp).ParentStepId = StepId And _ StepRecords(lTemp).SequenceNo = gintMinSequenceNo Then Set ChildStep = StepRecords(lTemp) Exit For End If Next lTemp End Property Public Property Get NextStep(Optional ByVal StepKey As String, _ Optional ByVal StepId As Long = 0) As cStep </pre>	<pre> Dim lTemp As Long Dim cChildStep As cStep Set NextStep = Nothing StepId = GetStepId(StepKey, StepId) Set cChildStep = StepRecords.QueryStep(StepId) For lTemp = 0 To StepRecords.StepCount - 1 If StepRecords(lTemp).StepType <> gintGlobalStep And _ StepRecords(lTemp).ParentStepId = cChildStep.ParentStepId And _ StepRecords(lTemp).SequenceNo = cChildStep.SequenceNo + 1 Then Set NextStep = StepRecords(lTemp) Exit For End If Next lTemp End Property Private Function GetStepId(Optional ByVal StepKey As String, _ Optional ByVal StepId As Long = 0) As Long If StepId = 0 Then If StringEmpty(StepKey) Then Err.Raise vbObjectError + errMandatoryParameterMissing, _ mstrModuleName & "GetStepId", LoadResString(errMandatoryParameterMissing) Else GetStepId = IIf(IsLabel(StepKey), 0, MakeIdentifierValid(StepKey)) End If Else GetStepId = StepId End If End Function VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cStringSM" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cStringSM.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' ' PURPOSE: This module contains common procedures that can be used ' to manipulate strings ' It is called StringSM, since String is a Visual Basic keyword ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cStringSM." Private mstrText As String Private Const mstrNullValue = "null" Private Const mstrSQ = "" Private Const mstrEnvVarSeparator = "%" Public Function InsertEnvVariables(_ </pre>
--	---	---

```

Optional ByVal strComString As String) As String
' This function replaces all environment variables in
' the passed in string with their values - they are
' enclosed by "%"

Dim intPos As Integer
Dim intEndPos As Integer
Dim strEnvVariable As String
Dim strValue As String
Dim strCommand As String

On Error GoTo InsertEnvVariablesErr
mstrSource = mstrModuleName & "InsertEnvVariables"

' Initialize the return value of the function to the
' passed in command
If IsStringEmpty(strComString) Then
    strCommand = mstrText
Else
    strCommand = strComString
End If

intPos = InStr(strCommand, mstrEnvVarSeparator)
Do While intPos <> 0
    ' Extract the environment variable from the passed
    ' in string
    intEndPos = InStr(intPos + 1, strCommand, mstrEnvVarSeparator)
    strEnvVariable = Mid(strCommand, intPos + 1, intEndPos - intPos - 1)

    ' Get the value of the variable and call a function
    ' to replace the variable with it's value
    strValue = Environ$(strEnvVariable)
    strCommand = ReplaceSubString(strCommand, _
        mstrEnvVarSeparator & strEnvVariable & mstrEnvVarSeparator, _
        strValue)

    intPos = InStr(strCommand, mstrEnvVarSeparator)
Loop

InsertEnvVariables = strCommand
Exit Function

InsertEnvVariablesErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
' Return an empty string
InsertEnvVariables = gstrEmptyString

End Function
Public Function MakeStringFieldValid( _
    Optional strField As String = gstrEmptyString) As String
' Returns a string that can be appended to any insert
' or modify (sql) statement
' If an argument is not passed to this function, the
' default text property is used

Dim strTemp As String

```

```

On Error GoTo MakeStringFieldValidErr

If IsStringEmpty(strField) Then
    strTemp = mstrText
Else
    strTemp = strField
End If

' It checks whether the text is empty
' If so, it returns the string, "null"
If IsStringEmpty(strTemp) Then
    MakeStringFieldValid = mstrNullValue
Else
    ' Single-quotes have to be replaced by two single-quotes,
    ' since a single-quote is the identifier delimiter
    ' character - call a procedure to do the replace
    strTemp = ReplaceSubString(strTemp, mstrSQ, mstrSQ & mstrSQ)

    ' Replace pipe characters with the corresponding chr function
    strTemp = ReplaceSubString(strTemp, "|", "" & Chr(124) & "")

    ' Enclose the string in single quotes
    MakeStringFieldValid = mstrSQ & strTemp & mstrSQ

End If

Exit Function

MakeStringFieldValidErr:
mstrSource = mstrModuleName & "MakeStringFieldValid"
LogErrors Errors
On Error GoTo 0
Err.Raise vbObjectError + errMakeFieldValidFailed, _
    mstrSource, LoadResString(errMakeFieldValidFailed)

End Function
Public Function MakeDateFieldValid( _
    Optional dtmField As Date = gdtmEmpty) As String
' Returns a string that can be appended to any insert
' or modify (sql) statement

' Enclose the date in single quotes
MakeDateFieldValid = mstrSQ & dtmField & mstrSQ

End Function

Private Function IsStringEmpty(strToCheck As String) As Boolean

If strToCheck = gstrEmptyString Then
    IsStringEmpty = True
Else
    IsStringEmpty = False
End If

End Function
Public Function ReplaceSubString(ByVal MainString As String, _
    ByVal ReplaceString As String, _
    ByVal ReplaceWith As String) As String

```

```

' Replaces all occurrences of ReplaceString in MainString with ReplaceWith

Dim intPos As Integer
Dim strTemp As String

On Error GoTo ReplaceSubStringErr

strTemp = MainString

intPos = InStr(strTemp, ReplaceString)
Do While intPos <> 0
    strTemp = Left(strTemp, intPos - 1) & ReplaceWith & _
        Mid(strTemp, intPos + Len(ReplaceString))
    intPos = InStr(intPos + Len(ReplaceString) + 1, strTemp, ReplaceString)
Loop
ReplaceSubString = strTemp

Exit Function

ReplaceSubStringErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName & "ReplaceSubString"
On Error GoTo 0
Err.Raise vbObjectError + errParseStringFailed, _
    mstrSource, _
    LoadResString(errParseStringFailed)

End Function

Public Property Get Text() As String
Attribute Text.VB_UserMemId = 0
Text = mstrText
End Property

Public Property Let Text(ByVal vdata As String)
mstrText = vdata
End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cSubStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cSubStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates the properties of sub-steps
' that are used during the execution of a workspace.
' Contact: Reshma Tharamal (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private Const mstrModuleName As String = "cSubStep"

Private mlngStepId As Long

```

```

Private mintRunning As Integer ' Number of
running tasks
Private mintComplete As Integer ' Number
of completed tasks
' The last iterator for this sub-step
Private mcLastIterator As cRunItDetails

Public Function NewIteration(cStepRec As
cStep) As cIterator
' Calls a procedure to determine the next
iterator value
' for the passed in step - returns the value
to be used
' in the iteration.
' It updates the instance node with the new
iteration
' for the step.

Dim cItRec As cIterator

On Error GoTo NewIterationErr

' Call a function that will populate an
iterator record
' with the iterator values
Set cItRec = NextIteration(cStepRec)

' Initialize the run node with the new
iterator
' values
If Not mcLastIterator Is Nothing Then
If cItRec Is Nothing Then
mcLastIterator.Value =
gstrEmptyString
Else
mcLastIterator.Value = cItRec.Value

' And if the iterator is a list of values,
then update
' the sequence number as well
If mcLastIterator.IteratorType =
gintValue Then
mcLastIterator.Sequence =
cItRec.SequenceNo
End If
End If
End If

Set NewIteration = cItRec
Set cItRec = Nothing

Exit Function

NewIterationErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
LoadResString(errIterateFailed)

End Function
Public Function NextIteration(cStepRec As
cStep) As cIterator

' Retrieves the next iterator value for the
passed in step -
' returns an iterator record with the new
iterator values

Dim cItRec As cIterator
Dim vntIterators As Variant
Dim lngValue As String

```

```

On Error GoTo NextIterationErr

vntIterators = cStepRec.Iterators

If Not mcLastIterator Is Nothing Then
' The run node contains the iterator details
' Get the next value for the iterator
If mcLastIterator.IteratorType = gintValue
Then
' Find the next iterator that appears in
the list of
' iterator values
Set cItRec =
NextInSequence(vntIterators,
mcLastIterator.Sequence)
Else
lngValue =
CLng(Trim$(mcLastIterator.Value))
' Determine whether the new iterator
value falls in the
' range between From and To
If (mcLastIterator.RangeStep > 0 And _
(mcLastIterator.RangeFrom <=
mcLastIterator.RangeTo) And _
(mcLastIterator.RangeStep +
lngValue) <= mcLastIterator.RangeTo) Or _
(mcLastIterator.RangeStep < 0
And _
(mcLastIterator.RangeFrom >=
mcLastIterator.RangeTo) And _
(mcLastIterator.RangeStep +
lngValue) >= mcLastIterator.RangeTo) Then
Set cItRec = New cIterator
cItRec.Value =
Trim$(CStr(mcLastIterator.RangeStep +
lngValue))
Else
Set cItRec = Nothing
End If
End If
Else
Set cItRec = Nothing
End If

Set NextIteration = cItRec
Exit Function

NextIterationErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
LoadResString(errIterateFailed)

End Function
Public Sub InitializeIt(cPendingStep As cStep,
_
ColParameters As cArrParameters, _
Optional vntIterators As Variant)

' Initializes the LastIteration structure with
the iterator details for the
' passed in step

On Error GoTo InitializeItErr

If IsMissing(vntIterators) Then
vntIterators = cPendingStep.Iterators
End If

If IsArray(vntIterators) And Not
IsEmpty(vntIterators) Then
mcLastIterator.IteratorName =
cPendingStep.IteratorName

```

```

If
vntIterators(LBound(vntIterators)).IteratorType = _
gintValue Then
mcLastIterator.IteratorType = gintValue
' Since the sequence numbers begin at 0
mcLastIterator.Sequence =
gintMinIteratorSequence - 1
Else
mcLastIterator.IteratorType = gintFrom
Call InitializeItRange(vntIterators,
cPendingStep.WorkspaceId, _
ColParameters)
End If
Else
Set mcLastIterator = Nothing
End If

Exit Sub

InitializeItErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errIterateFailed,
mstrModuleName, _
LoadResString(errIterateFailed)

End Sub

Private Sub InitializeItRange(vntIterators As
Variant, ByVal IWorkspace As Long, _
ColParameters As cArrParameters)

' Initializes the LastIteration structure for range
iterators from the
' passed in variant containing the iterator records

Dim lngIndex As Long
Dim cItRec As cIterator

On Error GoTo InitializeItRangeErr

If IsArray(vntIterators) And Not
IsEmpty(vntIterators) Then

' Check if the iterator range has been
completely initialized
RangeComplete (vntIterators)

' Initialize the Run node with the values for the
From,
' To and Step boundaries
For lngIndex = LBound(vntIterators) To
UBound(vntIterators)
Set cItRec = vntIterators(lngIndex)
Select Case cItRec.IteratorType
Case gintFrom
mcLastIterator.RangeFrom =
SubstituteParameters(cItRec.Value, IWorkspace,
WspParameters:=ColParameters)
Case gintTo
mcLastIterator.RangeTo =
SubstituteParameters(cItRec.Value, IWorkspace,
WspParameters:=ColParameters)
Case gintStep
mcLastIterator.RangeStep =
SubstituteParameters(cItRec.Value, IWorkspace,
WspParameters:=ColParameters)
Case Else
On Error GoTo 0
Err.Raise vbObjectError +
errTypeInvalid, mstrModuleName, _
LoadResString(errTypeInvalid)
End Select
Next lngIndex

```

<pre> mcLastIterator.Value = Trim\$(CStr(mcLastIterator.RangeFrom - mcLastIterator.RangeStep)) End If Exit Sub InitializeLastError: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Sub Private Function NextInSequence(vntIterators As Variant, _ lngOldSequence As Long) As cIterator Dim lngIndex As Long Dim cItRec As cIterator On Error GoTo NextInSequenceErr If IsArray(vntIterators) And Not IsEmpty(vntIterators) Then For lngIndex = LBound(vntIterators) To UBound(vntIterators) Set cItRec = vntIterators(lngIndex) If cItRec.IteratorType <> gintValue Then On Error GoTo 0 Err.Raise vbObjectError + errTypeInvalid, mstrModuleName, _ LoadResString(errTypeInvalid) End If If cItRec.SequenceNo = lngOldSequence + 1 Then Exit For End If Next lngIndex If cItRec.SequenceNo <> lngOldSequence + 1 Then Set cItRec = Nothing End If Else Set cItRec = Nothing End If Set NextInSequence = cItRec Exit Function NextInSequenceErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errIterateFailed, mstrModuleName, _ LoadResString(errIterateFailed) End Function Public Property Get LastIterator() As cRunItDetails Set LastIterator = mcLastIterator </pre>	<pre> End Property Public Property Set LastIterator(vdata As cRunItDetails) Set mcLastIterator = vdata End Property Public Property Get TasksRunning() As Integer TasksRunning = mintRunning End Property Public Property Let TasksRunning(ByVal vdata As Integer) mintRunning = vdata End Property Public Property Get TasksComplete() As Integer TasksComplete = mintComplete End Property Public Property Let TasksComplete(ByVal vdata As Integer) mintComplete = vdata End Property Public Property Get StepId() As Long StepId = mlngStepId End Property Public Property Let StepId(ByVal vdata As Long) mlngStepId = vdata End Property VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cSubSteps" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cSubSteps.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module provides a type- safe wrapper around cVector to ' implement a collection of cSubStep objects. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private mcSubSteps As cVector Public Sub Add(ByVal objItem As cSubStep) mcSubSteps.Add objItem </pre>	<pre> End Sub Public Sub Clear() mcSubSteps.Clear End Sub Public Function Count() As Long Count = mcSubSteps.Count End Function Public Function Delete(ByVal lngDelete As Long) As cSubStep Set Delete = mcSubSteps.Delete(lngDelete) End Function Public Property Get Item(ByVal Position As Long) As cSubStep Attribute Item.VB_UserMemId = 0 Set Item = mcSubSteps.Item(Position) End Property Private Sub Class_Initialize() Set mcSubSteps = New cVector End Sub Private Sub Class_Terminate() Set mcSubSteps = Nothing End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cTermProcess" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cTermProcess.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: This module raises an event if a completed step exists. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Private WithEvents moTimer As cTimerSM Attribute moTimer.VB_VarHelpID = -1 Private bTermProcessExists As Boolean Public Event TermProcessExists() Public Sub ProcessTerminated() </pre>
---	---	--

```

bTermProcessExists = True
moTimer.Enabled = True

End Sub

Private Sub Class_Initialize()

    bTermProcessExists = False

    Set moTimer = New cTimerSM
    moTimer.Enabled = False

End Sub

Private Sub Class_Terminate()

    Set moTimer = Nothing

End Sub

Private Sub moTimer_Timer()

    On Error GoTo moTimer_TimerErr

    If bTermProcessExists Then
        RaiseEvent TermProcessExists
    End If

    moTimer.Enabled = False
    bTermProcessExists = False

    Exit Sub

moTimer_TimerErr:
    LogErrors Errors

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTermStep"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cTermStep.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates
the properties of steps that
' have completed execution such as
status and time of completion.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Public TimeComplete As Currency
Public Index As Long
Public InstanceId As Long
Public ExecutionStatus As InstanceStatus

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTermSteps"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False

```

```

Attribute VB_Exposed = False
' FILE: cTermSteps.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module provides a type-
safe wrapper around cVector to
' implement a collection of cTermStep
objects. Raises an
' event if a step that has completed
execution exists.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Private mcTermSteps As cVector
Private WithEvents moTimer As cTimerSM
Attribute moTimer.VB_VarHelpID = -1
Public Event TermStepExists(cStepDetails As cTermStep)

Public Sub Add(ByVal citem As cTermStep)

    Call mcTermSteps.Add(citem)
    moTimer.Enabled = True

End Sub

Public Sub Clear()

    mcTermSteps.Clear

End Sub

Public Function Delete()

    Call mcTermSteps.Delete(0)
    ' Disable the timer if there are no more
pending events
    If mcTermSteps.Count = 0 Then
        moTimer.Enabled = False
    End If

End Function

Public Property Get Item(ByVal Position As Long) As cTermStep

    Set Item = mcTermSteps(Position)

End Property

Public Function Count() As Long

    Count = mcTermSteps.Count

End Function

Private Sub Class_Initialize()

    Set mcTermSteps = New cVector

    Set moTimer = New cTimerSM
    moTimer.Enabled = False

End Sub

Private Sub Class_Terminate()

    Set mcTermSteps = Nothing
    Set moTimer = Nothing

End Sub

```

```

Private Sub moTimer_Timer()

    On Error GoTo moTimer_TimerErr

    If mcTermSteps.Count > 0 Then
        ' Since items are appended to the end of the
array
        RaiseEvent TermStepExists(mcTermSteps(0))
    Else
        moTimer.Enabled = False
    End If
    Exit Sub

moTimer_TimerErr:
    LogErrors Errors

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cTimerSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cTimer.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module implements a timer.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Public Event Timer()

Private Const mnDefaultInterval As Long = 1

Private mnTimerID As Long
Private mnInterval As Long
Private mfEnabled As Boolean

Public Property Get Interval() As Long
    Interval = mnInterval
End Property
Public Property Let Interval(Value As Long)
    If mnInterval <> Value Then
        mnInterval = Value
        If mfEnabled Then
            SetInterval mnInterval, mnTimerID
        End If
    End If
End Property

Public Property Get Enabled() As Boolean
    Enabled = mfEnabled
End Property
Public Property Let Enabled(Value As Boolean)
    If mfEnabled <> Value Then
        If Value Then
            mnTimerID = StartTimer(mnInterval)
            If mnTimerID <> 0 Then
                mfEnabled = True
                ' Storing Me in the global would add a
reference to Me, which
                ' would prevent Me from being released,
which in turn would
                ' prevent my Class_Terminate code from
running. To prevent

```

```

' this, I store a "soft reference" -
the collection holds a
' pointer to me without
incrementing my reference count.
gcTimerObjects.Add ObjPtr(Me),
Str$(mnTimerID)
End If
Else
StopTimer mnTimerID
mfEnabled = False
gcTimerObjects.Remove
Str$(mnTimerID)
End If
End If
End Property

Private Sub Class_Initialize()
If gcTimerObjects Is Nothing Then Set
gcTimerObjects = New Collection
mnInterval = mnDefaultInterval
End Sub

Private Sub Class_Terminate()
Enabled = False
End Sub

Friend Sub Tick()
RaiseEvent Timer
End Sub
VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cVBErrorsSM"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
Attribute VB_Ext_KEY =
"SavedWithClassBuilder", "Yes"
Attribute VB_Ext_KEY = "Top_Level"
, "Yes"
' FILE: cVBErrors.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module encapsulates
the handling of Visual Basic errors.
' This module does not do any error
handling - any error handler
will erase the errors object!
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' The Execute class exposes a method,
WriteError through which we can write to
the
' error log that is currently being used by the
Execute object. Store a reference to
' Execute object locally.
Private mcExecObjRef As
EXECUTEDLLLib.Execute
Public Sub WriteError(ByVal ErrorCode As
errErrorConstants, _
Optional ByVal ErrorSource As String
= gstrEmptyString, _
Optional ByVal OptArgs As String =
gstrEmptyString)

Dim sError As String

```

```

sError = "StepMaster Error:" & ErrorCode
& vbCrLf & LoadResString(ErrorCode) &
vbCrLf

If Not StringEmpty(ErrorSource) Then
sError = sError & "(Source: " &
ErrorSource & ")" & vbCrLf
End If
sError = sError & OptArgs

Call LogMessage(sError)

End Sub
Private Function InitErrorString() As String
' Initializes a string with all the properties of
the
' Err object

Dim strError As String
Dim errCode As Long

If Err.Number = 0 Then
InitErrorString = gstrEmptyString
Else
With Err
If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536) Then
errCode = .Number - vbObjectError
Else
errCode = .Number
End If
strError = "Error #: " & errCode &
vbCrLf
strError = strError & "Description: " &
.Description & vbCrLf
strError = strError & "Source: " &
Err.Source & vbCrLf
End With

Debug.Print strError
InitErrorString = strError
End If

End Function
Public Sub LogVBErrors()

Dim strErr As String

strErr = InitErrorString

On Error GoTo LogVBErrorsErr

If Not StringEmpty(strErr) Then
' Write an error using the WriteError
method of the Execute object.
If Not mcExecObjRef Is Nothing Then
mcExecObjRef.WriteError strErr
Else
WriteMessage strErr
End If
End If

Err.Clear

Exit Sub

LogVBErrorsErr:
Call LogErrors(Errors)
' Since write to the error file for the step has
failed, write to the project log
Call WriteMessage(strErr)

End Sub
Public Sub DisplayErrors()

```

```

Dim strErr As String

strErr = InitErrorString

If Not StringEmpty(strErr) Then
' Display the error message
MsgBox strErr
End If

Err.Clear

End Sub
Public Sub LogMessage(strMsg As String)

On Error GoTo LogMessageErr

' Write an error using the WriteError method of
the Execute object.
If Not mcExecObjRef Is Nothing Then
mcExecObjRef.WriteError strMsg
Else
WriteMessage strMsg
End If

Exit Sub

LogMessageErr:
Call LogErrors(Errors)
' Since write to the error file for the step has
failed, write to the project log
Call WriteMessage(strMsg)

End Sub
Public Property Set ErrorFile(vdata As
EXECUTEDLLLib.Execute)

Set mcExecObjRef = vdata

End Property
Private Sub Class_Terminate()

Set mcExecObjRef = Nothing

End Sub
VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cVector"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cVector.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class implements an array of
objects.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVector."

' Array counter
Private mlngCount As Long

```

```

Private mcarrItems() As Object

Public Sub Add(ByVal objItem As Object)
    ' Adds the passed in Object variable to the array

    On Error GoTo AddErr

    ReDim Preserve mcarrItems(mlngCount)

    ' Set the newly added element in the array to the
    ' passed in variable
    Set mcarrItems(mlngCount) = objItem
    mlngCount = mlngCount + 1

    Exit Sub

AddErr:
    LogErrors Errors
    gstrSource = mstrModuleName & "Add"
    On Error GoTo 0
    Err.Raise vbObjectError +
errLoadInArrayFailed, _
        mstrSource, _

LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

    ' Clear the array
    ReDim mcarrItems(0)
    mlngCount = 0

End Sub

Public Function Delete(ByVal lngDelete As Long) As Object

    Dim lngIndex As Long

    On Error GoTo DeleteErr

    If lngDelete < (mlngCount - 1) Then

        ' We want to maintain the order of all items in the
        ' array - so move all remaining elements in the array
        ' up by 1
        For lngIndex = lngDelete To mlngCount - 2
            MoveDown lngIndex
        Next lngIndex

    End If

    ' Return the deleted node
    Set Delete = mcarrItems(mlngCount - 1)

    ' Delete the last Node from the array
    mlngCount = mlngCount - 1
    If mlngCount > 0 Then
        ReDim Preserve mcarrItems(0 To mlngCount - 1)
    Else
        ReDim mcarrItems(0)
    End If

    Exit Function

DeleteErr:
    LogErrors Errors

```

```

        mstrSource = mstrModuleName & "Delete"
        On Error GoTo 0
        Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
            mstrSource, _

LoadResString(errDeleteArrayElementFailed)

End Function
Public Property Get Item(ByVal Position As Long) As Object
    Attribute Item.VB_UserMemId = 0

    ' Returns the element at the passed in position in the array
    If Position >= 0 And Position < mlngCount Then
        Set Item = mcarrItems(Position)
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Property Set Item(ByVal Position As Long, _
    ByVal Value As Object)

    ' Returns the element at the passed in position in the array
    If Position >= 0 Then
        ' If the passed in position is outside the array
        ' bounds, then resize the array
        If Position >= mlngCount Then
            ReDim Preserve mcarrItems(Position)
            mlngCount = Position + 1
        End If

        ' Set the newly added element in the array to the
        ' passed in variable
        Set mcarrItems(Position) = Value
    Else
        On Error GoTo 0
        Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
            LoadResString(errItemDoesNotExist)
    End If

End Property
Public Sub MoveUp(ByVal Position As Long)
    ' Moves the element at the passed in position up by 1

    Dim cTemp As Object

    If Position > 0 And Position < mlngCount Then
        Set cTemp = mcarrItems(Position)

        Set mcarrItems(Position) =
mcarrItems(Position - 1)
        Set mcarrItems(Position - 1) = cTemp
    End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
    ' Moves the element at the passed in position down by 1

    Dim cTemp As Object

```

```

    If Position >= 0 And Position < mlngCount - 1
    Then
        Set cTemp = mcarrItems(Position)

        Set mcarrItems(Position) =
mcarrItems(Position + 1)
        Set mcarrItems(Position + 1) = cTemp
    End If

End Sub

Public Function Count() As Long

    Count = mlngCount

End Function

Private Sub Class_Initialize()

    mlngCount = 0

End Sub

Private Sub Class_Terminate()

    Call Clear

End Sub

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cVectorLng"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:      cVectorLng.cls
'           Microsoft TPC-H Kit Ver. 1.00
'           Copyright Microsoft, 1999
'           All Rights Reserved
'
' PURPOSE:   This class implements an array of longs.
' Contact:   Reshma Tharamal
'            (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVectorLng."

' Array counter
Private mlngCount As Long
Private mcarrItems() As Long

Public Sub Add(ByVal lngItem As Long)
    ' Adds the passed in long variable to the array

    On Error GoTo AddErr

    ReDim Preserve mcarrItems(mlngCount)

    ' Set the newly added element in the array to the
    ' passed in variable
    mcarrItems(mlngCount) = lngItem

```



```

mInGCount = mInGCount + 1

Exit Sub

AddErr:
LogErrors Errors
gstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadInArrayFailed, _
mstrSource, _

LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

' Clear the array
ReDim mcarrItems(0)

End Sub

Public Sub Delete(Optional ByVal Position
As Long = -1, _
Optional ByVal Item As Long = -1)
' The user can opt to delete either a
specific item in
' the list or the item at a specified position.
If no
' parameters are passed in, we delete the
element at
' position 0!

Dim lngDelete As Long
Dim lngIndex As Long

On Error GoTo DeleteErr

If Position = -1 Then
' Since we can never store an element at
position -1,
' we can be sure that the user is trying
to delete
' a given item
lngDelete = Find(Item)
Else
lngDelete = Position
End If

If lngDelete < (mInGCount - 1) Then

' We want to maintain the order of all
items in the
' array - so move all remaining
elements in the array
' up by 1
For lngIndex = lngDelete To
mInGCount - 2
MoveDown lngIndex
Next lngIndex

End If

' Delete the last Node from the array
mInGCount = mInGCount - 1
If mInGCount > 0 Then
ReDim Preserve mcarrItems(0 To
mInGCount - 1)
Else
ReDim mcarrItems(0)
End If

Exit Sub

DeleteErr:

```

```

LogErrors Errors
mstrSource = mstrModuleName & "Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
mstrSource, _

LoadResString(errDeleteArrayElementFailed)

End Sub
Public Function Find(ByVal Item As Long) As
Long

' Returns the position at which the passed in
value occurs
' in the array

Dim lngIndex As Long

On Error GoTo FindErr

' Find the element in the array to be deleted
For lngIndex = 0 To mInGCount - 1

If mcarrItems(lngIndex) = Item Then
Find = lngIndex
Exit Function
End If

Next lngIndex

Find = -1

Exit Function

FindErr:
LogErrors Errors
mstrSource = mstrModuleName & "Find"
On Error GoTo 0
Err.Raise vbObjectError +
errItemNotFound, mstrSource, _
LoadResString(errItemNotFound)

End Function
Public Property Get Item(ByVal Position As
Long) As Long
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in
position in the array
If Position >= 0 And Position < mInGCount
Then
Item = mcarrItems(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Let Item(ByVal Position As
Long, _
ByVal Value As Long)

' Returns the element at the passed in
position in the array
If Position >= 0 Then
' If the passed in position is outside the
array
' bounds, then resize the array
If Position >= mInGCount Then
ReDim Preserve mcarrItems(Position)
mInGCount = Position + 1
End If

```

```

' Set the newly added element in the array to
the
' passed in variable
mcarrItems(Position) = Value
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Sub MoveUp(ByVal Position As Long)
' Moves the element at the passed in position up
by 1

Dim lngTemp As Long

If Position > 0 And Position < mInGCount Then
lngTemp = mcarrItems(Position)

mcarrItems(Position) = mcarrItems(Position -
1)
mcarrItems(Position - 1) = lngTemp
End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
' Moves the element at the passed in position
down by 1

Dim lngTemp As Long

If Position >= 0 And Position < mInGCount - 1
Then
lngTemp = mcarrItems(Position)

mcarrItems(Position) = mcarrItems(Position +
1)
mcarrItems(Position + 1) = lngTemp
End If

End Sub

Public Function Count() As Long

Count = mInGCount

End Function

Private Sub Class_Initialize()

mInGCount = 0

End Sub

Private Sub Class_Terminate()

Call Clear

End Sub

VERSION 1.0 CLASS
BEGIN
MultiUse = -1 'True
END
Attribute VB_Name = "cVectorStr"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cVectorStr.cls

```

```

' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This class implements an
' array of strings.
' Contact: Reshma Tharamal
' (reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name
' when errors
' are raised by this class
Private mstrSource As String
Private Const mstrModuleName As String =
"cVectorStr."

' Array counter
Private mlngCount As Long
Private mcarrItems() As String

Public Sub Add(ByVal strItem As String)
' Add the passed in string variable to the
array

On Error GoTo AddErr

ReDim Preserve mcarrItems(mlngCount)

' Set the newly added element in the array
to the
' passed in variable
mcarrItems(mlngCount) = strItem
mlngCount = mlngCount + 1

Exit Sub

AddErr:
Call LogErrors(Errors)
gstrSource = mstrModuleName & "Add"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadInArrayFailed, _
mstrSource, _

LoadResString(errLoadInArrayFailed)

End Sub
Public Sub Clear()

' Clear the array
ReDim mcarrItems(0)

End Sub

Public Sub Delete(Optional ByVal Position
As Long = -1, _
Optional ByVal Item As String = -1)
' The user can opt to delete either a
specific item in
' the list or the item at a specified position.
If no
' parameters are passed in, we delete the
element at
' position 0!

Dim lngDelete As Long
Dim lngIndex As Long

On Error GoTo DeleteErr
mstrSource = mstrModuleName &
"Delete"

```

```

If Position = -1 Then
' Since we can never store an element at
position -1,
' we can be sure that the user is trying to
delete
' a given item
lngDelete = Find(Item)
Else
lngDelete = Position
End If

If lngDelete < (mlngCount - 1) Then

' We want to maintain the order of all
items in the
' array - so move all remaining elements in
the array
' up by 1
For lngIndex = lngDelete To mlngCount -
2
MoveDown lngIndex
Next lngIndex

End If

' Delete the last Node from the array
mlngCount = mlngCount - 1
If mlngCount > 0 Then
ReDim Preserve mcarrItems(0 To
mlngCount - 1)
Else
ReDim mcarrItems(0)
End If

Exit Sub

DeleteErr:
Call LogErrors(Errors)
mstrSource = mstrModuleName & "Delete"
On Error GoTo 0
Err.Raise vbObjectError +
errDeleteArrayElementFailed, _
mstrSource, _

LoadResString(errDeleteArrayElementFailed)

End Sub
Public Function Find(ByVal Item As String)
As Long

' Returns the position at which the passed in
value occurs
' in the array

Dim lngIndex As Long

On Error GoTo FindErr
mstrSource = mstrModuleName & "Find"

' Find the element in the array to be deleted
For lngIndex = 0 To mlngCount - 1

If mcarrItems(lngIndex) = Item Then
Find = lngIndex
Exit Function
End If

Next lngIndex

Find = -1

Exit Function

FindErr:
Call LogErrors(Errors)

```

```

mstrSource = mstrModuleName & "Find"
On Error GoTo 0
Err.Raise vbObjectError + errItemNotFound,
mstrSource, _
LoadResString(errItemNotFound)

End Function
Public Property Get Item(ByVal Position As Long)
As String
Attribute Item.VB_UserMemId = 0

' Returns the element at the passed in position in
the array
If Position >= 0 And Position < mlngCount Then
Item = mcarrItems(Position)
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Property Let Item(ByVal Position As Long,
_
ByVal Value As String)

' Returns the element at the passed in position in
the array
If Position >= 0 Then
' If the passed in position is outside the array
' bounds, then resize the array
If Position >= mlngCount Then
ReDim Preserve mcarrItems(Position)
mlngCount = Position + 1
End If

' Set the newly added element in the array to
the
' passed in variable
mcarrItems(Position) = Value
Else
On Error GoTo 0
Err.Raise vbObjectError +
errItemDoesNotExist, mstrSource, _
LoadResString(errItemDoesNotExist)
End If

End Property
Public Sub MoveUp(ByVal Position As Long)
' Moves the element at the passed in position up
by 1

Dim strTemp As String

If Position > 0 And Position < mlngCount Then
strTemp = mcarrItems(Position)

mcarrItems(Position) = mcarrItems(Position -
1)
mcarrItems(Position - 1) = strTemp
End If

End Sub
Public Sub MoveDown(ByVal Position As Long)
' Moves the element at the passed in position
down by 1

Dim strTemp As String

If Position >= 0 And Position < mlngCount - 1
Then
strTemp = mcarrItems(Position)

```

<pre> mcarrItems(Position) = mcarrItems(Position + 1) mcarrItems(Position + 1) = strTemp End If End Sub Public Function Count() As Long Count = mlngCount End Function Private Sub Class_Initialize() mlngCount = 0 End Sub Private Sub Class_Terminate() Call Clear End Sub VERSION 1.0 CLASS BEGIN MultiUse = -1 'True END Attribute VB_Name = "cWorker" Attribute VB_GlobalNameSpace = False Attribute VB_Creatable = True Attribute VB_PredeclaredId = False Attribute VB_Exposed = False ' FILE: cWorker.cls ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Encapsulates the properties and methods of a worker step. ' Implements the cStep class - carries out initializations ' and validations that are specific to worker steps. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit Implements cStep ' Object variable to keep the step reference in Private mcStep As cStep ' Used to indicate the source module name when errors ' are raised by this class Private mstrSource As String Private Const mstrModuleName As String = "cWorker." Private Sub cStep_AddAllIterators() Call mcStep.AddAllIterators End Sub Private Property Let cStep_StartDir(ByVal RHS As String) mcStep.StartDir = RHS </pre>	<pre> End Property Private Property Get cStep_StartDir() As String cStep_StartDir = mcStep.StartDir End Property Private Property Set cStep_NodeDB(RHS As DAO.Database) Set mcStep.NodeDB = RHS End Property Private Property Get cStep_NodeDB() As DAO.Database Set cStep_NodeDB = mcStep.NodeDB End Property Private Function cStep_IncVersionY() As String cStep_IncVersionY = mcStep.IncVersionY End Function Private Function cStep_IsNewVersion() As Boolean cStep_IsNewVersion = mcStep.IsNewVersion End Function Private Function cStep_OldVersionNo() As String cStep_OldVersionNo = mcStep.OldVersionNo End Function Private Function cStep_IncVersionX() As String cStep_IncVersionX = mcStep.IncVersionX End Function Private Sub cStep_UpdateIteratorVersion() Call mcStep.UpdateIteratorVersion End Sub Private Function cStep_IteratorCount() As Long cStep_IteratorCount = mcStep.IteratorCount End Function Private Sub cStep_UnloadIterators() Call mcStep.UnloadIterators End Sub Private Sub cStep_SaveIterators() Call mcStep.SaveIterators End Sub Private Property Get cStep_IteratorName() As String cStep_IteratorName = mcStep.IteratorName </pre>	<pre> End Property Private Property Let cStep_IteratorName(ByVal RHS As String) mcStep.IteratorName = RHS End Property Private Sub cStep_LoadIterator(cItRecord As cIterator) Call mcStep.LoadIterator(cItRecord) End Sub Private Sub cStep_DeleteIterator(cItRecord As cIterator) Call mcStep.DeleteIterator(cItRecord) End Sub Private Sub cStep_InsertIterator(cItRecord As cIterator) Call mcStep.InsertIterator(cItRecord) End Sub Private Function cStep_Iterators() As Variant cStep_Iterators = mcStep.Iterators End Function Private Sub cStep_ModifyIterator(cItRecord As cIterator) Call mcStep.ModifyIterator(cItRecord) End Sub Private Sub cStep_RemoveIterator(cItRecord As cIterator) Call mcStep.RemoveIterator(cItRecord) End Sub Private Sub cStep_UpdateIterator(cItRecord As cIterator) Call mcStep.UpdateIterator(cItRecord) End Sub Private Sub cStep_AddIterator(cItRecord As cIterator) Call mcStep.AddIterator(cItRecord) End Sub Private Property Let cStep_Position(ByVal RHS As Long) mcStep.Position = RHS End Property Private Property Get cStep_Position() As Long cStep_Position = mcStep.Position End Property Private Function cStep_Clone(Optional cCloneStep As cStep) As cStep Dim cNewWorker As cWorker </pre>
---	---	--

```

Set cNewWorker = New cWorker
Set cStep_Clone =
mcStep.Clone(cNewWorker)

End Function

Private Sub StepTextOrFileEntered()
' Checks if either the step text or the name
of the file containing
' the text has been entered
' If both of them are null or both of them
are not null,
' the worker step is invalid and an error is
raised
If StringEmpty(mcStep.StepText) And
StringEmpty(mcStep.StepTextFile) Then
ShowError errStepTextAndFileNull
On Error GoTo 0
Err.Raise vbObjectError +
errStepTextAndFileNull, _
mstrSource,
LoadResString(errStepTextAndFileNull)
End If

End Sub

Private Property Get cStep_IndOperation()
As Operation

cStep_IndOperation =
mcStep.IndOperation

End Property

Private Property Let
cStep_IndOperation(ByVal RHS As
Operation)

mcStep.IndOperation = RHS

End Property

Private Property Get cStep_NextStepId() As
Long

cStep_NextStepId = mcStep.NextStepId

End Property

Private Property Let
cStep_OutputFile(ByVal RHS As String)

mcStep.OutputFile = RHS

End Property

Private Property Get cStep_OutputFile() As
String

cStep_OutputFile = mcStep.OutputFile

End Property

Private Property Let cStep_ErrorFile(ByVal
RHS As String)

mcStep.ErrorFile = RHS

End Property

Private Property Get cStep_ErrorFile() As
String

cStep_ErrorFile = mcStep.ErrorFile

```

```

End Property

Private Property Let cStep_LogFile(ByVal
RHS As String)

' mcStep.LogFile = RHS

End Property

Private Property Get cStep_LogFile() As
String

' cStep_LogFile = mcStep.LogFile

End Property

Private Property Let
cStep_ArchivedFlag(ByVal RHS As Boolean)

mcStep.ArchivedFlag = RHS

End Property

Private Property Get cStep_ArchivedFlag() As
Boolean

cStep_ArchivedFlag = mcStep.ArchivedFlag

End Property

Private Sub Class_Initialize()

' Create the object
Set mcStep = New cStep

' Initialize the object with valid values for a
Worker step
' The global flag should be the first field to
be initialized
' since subsequent validations might try to
check if the
' step being created is global
mcStep.GlobalFlag = False
' mcStep.GlobalRunMethod = gintNoOption
mcStep.StepType = gintWorkerStep

End Sub

Private Sub Class_Terminate()

' Remove the step object
Set mcStep = Nothing

End Sub

Private Sub cStep_Add()

' Call a private procedure to see if the step
text has been
' entered - since a worker step actually
executes a step, entry
' of the text is mandatory
Call StepTextOrFileEntered

' Call the Add method of the step class to
carry out the insert
mcStep.Add

End Sub

Private Property Get
cStep_ContinuationCriteria() As
ContinuationCriteria

cStep_ContinuationCriteria =
mcStep.ContinuationCriteria

End Property

```

```

Private Property Let
cStep_ContinuationCriteria(ByVal RHS As
ContinuationCriteria)

' The Continuation criteria must be non-null for
all worker steps.
' Check if the Continuation Criteria is valid
Select Case RHS
Case gintOnFailureAbortSiblings,
gintOnFailureCompleteSiblings, _
gintOnFailureSkipSiblings,
gintOnFailureAbort, _
gintOnFailureContinue,
gintOnFailureAsk
mcStep.ContinuationCriteria = RHS

Case Else
On Error GoTo 0
Err.Raise vbObjectError +
errContCriteriaInvalid, _
mstrModuleName,
LoadResString(errContCriteriaInvalid)
End Select

End Property

Private Property Let
cStep_DegreeParallelism(ByVal RHS As String)

mcStep.DegreeParallelism = RHS

End Property

Private Property Get cStep_DegreeParallelism() As
String

cStep_DegreeParallelism =
mcStep.DegreeParallelism

End Property

Private Sub cStep_Delete()

mcStep.Delete

End Sub

Private Property Get cStep_EnabledFlag() As
Boolean

cStep_EnabledFlag = mcStep.EnabledFlag

End Property

Private Property Let cStep_EnabledFlag(ByVal
RHS As Boolean)

mcStep.EnabledFlag = RHS

End Property

Private Property Let
cStep_ExecutionMechanism(ByVal RHS As
ExecutionMethod)

On Error GoTo ExecutionMechanismErr
mstrSource = mstrModuleName &
"cStep_ExecutionMechanism"

Select Case RHS
Case gintExecuteShell, gintExecuteODBC
mcStep.ExecutionMechanism = RHS

Case Else

```

<pre> On Error GoTo 0 Err.Raise vbObjectError + errExecutionMechanismInvalid, _ mstrSource, LoadResString(errExecutionMechanismInvalid) End Select Exit Property ExecutionMechanismErr: LogErrors Errors mstrSource = mstrModuleName & "cStep_ExecutionMechanism" On Error GoTo 0 Err.Raise vbObjectError + errExecutionMechanismLetFailed, _ mstrSource, LoadResString(errExecutionMechanismLetFailed) End Property Private Property Get cStep_ExecutionMechanism() As ExecutionMethod cStep_ExecutionMechanism = mcStep.ExecutionMechanism End Property Private Property Let cStep_FailureDetails(ByVal RHS As String) mcStep.FailureDetails = RHS End Property Private Property Get cStep_FailureDetails() As String cStep_FailureDetails = mcStep.FailureDetails End Property Private Property Get cStep_GlobalFlag() As Boolean cStep_GlobalFlag = mcStep.GlobalFlag End Property Private Property Let cStep_GlobalFlag(ByVal RHS As Boolean) ' Set the global flag to false - this flag is initialized when ' an instance of the class is created. Just making sure that ' nobody changes the value inadvertently mcStep.GlobalFlag = False End Property Private Sub cStep_Modify() ' Call a private procedure to see if the step text has been ' entered - since a worker step actually executes a step, entry ' of the text is mandatory Call StepTextOrFileEntered ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Let cStep_ParentStepId(ByVal RHS As Long) mcStep.ParentStepId = RHS End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String) mcStep.ParentVersionNo = RHS End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo End Property Private Property Let cStep_StepId(ByVal RHS As Long) mcStep.StepId = RHS End Property Private Property Get cStep_StepId() As Long cStep_StepId = mcStep.StepId End Property Private Property Let cStep_StepLabel(ByVal RHS As String) mcStep.StepLabel = RHS End Property Private Property Get cStep_StepLabel() As String cStep_StepLabel = mcStep.StepLabel </pre>	<pre> ' Call the Modify method of the step class to carry out the update mcStep.Modify End Sub Private Property Let cStep_ParentStepId(ByVal RHS As Long) mcStep.ParentStepId = RHS End Property Private Property Get cStep_ParentStepId() As Long cStep_ParentStepId = mcStep.ParentStepId End Property Private Property Let cStep_ParentVersionNo(ByVal RHS As String) mcStep.ParentVersionNo = RHS End Property Private Property Get cStep_ParentVersionNo() As String cStep_ParentVersionNo = mcStep.ParentVersionNo End Property Private Property Let cStep_SequenceNo(ByVal RHS As Integer) mcStep.SequenceNo = RHS End Property Private Property Get cStep_SequenceNo() As Integer cStep_SequenceNo = mcStep.SequenceNo End Property Private Property Let cStep_StepId(ByVal RHS As Long) mcStep.StepId = RHS End Property Private Property Get cStep_StepId() As Long cStep_StepId = mcStep.StepId End Property Private Property Let cStep_StepLabel(ByVal RHS As String) mcStep.StepLabel = RHS End Property Private Property Get cStep_StepLabel() As String cStep_StepLabel = mcStep.StepLabel </pre>	<pre> End Property Private Property Let cStep_StepLevel(ByVal RHS As Integer) mcStep.StepLevel = RHS End Property Private Property Get cStep_StepLevel() As Integer cStep_StepLevel = mcStep.StepLevel End Property Private Property Let cStep_StepText(ByVal RHS As String) mcStep.StepText = RHS End Property Private Property Get cStep_StepText() As String cStep_StepText = mcStep.StepText End Property Private Property Let cStep_StepTextFile(ByVal RHS As String) mcStep.StepTextFile = RHS End Property Private Property Get cStep_StepTextFile() As String cStep_StepTextFile = mcStep.StepTextFile End Property Private Property Let cStep_StepType(RHS As gintStepType) mcStep.StepType = gintWorkerStep End Property Private Property Get cStep_StepType() As gintStepType cStep_StepType = mcStep.StepType End Property Private Sub cStep_Validate() ' The validate routines for each of the steps will ' carry out the specific validations for the type and ' call the generic validation routine On Error GoTo cStep_ValidateErr ' Validations specific to worker steps ' Check if the step text or a file name has been ' specified Call StepTextOrFileEntered mcStep.Validate Exit Sub </pre>
--	--	---

```

cStep_ValidateErr:
    LogErrors Errors
    mstrSource = mstrModuleName &
"cStep_Validate"
    On Error GoTo 0
    Err.Raise vbObjectError +
errValidateFailed, _
        mstrSource, _
        LoadResString(errValidateFailed)
End Sub

Private Property Let
cStep_VersionNo(ByVal RHS As String)

    mcStep.VersionNo = RHS

End Property

Private Property Get cStep_VersionNo() As String

    cStep_VersionNo = mcStep.VersionNo

End Property

Private Property Let
cStep_WorkspaceId(ByVal RHS As Long)

    mcStep.WorkspaceId = RHS

End Property

Private Property Get cStep_WorkspaceId()
As Long

    cStep_WorkspaceId =
mcStep.WorkspaceId

End Property

VERSION 1.0 CLASS
BEGIN
    MultiUse = -1 'True
END
Attribute VB_Name = "cWorkspace"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE: cWorkspace.cls
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Encapsulates the properties
and methods of a workspace.
' Contains functions to insert,
update and delete
' att_workspaces records from the
database.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Local variable(s) to hold property value(s)
Private mlngWorkspaceId As Long
Private mstrWorkspaceName As String
Private mblnArchivedFlag As Boolean
Private mdbStepMaster As Database

' Used to indicate the source module name
when errors
' are raised by this class

```

```

Private mstrSource As String
Private Const mstrModuleName As String =
"cWorkspace."

' The cSequence class is used to generate
unique workspace identifiers
Private mWorkspaceSeq As cSequence

' The StringSM class is used to carry out string
operations
Private mFieldValue As cStringSM

Public Function Clone() As cWorkspace

    ' Creates a copy of a given workspace

    Dim cCloneWsp As cWorkspace

    On Error GoTo CloneErr

    Set cCloneWsp = New cWorkspace

    ' Copy all the workspace properties to the
newly
    ' created workspace
    cCloneWsp.WorkspaceId =
mlngWorkspaceId
    cCloneWsp.WorkspaceName =
mstrWorkspaceName
    cCloneWsp.ArchivedFlag =
mblnArchivedFlag

    ' And set the return value to the newly
created workspace
    Set Clone = cCloneWsp

Exit Function

CloneErr:
    LogErrors Errors
    mstrSource = mstrModuleName & "Clone"
    On Error GoTo 0
    Err.Raise vbObjectError + errCloneFailed, _
        mstrSource,
        LoadResString(errCloneFailed)

End Function

Public Property Let ArchivedFlag(ByVal vdata
As Boolean)

    mblnArchivedFlag = vdata

End Property

Public Property Get ArchivedFlag() As
Boolean

    ArchivedFlag = mblnArchivedFlag

End Property

Public Property Set WorkDatabase(vdata As
Database)

    Set mdbStepMaster = vdata

End Property

Private Sub WorkspaceNameDuplicate()
' Check if the workspace name already exists
in the workspace

    Dim rstWorkspace As Recordset
    Dim strSql As String

```

```

Dim qy As DAO.QueryDef

    On Error GoTo WorkspaceNameDuplicateErr
    mstrSource = mstrModuleName &
"WorkspaceNameDuplicate"

    ' Create a recordset to retrieve the count of
records
    ' having the same workspace name
    strSql = " Select count(*) as workspace_count "
& _
        " from att_workspaces " & _
        " where workspace_name = [w_name] " & _
        " and workspace_id <> [w_id] "
    Set qy =
mdbStepMaster.CreateQueryDef(gstrEmptyString,
strSql)

    ' Call a procedure to assign the parameter values
Call AssignParameters(qy)

    Set rstWorkspace =
qy.OpenRecordset(dbOpenForwardOnly)

    ' mFieldValue.MakeStringFieldValid
(mstrWorkspaceName) & _
    ' " and workspace_id <> " & _
    ' Str(mlngWorkspaceId)
    '
    ' Set rstWorkspace =
mdbStepMaster.OpenRecordset(_
    ' strSql, dbOpenForwardOnly)

    If rstWorkspace![workspace_count] > 0 Then
        rstWorkspace.Close
        qy.Close
        ShowError errDuplicateWorkspaceName
        On Error GoTo 0
        Err.Raise vbObjectError +
errDuplicateWorkspaceName, _
            mstrSource,
            LoadResString(errDuplicateWorkspaceName)
    End If
    rstWorkspace.Close
    qy.Close

Exit Sub

WorkspaceNameDuplicateErr:
    Call LogErrors(Errors)
    mstrSource = mstrModuleName &
"WorkspaceNameDuplicate"
    On Error GoTo 0
    Err.Raise vbObjectError +
errWorkspaceNameDuplicateFailed, _
        mstrSource,
        LoadResString(errWorkspaceNameDuplicateFailed
)

End Sub

Public Property Let WorkspaceName(vdata As
String)

    On Error GoTo WorkspaceNameErr
    mstrSource = mstrModuleName &
"WorkspaceName"

    If vdata = gstrEmptyString Then

        On Error GoTo 0
        ' Propagate this error back to the caller
        Err.Raise vbObjectError +
errWorkspaceNameMandatory, _
            mstrSource,
            LoadResString(errWorkspaceNameMandatory)

```

<pre> Else mstrWorkspaceName = vdata End If Exit Property WorkspaceNameErr: LogErrors Errors mstrSource = mstrModuleName & "WorkspaceName" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceNameSetFailed, _ mstrSource, LoadResString(errWorkspaceNameSetFaile d) End Property Public Property Let WorkspaceId(vdata As Long) On Error GoTo WorkspaceIdErr mstrSource = mstrModuleName & "WorkspaceId" If (vdata > 0) Then mlngWorkspaceId = vdata Else ' Propagate this error back to the caller On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceIdInvalid, _ mstrSource, LoadResString(errWorkspaceIdInvalid) End If Exit Property WorkspaceIdErr: LogErrors Errors mstrSource = mstrModuleName & "WorkspaceId" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceIdSetFailed, _ mstrSource, LoadResString(errWorkspaceIdSetFailed) End Property Public Sub AddWorkspace() Dim strInsert As String Dim qy As DAO.QueryDef On Error GoTo AddWorkspaceErr ' Retrieve the next identifier using the sequence class Set mWorkspaceSeq = New cSequence Set mWorkspaceSeq.IdDatabase = mdbsStepMaster mWorkspaceSeq.IdentifierColumn = FLD_ID_WORKSPACE mlngWorkspaceId = mWorkspaceSeq.Identifier Set mWorkspaceSeq = Nothing ' Call procedure to raise an error if the Workspace name ' already exists in the db Call WorkspaceNameDuplicate ' A new record will have the archived_flag turned off </pre>	<pre> mblnArchivedFlag = False ' Create a temporary querydef object strInsert = "insert into att_workspaces " & _ "(workspace_id, workspace_name, " & _ " archived_flag) " & _ " values ([w_id], [w_name], [archived]) " Set qy = mdbsStepMaster.CreateQueryDef(gstrEmptySt ring, strInsert) ' Call a procedure to assign the parameter values Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' strInsert = "insert into att_workspaces " & _ ' "(workspace_id, workspace_name, " & _ ' " archived_flag) " & _ ' " values (" & _ ' Str(mlngWorkspaceId) & _ ' ", " & _ ' mFieldValue.MakeStringFieldValid(mstrWork spaceName) & _ ' ", " & Str(mblnArchivedFlag) & _ ' ") " ' mdbsStepMaster.Execute strInsert, dbFailOnError Exit Sub AddWorkspaceErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "AddWorkspace" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceInsertFailed, _ mstrSource, LoadResString(errWorkspaceInsertFailed) End Sub Private Sub AssignParameters(qyExec As DAO.QueryDef) ' Assigns values to the parameters in the querydef object ' The parameter names are cryptic to make them different ' from the field names. When the parameter names are ' the same as the field names, parameters in the where ' clause do not get created. Dim prmParam As DAO.Parameter On Error GoTo AssignParametersErr mstrSource = mstrModuleName & "AssignParameters" For Each prmParam In qyExec.Parameters Select Case prmParam.Name Case "[w_id]" prmParam.Value = mlngWorkspaceId Case "[w_name]" prmParam.Value = mstrWorkspaceName </pre>	<pre> Case "[archived]" prmParam.Value = mblnArchivedFlag Case Else ' Write the parameter name that is faulty WriteError errInvalidParameter, mstrSource, _ prmParam.Name On Error GoTo 0 Err.Raise errInvalidParameter, mstrSource, _ LoadResString(errInvalidParameter) End Select Next prmParam Exit Sub AssignParametersErr: mstrSource = mstrModuleName & "AssignParameters" Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errAssignParametersFailed, _ mstrSource, LoadResString(errAssignParametersFailed) End Sub Public Sub DeleteWorkspace() Dim strDelete As String Dim qy As DAO.QueryDef On Error GoTo DeleteWorkspaceErr strDelete = "delete from att_workspaces " & _ " where workspace_id = [w_id]" Set qy = mdbsStepMaster.CreateQueryDef(gstrEmptyString, strDelete) ' Call a procedure to assign the parameter values Call AssignParameters(qy) qy.Execute dbFailOnError qy.Close ' mdbsStepMaster.Execute strDelete, dbFailOnError ' " where workspace_id = " & _ ' Str(mlngWorkspaceId) Exit Sub DeleteWorkspaceErr: Call LogErrors(Errors) mstrSource = mstrModuleName & "DeleteWorkspace" On Error GoTo 0 Err.Raise vbObjectError + errWorkspaceDeleteFailed, _ mstrSource, LoadResString(errWorkspaceDeleteFailed) End Sub Public Sub ModifyWorkspace() Dim strUpdate As String Dim qy As DAO.QueryDef On Error GoTo ModifyWorkspaceErr </pre>
--	---	--

```

' Call procedure to raise an error if the
Workspace name
' already exists in the db
Call WorkspaceNameDuplicate

strUpdate = "update att_workspaces " & _
" set workspace_name = [w_name] " & _
", archived_flag = [archived] " & _
" where workspace_id = [w_id] "
Set qy =
mdbsStepMaster.CreateQueryDef(gstrEmptyString, strUpdate)

' Call a procedure to assign the parameter
values
Call AssignParameters(qy)

qy.Execute dbFailOnError
qy.Close

' strUpdate = "update att_workspaces " & _
" set workspace_name = " & _
mFieldValue.MakeStringFieldValid(mstrWorkspaceName) & _
", archived_flag = " & _
Str(mblnArchivedFlag) & _
" where workspace_id = " & _
Str(mlngWorkspaceId)

' mdbsStepMaster.Execute strUpdate,
dbFailOnError

Exit Sub

ModifyWorkspaceErr:

Call LogErrors(Errors)
mstrSource = mstrModuleName &
"ModifyWorkspace"
On Error GoTo 0
Err.Raise vbObjectError +
errWorkspaceUpdateFailed, _
mstrSource,
LoadResString(errWorkspaceUpdateFailed)

End Sub
Public Property Get WorkspaceName() As String

WorkspaceName = mstrWorkspaceName

End Property

Public Property Get WorkspaceId() As Long

WorkspaceId = mlngWorkspaceId

End Property

Private Sub Class_Initialize()

' Each function will append it's own name
to this
' variable
mstrSource = "cWorkspace."

Set mFieldValue = New cStringSM

End Sub

Private Sub Class_Terminate()

```

```

Set mdbsStepMaster = Nothing
Set mFieldValue = Nothing

End Sub
Attribute VB_Name = "DatabaseSM"
' FILE: DatabaseSM.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved

' PURPOSE: Contains all the database
initialization/cleanup
procedures for the project. Also
contains upgrade
database upgrade functions.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

' This module is called DatabaseSM, since
Database is a standard
' Visual Basic object and we want to avoid any
confusion with it.

Option Explicit

Public wrkJet As Workspace
Public dbsAttTool As Database
Public gblnDbOpen As Boolean
Public gRunEngine As rdoEngine

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"DatabaseSM."
Public Const gsDefDBFileExt As String =
".stp"
Private Const msDefDBFile As String =
"SMData" & gsDefDBFileExt

Private Const merrFileNotFound As Integer =
3024
Private Const merrDaoTableMissing As
Integer = 3078

Private Const
STEPMASER_SETTINGS_VAL_NAME_D
BFIL As String = "WorkspaceFile"

Public Const DEF_NO_COUNT_DISPLAY
As Boolean = False
Public Const DEF_NO_EXECUTE
As Boolean = False
Public Const DEF_PARSE_QUERY_ONLY
As Boolean = False
Public Const
DEF_ANSI_QUOTED_IDENTIFIERS As
Boolean = False
Public Const DEF_ANSI_NULLS As
Boolean = True
Public Const DEF_SHOW_QUERY_PLAN
As Boolean = False
Public Const DEF_SHOW_STATS_TIME
As Boolean = False
Public Const DEF_SHOW_STATS_IO
As Boolean = False
Public Const
DEF_PARSE_ODBC_MSG_PREFIXES As
Boolean = True
Public Const DEF_ROW_COUNT
As Long = 0
Public Const
DEF_TSQL_BATCH_SEPARATOR As
String = "GO"

```

```

Public Const DEF_QUERY_TIME_OUT As
Long = 0
Public Const DEF_SERVER_LANGUAGE
As String = "(Default)"
Public Const
DEF_CHARACTER_TRANSLATION As
Boolean = True
Public Const DEF_REGIONAL_SETTINGS
As Boolean = False

Public Const PARAM_DEFAULT_DIR As
String = "DEFAULT_DIR"
Public Const PARAM_DEFAULT_DIR_DESC
As String = "Default destination directory " & _
"for all output and error files. If it is
blank, the StepMaster installation directory will be
used."

Public Const PARAM_RUN_ID As
String = "RUN_ID"
Public Const PARAM_RUN_ID_DESC As
String = "The run identifier for a run. " & _
"Any modifications will be overwritten
before each run."

Public Const PARAM_OUTPUT_DIR As
String = "OUTPUT_DIR"
Public Const PARAM_OUTPUT_DIR_DESC
As String = "The output directory for a run. " & _
"Any modifications will be overwritten
before each run."

Public Const
CONNECTION_STRINGS_TO_NAME_SUFFIX
As String = "_NAME"

Private Const TBL_RUN_STEP_HDR As String =
"run_header"
Private Const TBL_RUN_STEP_DTLS As String =
"run_step_details"
Public Const TBL_CONNECTION_DTLS As
String = "connection_dtls"
Public Const TBL_CONNECTION_STRINGS As
String = "workspace_connections"
Public Const TBL_STEPS As String = "att_steps"

Public Const FLD_ID_CONN_NAME As String =
"connection_name_id"
Public Const FLD_ID_WORKSPACE As String =
"workspace_id"
Public Const FLD_ID_STEP As String = "step_id"
Public Const FLD_ID_PARAMETER As String =
"parameter_id"

Public Const
FLD_CONN_DTL_CONNECTION_NAME As
String = "connection_name"
Public Const
FLD_CONN_DTL_CONNECTION_STRING As
String = "connection_string_name"
Public Const
FLD_CONN_DTL_CONNECTION_TYPE As
String = "connection_type"

Public Const
FLD_CONN_STR_CONNECTION_NAME As
String = "connection_name"

Public Const FLD_STEPS_EXEC_MECHANISM
As String = "execution_mechanism"
Public Const FLD_STEPS_EXEC_DTL As String =
"start_directory"
Public Const FLD_STEPS_VERSION_NO As
String = "version_no"

```



```

Public Const DATA_TYPE_CURRENCY
As String = "CURRENCY"
Public Const DATA_TYPE_LONG As
String = "Long"
Public Const DATA_TYPE_INTEGER As
String = "INTEGER"
Public Const DATA_TYPE_TEXT255 As
String = "Text(255)"

Private Sub InsertBuiltInParameter(dbFile
As Database, sParamName As String, _
sParamValue As String, sParamDesc
As String)

    Dim sBuf As String
    Dim cTempStr As New cStringSM
    Dim lId As Long
    Dim rTemp As DAO.Recordset
    Dim rParam As DAO.Recordset
    Dim cTempSeq As cSequence

    ' Create the passed in built-in parameter,
for each workspace in the db
    Set cTempSeq = New cSequence
    Set cTempSeq.IdDatabase = dbFile
    cTempSeq.IdentifierColumn =
FLD_ID_PARAMETER

    sBuf = "select * from att_workspaces "
    Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
    If rTemp.RecordCount <> 0 Then
        rTemp.MoveFirst

        While Not rTemp.EOF
            sBuf = "select * from
workspace_parameters " & _
                " where workspace_id = " &
Str(rTemp!workspace_id) & _
                " and parameter_name = " &
cTempStr.MakeStringFieldValid(sParamNa
me)

            Set rParam =
dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
            If rParam.RecordCount <> 0 Then
                rParam.MoveFirst
                ' Since the parameter already
exists, change it to a built-in type
                sBuf = "update
workspace_parameters " & _
                    " set parameter_type = " &
CStr(gintParameterBuiltIn) & _
                    ", description = " &
cTempStr.MakeStringFieldValid(sParamDe
sc) & _
                    " where workspace_id = " &
Str(rTemp!workspace_id) & _
                    " and parameter_id = " &
Str(rParam!parameter_id)
                Else
                    ' Else, insert a parameter record
                    lId = cTempSeq.Identifier
                    sBuf = "insert into
workspace_parameters " & _
                        "( workspace_id,
parameter_id, " & _
                        " parameter_name,
parameter_value, " & _
                        " description, parameter_type
) " & _
                        " values ( " & _
                        Str(rTemp!workspace_id) &
", " & Str(lId) & ", " & _

```

```

cTempStr.MakeStringFieldValid(sParamName
) & ", " & _

cTempStr.MakeStringFieldValid(sParamValue
) & ", " & _

cTempStr.MakeStringFieldValid(sParamDesc)
& ", " & _
        CStr(gintParameterBuiltIn) & _
        ") "
        End If
        dbFile.Execute sBuf, dbFailOnError
        rParam.Close

        rTemp.MoveNext
    Wend
    End If
    rTemp.Close

End Sub
Public Sub InitRunEngine()

    Set gRunEngine = New rdoEngine
    gRunEngine.rdoDefaultCursorDriver =
rdUseServer

End Sub

Public Function DefaultDBFile() As String
    DefaultDBFile = GetSetting(App.Title,
"Settings",
STEPMaster_SETTINGS_VAL_NAME_D
BFILE, App.Path & msDefDBFile)
End Function

Public Sub CloseDatabase()

    Dim dbsInstance As Database
    Dim recInstance As Recordset

    On Error GoTo CloseDatabaseErr

    ' Close all open recordsets and databases in
the workspace
    For Each dbsInstance In wrkJet.Databases

        For Each recInstance In
dbsAttTool.Recordsets
            recInstance.Close
            Next recInstance
            dbsInstance.Close

        Next dbsInstance

    Set dbsAttTool = Nothing

    gblnDbOpen = False
    wrkJet.Close

    Exit Sub

CloseDatabaseErr:

    Call LogErrors(Errors)
    Resume Next

End Sub

Private Function NoDbChanges(sVerTo As
String, sVerFrom As String) As Boolean

    If sVerTo = gsVersion242 And sVerFrom =
gsVersion241 Then
        NoDbChanges = True

```

```

Elseif sVerTo = gsVersion242 And sVerFrom =
gsVersion24 Then
    NoDbChanges = True
Elseif sVerTo = gsVersion253 And sVerFrom =
gsVersion251 Then
    NoDbChanges = True
Elseif sVerTo = gsVersion255 And sVerFrom =
gsVersion251 Then
    NoDbChanges = True
Else
    NoDbChanges = False
End If

End Function

Public Function SMOpenDatabase(Optional
strDbName As String = gstrEmptyString) As
Boolean
    Dim sVersion As String
    Dim bOpeningDb As Boolean ' This flag is used
to check if OpenDatabase failed

    On Error GoTo OpenDatabaseErr

    bOpeningDb = False
    SMOpenDatabase = False

    ' Create Microsoft Jet Workspace object.
    If Not gblnDbOpen Then
        Set wrkJet =
CreateWorkspace("att_tool_workspace_setup",
"admin", gstrEmptyString, dbUseJet)
        End If

    ' Prompt the user for the database file if it is not
passed in
    If StringEmpty(strDbName) Then
        strDbName = BrowseDBFile
        If StringEmpty(strDbName) Then
            Exit Function
        End If
    End If

    Do
        If gblnDbOpen Then
            #If Not RUN_ONLY Then
                CloseOpenWorkspaces
            #End If
            Set wrkJet =
CreateWorkspace("att_tool_workspace_setup",
"admin", gstrEmptyString, dbUseJet)
            End If

        ' Toggle the bOpeningDb flag around the
OpenDatabase method - the value
        ' of this flag will be checked by the error
handler to determine if it is
        ' the OpenDatabase that failed.
        BugMessage "DB File: " & strDbName

        bOpeningDb = True
        ' Open the database for exclusive use
        Set dbsAttTool =
wrkJet.OpenDatabase(strDbName, Options:=True)
        bOpeningDb = False

        If dbsAttTool Is Nothing Then
            ' If the file is not present in the directory,
display
            ' an error and ask the user to enter a new
path
            Call ShowError(errOpenDbFailed,
OptArgs:=strDbName)

            strDbName = BrowseDBFile

```

```

Else
    sVersion = DBVersion(dbsAttTool)

    ' Make sure the application and db
    version numbers match
    If sVersion = gsVersion Then
        Call InitializeData(strDbName)
        gblnDbOpen = True
        SMOpenDatabase = True
    Else
        If UpgradeDb(wrkJet, dbsAttTool,
        gsVersion, sVersion) Then
            Call InitializeData(strDbName)
            gblnDbOpen = True
            SMOpenDatabase = True
        Else
            dbsAttTool.Close
            Set dbsAttTool = Nothing

            ShowError
            errVersionMismatch, _
            OptArgs:=" Please install
            Version "" & gsVersion & "" of the
            workspace definition file."
            strDbName = BrowseDBFile
            End If
            End If
            End If
            Loop While gblnDbOpen = False And
            Not StringEmpty(strDbName)

            Exit Function

OpenDatabaseErr:
    Call DisplayErrors(Errors)

    ' If the OpenDatabase failed, continue
    If bOpeningDb Then
        Resume Next
    End If

    Call ShowError(errOpenDbFailed,
    OptArgs:=strDbName)

End Function
Private Sub InitializeData(sDb As String)

    Set gcParameters = New cArrParameters
    Set gcParameters.ParamDatabase =
    dbsAttTool

    Set gcSteps = New cArrSteps
    Set gcSteps.StepDB = dbsAttTool

    Set gcConstraints = New cArrConstraints
    Set gcConstraints.ConstraintDB =
    dbsAttTool

    Set gcConnections = New cConnections
    Set gcConnections.ConnDb = dbsAttTool

    Set gcConnDtls = New cConnDtls
    Set gcConnDtls.ConnDb = dbsAttTool

    ' Disable the error handler since this is not
    a critical step
    On Error GoTo 0
    SaveSetting App.Title, "Settings",
    STEPMASTER_SETTINGS_VAL_NAME
    _DBFILE, sDb
End Sub
Private Sub
UpdateContinuationCriteria(dbFile As
DAO.Database)

```

```

Dim qyTemp As DAO.QueryDef
Dim sBuf As String

On Error GoTo
UpdateContinuationCriteriaErr

    sBuf = "Since this version of the executable
    incorporates failure processing, " & _
    "the upgrade will update the On Failure
    field for each of the steps " & _
    "to 'Continue' to be compatible with the
    existing behaviour. " & _
    "Proceed?"

    If Not Confirm(Buttons:=vbYesNo,
    strMessage:=sBuf, strTitle:="Upgrade
    database") Then
        Exit Sub
    End If

    ' Create a recordset object to retrieve all
    steps for
    ' the given workspace
    sBuf = " update att_steps a " & _
    " set continuation_criteria = " & _
    CStr(gintOnFailureContinue) & _
    " where archived_flag = [archived] "

    ' Find the highest X-component of the
    version number
    sBuf = sBuf & " AND cint( mid(
    version_no, 1, instr( version_no, " & gstrDQ &
    gstrVerSeparator & gstrDQ & " ) - 1 ) ) = " & _
    " ( select max( cint( mid( version_no, 1,
    instr( version_no, " & gstrDQ &
    gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS d " & _
    " WHERE a.step_id = d.step_id ) "

    ' Find the highest Y-component of the
    version number for the highest X-component
    sBuf = sBuf & " AND cint( mid(
    version_no, instr( version_no, " & gstrDQ &
    gstrVerSeparator & gstrDQ & " ) + 1 ) ) = " & _
    " ( select max( cint( mid( version_no,
    instr( version_no, " & gstrDQ &
    gstrVerSeparator & gstrDQ & " ) + 1 ) ) ) " & _
    " from att_steps AS b " & _
    " Where a.step_id = b.step_id " & _
    " AND cint( mid( version_no, 1, instr(
    version_no, " & gstrDQ & gstrVerSeparator &
    gstrDQ & " ) - 1 ) ) = " & _
    " ( select max( cint( mid( version_no, 1,
    instr( version_no, " & gstrDQ &
    gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) " & _
    " from att_steps AS c " & _
    " WHERE a.step_id = c.step_id ) ) "

    ' Create a temporary Querydef object
    Set qyTemp =
    dbFile.CreateQueryDef(gstrEmptyString,
    sBuf)
    qyTemp.Parameters("archived").Value =
    False

    qyTemp.Execute dbFailOnError
    qyTemp.Close

    Exit Sub

UpdateContinuationCriteriaErr:
    Call LogErrors(Errors)

```

```

Err.Raise vbObjectError + errModifyStepFailed,
mstrModuleName, _
    LoadResString(errModifyStepFailed)

End Sub

Private Sub UpdateDbDtls(dbFile As Database,
sNewVersion As String)

    Dim sSql As String
    Dim cTemp As New cStringSM

    On Error GoTo UpdateDbDtlsErr

    sSql = "update db_details " & _
    " set db_version = " & _
    cTemp.MakeStringFieldValid(sNewVersion)

    dbFile.Execute sSql, dbFailOnError

    Exit Sub

UpdateDbDtlsErr:
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
    mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade10to21(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sSql As String

    On Error GoTo Upgrade10to21Err

    Call UpdateDbDtls(dbFile, sVersion)

    Call UpdateContinuationCriteria(dbFile)

    Exit Sub

Upgrade10to21Err:
    UpgradeWsp.Rollback
    Call LogErrors(Errors)
    Err.Raise vbObjectError + errUpgradeFailed,
    mstrModuleName, _
    LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade21to23(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

    Dim sBuf As String
    Dim cTempStr As New cStringSM

    On Error GoTo Upgrade21to23Err

    ' Add a parameter type field and a description
    field to the parameter table
    sBuf = "alter table workspace_parameters " & _
    " add column description TEXT(255) "
    dbFile.Execute sBuf, dbFailOnError

    sBuf = "alter table workspace_parameters " & _
    " add column parameter_type INTEGER "
    dbFile.Execute sBuf, dbFailOnError

    ' Initialize the parameter type on all parameters to
    indicate generic parameters
    sBuf = "update workspace_parameters " & _

```

```

" set parameter_type = " &
CStr(gintParameterGeneric)
dbFile.Execute sBuf, dbFailOnError

sBuf = "Release 2.3 onwards, connection
string parameters will be " & _
" displayed in a separate node. After
this upgrade, all connection " & _
" string parameters will appear under
the Globals/Connection Strings " & _
" node in the workspace. "
Call MsgBox(sBuf, vbOKOnly +
vbApplicationModal, "Upgrade database")

' Update the parameter type on all
parameters that look like db connection
strings
sBuf = "update workspace_parameters "
& _
" set parameter_type = " &
CStr(gintParameterConnect) & _
" where UCase(parameter_value)
like *'DRIVER*' " & _
" or UCase(parameter_value) like
*'DSN*'"
dbFile.Execute sBuf, dbFailOnError

' Add an elapsed time field to the
run_step_details table - this field is
' needed to store the elapsed time in
milliseconds.
sBuf = "alter table run_step_details " & _
" add column elapsed_time LONG "
dbFile.Execute sBuf, dbFailOnError

' The failure_details field has some data
for the case when an ODBC failure
' threshold was specified. Since that's no
longer relevant, update the failure_details
' field for records with failure_criteria =
gintFailureODBC to empty.
' failure_criteria = gintFailureODBC = 1
sBuf = "update att_steps " & _
" set failure_details = " &
CStr(gintParameterConnect) & _
" where failure_criteria = '1'"
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtls(dbFile, sVersion)

UpgradeWsp.CommitTrans

On Error GoTo DropColumnErr

UpgradeWsp.BeginTrans

' This ddl cannot be in the same
transaction as the failure_details update
' But we can do this in a separate
transaction since we do not expect this
' statement to fail - AND, it doesn't matter
if this transaction fails
' Drop the failure_criteria column from
the att_steps table
sBuf = "alter table att_steps " & _
" drop column failure_criteria "
dbFile.Execute sBuf, dbFailOnError

Exit Sub

DropColumnErr:
Call LogErrors(Errors)
ShowError errDeleteColumnFailed
Exit Sub

```

```

Upgrade21to23Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError +
errUpgradeFailed, mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade23to24(UpgradeWsp As
DAO.Workspace, dbFile As Database,
sVersion As String)

Dim sBuf As String
Dim lld As Long
Dim rTemp As DAO.Recordset
Dim cTempStr As New cStringSM

On Error GoTo Upgrade23to24Err

' Add a new table for connection properties
sBuf = CreateConnectionsTableScript()
' TODO: Not sure of column sizes for row
count, tsq_batch_separator and
server_language
dbFile.Execute sBuf, dbFailOnError

' Move all connection parameters from the
parameter table to the connections tables
' Insert default values for the newly added
connection properties
sBuf = "select * from workspace_parameters
" & _
" where parameter_type = " &
CStr(gintParameterConnect)
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)
lld = 1
If rTemp.RecordCount <> 0 Then
rTemp.MoveFirst

While Not rTemp.EOF
sBuf = "insert into
workspace_connections " & _
" (workspace_id, connection_id, " & _
" connection_name, connection_value,
" & _
" description, no_count_display, " & _
" no_execute, parse_query_only, " & _
" ANSI_quoted_identifiers,
ANSI_nulls, " & _
" show_query_plan, show_stats_time, "
& _
" show_stats_io,
parse_odbc_msg_prefixes, " & _
" row_count, tsq_batch_separator, " & _
" query_time_out, server_language, " & _
" character_translation,
regional_settings ) " & _
" values ( " & _
Str(rTemp!workspace_id) & ", " &
Str(lld) & ", " & _
cTempStr.MakeStringFieldValid("'" &
rTemp!parameter_name) & ", " & _
cTempStr.MakeStringFieldValid("'" &
rTemp!parameter_value) & ", " & _
cTempStr.MakeStringFieldValid("'" &
rTemp!Description) & ", " & _
Str(DEF_NO_COUNT_DISPLAY) &
", " & _
Str(DEF_NO_EXECUTE) & ", " &
Str(DEF_PARSE_QUERY_ONLY) & ", " & _

```

```

Str(DEF_ANSI_QUOTED_IDENTIFIERS)
& ", " & Str(DEF_ANSI_NULLS) & ", " & _
Str(DEF_SHOW_QUERY_PLAN) & ", " &
Str(DEF_SHOW_STATS_TIME) & ", " & _
Str(DEF_SHOW_STATS_IO) & ", " &
Str(DEF_PARSE_ODBC_MSG_PREFIXES) & ",
" & _
Str(DEF_ROW_COUNT) & ", " &
cTempStr.MakeStringFieldValid(DEF_TSQL_BAT
CH_SEPARATOR) & ", " & _
Str(DEF_QUERY_TIME_OUT) & ", " &
cTempStr.MakeStringFieldValid(DEF_SERVER_L
ANGUAGE) & ", " & _
Str(DEF_CHARACTER_TRANSLATION)
& ", " & Str(DEF_REGIONAL_SETTINGS) & _
" ) "
dbFile.Execute sBuf, dbFailOnError

lld = lld + 1
rTemp.MoveNext
Wend
End If
rTemp.Close

' Add an identifier column for the connection_id
field
sBuf = "alter table att_identifiers " & _
" add column connection_id long "
dbFile.Execute sBuf, dbFailOnError

' Initialize the value of the connection identifier,
initialized above
sBuf = "update att_identifiers " & _
" set connection_id = " & Str(lld)
dbFile.Execute sBuf, dbFailOnError

' Delete all connection strings from the parameter
table
sBuf = "delete from workspace_parameters " & _
" where parameter_type = " &
CStr(gintParameterConnect)
dbFile.Execute sBuf, dbFailOnError

' Create the built-in parameter, default directory,
for each workspace in the db
Call InsertBuiltInParameter(dbFile,
PARAM_DEFAULT_DIR, gstrEmptyString,
PARAM_DEFAULT_DIR_DESC)

Call UpdateDbDtls(dbFile, sVersion)

Exit Sub

Upgrade23to24Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade24to25(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

Dim sBuf As String
Dim qy As DAO.QueryDef
Dim rTemp As DAO.Recordset
Dim lld As Long
Dim cTempStr As New cStringSM

On Error GoTo Upgrade24to25Err

sBuf = "Release " & gsVersion25 & " onwards,
new 'Connections' must be created for all " & _

```

```

"connection strings. " & vbCrLf &
vbCrLf & _
"Connections will appear under the
Globals/Connections " & _
"node in the workspace. " & vbCrLf &
_
"A list of all 'Connections' (instead
of 'Connection Strings') " & _
"in the workspace will be displayed
in the 'Connections' field for " & _
"ODBC steps on the Step definition
screen. " & vbCrLf & vbCrLf & _
"Each Connection can be marked as
static or dynamic. " & vbCrLf & _
"Dynamic connections will be
created when a step starts execution and " &
_
"closed once the step completes. " &
vbCrLf & _
"Static connections will be kept open
till the run completes." & vbCrLf & vbCrLf &
_
"Currently dynamic 'Connections'
have been created for all existing
'Connection Strings' " & _
"with the suffix " &
CONNECTION_STRINGS_TO_NAME_S
UFFIX
Call MsgBox(sBuf, vbOKOnly +
vbApplicationModal, "Upgrade database")

' Add a new table for the connection name
entity
' This table has been added in order to
satisfy the TPC-H requirement that
' all the queries in a stream need to be
executed on a single connection.
sBuf =
CreateConnectionDtlsTableScript()
dbFile.Execute sBuf, dbFailOnError

' Add an identifier column for the
connection_name_id field
sBuf = "alter table att_identifiers " & _
" add column " &
FLD_ID_CONN_NAME & " long "
dbFile.Execute sBuf, dbFailOnError

Call UpdateDbDtls(dbFile, sVersion)

' insert connection_dtl records for each of
the connection strings
sBuf = "select * from " &
TBL_CONNECTION_STRINGS
Set rTemp = dbFile.OpenRecordset(sBuf,
dbOpenSnapshot)

sBuf = "insert into " &
TBL_CONNECTION_DTLS & _
"( " & FLD_ID_WORKSPACE & _
", " & FLD_ID_CONN_NAME & _
", " &
FLD_CONN_DTL_CONNECTION_NAM
E & _
", " &
FLD_CONN_DTL_CONNECTION_STRI
NG & _
", " &
FLD_CONN_DTL_CONNECTION_TYPE
& " ) " & _
" values ( [w_id], [c_id], [c_name],
[c_str], [c_type] ) "
Set qy = dbFile.CreateQueryDef("", sBuf)

lId = glMinId

```

```

If rTemp.RecordCount <> 0 Then
rTemp.MoveFirst

While Not rTemp.EOF
qy.Parameters("w_id").Value =
rTemp.Fields(FLD_ID_WORKSPACE)
qy.Parameters("c_id").Value = lId
qy.Parameters("c_name").Value =
rTemp.Fields(FLD_CONN_STR_CONNECTI
ON_NAME) &
CONNECTION_STRINGS_TO_NAME_SUF
FIX
qy.Parameters("c_str").Value =
rTemp.Fields(FLD_CONN_STR_CONNECTI
ON_NAME)
qy.Parameters("c_type").Value =
ConnTypeDynamic

qy.Execute dbFailOnError

lId = lId + 1
rTemp.MoveNext
Wend
End If
qy.Close
rTemp.Close

' Initialize the value of the
connection_name_id
sBuf = "update att_identifiers " & _
" set " & FLD_ID_CONN_NAME & "
= " & Str(lId)
dbFile.Execute sBuf, dbFailOnError

' Update the start_directory field in att_steps
to point to the newly
' created connections
Call ReadStepsInWorkspace(rTemp, qy,
glInvalidId, dbLoad:=dbFile, _
bSelectArchivedRecords:=False)

sBuf = "update " & TBL_STEPS & _
" set " & FLD_STEPS_EXEC_DTL & " =
[c_name] " & _
" where " & FLD_ID_STEP & " = [s_id] "
& _
" and " & FLD_STEPS_VERSION_NO
& " = [ver_no] "
Set qy = dbFile.CreateQueryDef("", sBuf)

If rTemp.RecordCount <> 0 Then
rTemp.MoveFirst

While Not rTemp.EOF
If
rTemp.Fields(FLD_STEPS_EXEC_MECHAN
ISM).Value = gintExecuteODBC Then
If Not (StringEmpty("") &
rTemp.Fields(FLD_STEPS_EXEC_DTL)))
Then
sBuf =
' Strip the enclosing "%"
characters
sBuf = Mid(sBuf, 2, Len(sBuf) -
2) &
CONNECTION_STRINGS_TO_NAME_SUF
FIX

qy.Parameters("c_name").Value =
sBuf
qy.Parameters("s_id").Value =
rTemp.Fields(FLD_ID_STEP)
qy.Parameters("ver_no").Value =
rTemp.Fields(FLD_STEPS_VERSION_NO)

```

```

qy.Execute dbFailOnError
End If
End If
rTemp.MoveNext
Wend
End If

qy.Close
rTemp.Close

Exit Sub

Upgrade243to25Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub
Private Sub Upgrade25to251(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

On Error GoTo Upgrade25to251Err

' Create the built-in parameters, run_id and
output_dir, for each workspace in the db
Call InsertBuiltInParameter(dbFile,
PARAM_RUN_ID, gstrEmptyString,
PARAM_RUN_ID_DESC)
Call InsertBuiltInParameter(dbFile,
PARAM_OUTPUT_DIR, gstrEmptyString,
PARAM_OUTPUT_DIR_DESC)

Call UpdateDbDtls(dbFile, sVersion)

Exit Sub

Upgrade25to251Err:
UpgradeWsp.Rollback
Call LogErrors(Errors)
Err.Raise vbObjectError + errUpgradeFailed,
mstrModuleName, _
LoadResString(errUpgradeFailed)

End Sub

Private Sub Upgrade242to243(UpgradeWsp As
DAO.Workspace, dbFile As Database, sVersion As
String)

Dim sBuf As String
Dim cTempStr As New cStringSM
Dim iResponse As Integer

On Error GoTo DeleteHistoryErr

Call DeleteRunHistory(dbFile)

On Error GoTo Upgrade242to243Err

UpgradeWsp.CommitTrans

UpgradeWsp.BeginTrans

' Add a parameter type field and a description
field to the parameter table
sBuf = "alter table run_step_details " & _
" add column parent_instance_id LONG "

dbFile.Execute sBuf, dbFailOnError

sBuf = "alter table run_step_details " & _

```

<pre> " add column iterator_value TEXT(255) " dbFile.Execute sBuf, dbFailOnError Call AlterFieldType(dbFile, TBL_RUN_STEP_DTLS, "start_time", DATA_TYPE_CURRENCY) Call AlterFieldType(dbFile, TBL_RUN_STEP_DTLS, "end_time", DATA_TYPE_CURRENCY) Call AlterFieldType(dbFile, TBL_RUN_STEP_HDR, "start_time", DATA_TYPE_CURRENCY) Call AlterFieldType(dbFile, TBL_RUN_STEP_HDR, "end_time", DATA_TYPE_CURRENCY) Call UpdateDbDtls(dbFile, sVersion) Exit Sub DeleteHistoryErr: ' This is not a critical error - continue with upgrade Call LogErrors(Errors) Resume Next Upgrade242to243Err: UpgradeWsp.Rollback Call LogErrors(Errors) Err.Raise vbObjectError + errUpgradeFailed, mstrModuleName, _ LoadResString(errUpgradeFailed) End Sub ***** ***** ' The AlterFieldType Sub procedure requires three string ' parameters. The first string specifies the name of the table ' containing the field to be changed. The second string specifies ' the name of the field to be changed. The third string specifies ' the new data type for the field. ***** ***** Private Sub AlterFieldType(dbFile As Database, TblName As String, FieldName As String, _ NewDataType As String) Dim qdf As DAO.QueryDef Dim sSql As String ' Add a temporary field to the table. sSql = "ALTER TABLE [" & TblName & _ "] ADD COLUMN AlterTempField " & NewDataType Set qdf = dbFile.CreateQueryDef("", sSql) qdf.Execute ' Copy the data from old field into the new field. qdf.SQL = "UPDATE DISTINCTROW [" & TblName & "] SET AlterTempField = [" & FieldName & "]" qdf.Execute ' Delete the old field. </pre>	<pre> qdf.SQL = "ALTER TABLE [" & TblName & "] DROP COLUMN [" & FieldName & "]" qdf.Execute ' Rename the temporary field to the old field's name. dbFile.TableDefs "[" & TblName & "]").Fields("AlterTempField").Name = FieldName dbFile.TableDefs.Refresh ' Clean up. End Sub Private Sub Upgrade01to21(UpgradeWsp As DAO.Workspace, dbFile As DAO.Database, sVersion As String) Dim sSql As String On Error GoTo Upgrade01to21Err sSql = "Create table db_details (" & _ "db_version Text(50) " & _ ");" dbFile.Execute sSql, dbFailOnError sSql = "insert into db_details " & _ "(db_version) values ('" & sVersion & "')" dbFile.Execute sSql, dbFailOnError Call UpdateContinuationCriteria(dbFile) Exit Sub Upgrade01to21Err: Call LogErrors(Errors) UpgradeWsp.Rollback Err.Raise vbObjectError + errUpgradeFailed, mstrModuleName, _ LoadResString(errUpgradeFailed) End Sub Private Function UpgradeDb(UpgradeWsp As DAO.Workspace, dbFile As Database, _ sVerTo As String, sVerFrom As String) As Boolean Dim sMsg As String On Error GoTo UpgradeDbErr UpgradeDb = False If Not ValidUpgrade(sVerTo, sVerFrom) Then Exit Function If NoDbChanges(sVerTo, sVerFrom) Then UpgradeDb = True Exit Function End If sMsg = "The database needs to be upgraded from Version " & sVerFrom & _ " to Version " & sVerTo & "." & vbCrLf & _ "Proceed?" If Not Confirm(Buttons:=vbYesNo, strMessage:=sMsg, strTitle:="Upgrade database") Then Exit Function End If UpgradeWsp.BeginTrans </pre>	<pre> Select Case sVerFrom Case gsVersion25 Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion243 Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion24, gsVersion241, gsVersion242 sMsg = "After this upgrade, the run history for previous runs will no longer be available. " & _ "Continue?" If Not Confirm(Buttons:=vbYesNo, strMessage:=sMsg, strTitle:="Upgrade database") Then UpgradeWsp.CommitTrans Exit Function End If Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion243) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion23 Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion21 Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion10 Call Upgrade10to21(UpgradeWsp, dbFile, gsVersion21) Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) Call Upgrade243to25(UpgradeWsp, dbFile, gsVersion25) Call Upgrade25to251(UpgradeWsp, dbFile, gsVersion251) Case gsVersion01 Call Upgrade01to21(UpgradeWsp, dbFile, gsVersion21) Call Upgrade21to23(UpgradeWsp, dbFile, gsVersion23) Call Upgrade23to24(UpgradeWsp, dbFile, gsVersion24) Call Upgrade242to243(UpgradeWsp, dbFile, gsVersion242) </pre>
---	--	--

```

        Call Upgrade243to25(UpgradeWsp,
dbFile, gsVersion25)
        Call Upgrade25to251(UpgradeWsp,
dbFile, gsVersion251)

    End Select

    UpgradeWsp.CommitTrans

    UpgradeDb = True
    Exit Function

UpgradeDbErr:
    Call LogErrors(Errors)
    ShowError errUpgradeFailed

End Function
Private Function DBVersion(TestDb As
Database) As String
    ' Retrieves the database version
    Dim rVersion As Recordset

    On Error GoTo DBVersionErr

    Set rVersion =
TestDb.OpenRecordset("Select db_version
from db_details ", _
        dbOpenForwardOnly)

    BugAssert rVersion.RecordCount <> 0
    DBVersion = rVersion!db_version

    rVersion.Close
    Exit Function

DBVersionErr:
    If Err.Number = merrDaoTableMissing
Then
        DBVersion = gsVersion01
    Else
        LogErrors Errors
        Err.Raise vbObjectError +
errUpgradeFailed, mstrModuleName, _
            LoadResString(errUpgradeFailed)
    End If

End Function

Private Function ValidUpgrade(sVerTo As
String, sVerFrom As String) As Boolean

    If sVerTo = gsVersion And sVerFrom =
gsVersion251 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion25 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion243 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion242 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion241 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion24 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion23 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And
sVerFrom = gsVersion21 Then
        ValidUpgrade = True
    End If

```

```

    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion10 Then
        ValidUpgrade = True
    ElseIf sVerTo = gsVersion And sVerFrom =
gsVersion01 Then
        ValidUpgrade = True
    Else
        ValidUpgrade = False
    End If

End Function

Attribute VB_Name = "DebugSM"
' FILE:    DebugSM.bas
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved

' PURPOSE:  Contains all the functions that
carry out error/debug
'           processing for the project.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

' Most of the functions in this module that
manipulate the
' error object do not have an On Error GoTo
statement - this
' is because it will clear the passed in error
object - let
' the calling functions handle the errors raised
by this
' module, if any
Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"DebugSM."

Private mcLogFile As cFileSM
Private mcErrorFile As cFileSM

Private Const
FORMAT_MESSAGE_FROM_SYSTEM =
&H1000
Private Const
FORMAT_MESSAGE_IGNORE_INSERTS =
&H200
Private Const pNull = 0

Declare Function FormatMessage Lib
"kernel32" Alias "FormatMessageA" (ByVal
dwFlags As Long, lpSource As Any, ByVal
dwMessageId As Long, ByVal dwLanguageId
As Long, ByVal lpbuffer As String, ByVal
nSize As Long, Arguments As Long) As Long
Public Function Confirm(Optional
lngMessageCode As conConfirmMsgCodes, _
Optional lngTitleCode As
conConfirmMsgTitleCodes, _
Optional TitleParameter As String, _
Optional ByVal Buttons As Integer = -1, _
Optional strMessage As String =
gstrEmptyString, _
Optional strTitle As String =
gstrEmptyString) _
As Boolean
    ' Displays a confirmation message
corresponding to the
    ' passed in message code. Returns True if the
user says
    ' Ok and False otherwise

```

```

Dim intResponse As Integer
Dim intButtonStyle As Integer

On Error GoTo ConfirmErr

Confirm = False

' If the buttons style hasn't been specified, set the
' default style to display OK and Cancel buttons
If Buttons = -1 Then
    intButtonStyle = vbOKCancel
Else
    intButtonStyle = Buttons
End If

' Find the message string for the passed in code
If StringEmpty(strMessage) Then
    strMessage =
Trim$(LoadResString(lngMessageCode))
End If

If StringEmpty(strTitle) Then
    strTitle =
Trim$(LoadResString(lngTitleCode))
End If

If Not StringEmpty(TitleParameter) Then
    strTitle = strTitle & Chr$(vbKeySpace) & _
        gstrSQ & TitleParameter & gstrSQ
End If

' Display the confirmation message with the
Cancel button
' set to the default - assume that we are
confirming
' potentially dangerous operations!
intResponse = MsgBox(strMessage, _
    intButtonStyle + vbQuestion +
vbApplicationModal, _
    strTitle)

' Translate the user response into a True/False
return code
If intButtonStyle = vbOKCancel Then
    If intResponse = vbOK Then
        Confirm = True
    Else
        Confirm = False
    End If
Else
    If intResponse = vbYes Then
        Confirm = True
    Else
        Confirm = False
    End If
End If

Exit Function

ConfirmErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
gstrSource = mstrModuleName & "Confirm"
Err.Raise vbObjectError + errConfirmFailed, _
    gstrSource, _
    LoadResString(errConfirmFailed)

End Function
Public Sub LogSystemError()
    Dim eErrCode As Long

    eErrCode = GetLastError()
    If eErrCode <> 0 Then

```

```

        WriteToFile "System Error: " &
eErrCode & vbCrLf & ApiError(eErrCode),
-
        blnError:=True
    End If

End Sub
Public Function ApiError(ByVal e As Long)
As String

    Dim s As String
    Dim c As Long

    s = String(256, 0)
    c =
FormatMessage(FORMAT_MESSAGE_FR
OM_SYSTEM Or _
FORMAT_MESSAGE_IGNORE_INSERT
S, _
    pNull, e, 0&, s, Len(s), ByVal pNull)
    If c Then ApiError = e & ": " & Left$(s,
c)

End Function

' Output flags determine output destination
of BugAsserts and messages
#Const afLogFile = 1
#Const afMsgBox = 2
#Const afDebugWin = 4
#Const afAppLog = 8

' Display appropriate error message, and
then stop
' program. These errors should NOT be
possible in
' shipping product.
Sub BugAssert(ByVal fExpression As
Boolean, _
    Optional sExpression As String)
#If afDebug Then
    If fExpression Then Exit Sub
    BugMessage "BugAssert failed: " &
sExpression
    Stop
#End If
End Sub

Sub BugMessage(sMsg As String)

#If afDebug And afLogFile Then
    ' Since we are writing log messages, the
error flag is turned off
    Call WriteToFile(sMsg, False)
#End If
#If afDebug And afMsgBox Then
    MsgBox sMsg
#End If
#If afDebug And afDebugWin Then
    Debug.Print sMsg
#End If
#If afDebug And afAppLog Then
    App.LogEvent sMsg
#End If

End Sub
Public Function ProjectLogFile() As String

    ProjectLogFile = mcLogFile.FileName

End Function
Public Function ProjectErrorFile() As String

    ProjectErrorFile = mcErrorFile.FileName

```

```

End Function

Private Sub WriteToFile(sMsg As String,
Optional ByVal blnError As Boolean)

    ' Calls procedures to write the passed in
message to the log -
    ' The blnError flag is used to indicate that
the message
    ' should be logged to the error file - by
default the log
    ' file is used

    Dim mcFileObj As cFileSM
    Dim strFileName As String
    Dim strFileHdr As String

    On Error GoTo WriteToFileErr

    If blnError Then
        If mcErrorFile Is Nothing Then
            Set mcErrorFile = New cFileSM
        End If
        Set mcFileObj = mcErrorFile
    Else
        If mcLogFile Is Nothing Then
            Set mcLogFile = New cFileSM
        End If
        Set mcFileObj = mcLogFile
    End If

    If StringEmpty(mcFileObj.FileName) Then
        If blnError Then
            strFileName = gstrProjectPath & "\" &
App.EXENAME & ".ERR"
            strFileHdr = "Stepmaster Errors"
        Else
            strFileName = gstrProjectPath & "\" &
App.EXENAME & ".DBG"
            strFileHdr = "Stepmaster Log"
        End If

        mcFileObj.FileName = strFileName
        mcFileObj.WriteLine strFileHdr
        mcFileObj.WriteLine "Log start time : "
& Now
    End If

    mcFileObj.WriteLine sMsg

    Exit Sub

WriteToFileErr:
    ' Display the error code raised by Visual
Basic
    Call DisplayErrors(Errors)
    ' An error message would've been displayed
by the called
    ' procedures

End Sub
Public Sub WriteMessage(sMsg As String)

    Call WriteToFile(sMsg, True)

End Sub

Sub BugTerm()
#If afDebug And afLogFile Then
    ' Close log file
    mcLogFile.CloseFile
#End If
End Sub

```

```

Public Sub ShowError(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString, _
    Optional ByVal DoWriteError As Boolean =
True)

    If DoWriteError Then
        ' Call a procedure to write the error to a log file
        Call WriteError(ErrorCode, ErrorSource,
OptArgs)
    End If

    ' Re-initialize the values of the Error object
before
    ' displaying the error to the user
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)

    Call DisplayErrors(Errors)

    Err.Clear

End Sub
Public Sub WriteError(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString)

    ' Initialize the values of the Error object before
    ' calling the log function
    Call InitErrObject(ErrorCode, ErrorSource,
OptArgs)

    Call LogErrors(Errors)

    Err.Clear

End Sub
Private Sub InitErrObject(ByVal ErrorCode As
errErrorConstants, _
    Optional ByVal ErrorSource As String =
gstrEmptyString, _
    Optional ByVal OptArgs As String =
gstrEmptyString)

    Dim lngError As Long

    lngError = IIf(ErrorCode > vbObjectError And
ErrorCode < vbObjectError + 65535, _
        ErrorCode - vbObjectError, ErrorCode)
    Err.Number = lngError + vbObjectError
    Err.Description = LoadResString(lngError) &
OptArgs
    Err.Source = App.EXENAME & ErrorSource

End Sub
Public Sub ShowMessage(ByVal MessageCode As
errErrorConstants, _
    Optional ByVal OptArgs As String)

    Dim strMessage As String

    On Error GoTo ShowMessageErr

    strMessage = LoadResString(MessageCode) &
OptArgs

    ' Write the error to a log file
    BugMessage strMessage

```

```

MsgBox strMessage, vbOKOnly

Exit Sub

ShowMessageErr:
' Log the error and exit
Call DisplayErrors(Errors)

End Sub
Public Sub ShowMessageStr(sMessage As String)

' Write the error to a log file
BugMessage sMessage

MsgBox sMessage, vbOKOnly

End Sub

Public Sub DisplayErrors(myErrCollection As Errors)
Dim strError As String
Dim errLoop As Error
Dim errCode As Long

' Enumerate Errors collection and display
properties of
' each Error object.
If Err.Number <> 0 Then
If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536)
Then
errCode = Err.Number -
vbObjectError
Else
errCode = Err.Number
End If
strError = "Error # " & Str(errCode) &
" was generated by " _
& Err.Source & Chr(13) &
Err.Description
MsgBox strError, , "Error",
Err.HelpFile, Err.HelpContext
Else
For Each errLoop In myErrCollection
With errLoop
If Err.Number > vbObjectError
And Err.Number < (vbObjectError + 65536)
Then
errCode = .Number -
vbObjectError
Else
errCode = .Number
End If
strError = "Error #" & errCode &
vbCrLf
strError = strError & " " &
.Description & vbCrLf
strError = strError & _
" (Source: " & .Source & ")"
& vbCrLf
' strError = strError & _
' "Press F1 to see topic " &
.HelpContext & vbCrLf
' strError = strError & _
' " in the file " & .HelpFile &
' ".
End With

MsgBox strError
Next
End If

End Sub

```

```

Public Sub LogErrors(myErrCollection As Errors)
Dim cColErrors As cVectorStr
Dim strError As String
Dim errLoop As Error
Dim errCode As Long
Dim lngIndex As Long

Set cColErrors = New cVectorStr

' Enumerate Errors collection and display
properties of
' each Error object.
If Err.Number <> 0 Then
If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536) Then
errCode = Err.Number - vbObjectError
Else
errCode = Err.Number
End If
strError = "Error # " & Str(errCode) &
" was generated by " _
& Err.Source & vbCrLf &
Err.Description

cColErrors.Add strError
End If

' Log all database errors, if any
For Each errLoop In myErrCollection
With errLoop
If Err.Number > vbObjectError And
Err.Number < (vbObjectError + 65536) Then
errCode = .Number - vbObjectError
Else
errCode = .Number
End If
strError = "Error #" & errCode &
vbCrLf
strError = strError & " " &
.Description & vbCrLf
strError = strError & _
" (Source: " & .Source & ")" &
vbCrLf
End With

cColErrors.Add strError
Next

' We can have a error handler now that we
have stored all
' errors away safely! - having an error
handler before
' enumerating all the errors would have
cleared the error
' collection
On Error GoTo LogErrorsErr
gstrSource = mstrModuleName &
"LogErrors"

For lngIndex = 0 To cColErrors.Count - 1
strError = cColErrors(lngIndex)
Debug.Print strError
Call WriteToFile(strError, True)
Next lngIndex

Set cColErrors = Nothing

Exit Sub

LogErrorsErr:
' Display the error code raised by Visual
Basic
DisplayErrors Errors
On Error GoTo 0

```

```

ShowError errUnableToWriteError,
DoWriteError:=False

End Sub
Attribute VB_Name = "FileCommon"
' FILE: FileCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains common
functionality to display
' the File Open dialog.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this module
Private Const mstrModuleName As String =
"FileCommon."

Private Enum EOpenFile
OFN_OVERWRITEPROMPT = &H2
OFN_HIDEREADONLY = &H4
OFN_FILEMUSTEXIST = &H1000
OFN_EXPLORER = &H80000
End Enum

' The locations for the different output files are
presented to
' the user in a list box. These constants are used
while loading the
' data and while reading the data from the list box.
' These constants also represent the different file
types that are
' displayed to the user in File Open dialogs
Public Enum gFileTypes
gintOutputFile = 0
' gintLogFile = 1
gintErrorFile
gintStepTextFile
gintOutputCompareFile
gintDBFile
gintDBFileNew
gintImportFile
gintExportFile
End Enum

Public Const gsSqlFileSuffix = ".sql"
Public Const gsCmdFileSuffix = ".cmd"

Public Const gsOutputFileSuffix = ".out"
Public Const gstrLogFileSuffix = ".log"
Public Const gsErrorFileSuffix = ".err"
Public Function BrowseDBFile() As String
' Prompts the user for a database file with the
workspace information
' Call CallFileDialog to display the open file
dialog
BrowseDBFile = CallFileDialog(gintDBFile)

End Function
Public Function CallFileDialog(intFileType As Integer, _
Optional ByVal strDefaultFile As String =
gstrEmptyString) As String
' This function initializes the values of the filter
property,
' the dialog title and flags for the File Open dialog
depending
' on the FileType passed in

```



```

' It then calls ShowFileOpenDialog to set
these properties and
' display the File Open dialog to the user

' All the properties used by the File Open
dialog are defined
' as constants in this function and passed
to ShowFileOpenDialog
' as parameters. So if any of the dialog
properties need to be
' modified, these constants are what need
to be changed
Const s_DLG_TITLE_OPEN = "Open"
Const s_DLG_TITLE_NEW = "New"
Const s_DLG_TITLE_IMPORT =
"Import From"
Const s_DLG_TITLE_EXPORT =
"Export To"

Const mlng_FILE_STEP_TEXT_FLAGS
= OFN_EXPLORER Or
OFN_FILEMUSTEXIST Or
OFN_HIDEREADONLY
Const
mlng_FILE_OUTPUT_COMPARE_FLAG
S = mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_DB_FLAGS =
mlng_FILE_STEP_TEXT_FLAGS
Const mlng_FILE_OUTPUT_FLAGS =
OFN_EXPLORER Or
OFN_HIDEREADONLY Or
OFN_OVERWRITEPROMPT
Const mlng_FILE_LOG_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_ERROR_FLAGS =
mlng_FILE_OUTPUT_FLAGS
Const mlng_FILE_DB_NEW_FLAGS =
mlng_FILE_OUTPUT_FLAGS

Const mstr_FILE_ALL_FILTER = "|All
Files (*.*)|*.*"
Const mstr_FILE_STEP_TEXT_FILTER
= "Query Files (*.*) & gsSqlFileSuffix & _
")|*" & gsSqlFileSuffix &
"|Command Script Files (*.*) &
gsCmdFileSuffix & _
")|*" & gsCmdFileSuffix
Const
mstr_FILE_OUTPUT_COMPARE_FILTE
R = "Text Files (*.txt)|*.txt"
Const mstr_FILE_OUTPUT_FILTER =
"Output Files (*.out)|*.out"
Const mstr_FILE_LOG_FILTER = "Log
Files (*.log)|*.log"
Const mstr_FILE_ERROR_FILTER =
"Error Files (*.err)|*.err"
Const mstr_FILE_DB_FILTER =
"Stepmaster Workspace Files (*.*) &
gsDefDBFileExt & ")|*" & gsDefDBFileExt

Dim strFileName As String

On Error GoTo CallFileDialogErr

Select Case intFileType
Case gintStepTextFile
strFileName =
ShowFileOpenDialog( _

mstr_FILE_STEP_TEXT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _

mlng_FILE_STEP_TEXT_FLAGS, _
strDefaultFile)

```

```

Case gintOutputCompareFile
strFileName = ShowFileOpenDialog( _

mstr_FILE_OUTPUT_COMPARE_FILTER
& mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _

mlng_FILE_OUTPUT_COMPARE_FLAGS,
_
strDefaultFile)

Case gintOutputFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

' Case gintLogFile
' strFileName = ShowFileOpenDialog( _
' mstr_FILE_LOG_FILTER &
' mstr_FILE_ALL_FILTER, _
' s_DLG_TITLE_OPEN, _
' mlng_FILE_LOG_FLAGS, _
' strDefaultFile)

Case gintErrorFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_ERROR_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_ERROR_FLAGS, _
strDefaultFile)

Case gintDBFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintDBFileNew
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_NEW, _
mlng_FILE_DB_NEW_FLAGS, _
strDefaultFile)

Case gintImportFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_IMPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case gintExportFile
strFileName = ShowFileOpenDialog( _
mstr_FILE_DB_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_EXPORT, _
mlng_FILE_DB_FLAGS, _
strDefaultFile)

Case Else
BugAssert True, "Incorrect file type
passed in."
' Default processing will be for the
output file
strFileName = ShowFileOpenDialog( _

```

```

mstr_FILE_OUTPUT_FILTER &
mstr_FILE_ALL_FILTER, _
s_DLG_TITLE_OPEN, _
mlng_FILE_OUTPUT_FLAGS, _
strDefaultFile)

End Select
CallFileDialog = strFileName

Exit Function

CallFileDialogErr:
CallFileDialog = gstrEmptyString
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
gstrSource = mstrModuleName &
"CallFileDialog"
Call ShowError(errBrowseFailed)

End Function

VERSION 5.00
Begin VB.Form frmSplash
BorderStyle = 3 'Fixed Dialog
ClientHeight = 4710
ClientLeft = 45
ClientTop = 45
ClientWidth = 7455
ControlBox = 0 'False
Icon = "frmSplash.frx":0000
LinkTopic = "Form1"
LockControls = -1 'True
MaxButton = 0 'False
MinButton = 0 'False
ScaleHeight = 4710
ScaleWidth = 7455
ShowInTaskbar = 0 'False
StartUpPosition = 2 'CenterScreen
Visible = 0 'False
Begin VB.Frame fraMainFrame
Height = 4590
Left = 45
TabIndex = 0
Top = -15
Width = 7380
Begin VB.PictureBox picLogo
Height = 2385
Left = 510
Picture = "frmSplash.frx":0442
ScaleHeight = 2325
ScaleWidth = 1755
TabIndex = 1
Top = 855
Width = 1815
End
Begin VB.Label lblReserved
AutoSize = -1 'True
Caption = "All Rights Reserved."
Height = 195
Left = 5520
TabIndex = 8
Top = 4080
Width = 1440
End
Begin VB.Label lblCopyright
AutoSize = -1 'True
Caption = "Copyright © 1998"
BeginProperty Font
Name = "Arial"
Size = 8.25
Charset = 0
Weight = 400
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False

```

```

EndProperty
Height = 210
Left = 5550
TabIndex = 7
Tag = "Copyright"
Top = 3850
Width = 1380
WordWrap = -1 'True
End
Begin VB.Label lblCompany
AutoSize = -1 'True
Caption = "Microsoft
Corporation"
BeginProperty Font
Name = "Arial"
Size = 8.25
Charset = 0
Weight = 400
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False
EndProperty
Height = 210
Left = 5460
TabIndex = 6
Tag = "Company"
Top = 3640
Width = 1560
End
Begin VB.Label lblRestrictions
AutoSize = -1 'True
Caption = "See License
Agreement for Restrictions"
Height = 195
Left = 460
TabIndex = 5
Top = 4080
Width = 2790
End
Begin VB.Label lblProductName
AutoSize = -1 'True
Caption = "StepMaster"
BeginProperty Font
Name = "Arial"
Size = 32.25
Charset = 0
Weight = 700
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False
EndProperty
Height = 765
Left = 2670
TabIndex = 4
Tag = "Product"
Top = 1200
Width = 3495
End
Begin VB.Label lblVersion
Alignment = 1 'Right Justify
AutoSize = -1 'True
Caption = "Version 2.4"
BeginProperty Font
Name = "Arial"
Size = 12
Charset = 0
Weight = 700
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False
EndProperty
Height = 285
Left = 4800
TabIndex = 3
Tag = "Version"

```

```

Top = 2040
Width = 1275
End
Begin VB.Label lblWarning
AutoSize = -1 'True
Caption = "Do Not Redistribute"
BeginProperty Font
Name = "Arial"
Size = 8.25
Charset = 0
Weight = 400
Underline = 0 'False
Italic = 0 'False
Strikethrough = 0 'False
EndProperty
Height = 210
Left = 480
TabIndex = 2
Tag = "Warning"
Top = 3850
Width = 1380
End
End
Attribute VB_Name = "frmSplash"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE: frmSplash.frm
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Splash screen for StepMaster
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private Sub Form_Load()
' lblVersion.Caption = "Version " &
App.Major & "." & App.Minor & "." &
App.Revision
lblProductName.Caption = App.Title
lblVersion.Caption = GetVersionString
End Sub

VERSION 5.00
Begin VB.Form frmWorkspaceOpen
BorderStyle = 3 'Fixed Dialog
Caption = "Open Workspace"
ClientHeight = 2550
ClientLeft = 45
ClientTop = 330
ClientWidth = 4695
LinkTopic = "Form1"
LockControls = -1 'True
MaxButton = 0 'False
MinButton = 0 'False
ScaleHeight = 2550
ScaleWidth = 4695
ShowInTaskbar = 0 'False
StartupPosition = 1 'CenterOwner
Begin VB.CommandButton cmdOK
Caption = "OK"
Default = -1 'True
Height = 375
Left = 2160
TabIndex = 2

```

```

Top = 2040
Width = 1095
End
Begin VB.CommandButton cmdCancel
Cancel = -1 'True
Caption = "Cancel"
Height = 375
Left = 3360
TabIndex = 3
Top = 2040
Width = 1095
End
Begin VB.ListBox lstWorkspaces
Height = 1425
ItemData =
"frmWorkspaceOpen.frx":0000
Left = 240
List = "frmWorkspaceOpen.frx":0002
MultiSelect = 2 'Extended
TabIndex = 1
Top = 480
Width = 4215
End
Begin VB.Label lblWorkspaces
AutoSize = -1 'True
Caption = "Workspace"
Height = 195
Left = 240
TabIndex = 0
Top = 120
Width = 825
End
End
Attribute VB_Name = "frmWorkspaceOpen"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = False
Attribute VB_PredeclaredId = True
Attribute VB_Exposed = False
' FILE: frmWorkspaceOpen.frm
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Used to display a list of all
workspaces in a
' workspace definition file for Open, Import,
Export
' and Run (in SMRunOnly) workspace
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit
#If RUN_ONLY Then
Private WithEvents cRunOnlyInst As cRunOnly
Attribute cRunOnlyInst.VB_VarHelpID = -1

Private Sub cRunOnlyInst_Done()
ShowFree
End Sub

Private Sub Run()
Dim iIndex As Integer

Set cRunOnlyInst = New cRunOnly

For iIndex = 0 To Me.lstWorkspaces.ListCount -
1
If Me.lstWorkspaces.Selected(iIndex) Then
ShowBusy
cRunOnlyInst.WorkspaceId =
Me.lstWorkspaces.ItemData(Me.lstWorkspaces.List
Index)

```

```

cRunOnlyInst.WspName =
Me.lstWorkspaces.List(Me.lstWorkspaces.L
istIndex)
cRunOnlyInst.RunWsp
End If
Next iIndex

End Sub

#End If

Private Sub cmdCancel_Click()

Unload Me

End Sub

Private Sub cmdOK_Click()

#If RUN_ONLY Then
Call Run
#Else
Call WorkspaceOpenOk
#End If

End Sub

Private Sub lstWorkspaces_DblClick()

' A double click on the workspaces list
box is considered
' equivalent to selecting an item in the list
and then selecting
' the OK command
Call cmdOK_Click

End Sub

Attribute VB_Name = "IteratorCommon"
' FILE: IteratorCommon.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains functionality
common across StepMaster and
' SMRunOnly, pertaining to iterators
' Specifically, functions to read
iterators records
' in the workspace, load them in an
array and so on.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"IteratorCommon."

Public Const gintMinIteratorSequence As
Integer = 0

Public Sub RangeComplete(vntIterators As
Variant)
' This is a debug procedure
' Checks if the from, to and step values
are present in
' the array

Dim bReset As Byte

```

```

Dim bShift As Byte
Dim lngIndex As Long

' Set the three lowest order bits to 1
bReset = 7

BugAssert IsArray(vntIterators) And Not
IsEmpty(vntIterators), _
"Iterators not specified!"

For lngIndex = LBound(vntIterators) To _
UBound(vntIterators)
bShift = 1
bShift = bShift * (2 ^
(vntIterators(lngIndex).IteratorType - 1))

bReset = bReset Xor bShift
Next lngIndex

' Assert that all the elements are present
BugAssert bReset = 0, "Range not
completely specified!"

End Sub

Public Sub LoadIteratorsForWsp(cStepsCol As
cArrSteps, _
ByVal lngWorkspaceId As Long,
rstStepsInWsp As Recordset)
' Initializes the step records in with all the
iterator
' values for each step

Dim recIterators As Recordset

On Error GoTo LoadIteratorsForWspErr

#If QUERY_ALL Then
Dim dtStart As Date

dtStart = Now
Set recIterators =
ReadWspIterators(lngWorkspaceId)

Call LoadIteratorsArray(cStepsCol,
recIterators)

recIterators.Close

BugMessage "QueryAll Read + load took: "
& CStr(DateDiff("s", dtStart, Now))

#Else
Dim dtStart As Date
Dim qyIt As DAO.QueryDef
Dim strSql As String

dtStart = Now
If rstStepsInWsp.RecordCount = 0 Then
Exit Sub
End If

' This method has the advantage that if the
steps are queried right, everything else follows
sql = "Select step_id, version_no, type,
iterator_value, " & _
" sequence_no " & _
" from iterator_values " & _
" where step_id = [s_id] " & _
" and version_no = [ver_no] "

' Order the iterators by sequence within a
step
sql = sql & " order by sequence_no "

```

```

Set qyIt =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
rstStepsInWsp.MoveFirst

While Not rstStepsInWsp.EOF

qyIt.Parameters("s_id").Value =
rstStepsInWsp!step_id
qyIt.Parameters("ver_no").Value =
rstStepsInWsp!version_no

Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

Call LoadIteratorsArray(cStepsCol,
recIterators)
recIterators.Close

rstStepsInWsp.MoveNext
Wend

qyIt.Close

BugMessage "Query step at a time Read + load
took: " & CStr(DateDiff("s", dtStart, Now))

#End If

Exit Sub

LoadIteratorsForWspErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadIteratorsForWsp"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, _
gstrSource, _
LoadResString(errLoadRsInArrayFailed)

End Sub

Private Function ReadWspIterators(ByVal
lngWorkspaceId As Long) As Recordset

' This function will return a recordset that is
populated
' with the iterators for all the steps in a given
workspace

Dim recIterators As Recordset
Dim qyIt As DAO.QueryDef
Dim strSql As String

On Error GoTo ReadWspIteratorsErr
gstrSource = mstrModuleName &
"ReadWspIterators"

strSql = "Select i.step_id, i.version_no, " & _
" i.type, i.iterator_value, " & _
" i.sequence_no " & _
" from iterator_values i, att_steps a " & _
" where i.step_id = a.step_id " & _
" and i.version_no = a.version_no " & _
" and a.workspace_id = [w_id] " & _
" and a.archived_flag = [archived] "

' Find the highest X-component of the version
number
strSql = strSql & " AND cint( mid( a.version_no,
1, instr( a.version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator &
gstrDQ & " ) - 1 ) ) ) " & _
" from att_steps AS d " & _

```

```

" WHERE a.step_id = d.step_id ) "

' Find the highest Y-component of the
version number for the highest X-
component
strSql = strSql & " AND cint( mid(
a.version_no, instr( a.version_no, " &
gstrDQ & gstrVerSeparator & gstrDQ & " )
+ 1 ) ) = " & _
" ( select max( cint( mid( version_no,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) + 1 ) ) ) "
& _
" from att_steps AS b " & _
" Where a.step_id = b.step_id " & _
" AND cint( mid( version_no, 1, instr(
version_no, " & gstrDQ & gstrVerSeparator
& gstrDQ & " ) - 1 ) ) = " & _
" ( select max( cint( mid( version_no, 1,
instr( version_no, " & gstrDQ &
gstrVerSeparator & gstrDQ & " ) - 1 ) ) ) "
& _
" from att_steps AS c " & _
" WHERE a.step_id = c.step_id ) ) "

' Order the iterators by sequence within a
step
strSql = strSql & " order by i.step_id,
i.sequence_no "

Set qyIt =
dbsAttTool.CreateQueryDef(gstrEmptyStrin
g, strSql)
qyIt.Parameters("w_id").Value =
lngWorkspaceId
qyIt.Parameters("archived").Value =
False

Set recIterators =
qyIt.OpenRecordset(dbOpenSnapshot)

qyIt.Close
Set ReadWspIterators = recIterators

Exit Function

ReadWspIteratorsErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errReadDataFailed, _
gstrSource,
LoadResString(errReadDataFailed)

End Function
Private Sub LoadIteratorsArray(cStepsCol
As cArrSteps, _
recIterators As Recordset)
' Initializes the step records with the
iterators for
' the step

Dim cNewIt As cIterator
Dim cStepRec As cStep
Dim lngStepId As Long

On Error GoTo LoadIteratorsArrayErr
gstrSource = mstrModuleName &
"LoadIteratorsArray"

If recIterators.RecordCount = 0 Then
Exit Sub

```

```

End If

recIterators.MoveFirst
While Not recIterators.EOF
Set cNewIt = New cIterator

lngStepId =
CLng(ErrorOnNullField(recIterators,
"step_id"))
If Not cStepRec Is Nothing Then
If cStepRec.StepId <> lngStepId Then
Set cStepRec =
cStepsCol.QueryStep(lngStepId)
End If
Else
Set cStepRec =
cStepsCol.QueryStep(lngStepId)
End If

' Initialize iterator values
cNewIt.IteratorType =
CInt(ErrorOnNullField(recIterators, "type"))
cNewIt.Value =
CStr(ErrorOnNullField(recIterators,
"iterator_value"))
cNewIt.SequenceNo =
CInt(ErrorOnNullField(recIterators,
"sequence_no"))

' Add this record to the array of iterators
cStepRec.LoadIterator cNewIt

Set cNewIt = Nothing
recIterators.MoveNext
Wend

Exit Sub

LoadIteratorsArrayErr:
LogErrors Errors
gstrSource = mstrModuleName &
"LoadIteratorsArray"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, _
gstrSource, _

LoadResString(errLoadRsInArrayFailed)

End Sub

Attribute VB_Name = "MsgConfirm"
' FILE: MsgConfirm.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: Contains constants for
confirmation messages that
' will be displayed by StepMaster
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' A public enum containing the codes for all the
confirmation
' messages that will be used by the project -
each of the codes
' has the prefix, con
Public Enum conConfirmMsgCodes
conWspDelete = 2000
conSave

```

```

conStopRun
conSaveConnect
conSaveDB
End Enum

' A public enum containing the titles for all the
confirmation
' messages that will be used by the project - each of
the codes
' has the prefix, cont - most confirmation message
codes will
' have a corresponding title code in here
Public Enum conConfirmMsgTitleCodes
contWspDelete = 3000
contSave
contStopRun
contSaveConnect
contSaveDB
End Enum

Attribute VB_Name = "OpenFiles"
' FILE: OpenFiles.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module holds a list of all files
that have been
' opened by the project. This module is
needed since there
' is no way to share static data between
different instances
' of a class.
' Many procedure in this module do not do
any error handling -
' this is 'coz it is also used by procedures
that log error
' messages and any error handler will erase
the collection
' of errors!

' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Used to indicate the source module name when
errors
' are raised by this class
Private Const mstrModuleName As String =
".OpenFiles."

Private mOpenFiles As cNodeCollections

Private Const mstrTempDir As String = "\Temp\"

' The maximum number of temporary files that we
can create in a
' session
Private Const mlngMaxFileIndex As Long =
999999
Private Const mstrFileIndexFormat As String =
"000000"
Private Const mstrTempFilePrefix As String =
"SM"
Private Const mstrTempFileSuffix As String =
".cmd"

Private Const merrFileNotFound As Long = 76
Private Function GetFileHandle(strFileName) As
cFileInfo

Dim lngIndex As Long

```

<pre> Dim blnFileOpen As Boolean If Not mOpenFiles Is Nothing Then blnFileOpen = False For lngIndex = 0 To mOpenFiles.Count - 1 If mOpenFiles(lngIndex).FileName = strFileName Then blnFileOpen = True Exit For End If Next lngIndex If blnFileOpen Then Set GetFileHandle = mOpenFiles(lngIndex) Else Set GetFileHandle = Nothing End If Else Set GetFileHandle = Nothing End If End Function Private Function GetTempFileDir() As String Dim strTempFileDir As String On Error GoTo GetTempFileDirErr strTempFileDir = gstrProjectPath & mstrTempDir If StringEmpty(Dir\$(strTempFileDir, vbDirectory)) Then MkDir strTempFileDir End If GetTempFileDir = strTempFileDir Exit Function GetTempFileDirErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "GetTempFileDir" On Error GoTo 0 Err.Raise vbObjectError + errProgramError, gstrSource, _ LoadResString(errProgramError) End Function Public Function MakePathValid(strFileName As String) As String ' Checks if the passed in file path is valid Dim strFileDir As String Dim strTempDir As String Dim strTempFile As String Dim intPos As Integer Dim intStart As Integer On Error GoTo MakePathValidErr gstrSource = mstrModuleName & "MakePathValid" strTempFile = strFileName intPos = InstrR(strFileName, gstrFileSeparator) </pre>	<pre> If intPos > 0 Then strFileDir = Left\$(strTempFile, intPos - 1) If StringEmpty(Dir\$(strFileDir, vbDirectory)) Then ' Loop through the entire path starting at the root ' since Mkdir can create only one level of sub-directory ' at a time intStart = InStr(strFileDir, gstrFileSeparator) Do While strTempDir <> strFileDir If intStart > 0 Then strTempDir = Left\$(strFileDir, intStart - 1) Else strTempDir = strFileDir End If If StringEmpty(Dir\$(strTempDir, vbDirectory)) Then ' If the specified directory doesn't exist, try to ' create it. MkDir strTempDir Else ' The directory exists - go to it's sub-directory End If intStart = InStr(intStart + 1, strFileDir, gstrFileSeparator) Loop ' Sanity check If StringEmpty(Dir\$(strFileDir, vbDirectory)) Then ' We were unable to create the file directory ShowError errCreateDirectoryFailed, gstrSource, _ strFileDir, DoWriteError:=False MakePathValid = gstrEmptyString Else MakePathValid = strTempFile End If Else ' The specified directory exists - we should be able ' to create the output file in it MakePathValid = strTempFile End If Else ' The user has only specified a filename - VB will try ' to create it in the current directory MakePathValid = strTempFile End If Exit Function MakePathValidErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "MakePathValid" ' Log the filename for debug Call WriteError(errInvalidFile, gstrSource, strTempFile) On Error GoTo 0 Err.Raise vbObjectError + errProgramError, gstrSource, _ LoadResString(errProgramError) </pre>	<pre> End Function Public Function OpenFileSM(strFileName As String) As Integer Dim intHFile As Integer Dim NewFileInfo As cFileInfo On Error GoTo OpenFileSMErr gstrSource = mstrModuleName & "OpenFileSM" If StringEmpty(strFileName) Then On Error GoTo 0 Err.Raise vbObjectError + errInvalidFile, gstrSource, _ LoadResString(errInvalidFile) End If If mOpenFiles Is Nothing Then Set mOpenFiles = New cNodeCollections End If Set NewFileInfo = GetFileHandle(strFileName) If NewFileInfo Is Nothing Then ' The file has not been opened yet ' If the filename has not been initialized, do not attempt to open it strFileName = MakePathValid(strFileName) If strFileName <> gstrEmptyString Then intHFile = FreeFile Open strFileName For Output Shared As intHFile Set NewFileInfo = New cFileInfo NewFileInfo.FileHandle = intHFile NewFileInfo.FileName = strFileName mOpenFiles.Load NewFileInfo Else ' Either the directory was invalid or s'thing failed ' Display the error to the user instead of trying ' to log to the file ShowError errInvalidFile, gstrSource, strFileName, _ DoWriteError:=False intHFile = 0 End If Else intHFile = NewFileInfo.FileHandle End If OpenFileSM = intHFile Exit Function OpenFileSMErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) ' The Open command failed for some reason - write an error ' and let the calling function handle the error ShowError errInvalidFile, gstrSource, strFileName, _ DoWriteError:=False OpenFileSM = 0 End Function Public Function CreateTempFile() As String Dim strTempFileDir As String Dim strTempFileName As String </pre>
---	--	---

```

Static lngLastFileIndex As Long

On Error GoTo CreateTempFileErr

strTempFileDir = GetTempFileDir()

Do
    If lngLastFileIndex =
mLngMaxFileIndex Then
        On Error GoTo 0
        Err.Raise vbObjectError +
errMaxTempFiles, gstrSource, _

LoadResString(errMaxTempFiles)
    End If

    lngLastFileIndex = lngLastFileIndex +
1

    strTempFileName =
mstrTempFilePrefix & _
        Format$(lngLastFileIndex,
mstrFileIndexFormat) & _
        mstrTempFileSuffix

    If Not
StringEmpty(Dir$(strTempFileDir &
strTempFileName)) Then
        ' Remove any files left over from a
previous run,
        ' if they still exist
        Kill strTempFileDir &
strTempFileName
    End If

    ' Looping in case the file delete doesn't go
through for
    ' some reason
    Loop While Not
StringEmpty(Dir$(strTempFileDir &
strTempFileName))

    CreateTempFile =
GetShortName(strTempFileDir)
    CreateTempFile = CreateTempFile &
strTempFileName

Exit Function

CreateTempFileErr:
    ' Log the error code raised by Visual
Basic
    Call LogErrors(Errors)
    gstrSource = gstrSource &
"CreateTempFile"
    On Error GoTo 0
    Err.Raise vbObjectError +
errProgramError, gstrSource, _
        LoadResString(errProgramError)

End Function
Public Sub CloseFileSM(strFileName As
String)
    Dim FileToClose As cFileInfo

    If Not mOpenFiles Is Nothing Then

        ' Get the handle to the open file, if it
exists
        Set FileToClose =
GetFileHandle(strFileName)

        If Not FileToClose Is Nothing Then
            Close FileToClose.FileHandle

```

```

' Remove the file info from the
collection of open files
mOpenFiles.Unload
FileToClose.Position
    End If
End If

End Sub
Public Sub CloseOpenFiles()
    Dim lIndex As Long

    If Not mOpenFiles Is Nothing Then
        For lIndex = mOpenFiles.Count - 1 To 0
            CloseFileSM
(mOpenFiles(lIndex).FileName)
        Next lIndex
    End If

End Sub

Attribute VB_Name = "ParameterCommon"
' FILE:    ParameterCommon.bas
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  Contains functionality common
across StepMaster and
'          SMRunOnly, pertaining to parameters
'          Specifically, functions to load
parameter records
'          in an array.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"ParameterCommon."

Public Sub
LoadRecordsetInParameterArray(rstWorkSpac
eParameters As Recordset, _
    cParamCol As cArrParameters)

    Dim cNewParameter As cParameter

    On Error GoTo
LoadRecordsetInParameterArrayErr

    If rstWorkSpaceParameters.RecordCount =
0 Then
        Exit Sub
    End If

    rstWorkSpaceParameters.MoveFirst
    While Not rstWorkSpaceParameters.EOF

        Set cNewParameter = New cParameter

        ' Initialize parameter values
        cNewParameter.ParameterId =
rstWorkSpaceParameters.Fields(0)

        ' Call a procedure to raise an error if
mandatory fields are
        ' null.
        cNewParameter.ParameterName = CStr( _
ErrorOnNullField(rstWorkSpaceParameters,
"parameter_name"))

```

```

cNewParameter.ParameterValue =
CheckForNullField( _
    rstWorkSpaceParameters,
"parameter_value")
    cNewParameter.WorkspaceId = CStr( _

ErrorOnNullField(rstWorkSpaceParameters,
FLD_ID_WORKSPACE))
    cNewParameter.ParameterType = CStr( _

ErrorOnNullField(rstWorkSpaceParameters,
"parameter_type"))
    cNewParameter.Description =
CheckForNullField( _
    rstWorkSpaceParameters, "description")

    cParamCol.Load cNewParameter

    Set cNewParameter = Nothing
    rstWorkSpaceParameters.MoveNext
Wend

Exit Sub

LoadRecordsetInParameterArrayErr:
    LogErrors Errors
    gstrSource = mstrModuleName &
"LoadRecordsetInParameterArray"
    On Error GoTo 0
    Err.Raise vbObjectError +
errLoadRsInArrayFailed, gstrSource, _
        LoadResString(errLoadRsInArrayFailed)
End Sub
Attribute VB_Name = "Public"
' FILE:    Public.bas
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  This module contains all the public
constants for this project
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)

Option Explicit

Public Const gsVersion01 As String = "0.1"
Public Const gsVersion10 As String = "1.0"
Public Const gsVersion21 As String = "2.1"
Public Const gsVersion23 As String = "2.3"
Public Const gsVersion24 As String = "2.4"
Public Const gsVersion241 As String = "2.4.1"
Public Const gsVersion242 As String = "2.4.2"
Public Const gsVersion243 As String = "2.4.3"
Public Const gsVersion25 As String = "2.5"
Public Const gsVersion251 As String = "2.5.1"
Public Const gsVersion253 As String = "2.5.3"
Public Const gsVersion254 As String = "2.5.4"
Public Const gsVersion255 As String = "2.5.5"
Public Const gsVersion As String = gsVersion255

' The same form is used for the creation of new
nodes and
' updates to existing nodes (where each node can be
a parameter,
' global step, etc.) A tag is set on each flag is used to
indicate
' whether it is being called in the insert or update
mode. The
' constants for these modes are defined below
Public Const gstrInsertMode = "Insert"
Public Const gstrUpdateMode = "Update"
Public Const gstrPropertiesMode = "View"

```

<pre> Public Const gstrEmptyString = "" Public Const gstrSQ = """" Public Const gstrDQ = """"" Public Const gstrVerSeparator = "." Public Const gstrBlank = " " ' Constants used to indicate type of node being processed ' The constants for the different objects correspond to the ' indexes in the menu control arrays (for both the main and popup ' menus) that are used to create new objects. That way we can ' use the index passed in by the click event to determine the ' type of node being processed Public Const gintWorkspace = 1 ' Decided to leave it here after some debate over whether it ' actually belongs in the cStep class definition Public Enum gintStepType gintGlobalStep = 3 gintManagerStep gintWorkerStep End Enum Public Const gintRunManager = 6 Public Const gintRunWorker = 7 Public Enum gintParameterNodeType gintParameter = 8 gintNodeParamConnection gintNodeParamExtension gintNodeParamBuiltIn End Enum ' Leave some constants free for newer types of parameters (?) Public Const gintConnectionDtl = 15 Public Enum gintLabelNodeType gintGlobalsLabel = 21 gintParameterLabel gintParamConnectionLabel gintParamExtensionLabel gintParamBuiltInLabel gintConnDtlLabel gintGlobalStepLabel gintStepLabel End Enum Public Enum ConnectionType ConnTypeStatic = 1 ConnTypeDynamic End Enum Public Const giDefaultConnType As Integer = ConnTypeStatic ' The constants defined below are used to identify the different ' tabs. If any more step properties and thereby tabs are added ' to the tabbed dialog on the Step Properties form, they should ' be defined here and accessed in the code only using these ' pre-defined constants ' Note: These constants will mainly be used by the functions that ' initialize, customize and display the Step Properties form </pre>	<pre> Public Const gintDefinition = 0 Public Const gintExecution = 1 Public Const gintMgrDefinition = 2 Public Const gintPreExecutionSteps = 3 Public Const gintPostExecutionSteps = 4 Public Const gintFileLocations = 5 ' These constants correspond to the index values in the imagelist ' associated with the tree view control. The imagelist contains ' the icons that will be displayed for each node. Public Enum TreeImages gintImageWorkspaceClosed = 1 gintImageWorkspaceOpen gintImageLabelClosed gintImageLabelOpen gintImageManagerClosedDis gintImageManagerClosedEn gintImageManagerOpenDis gintImageManagerOpenEn gintImageWorkerDis gintImageWorkerEn gintImageGlobalClosed gintImageGlobalOpen gintImageParameter gintImageRun gintImagePending gintImageStop gintImageDisabled gintImageAborted gintImageFailed End Enum ' Public variable used to indicate the name of the function ' that raises an error Public gstrSource As String ' Public instances of the different collections Public gcParameters As cArrParameters Public gcSteps As cArrSteps Public gcConstraints As cArrConstraints Public gcConnections As cConnections Public gcConnDtls As cConnDtls ' Public constants for the index values of the different toolbar ' options. Will be used while dynamically enabling/disabling ' these options. Public Const tbNew = 1 Public Const tbOpen = 2 Public Const tbSave = 3 Public Const tbCut = 5 Public Const tbCopy = 6 Public Const tbPaste = 7 Public Const tbDelete = 8 Public Const tbProperties = 10 Public Const tbRun = 11 Public Const tbStop = 12 ' The initial version # Public Const gstrMinVersion As String = "0.0" Public Const gstrGlobalParallelism As String = "0" Public Const gintMinParallelism As Integer = 1 Public Const gintMaxParallelism As Integer = 100 ' Constant for the minimum identifier, used for all identifier, viz. </pre>	<pre> ' step, workspace, etc. Public Const glMinId As Long = 1 Public Const glInvalidId As Long = -1 ' A parameter that has a special meaning to Stepmaster ' The system time will be substituted wherever it occurs ' (typically as a part of the error, log ... file names Public Const gstrTimeStamp As String = "TIMESTAMP" Public Const gstrEnvVarSeparator = "%" Public Const gstrFileSeparator = "\" Public Const gstrUnderscore = "_" ' Constants used by date and time formatting functions Public Const gsTimeSeparator = ":" Public Const gsDateSeparator = "-" Public Const gsMsSeparator = "." Public Const gsDtFormat = "00" Public Const gsYearFormat = "0000" Public Const gsTmFormat = "00" Public Const gsMSecondFormat = "000" ' Default nothing value for a date variable Public Const gdtmEmpty As Currency = 0 Public Const FMT_WSP_LOG_FILE As String = "yyyymmdd-hhnnss" Public gsContCriteria() As String ' Note: Update the initialization of gsExecutionStatus in Initialize() if the ' InstanceStatus values are modified - also the boundary checks Public gsExecutionStatus() As String Public Const gsConnTypeStatic As String = "Static" Public Const gsConnTypeDynamic As String = "Dynamic" #If RUN_ONLY Then Public Const gsCaptionRunWsp As String = "Run Workspace" #End If ' Valid operations on a cNode object Public Enum Operation QueryOp = 1 InsertOp = 2 UpdateOp = 3 DeleteOp = 4 End Enum Attribute VB_Name = "RunCommon" ' FILE: RunCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains common functions that are used during the execution ' of a workspace. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this class </pre>
--	--	---

```

Private Const mstrModuleName As String =
".RunCommon."

Public Function
GetInstanceItValue(cInstanceRec As
cInstance) As String

' Returns the iterator value for the
instance, if an
' iterator has been defined for it
Dim cStepIt As cRunCollt
Dim cRunIterator As cRunItNode

On Error GoTo GetInstanceItValueErr

' Since we create a dummy instance for
Disabled and Pending steps,
' doesn't make sense to look at their
iterators
If cInstanceRec.Status <> gintDisabled
And cInstanceRec.Status <> gintPending
Then
Set cStepIt = cInstanceRec.Iterators

If Not
StringEmpty(cInstanceRec.Step.IteratorNam
e) Then
If cStepIt.Count > 0 Then
Set cRunIterator = cStepIt(0)
BugAssert
cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName, _
"The first iterator in the
collection is the " & _
"one that has been defined for
the step."
If cRunIterator.IteratorName =
cInstanceRec.Step.IteratorName Then
GetInstanceItValue =
cRunIterator.Value
Else
GetInstanceItValue =
gstrEmptyString
End If
Else
GetInstanceItValue =
gstrEmptyString
End If
Else
GetInstanceItValue =
gstrEmptyString
End If
Else
GetInstanceItValue = gstrEmptyString
End If

Exit Function

GetInstanceItValueErr:
' Log the error code raised by Visual
Basic
Call LogErrors(Errors)
On Error GoTo 0
gstrSource = mstrModuleName &
"GetInstanceItValue"
Err.Raise vbObjectError +
errProgramError, gstrSource, _
LoadResString(errProgramError)

End Function

Attribute VB_Name = "RunInstHelper"
' FILE: RunInstHelper.bas

```

```

Microsoft TPC-H Kit Ver. 1.00
Copyright Microsoft, 1999
All Rights Reserved

'
'
'
'
' PURPOSE: This module contains helper
procedures that are called by
' cRunInst.cls
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Used to indicate the source module name
when errors
' are raised by this class
Private Const mstrModuleName As String =
"RunInstHelper."

' Should be equal to the number of steps
defined in cRunInst.cls
Public Const glngNumConcurrentProcesses As
Long = 99
Public Const gintBitsPerByte = 8
Public Function AnyStepRunning(cFreeSteps
As cVectorLng, arrFree() As Byte) As Boolean

Dim lngIndex As Long
Dim intPosInByte As Integer
Dim lngTemp As Long

' Check if there are any running instances to
wait for
If cFreeSteps.Count <>
glngNumConcurrentProcesses Then

' For every free step, reset the
corresponding element
' in the byte array to 0
For lngIndex = 0 To cFreeSteps.Count - 1

lngTemp = cFreeSteps(lngIndex) \
gintBitsPerByte
intPosInByte = cFreeSteps(lngIndex)
Mod gintBitsPerByte

arrFree(lngTemp) = arrFree(lngTemp)
Xor 2 ^ intPosInByte
Next lngIndex

AnyStepRunning = False

' Check if we have a non-zero bit in the
byte array
For lngIndex = LBound(arrFree) To
UBound(arrFree) Step 1
If arrFree(lngIndex) <> 0 Then
' We are waiting for a step to
complete
AnyStepRunning = True
Exit For
End If
Next lngIndex

Else
AnyStepRunning = False
End If

End Function

Public Function
OrderConstraints(vntTempCons() As Variant,
_

```

```

intConsType As ConstraintType) As Variant
' Returns a variant containing all the constraint
records in the order
' in which they should be executed

Dim vntTemp As Variant
Dim lngOuter As Long
Dim lngInner As Long
Dim cTempConstraint As cConstraint
Dim cConstraints() As cConstraint
Dim lngConsCount As Long
Dim lngLbound As Long
Dim lngUbound As Long
Dim lngStep As Long

On Error GoTo OrderConstraintsErr

If intConsType = gintPreStep Then
' Since we are travelling up and we need to
execute the constraints
' for the top-level steps first, reverse the order
that they
' have been stored in the array
lngLbound = UBound(vntTempCons)
lngUbound = LBound(vntTempCons)
lngStep = -1
Else
lngLbound = LBound(vntTempCons)
lngUbound = UBound(vntTempCons)
lngStep = 1
End If

lngConsCount = 0

For lngOuter = lngLbound To lngUbound Step
lngStep
vntTemp = vntTempCons(lngOuter)

If Not IsEmpty(vntTemp) Then
' Each of the elements is an array
For lngInner = LBound(vntTemp) To
UBound(vntTemp) Step 1
If Not IsEmpty(vntTemp(lngInner)) Then
Set cTempConstraint =
vntTemp(lngInner)

If Not cTempConstraint Is Nothing
Then
ReDim Preserve
cConstraints(lngConsCount)
Set cConstraints(lngConsCount) =
cTempConstraint
lngConsCount = lngConsCount + 1
End If
End If
Next lngInner
End If
Next lngOuter

' Set the return value of the function to the array
of
' constraints that has been built above
If lngConsCount = 0 Then
OrderConstraints = Empty
Else
OrderConstraints = cConstraints()
End If

Exit Function

OrderConstraintsErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0

```



```

Err.Raise vbObjectError +
errExecInstanceFailed, _
    mstrModuleName,
LoadResString(errExecInstanceFailed)

End Function
Attribute VB_Name = "ShellSM"
' FILE: ShellSM.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains a
function that creates a process and
' waits for it to complete.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit

Public Function SyncShell(CommandLine
As String, Optional Timeout As Long, _
Optional WaitForInputIdle As Boolean)
As Boolean

Dim proc As
PROCESS_INFORMATION
Dim Start As STARTUPINFO
Dim ret As Long
Dim nMilliseconds As Long

BugMessage "Executing: " &
CommandLine
If Timeout > 0 Then
nMilliseconds = Timeout
Else
nMilliseconds = INFINITE
End If

'Initialize the STARTUPINFO structure:
Start.cb = Len(Start)
Start.dwFlags =
STARTF_USESHOWWINDOW
Start.wShowWindow =
SW_SHOWMINNOACTIVE

'Start the shelled application:
CreateProcessA 0&, CommandLine, 0&,
0&, 1&, _
NORMAL_PRIORITY_CLASS, 0&,
0&, Start, proc

If WaitForInputIdle Then
'Wait for the shelled application to
finish setting up its UI:
ret = InputIdle(proc.hProcess,
nMilliseconds)
Else
'Wait for the shelled application to
terminate:
ret =
WaitForSingleObject(proc.hProcess,
nMilliseconds)
End If

CloseHandle proc.hProcess

'Return True if the application finished.
Otherwise it timed out or erred.
SyncShell = (ret = WAIT_OBJECT_0)
End Function

VERSION 1.0 CLASS
BEGIN

```

```

MultiUse = -1 'True
END
Attribute VB_Name = "cArrConstraints"
Attribute VB_GlobalNameSpace = False
Attribute VB_Creatable = True
Attribute VB_PredeclaredId = False
Attribute VB_Exposed = False
' FILE:Attribute VB_Name = "SMErr"
' FILE: SMErr.bas
' Microsoft TPC-H Kit Ver. 1.00
' Copyright Microsoft, 1999
' All Rights Reserved
'
' PURPOSE: This module contains error
code for all the errors that are
' raised by StepMaster.
' Contact: Reshma Tharamal
(reshmat@microsoft.com)
Option Explicit

' A public enum containing the codes for all the
error
' messages that will be displayed by the project
- each
' of the codes has the prefix, err
Public Enum errErrorConstants
errParameterIdInvalid = 1000
errParameterNameMandatory
errParameterInsertFailed
errStepLabelOrTextOrFileRequired
errMandatoryNodeTextMissing
errParameterUpdateFailed
errDupConnDtlName
errDummy14
errContCriteriaMandatory
errContCriteriaNullForGlobal
errContCriteriaInvalid = 1010
errParamSeparatorMissing
errStepTextOrTextFileMandatory
errStepTextOrFile
errEnabledFlagFalseForGlobal
errEnabledFlagLetFailed
errDegParallelismNullForGlobal
errInvalidDegParallelism
errExecutionMechanismInvalid
errExecutionMechanismLetFailed
errStepLevelNull = 1020
errStepLevelZeroForGlobal
errStepLevelLetFailed
errRowCountNumeric
errConnNameInvalid
errTimeoutNumeric
errResetConnPropertiesFailed
errFailureThresholdNumeric
errConnectionUpdateFailed
errGlobalRunMethodMandatory
errGlobalRunMethodNull = 1030
errGlobalRunMethodInvalid
errGlobalRunMethodLetFailed
errNoTrueOption
errGetOptionFailed
errSetEnabled
errStepLabelTextAndFileNull
errInvalidNodeType
errSetOptionFailed
errQueryParameterFailed
errParamNotFound = 1040
errQueryStepFailed
errStepNotFound
errReadFromScreenFailed
errCopyPropertiesToFormFailed
errMandatoryFieldNull
errUnableToCheckNull

```

```

errUpgradeFailed
errFindStepSequenceFailed
errFindParentStepIdFailed
errCircularReference = 1050
errAddStepFailed
errModifyStepFailed
errDeleteColumnFailed
errFindPositionFailed
errDeleteStepFailed
errRunExistsForStepFailed
errCreateNewParentFailed
errInsertNewStepVersionFailed
errCreateNewStepFailed
errDuplicateParameterName = 1060
errCheckDupParameterNameFailed
errConstraintTypeInvalid
errConstraintTypeLetFailed
errAddConstraintFailed
errWorkspaceIdMandatory
errInvalidWorkspaceData
errGetWorkspaceDetailsFailed
errNoWorkspaceLoaded
errWorkspaceAlreadyOpen
errDuplicateWorkspaceName = 1070
errWorkspaceNameMandatory
errWorkspaceNameSetFailed
errWorkspaceIdInvalid
errWorkspaceIdSetFailed
errWorkspaceInsertFailed
errWorkspaceDeleteFailed
errWorkspaceUpdateFailed
errInvalidFile
errCheckWorkspaceOpenFailed
errWriteFailed = 1080
errDeleteParameterRecordFailed
errUnableToLogOutput
errDeleteDBRecordFailed
errRunExistsForWorkspaceFailed
errClearHistoryFailed
errCreateDBFailed
errImportWspFailed
errStepModifyFailed
errStepDeleteFailed
errDummy3 = 1090
errUnableToGetWorkspace
errInvalidNode
errUnableToRemoveSubtree
errSetFileNameFailed
errStepTypeInvalid
errObjectMandatory
errBuiltInUpdateOnly
errInvalidStep
errTypeOfStepFailed
errGetParentKeyFailed = 1100
errLabelTextAndFileCheckFailed
errStepTextAndFileNull
errTextOrFileCheckFailed
errParentStepManager
errDeleteSubStepsFailed
errWorkspaceNameDuplicateFailed
errNewConstraintVersionFailed
errDeleteStepConstraintsFailed
errOldVersionMandatory
errLoadConstraintsInListFailed = 1110
errLoadGlobalStepsFailed
errDeleteConstraintFailed
errUpdateConstraintFailed
errConstraintIdInvalid
errConstraintIdSetFailed
errGlobalStepIdInvalid
errGlobalStepIdSetFailed
errUpdateVersionFailed
errQueryAdjacentConsFailed
errConstraintNotFound = 1120
errQueryConstraintFailed

```

errSetDBBeforeLoad
errLoadDataFailed
errLoadRsInArrayFailed
errConstraintsForStepFailed
errPreConstraintsForStepFailed
errPostConstraintsForStepFailed
errExecuteConstraintMethodFailed
errIdOrKeyMandatory
errInListFailed = 1130
errUnableToWriteChanges
errQuickSortFailed
errCheckParentValidFailed
errLogErrorFailed
errCopyListFailed
errConnected
errVersionMismatch
errStepNodeFailed
errWorkspaceSelectedFailed
errIdentifierSelectedFailed = 1140
errCheckForNullFieldFailed
errInstanceInUse
errSetVisiblePropertyFailed
errExportWspFailed
errMakeKeyValidFailed
errDummy16
errRunApplicationFailed
errStepLabelUnique
errDeleteSingleFile
errMakeIdentifierValidFailed = 1150
errTypeOfNodeFailed
errConstraintCommandFailed
errOpenDbFailed
errInsertNewConstraintsFailed
errLoadPostExecuteStepsFailed
errLoadPreExecutionStepsFailed
errCreateNewNodeFailed
errDeleteNodeFailed
errDisplayPopupFailed
errDisplayPropertiesFailed = 1160
errUnableToCreateNewObject
errDiffFailed
errLoadWorkspaceFailed
errTerminateProcessFailed
errCompareFailed
errCreateConnectionFailed
errShowFormFailed
errAbortFailed
errDeleteParameterFailed
errUpdateViewFailed = 1170
errParameterNewFailed
errCopyNodeFailed
errCutNodeFailed
errCheckObjectValidFailed
errDeleteViewNodeFailed
errMainFailed
errNewStepFailed
errProcessStepModifyFailed
errCustomizeStepFormFailed
errInitializeStepFormFailed = 1180
errInsertStepFailed
errIncVersionYFailed
errIncVersionXFailed
errShowCreateStepFormFailed
errShowStepFormFailed
errStepNewFailed
errUnableToApplyChanges
errUnableToCommitChanges
errGetStepNodeTextFailed
errSelectGlobalRunMethodFailed = 1190
errConnectionNameMandatory
errUpdateStepFailed
errBrowseFailed
errDummy4
errDummy1
errDummy2

errDummy
errUnableToPreviewFile
errCopyWorkspaceFailed
errCopyParameterFailed = 1200
errGetStepTypeAndPositionFailed
errCopyStepFailed
errMandatoryParameterMissing
errDeleteWorkspaceRecordsFailed
errCreateDirectoryFailed
errConfirmDeleteOrMoveFailed
errCreateWorkspaceFailed
errTypeOfObjectFailed
errCreateNodeFailed
errCreateParameterFailed = 1210
errInsertParameterFailed
errCreateStepFailed
errNoConstraintsCreated
errCopyFailed
errCloneFailed
errCloneGlobalFailed
errCloneWorkerFailed
errCloneManagerFailed
errLetStepTypeFailed
errUnableToCloseWorkspace = 1220
errUnableToModifyWorkspace
errUnableToCreateWorkspace
errAddArrayElementFailed
errUpdateSequenceFailed
errCannotCopySubSteps
errSubStepsFailed
errModifyInArrayFailed
errUpdateParentVersionFailed
errGetNodeTextFailed
errAddToArrayFailed = 1230
errDeleteFromArrayFailed
errQueryIndexFailed
errCreateNewConstraintVersionFailed
errGetRootNodeFailed
errPopulateWspDetailsFailed
errLoadRsInTreeFailed
errAddNodeToTreeFailed
errMaxTempFiles
errMoveFailed
errRootNodeKeyInvalid = 1240
errNextNodeFailed
errBranchWillMove
errMoveBranchInvalid
errCreateIdRecordsetFailed
errIdentifierColumnFailed
errGetIdentifierFailed
errGetStepTypeFailed
errUpdateConstraintSeqFailed
errDelParamsInWspFailed
errDuplicateConnectionName = 1250
errOpenWorkspaceFailed
errShowWorkspaceNewFailed
errShowWorkspaceModifyFailed
errPopulateListFailed
errExploreNodeFailed
errInitializeListNodeFailed
errMakeListColumnsFailed
errRefreshViewFailed
errExploreFailed
errCollapseNodeFailed = 1260
errUnableToProcessListViewClick
errSetEnabledForStepFailed
errDisplayStepFormFailed
errSetEnabledPropertyFailed
errInvalidDB
errDeleteConnectionFailed
errInvalidOperation
errLetOperationFailed
errIdGetFailed
errCommitFailed = 1270
errSaveParametersInWspFailed

errDeleteArrayElementFailed
errSaveWorkspaceFailed
errInitializeFailed
errLoadInArrayFailed
errSaveStepsInWspFailed
errCommitStepFailed
errStepIdGetFailed
errUnloadFromArrayFailed
errValidateFailed = 1280
errTextEnteredFailed
errStepLabelMandatory
errTextAndFileNullForManager
errFailureDetailsNullForMgr
errSetTabOrderFailed
errSaveWspConstraintsFailed
errCommitConstraintFailed
errUnloadStepConstraintsFailed
errUnableToModifyMenu
errConfirmFailed = 1290
errInitSubItemsFailed
errUpdateListNodeFailed
errAddNodeFailed
errLoadListNodeFailed
errAddListNodeFailed
errExecutionFailed
errSetListViewStyleFailed
errSetCheckedFailed
errGetCheckedFailed
errUnableToProcessListViewDbClick = 1300
errDefaultPosition
errShellFailed
errOpenFileFailed
errSetTBar97Failed
errConnectFailed
errApiFailed
errRegEntryInvalid
errParseStringFailed
errConstraintsForWspFailed
errPostConstraintsForWspFailed = 1310
errPreConstraintsForWspFailed
errLoadWspPostExecuteStepsFailed
errLoadWspPreExecStepsFailed
errLoadConstraintsOnFormFailed
errQueryFailed
errPasteNodeFailed
errShowAllWorkspacesFailed
errMakeFieldValidFailed
errInitializeTree
errRootNodeFailed = 1320
errDirectionInvalid
errUnableToDetListProperty
errUnableToGetListData
errItemNotFound
errItemDoesNotExist
errParamNameInvalid
errGetParamValueFailed
errSubValuesFailed
errStringOpFailed
errReadWorkspaceDataFailed = 1330
errUpdateRunDataFailed
errProgramError
errUnableToOpenFile
errLoadRunDataFailed
errExecuteODBCCommandFailed
errRunWorkspaceFailed
errExecuteStepFailed
errUnableToWriteError
errRunStepFailed
errSaveChanges = 1340
errDragDropFailed
errInvalidParameter
errAssignParametersFailed
errLoadLabelsInTreeFailed
errInstrRFailed
errInsertIteratorFailed

```

errDeleteIteratorFailed
errTypeInvalid
errLoadFailed
errDeleteFailed = 1350
errModifyFailed
errIteratorsFailed
errInsertFailed
errUpdateFailed
errDuplicateIterator
errSaveFailed
errReadDataFailed
errUnloadFailed
errAddFailed
errExecuteBranchFailed = 1360
errRangeNumeric
errRangeInvalid
errNextStepFailed
errUpdateDisplayFailed
errDateToStringFailed
errGetElapsedTimeFailed
errMaxProcessesExceeded
errInvalidProperty
errInvalidChild
errCreateInstanceFailed = 1370
errInvalidForWorker
errInstanceOpFailed
errNavInstancesFailed
errIterateFailed
errExecInstanceFailed
errDupIterator
End Enum
Attribute VB_Name = "SortSM"
' FILE:      SortSM.bas
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   This module contains an
implementation of QuickSort.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

' Comment out for case-sensitive sorts
Option Compare Text

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"SortSM."

Private Function Compare(ByVal
vntToCompare1 As Variant, _
ByVal vntToCompare2 As Variant) As
Integer

    On Error GoTo CompareErr

    Compare = 0

    If vntToCompare1.SequenceNo <
vntToCompare2.SequenceNo Then
        Compare = -1
    ElseIf vntToCompare1.SequenceNo >
vntToCompare2.SequenceNo Then
        Compare = 1
    End If

    Exit Function

CompareErr:

```

```

' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errCompareFailed, _
    gstrSource, _
    LoadResString(errCompareFailed)

End Function

Private Sub Swap(ByRef vntToSwap1 As
Variant, _
ByRef vntToSwap2 As Variant)

    Dim vntTemp As Variant

    On Error GoTo SwapErr

    If IsObject(vntToSwap1) And
IsObject(vntToSwap2) Then
        Set vntTemp = vntToSwap1
        Set vntToSwap1 = vntToSwap2
        Set vntToSwap2 = vntTemp
    Else
        vntTemp = vntToSwap1
        vntToSwap1 = vntToSwap2
        vntToSwap2 = vntTemp
    End If

    Exit Sub

SwapErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errQuickSortFailed, mstrModuleName &
"Swap", _
    LoadResString(errQuickSortFailed)

End Sub

Public Sub QuickSort(vntArray As Variant, _
Optional ByVal intLBound As Integer, _
Optional ByVal intUBound As Integer)
' Sorts a variant array using Quicksort

    Dim i As Integer
    Dim j As Integer
    Dim vntMid As Variant

    On Error GoTo QuickSortErr

    If IsEmpty(vntArray) Or _
        Not IsArray(vntArray) Then
        Exit Sub
    End If

    ' Set default boundary values for first time
through
    If intLBound = 0 And intUBound = 0 Then
        intLBound = LBound(vntArray)
        intUBound = UBound(vntArray)
    End If

    ' BugMessage "Sorting elements " &
Str(intLBound) & " and " & Str(intUBound)

    If intLBound > intUBound Then
        Exit Sub
    End If

    ' Only two elements in this subdivision;
exchange if they
    ' are out of order and end recursive calls

```

```

    If (intUBound - intLBound) = 1 Then
        If Compare(vntArray(intLBound),
vntArray(intUBound)) > 0 Then
            Call Swap(vntArray(intLBound),
vntArray(intUBound))
        End If
        Exit Sub
    End If

    ' Set the pivot point
    Set vntMid = vntArray(intUBound)
    i = intLBound
    j = intUBound

    Do
        ' Move in from both sides towards pivot
element
        Do While (i < j) And Compare(vntArray(i),
vntMid) <= 0
            i = i + 1
        Loop

        Do While (j > i) And Compare(vntArray(j),
vntMid) >= 0
            j = j - 1
        Loop

        If i < j Then
            Call Swap(vntArray(i), vntArray(j))
        End If
        Loop While i < j

    ' Since i has been adjusted, swap element i with
element,
    ' intUBound
    Call Swap(vntArray(i), vntArray(intUBound))

    ' Recursively call sort array - pass smaller
subdivision
    ' first to conserve stack space
    If (i - intLBound) < (intUBound - 1) Then
        ' Recursively sort with adjusted values for
upper and
        ' lower bounds
        Call QuickSort(vntArray, intLBound, i - 1)
        Call QuickSort(vntArray, i + 1, intUBound)
    Else
        Call QuickSort(vntArray, i + 1, intUBound)
        Call QuickSort(vntArray, intLBound, i - 1)
    End If
    Exit Sub

QuickSortErr:
    Call LogErrors(Errors)
    On Error GoTo 0
    Err.Raise vbObjectError + errQuickSortFailed,
mstrModuleName & "QuickSort", _
        LoadResString(errQuickSortFailed)

End Sub
Attribute VB_Name = "Startup"
' FILE:      Startup.bas
'      Microsoft TPC-H Kit Ver. 1.00
'      Copyright Microsoft, 1999
'      All Rights Reserved
'
' PURPOSE:   This module contains startup and
cleanup functions for the project.
' Contact:   Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public Const LISTVIEW_BUTTON = 14

```

<pre> Public gstrProjectPath As String ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "Startup." Private Sub Initialize() On Error GoTo InitializeErr ReDim gsContCriteria(gintOnFailureAbort To gintOnFailureAsk) As String gsContCriteria(gintOnFailureAbort) = "Abort" gsContCriteria(gintOnFailureContinue) = "Continue" gsContCriteria(gintOnFailureCompleteSibli ngs) = "Execute sibling steps and stop" gsContCriteria(gintOnFailureAbortSiblings) = "Abort sibling steps and execute next parent" gsContCriteria(gintOnFailureSkipSiblings) = "Skip sibling steps and execute next parent" gsContCriteria(gintOnFailureAsk) = "Ask" ReDim gsExecutionStatus(gintDisabled To gintAborted) As String gsExecutionStatus(gintDisabled) = "Disabled" gsExecutionStatus(gintPending) = "Pending" gsExecutionStatus(gintRunning) = "Running" gsExecutionStatus(gintComplete) = "Complete" gsExecutionStatus(gintFailed) = "Failed" gsExecutionStatus(gintAborted) = "Stopped" #If Not RUN_ONLY Then ' Call a procedure to change the style of the toolbar ' on the Step Properties form Call SetTBar97(frmSteps.tblConstraintCommand s) #End If Call InitRunEngine Exit Sub InitializeErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) gstrSource = mstrModuleName & "Initialize" Call ShowError(errInitializeFailed) End Sub Sub Main() On Error GoTo MainErr </pre>	<pre> ' Mousepointer should indicate busy Call ShowBusy ' Display the Splash screen while we carry out some initialization frmSplash.Show frmSplash.Refresh gstrProjectPath = App.Path ' Open the database If OpenDBFile() = False Then Unload frmSplash Exit Sub End If #If Not RUN_ONLY Then Load frmMain ' Enable the Stop Run menu options only when a workspace is ' actually running Call EnableStop(False) ' Clear all application extension menu items Call ClearToolsMenu #End If Call Initialize ' Mousepointer - ready to accept user input Call ShowFree ' Unload the Splash screen and display the main form Unload frmSplash #If RUN_ONLY Then frmWorkspaceOpen.Caption = gsCaptionRunWsp Call ShowWorkspacesInDb(dbsAttTool) #Else frmMain.Show #End If Exit Sub MainErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) Call ShowFree Call ShowError(errMainFailed) End Sub Private Function OpenDBFile() As Boolean Dim sDb As String On Error GoTo OpenDBFileErr #If RUN_ONLY Then ' Always use the registry setting for the run_only mode sDb = DefaultDBFile() #Else ' Check if the user has specified the workspace defn. file to open on the command line ' Else, use the registry setting sDb = If(StringEmpty(Command), DefaultDBFile(), Command) If Len(sDb) > 0 Then ' Trim off the enclosing double-quotes if any </pre>	<pre> If Mid(sDb, 1, 1) = gstrDQ Then If Len(sDb) > 1 Then sDb = Mid(sDb, 2) Else sDb = gstrEmptyString End If End If If Len(sDb) > 0 Then If Mid(sDb, Len(sDb), 1) = gstrDQ Then If Len(sDb) > 1 Then sDb = Mid(sDb, 1, Len(sDb) - 1) Else sDb = gstrEmptyString End If End If End If #End If ' Open the database OpenDBFile = SMOpenDatabase(sDb) Exit Function OpenDBFileErr: Call LogErrors(Errors) OpenDBFile = False End Function Public Sub Cleanup() On Error GoTo CleanupErr ' Set the mousepointer to indicate Busy Call ShowBusy #If Not RUN_ONLY Then ' Close all open workspaces - will also prompt for unsaved ' changes Call CloseOpenWorkspaces #End If ' Close all open files Call CloseOpenFiles ' Reset the mousepointer Call ShowFree Exit Sub CleanupErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) Resume Next End Sub Attribute VB_Name = "StepCommon" ' FILE: StepCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains functionality common across StepMaster and ' SMRunOnly, pertaining to steps ' Specifically, functions to load iterators records ' in an array, determine the type of step, etc. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit </pre>
---	---	--

```

' Used to indicate the source module name
when errors
' are raised by this module
Private Const mstrModuleName As String =
"StepCommon."

' Step property constants
Private Const mintMinFailureThreshold As
Integer = 1
Public Const gintMinSequenceNo As
Integer = 1
Public Const gintMinLevel As Integer = 0
Public Function
ValidateParallelism(sParallelism As String,
lWorkspace As Long, _
Optional ParamsInWsp As
cArrParameters = Nothing) As String
' Returns the degree of parallelism for the
step if the user input is valid
Dim sTemp As String

On Error GoTo ValidateParallelismErr
gstrSource = mstrModuleName &
"ValidateParallelism"

sTemp =
SubstituteParameters(Trim$(sParallelism),
lWorkspace,
WspParameters:=ParamsInWsp)

If Not IsNumeric(sTemp) Then
ShowError errInvalidDegParallelism
On Error GoTo 0
Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _

LoadResString(errInvalidDegParallelism)
Else
If (CInt(sTemp) < gintMinParallelism)
Or (CInt(sTemp) > gintMaxParallelism)
Then
ShowError errInvalidDegParallelism
On Error GoTo 0
Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _

LoadResString(errInvalidDegParallelism)
Else
ValidateParallelism =
Trim$(sParallelism)
End If
End If

Exit Function

ValidateParallelismErr:
' Log the error code raised by Visual
Basic
gstrSource = mstrModuleName &
"ValidateParallelism"
If Err.Number = vbObjectError +
errSubValuesFailed Then
ShowError errInvalidDegParallelism
End If

Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError +
errInvalidDegParallelism, gstrSource, _

LoadResString(errInvalidDegParallelism)

End Function

```

```

Public Function IsGlobal(_
Optional ByVal StepClass As cStep =
Nothing, _
Optional ByVal StepRecord As Recordset
= Nothing, _
Optional ByVal StepKey As String =
gstrEmptyString, _
Optional ByVal StepId As Long = 0, _
Optional StepForm As Form = Nothing)
As Boolean

' This function contains all the possible
checks for whether
' a step is global - The check that will be
made depends on
' the parameter passed in

Dim cStepRecord As cStep

If Not StepClass Is Nothing Then
IsGlobal = StepClass.GlobalFlag
Exit Function
End If

If Not StepRecord Is Nothing Then
IsGlobal = StepRecord![global_flag]
Exit Function
End If

If Not StringEmpty(StepKey) Then
IsGlobal = InStr(StepKey,
gstrGlobalStepPrefix) > 0
Exit Function
End If

If StepId <> 0 Then
Set cStepRecord =
gcSteps.QueryStep(StepId)
IsGlobal = cStepRecord.GlobalFlag
Set cStepRecord = Nothing
Exit Function
End If

If Not StepForm Is Nothing Then
IsGlobal =
(StepForm.lblStepType.Caption =
Str(gintGlobalStep))
Exit Function
End If

' Not a single object was passed in! - raise an
error
On Error GoTo 0
Err.Raise vbObjectError +
errObjectMandatory, _
mstrModuleName & "IsGlobal", _
LoadResString(errObjectMandatory)

End Function

Public Function TypeOfStep(Optional ByVal
StepClass As cStep = Nothing, _
Optional ByVal StepRecord As Recordset
= Nothing, _
Optional ByVal StepKey As String =
gstrEmptyString, _
Optional ByVal StepId As Long = 0, _
Optional StepForm As Form = Nothing)
As Integer
' Calls functions to determine the type of
step
' The check that will be made depends on the
parameter passed in

On Error GoTo TypeOfStepErr

```

```

' Make the check whether a step is global first -
both
' worker and global steps have the step text or file
name
' not null - but only the global step will have the
global
' flag set
If IsGlobal(StepClass, StepRecord, StepKey,
StepId, StepForm) Then
TypeOfStep = gintGlobalStep
ElseIf IsManager(StepClass, StepRecord,
StepKey, StepId, StepForm) Then
TypeOfStep = gintManagerStep
ElseIf IsWorker(StepClass, StepRecord,
StepKey, StepId, StepForm) Then
TypeOfStep = gintWorkerStep
Else
On Error GoTo 0
Err.Raise vbObjectError + errInvalidStep, _
mstrModuleName & "TypeOfStep", _
LoadResString(errInvalidStep)
End If

Exit Function

TypeOfStepErr:
' Log the error code raised by Visual Basic
Call LogErrors(Errors)
On Error GoTo 0
Err.Raise vbObjectError + errTypeOfStepFailed, _
mstrModuleName & "TypeOfStep", _
LoadResString(errTypeOfStepFailed)

End Function

Public Function IsStep(intNodeType As Integer) As
Boolean
' Returns true if the node type corresponds to a
global, manager
' or worker step
IsStep = (intNodeType = gintGlobalStep) Or
(intNodeType = gintManagerStep) Or _
(intNodeType = gintWorkerStep)

End Function

Public Function IsManager(Optional ByVal
StepClass As cStep = Nothing, _
Optional ByVal StepRecord As Recordset =
Nothing, _
Optional ByVal StepKey As String =
gstrEmptyString, _
Optional ByVal StepId As Long = 0, _
Optional StepForm As Form = Nothing) As
Boolean

' This function contains all the possible checks
for whether
' a step is a manager step - The check that will be
made depends
' on the parameter passed in

Dim cStepRecord As cStep

If Not StepClass Is Nothing Then
IsManager = (StepClass.StepType =
gintManagerStep)
Exit Function
End If

If Not StepRecord Is Nothing Then
IsManager = (IsNull(StepRecord![step_text])
And IsNull(StepRecord![step_file_name]))
Exit Function

```

<pre> End If If Not StringEmpty(StepKey) Then IsManager = (InStr(StepKey, gstrManagerStepPrefix) > 0) Exit Function End If If StepId <> 0 Then Set cStepRecord = gcSteps.QueryStep(StepId) IsManager = (cStepRecord.StepType = gintManagerStep) Set cStepRecord = Nothing Exit Function End If If Not StepForm Is Nothing Then IsManager = (StepForm.lblStepType.Caption = Str(gintManagerStep)) Exit Function End If ' Not a single object was passed in! - raise an error On Error GoTo 0 Err.Raise vbObjectError + errObjectMandatory, _ "Step.IsManager", _ LoadResString(errObjectMandatory) End Function Public Function IsWorker(_ Optional ByVal StepClass As cStep = Nothing, _ Optional ByVal StepRecord As Recordset = Nothing, _ Optional ByVal StepKey As String = gstrEmptyString, _ Optional ByVal StepId As Long = 0, _ Optional StepForm As Form = Nothing) As Boolean ' This function contains all the possible checks for whether ' a step is a Worker step - The check that will be made depends ' on the parameter passed in Dim cStepRecord As cStep If Not StepClass Is Nothing Then IsWorker = (StepClass.StepType = gintWorkerStep) Exit Function End If If Not StepRecord Is Nothing Then IsWorker = (Not StepRecord![global_flag] And _ (Not IsNull(StepRecord![step_text]) Or Not IsNull(StepRecord![step_file_name]))) Exit Function End If If Not StringEmpty(StepKey) Then IsWorker = InStr(StepKey, gstrWorkerStepPrefix) > 0 Exit Function End If If StepId <> 0 Then </pre>	<pre> Set cStepRecord = gcSteps.QueryStep(StepId) IsWorker = (cStepRecord.StepType = gintWorkerStep) Set cStepRecord = Nothing Exit Function End If If Not StepForm Is Nothing Then IsWorker = (StepForm.lblStepType.Caption = Str(gintWorkerStep)) Exit Function End If ' Not a single object was passed in! - raise an error On Error GoTo 0 Err.Raise vbObjectError + errObjectMandatory, _ "Step.IsWorker", _ LoadResString(errObjectMandatory) End Function Public Function GetStepNodeText(ByVal cStepNode As cStep) As String On Error GoTo GetStepNodeTextErr ' Returns the string that will be displayed as the text ' in the tree view node to the user If StringEmpty(cStepNode.StepLabel) Then If StringEmpty(cStepNode.StepTextFile) Then If StringEmpty(cStepNode.StepText) Then ' This should never happen On Error GoTo 0 Err.Raise vbObjectError + errStepLabelTextAndFileNull, _ gstrSource, _ LoadResString(errStepLabelTextAndFileNull) Else GetStepNodeText = cStepNode.StepText End If Else GetStepNodeText = cStepNode.StepTextFile End If Else GetStepNodeText = cStepNode.StepLabel End If Exit Function GetStepNodeTextErr: ' Log the error code raised by Visual Basic Call LogErrors(Errors) On Error GoTo 0 Err.Raise vbObjectError + errGetStepNodeTextFailed, _ gstrSource, _ LoadResString(errGetStepNodeTextFailed) End Function Public Function LoadRecordsetInStepsArray(rstSteps As Recordset, _ </pre>	<pre> cStepCol As cArrSteps) As Boolean Dim cNewStep As cStep Dim cNewGlobal As cGlobalStep Dim cNewManager As cManager Dim cNewWorker As cWorker On Error GoTo LoadRecordsetInStepsArrayErr If rstSteps.RecordCount = 0 Then Exit Function End If rstSteps.MoveFirst While Not rstSteps.EOF ' For fields that should not be null, a procedure is first ' called to raise an error if the field is null Set cNewStep = New cStep cNewStep.StepType = TypeOfStep(StepRecord:=rstSteps) If cNewStep.StepType = gintGlobalStep Then Set cNewGlobal = New cGlobalStep Set cNewStep = cNewGlobal ElseIf cNewStep.StepType = gintManagerStep Then Set cNewManager = New cManager Set cNewStep = cNewManager Else Set cNewWorker = New cWorker Set cNewStep = cNewWorker End If ' Initialize the global flag first, since subsequent ' validations might depend on whether the step is global cNewStep.GlobalFlag = CBool(ErrorOnNullField(rstSteps, "global_flag")) ' Initialize step values cNewStep.StepId = CLng(ErrorOnNullField(rstSteps, "step_id")) cNewStep.VersionNo = CStr(ErrorOnNullField(rstSteps, "version_no")) cNewStep.StepLabel = CheckForNullField(rstSteps, "step_label") cNewStep.StepTextFile = CheckForNullField(rstSteps, "step_file_name") cNewStep.StepText = CheckForNullField(rstSteps, "step_text") cNewStep.StartDir = CheckForNullField(rstSteps, "start_directory") cNewStep.WorkspaceId = CLng(ErrorOnNullField(rstSteps, FLD_ID_WORKSPACE)) cNewStep.ParentStepId = CLng(ErrorOnNullField(rstSteps, "parent_step_id")) cNewStep.ParentVersionNo = CStr(ErrorOnNullField(rstSteps, "parent_version_no")) cNewStep.SequenceNo = CInt(ErrorOnNullField(rstSteps, "sequence_no")) cNewStep.StepLevel = CInt(ErrorOnNullField(rstSteps, "step_level")) cNewStep.EnabledFlag = CBool(ErrorOnNullField(rstSteps, "enabled_flag")) </pre>
---	---	---

```

' Initialize the execution details for the
step
cNewStep.DegreeParallelism =
CheckForNullField(rstSteps,
"degree_parallelism")
cNewStep.ExecutionMechanism =
CInt(ErrorOnNullField(rstSteps,
"execution_mechanism"))
cNewStep.FailureDetails =
CheckForNullField(rstSteps,
"failure_details")
cNewStep.ContinuationCriteria =
CInt(ErrorOnNullField(rstSteps,
"continuation_criteria"))

' Initialize the output file locations for
the step
cNewStep.OutputFile =
CheckForNullField(rstSteps,
"output_file_name")
' cNewStep.LogFile =
CheckForNullField(rstSteps,
"log_file_name")
cNewStep.ErrorFile =
CheckForNullField(rstSteps,
"error_file_name")

' Initialize the iterator name for the
step, if any
cNewStep.IteratorName =
CheckForNullField(rstSteps,
"iterator_name")

' Add this record to the array of steps
cStepCol.Load cNewStep

Set cNewStep = Nothing
rstSteps.MoveNext
Wend

Exit Function

LoadRecordsetInStepsArrayErr:

LogErrors Errors
gstrSource = mstrModuleName &
"LoadRecordsetInStepsArray"
On Error GoTo 0
Err.Raise vbObjectError +
errLoadRsInArrayFailed, gstrSource, _

LoadResString(errLoadRsInArrayFailed)

End Function

Attribute VB_Name = "TimerSM"
' FILE:   TimerSM.bas
'   Microsoft TPC-H Kit Ver. 1.00
'   Copyright Microsoft, 1999
'   All Rights Reserved
'
' PURPOSE:  This module contains
wrapper functions for Timer APIs.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Private Declare Function SetTimer Lib
"user32" (ByVal hWnd As Long, _
ByVal nIDEvent As Long, ByVal uElapsed
As Long, ByVal lpTimerFunc As Long) _

```

```

As Long
Private Declare Function KillTimer Lib
"user32" (ByVal hWnd As Long, _
ByVal nIDEvent As Long) As Long
Private Declare Sub CopyMemory Lib
"kernel32" Alias "RtlMoveMemory" (_
pDest As Any, pSource As Any, ByVal
ByteLen As Long)

Public gcTimerObjects As Collection

Private Sub TimerProc(ByVal lHwnd As Long,
ByVal lMsg As Long, _
ByVal lTimerID As Long, ByVal lTime As
Long)

Dim nPtr As Long
Dim oTimerObject As cTimerSM

'Create a Timer object from the pointer
nPtr = gcTimerObjects.Item(Str$(lTimerID))
CopyMemory oTimerObject, nPtr, 4
'Call a method which will fire the Timer
event
oTimerObject.Tick
'Get rid of the Timer object so that VB will
not try to release it
CopyMemory oTimerObject, 0&, 4
End Sub

Public Function StartTimer(lInterval As Long)
As Long
StartTimer = SetTimer(0, 0, lInterval,
AddressOf TimerProc)
End Function

Public Sub StopTimer(lTimerID As Long)
KillTimer 0, lTimerID
End Sub

Public Sub SetInterval(lInterval As Long,
lTimerID As Long)
SetTimer 0, lTimerID, lInterval, AddressOf
TimerProc
End Sub
Attribute VB_Name = "ToolsCommon"
' FILE:   ToolsCommon.bas
'   Microsoft TPC-H Kit Ver. 1.00
'   Copyright Microsoft, 1999
'   All Rights Reserved
'
' PURPOSE:  Contains functions to remove
run history and initialize
'   table creation scripts
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'
Option Explicit

Public sCreateTables() As String

Public Const gsExtSeparator As String = "."

Public Sub DeleteRunHistory(dbFile As
DAO.Database)
' Delete all run history records from the
database, viz. the records in
' run_header, run_step_details and
run_parameters

Dim sDelete As String

On Error GoTo DeleteRunHistoryErr

```

```

sDelete = "delete from run_header "
dbFile.Execute sDelete, dbFailOnError

sDelete = "delete from run_step_details "
dbFile.Execute sDelete, dbFailOnError

sDelete = "delete from run_parameters "
dbFile.Execute sDelete, dbFailOnError

sDelete = "update att_identifiers " & _
" set run_id = " & CStr(glMinId)
dbFile.Execute sDelete, dbFailOnError

Exit Sub

DeleteRunHistoryErr:
LogErrors Errors
Err.Raise vbObjectError +
errDeleteDBRecordFailed, "DeleteRunHistory", _
LoadResString(errDeleteDBRecordFailed)

End Sub

Public Function CreateConnectionsTableScript() As
String
' Returns the table creation script for the
workspace_connections table

Call InitCreateSQLArray
CreateConnectionsTableScript =
sCreateTables(10)
ReDim sCreateTables(0)

End Function

Public Function CreateConnectionDtIsTableScript()
As String
' Returns the table creation script for the
connection_dtIs table

Call InitCreateSQLArray
CreateConnectionDtIsTableScript =
sCreateTables(11)
ReDim sCreateTables(0)

End Function

Public Sub InitCreateSQLArray()

ReDim sCreateTables(0 To 11)

sCreateTables(0) = "Create table att_identifiers (" &
_
"workspace_id Long, " & _
"parameter_id Long, " & _
"step_id Long, " & _
"constraint_id Long, " & _
"run_id Long, " & _
"connection_id Long " & _
", " & FLD_ID_CONN_NAME & gstrBlank
& DATA_TYPE_LONG & _
");"

sCreateTables(1) = "Create table att_steps (step_id
Long, " & _
"version_no Text(255), " & _
"step_label Text(255), " & _
"step_file_name Text(255), " & _
"step_text Memo, " & _
"start_directory Text(255), " & _
"workspace_id Long, " & _
"parent_step_id Long, " & _
"parent_version_no Text(255), " & _
"step_level Long, " & _
"sequence_no Integer, " & _
"enabled_flag Bit, " & _

```

```

        "degree_parallelism    Text(255), "
& _
        "execution_mechanism    Text(50),
" & _
        "failure_details        Text(255), " &
_
        "continuation_criteria    Text(50), " &
_
        "global_flag            Long, " & _
        "archived_flag          Bit, " & _
        "output_file_name        Text(255), "
& _
        "error_file_name         Text(255), "
& _
        "iterator_name           Text(255), " &
_
        "CONSTRAINT pk_steps PRIMARY
KEY (step_id, version_no) " & _
");"

        "log_file_name          Text(255), "
& _

sCreateTables(2) = "Create table
att_workspaces (" & _
        "workspace_id          Long, " & _
        "workspace_name        Text(255), "
& _
        "archived_flag          Bit, " & _
        "CONSTRAINT pk_workspaces
PRIMARY KEY (workspace_id) " & _
");"

sCreateTables(3) = "Create table
iterator_values (" & _
        "step_id                Long, " & _
        "version_no              Text(255), " &
_
        "type                    Integer, " & _
        "iterator_value          Text(255), " &
_
        "sequence_no             Integer " & _
");"

sCreateTables(4) = "Create table run_header
(" & _
        "run_id                  Long, " & _
        "workspace_id            Long, " & _
        "start_time               Currency, " & _
        "end_time                 Currency, " & _
        "CONSTRAINT pk_run_header
PRIMARY KEY (run_id) " & _
");"

sCreateTables(5) = "Create table
run_parameters (" & _
        "run_id                  Long, " & _
        "parameter_name          Text(255), "
& _
        "parameter_value         Text(255) "
& _
");"

sCreateTables(6) = "Create table
run_step_details (" & _
        "run_id                  Long, " & _
        "step_id                  Long, " & _
        "version_no              Text(255), " &
_
        "instance_id              Long, " & _
        "parent_instance_id       Long, " & _
        "command                  Memo, " & _
        "iterator_value          Text(255), " &
_
        "start_time               Currency, " & _

```

```

        "end_time               Currency, " & _
        "elapsed_time            Long " & _
");"

sCreateTables(7) = "Create table
step_constraints (" & _
        "constraint_id          Long, " & _
        "step_id                 Long, " & _
        "version_no              Text(255), " & _
        "constraint_type         Integer, " & _
        "global_step_id          Long, " & _
        "global_version_no       Text(255), " &
_
        "sequence_no            Integer " & _
");"

sCreateTables(8) = "Create table
workspace_parameters (" & _
        "workspace_id            Long, " & _
        "parameter_id            Long, " & _
        "parameter_name          Text(255), " &
_
        "parameter_value        Text(255), " & _
        "description             Text(255), " & _
        "parameter_type          Integer, " & _
        "CONSTRAINT pk_parameters
PRIMARY KEY (parameter_id) " & _
");"

sCreateTables(9) = "Create table db_details ("
& _
        "db_version              Text(50) " & _
");"

sCreateTables(10) = "Create table " &
TBL_CONNECTION_STRINGS & " (" & _
        "workspace_id            Long, " & _
        "connection_id            Long, " & _
        "connection_name          Text(255), " &
_
        "connection_value        Text(255), " & _
        "description             Text(255), " & _
        "no_count_display         Bit, " & _
        "no_execute                Bit, " & _
        "parse_query_only          Bit, " & _
        "ANSI_quoted_identifiers    Bit, " & _
        "ANSI_nulls                 Bit, " & _
        "show_query_plan           Bit, " & _
        "show_stats_time           Bit, " & _
        "show_stats_io              Bit, " & _
        "parse_odbc_msg_prefixes    Bit, " & _
        "row_count                  long, " & _
        "tsql_batch_separator       Text(255), " &
_
        "query_time_out            long, " & _
        "server_language            Text(255), " & _
        "character_translation      Bit, " & _
        "regional_settings          Bit, " & _
        "CONSTRAINT pk_connections
PRIMARY KEY (connection_id) " & _
");"

' This table has been added in order to satisfy
the TPC-H requirement that
' all the queries in a stream need to be executed
on a single connection.
' Specify a connection for each odbc step. If the
connection is of type,
' static, it should be kept open till the step
execution is complete.
sCreateTables(11) = "Create table " &
TBL_CONNECTION_DTLS & " (" & _
        FLD_ID_WORKSPACE & gstrBlank &
DATA_TYPE_LONG & ", " & _

```

```

        FLD_ID_CONN_NAME & gstrBlank &
DATA_TYPE_LONG & ", " & _
        FLD_CONN_DTL_CONNECTION_NAME
& gstrBlank & DATA_TYPE_TEXT255 & ", " & _

        FLD_CONN_DTL_CONNECTION_STRING &
gstrBlank & DATA_TYPE_TEXT255 & ", " & _
        FLD_CONN_DTL_CONNECTION_TYPE &
gstrBlank & DATA_TYPE_INTEGER & ", " & _
        "CONSTRAINT pk_connection_name
PRIMARY KEY (" & FLD_ID_CONN_NAME &
") " & _
");"

End Sub
Attribute VB_Name = "WindowsApiCommon"
' FILE:    WindowsApiCommon.bas
'          Microsoft TPC-H Kit Ver. 1.00
'          Copyright Microsoft, 1999
'          All Rights Reserved
'
' PURPOSE:  This module contains functions that
are wrappers around the
'           Windows API and are used by both
StepMaster and SMRunOnly.
' Contact:  Reshma Tharamal
(reshmat@microsoft.com)
'

Option Explicit

' Used to indicate the source module name when
errors
' are raised by this module
Private Const mstrModuleName As String =
"WindowsApiCommon."

Public Type PROCESS_INFORMATION
    hProcess As Long
    hThread As Long
    dwProcessID As Long
    dwThreadId As Long
End Type

' Used by GetShortName to return the short file
name for a given file
Private Declare Function GetShortPathName Lib
"kernel32" _
    Alias "GetShortPathNameA" (ByVal
lpzLongPath As String, _
    ByVal lpzShortPath As String, ByVal
cchBuffer As Long) As Long

Public Declare Function GetExitCodeProcess Lib
"kernel32" ( _
    ByVal hProcess As Long, lpExitCode As Long)
As Long
Public Declare Function TerminateProcess Lib
"kernel32" ( _
    hProcess As Long, uExitCode As Long) As
Long
Public Declare Function CloseHandle Lib
"kernel32" ( _
    ByVal hObject As Long) As Long

Public Const NORMAL_PRIORITY_CLASS
As Long = &H20&
Public Const INFINITE As Long = -1&

Public Const STATUS_WAIT_0 As Long
= &H0
Public Const STATUS_ABANDONED_WAIT_0
As Long = &H80
Public Const STATUS_USER_APC As
Long = &HC0

```



```

Public Const STATUS_TIMEOUT
As Long = &H102
Public Const STATUS_PENDING
As Long = &H103

Public Const WAIT_FAILED As
Long = &HFFFFFFF
Public Const WAIT_OBJECT_0 As
Long = STATUS_WAIT_0
Public Const WAIT_TIMEOUT As
Long = STATUS_TIMEOUT

Public Const WAIT_ABANDONED
As Long =
STATUS_ABANDONED_WAIT_0
Public Const WAIT_ABANDONED_0
As Long =
STATUS_ABANDONED_WAIT_0

Public Const WAIT_IO_COMPLETION
As Long = STATUS_USER_APC
Public Const STILL_ACTIVE As
Long = STATUS_PENDING

Public Const
PROCESS_QUERY_INFORMATION As
Long = &H400
Public Const
STANDARD_RIGHTS_REQUIRED As
Long = &HF0000

'-----
'Declarations for shelling:

Public Type STARTUPINFO
cb As Long
lpReserved As String
lpDesktop As String
lpTitle As String
dwX As Long
dwY As Long
dwXSize As Long
dwYSize As Long
dwXCountChars As Long
dwYCountChars As Long
dwFillAttribute As Long
dwFlags As Long
wShowWindow As Integer
cbReserved2 As Integer
lpReserved2 As Long
hStdInput As Long
hStdOutput As Long
hStdError As Long
End Type

Public Declare Function
WaitForSingleObject Lib "kernel32" ( _
ByVal hProcess As Long, ByVal
dwMilliseconds As Long) As Long

Public Declare Function InputIdle Lib
"user32" Alias "WaitForInputIdle" ( _
ByVal hProcess As Long, ByVal
dwMilliseconds As Long) As Long

Public Declare Function CreateProcessA Lib
"kernel32" ( _
ByVal lpApplicationName As Long,
ByVal lpCommandLine As String, _
ByVal lpProcessAttributes As Long,
ByVal lpThreadAttributes As Long, _
ByVal bInheritHandles As Long, ByVal
dwCreationFlags As Long, _

```

```

ByVal lpEnvironment As Long, ByVal
lpCurrentDirectory As Long, _
lpStartupInfo As STARTUPINFO,
lpProcessInformation As _
PROCESS_INFORMATION) As Long

Public Declare Function GetLastError Lib
"kernel32" () As Long

Private Type OPENFILENAME
lStructSize As Long
hwndOwner As Long
hInstance As Long
lpstrFilter As String
lpstrCustomFilter As String
nMaxCustFilter As Long
nFilterIndex As Long
lpstrFile As String
nMaxFile As Long
lpstrFileName As String
nMaxFileName As Long
lpstrInitialDir As String
lpstrTitle As String
Flags As Long
nFileOffset As Integer
nFileExtension As Integer
lpstrDefExt As String
lCustData As Long
lpfnHook As Long
lpTemplateName As Long
End Type

Private Declare Function GetOpenFileName
Lib "COMDLG32" _
Alias "GetOpenFileNameA" (file As
OPENFILENAME) As Long

Private Declare Function lstrlen Lib "kernel32"
(lpsz As String) As Long

Public Const MAX_PATH = 255

' Used when creating a process
Public Const SW_SHOWMINNOACTIVE = 7
Public Const STARTF_USESHOWWINDOW
= &H1

Public Const MB_YESNOCANCEL = &H3&
Public Const MB_ABORTRETRYIGNORE =
&H2&
Public Const MB_OK = &H0&

Public Const MB_APPLMODAL = &H0&

Public Const MB_ICONQUESTION =
&H20&
Public Const MB_ICONEXCLAMATION =
&H30&

Public Const IDABORT = 3
Public Const IDRETRY = 4
Public Const IDIGNORE = 5
Public Const IDYES = 6
Public Const IDNO = 7
Public Const IDCANCEL = 2

Private Declare Function MessageBox Lib
"user32" Alias "MessageBoxA" ( _
ByVal hWnd As Long, ByVal lpText As
String, _
ByVal lpCaption As String, ByVal wType
As Long) As Long

Private Type SYSTEMTIME
wYear As Integer

```

```

wMonth As Integer
wDayOfWeek As Integer
wDay As Integer
wHour As Integer
wMinute As Integer
wSecond As Integer
wMilliseconds As Integer
End Type

Private Declare Function Get64BitTime Lib
"sftime.dll" ( _
ByVal lpInitTime As Any) As Currency

Public Function ShowMessageBox(hWnd As Long,
strText As String, _
strTitle As String, wType As Integer) As Long
' Using the Windows MessageBox Api since the
VB MsgBox function suppresses
' all events
ShowMessageBox = MessageBox(hWnd, ByVal
strText, ByVal strTitle, wType)

If ShowMessageBox = 0 Then
LogSystemError
Err.Raise vbObjectError + errConfirmFailed,
App.EXENAME, _
LoadResString(errConfirmFailed)
End If

End Function

Public Function ShowFileOpenDialog(ByVal
strFilter As String, _
ByVal strDialogTitle As String, ByVal
lngFlags As Long, _
Optional ByVal strOldFile As String =
gstrEmptyString) As String
' Returns the file name selected by the user
Dim strInitDir As String
Dim intPos As Integer
Dim opfile As OPENFILENAME
Dim sFile As String

On Error GoTo ShowFileOpenDialogErr

If Not StringEmpty(strOldFile) Then
intPos = InstrR(strOldFile, gstrFileSeparator)
If intPos > 0 Then
strInitDir = Left$(strOldFile, intPos - 1)
End If
End If

With opfile
.lStructSize = Len(opfile)
.Flags = lngFlags
.lpstrInitialDir = strInitDir
.lpstrTitle = strDialogTitle
.lpstrFilter = MakeWindowsFilter(strFilter)
sFile = strOldFile & String$(MAX_PATH -
Len(strOldFile), 0)
.lpstrFile = sFile
.nMaxFile = MAX_PATH
End With

If GetOpenFileName(opfile) Then
ShowFileOpenDialog = Left$(opfile.lpstrFile,
InStr(opfile.lpstrFile, vbNullChar) - 1)
Else
ShowFileOpenDialog = strOldFile
End If

Exit Function

ShowFileOpenDialogErr:
Call LogErrors(Errors)
' Reset the selection to the passed in file, if any

```

<pre> ShowFileDialog = strOldFile End Function Private Function MakeWindowsFilter(sFilter As String) As String Dim s As String, ch As String, iTemp As Integer On Error GoTo MakeWindowsFilterErr ' To make Windows-style filter, replace and : with nulls For iTemp = 1 To Len(sFilter) ch = Mid\$(sFilter, iTemp, 1) If ch = " " Then s = s & vbNullChar Else s = s & ch End If Next iTemp ' Put double null at end s = s & vbNullChar & vbNullChar MakeWindowsFilter = s Exit Function MakeWindowsFilterErr: Call LogErrors(Errors) gstrSource = mstrModuleName & "MakeWindowsFilter" On Error GoTo 0 Err.Raise vbObjectError + errApiFailed, gstrSource, _ LoadResString(errApiFailed) End Function Public Function GetShortName(ByVal sLongFileName As String) As String ' Returns the short name for the passed in file - will only work ' if the passed in path/file exists Dim lRetVal As Long, sShortPathName As String, iLen As Integer Dim sLongFile As String Dim sDir As String Dim sFile As String Dim intPos As Integer On Error GoTo GetShortNameErr sFile = gstrEmptyString sLongFile = MakePathValid(sLongFileName) If StringEmpty(Dir\$(sLongFile, vbNormal + vbDirectory)) Then ' The passed in path is a file that does not exist - since ' the GetShortPathName api does not work on non-existent files ' on Win2K, use the directory as an argument to the api and ' then append the file intPos = InstrR(sLongFile, gstrFileSeparator) sDir = Mid\$(sLongFile, 1, intPos - 1) sFile = Right(sLongFile, Len(sLongFile) - intPos + 1) sLongFile = sDir </pre>	<pre> End If ' Set up buffer area for API function call return sShortPathName = Space(MAX_PATH) iLen = Len(sShortPathName) ' Call the function lRetVal = GetShortPathName(sLongFile, sShortPathName, iLen) If lRetVal = 0 Then Call LogSystemError End If GetShortName = IIf(lRetVal = 0, sLongFile, Left(sShortPathName, lRetVal)) If Not StringEmpty(sFile) Then GetShortName = GetShortName & sFile End If Exit Function GetShortNameErr: Call LogErrors(Errors) gstrSource = mstrModuleName & "GetShortName" On Error GoTo 0 Err.Raise vbObjectError + errApiFailed, gstrSource, _ LoadResString(errApiFailed) End Function Public Function Determine64BitTime() As Currency Determine64BitTime = Get64BitTime(ByVal 0&) End Function Attribute VB_Name = "WorkspaceCommon" ' FILE: WorkspaceCommon.bas ' Microsoft TPC-H Kit Ver. 1.00 ' Copyright Microsoft, 1999 ' All Rights Reserved ' ' PURPOSE: Contains functionality common across StepMaster and ' SMRunOnly, pertaining to workspaces ' Specifically, functions to read workspace records from ' the database and so on. ' Contact: Reshma Tharamal (reshmat@microsoft.com) ' Option Explicit ' Used to indicate the source module name when errors ' are raised by this module Private Const mstrModuleName As String = "WorkspaceCommon." Public Function GetWorkspaceDetails(_ Optional ByVal WorkspaceId As Long, _ Optional WorkspaceName As String = gstrEmptyString _) As Variant ' Depending on the passed in parameter, it returns </pre>	<pre> ' either the workspace name or the workspace identifier ' in a variant. The calling function must convert the ' return value to the appropriate type Dim rstWorkspace As Recordset Dim qyWsp As DAO.QueryDef Dim strSql As String Dim cTempStr As cStringSM On Error GoTo GetWorkspaceDetailsErr gstrSource = mstrModuleName & "GetWorkspaceDetails" If WorkspaceId = 0 And _ WorkspaceName = gstrEmptyString Then On Error GoTo 0 Err.Raise vbObjectError + errMandatoryParameterMissing, _ gstrSource, _ LoadResString(errMandatoryParameterMissing) End If Set cTempStr = New cStringSM If WorkspaceId = 0 Then strSql = " Select workspace_id from att_workspaces " & _ " where workspace_name = [w_name] " Set qyWsp = dbsAttTool.CreateQueryDef(gstrEmptyString, strSql) qyWsp.Parameters("w_name").Value = WorkspaceName Else strSql = " Select workspace_name from att_workspaces " & _ " where workspace_id = [w_id] " Set qyWsp = dbsAttTool.CreateQueryDef(gstrEmptyString, strSql) qyWsp.Parameters("w_id").Value = WorkspaceId End If Set cTempStr = Nothing Set rstWorkspace = qyWsp.OpenRecordset(dbOpenForwardOnly) If rstWorkspace.RecordCount <> 0 Then GetWorkspaceDetails = rstWorkspace.Fields(0) Else rstWorkspace.Close qyWsp.Close On Error GoTo 0 Err.Raise vbObjectError + errInvalidWorkspaceData, _ gstrSource, _ LoadResString(errInvalidWorkspaceData) End If rstWorkspace.Close qyWsp.Close Exit Function GetWorkspaceDetailsErr: Call LogErrors(Errors) gstrSource = mstrModuleName & "GetWorkspaceDetails" On Error GoTo 0 </pre>
--	--	--

<pre> Err.Raise vbObjectError + errGetWorkspaceDetailsFailed, _ gstrSource, _ LoadResString(errGetWorkspaceDetailsFailed) End Function Public Sub ReadStepsInWorkspace(rstStepsInWorkSpace As Recordset, _ qySteps As DAO.QueryDef, _ Optional lngWorkspaceId As Long = glInvalidId, _ Optional dbLoad As DAO.Database = Nothing, _ Optional ByVal bSelectArchivedRecords As Boolean = False) ' This function will populate the passed in recordset with ' all the steps for a given workspace (if one is passed in, else all workspaces) Dim strSql As String On Error GoTo ReadStepsInWorkspaceErr ' Create a recordset object to retrieve all steps for ' the given workspace strSql = "Select step_id, step_label, step_file_name, step_text, " & _ " start_directory, version_no, workspace_id, " & _ " parent_step_id, parent_version_no, " & _ " sequence_no, step_level, " & _ " enabled_flag, degree_parallelism, " & _ - " execution_mechanism, " & _ " failure_details, continuation_criteria, " & _ " global_flag, archived_flag, " & _ " output_file_name, " & _ " error_file_name, iterator_name " & _ " from att_steps a " & _ " where " ' log_file_name, If lngWorkspaceId <> glInvalidId Then strSql = strSql & " workspace_id = [w_id] AND " End If If Not bSelectArchivedRecords Then strSql = strSql & " archived_flag = [archived] AND " End If ' Find the highest X-component of the version number strSql = strSql & " cint(mid(version_no, 1, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") - 1)) = " & _ " (select max(cint(mid(version_no, 1, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") - 1))) " & _ " from att_steps AS d " & _ </pre>	<pre> " WHERE a.step_id = d.step_id) " ' Find the highest Y-component of the version number for the highest X-component strSql = strSql & " AND cint(mid(version_no, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") + 1)) = " & - " (select max(cint(mid(version_no, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") + 1))) " & - " from att_steps AS b " & _ " Where a.step_id = b.step_id " & _ " AND cint(mid(version_no, 1, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") - 1)) = " & _ " (select max(cint(mid(version_no, 1, instr(version_no, " & gstrDQ & gstrVerSeparator & gstrDQ & ") - 1))) " & _ " from att_steps AS c " & _ " WHERE a.step_id = c.step_id)) " ' Append the order clause as follows ' First, separate all global/non-global steps ' Order the worker and manager steps by step_level to ' ensure that the parent steps are populated before ' any sub-steps within it ' Further ordering by parent_step_id and sequence_no ' ensures that all the children within a parent are ' selected in the necessary order strSql = strSql & " order by global_flag, step_level, " & _ " parent_step_id, sequence_no " If dbLoad Is Nothing Then Set dbLoad = dbsAttTool ' Create a temporary Querydef object Set qySteps = dbLoad.CreateQueryDef(gstrEmptyString, strSql) ' Initialize the parameter values If lngWorkspaceId <> glInvalidId Then qySteps.Parameters("w_id").Value = lngWorkspaceId End If If Not bSelectArchivedRecords Then qySteps.Parameters("archived").Value = False End If Set rstStepsInWorkSpace = qySteps.OpenRecordset(dbOpenSnapshot) Exit Sub ReadStepsInWorkspaceErr: LogErrors Errors gstrSource = mstrModuleName & "ReadStepsInWorkspace" On Error GoTo 0 Err.Raise vbObjectError + errReadWorkspaceDataFailed, _ gstrSource, _ LoadResString(errReadWorkspaceDataFailed) </pre>	<pre> End Sub Public Sub ReadWorkspaces(dbLoad As Database, rstWsp As Recordset, _ qyWsp As DAO.QueryDef, _ Optional ByVal bSelectArchivedRecords As Boolean = False) ' This function will populate the passed in recordset with all workspace records Dim strSql As String On Error GoTo ReadWorkspacesErr ' Create a recordset object containing all the workspaces ' (that haven't been archived) in the database strSql = " Select workspace_id, workspace_name, archived_flag " & _ " from att_workspaces " If Not bSelectArchivedRecords Then strSql = strSql & " where archived_flag = [archived]" End If strSql = strSql & " order by workspace_name" Set qyWsp = dbLoad.CreateQueryDef(gstrEmptyString, strSql) If Not bSelectArchivedRecords Then qyWsp.Parameters("archived").Value = False End If Set rstWsp = qyWsp.OpenRecordset(dbOpenForwardOnly) Exit Sub ReadWorkspacesErr: LogErrors Errors gstrSource = mstrModuleName & "ReadWorkspaces" On Error GoTo 0 Err.Raise vbObjectError + errReadWorkspaceDataFailed, _ gstrSource, _ LoadResString(errReadWorkspaceDataFailed) End Sub Public Sub ShowWorkspacesInDb(dbLoad As Database) Dim recWorkspaces As Recordset Dim qryAllWsp As QueryDef On Error GoTo ShowWorkspacesInDbErr ' Set the mousepointer to indicate Busy Call ShowBusy Load frmWorkspaceOpen Call ReadWorkspaces(dbLoad, recWorkspaces, qryAllWsp) frmWorkspaceOpen.lstWorkspaces.Clear ' Load all the workspaces into the listbox If recWorkspaces.RecordCount <> 0 Then Do ' Add the workspace name to the list and store </pre>
---	--	---

```

' the corresponding workspace id as
the ItemData
' property of the item.
' The workspace id will be used for
all further
' processing of the workspace

frmWorkspaceOpen.lstWorkspaces.AddItem
recWorkspaces![workspace_name]

frmWorkspaceOpen.lstWorkspaces.ItemData(frmWorkspaceOpen.lstWorkspaces.NewIndex) = _
    recWorkspaces![workspace_id]
recWorkspaces.MoveNext

    Loop Until recWorkspaces.EOF
End If
recWorkspaces.Close
qryAllWsp.Close

' Reset the mousepointer
ShowFree

#If RUN_ONLY Then
    frmWorkspaceOpen.Show vbModal
#Else
    frmWorkspaceOpen.Show vbModal,
frmMain
#End If

Exit Sub

ShowWorkspacesInDbErr:
    LogErrors Errors
    Call ShowFree
    Err.Raise vbObjectError +
errProgramError, mstrModuleName &
"ShowWorkspacesInDb", _
    LoadResString(errProgramError)

End Sub
Private Sub
ReadWorkspaceParameters lngWorkspaceId
As Long, _
    rstWorkSpaceParameters As Recordset, _
    qryWspParams As DAO.QueryDef)

' Will populate the recordset with all the
parameters for
' a given workspace

Dim strSql As String

On Error GoTo
ReadWorkspaceParametersErr

    strSql = "Select parameter_id,
parameter_name, " & _
    " parameter_value, workspace_id,
parameter_type, description " & _
    " from workspace_parameters " & _
    " where workspace_id = [w_id] " & _
    _
    " order by parameter_name,
parameter_value "

' Create a temporary Querydef object and
initialize
' it's parameter values
Set qryWspParams =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qryWspParams.Parameters("w_id").Value = lngWorkspaceId

' Will populate the recordset with all the
parameters for
' a given workspace

Dim strSql As String

On Error GoTo
ReadWorkspaceParametersErr

    strSql = "Select connection_id, " & _
    " connection_name, connection_value,
workspace_id, description, " & _
    " no_count_display, no_execute,
parse_query_only, ANSI_quoted_identifiers, " & _
    " ANSI_nulls, show_query_plan,
show_stats_time, show_stats_io, " & _
    " parse_odbc_msg_prefixes,
row_count, tsq_batch_separator,
query_time_out, " & _
    " server_language,
character_translation, regional_settings " & _
    " from workspace_connections " & _
    " where workspace_id = [w_id] " & _
    " order by connection_name,
connection_value "

' Create a temporary Querydef object and
initialize
' it's parameter values
Set qryConns =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qryConns.Parameters("w_id").Value = lngWorkspaceId

Set rstConns =
qryConns.OpenRecordset(dbOpenSnapshot)

Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
    mstrModuleName & "ReadWorkspaceParametersErr",
LoadResString(errReadWorkspaceDataFailed)

End Sub

```

```

Set rstWorkSpaceParameters =
qryWspParams.OpenRecordset(dbOpenSnapshot)

Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    gstrSource = mstrModuleName &
"ReadWorkspaceParameters"
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
    gstrSource, _

LoadResString(errReadWorkspaceDataFailed)

End Sub
Private Sub ReadConnections lngWorkspaceId
As Long, rstConns As Recordset, _
    qryConns As DAO.QueryDef)

' Will populate the recordset with all the
parameters for
' a given workspace

Dim strSql As String

On Error GoTo
ReadWorkspaceParametersErr

    strSql = "Select connection_id, " & _
    " connection_name, connection_value,
workspace_id, description, " & _
    " no_count_display, no_execute,
parse_query_only, ANSI_quoted_identifiers, " & _
    " ANSI_nulls, show_query_plan,
show_stats_time, show_stats_io, " & _
    " parse_odbc_msg_prefixes,
row_count, tsq_batch_separator,
query_time_out, " & _
    " server_language,
character_translation, regional_settings " & _
    " from workspace_connections " & _
    " where workspace_id = [w_id] " & _
    " order by connection_name,
connection_value "

' Create a temporary Querydef object and
initialize
' it's parameter values
Set qryConns =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qryConns.Parameters("w_id").Value = lngWorkspaceId

Set rstConns =
qryConns.OpenRecordset(dbOpenSnapshot)

Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
    mstrModuleName & "ReadConnections",
LoadResString(errReadWorkspaceDataFailed)

End Sub

```

```

End Sub
Private Sub ReadConnectionDtIs lngWorkspaceId
As Long, rstConns As Recordset, _
    qryConns As DAO.QueryDef)

' Will populate the recordset with all the
connection_dtIs records for
' a given workspace

Dim strSql As String

On Error GoTo ReadWorkspaceParametersErr

    strSql = "Select " & FLD_ID_CONN_NAME &
", " & _
    FLD_CONN_DTL_CONNECTION_NAME & ", " & _
    FLD_CONN_DTL_CONNECTION_STRING & ",
" & _
    FLD_ID_WORKSPACE & ", " & _
    FLD_CONN_DTL_CONNECTION_TYPE
& _
    " from " & TBL_CONNECTION_DTIs & _
    _
    " where " & FLD_ID_WORKSPACE & " =
[w_id] " & _
    " order by " &
    FLD_CONN_DTL_CONNECTION_NAME

' Create a temporary Querydef object and
initialize
' it's parameter values
Set qryConns =
dbsAttTool.CreateQueryDef(gstrEmptyString, strSql)
qryConns.Parameters("w_id").Value = lngWorkspaceId

Set rstConns =
qryConns.OpenRecordset(dbOpenSnapshot)

Exit Sub

ReadWorkspaceParametersErr:

    LogErrors Errors
    On Error GoTo 0
    Err.Raise vbObjectError +
errReadWorkspaceDataFailed, _
    mstrModuleName & "ReadConnectionDtIs",
LoadResString(errReadWorkspaceDataFailed)

End Sub

Public Sub ReadWorkspaceData lngWorkspaceId
As Long, _
    cStepsCol As cArrSteps, _
    cParamsCol As cArrParameters, _
    cConsCol As cArrConstraints, _
    cConns As cConnections, _
    cConnDetails As cConnDtIs, _
    rstStepsInWsp As Recordset, _
    qryStepsInWsp As DAO.QueryDef, _
    rstParamsInWsp As Recordset, _
    qryParamsInWsp As DAO.QueryDef, _
    rstConns As Recordset, _
    qryConns As DAO.QueryDef, _
    rstConnDtIs As Recordset, _
    qryConnDtIs As DAO.QueryDef)

' Loads the passed in structures with all the data
for
' the workspace. It also initializes the recordsets
' with the step and parameter records for the
workspace.

```

On Error GoTo ReadWorkspaceDataErr ShowBusy Call ReadStepsInWorkspace(rstStepsInWsp, qyStepsInWsp, lngWorkspaceId) ' Load all the steps in the array LoadRecordsetInStepsArray rstStepsInWsp, cStepsCol ' Initialize the steps with all the iterator ' records for each step Call LoadIteratorsForWsp(cStepsCol, lngWorkspaceId, rstStepsInWsp) ReadWorkspaceParameters lngWorkspaceId, rstParamsInWsp, qyParamsInWsp	' Load all the workspace parameters in the array LoadRecordsetInParameterArray rstParamsInWsp, cParamsCol ' Read and load connection strings ReadConnections lngWorkspaceId, rstConns, qyConns LoadRecordsetInConnectionArray rstConns, cConns ' Read and load connection information ReadConnectionDtls lngWorkspaceId, rstConnDtls, qyConnDtls LoadRSInConnDtlArray rstConnDtls, cConnDetails ' Finally, load the step constraints collection class with ' all the constraints for the steps in the workspace cConsCol.LoadConstraints lngWorkspaceId, rstStepsInWsp	ShowFree Exit Sub ReadWorkspaceDataErr: ' Log the error code raised by Visual Basic ShowFree Call LogErrors(Errors) On Error GoTo 0 gstrSource = mstrModuleName & "ReadWorkspaceData" Err.Raise vbObjectError + errReadWorkspaceDataFailed, _ gstrSource, _ LoadResString(errReadWorkspaceDataFailed) End Sub
---	---	--

<pre>// FILE: LogWriter.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // LogWriter.cpp : Implementation of DLL Exports. // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f LogWriterps.mk in the project directory. #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "LogWriter.h" #include "LogWriter_i.c" #include "SMLog.h" CComModule _Module; BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_SMLog, CSMLog) END_OBJECT_MAP() // DLL Entry Point extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_LOGWRITERLib); DisableThreadLibraryCalls(hInstance); } else if (dwReason == DLL_PROCESS_DETACH) _Module.Term(); return TRUE; // ok } // Used to determine whether the DLL can be unloaded by OLE STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } // Returns a class factory to create an object of the requested type STDAPI DllGetObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } // DllRegisterServer - Adds entries to the system registry STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); }</pre>	<pre>//////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } /* this ALWAYS GENERATED file contains the definitions for the interfaces */ /* File created by MIDL compiler version 5.01.0164 */ /* at Thu Sep 19 17:49:50 2002 */ /* Compiler settings for C:\charles\Stepmaster\LogWriter\LogWriter.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ //@@@MIDL_FILE_HEADING() /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __RPCNDR_H_VERSION__ #error this stub requires an updated version of <rpcndr.h> #endif // __RPCNDR_H_VERSION__ #ifndef COM_NO_WINDOWS_H #include "windows.h" #include "ole2.h" #endif /*COM_NO_WINDOWS_H*/ #ifndef __LogWriter_h__ #define __LogWriter_h__ #ifdef __cplusplus extern "C"{ #endif /* Forward Declarations */ #ifndef __ISMLog_FWD_DEFINED__ #define __ISMLog_FWD_DEFINED__ typedef interface ISMLog ISMLog; #endif /*__ISMLog_FWD_DEFINED__*/ #ifndef __ISMLogEvents_FWD_DEFINED__ #define __ISMLogEvents_FWD_DEFINED__ typedef interface _ISMLogEvents _ISMLogEvents; #endif /*__ISMLogEvents_FWD_DEFINED__*/ #ifndef __SMLog_FWD_DEFINED__ #define __SMLog_FWD_DEFINED__</pre>
---	---

<pre> #ifdef __cplusplus typedef class SMLog SMLog; #else typedef struct SMLog SMLog; #endif /* __cplusplus */ #endif /* __SMLog_FWD_DEFINED__ */ /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); #ifdef __ISMLog_INTERFACE_DEFINED__ #define __ISMLog_INTERFACE_DEFINED__ /* interface ISMLog */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_ISMLog; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("5AC75DAD-1936-11D3-BC2D-00A0C90D2CA5") ISMLog : public IDispatch { public: virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_FileHeader(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteLine(BSTR szMsg) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteField(BSTR szMsg) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_FileName(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_Append(/* [in] */ BOOL newVal) = 0; }; #else /* C style interface */ typedef struct ISMLogVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(ISMLog __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(ISMLog __RPC_FAR * This); </pre>	<pre> ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(ISMLog __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(ISMLog __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(ISMLog __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(ISMLog __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(ISMLog __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_FileHeader)(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteLine)(ISMLog __RPC_FAR * This, BSTR szMsg); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteField)(ISMLog __RPC_FAR * This, BSTR szMsg); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_FileName)(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_Append)(ISMLog __RPC_FAR * This, /* [in] */ BOOL newVal); END_INTERFACE } ISMLogVtbl; </pre>
--	--

<pre> interface ISMLog { CONST_VTBL struct ISMLogVtbl __RPC_FAR *lpVtbl; }; #ifndef COBJMACROS #define ISMLog_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define ISMLog_AddRef(This) \ (This)->lpVtbl->AddRef(This) #define ISMLog_Release(This) \ (This)->lpVtbl->Release(This) #define ISMLog_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define ISMLog_GetTypeInfo(This, iTInfo, lcid, ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This, iTInfo, lcid, ppTInfo) #define ISMLog_GetIDsOfNames(This, riid, rgszNames, cNames, lcid, rgD ispId) \ (This)->lpVtbl-> GetIDsOfNames(This, riid, rgszNames, cNames, lcid, rgDispId) #define ISMLog_Invoke(This, dispIdMember, riid, lcid, wFlags, pDispPara ms, pVarResult, pExcepInfo, puArgErr) \ (This)->lpVtbl-> Invoke(This, dispIdMember, riid, lcid, wFlags, pDispParams, pVarR esult, pExcepInfo, puArgErr) #define ISMLog_put_FileHeader(This, newVal) \ (This)->lpVtbl-> put_FileHeader(This, newVal) #define ISMLog_WriteLine(This, szMsg) \ (This)->lpVtbl-> WriteLine(This, szMsg) #define ISMLog_WriteField(This, szMsg) \ (This)->lpVtbl-> WriteField(This, szMsg) #define ISMLog_put_FileName(This, newVal) \ (This)->lpVtbl-> put_FileName(This, newVal) #define ISMLog_put_Append(This, newVal) \ (This)->lpVtbl-> put_Append(This, newVal) #endif /* COBJMACROS */ #endif /* C style interface */ /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_FileHeader_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); </pre>	<pre> void __RPC_STUB ISMLog_put_FileHeader_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMLog_WriteLine_Proxy(ISMLog __RPC_FAR * This, BSTR szMsg); void __RPC_STUB ISMLog_WriteLine_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMLog_WriteField_Proxy(ISMLog __RPC_FAR * This, BSTR szMsg); void __RPC_STUB ISMLog_WriteField_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_FileName_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); void __RPC_STUB ISMLog_put_FileName_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_Append_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BOOL newVal); void __RPC_STUB ISMLog_put_Append_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __ISMLog_INTERFACE_DEFINED__ */ #ifndef __LOGWRITERLib_LIBRARY_DEFINED__ #define __LOGWRITERLib_LIBRARY_DEFINED__ EXTERN_C const IID LIBID_LOGWRITERLib; #ifndef __ISMLogEvents_DISPINTERFACE_DEFINED__ #define __ISMLogEvents_DISPINTERFACE_DEFINED__ </pre>
---	---

<pre> EXTERN_C const IID DIID __ISMLogEvents; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("5AC75DB1-1936-11D3-BC2D-00A0C90D2CA5") _ISMLogEvents : public IDispatch { }; #else /* C style interface */ typedef struct _ISMLogEventsVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(_ISMLogEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(_ISMLogEvents __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(_ISMLogEvents __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(_ISMLogEvents __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(_ISMLogEvents __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(_ISMLogEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(_ISMLogEvents __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); </pre>	<pre> END_INTERFACE } _ISMLogEventsVtbl; interface _ISMLogEvents { CONST_VTBL struct _ISMLogEventsVtbl __RPC_FAR *lpVtbl; }; #ifdef COBJMACROS #define _ISMLogEvents_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl -> QueryInterface(This,riid,ppvObject) #define _ISMLogEvents_AddRef(This) \ (This)->lpVtbl -> AddRef(This) #define _ISMLogEvents_Release(This) \ (This)->lpVtbl -> Release(This) #define _ISMLogEvents_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl -> GetTypeInfoCount(This,pctinfo) #define _ISMLogEvents_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl -> GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define _ISMLogEvents_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) \ (This)->lpVtbl -> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define _ISMLogEvents_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl -> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) #endif /* COBJMACROS */ #endif /* C style interface */ #endif /* __ISMLogEvents_DISPINTERFACE_DEFINED__ */ EXTERN_C const CLSID CLSID_SMLog; #ifdef __cplusplus class DECLSPEC_UUID("5AC75DB0-1936-11D3-BC2D-00A0C90D2CA5") SMLog; #endif #endif /* LOGWRITERLib_LIBRARY_DEFINED__ */ /* Additional Prototypes for ALL interfaces */ </pre>
---	--

<pre> unsigned long __RPC_USER BSTR_UserSize(unsigned long __RPC_FAR *, unsigned long , BSTR __RPC_FAR *); unsigned char __RPC_FAR * __RPC_USER BSTR_UserMarshal(unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, BSTR __RPC_FAR *); unsigned char __RPC_FAR * __RPC_USER BSTR_UserUnmarshal(unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, BSTR __RPC_FAR *); void __RPC_USER BSTR_UserFree(unsigned long __RPC_FAR *, BSTR __RPC_FAR *); /* end of Additional Prototypes */ #ifdef __cplusplus } #endif #endif // FILE: LogWriter.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // LogWriter.cpp : Implementation of DLL Exports. // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f LogWriterps.mk in the project directory. #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "LogWriter.h" #include "LogWriter_i.c" #include "SMLog.h" CComModule _Module; BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_SMLog, CSMLog) END_OBJECT_MAP() //////////////////////////////////// // DLL Entry Point extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_LOGWRITERLib); DisableThreadLibraryCalls(hInstance); } else if (dwReason == DLL_PROCESS_DETACH) _Module.Term(); return TRUE; // ok } </pre>	<pre> //////////////////////////////////// // Used to determine whether the DLL can be unloaded by OLE STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } //////////////////////////////////// // Returns a class factory to create an object of the requested type STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } //////////////////////////////////// // DllRegisterServer - Adds entries to the system registry STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); } //////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } /* this ALWAYS GENERATED file contains the definitions for the interfaces */ /* File created by MIDL compiler version 5.01.0164 */ /* at Thu Sep 19 17:49:50 2002 */ /* Compiler settings for C:\charles\Stepmaster\LogWriter\LogWriter.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ @@@MIDL_FILE_HEADING() /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __RPCNDR_H_VERSION__ #error this stub requires an updated version of <rpcndr.h> #endif // __RPCNDR_H_VERSION__ #ifndef COM_NO_WINDOWS_H #include "windows.h" #include "ole2.h" #endif /*COM_NO_WINDOWS_H*/ </pre>
---	--

<pre> #ifndef __LogWriter_h__ #define __LogWriter_h__ #ifdef __cplusplus extern "C"{ #endif /* Forward Declarations */ #ifndef __ISMLog_FWD_DEFINED__ #define __ISMLog_FWD_DEFINED__ typedef interface ISMLog ISMLog; #endif /* __ISMLog_FWD_DEFINED__ */ #ifndef __ISMLogEvents_FWD_DEFINED__ #define __ISMLogEvents_FWD_DEFINED__ typedef interface _ISMLogEvents _ISMLogEvents; #endif /* __ISMLogEvents_FWD_DEFINED__ */ #ifndef __SMLog_FWD_DEFINED__ #define __SMLog_FWD_DEFINED__ #ifdef __cplusplus typedef class SMLog SMLog; #else typedef struct SMLog SMLog; #endif /* __cplusplus */ #endif /* __SMLog_FWD_DEFINED__ */ /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); #ifndef __ISMLog_INTERFACE_DEFINED__ #define __ISMLog_INTERFACE_DEFINED__ /* interface ISMLog */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_ISMLog; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("5AC75DAD-1936-11D3-BC2D-00A0C90D2CA5") ISMLog : public IDispatch { public: virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_FileHeader(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteLine(BSTR szMsg) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteField(BSTR szMsg) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_FileName(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_Append(/* [in] */ BOOL newVal) = 0; }; #else /* C style interface */ </pre>	<pre> typedef struct ISMLogVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(ISMLog __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(ISMLog __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(ISMLog __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(ISMLog __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(ISMLog __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(ISMLog __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(ISMLog __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_FileHeader)(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteLine)(ISMLog __RPC_FAR * This, BSTR szMsg); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteField)(ISMLog __RPC_FAR * This, BSTR szMsg); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_FileName)(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_Append)(ISMLog __RPC_FAR * This, /* [in] */ BOOL newVal); END_INTERFACE } ISMLogVtbl; </pre>
---	---

<pre> interface ISMLog { CONST_VTBL struct ISMLogVtbl __RPC_FAR *lpVtbl; }; #ifdef COBJMACROS #define ISMLog_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define ISMLog_AddRef(This) \ (This)->lpVtbl->AddRef(This) #define ISMLog_Release(This) \ (This)->lpVtbl->Release(This) #define ISMLog_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define ISMLog_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define ISMLog_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDisp ids) \ (This)->lpVtbl-> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define ISMLog_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispPara ms,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl-> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarR esult,pExcepInfo,puArgErr) #define ISMLog_put_FileHeader(This,newVal) \ (This)->lpVtbl-> put_FileHeader(This,newVal) #define ISMLog_WriteLine(This,szMsg) \ (This)->lpVtbl-> WriteLine(This,szMsg) #define ISMLog_WriteField(This,szMsg) \ (This)->lpVtbl-> WriteField(This,szMsg) #define ISMLog_put_FileName(This,newVal) \ (This)->lpVtbl-> put_FileName(This,newVal) #define ISMLog_put_Append(This,newVal)\ (This)->lpVtbl-> put_Append(This,newVal) #endif /* COBJMACROS */ #endif /* C style interface */ /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_FileHeader_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); </pre>	<pre> void __RPC_STUB ISMLog_put_FileHeader_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMLog_WriteLine_Proxy(ISMLog __RPC_FAR * This, BSTR szMsg); void __RPC_STUB ISMLog_WriteLine_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMLog_WriteField_Proxy(ISMLog __RPC_FAR * This, BSTR szMsg); void __RPC_STUB ISMLog_WriteField_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_FileName_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BSTR newVal); void __RPC_STUB ISMLog_put_FileName_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE ISMLog_put_Append_Proxy(ISMLog __RPC_FAR * This, /* [in] */ BOOL newVal); void __RPC_STUB ISMLog_put_Append_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __ISMLog_INTERFACE_DEFINED__ */ #ifdef __LOGWRITERLib_LIBRARY_DEFINED__ #define __LOGWRITERLib_LIBRARY_DEFINED__ </pre>
--	--

<pre> /* library LOGWRITERLib */ /* [helpstring][version][uuid] */ EXTERN_C const IID LIBID_LOGWRITERLib; #ifdef __ISMLogEvents_DISPINTERFACE_DEFINED__ #define __ISMLogEvents_DISPINTERFACE_DEFINED__ /* dispinterface _ISMLogEvents */ /* [helpstring][uuid] */ EXTERN_C const IID DIID__ISMLogEvents; #ifdef __cplusplus && !defined(CINTERFACE) MIDL_INTERFACE("5AC75DB1-1936-11D3-BC2D-00A0C90D2CA5") _ISMLogEvents : public IDispatch { }; #else /* C style interface */ typedef struct _ISMLogEventsVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(_ISMLogEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(_ISMLogEvents __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(_ISMLogEvents __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(_ISMLogEvents __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(_ISMLogEvents __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(_ISMLogEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); </pre>	<pre> /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(_ISMLogEvents __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); END_INTERFACE } _ISMLogEventsVtbl; interface _ISMLogEvents { CONST_VTBL struct _ISMLogEventsVtbl __RPC_FAR *lpVtbl; }; #ifdef COBJMACROS #define _ISMLogEvents_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl -> QueryInterface(This,riid,ppvObject) #define _ISMLogEvents_AddRef(This) \ (This)->lpVtbl -> AddRef(This) #define _ISMLogEvents_Release(This) \ (This)->lpVtbl -> Release(This) #define _ISMLogEvents_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl -> GetTypeInfoCount(This,pctinfo) #define _ISMLogEvents_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl -> GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define _ISMLogEvents_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) \ (This)->lpVtbl -> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define _ISMLogEvents_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl -> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) #endif /* COBJMACROS */ #endif /* C style interface */ #endif /* __ISMLogEvents_DISPINTERFACE_DEFINED__ */ </pre>
--	--

<pre> EXTERN_C const CLSID CLSID_SMLog; #ifdef __cplusplus class DECLSPEC_UUID("5AC75DB0-1936-11D3-BC2D-00A0C90D2CA5") SMLog; #endif #endif /* __LOGWRITERLib_LIBRARY_DEFINED__ */ unsigned long __RPC_USER BSTR_UserSize(unsigned long __RPC_FAR *, unsigned long , BSTR __RPC_FAR *); unsigned char __RPC_FAR * __RPC_USER BSTR_UserMarshal(unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, BSTR __RPC_FAR *); unsigned char __RPC_FAR * __RPC_USER BSTR_UserUnmarshal(unsigned long __RPC_FAR *, unsigned char __RPC_FAR *, BSTR __RPC_FAR *); void __RPC_USER BSTR_UserFree(unsigned long __RPC_FAR *, BSTR __RPC_FAR *); /* end of Additional Prototypes */ #ifdef __cplusplus } #endif #endif // FILE: LogWriter.cpp /// FILE: LogWriterCP.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // PURPOSE: Connection point implementation // Contact: Reshma Tharamal (reshmat@microsoft.com) #ifndef _LOGWRITERCP_H_ #define _LOGWRITERCP_H_ template <class T> class CProxy_ISMLogEvents : public IConnectionPointImpl<T, &DIID__ISMLogEvents, CComDynamicUnkArray> { //Warning this class may be recreated by the wizard. public: }; #endif // FILE: resource.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // PURPOSE: Resource file // Contact: Reshma Tharamal (reshmat@microsoft.com) // //{{NO_DEPENDENCIES}} // Microsoft Developer Studio generated include file. // Used by LogWriter.rc // #define IDS_PROJNAME 100 #define IDR_SMLOG 101 // Next default values for new objects // #ifdef APSTUDIO_INVOKED #ifndef APSTUDIO_READONLY_SYMBOLS #define _APS_NEXT_RESOURCE_VALUE 201 #define _APS_NEXT_COMMAND_VALUE 32768 #define _APS_NEXT_CONTROL_VALUE 201 #define _APS_NEXT_SYMED_VALUE 102 #endif #endif </pre>	<pre> // FILE: SMLog.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of CSMLog // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMLog.cpp : Implementation of CSMLog #include <stdafx.h> #include <stdio.h> #include "LogWriter.h" #include "SMLog.h" //////////////////////////////////// // CSMLog STDMETHODIMP CSMLog::InterfaceSupportsErrorInfo(REFIID riid) { static const IID* arr[] = { &IID_ISMLog }; for (int i=0; i < sizeof(arr) / sizeof(arr[0]); i++) { if (InlineIsEqualGUID(*arr[i],riid)) return S_OK; } return S_FALSE; } STDMETHODIMP CSMLog::WriteToFile(BSTR szMsg) { // Writes the passed in string to the file _bstr_t szTempMsg(szMsg); return(Write((PBYTE)(LPSTR)szTempMsg, SysStringLen(szMsg))); } HRESULT CSMLog::Init() { char szDrive[256]; char szDir[256]; char szLogDir[256]; HANDLE hLogThread; DWORD dwThreadID; _bstr_t szFile(m_szFile); DWORD lDisposition; //create transaction log directory _splitpath((LPCTSTR)szFile, szDrive, szDir, NULL, NULL); _makepath(szLogDir, szDrive, szDir, NULL, NULL); CreateDirectory(szLogDir, NULL); iBufferSize = WRITE_BUFFER_SIZE; iBytesFreeInBuffer = iBufferSize; // use VirtualAlloc to get page aligned buffers // for (int i=0;i<MAX_NUM_BUFFERS;i++) { // use VirtualAlloc to get page aligned buffers // pBuffer[i] = (BYTE *)VirtualAlloc(NULL, iBufferSize, MEM_COMMIT, PAGE_READWRITE); if (pBuffer[i] == NULL) return RaiseSystemError(); } } </pre>
---	--

<pre> iActiveBuffer = 0; pCurrent = pBuffer[iActiveBuffer]; IDisposition = m_bAppend ? OPEN_ALWAYS : CREATE_ALWAYS; m_hTxnFile = CreateFile(LPCTSTR)szFile, GENERIC_WRITE, FILE_SHARE_READ, NULL, IDisposition, FILE_ATTRIBUTE_NORMAL, NULL); if (m_hTxnFile == INVALID_HANDLE_VALUE) return (RaiseSystemError()); if (m_bAppend) if (SetFilePointer(m_hTxnFile, 0, NULL, FILE_END) == ERR_SET_FILE_POINTER) return (RaiseSystemError()); hIoComplete = CreateEvent(NULL, TRUE, TRUE, NULL); if (hIoComplete == NULL) return RaiseSystemError(); hLogFileIo = CreateEvent(NULL, FALSE, FALSE, NULL); if (hLogFileIo == NULL) return RaiseSystemError(); hLogThread = CreateThread(NULL, 0, (LPTHREAD_START_ROUTINE)LogFileIO, this, 0, &dwThreadID); if (hLogThread == NULL) return RaiseSystemError(); if (m_szHeader != NULL) WriteLine(m_szHeader); return S_OK; } void CSMLog::LogFileIO(void *ptr) { unsigned long BytesWritten; CSMLog *p=(CSMLog *)ptr; while(TRUE) { WaitForSingleObject(p->hLogFileIo, INFINITE); if (p->m_hTxnFile == INVALID_HANDLE_VALUE) break; // do synchronous (blocking) write to log file if (!WriteFile(p->m_hTxnFile, p->pBuffer[p->iIoBuffer],p- >iWriteSize,&BytesWritten,NULL)) { // set error code in this thread, but don't throw an exception // because no one will catch it. p->dwError = GetLastError(); } SetEvent(p->hIoComplete); } SetEvent(p->hIoComplete); } </pre>	<pre> HRESULT CSMLog::Write(BYTE *ptr, DWORD iSize) { int StartPos, Remainder; int dwErrorLocal = 0; if (!m_bInitialized) { HRESULT hr = Init(); m_bInitialized = TRUE; if (FAILED(hr)) return hr; } if (m_hTxnFile == INVALID_HANDLE_VALUE) return S_OK; if (iBytesFreeInBuffer >= iSize) { memcpy(pCurrent, ptr, iSize); pCurrent += iSize; iBytesFreeInBuffer -= iSize; } else { // We don't expect to ever have to wait here, but just in case... WaitForSingleObject(hIoComplete, INFINITE); // check for an error from the log writer thread if (dwError != 0) { SetLastError(dwError); return RaiseSystemError(); } assert(iSize <= iBufferSize); memcpy(pCurrent, ptr, iBytesFreeInBuffer); StartPos = iBytesFreeInBuffer; Remainder = iSize - iBytesFreeInBuffer; // trigger an IO on the current buffer and roll to the next buffer iIoBuffer = iActiveBuffer; iWriteSize = iBufferSize; ResetEvent(hIoComplete); SetEvent(hLogFileIo); // wake up IO writer iActiveBuffer = (iActiveBuffer+1) % MAX_NUM_BUFFERS; pCurrent = pBuffer[iActiveBuffer]; memcpy(pCurrent, ((BYTE *)ptr+StartPos), Remainder); pCurrent += Remainder; iBytesFreeInBuffer = iBufferSize - Remainder; } return S_OK; } </pre>
--	---

<pre> void CSMLLog::CloseLogFile(void) { if (m_hTxnFile != INVALID_HANDLE_VALUE) { if (iBytesFreeInBuffer < iBufferSize) { WaitForSingleObject(hIoComplete, INFINITE); ResetEvent(hIoComplete); // check for an error from the log writer thread if (dwError != 0) { SetLastError(dwError); goto exit_SpinLock; } //zero fill remainder of buffer ZeroMemory(pCurrent, iBytesFreeInBuffer); iIoBuffer = iActiveBuffer; iWriteSize = iBufferSize - iBytesFreeInBuffer; SetEvent(hLogFileIo); // wake up IO writer } WaitForSingleObject(hIoComplete, INFINITE); // check for an error from the log writer thread if (dwError != 0) goto exit_SpinLock; pCurrent = pBuffer[iActiveBuffer]; ZeroMemory(pCurrent, iBufferSize); iIoBuffer = iActiveBuffer; CloseHandle(m_hTxnFile); m_hTxnFile = INVALID_HANDLE_VALUE; //handle to open transaction log file // wake up IO writer one more time for it to terminate ResetEvent(hIoComplete); SetEvent(hLogFileIo); // wake up IO writer WaitForSingleObject(hIoComplete, INFINITE); } exit_SpinLock: if (dwError != 0) { if (m_hTxnFile != INVALID_HANDLE_VALUE) { CloseHandle(m_hTxnFile); m_hTxnFile = INVALID_HANDLE_VALUE; } SetLastError(dwError); // TODO: Don't know yet what to do with an error on the file close, since this function is called by the destructor (which does not return a value) //throw new CSystemErr(CSystemErr::eWriteFile, "CTxnLog::CloseTransactionLogFile"); } } </pre>	<pre> // Wrapper function that raises an error if a Windows Api fails STDMETHODIMP CSMLLog::RaiseSystemError(void) { char s[ERR_BUFFER_SIZE]; long c; DWORD e; e = GetLastError(); c = sprintf(s, "Error code: %ld. ", e); c = FormatMessage(FORMAT_MESSAGE_FROM_SYSTEM FORMAT_MESSAGE_IGNORE_INSERTS, NULL, e, 0, s + c, sizeof(s) - c, NULL); return Error(s, 0, NULL, GUID_NULL); } //DEL STDMETHODIMP CSMLLog::get_FileName(BSTR *pVal) //DEL { //DEL *pVal = m_szFile; //DEL return S_OK; //DEL } STDMETHODIMP CSMLLog::put_FileName(BSTR newVal) { m_szFile = SysAllocString(newVal); return S_OK; } //DEL STDMETHODIMP CSMLLog::get_FileHeader(BSTR *pVal) //DEL { //DEL *pVal = m_szHeader; //DEL return S_OK; //DEL } STDMETHODIMP CSMLLog::put_FileHeader(BSTR newVal) { m_szHeader = SysAllocString(newVal); return S_OK; } STDMETHODIMP CSMLLog::WriteLine(BSTR szMsg) { _bstr_t szTmp(szMsg); szTmp += "\r"; szTmp += "\n"; return(WriteToFile(szTmp)); } STDMETHODIMP CSMLLog::WriteField(BSTR szMsg) { return(WriteToFile(szMsg)); } //DEL STDMETHODIMP CSMLLog::get_Append(BOOL *pVal) //DEL { //DEL *pVal = m_bAppend; //DEL return S_OK; //DEL } </pre>
--	---

<pre> STDMETHODIMP CSMLog::put_Append(BOOL newVal) { m_bAppend = newVal; return S_OK; } // FILE: SMExecute.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Declaration of the CSMLog // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMLog.h : Declaration of the CSMLog #ifndef __SMLOG_H_ #define __SMLOG_H_ #include "resource.h" // main symbols #include "assert.h" #include "comdef.h" #include "LogWriterCP.h" #define WRITE_BUFFER_SIZE 8*1024 #define MAX_NUM_BUFFERS 2 #define ERR_BUFFER_SIZE 512 #define ERR_SET_FILE_POINTER 0xFFFFFFFF //////////////////// // CSMLog class ATL_NO_VTABLE CSMLog : public CComObjectRootEx<CComSingleThreadModel>, public CComCoClass<CSMLog, &CLSID_SMLog>, public ISupportErrorInfo, public IConnectionPointContainerImpl<CSMLog>, public IDispatchImpl<ISMLog, &IID_ISMLog, &LIBID_LOGWRITERLib>, public CProxy_ISMLogEvents< CSMLog > { public: CSMLog() { m_bAppend = FALSE; m_bInitialized = FALSE; m_hTxnFile = INVALID_HANDLE_VALUE; hIoComplete = NULL; hLogFileIo = NULL; for (int i=0;i<MAX_NUM_BUFFERS;i++) { pBuffer[i] = NULL; pCurrent = NULL; m_szFile = NULL; m_szHeader = NULL; dwError = 0; } private: BOOL m_bAppend; BOOL m_bInitialized; HANDLE m_hTxnFile; //handle to log file HANDLE hIoComplete; //event to signify that there are no pending IOs HANDLE hLogFileIo; //event to signal the IO thread to write the inactive buffer BYTE *pBuffer[MAX_NUM_BUFFERS]; BYTE *pCurrent; //ptr to current buffer int iActiveBuffer; //indicates which buffer is active: 0 or 1 int iIoBuffer; //buffer for any pending IO operation DWORD dwError; DWORD iBufferSize; //buffer allocated size </pre>	<pre> DWORD iBytesFreeInBuffer; // bytes available for use in buffer DWORD iWriteSize; //bytes to write to file BSTR m_szFile; //name of the file to write to BSTR m_szHeader; //header to be printed to the file (optional) private: static void LogFileIO(void *p); HRESULT Write(BYTE *ptr, DWORD iSize); STDMETHODIMP WriteToFile(BSTR szMsg); void CloseLogFile(void); STDMETHODIMP RaiseSystemError(void); }; #endif //__SMLOG_H_ // FILE: stdafx.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // PURPOSE: source file that includes just the standard // includes // Contact: Reshma Tharamal (reshmat@microsoft.com) // stdafx.cpp : source file that includes just the standard includes // stdafx.pch will be the pre-compiled header // stdafx.obj will contain the pre-compiled type information #include "stdafx.h" #ifdef _ATL_STATIC_REGISTRY #include <statreg.h> #include <statreg.cpp> #endif #include <atlimpl.cpp> // FILE: stdafx.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // PURPOSE: include file for standard system include files, // or project specific include files that are used frequently, // but are changed infrequently // Contact: Reshma Tharamal (reshmat@microsoft.com) // // if // !defined(AFX_STDAFX_H_5AC75DA4_1936_11D3_BC2D_ // 00A0C90D2CA5__INCLUDED_) // #define // AFX_STDAFX_H_5AC75DA4_1936_11D3_BC2D_00A0C90 // D2CA5__INCLUDED_ // // if _MSC_VER > 1000 // #pragma once // #endif // _MSC_VER > 1000 // // #define STRICT // #ifndef _WIN32_WINNT // #define _WIN32_WINNT 0x0400 // #endif // #define _ATL_APARTMENT_THREADED // // #include <atlbase.h> // //You may derive a class from CComModule and use it if you // //want to override something, but do not change the name of // // _Module extern CComModule _Module; // #include <atlcom.h> // //{{AFX_INSERT_LOCATION}} // // Microsoft Visual C++ will insert additional declarations // immediately before the previous line. // #endif // // !defined(AFX_STDAFX_H_5AC75DA4_1936_11D3_BC2D_ // 00A0C90D2CA5__INCLUDED_) </pre>
--	--

<pre> // FILE: Execute.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of CExecute. // Contact: Reshma Tharamal (reshmat@microsoft.com) // #include "stdafx.h" #include "ExecuteDll.h" #include "SMEExecute.h" #include "Execute.h" extern SQLHENV henv; extern SM_Connection_Info *p_Connections; // Pointer to open connections extern int iConnectionCount; // Number of open connections extern CRITICAL_SECTION hConnections; // Critical section to serialize // access to available connections #ifdef _TPCH_AUDIT extern FILE *pLogFile; // Log file containing timestamps extern CRITICAL_SECTION hLogFileWrite; // Handle to critical section #endif //////////////////////////////////// // CExecute char * g_szOdbcOps[] = { "SQLAllocHandle", "SQLDriverConnect", "SQLExecDirect", "SQLSetStmtAttr", "SQLCancel", "SQLNumResultCols", "SQLDescribeCol", "SQLColAttribute", "SQLFetch", "SQLGetData", "SQLRowCount", "SQLMoreResults", "SQLBindCol" }; char * CExecError::m_szExecErrorDesc[] = { "Connection is already in use." }; STDMETHODIMP CEXecute::InterfaceSupportsErrorInfo(REFIID riid) { static const IID* arr[] = { &IID_IExecute }; for (int i=0; i < sizeof(arr) / sizeof(arr[0]); i++) { if (InlineIsEqualGUID(*arr[i],riid)) return S_OK; } return S_FALSE; } </pre>	<pre> STDMETHODIMP CExecute::put_OutputFile(BSTR newVal) { assert(m_pOutputFile); m_OutputFile = newVal; HRESULT hr = m_pOutputFile->put_FileName(newVal); if FAILED(hr) { m_pOutputFile->Release(); m_pOutputFile = NULL; } return hr; } //DEL STDMETHODIMP CExecute::put_LogFile(BSTR newVal) //DEL { //DEL assert(m_pLogFile); //DEL //DEL m_pLogFile->put_FileName(newVal); //DEL return S_OK; //DEL } STDMETHODIMP CExecute::put_ErrorFile(BSTR newVal) { assert(m_pErrorFile); m_ErrorFile = newVal; HRESULT hr = m_pErrorFile->put_FileName(newVal); if FAILED(hr) { m_pErrorFile->Release(); m_pErrorFile = NULL; } return hr; } STDMETHODIMP CExecute::DoExecute(BSTR szCommand, BSTR szExecutionDtls, ExecutionType ExecMethod, \ BOOL bNoCount, BOOL bNoExecute, BOOL bParseOnly, BOOL bQuotedIds, \ BOOL bAnsiNulls, BOOL bShowQP, BOOL bStatsTime, BOOL bStatsIO, \ long lRowCount, long lQueryTmout, BSTR szConnection) { HANDLE hThrd; DWORD tid; _CrtSetReportFile(_CRT_WARN, _CRTDBG_FILE_STDOUT); m_szCommand = szCommand; m_szExecDtls = szExecutionDtls; m_ExecMthd = ExecMethod; if (m_ExecMthd == execODBC) { m_bNoCount = bNoCount; m_bNoExecute = bNoExecute; m_bParseOnly = bParseOnly; m_bQuotedIds = bQuotedIds; m_bAnsiNulls = bAnsiNulls; m_bShowQP = bShowQP; m_bStatsTime = bStatsTime; m_bStatsIO = bStatsIO; m_lRowCount = lRowCount; m_lQueryTmout = lQueryTmout; m_szConnection = szConnection; } } </pre>
--	---

<pre> if((hThrd = CreateThread(0, 0, (LPTHREAD_START_ROUTINE)ExecutionThread, this, 0, &tid)) == NULL) return(RaiseSystemError()); CloseHandle(hThrd); return S_OK; } STDMETHODIMP CExecute::Abort() { if (m_ExecMthd == execShell) return(AbortShell()); else return(AbortODBC()); } void ExecutionThread(LPVOID lpParameter) { CExecute *MyExecute = (CExecute*)lpParameter; MyExecute->m_tElapsedTime = 0; GetLocalTime(&MyExecute->m_tStartTime); MyExecute->PostMessage(WM_TASK_START, 0, 0); #ifdef _TPCH_AUDIT char szBuffer[MAXLOGCMDBUF]; char szFmt[MAXBUFLen]; sprintf(szFmt, "Start Step: '%%%.%ds' at '%d/%d/%d %d:%d:%d:%d:%d\n", MAXLOGCMDLEN, MyExecute->m_tStartTime.wMonth, MyExecute- >m_tStartTime.wDay, MyExecute->m_tStartTime.wYear, MyExecute- >m_tStartTime.wHour, MyExecute->m_tStartTime.wMinute, MyExecute- >m_tStartTime.wSecond, MyExecute->m_tStartTime.wMilliseconds); if (MyExecute->m_ExecMthd == execShell) WriteFileToTpchLog((LPSTR)MyExecute- >m_szCommand, szFmt); else { sprintf(szBuffer, szFmt, (LPSTR)MyExecute->m_szCommand); WriteToTpchLog(szBuffer); } #endif // Initialize the run status for the step to running. The completion status for // the step will be initialized by the Shell and ODBC execution functions. MyExecute->m_StepStatus = gintRunning; if (MyExecute->m_ExecMthd == execShell) MyExecute->m_tElapsedTime = MyExecute->ExecuteShell(); else MyExecute->m_tElapsedTime = MyExecute->ExecuteODBC(); // Close the output, log and error files if (MyExecute->m_pOutputFile) MyExecute->m_pOutputFile->Release(); MyExecute->m_pOutputFile = NULL; MyExecute->m_ExecTime = NULL; GetLocalTime(&MyExecute->m_tEndTime); </pre>	<pre> #ifdef _TPCH_AUDIT sprintf(szFmt, "Complete Step: '%%%.%ds' at '%d/%d/%d %d:%d:%d:%d:%d\n", MAXLOGCMDLEN, MyExecute->m_tEndTime.wMonth, MyExecute- >m_tEndTime.wDay, MyExecute->m_tEndTime.wYear, MyExecute- >m_tEndTime.wHour, MyExecute->m_tEndTime.wMinute, MyExecute- >m_tEndTime.wSecond, MyExecute->m_tEndTime.wMilliseconds); if (MyExecute->m_ExecMthd == execShell) WriteFileToTpchLog((LPSTR)MyExecute- >m_szCommand, szFmt); else { sprintf(szBuffer, szFmt, (LPSTR)MyExecute- >m_szCommand); WriteToTpchLog(szBuffer); } #endif MyExecute->PostMessage(WM_TASK_FINISH, 0, 0); return; } #ifdef _TPCH_AUDIT void WriteFileToTpchLog(LPSTR szFile, LPSTR szFmt) { // Reads a maximum of MAXLOGCMDBUF characters from the command file and writes it to the log FILE *fpCmd; int iRead; char szBuf[MAXLOGCMDBUF]; char szCmd[MAXLOGCMDLEN]; if (pfLogFile != NULL) { if ((fpCmd = fopen(szFile, FILE_ACCESS_READ)) != NULL) { iRead = fread(szCmd, sizeof(char), sizeof(szCmd) / sizeof(char), fpCmd); if (iRead < MAXLOGCMDLEN) szCmd[iRead] = '\0'; else szCmd[MAXLOGCMDLEN - 1] = '\0'; sprintf(szBuf, szFmt, szCmd); WriteToTpchLog(szBuf); fclose(fpCmd); } } } void WriteToTpchLog(char *szMsg) { if (pfLogFile != NULL) { EnterCriticalSection(&hLogFileWrite); fprintf(pfLogFile, szMsg); LeaveCriticalSection(&hLogFileWrite); } return; } #endif </pre>
--	--

<pre> TC_TIME CExecute::ExecuteShell() { STARTUPINFO Start; PROCESS_INFORMATION proc; DWORD exitCode; TC_TIME tElapsed = 0; _bstr_t szCommand("cmd /c "); LPSTR szStartDir; CURRENCY Elapsed; szCommand += m_szCommand; // Redirect output and error information szCommand += " > " + m_OutputFile + " 2> " + m_ErrorFile; // Initialize the STARTUPINFO structure: memset(&Start, 0, sizeof(STARTUPINFO)); Start.cb = sizeof(Start); Start.dwFlags = STARTF_USESHOWWINDOW; Start.wShowWindow = SW_SHOWMINNOACTIVE; memset(&proc, 0, sizeof(PROCESS_INFORMATION)); szStartDir = strcmp((LPCTSTR)m_szExecDtls, "") == 0 ? NULL : (LPSTR)m_szExecDtls; m_ExecTime->Start(); // Start the shelled application: if (!CreateProcessA(NULL, (LPSTR)szCommand, NULL, NULL, FALSE, NORMAL_PRIORITY_CLASS, NULL, szStartDir, &Start, &proc)) { m_StepStatus = gintFailed; LogSystemError(m_pErrorFile); m_ExecTime->Stop(&Elapsed); return((TC_TIME)Elapsed.int64); } m_hHandle = proc.hProcess; // Give the process time to execute and finish WaitForSingleObject(m_hHandle, INFINITE); m_ExecTime->Stop(&Elapsed); if (!GetExitCodeProcess(m_hHandle, &exitCode)) { m_StepStatus = gintFailed; LogSystemError(m_pErrorFile); } else m_StepStatus = gintComplete; // Close all open handles to the shelled process CloseHandle(m_hHandle); return((TC_TIME)Elapsed.int64); } </pre>	<pre> STDMETHODIMP CExecute::AbortShell() { if (m_hHandle != SQL_NULL_HSTMT) if (!TerminateProcess(m_hHandle, 0)) return(RaiseSystemError()); return(S_OK); } TC_TIME CExecute::ExecuteODBC() { TC_TIME tElapsed = 0; HDBC m_hdbc; SQLRETURN rc; LPSTR szCmd; CURRENCY Elapsed; BOOL bDoConnect = FALSE; // ODBC specific initialization m_hdbc = SQL_NULL_HDBC; try { // Allocate a new connection if we are creating a dynamic connection or if // the named connection doesn't exist InitializeConnection(&m_hdbc, &bDoConnect); // Ensure that the connection is valid. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif if (bDoConnect) { // Allocate connection handle, open a connection and set connection attributes. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif if (m_bAbort) return(tElapsed); // Connect to the server using the passed in connection string rc = SQLDriverConnect(m_hdbc, NULL, (unsigned char *) (LPSTR)m_szExecDtls, SQL_NTS, NULL, 0, NULL, SQL_DRIVER_NOPROMPT); HandleODBCError(rc, SQL_HANDLE_DBC, m_hdbc, SMSQLDriverConnect); } ReConnectDeadConnection(&m_hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for hdbc.\n"); #endif } } </pre>
---	---

<pre> if (!m_bAbort && (rc = SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hHandle)) != SQL_SUCCESS) HandleODBCError(rc, SQL_HANDLE_DBC, m_hdbc, SMSQLAllocHandle); // Set connection attributes if any have been modified from the default values if (m_lRowCount > 0) { char szConnOptions[512]; sprintf(szConnOptions, "SET ROWCOUNT %d ", m_lRowCount); SetConnectionOption(szConnOptions, &m_hdbc); } if (m_bQuotedIds) SetConnectionOption("SET QUOTED_IDENTIFIER ON ", &m_hdbc); if (!m_bAnsiNulls) SetConnectionOption("SET ANSI_NULL_DFLT_OFF ON ", &m_hdbc); if (!m_bAbort && m_lQueryTmout > 0) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLSetStmtAttr.\n"); #endif // Set the query timeout on the statement handle rc = SQLSetStmtAttr(m_hHandle, SQL_ATTR_QUERY_TIMEOUT, &m_lQueryTmout, SQL_IS_UINTEGER); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLSetStmtAttr); } if (m_bNoExecute) SetConnectionOption("SET NOEXEC ON ", &m_hdbc); else if (m_bParseOnly) SetConnectionOption("SET PARSEONLY ON ", &m_hdbc); else if (m_bShowQP) // Important to ensure that this is the last connection attributes being set - otherwise showplans are generated for all remaining SET statements SetConnectionOption("SET SHOWPLAN_TEXT ON ", &m_hdbc); else { if (m_bNoCount) SetConnectionOption("SET NOCOUNT ON ", &m_hdbc); if (m_bStatsIO) SetConnectionOption("SET STATISTICS IO ON ", &m_hdbc); // Important to ensure that this is the last connection attributes being set - // otherwise timing statistics are generated for all remaining SET statements if (m_bStatsTime) SetConnectionOption("SET STATISTICS TIME ON ", &m_hdbc); } m_szCmd = (LPSTR)m_szCommand; m_ExecTime->Start(); while ((szCmd = NextCmdInBatch((LPSTR)m_szCommand)) != NULL && !m_bAbort) { </pre>	<pre> #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLExecDirect.\n"); #endif // Execute the ODBC command rc = SQLExecDirect(m_hHandle, (unsigned char *)szCmd, SQL_NTS); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLExecDirect); free(szCmd); // Call a procedure to log the results to the output file ProcessResultsets(); } m_ExecTime->Stop(&Elapsed); ResetConnectionProperties(&m_hdbc); } catch(CODBCError *pErr) { m_StepStatus = gintFailed; delete pErr; } catch(CExecError *pErr) { m_StepStatus = gintFailed; pErr->LogErrors(this); delete pErr; } ODBCCleanup(&m_hdbc, &m_hHandle); if (m_StepStatus != gintFailed) m_StepStatus = gintComplete; return((DWORD)Elapsed.int64); } void CExecute::InitializeConnection(HDBC *phdbc, BOOL *pbDoConnect) { SQLRETURN rc; *pbDoConnect = TRUE; if (IsDynamicConnection()) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for m_hdbc.\n"); #endif rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); return; } } </pre>
---	--

<pre> EnterCriticalSection(&hConnections); // Returns the connection handle if the connection, m_szConnection, exists for (m_iConnectionIndex = iConnectionCount - 1; m_iConnectionIndex >= 0; m_iConnectionIndex--) { if (!strcmp((p_Connections + m_iConnectionIndex)- >szConnectionName, (LPSTR)m_szConnection)) { if (!(p_Connections + m_iConnectionIndex)- >bInUse) { *phdbc = (p_Connections + m_iConnectionIndex)->hdbc; (p_Connections + m_iConnectionIndex)- >bInUse = TRUE; *pbDoConnect = FALSE; break; } else { LeaveCriticalSection(&hConnections); throw new CExecError(CExecError::SM_ERR_CONN_IN_USE); } } } if (m_iConnectionIndex < 0) { // Connection was not found. Allocate connection handle and add it to list of // available connections. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for m_hdbc.\n"); #endif rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); m_iConnectionIndex = iConnectionCount++; p_Connections = (SM_Connection_Info *)realloc(p_Connections, iConnectionCount * sizeof(SM_Connection_Info)); strcpy((p_Connections + m_iConnectionIndex)- >szConnectionName, (LPSTR)m_szConnection); (p_Connections + m_iConnectionIndex)->hdbc = *phdbc; (p_Connections + m_iConnectionIndex)->bInUse = TRUE; } LeaveCriticalSection(&hConnections); return; } </pre>	<pre> void CExecute::ReConnectDeadConnection(HDBC *phdbc) { SQLRETURN rc; SQLINTEGER uConnDead; // Connect to the server using the passed in connection string rc = SQLGetConnectAttr(*phdbc, SQL_ATTR_CONNECTION_DEAD, &uConnDead, SQL_IS_INTEGER, NULL); HandleODBCError(rc, SQL_HANDLE_DBC, *phdbc, SMSQLDriverConnect); if (uConnDead == SQL_CD_TRUE) { // Cleanup the old connection and re-connect. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif rc = SQLDisconnect(*phdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, *phdbc); *phdbc = SQL_NULL_HDBC; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); // Connect to the server using the passed in connection string rc = SQLDriverConnect(*phdbc, NULL, (unsigned char *) (LPSTR)m_szExecDtIs, SQL_NTS, NULL, 0, NULL, SQL_DRIVER_NOPROMPT); HandleODBCError(rc, SQL_HANDLE_DBC, *phdbc, SMSQLDriverConnect); } return; } void CExecute::ResetConnectionUsage() { if (m_iConnectionIndex >= 0 && m_iConnectionIndex < iConnectionCount) { EnterCriticalSection(&hConnections); (p_Connections + m_iConnectionIndex)->bInUse = FALSE; LeaveCriticalSection(&hConnections); } return; } </pre>
--	--

<pre> void CExecute::ResetConnectionProperties(HDBC *p_hdbc) { SQLRETURN rc; // Reset connection attributes if any have been modified from the // default values if (m_bNoExecute) SetConnectionOption("SET NOEXEC OFF ", p_hdbc); else if (m_bParseOnly) SetConnectionOption("SET PARSEONLY OFF ", p_hdbc); else if (m_bShowQP) // Reset connection attributes in reverse order SetConnectionOption("SET SHOWPLAN_TEXT OFF ", p_hdbc); else { // Reset connection attributes in reverse order if (m_bStatsTime) SetConnectionOption("SET STATISTICS TIME OFF ", p_hdbc); if (m_bNoCount) SetConnectionOption("SET NOCOUNT OFF ", p_hdbc); if (m_bStatsIO) SetConnectionOption("SET STATISTICS IO OFF ", p_hdbc); } if (m_lRowCount > 0) { char szConnOptions[512]; sprintf(szConnOptions, "SET ROWCOUNT 0 "); SetConnectionOption(szConnOptions, p_hdbc); } if (m_bQuotedIds) SetConnectionOption("SET QUOTED_IDENTIFIER OFF ", p_hdbc); if (!m_bAnsiNulls) SetConnectionOption("SET ANSI_NULL_DFLT_OFF OFF ", p_hdbc); if (m_lQueryTmout > 0) { SQLINTEGER lQueryTmout = 0; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLSetStmtAttr.\n"); #endif // Set the query timeout on the statement handle rc = SQLSetStmtAttr(m_hHandle, SQL_ATTR_QUERY_TIMEOUT, &lQueryTmout, SQL_IS_INTEGER); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLSetStmtAttr); } return; } </pre>	<pre> LPSTR CExecute::NextCmdInBatch(LPSTR szBatch) { LPSTR szCmd, szSeparator, szStart; char szNext; szStart = m_szCmd; while ((szSeparator = strstr(szStart, CMD_SEPARATOR)) != NULL) { szNext = *(szSeparator + strlen(CMD_SEPARATOR)); if (szNext == '\n' szNext == '\r' szNext == '\0') break; else szStart = szSeparator + strlen(CMD_SEPARATOR); } if (!szSeparator) { // No more GO's if (strlen(m_szCmd) > 0) { szCmd = (LPSTR)malloc(strlen(m_szCmd) + 1); strcpy(szCmd, m_szCmd); m_szCmd += strlen(m_szCmd); } else szCmd = NULL; } else if (szSeparator - m_szCmd > 0) { // Strip the succeeding newline szCmd = (LPSTR)malloc(szSeparator - m_szCmd); strncpy(szCmd, m_szCmd, szSeparator - m_szCmd - 1); *(szCmd + (szSeparator - m_szCmd - 1)) = '\0'; m_szCmd += szSeparator - m_szCmd + strlen(CMD_SEPARATOR); if (szNext == '\n' szNext == '\r') m_szCmd += 1; } else szCmd = NULL; return(szCmd); } void CExecute::SetConnectionOption(LPSTR szConn, HDBC *pHdbc) { // Executes the passed in connection options 'set' statement. Returns True if it succeeded char szConnOptions[512]; SQLRETURN rc; sprintf(szConnOptions, szConn); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLExecDirect for connection option.\n"); #endif </pre>
--	--

<pre> if (m_bAbort) return; rc = SQLExecDirect(m_hHandle, (unsigned char *)szConnOptions, SQL_NTS); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLExecDirect); return; } STDMETHODCALLTYPE CExecute::AbortODBC() { m_bAbort = TRUE; try { if (m_hHandle != SQL_NULL_HSTMT) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLCancel.\n"); #endif SQLRETURN rc = SQLCancel(m_hHandle); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLCancel); } } catch(CODBCError *pErr) { delete pErr; } return(S_OK); } void CExecute::ProcessResultsets() { SQLSMALLINT *CTypeArray, *CScaleArray; SQLINTEGER *ColLenArray, *DispLenArray, *OffsetArray; SQLSMALLINT iColNameLen, SQLType, iColNull, i, NumCols = 0; SQLINTEGER iDispLen, iRowCount; SQLRETURN rc; char szColName[MAX_DATA_LEN + 1]; void *DataPtr; SQLINTEGER iLenOrInd = ALIGNBUF(sizeof(SQLINTEGER)); SQLUIINTEGER iRowArraySize, iArrayElementSize; // SQLUIINTEGER NumRowsFetched; // SQLUSMALLINT *RowStatusArray; if (!m_pOutputFile m_bAbort) return; do { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLNumResultCols.\n"); #endif </pre>	<pre> // Determine the number of result set columns. rc = SQLNumResultCols(m_hHandle, &NumCols); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLNumResultCols); if (NumCols > 0) { // Allocate arrays to hold the C type, scale, column and display length of the data CTypeArray = (SQLSMALLINT *) malloc(NumCols * sizeof(SQLSMALLINT)); CScaleArray = (SQLSMALLINT *) malloc(NumCols * sizeof(SQLSMALLINT)); ColLenArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); DispLenArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); OffsetArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); OffsetArray[0] = 0; for (i = 0; i < NumCols && !m_bAbort; i++) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDescribeCol.\n"); #endif // Get the column description, include the SQL type // Determine the column's byte length. Calculate the offset in the //buffer to the data as the offset to the previous column, plus the //byte length of the previous column, plus the byte length of the //previous column's length/indicator buffer. // Note that the byte length of the column and the length/indicator //buffer are increasedso that, assuming they start on an alignment //boundary, they will end on the byte before the next alignment //boundary. Although this might leave some holes in the buffer, it //is a relatively inexpensive way to guarantee alignment. rc = SQLDescribeCol(m_hHandle, ((SQLUSMALLINT) i)+1, (unsigned char *)szColName, sizeof(szColName), &iColNameLen, &SQLType, (unsigned long *)&ColLenArray[i], &CScaleArray[i], &iColNull); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLDescribeCol); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLColAttribute.\n"); #endif if (m_bAbort) return; rc = SQLColAttribute(m_hHandle, ((SQLUSMALLINT) i)+1, SQL_DESC_DISPLAY_SIZE, NULL, 0, NULL, &iDispLen); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLColAttribute); </pre>
--	---

<pre> // GetDefaultCType contains a switch statement that returns the // default C type for each SQL type. CTypeArray[i] = GetDefaultCType(SQLType); if ((CTypeArray[i] == SQL_C_CHAR CTypeArray[i] == SQL_C_BINARY) && ColLenArray[i] > MAX_DATA_LEN) { ColLenArray[i] = MAX_DATA_LEN; iDispLen = MAX_DATA_LEN; } DispLenArray[i] = max(iColNameLen, iDispLen); DispLenArray[i] = max(DispLenArray[i], sizeof(S_NULL)); // Print the column names in the header PrintData(szColName, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); // Add a byte for the null-termination character ColLenArray[i] += 1; ColLenArray[i] = ALIGNBUF(ColLenArray[i]); // Calculate the offset in the buffer to the data as the offset to the previous column, // plus the byte length of the previous column, plus the byte // length of the previous column's length/indicator buffer. if (i) OffsetArray[i] = OffsetArray[i-1] + ColLenArray[i-1] + iLenOrInd; } m_pOutputFile->WriteLine(NULL); iArrayElementSize = OffsetArray[NumCols-1] + ColLenArray[NumCols-1] + iLenOrInd; iRowArraySize = 1; // Allocate the data buffer. The size of the buffer is equal to the // offset to the data buffer for the final column, plus the byte // length of the data buffer and length/indicator // buffer for the last column. DataPtr = malloc(iRowArraySize * iArrayElementSize); // Specify the size of the structure with the SQL_ATTR_ROW_BIND_TYPE // statement attribute. This also declares that row-wise binding will // be used. Declare the rowset size with the SQL_ATTR_ROW_ARRAY_SIZE // statement attribute. Set the SQL_ATTR_ROW_STATUS_PTR statement // attribute to point to the row status array. Set the // SQL_ATTR_ROWS_FETCHED_PTR statement attribute to point to // NumRowsFetched. /* RowStatusArray = (SQLUSMALLINT *)malloc(iRowArraySize * sizeof(SQLUSMALLINT)); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_BIND_TYPE, &iArrayElementSize, SQL_IS_INTEGER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_ARRAY_SIZE, &iRowArraySize, SQL_IS_INTEGER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_STATUS_PTR, RowStatusArray, SQL_IS_POINTER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROWS_FETCHED_PTR, &NumRowsFetched, SQL_IS_POINTER); */ </pre>	<pre> // For each column, bind the address in the buffer at the start of the memory allocated // for that column's data and the address at the start of the memory allocated for that // column's length/indicator buffer. for (i = 0; i < NumCols; i++) { SQLBindCol(m_hHandle, i + 1, CTypeArray[i], (SQLPOINTER)((SQLCHAR *)DataPtr + OffsetArray[i]), ColLenArray[i], (SQLINTEGER *)((SQLCHAR *)DataPtr + OffsetArray[i] + ColLenArray[i])); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLBindCol); // Underline each column name memset(szColName, '-', DispLenArray[i]); *(szColName + DispLenArray[i]) = '\0'; PrintData(szColName, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); } m_pOutputFile->WriteLine(NULL); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFetch.\n"); #endif while (!m_bAbort && (rc = SQLFetch(m_hHandle)) != SQL_NO_DATA) { HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLFetch); /* for (i = 0; i < NumRowsFetched; i++) { if (RowStatusArray[i] == SQL_ROW_SUCCESS RowStatusArray[i] == SQL_ROW_SUCCESS_WITH_INFO) { /* for (i = 0; i < NumCols; i++) { // Retrieve and print each row. PrintData accepts a pointer to the data, its C type, and its byte length/indicator. if (*((SQLINTEGER *)((SQLCHAR *)DataPtr + OffsetArray[i] + ColLenArray[i])) == SQL_NULL_DATA) PrintData(S_NULL, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); } else PrintData((LPVOID)((SQLCHAR *)DataPtr + OffsetArray[i]), CTypeArray[i], DispLenArray[i], CScaleArray[i], m_pOutputFile); } m_pOutputFile->WriteLine(NULL); } m_pOutputFile->WriteLine(NULL); free(DataPtr); free(CTypeArray); free(CScaleArray); free(ColLenArray); free(DispLenArray); } // Write io statistics, if applicable LogODBCErrors(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLFetch); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLRowCount.\n"); #endif </pre>
---	---

<pre> if (m_bAbort) break; // action (insert, update, delete) query rc = SQLRowCount(m_hHandle, &iRowCount); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLRowCount); if (!m_bNoCount && iRowCount != -1) { sprintf(szColName, "(%d row(s) affected)", iRowCount); _bstr_t temp(szColName); m_pOutputFile->WriteLine((BSTR)temp); m_pOutputFile->WriteLine(NULL); } #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeStmt.\n"); #endif if (m_bAbort) break; SQLFreeStmt(m_hHandle, SQL_UNBIND); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLMoreResults.\n"); #endif if (m_bAbort) break; // Process the next resultset. This function returns 'success with info' even // if there is no other resultset and there are statistics messages to be printed. // Hence the check for -1 rows before printing. rc=SQLMoreResults(m_hHandle); if (rc != SQL_NO_DATA) HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLMoreResults); } while (rc != SQL_NO_DATA); return; } void CExecute::PrintData(void *vData, SQLSMALLINT CType, SQLINTEGER IndPtr, SQLSMALLINT iScale, ISMLog *pOutput) { // PrintData accepts a pointer to the data, its C type, // and its byte length/indicator. It contains a switch statement that casts and prints // the data according to its type. char *s; char fmt[MAXBUFLEN]; int j = 0; SQLINTEGER iColLen = IndPtr + 1; assert(iColLen); s = (LPSTR)malloc(iColLen + 1); if (s) </pre>	<pre> { if (vData) { switch(CType) { case SQL_C_CHAR: case SQL_C_WCHAR: case SQL_C_TYPE_DATE: case SQL_C_TYPE_TIME: case SQL_C_TYPE_TIMESTAMP: case SQL_C_INTERVAL_YEAR: case SQL_C_INTERVAL_MONTH: case SQL_C_INTERVAL_YEAR_TO_MONTH: case SQL_C_INTERVAL_DAY: case SQL_C_INTERVAL_HOUR: case SQL_C_INTERVAL_MINUTE: case SQL_C_INTERVAL_SECOND: case SQL_C_INTERVAL_DAY_TO_HOUR: case SQL_C_INTERVAL_DAY_TO_MINUTE: case SQL_C_INTERVAL_DAY_TO_SECOND: case SQL_C_INTERVAL_HOUR_TO_MINUTE: case SQL_C_INTERVAL_HOUR_TO_SECOND: case SQL_C_INTERVAL_MINUTE_TO_SECOND: case SQL_C_BINARY: sprintf(fmt, "%%.%ds", iColLen); j = sprintf(s, fmt, (char *)vData); break; case SQL_C_SHORT: j = sprintf(s, "%d", *(short *)vData); break; case SQL_C_LONG: j = sprintf(s, "%ld", *(long *)vData); break; case SQL_C_UBIGINT: j = sprintf(s, "%I64d", *((__int64 *)vData)); break; case SQL_C_FLOAT: j = sprintf(s, "%f", *(float *)vData); break; case SQL_C_DOUBLE: j = sprintf(s, "%f", *(double *)vData); break; case SQL_C_NUMERIC: sprintf(fmt, "%%.0%df", iScale); j = sprintf(s, fmt, *(double *)vData); break; default: j = sprintf(s, "%s", vData); break; } } if (iColLen - j > 0) memset(s + j, ' ', iColLen - j); *(s + iColLen) = '\0'; // Write the field to the output file _bstr_t temp(s); pOutput->WriteField((BSTR)temp); free(s); } return; } </pre>
--	---

<pre> SQLSMALLINT CExecute::GetDefaultCType(SQLINTEGER SQLType) { // GetDefaultCType returns the C type for the passed in SQL datatype. switch(SQLType) { case SQL_CHAR: case SQL_VARCHAR: case SQL_LONGVARCHAR: case SQL_WCHAR: case SQL_WVARCHAR: case SQL_WLONGVARCHAR: return(SQL_C_CHAR); case SQL_TINYINT: return(SQL_C_CHAR); case SQL_SMALLINT: return(SQL_C_SHORT); case SQL_INTEGER: return(SQL_C_LONG); case SQL_BIGINT: return(SQL_C_UBIGINT); case SQL_REAL: return(SQL_C_FLOAT); case SQL_FLOAT: case SQL_DOUBLE: // case SQL_DECIMAL: return(SQL_C_DOUBLE); case SQL_DECIMAL: return(SQL_C_CHAR); case SQL_BIT: return(SQL_C_CHAR); case SQL_BINARY: case SQL_VARBINARY: case SQL_LONGVARBINARY: return(SQL_C_CHAR); // return(SQL_C_BINARY); case SQL_TYPE_DATE: return(SQL_C_CHAR); // return(SQL_C_TYPE_DATE); case SQL_TYPE_TIME: return(SQL_C_CHAR); // return(SQL_C_TYPE_TIME); case SQL_TYPE_TIMESTAMP: return(SQL_C_CHAR); // return(SQL_C_TYPE_TIMESTAMP); case SQL_NUMERIC: return(SQL_C_FLOAT); </pre>	<pre> case SQL_INTERVAL_YEAR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_YEAR); case SQL_INTERVAL_MONTH: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_MONTH); case SQL_INTERVAL_YEAR_TO_MONTH: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_YEAR_TO_MONTH); case SQL_INTERVAL_DAY: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY); case SQL_INTERVAL_HOUR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR); case SQL_INTERVAL_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_MINUTE); case SQL_INTERVAL_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_SECOND); case SQL_INTERVAL_DAY_TO_HOUR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_HOUR); case SQL_INTERVAL_DAY_TO_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_MINUTE); case SQL_INTERVAL_DAY_TO_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_SECOND); case SQL_INTERVAL_HOUR_TO_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR_TO_MINUTE); case SQL_INTERVAL_HOUR_TO_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR_TO_SECOND); case SQL_INTERVAL_MINUTE_TO_SECOND: return(SQL_C_CHAR); // r eturn(SQL_C_INTERVAL_MINUTE_TO_SECOND); default: assert(TRUE); return(SQL_C_CHAR); break; } } </pre>
--	--

<pre> /* FUNCTION: LogODBCErrors(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle) COMMENTS: Formats ODBC errors or warnings and logs them. Also initializes the completion status for the step to failure, if an ODBC error has occurred. */ void CExecute::LogODBCErrors(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp) { // Messages returned by the server (e.g. Print statements) will be logged to the output file // ODBC warnings will be logged to the log file // All other ODBC errors will be logged to the error file. UCHAR szErrState[SQL_SQLSTATE_SIZE+1]; // SQL Error State string UCHAR szErrText[SQL_MAX_MESSAGE_LENGTH+1]; // SQL Error Text string char szBuffer[SQL_SQLSTATE_SIZE+SQL_MAX_MESSAGE _LENGTH+MAXBUFLen+1] = ""; // formatted Error text Buffer SWORD wErrMsgLen; // Error message length SQLINTEGER dwErrCode; // Native Error code SQLRETURN nErrResult; // Return Code from SQLGetDiagRec SWORD sMsgNum = 1; // Error sequence number _bstr_t temp; if (IsErrorReturn(nResult)) { sprintf(szBuffer, "ODBC Operation: '%s' returned error code: %d", g_szOdbcOps[FailedOp], nResult); temp = szBuffer; m_pErrorFile->WriteLine((BSTR) temp); m_StepStatus = gintFailed; } if (handle == SQL_NULL_HSTMT) return; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLGetDiagRec.\n"); #endif </pre>	<pre> // call SQLGetDiagRec function with proper ODBC handles, repeatedly until // function returns SQL_NO_DATA. while (!m_bAbort && (nErrResult = SQLGetDiagRec(fHandleType, handle, sMsgNum++, szErrState, &dwErrCode, szErrText, SQL_MAX_MESSAGE_LENGTH-1, &wErrMsgLen)) != SQL_NO_DATA) { if (!SQL_SUCCEEDED(nErrResult)) break; if (m_pOutputFile && IsServerMessage(dwErrCode, szErrText)) { wsprintf(szBuffer, SM_SQLMSG_FORMAT, (LPSTR)szErrText); temp = szBuffer; m_pOutputFile->WriteLine((BSTR) temp); } else if (IsODBCWarning(szErrState) && dwErrCode != SM_SQL_ERR_CHANGED_DB && dwErrCode != SM_SQL_ERR_CHANGED_LANG) { // Suppress warnings - 'Changed database context to...' and 'Changed language setting to...' wsprintf(szBuffer, SM_SQLMSG_FORMAT, ParseOdbcMsgPrefixes((LPCSTR)szErrText)); temp = szBuffer; m_pOutputFile->WriteLine((BSTR) temp); } else if (m_pErrorFile && !IsODBCWarning(szErrState)) { wsprintf(szBuffer, SM_SQLERR_FORMAT, (LPSTR)szErrState, dwErrCode, (LPSTR)szErrText); temp = szBuffer; m_pErrorFile->WriteLine((BSTR) temp); } } } /* FUNCTION: LogErrors(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle) COMMENTS: Writes the error message to the error log */ void CExecError::LogErrors(CExecute *p) { _bstr_t temp(m_szExecErrorDesc[m_iErrCode]); if (p->m_pErrorFile) p->m_pErrorFile->WriteLine((BSTR)temp); return; } </pre>
---	---

<pre> /* FUNCTION: ODBCcleanup(HDBC *hdbc, HSTMT *hstmt) COMMENTS: Cleanup of all ODBC structures */ void CExecute::ODBCcleanup(HDBC *hdbc, HSTMT *hstmt) { SQLRETURN IReturn; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing ODBCcleanup.\n"); #endif if (*hstmt != SQL_NULL_HSTMT) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLCloseCursor.\n"); #endif SQLCloseCursor(hstmt); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hstmt.\n"); #endif SQLFreeHandle(SQL_HANDLE_STMT, hstmt); *hstmt = SQL_NULL_HSTMT; } // Cleanup connection if it is a dynamic connection if (IsDynamicConnection()) { if (*hdbc != SQL_NULL_HDBC) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif IReturn = SQLDisconnect(*hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, hdbc); *hdbc = SQL_NULL_HDBC; } } else ResetConnectionUsage(); return; } // Wrapper function that raises an error if a Windows Api fails STDMETHODIMP CExecute::RaiseSystemError(void) { char s[MAXBUFLLEN]; GetSystemError(s); return Error(s, 0, NULL, GUID_NULL); } </pre>	<pre> // Wrapper function that logs the error raised by an Api function to the passed in file void CExecute::LogSystemError(ISMLog *pFile) { if (pFile) { char s[MAXBUFLLEN]; GetSystemError(s); _bstr_t temp(s); pFile->WriteLine((BSTR)temp); } } // Populates the passed in string with the last Windows Api error that occurred void CExecute::GetSystemError(LPSTR s) { long c; DWORD e; e = GetLastError(); c = sprintf(s, "Error code: %ld. ", e); c = FormatMessage(FORMAT_MESSAGE_FROM_SYSTEM FORMAT_MESSAGE_IGNORE_INSERTS, NULL, e, 0, s + c, MAXBUFLLEN - c, NULL); return; } STDMETHODIMP CExecute::get_StepStatus(InstanceStatus *pVal) { *pVal = m_StepStatus; return S_OK; } STDMETHODIMP CExecute::WriteError(BSTR szMsg) { if (m_pErrorFile) return(m_pErrorFile->WriteLine(szMsg)); return S_OK; } </pre>
--	--

<pre>// FILE: Execute.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Declaration of the CExecute // Contact: Reshma Tharamal (reshmat@microsoft.com) // // Execute.h : Declaration of the CExecute #ifndef __EXECUTE_H_ #define __EXECUTE_H_ #include <atlwin.h> #include <comdef.h> #include <stdio.h> #include "resource.h" // main symbols #include "ExecuteDIIICP.h" #include "..\LogWriter\LogWriter.h" #include "..\LogWriter\SMLog.h" #include "..\common\SMTime\SMTime.h" #include "..\common\SMTime\SMTimer.h" // ODBC-specific includes #define DBNTWIN32 #include <sqltypes.h> #include <sql.h> #include <sqlext.h> //////////////////////////////////// // CExecute #define WM_TASK_START (WM_USER + 101) #define WM_TASK_FINISH (WM_USER + 102) #define SM_SQLERR_FORMAT "SQL Error State:%s, Native Error Code: %ld\r\nODBC Error: %s" // format for ODBC error messages #define SM_SQLWARN_FORMAT SM_SQLERR_FORMAT // format for ODBC warnings #define SM_SQLMSG_FORMAT "%s" // format for messages from the server #define SM_SQL_STATE_WARNING "01000" #define SM_MSG_SERVER "[Microsoft][ODBC SQL Server Driver][SQL Server]" #define SM_SQL_ERR_CHANGED_DB 5701 #define SM_SQL_ERR_CHANGED_LANG 5703 #define SM_STEPMaster_ERROR "StepMaster Error: " #define CMD_SEPARATOR "\nGO" #define INV_ARRAY_INDEX -1 // invalid index into an array #define MAXBUFLen 256 // display buffer size #define MAXLOGCMDLEN 256 // maximum characters in command that will be // printed to log #define MAXLOGCMDBUF 512 // maximum characters in command that will be // printed to log #define MAX_DATA_LEN 4000 // maximum buffer size for variable-length data types // viz. character and binary fields #define FILE_ACCESS_READ "r" // Open file for read access #define S_NULL "NULL"</pre>	<pre>// Define a macro to increase the size of a buffer so it is a multiple of teh alignment size. // Thus, if a buffer starts on an alignment boundary, it will end just before the next // alignment boundary. Here, an alignment size of 4 is used because this is the size of the // largest data type used in the application's buffer - the size of an SDWORD and of the largest // default C data type are both 4. If a larger data type (such as __int64) is used, it will be // necessary to align for that size. #define ALIGNSIZE 4 #define ALIGNBUF(Len) ((Len) % ALIGNSIZE) ? \ ((Len) + ALIGNSIZE - ((Len) % ALIGNSIZE)) : (Len) #define MAX_BUFFER_SIZE 64000 typedef enum OdbcOperations { SMSQLAllocHandle, SMSQLDriverConnect, SMSQLExecDirect, SMSQLSetStmtAttr, SMSQLCancel, SMSQLNumResultCols, SMSQLDescribeCol, SMSQLColAttribute, SMSQLFetch, SMSQLGetData, SMSQLRowCount, SMSQLMoreResults, SMSQLBindCol, }; class CODBCErr { public: CODBCErr(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp) { m_fHandleType = fHandleType; m_handle = handle; m_FailedOp = FailedOp; m_nResult = nResult; }; private: SWORD m_fHandleType; SQLHANDLE m_handle; OdbcOperations m_FailedOp; SQLRETURN m_nResult; private: inline BOOL IsServerMessage(SQLINTEGER lNativeError, UCHAR *szErr){ return((strstr((LPCTSTR)szErr, SM_MSG_SERVER) != NULL) ? (lNativeError == 0) : FALSE); } inline BOOL IsODBCWarning(UCHAR *szSqlState){ return(strcmp((LPCSTR)szSqlState, SM_SQL_STATE_WARNING) == 0);} inline LPCSTR ParseOdbcMsgPrefixes(LPCSTR szMsg){ char *pDest; return((pDest = strstr(szMsg, SM_MSG_SERVER)) == NULL ? szMsg : pDest + strlen(SM_MSG_SERVER));} };</pre>
--	--

<pre> class ATL_NO_VTABLE CExecute : public CWindowImpl<CExecute>, public CComObjectRootEx<CComSingleThreadModel>, public CComCoClass<CExecute, &CLSID_Execute>, public IConnectionPointContainerImpl<CExecute>, public ISupportErrorInfo, public IDispatchImpl<IExecute, &IID_IExecute, &LIBID_EXECUTEDLLLib>, public CProxy_IExecuteEvents< CExecute > { public: CExecute() { m_pErrorFile = NULL; //m_pLogFile = NULL; m_pOutputFile = NULL; // Initialize the elapsed time for the step m_tElapsedTime = 0; // Initialize the run status for the step m_StepStatus = gintPending; m_hHandle = SQL_NULL_HSTMT; m_bAbort = FALSE; m_iConnectionIndex = INV_ARRAY_INDEX; } ~CExecute() { } friend class CExecError; public: DECLARE_WND_CLASS("Execute") BEGIN_MSG_MAP(CExecute) MESSAGE_HANDLER(WM_TASK_FINISH, OnTaskFinished) MESSAGE_HANDLER(WM_TASK_START, OnTaskStarted) END_MSG_MAP() public: LRESULT OnTaskStarted(UINT uMsg, WPARAM wParam, LPARAM lParam, BOOL& bHandled) { CURRENCY CStartTime = Get64BitTime(&m_tStartTime); Fire_Start(CStartTime); return 0; } </pre>	<pre> LRESULT OnTaskFinished(UINT uMsg, WPARAM wParam, LPARAM lParam, BOOL& bHandled) { CURRENCY CEndTime = Get64BitTime(&m_tEndTime); Fire_Complete(CEndTime, (long)m_tElapsedTime); return 0; } HRESULT FinalConstruct() { HRESULT hr; RECT rect; rect.left=0; rect.right=100; rect.top=0; rect.bottom=100; HWND hwnd = Create(NULL, rect, "ExecuteWindow", WS_POPUP); if (!hwnd) return HRESULT_FROM_WIN32(GetLastError()); hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, IID_ISMLog, (void **)&m_pErrorFile); if FAILED(hr) return(hr); m_pErrorFile->put_Append(TRUE); //hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, // IID_ISMLog, (void **)&m_pLogFile); //if FAILED(hr) // return(hr); hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, IID_ISMLog, (void **)&m_pOutputFile); if FAILED(hr) return(hr); m_pOutputFile->put_Append(TRUE); hr = CoCreateInstance(CLSID_SMTimer, NULL, CLSCTX_INPROC, IID_ISMTimer, (void **)&m_ExecTime); if FAILED(hr) return(hr); return S_OK; } </pre>
--	---

<pre> void FinalRelease() { if (m_hWnd != NULL) DestroyWindow(); // Close the log and error files if (m_pErrorFile) m_pErrorFile->Release(); m_pErrorFile = NULL; if (m_ExecTime) m_ExecTime->Release(); m_ExecTime = NULL; } DECLARE_REGISTRY_RESOURCEID(IDR_EXECUTE) DECLARE_PROTECT_FINAL_CONSTRUCT() BEGIN_COM_MAP(CExecute) COM_INTERFACE_ENTRY(IExecute) COM_INTERFACE_ENTRY(ISupportErrorInfo) COM_INTERFACE_ENTRY(IDispatch) COM_INTERFACE_ENTRY(IConnectionPointContainer) COM_INTERFACE_ENTRY_IMPL(IConnectionPointContainer) END_COM_MAP() BEGIN_CONNECTION_POINT_MAP(CExecute) CONNECTION_POINT_ENTRY(DIID__IExecuteEvents) END_CONNECTION_POINT_MAP() // ISupportsErrorInfo STDMETHOD(InterfaceSupportsErrorInfo)(REFIID riid); // IExecute public: STDMETHOD(put_ErrorFile)(/*[in]*/ BSTR newVal); STDMETHOD(put_OutputFile)(/*[in]*/ BSTR newVal); STDMETHOD(WriteError)(BSTR szMsg); STDMETHOD(Abort)(); STDMETHOD(get_StepStatus)(/*[out, retval]*/ InstanceStatus *pVal); STDMETHOD(DoExecute)(/*[in]*/ BSTR szCommand, /*[in]*/ BSTR szExecutionDtls, /*[in]*/ ExecutionType ExecMethod, /*[in]*/ BOOL bNoCount, /*[in]*/ BOOL bNoExecute, /*[in]*/ BOOL bParseOnly, /*[in]*/ BOOL bQuotedIds, /*[in]*/ BOOL bAnsiNulls, /*[in]*/ BOOL bShowQP, /*[in]*/ BOOL bStatsTime, /*[in]*/ BOOL bStatsIO, /*[in]*/ long lRowCount, /*[in]*/ long lQueryTmout, /*[in]*/ BSTR szConnection); TC_TIME ExecuteShell(); TC_TIME ExecuteODBC(); STDMETHODIMP AbortShell(); STDMETHODIMP AbortODBC(); _bstr_t m_szCommand; _bstr_t m_szExecDtls; _bstr_t m_szConnection; DWORD m_lMode; SYSTEMTIME m_tStartTime; SYSTEMTIME m_tEndTime; TC_TIME m_tElapsedTime; ISMLog *m_pErrorFile; //ILog *m_pLogFile; ISMLog *m_pOutputFile; ISMTimer *m_ExecTime; ExecutionType m_ExecMthd; InstanceStatus m_StepStatus; HANDLE m_hHandle; // Process handle for shell commands and //Statement handle for ODBC commands LPSTRm_szCmd; </pre>	<pre> private: LPSTR NextCmdInBatch(LPSTR szBatch); void ProcessResultsets(); SQLSMALLINT GetDefaultCType(SQLINTEGER SQLType); void PrintData(void *vData, SQLSMALLINT CType, SQLINTEGER IndPtr, SQLSMALLINT iScale, ISMLog *pOutput); void LogODBCErrors(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp); void ODBCcleanup(HDBC *hdbc, HSTMT *hstmt); STDMETHODIMP RaiseSystemError(void); void LogSystemError(ISMLog *pFile); void GetSystemError(LPSTR s); void SetConnectionOption(LPSTR szConn, HDBC *pHdbc); void ResetConnectionProperties(HDBC *p_hdbc); void InitializeConnection(HDBC *phdbc, BOOL *pbDoConnect); void ReConnectDeadConnection(HDBC *phdbc); void ResetConnectionUsage(); int m_iConnectionIndex; BOOL m_bNoCount, m_bNoExecute, m_bParseOnly, m_bQuotedIds, m_bAnsiNulls, \ m_bShowQP, m_bStatsTime, m_bStatsIO; long m_lRowCount; SQLINTEGER m_lQueryTmout; _bstr_t m_ErrorFile, m_OutputFile; BOOL m_bAbort; </pre>
---	---

<pre> private: inline BOOL IsServerMessage(SQLINTEGER lNativeError, UCHAR *szErr){ return((strstr((LPCTSTR)szErr, SM_MSG_SERVER) != NULL) ? (lNativeError == 0) : FALSE); } inline BOOL IsODBCWarning(UCHAR *szSqlState){ return(strcmp((LPCTSTR)szSqlState, SM_SQL_STATE_WARNING) == 0);} inline BOOL IsErrorReturn(SQLRETURN iRetCode){ return((!SQL_SUCCEEDED(iRetCode)) && (iRetCode != SQL_NO_DATA));} inline LPCSTR ParseOdbcMsgPrefixes(LPCSTR szMsg){ char *pDest; return((pDest = strstr(szMsg, SM_MSG_SERVER)) == NULL ? szMsg : pDest + strlen(SM_MSG_SERVER));} inline BOOL IsDynamicConnection(){ return(!strcmp((LPCTSTR)m_szConnection, ""));} inline void HandleODBCError(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle, OdbcOperations OdbcOp) { if (rc != SQL_SUCCESS) { LogODBCErrors(rc, fHandleType, handle, OdbcOp); if (IsErrorReturn(rc)) throw new CODBCErr(rc, fHandleType, handle, OdbcOp); } return; } }; class CExecError { public: typedef enum ExecErrorCodes { SM_ERR_CONN_IN_USE, }; CExecError(int iError) { m_iErrCode = iError; }; void LogErrors(CExecute *p); private: int m_iErrCode; static char *m_szExecErrorDesc[]; }; void ExecutionThread(LPVOID lpParameter); #ifdef _TPCH_AUDIT void WriteFileToTpchLog(LPSTR szFile, LPSTR szFmt); void WriteToTpchLog(char *szMsg); #endif </pre>	<pre> #endif // _EXECUTE_H_ // FILE: ExecuteDll.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f ExecuteDllps.mk in the project directory. #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "..\LogWriter\LogWriter.h" #include "..\LogWriter\LogWriter_i.c" #include "..\common\SMTime\SMTime.h" #include "..\common\SMTime\SMTime_i.c" #include "ExecuteDll.h" #include "SMExecute.h" #include "ExecuteDll_i.c" #include "Execute.h" CComModule _Module; BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_Execute, CExecute) END_OBJECT_MAP() SQLHENV henv = NULL; // ODBC environment handle static char szCaption[] = "StepMaster"; // Message box caption CRITICAL_SECTION hConnections; // Critical section to serialize access to available connections SM_Connection_Info *p_Connections = NULL; // Pointer to open connections int iConnectionCount = 0; // Number of open connections #ifdef _TPCH_AUDIT FILE *pfLogFile = NULL; // Log file containing timestamps CRITICAL_SECTION hLogFileWrite; // Critical section to serialize writes to log static char szFileOpenModeAppend[] = "a+"; // Log file open mode static char szEnvVarLogFile[] = "TPCH_LOG_FILE"; // Environment variable - initialized to // log file name if timing information // is to be logged #endif void ShowODBCErrors(SWORD fHandleType, SQLHANDLE handle); void CloseOpenConnections(); </pre>
--	---

<pre> //////////////////////////////////// // DLL Entry Point extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_EXECUTEDLLLib); DisableThreadLibraryCalls(hInstance); #ifdef _TPCH_AUDIT char szMsg[MAXBUFLen]; LPSTR szLogFileName = getenv(szEnvVarLogFile); if (szLogFileName == NULL) { sprintf(szMsg, "The environment variable '%s' does not exist. " "Step timing information will not be written to a log.", szEnvVarLogFile); MessageBox(NULL, szMsg, szCaption, MB_OK); } else { if ((pfLogFile = fopen(szLogFileName, szFileOpenModeAppend)) == NULL) { sprintf(szMsg, "The file '%s' does not exist. " "Step timing information will not be written to log.", szLogFileName); MessageBox(NULL, szMsg, szCaption, MB_OK); } else { InitializeCriticalSection(&hLogFileWrite); } } #endif InitializeCriticalSection(&hConnections); p_Connections = NULL; iConnectionCount = 0; if (!SQL_SUCCEEDED(SQLSetEnvAttr(NULL, SQL_ATTR_CONNECTION_POOLING, (SQLPOINTER)SQL_CP_ONE_PER_HENV , 0))) ShowODBCErrors(SQL_HANDLE_ENV, henv); if (!SQL_SUCCEEDED(SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv))) { ShowODBCErrors(SQL_HANDLE_ENV, henv); return FALSE; } if (!SQL_SUCCEEDED(SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (LPVOID)SQL_OV_ODBC3, 0))) ShowODBCErrors(SQL_HANDLE_ENV, henv); SQLINTEGER CpMatch; if (!SQL_SUCCEEDED(SQLGetEnvAttr(henv, SQL_ATTR_CP_MATCH, &CpMatch, 0, NULL))) ShowODBCErrors(SQL_HANDLE_ENV, henv); if (!SQL_SUCCEEDED(SQLSetEnvAttr(henv, SQL_ATTR_CP_MATCH, (SQLPOINTER)SQL_CP_STRICT_MATCH, SQL_IS_INTEGER))) ShowODBCErrors(SQL_HANDLE_ENV, henv); } } } </pre>	<pre> else if (dwReason == DLL_PROCESS_DETACH) { #ifdef _TPCH_AUDIT if (pfLogFile != NULL) { fclose(pfLogFile); DeleteCriticalSection(&hLogFileWrite); } #endif CloseOpenConnections(); if (henv != NULL) SQLFreeEnv(henv); DeleteCriticalSection(&hConnections); _Module.Term(); } return TRUE; // ok } void ShowODBCErrors(SWORD fHandleType, SQLHANDLE handle) { UCHAR szErrState[SQL_SQLSTATE_SIZE+1]; // SQL Error State string UCHAR szErrMsg[SQL_MAX_MESSAGE_LENGTH+1]; // SQL Error Text string char szBuffer[SQL_SQLSTATE_SIZE+SQL_MAX_MESSAGE _LENGTH+MAXBUFLen+1] = ""; // formatted Error text Buffer SWORD wErrMsgLen; // Error message length SQLINTEGER dwErrCode; // Native Error code SQLRETURN nErrResult; // Return Code from SQLGetDiagRec SWORD sMsgNum = 1; // Error sequence number // call SQLGetDiagRec function with proper ODBC handles, repeatedly until // function returns SQL_NO_DATA. while ((nErrResult = SQLGetDiagRec(fHandleType, handle, sMsgNum++, szErrState, &dwErrCode, szErrMsg, SQL_MAX_MESSAGE_LENGTH-1, &wErrMsgLen)) != SQL_NO_DATA) { if (!SQL_SUCCEEDED(nErrResult)) break; wsprintf(szBuffer, SM_SQLERR_FORMAT, (LPSTR)szErrState, dwErrCode, (LPSTR)szErrMsg); MessageBox(NULL, szBuffer, szCaption, MB_OK); } } </pre>
--	---

<pre> void CloseOpenConnections() { // Closes all open connections if (p_Connections) { for (int iConnIndex = iConnectionCount - 1; iConnIndex >= 0; iConnIndex--) { if ((p_Connections + iConnIndex)->hdbc != SQL_NULL_HDBC) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif SQLDisconnect((p_Connections + iConnIndex)- >hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, (p_Connections + iConnIndex)->hdbc); (p_Connections + iConnIndex)->hdbc = SQL_NULL_HDBC; } free(p_Connections); } p_Connections = NULL; return; } ////////////////////////////////////// // Used to determine whether the DLL can be unloaded by OLE STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } ////////////////////////////////////// // Returns a class factory to create an object of the requested type STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } ////////////////////////////////////// // DllRegisterServer - Adds entries to the system registry STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); } </pre>	<pre> //////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } /* this ALWAYS GENERATED file contains the definitions for the interfaces */ /* File created by MIDL compiler version 5.01.0164 */ /* at Mon Jun 09 19:33:03 2003 */ /* Compiler settings for C:\charles\Stepmaster\ExecuteDll\ExecuteDll.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ @@@MIDL_FILE_HEADING() /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __ExecuteDll_h__ #define __ExecuteDll_h__ #ifdef __cplusplus extern "C" { #endif /* Forward Declarations */ #ifndef __IExecuteEvents_FWD_DEFINED__ #define __IExecuteEvents_FWD_DEFINED__ typedef interface _IExecuteEvents _IExecuteEvents; #endif /* __IExecuteEvents_FWD_DEFINED__ */ #ifndef __IExecute_FWD_DEFINED__ #define __IExecute_FWD_DEFINED__ typedef interface IExecute IExecute; #endif /* __IExecute_FWD_DEFINED__ */ #ifndef __Execute_FWD_DEFINED__ #define __Execute_FWD_DEFINED__ #ifdef __cplusplus typedef class Execute Execute; #else typedef struct Execute Execute; #endif /* __cplusplus */ #endif /* __Execute_FWD_DEFINED__ */ </pre>
--	--

<pre> /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); /* interface __MIDL_itf_ExecuteDtl_0000 */ /* [local] */ typedef /* [helpstring][uuid] */ enum ExecutionType { execODBC = 0x1, execShell = 0x2 } ExecutionType; typedef /* [helpstring][uuid] */ enum InstanceStatus { gintDisabled = 0x1, gintPending = 0x2, gintRunning = 0x3, gintComplete = 0x4, gintFailed = 0x5, gintAborted = 0x6 } InstanceStatus; extern RPC_IF_HANDLE __MIDL_itf_ExecuteDtl_0000_v0_0_c_ifspec; extern RPC_IF_HANDLE __MIDL_itf_ExecuteDtl_0000_v0_0_s_ifspec; #ifndef __EXECUTEDLLLib_LIBRARY_DEFINED__ #define __EXECUTEDLLLib_LIBRARY_DEFINED__ /* library EXECUTEDLLLib */ /* [helpstring][version][uuid] */ EXTERN_C const IID LIBID_EXECUTEDLLLib; #ifndef __IExecuteEvents_DISPINTERFACE_DEFINED__ #define __IExecuteEvents_DISPINTERFACE_DEFINED__ /* dispinterface _IExecuteEvents */ /* [helpstring][uuid] */ EXTERN_C const IID DIID__IExecuteEvents; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("551AC532-AB1C-11D2-BC0C-00A0C90D2CA5") _IExecuteEvents : public IDispatch { }; #else /* C style interface */ typedef struct _IExecuteEventsVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(_IExecuteEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); </pre>	<pre> ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(_IExecuteEvents __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(_IExecuteEvents __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(_IExecuteEvents __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(_IExecuteEvents __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(_IExecuteEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(_IExecuteEvents __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); END_INTERFACE } _IExecuteEventsVtbl; interface _IExecuteEvents { CONST_VTBL struct _IExecuteEventsVtbl __RPC_FAR *lpVtbl; }; #ifndef COBJMACROS #define _IExecuteEvents_QueryInterface(This,riid,ppvObject)\ (This)->lpVtbl -> QueryInterface(This,riid,ppvObject) #define _IExecuteEvents_AddRef(This)\ (This)->lpVtbl -> AddRef(This) </pre>
---	---

<pre> #define _IExecuteEvents_Release(This)\ (This)->lpVtbl -> Release(This) #define _IExecuteEvents_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl -> GetTypeInfoCount(This,pctinfo) #define _IExecuteEvents_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl -> GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define _IExecuteEvents_GetIDsOfNames(This,riid,rgszNames,cNames, lcid,rgDispId) \ (This)->lpVtbl -> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define _IExecuteEvents_Invoke(This,dispIdMember,riid,lcid,wFlags,pD ispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl -> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarR esult,pExcepInfo,puArgErr) #endif /* COBJMACROS */ #endif /* C style interface */ #endif /* __IExecuteEvents_DISPINTERFACE_DEFINED__ */ #ifndef _IExecute_INTERFACE_DEFINED_ #define _IExecute_INTERFACE_DEFINED_ /* interface IExecute */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_IExecute; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("551AC531-AB1C-11D2-BC0C- 00A0C90D2CA5") IExecute : public IDispatch { public: virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE DoExecute(/* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtls, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTmout, /* [in] */ BSTR szConnection) = 0; virtual /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE get_StepStatus(/* [retval][out] */ InstanceStatus __RPC_FAR *pVal) = 0; </pre>	<pre> virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Abort(void) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteError(BSTR szMsg) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_OutputFile(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_ErrorFile(/* [in] */ BSTR newVal) = 0; }; #else /* C style interface */ typedef struct IExecuteVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(IExecute __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(IExecute __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(IExecute __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(IExecute __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(IExecute __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(IExecute __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ / DISPATCH __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(IExecute __RPC_FAR * This, /* [in] */ DISPATCH dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPATCHPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); </pre>
--	--

<pre> /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *DoExecute)(IExecute __RPC_FAR * This, /* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtIs, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTmout, /* [in] */ BSTR szConnection); /* [helpstring][id][propget] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *get_StepStatus)(IExecute __RPC_FAR * This, /* [retval][out] */ InstanceStatus __RPC_FAR *pVal); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Abort)(IExecute __RPC_FAR * This); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteError)(IExecute __RPC_FAR * This, BSTR szMsg); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_OutputFile)(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_ErrorFile)(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); END_INTERFACE } IExecuteVtbl; interface IExecute { CONST_VTBL struct IExecuteVtbl __RPC_FAR *lpVtbl; }; #ifdef COBJMACROS #define IExecute_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define IExecute_AddRef(This) \ (This)->lpVtbl->AddRef(This) #define IExecute_Release(This) \ (This)->lpVtbl->Release(This) #define IExecute_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define IExecute_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This,iTInfo,lcid,ppTInfo) </pre>	<pre> #define IExecute_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) \ (This)->lpVtbl->GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define IExecute_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl->Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) #define IExecute_DoExecute(This,szCommand,szExecutionDtIs,ExecMethod,bNoCount, bNoExecute,bParseOnly,bQuotedIds,bAnsiNulls,bShowQP, bStatsTime,bStatsIO,lRowCount,lQueryTmout,szConnection)\ (This)->lpVtbl->DoExecute(This,szCommand,szExecutionDtIs,ExecMethod,bNoCount, bNoExecute,bParseOnly,bQuotedIds, bAnsiNulls,bShowQP,bStatsTime,bStatsIO,lRowCount,lQueryTmout,szConnection) #define IExecute_get_StepStatus(This,pVal) \ (This)->lpVtbl->get_StepStatus(This,pVal) #define IExecute_Abort(This) \ (This)->lpVtbl->Abort(This) #define IExecute_WriteError(This,szMsg) \ (This)->lpVtbl->WriteError(This,szMsg) #define IExecute_put_OutputFile(This,newVal) \ (This)->lpVtbl->put_OutputFile(This,newVal) #define IExecute_put_ErrorFile(This,newVal) \ (This)->lpVtbl->put_ErrorFile(This,newVal) #endif /* COBJMACROS */ #endif /* C style interface */ /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_DoExecute_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtIs, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTmout, /* [in] */ BSTR szConnection); void __RPC_STUB IExecute_DoExecute_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); </pre>
---	--

<pre> /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE IExecute_get_StepStatus_Proxy(IExecute __RPC_FAR * This, /* [retval][out] */ InstanceStatus __RPC_FAR *pVal); void __RPC_STUB IExecute_get_StepStatus_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_Abort_Proxy(IExecute __RPC_FAR * This); void __RPC_STUB IExecute_Abort_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_WriteError_Proxy(IExecute __RPC_FAR * This, BSTR szMsg); void __RPC_STUB IExecute_WriteError_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE IExecute_put_OutputFile_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); void __RPC_STUB IExecute_put_OutputFile_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE IExecute_put_ErrorFile_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); void __RPC_STUB IExecute_put_ErrorFile_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __IExecute_INTERFACE_DEFINED__ */ EXTERN_C const CLSID CLSID_Execute; #ifdef __cplusplus class DECLSPEC_UUID("2EFC198E-AA8D-11D2-BC0C-00A0C90D2CA5") Execute; #endif #ifdef __EXECUTEDLLLIB_LIBRARY_DEFINED__ /* Additional Prototypes for ALL interfaces */ /* end of Additional Prototypes */ #ifdef __cplusplus } #endif #endif </pre>	<pre> // FILE: Execute.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Implementation of CExecute. // Contact: Reshma Tharamal (reshmat@microsoft.com) // #include "stdafx.h" #include "ExecuteDll.h" #include "SMExecute.h" #include "Execute.h" extern SQLHENV henv; extern SM_Connection_Info *_p_Connections; // Pointer to open connections extern int iConnectionCount; // Number of open connections extern CRITICAL_SECTION hConnections; // Critical section to serialize // access to available connections #ifdef _TPCH_AUDIT extern FILE *pfLogFile; // Log file containing timestamps extern CRITICAL_SECTION hLogFileWrite; // Handle to critical section #endif //////////////////////////////////// // CExecute char * g_szOdbcOps[] = { "SQLAllocHandle", "SQLDriverConnect", "SQLExecDirect", "SQLSetStmtAttr", "SQLCancel", "SQLNumResultCols", "SQLDescribeCol", "SQLColAttribute", "SQLFetch", "SQLGetData", "SQLRowCount", "SQLMoreResults", "SQLBindCol" }; char * CExecError::m_szExecErrorDesc[] = { "Connection is already in use." }; STDMETHODIMP CEXecute::InterfaceSupportsErrorInfo(REFIID riid) { static const IID* arr[] = { &IID_IExecute }; for (int i=0; i < sizeof(arr) / sizeof(arr[0]); i++) { if (InlineIsEqualGUID(*arr[i],riid)) return S_OK; } return S_FALSE; } </pre>
--	---

<pre> STDMETHODIMP CExecute::put_OutputFile(BSTR newVal) { assert(m_pOutputFile); m_OutputFile = newVal; HRESULT hr = m_pOutputFile->put_FileName(newVal); if FAILED(hr) { m_pOutputFile->Release(); m_pOutputFile = NULL; } return hr; } //DEL STDMETHODIMP CExecute::put_LogFile(BSTR newVal) //DEL { //DEL assert(m_pLogFile); //DEL //DEL m_pLogFile->put_FileName(newVal); //DEL return S_OK; //DEL } STDMETHODIMP CExecute::put_ErrorFile(BSTR newVal) { assert(m_pErrorFile); m_ErrorFile = newVal; HRESULT hr = m_pErrorFile->put_FileName(newVal); if FAILED(hr) { m_pErrorFile->Release(); m_pErrorFile = NULL; } return hr; } STDMETHODIMP CExecute::DoExecute(BSTR szCommand, BSTR szExecutionDtls, ExecutionType ExecMethod, \ BOOL bNoCount, BOOL bNoExecute, BOOL bParseOnly, BOOL bQuotedIds, \ BOOL bAnsiNulls, BOOL bShowQP, BOOL bStatsTime, BOOL bStatsIO, \ long lRowCount, long lQueryTmout, BSTR szConnection) { HANDLE hThrd; DWORD tid; _CrtSetReportFile(_CRT_WARN, _CRTDBG_FILE_STDOUT); m_szCommand = szCommand; m_szExecDtls = szExecutionDtls; m_ExecMthd = ExecMethod; if (m_ExecMthd == execODBC) { m_bNoCount = bNoCount; m_bNoExecute = bNoExecute; m_bParseOnly = bParseOnly; m_bQuotedIds = bQuotedIds; m_bAnsiNulls = bAnsiNulls; m_bShowQP = bShowQP; m_bStatsTime = bStatsTime; m_bStatsIO = bStatsIO; m_lRowCount = lRowCount; m_lQueryTmout = lQueryTmout; m_szConnection = szConnection; } </pre>	<pre> if((hThrd = CreateThread(0, 0, (LPTHREAD_START_ROUTINE)ExecutionThread, this, 0, &tid)) == NULL) return(RaiseSystemError()); CloseHandle(hThrd); return S_OK; } STDMETHODIMP CExecute::Abort() { if (m_ExecMthd == execShell) return(AbortShell()); else return(AbortODBC()); } void ExecutionThread(LPVOID lpParameter) { CExecute *MyExecute = (CExecute*)lpParameter; MyExecute->m_tElapsedTime = 0; GetLocalTime(&MyExecute->m_tStartTime); MyExecute->PostMessage(WM_TASK_START, 0, 0); #ifdef _TPCH_AUDIT char szBuffer[MAXLOGCMDBUF]; char szFmt[MAXBUFLen]; sprintf(szFmt, "Start Step: '%'.%ds' at '%d/%d/%d %d:%d:%d:%d\n", MAXLOGCMDLEN, MyExecute->m_tStartTime.wMonth, MyExecute- >m_tStartTime.wDay, MyExecute->m_tStartTime.wYear, MyExecute- >m_tStartTime.wHour, MyExecute->m_tStartTime.wMinute, MyExecute- >m_tStartTime.wSecond, MyExecute->m_tStartTime.wMilliseconds); if (MyExecute->m_ExecMthd == execShell) WriteFileToTpchLog((LPSTR)MyExecute- >m_szCommand, szFmt); else { sprintf(szBuffer, szFmt, (LPSTR)MyExecute- >m_szCommand); WriteToTpchLog(szBuffer); } } #endif </pre>
--	--

<pre> // Initialize the run status for the step to running. The completion status for the step will be initialized by the Shell and ODBC //execution functions. MyExecute->m_StepStatus = gintRunning; if (MyExecute->m_ExecMthd == execShell) MyExecute->m_tElapsedTime = MyExecute- >ExecuteShell(); else MyExecute->m_tElapsedTime = MyExecute- >ExecuteODBC(); // Close the output, log and error files if (MyExecute->m_pOutputFile) MyExecute->m_pOutputFile->Release(); MyExecute->m_pOutputFile = NULL; MyExecute->m_ExecTime = NULL; GetLocalTime(&MyExecute->m_tEndTime); #ifdef _TPCH_AUDIT sprintf(szFmt, "Complete Step: '%%.%%ds' at '%d/%d/%d %d:%d:%d:%d'\n", MAXLOGCMDLEN, MyExecute->m_tEndTime.wMonth, MyExecute- >m_tEndTime.wDay, MyExecute->m_tEndTime.wYear, MyExecute- >m_tEndTime.wHour, MyExecute->m_tEndTime.wMinute, MyExecute- >m_tEndTime.wSecond, MyExecute->m_tEndTime.wMilliseconds); if (MyExecute->m_ExecMthd == execShell) WriteFileToTpchLog((LPSTR)MyExecute- >m_szCommand, szFmt); else { sprintf(szBuffer, szFmt, (LPSTR)MyExecute- >m_szCommand); WriteToTpchLog(szBuffer); } #endif MyExecute->PostMessage(WM_TASK_FINISH, 0, 0); return; } #ifdef _TPCH_AUDIT void WriteFileToTpchLog(LPSTR szFile, LPSTR szFmt) { // Reads a maximum of MAXLOGCMDBUF characters from the command file and writes it to the log FILE *fpCmd; int iRead; char szBuf[MAXLOGCMDBUF]; char szCmd[MAXLOGCMDLEN]; if (pfLogFile != NULL) { if ((fpCmd = fopen(szFile, </pre>	<pre> FILE_ACCESS_READ)) != NULL) { iRead = fread(szCmd, sizeof(char), sizeof(szCmd) / sizeof(char), fpCmd); if (iRead < MAXLOGCMDLEN) szCmd[iRead] = '\0'; else szCmd[MAXLOGCMDLEN - 1] = '\0'; sprintf(szBuf, szFmt, szCmd); WriteToTpchLog(szBuf); fclose(fpCmd); } } void WriteToTpchLog(char *szMsg) { if (pfLogFile != NULL) { EnterCriticalSection(&hLogFileWrite); fprintf(pfLogFile, szMsg); LeaveCriticalSection(&hLogFileWrite); } return; } #endif TC_TIME CExecute::ExecuteShell() { STARTUPINFOA Start; PROCESS_INFORMATION proc; DWORD exitCode; TC_TIME tElapsed = 0; _bstr_t szCommand("cmd /c "); LPSTR szStartDir; CURRENC Elapsed; szCommand += m_szCommand; // Redirect output and error information szCommand += " > " + m_OutputFile + " 2> " + m_ErrorFile; // Initialize the STARTUPINFO structure: memset(&Start, 0, sizeof(STARTUPINFOA)); Start.cb = sizeof(Start); Start.dwFlags = STARTF_USESHOWWINDOW; Start.wShowWindow = SW_SHOWMINNOACTIVE; memset(&proc, 0, sizeof(PROCESS_INFORMATION)); szStartDir = strcmp((LPCTSTR)m_szExecDtls, "") == 0 ? NULL : (LPSTR)m_szExecDtls; m_ExecTime->Start(); // Start the shelled application: if (!CreateProcessA(NULL, (LPSTR)szCommand, NULL, NULL, FALSE, NORMAL_PRIORITY_CLASS, NULL, szStartDir, &Start, &proc)) { m_StepStatus = gintFailed; LogSystemError(m_pErrorFile); m_ExecTime->Stop(&Elapsed); return((TC_TIME)Elapsed.int64); } </pre>
---	--

<pre> m_hHandle = proc.hProcess; // Give the process time to execute and finish WaitForSingleObject(m_hHandle, INFINITE); m_ExecTime->Stop(&Elapsed); if (!GetExitCodeProcess(m_hHandle, &exitCode)) { m_StepStatus = gintFailed; LogSystemError(m_pErrorFile); } else m_StepStatus = gintComplete; // Close all open handles to the shelled process CloseHandle(m_hHandle); return((TC_TIME)Elapsed.int64); } STDMETHODIMP CExecute::AbortShell() { if (m_hHandle != SQL_NULL_HSTMT) if (!TerminateProcess(m_hHandle, 0)) return(RaiseSystemError()); return(S_OK); } TC_TIME CExecute::ExecuteODBC() { TC_TIME tElapsed = 0; HDBC m_hdbc; SQLRETURN rc; LPSTR szCmd; CURRENCY Elapsed; BOOL bDoConnect = FALSE; // ODBC specific initialization m_hdbc = SQL_NULL_HDBC; try { // Allocate a new connection if we are creating a // dynamic connection or if // the named connection doesn't exist InitializeConnection(&m_hdbc, &bDoConnect); // Ensure that the connection is valid. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif if (bDoConnect) { // Allocate connection handle, open a connection // and set connection attributes. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif </pre>	<pre> if (m_bAbort) return(tElapsed); // Connect to the server using the passed in connection string rc = SQLDriverConnect(m_hdbc, NULL, (unsigned char *) (LPSTR)m_szExecDtls, SQL_NTS, NULL, 0, NULL, SQL_DRIVER_NOPROMPT); HandleODBCError(rc, SQL_HANDLE_DBC, m_hdbc, SMSQLDriverConnect); } ReConnectDeadConnection(&m_hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for hdbc.\n"); #endif if (!m_bAbort && (rc = SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc, &m_hHandle)) != SQL_SUCCESS) HandleODBCError(rc, SQL_HANDLE_DBC, m_hdbc, SMSQLAllocHandle); // Set connection attributes if any have been modified from the // default values if (m_lRowCount > 0) { char szConnOptions[512]; sprintf(szConnOptions, "SET ROWCOUNT %d ", m_lRowCount); SetConnectionOption(szConnOptions, &m_hdbc); } if (m_bQuotedIds) SetConnectionOption("SET QUOTED_IDENTIFIER ON ", &m_hdbc); if (!m_bAnsiNulls) SetConnectionOption("SET ANSI_NULL_DFLT_OFF ON ", &m_hdbc); if (!m_bAbort && m_lQueryTmout > 0) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLSetStmtAttr.\n"); #endif // Set the query timeout on the statement handle rc = SQLSetStmtAttr(m_hHandle, SQL_ATTR_QUERY_TIMEOUT, &m_lQueryTmout, SQL_IS_INTEGER); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLSetStmtAttr); } if (m_bNoExecute) SetConnectionOption("SET NOEXEC ON ", &m_hdbc); else if (m_bParseOnly) SetConnectionOption("SET PARSEONLY ON ", &m_hdbc); else if (m_bShowQP) // Important to ensure that this is the last connection // attributes being set - // otherwise showplans are generated for all remaining SET // statements SetConnectionOption("SET SHOWPLAN_TEXT ON ", &m_hdbc); else { </pre>
---	--

<pre> if (m_bNoCount) SetConnectionOption("SET NOCOUNT ON ", &m_hdbc); if (m_bStatsIO) SetConnectionOption("SET STATISTICS IO ON ", &m_hdbc); // Important to ensure that this is the last connection attributes being set - // otherwise timing statistics are generated for all remaining SET statements if (m_bStatsTime) SetConnectionOption("SET STATISTICS TIME ON ", &m_hdbc); } m_szCmd = (LPSTR)m_szCommand; m_ExecTime->Start(); while ((szCmd = NextCmdInBatch((LPSTR)m_szCommand)) != NULL && !m_bAbort) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLExecDirect.\n"); #endif // Execute the ODBC command rc = SQLExecDirect(m_hHandle, (unsigned char *)szCmd, SQL_NTS); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLExecDirect); free(szCmd); // Call a procedure to log the results to the output file ProcessResultsets(); } m_ExecTime->Stop(&Elapsed); ResetConnectionProperties(&m_hdbc); } catch(CODBCError *pErr) { m_StepStatus = gintFailed; delete pErr; } catch(CExecError *pErr) { m_StepStatus = gintFailed; pErr->LogErrors(this); delete pErr; } ODBCCleanup(&m_hdbc, &m_hHandle); if (m_StepStatus != gintFailed) m_StepStatus = gintComplete; return((DWORD)Elapsed.int64); } </pre>	<pre> void CExecute::InitializeConnection(HDBC *phdbc, BOOL *pbDoConnect) { SQLRETURN rc; *pbDoConnect = TRUE; if (IsDynamicConnection()) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for m_hdbc.\n"); #endif rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); return; } EnterCriticalSection(&hConnections); // Returns the connection handle if the connection, m_szConnection, exists for (m_iConnectionIndex = iConnectionCount - 1; m_iConnectionIndex >= 0; m_iConnectionIndex--) { if (!strcmp((p_Connections + m_iConnectionIndex)- >szConnectionName, (LPSTR)m_szConnection)) { if (!(p_Connections + m_iConnectionIndex)- >bInUse) { *phdbc = (p_Connections + m_iConnectionIndex)->hdbc; (p_Connections + m_iConnectionIndex)- >bInUse = TRUE; *pbDoConnect = FALSE; break; } else { LeaveCriticalSection(&hConnections); throw new CExecError(CExecError::SM_ERR_CONN_IN_USE); } } } if (m_iConnectionIndex < 0) { // Connection was not found. Allocate connection handle and add it to list of // available connections. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLAllocHandle for m_hdbc.\n"); #endif } } </pre>
---	---

<pre> rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); m_iConnectionIndex = iConnectionCount++; p_Connections = (SM_Connection_Info *)realloc(p_Connections, iConnectionCount * sizeof(SM_Connection_Info)); strcpy((p_Connections + m_iConnectionIndex)- >szConnectionName, (LPSTR)m_szConnection); (p_Connections + m_iConnectionIndex)->hdbc = *phdbc; (p_Connections + m_iConnectionIndex)->bInUse = TRUE; } LeaveCriticalSection(&hConnections); return; } void CExecute::ReConnectDeadConnection(HDBC *phdbc) { SQLRETURN rc; SQLINTEGER uConnDead; // Connect to the server using the passed in connection string rc = SQLGetConnectAttr(*phdbc, SQL_ATTR_CONNECTION_DEAD, &uConnDead, SQL_IS_INTEGER, NULL); HandleODBCError(rc, SQL_HANDLE_DBC, *phdbc, SMSQLDriverConnect); if (uConnDead == SQL_CD_TRUE) { // Cleanup the old connection and re-connect. #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif rc = SQLDisconnect(*phdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, *phdbc); *phdbc = SQL_NULL_HDBC; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDriverConnect.\n"); #endif } } </pre>	<pre> rc = SQLAllocHandle(SQL_HANDLE_DBC, henv, phdbc); HandleODBCError(rc, SQL_HANDLE_ENV, henv, SMSQLAllocHandle); // Connect to the server using the passed in connection string rc = SQLDriverConnect(*phdbc, NULL, (unsigned char *) (LPSTR)m_szExecDtIs, SQL_NTS, NULL, 0, NULL, SQL_DRIVER_NOPROMPT); HandleODBCError(rc, SQL_HANDLE_DBC, *phdbc, SMSQLDriverConnect); } return; } void CExecute::ResetConnectionUsage() { if(m_iConnectionIndex >= 0 && m_iConnectionIndex < iConnectionCount) { EnterCriticalSection(&hConnections); (p_Connections + m_iConnectionIndex)->bInUse = FALSE; LeaveCriticalSection(&hConnections); } return; } void CExecute::ResetConnectionProperties(HDBC *p_hdbc) { SQLRETURN rc; // Reset connection attributes if any have been modified from the default values if (m_bNoExecute) SetConnectionOption("SET NOEXEC OFF ", p_hdbc); else if (m_bParseOnly) SetConnectionOption("SET PARSEONLY OFF ", p_hdbc); else if (m_bShowQP) // Reset connection attributes in reverse order SetConnectionOption("SET SHOWPLAN_TEXT OFF ", p_hdbc); else { // Reset connection attributes in reverse order if (m_bStatsTime) SetConnectionOption("SET STATISTICS TIME OFF ", p_hdbc); if (m_bNoCount) SetConnectionOption("SET NOCOUNT OFF ", p_hdbc); if (m_bStatsIO) SetConnectionOption("SET STATISTICS IO OFF ", p_hdbc); } } </pre>
---	---

<pre> if (m_lRowCount > 0) { char szConnOptions[512]; sprintf(szConnOptions, "SET ROWCOUNT 0 "); SetConnectionOption(szConnOptions, p_hdbc); } if (m_bQuotedIds) SetConnectionOption("SET QUOTED_IDENTIFIER OFF ", p_hdbc); if (!m_bAnsiNulls) SetConnectionOption("SET ANSI_NULL_DFLT_OFF OFF ", p_hdbc); if (m_lQueryTmout > 0) { SQLUIINTEGER lQueryTmout = 0; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLSetStmtAttr.\n"); #endif // Set the query timeout on the statement handle rc = SQLSetStmtAttr(m_hHandle, SQL_ATTR_QUERY_TIMEOUT, &lQueryTmout, SQL_IS_UIINTEGER); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLSetStmtAttr); } return; } LPSTR CExecute::NextCmdInBatch(LPSTR szBatch) { LPSTR szCmd, szSeparator, szStart; char szNext; szStart = m_szCmd; while ((szSeparator = strstr(szStart, CMD_SEPARATOR)) != NULL) { szNext = *(szSeparator + strlen(CMD_SEPARATOR)); if (szNext == '\n' szNext == '\r' szNext == '\0') break; else szStart = szSeparator + strlen(CMD_SEPARATOR); } </pre>	<pre> if (!szSeparator) { // No more GO's if (strlen(m_szCmd) > 0) { szCmd = (LPSTR)malloc(strlen(m_szCmd) + 1); strcpy(szCmd, m_szCmd); m_szCmd += strlen(m_szCmd); } else szCmd = NULL; } else if (szSeparator - m_szCmd > 0) { // Strip the succeeding newline szCmd = (LPSTR)malloc(szSeparator - m_szCmd); strncpy(szCmd, m_szCmd, szSeparator - m_szCmd - 1); *(szCmd + (szSeparator - m_szCmd - 1)) = '\0'; m_szCmd += szSeparator - m_szCmd + strlen(CMD_SEPARATOR); if (szNext == '\n' szNext == '\r') m_szCmd += 1; } else szCmd = NULL; return(szCmd); } void CExecute::SetConnectionOption(LPSTR szConn, HDBC *pHdbc) { // Executes the passed in connection options 'set' statement. Returns True if it succeeded char szConnOptions[512]; SQLRETURN rc; sprintf(szConnOptions, szConn); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLExecDirect for connection option.\n"); #endif if (m_bAbort) return; rc = SQLExecDirect(m_hHandle, (unsigned char *)szConnOptions, SQL_NTS); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLExecDirect); return; } </pre>
--	---

<pre> STDMETHODIMP CExecute::AbortODBC() { m_bAbort = TRUE; try { if (m_hHandle != SQL_NULL_HSTMT) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLCancel.\n"); #endif SQLRETURN rc = SQLCancel(m_hHandle); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLCancel); } } catch(CODBCError *pErr) { delete pErr; } return(S_OK); } void CExecute::ProcessResultsets() { SQLSMALLINT *CTypeArray, *CScaleArray; SQLINTEGER *ColLenArray, *DispLenArray, *OffsetArray; SQLSMALLINT iColNameLen, SQLType, iColNull, i, NumCols = 0; SQLINTEGER iDispLen, iRowCount; SQLRETURN rc; char szColName[MAX_DATA_LEN + 1]; void *DataPtr; SQLINTEGER iLenOrInd = ALIGNBUF(sizeof(SQLINTEGER)); SQLUIINTEGER iRowArraySize, iArrayElementSize; // SQLUIINTEGER NumRowsFetched; // SQLUSMALLINT *RowStatusArray; if (!m_pOutputFile m_bAbort) return; do { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLNumResultCols.\n"); #endif // Determine the number of result set columns. rc = SQLNumResultCols(m_hHandle, &NumCols); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLNumResultCols); </pre>	<pre> if (NumCols > 0) { // Allocate arrays to hold the C type, scale, column and display length of the data CTypeArray = (SQLSMALLINT *) malloc(NumCols * sizeof(SQLSMALLINT)); CScaleArray = (SQLSMALLINT *) malloc(NumCols * sizeof(SQLSMALLINT)); ColLenArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); DispLenArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); OffsetArray = (SQLINTEGER *) malloc(NumCols * sizeof(SQLINTEGER)); OffsetArray[0] = 0; for (i = 0; i < NumCols && !m_bAbort; i++) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDescribeCol.\n"); #endif // Get the column description, include the SQL type // Determine the column's byte length. Calculate the offset in the buffer to the // data as the offset to the previous column, plus the byte length of the previous // column, plus the byte length of the previous column's length/indicator buffer. // Note that the byte length of the column and the length/indicator buffer are increased // so that, assuming they start on an alignment boundary, they will end on the byte // before the next alignment boundary. Although this might leave some holes in the // buffer, it is a relatively inexpensive way to guarantee alignment. rc = SQLDescribeCol(m_hHandle, ((SQLUSMALLINT) i)+1, (unsigned char *)szColName, sizeof(szColName), &iColNameLen, &SQLType, (unsigned long *)&ColLenArray[i], &CScaleArray[i], &iColNull); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLDescribeCol); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLColAttribute.\n"); #endif if (m_bAbort) return; rc = SQLColAttribute(m_hHandle, ((SQLUSMALLINT) i)+1, SQL_DESC_DISPLAY_SIZE, NULL, 0, NULL, &iDispLen); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLColAttribute); </pre>
---	---

<pre> // GetDefaultCType contains a switch statement that returns the default C type // for each SQL type. CTypeArray[i] = GetDefaultCType(SQLType); if ((CTypeArray[i] == SQL_C_CHAR CTypeArray[i] == SQL_C_BINARY) && ColLenArray[i] > MAX_DATA_LEN) { ColLenArray[i] = MAX_DATA_LEN; iDispLen = MAX_DATA_LEN; } DispLenArray[i] = max(iColNameLen, iDispLen); DispLenArray[i] = max(DispLenArray[i], sizeof(S_NULL)); // Print the column names in the header PrintData(szColName, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); // Add a byte for the null-termination character ColLenArray[i] += 1; ColLenArray[i] = ALIGNBUF(ColLenArray[i]); // Calculate the offset in the buffer to the data as the offset to the previous column, // plus the byte length of the previous column, plus the byte length of the previous // column's length/indicator buffer. if (i) OffsetArray[i] = OffsetArray[i-1] + ColLenArray[i-1] + iLenOrInd; } m_pOutputFile->WriteLine(NULL); iArrayElementSize = OffsetArray[NumCols-1] + ColLenArray[NumCols-1] + iLenOrInd; iRowArraySize = 1; // Allocate the data buffer. The size of the buffer is equal to the offset to the data // buffer for the final column, plus the byte length of the data buffer and length/indicator // buffer for the last column. DataPtr = malloc(iRowArraySize * iArrayElementSize); // Specify the size of the structure with the SQL_ATTR_ROW_BIND_TYPE // statement attribute. This also declares that row-wise binding will // be used. Declare the rowset size with the SQL_ATTR_ROW_ARRAY_SIZE // statement attribute. Set the SQL_ATTR_ROW_STATUS_PTR statement // attribute to point to the row status array. Set the // SQL_ATTR_ROWS_FETCHED_PTR statement attribute to point to // NumRowsFetched. /* RowStatusArray = (SQLUSMALLINT *)malloc(iRowArraySize * sizeof(SQLUSMALLINT)); </pre>	<pre> SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_BIND_TYPE, &iArrayElementSize, SQL_IS_INTEGER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_ARRAY_SIZE, &iRowArraySize, SQL_IS_INTEGER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROW_STATUS_PTR, RowStatusArray, SQL_IS_POINTER); SQLSetStmtAttr(m_hHandle, SQL_ATTR_ROWS_FETCHED_PTR, &NumRowsFetched, SQL_IS_POINTER); */ // For each column, bind the address in the buffer at the start of the memory allocated // for that column's data and the address at the start of the memory allocated for that // column's length/indicator buffer. for (i = 0; i < NumCols; i++) { SQLBindCol(m_hHandle, i + 1, CTypeArray[i], (SQLPOINTER)((SQLCHAR *)DataPtr + OffsetArray[i]), ColLenArray[i], (SQLINTEGER *)((SQLCHAR *)DataPtr + OffsetArray[i] + ColLenArray[i])); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLBindCol); // Underline each column name memset(szColName, '-', DispLenArray[i]); *(szColName + DispLenArray[i]) = '\0'; PrintData(szColName, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); } m_pOutputFile->WriteLine(NULL); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFetch.\n"); #endif while (!m_bAbort && (rc = SQLFetch(m_hHandle)) != SQL_NO_DATA) { HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLFetch); /* for (i = 0; i < NumRowsFetched; i++) { if (RowStatusArray[i] == SQL_ROW_SUCCESS RowStatusArray[i] == SQL_ROW_SUCCESS_WITH_INFO) { /* for (i = 0; i < NumCols; i++) { // Retrieve and print each row. PrintData accepts a pointer to the data, its C type, // and its byte length/indicator. if (*((SQLINTEGER *)((SQLCHAR *)DataPtr + OffsetArray[i] + ColLenArray[i])) == SQL_NULL_DATA) PrintData(S_NULL, SQL_C_CHAR, DispLenArray[i], 0, m_pOutputFile); else PrintData((LPVOID)((SQLCHAR *)DataPtr + OffsetArray[i]), CTypeArray[i], DispLenArray[i], CScaleArray[i], m_pOutputFile); } m_pOutputFile->WriteLine(NULL); </pre>
--	---

<pre> } m_pOutputFile->WriteLine(NULL); /* free(RowStatusArray); */ free(DataPtr); free(CTypeArray); free(CScaleArray); free(ColLenArray); free(DispLenArray); } // Write io statistics, if applicable LogODBCErrors(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLFetch); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLRowCount.\n"); #endif if (m_bAbort) break; // action (insert, update, delete) query rc = SQLRowCount(m_hHandle, &iRowCount); HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLRowCount); if (!m_bNoCount && iRowCount != -1) { sprintf(szColName, "(%d row(s) affected)", iRowCount); _bstr_t temp(szColName); m_pOutputFile->WriteLine((BSTR)temp); m_pOutputFile->WriteLine(NULL); } #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeStmt.\n"); #endif if (m_bAbort) break; SQLFreeStmt(m_hHandle, SQL_UNBIND); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLMoreResults.\n"); #endif if (m_bAbort) break; // Process the next resultset. This function returns 'success with //info' even if there is no other resultset and there are statistics //messages to be printed. Hence the check for -1 rows before //printing. rc=SQLMoreResults(m_hHandle); if (rc != SQL_NO_DATA) HandleODBCError(rc, SQL_HANDLE_STMT, m_hHandle, SMSQLMoreResults); } while (rc != SQL_NO_DATA); return; } </pre>	<pre> void CExecute::PrintData(void *vData, SQLSMALLINT CType, SQLINTEGER IndPtr, SQLSMALLINT iScale, ISMLog *pOutput) { // PrintData accepts a pointer to the data, its C type, // and its byte length/indicator. It contains a switch statement that casts and prints // the data according to its type. char *s; char fmt[MAXBUFLen]; int j = 0; SQLINTEGER iColLen = IndPtr + 1; assert(iColLen); s = (LPSTR)malloc(iColLen + 1); if (s) { if (vData) { switch(CType) { case SQL_C_CHAR: case SQL_C_WCHAR: case SQL_C_TYPE_DATE: case SQL_C_TYPE_TIME: case SQL_C_TYPE_TIMESTAMP: case SQL_C_INTERVAL_YEAR: case SQL_C_INTERVAL_MONTH: case SQL_C_INTERVAL_YEAR_TO_MONTH: case SQL_C_INTERVAL_DAY: case SQL_C_INTERVAL_HOUR: case SQL_C_INTERVAL_MINUTE: case SQL_C_INTERVAL_SECOND: case SQL_C_INTERVAL_DAY_TO_HOUR: case SQL_C_INTERVAL_DAY_TO_MINUTE: case SQL_C_INTERVAL_DAY_TO_SECOND: case SQL_C_INTERVAL_HOUR_TO_MINUTE: case SQL_C_INTERVAL_HOUR_TO_SECOND: case SQL_C_INTERVAL_MINUTE_TO_SECOND: case SQL_C_BINARY: sprintf(fmt, "%%.%ds", iColLen); j = sprintf(s, fmt, (char *)vData); break; case SQL_C_SHORT: j = sprintf(s, "%d", *(short *)vData); break; case SQL_C_LONG: j = sprintf(s, "%ld", *(long *)vData); break; case SQL_C_UBIGINT: j = sprintf(s, "%I64d", *(__int64 *)vData); break; } } } } </pre>
--	--

<pre> case SQL_C_FLOAT: j = sprintf(s, "%f", *(float *)vData); break; case SQL_C_DOUBLE: j = sprintf(s, "%f", *(double *)vData); break; case SQL_C_NUMERIC: sprintf(fmt, "%%.0%df", iScale); j = sprintf(s, fmt, *(double *)vData); break; default: j = sprintf(s, "%s", vData); break; } } // Strip off terminating null character and pad the string with blanks if (iColLen - j > 0) memset(s + j, ' ', iColLen - j); *(s + iColLen) = '\0'; // Write the field to the output file _bstr_t temp(s); pOutput->WriteField((BSTR)temp); free(s); } return; } SQLSMALLINT CExecute::GetDefaultCType(SQLINTEGER SQLType) { // GetDefaultCType returns the C type for the passed in SQL datatype. switch(SQLType) { case SQL_CHAR: case SQL_VARCHAR: case SQL_LONGVARCHAR: case SQL_WCHAR: case SQL_WVARCHAR: case SQL_WLONGVARCHAR: return(SQL_C_CHAR); case SQL_TINYINT: return(SQL_C_CHAR); case SQL_SMALLINT: return(SQL_C_SHORT); case SQL_INTEGER: return(SQL_C_LONG); case SQL_BIGINT: return(SQL_C_UBIGINT); case SQL_REAL: return(SQL_C_FLOAT); </pre>	<pre> case SQL_FLOAT: case SQL_DOUBLE: // case SQL_DECIMAL: return(SQL_C_DOUBLE); case SQL_DECIMAL: return(SQL_C_CHAR); case SQL_BIT: return(SQL_C_CHAR); case SQL_BINARY: case SQL_VARBINARY: case SQL_LONGVARBINARY: return(SQL_C_CHAR); // return(SQL_C_BINARY); case SQL_TYPE_DATE: return(SQL_C_CHAR); // return(SQL_C_TYPE_DATE); case SQL_TYPE_TIME: return(SQL_C_CHAR); // return(SQL_C_TYPE_TIME); case SQL_TYPE_TIMESTAMP: return(SQL_C_CHAR); // return(SQL_C_TYPE_TIMESTAMP); case SQL_NUMERIC: return(SQL_C_FLOAT); case SQL_INTERVAL_YEAR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_YEAR); case SQL_INTERVAL_MONTH: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_MONTH); case SQL_INTERVAL_YEAR_TO_MONTH: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_YEAR_TO_MONTH); case SQL_INTERVAL_DAY: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY); case SQL_INTERVAL_HOUR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR); case SQL_INTERVAL_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_MINUTE); case SQL_INTERVAL_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_SECOND); </pre>
---	---

<pre> case SQL_INTERVAL_DAY_TO_HOUR: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_HOUR); case SQL_INTERVAL_DAY_TO_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_MINUTE); case SQL_INTERVAL_DAY_TO_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_DAY_TO_SECOND); case SQL_INTERVAL_HOUR_TO_MINUTE: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR_TO_MINUTE); case SQL_INTERVAL_HOUR_TO_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_HOUR_TO_SECOND); case SQL_INTERVAL_MINUTE_TO_SECOND: return(SQL_C_CHAR); // return(SQL_C_INTERVAL_MINUTE_TO_SECOND); default: assert(TRUE); return(SQL_C_CHAR); break; } } /* FUNCTION: LogODBCErrors(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle) COMMENTS: Formats ODBC errors or warnings and logs them. Also initializes the completion status for the step to failure, if an ODBC error has occurred. */ void CExecute::LogODBCErrors(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp) { // Messages returned by the server (e.g. Print statements) will be logged to the output file // ODBC warnings will be logged to the log file // All other ODBC errors will be logged to the error file. UCHAR szErrState[SQL_SQLSTATE_SIZE+1]; // SQL Error State string UCHAR szErrMsg[SQL_MAX_MESSAGE_LENGTH+1]; // SQL Error Text string char szBuffer[SQL_SQLSTATE_SIZE+SQL_MAX_MESSAGE _LENGTH+MAXBUFLen+1] = ""; // formatted Error text Buffer </pre>	<pre> SWORD wErrMsgLen; // Error message length SQLINTEGER dwErrCode; // Native Error code SQLRETURN nErrResult; // Return Code from SQLGetDiagRec SWORD sMsgNum = 1; // Error sequence number _bstr_t temp; if (IsErrorReturn(nResult)) { sprintf(szBuffer, "ODBC Operation: '%s' returned error code: %d", g_szOdbcOps[FailedOp], nResult); temp = szBuffer; m_pErrorFile->WriteLine((BSTR) temp); m_StepStatus = gintFailed; } if (handle == SQL_NULL_HSTMT) return; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLGetDiagRec.\n"); #endif // call SQLGetDiagRec function with proper ODBC handles, repeatedly until // function returns SQL_NO_DATA. while (!m_bAbort && (nErrResult = SQLGetDiagRec(fHandleType, handle, sMsgNum++, szErrState, &dwErrCode, szErrMsg, SQL_MAX_MESSAGE_LENGTH-1, &wErrMsgLen)) != SQL_NO_DATA) { if (!SQL_SUCCEEDED(nErrResult)) break; if (m_pOutputFile && IsServerMessage(dwErrCode, szErrMsg)) { wsprintf(szBuffer, SM_SQLMSG_FORMAT, (LPSTR)szErrMsg); temp = szBuffer; m_pOutputFile->WriteLine((BSTR) temp); } else if (IsODBCWarning(szErrState) && dwErrCode != SM_SQL_ERR_CHANGED_DB && dwErrCode != SM_SQL_ERR_CHANGED_LANG) { // Suppress warnings - 'Changed database context to...' and 'Changed language setting to...' wsprintf(szBuffer, SM_SQLMSG_FORMAT, ParseOdbcMsgPrefixes((LPCSTR)szErrMsg)); temp = szBuffer; m_pOutputFile->WriteLine((BSTR) temp); } else if (m_pErrorFile && !IsODBCWarning(szErrState)) { wsprintf(szBuffer, SM_SQLERR_FORMAT, (LPSTR)szErrState, dwErrCode, (LPSTR)szErrMsg); temp = szBuffer; m_pErrorFile->WriteLine((BSTR) temp); } } } </pre>
--	---

<pre> /* FUNCTION: LogErrors(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle) COMMENTS: Writes the error message to the error log */ void CExecError::LogErrors(CExecute *p) { _bstr_t temp(m_szExecErrorDesc[m_iErrCode]); if (p->m_pErrorFile) p->m_pErrorFile->WriteLine((BSTR)temp); return; } /* FUNCTION: ODBCcleanup(HDBC *hdbc, HSTMT *hstmt) COMMENTS: Cleanup of all ODBC structures */ void CExecute::ODBCcleanup(HDBC *hdbc, HSTMT *hstmt) { SQLRETURN lReturn; #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing ODBCcleanup.\n"); #endif if (*hstmt != SQL_NULL_HSTMT) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLCloseCursor.\n"); #endif SQLCloseCursor(hstmt); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hstmt.\n"); #endif SQLFreeHandle(SQL_HANDLE_STMT, hstmt); *hstmt = SQL_NULL_HSTMT; } // Cleanup connection if it is a dynamic connection if (IsDynamicConnection()) { if (*hdbc != SQL_NULL_HDBC) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif lReturn = SQLDisconnect(*hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, hdbc); *hdbc = SQL_NULL_HDBC; } } else ResetConnectionUsage(); return; } </pre>	<pre> // Wrapper function that raises an error if a Windows Api fails STDMETHODIMP CExecute::RaiseSystemError(void) { char s[MAXBUFLen]; GetSystemError(s); return Error(s, 0, NULL, GUID_NULL); } // Wrapper function that logs the error raised by an Api function to the passed in file void CExecute::LogSystemError(ISMLog *pFile) { if (pFile) { char s[MAXBUFLen]; GetSystemError(s); _bstr_t temp(s); pFile->WriteLine((BSTR)temp); } } // Populates the passed in string with the last Windows Api error that occurred void CExecute::GetSystemError(LPSTR s) { long c; DWORD e; e = GetLastError(); c = sprintf(s, "Error code: %ld. ", e); c = FormatMessage(FORMAT_MESSAGE_FROM_SYSTEM FORMAT_MESSAGE_IGNORE_INSERTS, NULL, e, 0, s + c, MAXBUFLen - c, NULL); return; } STDMETHODIMP CExecute::get_StepStatus(InstanceStatus *pVal) { *pVal = m_StepStatus; return S_OK; } STDMETHODIMP CExecute::WriteError(BSTR szMsg) { if (m_pErrorFile) return(m_pErrorFile->WriteLine(szMsg)); return S_OK; } </pre>
---	---

<pre>// FILE: Execute.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Declaration of the CExecute // Contact: Reshma Tharamal (reshmat@microsoft.com) // // Execute.h : Declaration of the CExecute #ifndef __EXECUTE_H_ #define __EXECUTE_H_ #include <atlwin.h> #include <comdef.h> #include <stdio.h> #include "resource.h" // main symbols #include "ExecuteDllCP.h" #include "..\LogWriter\LogWriter.h" #include "..\LogWriter\SMLog.h" #include "..\common\SMTime\SMTime.h" #include "..\common\SMTime\SMTimer.h" // ODBC-specific includes #define DBNTWIN32 #include <sqltypes.h> #include <sql.h> #include <sqlext.h> //////////////////////////////////// // CExecute #define WM_TASK_START (WM_USER + 101) #define WM_TASK_FINISH (WM_USER + 102) #define SM_SQLERR_FORMAT "SQL Error State:%s, Native Error Code: %ld\r\nODBC Error: %s" // format for ODBC error messages #define SM_SQLWARN_FORMA SM_SQLERR_FORMAT // format for ODBC warnings #define SM_SQLMSG_FORMAT "%s" // format for messages from the server #define SM_SQL_STATE_WARNING "01000" #define SM_MSG_SERVER "[Microsoft][ODBC SQL Server Driver][SQL Server]" #define SM_SQL_ERR_CHANGED_DB 5701 #define SM_SQL_ERR_CHANGED_LANG 5703 #define SM_STEPMASER_ERROR "StepMaster Error: " #define CMD_SEPARATOR "\nGO" #define INV_ARRAY_INDEX -1 // invalid index into an array #define MAXBUFLen 256 // display buffer size #define MAXLOGCMDLEN 256 // maximum //characters in command that will be printed to log #define MAXLOGCMDBUF 512 // maximum //characters in command that will be printed to log #define MAX_DATA_LEN 4000 // maximum buffer //size for variable-length data types // viz. character and binary //fields #define FILE_ACCESS_READ "r" // Open file for read access #define S_NULL "NULL"</pre>	<pre>// Define a macro to increase the size of a buffer so it is a multiple of teh alignment size. // Thus, if a buffer starts on an alignment boundary, it will end just before the next // alignment boundary. Here, an alignment size of 4 is used because this is the size of the // largest data type used in the application's buffer - the size of an SDWORD and of the largest // default C data type are both 4. If a larger data type (such as __int64) is used, it will be // necessary to align for that size. #define ALIGNSIZE 4 #define ALIGNBUF(Len) ((Len) % ALIGNSIZE) ? \ ((Len) + ALIGNSIZE - ((Len) % ALIGNSIZE)) : (Len) #define MAX_BUFFER_SIZE 64000 typedef enum OdbcOperations { SMSQLAllocHandle, SMSQLDriverConnect, SMSQLExecDirect, SMSQLSetStmtAttr, SMSQLCancel, SMSQLNumResultCols, SMSQLDescribeCol, SMSQLColAttribute, SMSQLFetch, SMSQLGetData, SMSQLRowCount, SMSQLMoreResults, SMSQLBindCol, }; class CODBCError { public: CODBCError(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp) { m_fHandleType = fHandleType; m_handle = handle; m_FailedOp = FailedOp; m_nResult = nResult; }; private: SWORD m_fHandleType; SQLHANDLE m_handle; OdbcOperations m_FailedOp; SQLRETURN m_nResult; private: inline BOOL IsServerMessage(SQLINTEGER lNativeError, UCHAR *szErr){ return((strstr((LPCTSTR)szErr, SM_MSG_SERVER) != NULL) ? (lNativeError == 0) : FALSE); } inline BOOL IsODBCWarning(UCHAR *szSqlState){ return(strcmp((LPCTSTR)szSqlState, SM_SQL_STATE_WARNING) == 0);} inline LPCSTR ParseOdbcMsgPrefixes(LPCSTR szMsg){ char *pDest; return((pDest = strstr(szMsg, SM_MSG_SERVER)) == NULL ? szMsg : pDest + strlen(SM_MSG_SERVER));} };</pre>
---	--

<pre> class ATL_NO_VTABLE CExecute : public CWindowImpl<CExecute>, public CComObjectRootEx<CComSingleThreadModel>, public CComCoClass<CExecute, &CLSID_Execute>, public IConnectionPointContainerImpl<CExecute>, public ISupportErrorInfo, public IDispatchImpl<IExecute, &IID_IExecute, &LIBID_EXECUTEDLLLib>, public CProxy_IExecuteEvents< CExecute > { public: CExecute() { m_pErrorFile = NULL; //m_pLogFile = NULL; m_pOutputFile = NULL; // Initialize the elapsed time for the step m_tElapsedTime = 0; // Initialize the run status for the step m_StepStatus = gintPending; m_hHandle = SQL_NULL_HSTMT; m_bAbort = FALSE; m_iConnectionIndex = INV_ARRAY_INDEX; } ~CExecute() { } friend class CExecError; public: DECLARE_WND_CLASS("Execute") BEGIN_MSG_MAP(CExecute) MESSAGE_HANDLER(WM_TASK_FINISH, OnTaskFinished) MESSAGE_HANDLER(WM_TASK_START, OnTaskStarted) END_MSG_MAP() public: HRESULT OnTaskStarted(UINT uMsg, WPARAM wParam, LPARAM lParam, BOOL& bHandled) { CURRENCY CStartTime = Get64BitTime(&m_tStartTime); Fire_Start(CStartTime); return 0; } </pre>	<pre> HRESULT OnTaskFinished(UINT uMsg, WPARAM wParam, LPARAM lParam, BOOL& bHandled) { CURRENCY CEndTime = Get64BitTime(&m_tEndTime); Fire_Complete(CEndTime, (long)m_tElapsedTime); return 0; } HRESULT FinalConstruct() { HRESULT hr; RECT rect; rect.left=0; rect.right=100; rect.top=0; rect.bottom=100; HWND hwnd = Create(NULL, rect, "ExecuteWindow", WS_POPUP); if (!hwnd) return HRESULT_FROM_WIN32(GetLastError()); hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, IID_ISMLog, (void **)&m_pErrorFile); if FAILED(hr) return(hr); m_pErrorFile->put_Append(TRUE); //hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, // IID_ISMLog, (void **)&m_pLogFile); //if FAILED(hr) // return(hr); hr = CoCreateInstance(CLSID_SMLog, NULL, CLSCTX_INPROC, IID_ISMLog, (void **)&m_pOutputFile); if FAILED(hr) return(hr); m_pOutputFile->put_Append(TRUE); hr = CoCreateInstance(CLSID_SMTimer, NULL, CLSCTX_INPROC, IID_ISMTimer, (void **)&m_ExecTime); if FAILED(hr) return(hr); return S_OK; } </pre>
--	---

<pre> void FinalRelease() { if (m_hWnd != NULL) DestroyWindow(); // Close the log and error files if (m_pErrorFile) m_pErrorFile->Release(); m_pErrorFile = NULL; //if (m_pLogFile) // m_pLogFile->Release(); //m_pLogFile = NULL; if (m_ExecTime) m_ExecTime->Release(); m_ExecTime = NULL; } DECLARE_REGISTRY_RESOURCEID(IDR_EXECUTE) DECLARE_PROTECT_FINAL_CONSTRUCT() BEGIN_COM_MAP(CExecute) COM_INTERFACE_ENTRY(IExecute) COM_INTERFACE_ENTRY(ISupportErrorInfo) COM_INTERFACE_ENTRY(IDispatch) COM_INTERFACE_ENTRY(IConnectionPointContainer) COM_INTERFACE_ENTRY_IMPL(IConnectionPointContainer) END_COM_MAP() BEGIN_CONNECTION_POINT_MAP(CExecute) CONNECTION_POINT_ENTRY(DIID__IExecuteEvents) END_CONNECTION_POINT_MAP() // ISupportsErrorInfo STDMETHOD(InterfaceSupportsErrorInfo)(REFIID riid); // IExecute public: STDMETHOD(put_ErrorFile)(/*[in]*/ BSTR newVal); STDMETHOD(put_OutputFile)(/*[in]*/ BSTR newVal); STDMETHOD(WriteError)(BSTR szMsg); STDMETHOD(Abort)(); STDMETHOD(get_StepStatus)(/*[out, retval]*/ InstanceStatus *pVal); STDMETHOD(DoExecute)(/*[in]*/ BSTR szCommand, /*[in]*/ BSTR szExecutionDtls, /*[in]*/ ExecutionType ExecMethod, /*[in]*/ BOOL bNoCount, /*[in]*/ BOOL bNoExecute, /*[in]*/ BOOL bParseOnly, /*[in]*/ BOOL bQuotedIds, /*[in]*/ BOOL bAnsiNulls, /*[in]*/ BOOL bShowQP, /*[in]*/ BOOL bStatsTime, /*[in]*/ BOOL bStatsIO, /*[in]*/ long lRowCount, /*[in]*/ long lQueryTmout, /*[in]*/ BSTR szConnection); TC_TIME ExecuteShell(); TC_TIME ExecuteODBC(); STDMETHODIMP AbortShell(); STDMETHODIMP AbortODBC(); _bstr_t m_szCommand; _bstr_t m_szExecDtls; _bstr_t m_szConnection; </pre>	<pre> DWORD m_lMode; //DATE m_CurTime; SYSTEMTIME m_tStartTime; SYSTEMTIME m_tEndTime; TC_TIME m_tElapsedTime; ISMLog *m_pErrorFile; //ILog *m_pLogFile; ISMLog *m_pOutputFile; ISMTimer *m_ExecTime; ExecutionType m_ExecMthd; InstanceStatus m_StepStatus; HANDLE m_hHandle; // Process handle for shell commands and // Statement handle for ODBC commands LPSTR m_szCmd; private: LPSTR NextCmdInBatch(LPSTR szBatch); void ProcessResultsets(); SQLSMALLINT GetDefaultCType(SQLINTEGER SQLType); void PrintData(void *vData, SQLSMALLINT CType, SQLINTEGER IndPtr, SQLSMALLINT iScale, ISMLog *pOutput); void LogODBCErrors(SQLRETURN nResult, SWORD fHandleType, SQLHANDLE handle, OdbcOperations FailedOp); void ODBCcleanup(HDBC *hdbc, HSTMT *hstmt); STDMETHODIMP RaiseSystemError(void); void LogSystemError(ISMLog *pFile); void GetSystemError(LPSTR s); void SetConnectionOption(LPSTR szConn, HDBC *pHdbc); void ResetConnectionProperties(HDBC *p_hdbc); void InitializeConnection(HDBC *phdbc, BOOL *pbDoConnect); void ReConnectDeadConnection(HDBC *phdbc); void ResetConnectionUsage(); int m_iConnectionIndex; BOOL m_bNoCount, m_bNoExecute, m_bParseOnly, m_bQuotedIds, m_bAnsiNulls, \ m_bShowQP, m_bStatsTime, m_bStatsIO; long m_lRowCount; SQLINTEGER m_lQueryTmout; _bstr_t m_ErrorFile, m_OutputFile; BOOL m_bAbort; </pre>
---	--

<pre> private: inline BOOL IsServerMessage(SQLINTEGER lNativeError, UCHAR *szErr){ return((strstr((LPCTSTR)szErr, SM_MSG_SERVER) != NULL) ? (lNativeError == 0) : FALSE); } inline BOOL IsODBCWarning(UCHAR *szSqlState){ return(strcmp((LPCTSTR)szSqlState, SM_SQL_STATE_WARNING) == 0);} inline BOOL IsErrorReturn(SQLRETURN iRetCode){ return((!SQL_SUCCEEDED(iRetCode)) && (iRetCode != SQL_NO_DATA));} inline LPCSTR ParseOdbcMsgPrefixes(LPCSTR szMsg){ char *pDest; return((pDest = strstr(szMsg, SM_MSG_SERVER)) == NULL ? szMsg : pDest + strlen(SM_MSG_SERVER));} inline BOOL IsDynamicConnection(){ return(!strcmp((LPCTSTR)m_szConnection, ""));} inline void HandleODBCError(SQLRETURN rc, SWORD fHandleType, SQLHANDLE handle, OdbcOperations OdbcOp) { if (rc != SQL_SUCCESS) { LogODBCErrors(rc, fHandleType, handle, OdbcOp); if (IsErrorReturn(rc)) throw new CODBCErrror(rc, fHandleType, handle, OdbcOp); } return; } }; class CExecError { public: typedef enum ExecErrorCodes { SM_ERR_CONN_IN_USE, }; CExecError(int iError) { m_iErrCode = iError; }; void LogErrors(CExecute *p); private: int m_iErrCode; static char *m_szExecErrorDesc[]; }; void ExecutionThread(LPVOID lpParameter); #ifdef _TPCH_AUDIT void WriteFileToTpchLog(LPCTSTR szFile, LPCTSTR szFmt); void WriteToTpchLog(char *szMsg); #endif </pre>	<pre> #endif // _EXECUTE_H_ // FILE: ExecuteDll.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f ExecuteDllps.mk in the project directory. #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "..\LogWriter\LogWriter.h" #include "..\LogWriter\LogWriter_i.c" #include "..\common\SMTime\SMTime.h" #include "..\common\SMTime\SMTime_i.c" #include "ExecuteDll.h" #include "SMExecute.h" #include "ExecuteDll_i.c" #include "Execute.h" CComModule _Module; BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_Execute, CExecute) END_OBJECT_MAP() SQLHENV henv = NULL; // ODBC environment handle static char szCaption[] = "StepMaster"; // Message box caption CRITICAL_SECTION hConnections; // Critical section to serialize access // to available connections SM_Connection_Info *p_Connections = NULL; // Pointer to open connections int iConnectionCount = 0; // Number of open connections #ifdef _TPCH_AUDIT FILE *pfLogFile = NULL; // Log file containing timestamps CRITICAL_SECTION hLogFileWrite; // Critical section to serialize writes to log static char szFileOpenModeAppend[] = "a+"; // Log file open mode static char szEnvVarLogFile[] = "TPCH_LOG_FILE"; // Environment variable - initialized to // log file name if timing information // is to be logged #endif </pre>
---	--

<pre> void ShowODBCErrors(SWORD fHandleType, SQLHANDLE handle); void CloseOpenConnections(); /// // DLL Entry Point extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_EXECUTEDLLLib); DisableThreadLibraryCalls(hInstance); #ifdef _TPCH_AUDIT char szMsg[MAXBUFLen]; LPSTR szLogFileName = getenv(szEnvVarLogFile); if (szLogFileName == NULL) { sprintf(szMsg, "The environment variable '%s' does not exist. " "Step timing information will not be written to a log.", szEnvVarLogFile); MessageBox(NULL, szMsg, szCaption, MB_OK); } else { if ((pfLogFile = fopen(szLogFileName, szFileOpenModeAppend)) == NULL) { sprintf(szMsg, "The file '%s' does not exist. " "Step timing information will not be written to log.", szLogFileName); MessageBox(NULL, szMsg, szCaption, MB_OK); } else { InitializeCriticalSection(&hLogFileWrite); } } #endif InitializeCriticalSection(&hConnections); p_Connections = NULL; iConnectionCount = 0; if (!SQL_SUCCEEDED(SQLSetEnvAttr(NULL, SQL_ATTR_CONNECTION_POOLING, (SQLPOINTER)SQL_CP_ONE_PER_HENV , 0))) ShowODBCErrors(SQL_HANDLE_ENV, henv); if (!SQL_SUCCEEDED(SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv))) { ShowODBCErrors(SQL_HANDLE_ENV, henv); return FALSE; } if (!SQL_SUCCEEDED(SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (LPVOID)SQL_OV_ODBC3, 0))) ShowODBCErrors(SQL_HANDLE_ENV, henv); </pre>	<pre> SQLINTEGER CpMatch; if (!SQL_SUCCEEDED(SQLGetEnvAttr(henv, SQL_ATTR_CP_MATCH, &CpMatch, 0, NULL))) ShowODBCErrors(SQL_HANDLE_ENV, henv); if (!SQL_SUCCEEDED(SQLSetEnvAttr(henv, SQL_ATTR_CP_MATCH, (SQLPOINTER)SQL_CP_STRICT_MATCH, SQL_IS_INTEGER))) ShowODBCErrors(SQL_HANDLE_ENV, henv); } else if (dwReason == DLL_PROCESS_DETACH) { #ifdef _TPCH_AUDIT if (pfLogFile != NULL) { fclose(pfLogFile); DeleteCriticalSection(&hLogFileWrite); } } #endif CloseOpenConnections(); if (henv != NULL) SQLFreeEnv(henv); DeleteCriticalSection(&hConnections); _Module.Term(); } return TRUE; // ok } void ShowODBCErrors(SWORD fHandleType, SQLHANDLE handle) { UCHAR szErrState[SQL_SQLSTATE_SIZE+1]; // SQL Error State string UCHAR szErrText[SQL_MAX_MESSAGE_LENGTH+1]; // SQL Error Text string char szBuffer[SQL_SQLSTATE_SIZE+SQL_MAX_MESSAGE _LENGTH+MAXBUFLen+1] = ""; // formatted Error text Buffer SWORD wErrMsgLen; // Error message length SQLINTEGER dwErrCode; // Native Error code SQLRETURN nErrResult; // Return Code from SQLGetDiagRec SWORD sMsgNum = 1; // Error sequence number // call SQLGetDiagRec function with proper ODBC handles, repeatedly until // function returns SQL_NO_DATA. while ((nErrResult = SQLGetDiagRec(fHandleType, handle, sMsgNum++, szErrState, &dwErrCode, szErrText, SQL_MAX_MESSAGE_LENGTH-1, &wErrMsgLen)) != SQL_NO_DATA) { if (!SQL_SUCCEEDED(nErrResult)) break; wsprintf(szBuffer, SM_SQLERR_FORMAT, (LPSTR)szErrState, dwErrCode, (LPSTR)szErrText); MessageBox(NULL, szBuffer, szCaption, MB_OK); } } </pre>
--	---

<pre> void CloseOpenConnections() { // Closes all open connections if (p_Connections) { for (int iConnIndex = iConnectionCount - 1; iConnIndex >= 0; iConnIndex--) { if ((p_Connections + iConnIndex)->hdbc != SQL_NULL_HDBC) { #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLDisconnect.\n"); #endif SQLDisconnect((p_Connections + iConnIndex)- >hdbc); #ifdef _DEBUG _CrtDbgReport(_CRT_WARN, NULL, 0, NULL, "Executing SQLFreeHandle for hdbc.\n"); #endif SQLFreeHandle(SQL_HANDLE_DBC, (p_Connections + iConnIndex)->hdbc); (p_Connections + iConnIndex)->hdbc = SQL_NULL_HDBC; } } free(p_Connections); } p_Connections = NULL; return; } //////////////////////////////////// // Used to determine whether the DLL can be unloaded by OLE STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } //////////////////////////////////// // Returns a class factory to create an object of the requested type STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } //////////////////////////////////// // DllRegisterServer - Adds entries to the system registry STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); } </pre>	<pre> //////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } /* this ALWAYS GENERATED file contains the definitions for the interfaces */ /* File created by MIDL compiler version 5.01.0164 */ /* at Mon Jun 09 19:33:03 2003 */ /* Compiler settings for C:\charles\Stepmaster\ExecuteDll\ExecuteDll.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ //@@@MIDL_FILE_HEADING() /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __ExecuteDll_h__ #define __ExecuteDll_h__ #ifdef __cplusplus extern "C"{ #endif /* Forward Declarations */ #ifndef __IExecuteEvents_FWD_DEFINED__ #define __IExecuteEvents_FWD_DEFINED__ typedef interface _IExecuteEvents _IExecuteEvents; #endif /* __IExecuteEvents_FWD_DEFINED__ */ #ifndef __IExecute_FWD_DEFINED__ #define __IExecute_FWD_DEFINED__ typedef interface IExecute IExecute; #endif /* __IExecute_FWD_DEFINED__ */ #ifndef __Execute_FWD_DEFINED__ #define __Execute_FWD_DEFINED__ #ifdef __cplusplus typedef class Execute Execute; #else typedef struct Execute Execute; #endif /* __cplusplus */ #endif /* __Execute_FWD_DEFINED__ */ </pre>
---	---

<pre> /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); /* interface __MIDL_itf_ExecuteDtl_0000 */ /* [local] */ typedef /* [helpstring][uuid] */ enum ExecutionType { execODBC = 0x1, execShell = 0x2 } ExecutionType; typedef /* [helpstring][uuid] */ enum InstanceStatus { gintDisabled = 0x1, gintPending = 0x2, gintRunning = 0x3, gintComplete = 0x4, gintFailed = 0x5, gintAborted = 0x6 } InstanceStatus; extern RPC_IF_HANDLE __MIDL_itf_ExecuteDtl_0000_v0_0_c_ifspec; extern RPC_IF_HANDLE __MIDL_itf_ExecuteDtl_0000_v0_0_s_ifspec; #ifdef __EXECUTEDLLlib_LIBRARY_DEFINED__ #define __EXECUTEDLLlib_LIBRARY_DEFINED__ /* library EXECUTEDLLlib */ /* [helpstring][version][uuid] */ EXTERN_C const IID LIBID_EXECUTEDLLlib; #ifdef __IExecuteEvents_DISPINTERFACE_DEFINED__ #define __IExecuteEvents_DISPINTERFACE_DEFINED__ /* dispinterface _IExecuteEvents */ /* [helpstring][uuid] */ EXTERN_C const IID DIID__IExecuteEvents; #ifdef __cplusplus && !defined(CINTERFACE) MIDL_INTERFACE("551AC532-AB1C-11D2-BC0C-00A0C90D2CA5") _IExecuteEvents : public IDispatch { }; </pre>	<pre> #else /* C style interface */ typedef struct _IExecuteEventsVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(_IExecuteEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(_IExecuteEvents __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(_IExecuteEvents __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(_IExecuteEvents __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(_IExecuteEvents __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(_IExecuteEvents __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(_IExecuteEvents __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); END_INTERFACE } _IExecuteEventsVtbl; interface _IExecuteEvents { { CONST_VTBL struct _IExecuteEventsVtbl __RPC_FAR *pVtbl; }; </pre>
--	---

<pre> #ifdef COBJMACROS #define _IExecuteEvents_QueryInterface(This,riid,ppvObject)\ (This)->lpVtbl -> QueryInterface(This,riid,ppvObject) #define _IExecuteEvents_AddRef(This)\ (This)->lpVtbl -> AddRef(This) #define _IExecuteEvents_Release(This)\ (This)->lpVtbl -> Release(This) #define _IExecuteEvents_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl -> GetTypeInfoCount(This,pctinfo) #define _IExecuteEvents_GetTypeInfo(This,iTInfo,lcid,ppTInfo)\ (This)->lpVtbl -> GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define _IExecuteEvents_GetIDsOfNames(This,riid,rgszNames,cNames,\ lcid,rgDispId) \ (This)->lpVtbl -> \ GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define _IExecuteEvents_Invoke(This,dispIdMember,riid,lcid,wFlags,pD\ ispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl -> \ Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarR\ esult,pExcepInfo,puArgErr) #endif /* COBJMACROS */ #endif /* C style interface */ #endif /* _IExecuteEvents_DISPINTERFACE_DEFINED */ #ifndef __IExecute_INTERFACE_DEFINED__ #define __IExecute_INTERFACE_DEFINED__ /* interface IExecute */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_IExecute; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("551AC531-AB1C-11D2-BC0C-00A0C90D2CA5") IExecute : public IDispatch { public: virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE DoExecute(/* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtls, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTmout, /* [in] */ BSTR szConnection) = 0; </pre>	<pre> virtual /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE get_StepStatus(/* [retval][out] */ InstanceStatus __RPC_FAR *pVal) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Abort(void) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE WriteError(BSTR szMsg) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_OutputFile(/* [in] */ BSTR newVal) = 0; virtual /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE put_ErrorFile(/* [in] */ BSTR newVal) = 0; }; #else /* C style interface */ typedef struct IExecuteVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(IExecute __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(IExecute __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(IExecute __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(IExecute __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(IExecute __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(IExecute __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); </pre>
---	--

<pre> /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(IExecute __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *DoExecute)(IExecute __RPC_FAR * This, /* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtls, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTmout, /* [in] */ BSTR szConnection); /* [helpstring][id][propget] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *get_StepStatus)(IExecute __RPC_FAR * This, /* [retval][out] */ InstanceStatus __RPC_FAR *pVal); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Abort)(IExecute __RPC_FAR * This); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *WriteError)(IExecute __RPC_FAR * This, BSTR szMsg); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_OutputFile)(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); /* [helpstring][id][propput] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *put_ErrorFile)(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); END_INTERFACE } IExecuteVtbl; interface IExecute { CONST_VTBL struct IExecuteVtbl __RPC_FAR *lpVtbl; }; </pre>	<pre> #ifndef COBJMACROS #define IExecute_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define IExecute_AddRef(This) \ (This)->lpVtbl->AddRef(This) #define IExecute_Release(This) \ (This)->lpVtbl->Release(This) #define IExecute_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define IExecute_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define IExecute_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) \ (This)->lpVtbl->GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define IExecute_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl->Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarResult,pExcepInfo,puArgErr) #define IExecute_DoExecute(This,szCommand,szExecutionDtls,ExecMethod,bNoCount,bNoExecute,bParseOnly,bQuotedIds,bAnsiNulls,bShowQP,bStatsTime,bStatsIO,lRowCount,lQueryTmout,szConnection) \ (This)->lpVtbl->DoExecute(This,szCommand,szExecutionDtls,ExecMethod,bNoCount,bNoExecute,bParseOnly,bQuotedIds,bAnsiNulls,bShowQP,bStatsTime,bStatsIO,lRowCount,lQueryTmout,szConnection) #define IExecute_get_StepStatus(This,pVal) \ (This)->lpVtbl->get_StepStatus(This,pVal) #define IExecute_Abort(This) \ (This)->lpVtbl->Abort(This) #define IExecute_WriteError(This,szMsg) \ (This)->lpVtbl->WriteError(This,szMsg) #define IExecute_put_OutputFile(This,newVal) \ (This)->lpVtbl->put_OutputFile(This,newVal) #define IExecute_put_ErrorFile(This,newVal) \ (This)->lpVtbl->put_ErrorFile(This,newVal) #endif /* COBJMACROS */ #endif /* C style interface */ </pre>
--	--

<pre> /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_DoExecute_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR szCommand, /* [in] */ BSTR szExecutionDtls, /* [in] */ ExecutionType ExecMethod, /* [in] */ BOOL bNoCount, /* [in] */ BOOL bNoExecute, /* [in] */ BOOL bParseOnly, /* [in] */ BOOL bQuotedIds, /* [in] */ BOOL bAnsiNulls, /* [in] */ BOOL bShowQP, /* [in] */ BOOL bStatsTime, /* [in] */ BOOL bStatsIO, /* [in] */ long lRowCount, /* [in] */ long lQueryTimeout, /* [in] */ BSTR szConnection); void __RPC_STUB IExecute_DoExecute_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE IExecute_get_StepStatus_Proxy(IExecute __RPC_FAR * This, /* [retval][out] */ InstanceStatus __RPC_FAR *pVal); void __RPC_STUB IExecute_get_StepStatus_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_Abort_Proxy(IExecute __RPC_FAR * This); void __RPC_STUB IExecute_Abort_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE IExecute_WriteError_Proxy(IExecute __RPC_FAR * This, BSTR szMsg); void __RPC_STUB IExecute_WriteError_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE IExecute_put_OutputFile_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); </pre>	<pre> void __RPC_STUB IExecute_put_OutputFile_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propput] */ HRESULT STDMETHODCALLTYPE IExecute_put_ErrorFile_Proxy(IExecute __RPC_FAR * This, /* [in] */ BSTR newVal); void __RPC_STUB IExecute_put_ErrorFile_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __IExecute_INTERFACE_DEFINED__ */ EXTERN_C const CLSID CLSID_Execute; #ifdef __cplusplus class DECLSPEC_UUID("2EFC198E-AA8D-11D2-BC0C- 00A0C90D2CA5") Execute; #endif #endif /* __EXECUTEDLLLib_LIBRARY_DEFINED__ */ /* Additional Prototypes for ALL interfaces */ /* end of Additional Prototypes */ #ifdef __cplusplus } #endif #endif // FILE: Execute.cpp // // FILE: ExecuteDllCP.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Connection point implementation // Contact: Reshma Tharamal (reshmat@microsoft.com) // #endifdef _EXECUTEDLLCP_H_ #define _EXECUTEDLLCP_H_ </pre>
--	--

<pre> template <class T> class CProxy_IExecuteEvents : public IConnectionPointImpl<T, &DIID_IExecuteEvents, CComDynamicUnkArray> { //Warning this class may be recreated by the wizard. public: VOID Fire_Start(CY StartTime) { T* pT = static_cast<T*>(this); int nConnectionIndex; CComVariant* pvars = new CComVariant[1]; int nConnections = m_vec.GetSize(); for (nConnectionIndex = 0; nConnectionIndex < nConnections; nConnectionIndex++) { pT->Lock(); CComPtr<IUnknown> sp = m_vec.GetAt(nConnectionIndex); pT->Unlock(); IDispatch* pDispatch = reinterpret_cast<IDispatch*>(sp.p); if (pDispatch != NULL) { pvars[0] = StartTime; DISPPARAMS disp = { pvars, NULL, 1, 0 }; pDispatch->Invoke(0x1, IID_NULL, LOCALE_USER_DEFAULT, DISPATCH_METHOD, &disp, NULL, NULL, NULL); } } delete[] pvars; } VOID Fire_Complete(CY EndTime, LONG Elapsed) { T* pT = static_cast<T*>(this); int nConnectionIndex; CComVariant* pvars = new CComVariant[2]; int nConnections = m_vec.GetSize(); for (nConnectionIndex = 0; nConnectionIndex < nConnections; nConnectionIndex++) { pT->Lock(); CComPtr<IUnknown> sp = m_vec.GetAt(nConnectionIndex); pT->Unlock(); IDispatch* pDispatch = reinterpret_cast<IDispatch*>(sp.p); if (pDispatch != NULL) { pvars[1] = EndTime; pvars[0] = Elapsed; DISPPARAMS disp = { pvars, NULL, 2, 0 }; pDispatch->Invoke(0x2, IID_NULL, LOCALE_USER_DEFAULT, DISPATCH_METHOD, &disp, NULL, NULL, NULL); } } delete[] pvars; } }; </pre>	<pre> #endif// FILE: resource.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Resource file // Contact: Reshma Tharamal (reshmat@microsoft.com) // //{NO_DEPENDENCIES} // Microsoft Developer Studio generated include file. // Used by ExecuteDll.rc // #define IDS_PROJNAME 100 #define IDR_EXECUTE 101 #define IDR_LOG 102 #define IDR_EXECUTESHELL 103 #define SM_SYSTEM_ERROR 0x0201 // Next default values for new objects // #ifdef APSTUDIO_INVOKED #ifndef APSTUDIO_READONLY_SYMBOLS #define _APS_NEXT_RESOURCE_VALUE 201 #define _APS_NEXT_COMMAND_VALUE 32768 #define _APS_NEXT_CONTROL_VALUE 201 #define _APS_NEXT_SYMED_VALUE 104 #endif #endif // FILE: SMExecute.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Common include file for Execute.cpp and ExecuteDll.cpp // Contact: Reshma Tharamal (reshmat@microsoft.com) // #pragma once // ODBC-specific includes #define DBNTWIN32 #include <sqltypes.h> #include <sql.h> #include <sqlext.h> #define CONNECTION_NAME_LEN 256 // connection name length typedef struct _SM_Connection_Info { charszConnectionName[CONNECTION_NAME_LEN]; HDBC hdbc; BOOL bInUse; } SM_Connection_Info; </pre>
--	---

<pre>// FILE: stdafx.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: source file that includes just the standard includes // Contact: Reshma Tharamal (reshmat@microsoft.com) // // stdafx.cpp : source file that includes just the standard includes // stdafx.pch will be the pre-compiled header // stdafx.obj will contain the pre-compiled type information #include "stdafx.h" #ifdef _ATL_STATIC_REGISTRY #include <statreg.h> #include <statreg.cpp> #endif #include <atlimpl.cpp> // FILE: stdafx.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: include file for standard system include files, // or project specific include files that are used frequently, // but are changed infrequently // Contact: Reshma Tharamal (reshmat@microsoft.com) // // //if !defined(AFX_STDAFX_H__551AC528_AB1C_11D2_BC0C_ 00A0C90D2CA5__INCLUDED_) #define AFX_STDAFX_H__551AC528_AB1C_11D2_BC0C_00A0C90 D2CA5__INCLUDED_ #if _MSC_VER > 1000 #pragma once #endif // _MSC_VER > 1000 #define STRICT #ifdef _WIN32_WINNT #define _WIN32_WINNT 0x0400 #endif #define _ATL_APARTMENT_THREADED #include <atlbase.h> //You may derive a class from CComModule and use it if you want to override //something, but do not change the name of _Module extern CComModule _Module; #include <atlcom.h> //{{AFX_INSERT_LOCATION}} // Microsoft Visual C++ will insert additional declarations immediately before the previous line. #endif // !defined(AFX_STDAFX_H__551AC528_AB1C_11D2_BC0C_ 00A0C90D2CA5__INCLUDED_)</pre>	
---	--

<pre>// FILE: resource.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Resource file // Contact: Reshma Tharamal (reshmat@microsoft.com) // //{{NO_DEPENDENCIES}} // Microsoft Developer Studio generated include file. // Used by SMTimer.rc // #define IDS_PROJNAME 100 #define IDR_SMTIMER 102 // // Next default values for new objects // #ifdef APSTUDIO_INVOKED #ifndef APSTUDIO_READONLY_SYMBOLS #define _APS_NEXT_RESOURCE_VALUE 201 #define _APS_NEXT_COMMAND_VALUE 32768 #define _APS_NEXT_CONTROL_VALUE 201 #define _APS_NEXT_SYMED_VALUE 103 #endif #endif // FILE: SMTimer.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMTimer.cpp : Implementation of DLL Exports. // // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f SMTimer.ms in the project directory. // #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "SMTimer.h" // #include "SMTimer_i.c" #include "SMTimer.h" // CComModule _Module; // BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_SMTimer, CSMTimer) END_OBJECT_MAP()</pre>	<pre>//////////////////////////////////// // DLL Entry Point // extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_SMTIMELib); DisableThreadLibraryCalls(hInstance); } else if (dwReason == DLL_PROCESS_DETACH) _Module.Term(); return TRUE; // ok } // //////////////////////////////////// // Used to determine whether the DLL can be unloaded by OLE // STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } // //////////////////////////////////// // Returns a class factory to create an object of the requested type // STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } // //////////////////////////////////// // DllRegisterServer - Adds entries to the system registry // STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); } // //////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry // STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } // /* this ALWAYS GENERATED file contains the definitions for the interfaces */ // /* File created by MIDL compiler version 5.01.0164 */ /* at Thu Sep 19 17:49:55 2002 */ /* Compiler settings for C:\charles\Stepmaster\COMMON\SMTimer\SMTimer.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ //@@@MIDL_FILE_HEADING()</pre>
--	--

<pre> /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __RPCNDR_H_VERSION__ #error this stub requires an updated version of <rpcndr.h> #endif // __RPCNDR_H_VERSION__ #ifndef COM_NO_WINDOWS_H #include "windows.h" #include "ole2.h" #endif /*COM_NO_WINDOWS_H*/ #ifndef __SMTIME_H__ #define __SMTIME_H__ #ifdef __cplusplus extern "C"{ #endif /* Forward Declarations */ #ifndef __ISMTimer_FWD_DEFINED__ #define __ISMTimer_FWD_DEFINED__ typedef interface ISMTimer ISMTimer; #endif /*__ISMTimer_FWD_DEFINED__*/ #ifndef __SMTimer_FWD_DEFINED__ #define __SMTimer_FWD_DEFINED__ #ifdef __cplusplus typedef class SMTimer SMTimer; #else typedef struct SMTimer SMTimer; #endif /*__cplusplus*/ #endif /*__SMTimer_FWD_DEFINED__*/ /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); #ifndef __ISMTimer_INTERFACE_DEFINED__ #define __ISMTimer_INTERFACE_DEFINED__ /* interface ISMTimer */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_ISMTimer; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("1A6D0AE4-8528-453B-B8E3-8DAD1F0561B7") ISMTimer : public IDispatch { public: </pre>	<pre> virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Start(void) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Stop(CURRENCY __RPC_FAR *pElapsedTime) = 0; virtual /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE get_Running(/* [retval][out] */ BOOL __RPC_FAR *pVal) = 0; }; #else /* C style interface */ typedef struct ISMTimerVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(ISMTimer __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(ISMTimer __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(ISMTimer __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(ISMTimer __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(ISMTimer __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(ISMTimer __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(ISMTimer __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); </pre>
---	--

<pre> /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Start)(ISMTimer __RPC_FAR * This); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Stop)(ISMTimer __RPC_FAR * This, CURRENCY __RPC_FAR *pElapsedTime); /* [helpstring][id][propget] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *get_Running)(ISMTimer __RPC_FAR * This, /* [retval][out] */ BOOL __RPC_FAR *pVal); END_INTERFACE } ISMTimerVtbl; interface ISMTimer { CONST_VTBL struct ISMTimerVtbl __RPC_FAR *lpVtbl; }; #ifdef COBJMACROS #define ISMTimer_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define ISMTimer_AddRef(This) \ (This)->lpVtbl->AddRef(This) #define ISMTimer_Release(This) \ (This)->lpVtbl->Release(This) #define ISMTimer_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define ISMTimer_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define ISMTimer_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rg DispId) \ (This)->lpVtbl-> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define ISMTimer_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispPar ams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl-> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarR esult,pExcepInfo,puArgErr) #define ISMTimer_Start(This) \ (This)->lpVtbl->Start(This) #define ISMTimer_Stop(This,pElapsedTime) \ (This)->lpVtbl->Stop(This,pElapsedTime) #define ISMTimer_get_Running(This,pVal) \ (This)->lpVtbl->get_Running(This,pVal) #endif /* COBJMACROS */ #endif /* C style interface */ </pre>	<pre> /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMTimer_Start_Proxy(ISMTimer __RPC_FAR * This); void __RPC_STUB ISMTimer_Start_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMTimer_Stop_Proxy(ISMTimer __RPC_FAR * This, CURRENCY __RPC_FAR *pElapsedTime); void __RPC_STUB ISMTimer_Stop_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE ISMTimer_get_Running_Proxy(ISMTimer __RPC_FAR * This, /* [retval][out] */ BOOL __RPC_FAR *pVal); void __RPC_STUB ISMTimer_get_Running_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __ISMTimer_INTERFACE_DEFINED__ */ #ifdef __SMTIMELib_LIBRARY_DEFINED__ #define __SMTIMELib_LIBRARY_DEFINED__ /* library SMTIMELib */ /* [helpstring][version][uuid] */ EXTERN_C const IID LIBID_SMTIMELib; #ifdef __StepMasterTimeFunctions_MODULE_DEFINED__ #define __StepMasterTimeFunctions_MODULE_DEFINED__ /* module StepMasterTimeFunctions */ /* [dllname][version][helpstring] */ /* [entry][helpstring] */ CURRENCY __stdcall Get64BitTime(/* [in] */ LPSYSTEMTIME lpInitTime); /* [entry][helpstring] */ void __stdcall JulianToTime(/* [in] */ CURRENCY julianTS, /* [out][in] */ int __RPC_FAR *yr, /* [out][in] */ int __RPC_FAR *mm, /* [out][in] */ int __RPC_FAR *dd, /* [out][in] */ int __RPC_FAR *hh, /* [out][in] */ int __RPC_FAR *mi, /* [out][in] */ int __RPC_FAR *ss, /* [out][in] */ int __RPC_FAR *ms); </pre>
---	---

<pre> #endif /* __StepMasterTimeFunctions_MODULE_DEFINED__ */ EXTERN_C const CLSID CLSID_SMTimer; #ifdef __cplusplus class DECLSPEC_UUID("27BAB71B-89E1-4A78-8854- FDFFBDC8037E") SMTimer; #endif #endif /* __SMTIMELib_LIBRARY_DEFINED__ */ /* Additional Prototypes for ALL interfaces */ /* end of Additional Prototypes */ #ifdef __cplusplus } #endif #endif // FILE: resource.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Resource file // Contact: Reshma Tharamal (reshmat@microsoft.com) // //{{NO_DEPENDENCIES}} // Microsoft Developer Studio generated include file. // Used by SMTime.rc // #define IDS_PROJNAME 100 #define IDR_SMTIMER 102 // Next default values for new objects // #ifdef APSTUDIO_INVOKED #ifndef APSTUDIO_READONLY_SYMBOLS #define _APS_NEXT_RESOURCE_VALUE 201 #define _APS_NEXT_COMMAND_VALUE 32768 #define _APS_NEXT_CONTROL_VALUE 201 #define _APS_NEXT_SYMED_VALUE 103 #endif #endif </pre>	<pre> // FILE: SMTime.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Implementation of DLL Exports. // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMTime.cpp : Implementation of DLL Exports. // // Note: Proxy/Stub Information // To build a separate proxy/stub DLL, // run nmake -f SMTIMEPS.MK in the project directory. // #include "stdafx.h" #include "resource.h" #include <initguid.h> #include "SMTime.h" #include "SMTime_i.c" #include "SMTimer.h" CComModule _Module; BEGIN_OBJECT_MAP(ObjectMap) OBJECT_ENTRY(CLSID_SMTimer, CSMTimer) END_OBJECT_MAP() //////////////////////////////////// // DLL Entry Point extern "C" BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID /*lpReserved*/) { if (dwReason == DLL_PROCESS_ATTACH) { _Module.Init(ObjectMap, hInstance, &LIBID_SMTIMELib); DisableThreadLibraryCalls(hInstance); } else if (dwReason == DLL_PROCESS_DETACH) _Module.Term(); return TRUE; // ok } //////////////////////////////////// // Used to determine whether the DLL can be unloaded by OLE STDAPI DllCanUnloadNow(void) { return (_Module.GetLockCount()==0) ? S_OK : S_FALSE; } //////////////////////////////////// // Returns a class factory to create an object of the requested type STDAPI DllGetClassObject(REFCLSID rclsid, REFIID riid, LPVOID* ppv) { return _Module.GetClassObject(rclsid, riid, ppv); } </pre>
--	--

<pre> //////////////////////////////////// // DllRegisterServer - Adds entries to the system registry STDAPI DllRegisterServer(void) { // registers object, typelib and all interfaces in typelib return _Module.RegisterServer(TRUE); } //////////////////////////////////// // DllUnregisterServer - Removes entries from the system registry STDAPI DllUnregisterServer(void) { return _Module.UnregisterServer(TRUE); } /* this ALWAYS GENERATED file contains the definitions for the interfaces */ /* File created by MIDL compiler version 5.01.0164 */ /* at Thu Sep 19 17:49:55 2002 */ /* Compiler settings for C:\charles\Stepmaster\COMMON\SMTime\SMTime.idl: Oicf (OptLev=i2), W1, Zp8, env=Win32, ms_ext, c_ext error checks: allocation ref bounds_check enum stub_data */ //@@@MIDL_FILE_HEADING() /* verify that the <rpcndr.h> version is high enough to compile this file*/ #ifndef __REQUIRED_RPCNDR_H_VERSION__ #define __REQUIRED_RPCNDR_H_VERSION__ 440 #endif #include "rpc.h" #include "rpcndr.h" #ifndef __RPCNDR_H_VERSION__ #error this stub requires an updated version of <rpcndr.h> #endif // __RPCNDR_H_VERSION__ #ifndef COM_NO_WINDOWS_H #include "windows.h" #include "ole2.h" #endif /*COM_NO_WINDOWS_H*/ #ifndef __SMTime_h__ #define __SMTime_h__ #ifdef __cplusplus extern "C"{ #endif </pre>	<pre> /* Forward Declarations */ #ifndef __ISMTimer_FWD_DEFINED__ #define __ISMTimer_FWD_DEFINED__ typedef interface ISMTimer ISMTimer; #endif /* __ISMTimer_FWD_DEFINED__ */ #ifndef __SMTimer_FWD_DEFINED__ #define __SMTimer_FWD_DEFINED__ #ifdef __cplusplus typedef class SMTimer SMTimer; #else typedef struct SMTimer SMTimer; #endif /* __cplusplus */ #endif /* __SMTimer_FWD_DEFINED__ */ /* header files for imported files */ #include "oaidl.h" #include "ocidl.h" void __RPC_FAR * __RPC_USER MIDL_user_allocate(size_t); void __RPC_USER MIDL_user_free(void __RPC_FAR *); #ifndef __ISMTimer_INTERFACE_DEFINED__ #define __ISMTimer_INTERFACE_DEFINED__ /* interface ISMTimer */ /* [unique][helpstring][dual][uuid][object] */ EXTERN_C const IID IID_ISMTimer; #if defined(__cplusplus) && !defined(CINTERFACE) MIDL_INTERFACE("1A6D0AE4-8528-453B-B8E3-8DAD1F0561B7") ISMTimer : public IDispatch { public: virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Start(void) = 0; virtual /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE Stop(CURRENCY __RPC_FAR *pElapsedTime) = 0; virtual /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE get_Running(/* [retval][out] */ BOOL __RPC_FAR *pVal) = 0; }; #else /* C style interface */ typedef struct ISMTimerVtbl { BEGIN_INTERFACE HRESULT (STDMETHODCALLTYPE __RPC_FAR *QueryInterface)(ISMTimer __RPC_FAR * This, /* [in] */ REFIID riid, /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR </pre>
--	--

<pre> *ppvObject); ULONG (STDMETHODCALLTYPE __RPC_FAR *AddRef)(ISMTimer __RPC_FAR * This); ULONG (STDMETHODCALLTYPE __RPC_FAR *Release)(ISMTimer __RPC_FAR * This); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfoCount)(ISMTimer __RPC_FAR * This, /* [out] */ UINT __RPC_FAR *pctinfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetTypeInfo)(ISMTimer __RPC_FAR * This, /* [in] */ UINT iTInfo, /* [in] */ LCID lcid, /* [out] */ ITypeInfo __RPC_FAR * __RPC_FAR *ppTInfo); HRESULT (STDMETHODCALLTYPE __RPC_FAR *GetIDsOfNames)(ISMTimer __RPC_FAR * This, /* [in] */ REFIID riid, /* [size_is][in] */ LPOLESTR __RPC_FAR *rgszNames, /* [in] */ UINT cNames, /* [in] */ LCID lcid, /* [size_is][out] */ DISPID __RPC_FAR *rgDispId); /* [local] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Invoke)(ISMTimer __RPC_FAR * This, /* [in] */ DISPID dispIdMember, /* [in] */ REFIID riid, /* [in] */ LCID lcid, /* [in] */ WORD wFlags, /* [out][in] */ DISPPARAMS __RPC_FAR *pDispParams, /* [out] */ VARIANT __RPC_FAR *pVarResult, /* [out] */ EXCEPINFO __RPC_FAR *pExcepInfo, /* [out] */ UINT __RPC_FAR *puArgErr); END_INTERFACE } ISMTimerVtbl; interface ISMTimer { CONST_VTBL struct ISMTimerVtbl __RPC_FAR *lpVtbl; }; /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Start)(ISMTimer __RPC_FAR * This); /* [helpstring][id] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *Stop)(ISMTimer __RPC_FAR * This, CURRENCY __RPC_FAR *pElapsedTime); /* [helpstring][id][propget] */ HRESULT (STDMETHODCALLTYPE __RPC_FAR *get_Running)(ISMTimer __RPC_FAR * This, /* [retval][out] */ BOOL __RPC_FAR *pVal); #ifndef COBJMACROS #define ISMTimer_QueryInterface(This,riid,ppvObject) \ (This)->lpVtbl->QueryInterface(This,riid,ppvObject) #define ISMTimer_AddRef(This) \ (This)->lpVtbl->AddRef(This) </pre>	<pre> #define ISMTimer_Release(This) \ (This)->lpVtbl->Release(This) #define ISMTimer_GetTypeInfoCount(This,pctinfo) \ (This)->lpVtbl->GetTypeInfoCount(This,pctinfo) #define ISMTimer_GetTypeInfo(This,iTInfo,lcid,ppTInfo) \ (This)->lpVtbl->GetTypeInfo(This,iTInfo,lcid,ppTInfo) #define ISMTimer_GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rg DispId) \ (This)->lpVtbl-> GetIDsOfNames(This,riid,rgszNames,cNames,lcid,rgDispId) #define ISMTimer_Invoke(This,dispIdMember,riid,lcid,wFlags,pDispPar ams,pVarResult,pExcepInfo,puArgErr) \ (This)->lpVtbl-> Invoke(This,dispIdMember,riid,lcid,wFlags,pDispParams,pVarR esult,pExcepInfo,puArgErr) #define ISMTimer_Start(This) \ (This)->lpVtbl->Start(This) #define ISMTimer_Stop(This,pElapsedTime) \ (This)->lpVtbl->Stop(This,pElapsedTime) #define ISMTimer_get_Running(This,pVal) \ (This)->lpVtbl->get_Running(This,pVal) #endif /* COBJMACROS */ #endif /* C style interface */ /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMTimer_Start_Proxy(ISMTimer __RPC_FAR * This); void __RPC_STUB ISMTimer_Start_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); /* [helpstring][id] */ HRESULT STDMETHODCALLTYPE ISMTimer_Stop_Proxy(ISMTimer __RPC_FAR * This, CURRENCY __RPC_FAR *pElapsedTime); void __RPC_STUB ISMTimer_Stop_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *_pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); </pre>
--	---

<pre> /* [helpstring][id][propget] */ HRESULT STDMETHODCALLTYPE ISMTimer_get_Running_Proxy(ISMTimer __RPC_FAR * This, /* [retval][out] */ BOOL __RPC_FAR *pVal); void __RPC_STUB ISMTimer_get_Running_Stub(IRpcStubBuffer *This, IRpcChannelBuffer *pRpcChannelBuffer, PRPC_MESSAGE _pRpcMessage, DWORD *_pdwStubPhase); #endif /* __ISMTimer_INTERFACE_DEFINED__ */ #ifndef __SMTIMELib_LIBRARY_DEFINED__ #define __SMTIMELib_LIBRARY_DEFINED__ /* library SMTIMELib */ /* [helpstring][version][uuid] */ EXTERN_C const IID LIBID_SMTIMELib; #ifndef __StepMasterTimeFunctions_MODULE_DEFINED__ #define __StepMasterTimeFunctions_MODULE_DEFINED__ /* module StepMasterTimeFunctions */ /* [dllname][version][helpstring] */ /* [entry][helpstring] */ CURRENCY __stdcall Get64BitTime(/* [in] */ LPSYSTEMTIME lpInitTime); /* [entry][helpstring] */ void __stdcall JulianToTime(/* [in] */ CURRENCY julianTS, /* [out][in] */ int __RPC_FAR *yr, /* [out][in] */ int __RPC_FAR *mm, /* [out][in] */ int __RPC_FAR *dd, /* [out][in] */ int __RPC_FAR *hh, /* [out][in] */ int __RPC_FAR *mi, /* [out][in] */ int __RPC_FAR *ss, /* [out][in] */ int __RPC_FAR *ms); #endif /* __StepMasterTimeFunctions_MODULE_DEFINED__ */ EXTERN_C const CLSID CLSID_SMTimer; #ifdef __cplusplus class DECLSPEC_UUID("27BAB71B-89E1-4A78-8854- FDFBDC8037E") SMTimer; #endif #endif /* __SMTIMELib_LIBRARY_DEFINED__ */ /* Additional Prototypes for ALL interfaces */ /* end of Additional Prototypes */ #ifdef __cplusplus } #endif </pre>	<pre> // FILE: resource.h // // FILE: SMTimer.cpp // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // PURPOSE: Implementation of CSMTimer // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMTimer.cpp : Implementation of CSMTimer #include "stdafx.h" #include "SMTTime.h" #include "SMTimer.h" //////////////////// // CSMTimer //////////////////// // Construction/Destruction //////////////////// CSMTimer::~CSMTimer() { } STDMETHODIMP CSMTimer::Start() { // Starts the timer assert(!m_bInProcess); m_bInProcess = TRUE; m_lStartTime = MyTickCount(); return S_OK; } STDMETHODIMP CSMTimer::Stop(CURRENCY *pElapsedTime) { TC_TIME lEndTime = MyTickCount(); // Stops the timer and returns the elapsed time assert(m_bInProcess); m_bInProcess = FALSE; pElapsedTime->int64 = lEndTime - m_lStartTime; return S_OK; } </pre>
--	--

<pre> TC_TIME CSMTimer::MyTickCount(void) { TC_TIME currentTC; LARGE_INTEGER l; __int64 count; //The purpose of this function is to prevent the 49 day wrapping effect of the //system API GetTickCount(). This function essentially provides a monotonically //increasing timer value which is milliseconds from class instantiation. if (m_bCountUnavailable) { count = (__int64)GetTickCount(); currentTC = (TC_TIME)(count-m_baseTC); } else { QueryPerformanceCounter(&l); count = (__int64)l.HighPart << 32 (__int64)l.LowPart; currentTC = (TC_TIME)((count-m_baseTC) * 1000) / m_Timerfreq); } return currentTC; } STDMETHODIMP CSMTimer::get_Running(BOOL *pVal) { *pVal = m_bInProcess; return S_OK; } CURRENCY __stdcall Get64BitTime(LPSYSTEMTIME lpInitTime) { __int64 ms_day, ms_hour, ms_minute, ms_seconds, ms_milliseconds, ms_total; int day; SYSTEMTIME tim; CURRENCY tmReturn; if (lpInitTime) memcpy(&tim, lpInitTime, sizeof(SYSTEMTIME)); else GetLocalTime(&tim); day = JulianDay((int)tim.wYear, (int)tim.wMonth, (int)tim.wDay); ms_day = (__int64)day * (__int64)(24 * 1000 * 60 * 60); ms_hour = (__int64)tim.wHour * (__int64)(1000 * 3600); ms_minute = (__int64)tim.wMinute * (1000 * 60); ms_seconds = (__int64)(tim.wSecond * 1000); ms_milliseconds = (__int64)tim.wMilliseconds; ms_total = ms_day + ms_hour + ms_minute + ms_seconds + ms_milliseconds; tmReturn.int64 = ms_total; return tmReturn; } </pre>	<pre> // JulianDay computes the number of days since Jan 1, 1900. // This function is valid for dates from 1-Jan-1900 to 1-Jan-2100. // 1-Jan-1900 = 0 int JulianDay(int yr, int mm, int dd) { // MonthArray contains cumulative days for months in a non leap-year int MonthArray[12] = { 0, 31, 59, 90, 120, 151, 181, 212, 243, 273, 304, 334}; int j1, j2; // compute day of year (j1) j1 = MonthArray[mm-1] + dd - 1; // adjust day of year if this is a leap year and it is after February if ((yr % 4)==0 && (yr != 1900) && (mm > 2)) j1++; // compute number of days from 1/1/1900 to beginning of present year j2 = (yr-1900)*365 + (yr-1901)/4; return j1+j2; } // Breaks up the Julian Time into it's sub-components void __stdcall SMTIME_JulianToTime(CURRENCY CurJulian, int* yr, int* mm, int* dd, int *hh, int *mi, int *ss, int *ms) { int julianDay, msLeft; JULIAN_TIME julianTS = CurJulian.int64; *ms = julianTS % 1000; julianTS /= 1000; julianDay = (int)(julianTS / (60 * 60 * 24)); JulianToCalendar(julianDay, yr, mm, dd); msLeft = (int)(julianTS - (julianDay * (__int64)(60 * 60 * 24))); *hh = msLeft / (60 * 60); msLeft = msLeft - *hh * 3600; *mi = msLeft / (60); *ss = msLeft % 60; } // JulianToCalendar converts a day index (from the JulianDay function) to // its corresponding calendar value (mm/dd/yr). The valid range for days // is { 0 .. 73049 } for dates from 1-Jan-1900 to 1-Jan-2100. void JulianToCalendar(int day, int* yr, int* mm, int* dd) { int y, m, d; // month array contains days of months for months in a non leap-year int month[12] = { 31, 28, 31, 30, 31, 30, 31, 31, 30, 31, 30, 31 }; </pre>
---	--

<pre> // compute year from days if (day < 365) y = 1900; else y = 1901 + ((day-365)/1461)*4 + (4*((day-365)%1461)+3)/1461; // adjust February if this year is a leap year if ((y % 4)==0 && (y != 1900)) month[1] = 29; else month[1] = 28; d = day - JulianDay(y, 1, 1) + 1; m = 1; while (d > month[m-1]) { d = d - month[m-1]; m++; } *yr = y; *mm = m; *dd = d; } // FILE: SMTimer.h // Microsoft TPC-H Kit Ver. 1.00 // Copyright Microsoft, 1999 // All Rights Reserved // // // PURPOSE: Declaration of the CSMTimer // Contact: Reshma Tharamal (reshmat@microsoft.com) // // SMTimer.h : Declaration of the CSMTimer #ifndef __SMTIMER_H_ #define __SMTIMER_H_ #include "resource.h" // main symbols #include "assert.h" #define MAX_JULIAN_TIME 0x7FFFFFFFFFFFFFFF #define JULIAN_TIME __int64 #define TC_TIME DWORD #ifdef SMTIMER #define DLL_LINK __declspec(dllexport) #else #define DLL_LINK __declspec(dllimport) #endif #ifdef __cplusplus extern "C" { #endif //DLL_LINKCURRENCY __stdcall SMTTime_Get64BitTime(LPSYSTEMTIME lpInitTime); int JulianDay(int yr, int mm, int dd); void JulianToCalendar(int day, int* yr, int* mm, int* dd); #ifdef __cplusplus } #endif </pre>	<pre> /// // CSMTimer class ATL_NO_VTABLE CSMTimer : public CComObjectRootEx<CComSingleThreadModel>, public CComCoClass<CSMTimer, &CLSID_SMTimer>, public IDispatchImpl<ISMTimer, &IID_ISMTimer, &LIBID_SMTIMELib> { public: CSMTimer() { LARGE_INTEGER l; if (!QueryPerformanceFrequency(&l)) { m_baseTC = (__int64)GetTickCount(); m_bCountUnavailable = TRUE; } else { m_bCountUnavailable = FALSE; m_Timerfreq = (__int64)l.HighPart << 32 (__int64)l.LowPart; QueryPerformanceCounter(&l); m_baseTC = (__int64)l.HighPart << 32 (__int64)l.LowPart; } m_bInProcess = FALSE; } DECLARE_REGISTRY_RESOURCEID(IDR_SMTIMER) DECLARE_PROTECT_FINAL_CONSTRUCT() BEGIN_COM_MAP(CSMTimer) COM_INTERFACE_ENTRY(ISMTimer) COM_INTERFACE_ENTRY(IDispatch) // COM_INTERFACE_ENTRY2(IDispatch, ISMTimer) END_COM_MAP() // ISMTimer public: STDMETHOD(get_Running)(/*[out, retval]*/ BOOL *pVal); STDMETHOD(Stop)(CURRENCY *pElapsedTime); STDMETHOD(Start)(); virtual ~CSMTimer(); private: __int64 m_baseTC; __int64 m_Timerfreq; BOOL m_bCountUnavailable; TC_TIME m_lStartTime; BOOL m_bInProcess; TC_TIME MyTickCount(void); }; </pre>
---	---


```

#endif // __SMTIMER_H_
// stdafx.cpp : source file that includes just the standard includes
// stdafx.pch will be the pre-compiled header
// stdafx.obj will contain the pre-compiled type information

#include "stdafx.h"

#ifdef _ATL_STATIC_REGISTRY
#include <statreg.h>
#include <statreg.cpp>
#endif

#include <atlimpl.cpp>
// FILE:      stdafx.h
//      Microsoft TPC-H Kit Ver. 1.00
//      Copyright Microsoft, 1999
//      All Rights Reserved
//
//
// PURPOSE:  include file for standard system include files,
//           or project specific include files that are used frequently,
//           but are changed infrequently
// Contact:  Reshma Tharamal (reshmat@microsoft.com)
//

#if
!defined(AFX_STDAFX_H__4CDF88F4_EE9C_4F29_8212_61
557F251BDD__INCLUDED_)
#define
AFX_STDAFX_H__4CDF88F4_EE9C_4F29_8212_61557F251
BDD__INCLUDED_

#if _MSC_VER > 1000
#pragma once
#endif // _MSC_VER > 1000

#define STRICT
#ifdef _WIN32_WINNT
#define _WIN32_WINNT 0x0400
#endif
#define _ATL_APARTMENT_THREADED

#include <atlbase.h>
//You may derive a class from CComModule and use it if you
want to override
//something, but do not change the name of _Module
extern CComModule _Module;
#include <atlcom.h>

//{{AFX_INSERT_LOCATION}}
// Microsoft Visual C++ will insert additional declarations
immediately before the previous line.

#endif //
!defined(AFX_STDAFX_H__4CDF88F4_EE9C_4F29_8212_61
557F251BDD__INCLUDED_)

```

Semaphore.cpp

```

#define _WIN32_WINNT 0x0400
#include <windows.h>
#include <string.h>
#include <iostream.h>
#include <stdlib.h>
#include <stdio.h>
#include <assert.h>
void main(int argc, char **argv)
{
    typedef enum { eUnknown, eWait, eSignal, eRelease, eWaitList,
eWaitGroup } OPERATION;
    OPERATION eOP = eUnknown;
    int iCount;
    int i;
    HANDLE hSemaphore;
    HANDLE *pHandles;
    SYSTEMTIME Time;
    if (argc < 3)
        goto usage;
    if (_stricmp(argv[1], "-wait") == 0)
        eOP = eWait;
    else if (_stricmp(argv[1], "-signal") == 0)
        eOP = eSignal;
    else if (_stricmp(argv[1], "-release") == 0)
        eOP = eRelease;
    else if (_stricmp(argv[1], "-waitlist") == 0)
        eOP = eWaitList;
    else if (_stricmp(argv[1], "-waitgroup") == 0)
        eOP = eWaitGroup;
    else goto usage;
    if ((eOP == eWait) || (eOP == eRelease))
    {
        // argv[2] is the semaphore name
        // if -count option specified, then there must be exactly 5 args
        if ((argc == 5) && (_stricmp(argv[3], "-count") == 0))
        {
            iCount = atoi(argv[4]);
            if (iCount < 1)
                goto usage;
        }
        // check that
        else if (argc != 3)
            goto usage;
        else
            iCount = 1;
    }
    else if (eOP == eWaitGroup)
    {
        if ((argc != 5) || (_stricmp(argv[3], "-count") != 0))
            goto usage;
        iCount = atoi(argv[4]);
        if (iCount < 1)
            goto usage;
    }
    else
        // eWaitList or eSignal
        iCount = argc - 2;
    if (eOP == eWait)
    {
        printf( "semaphore name = %s\n", argv[2] );
        printf( "semaphore count = %d\n", iCount );
        hSemaphore = CreateSemaphore( NULL, 0, 2000000000, argv[2] );
        if (hSemaphore == NULL)
        {
            DWORD dwError = GetLastError();
            cout << "**ERROR* CreateSemaphore returned " << dwError << endl;
            exit(EXIT_FAILURE);
        }
    }
    for (i=0; i<iCount; i++)
    {
        WaitForSingleObject( hSemaphore, INFINITE );
        GetLocalTime( &Time );
        printf( "%4.4d-%2.2d-%2.2d %2.2d:%2.2d:%2.2d - released\n",
Time.wYear, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute,
Time.wSecond );
    }
    CloseHandle( hSemaphore );
}
else if ((eOP == eWaitGroup) || (eOP == eWaitList))
{
    char **szEventNames;
    szEventNames = new char*[iCount];
    char szTmp[128];
    printf( "event-list =" );
    for (i=0; i<iCount; i++)
    {
        if (eOP == eWaitGroup)
        {
            wsprintf( szTmp, "%s.%d", argv[2], i+1 );
            szEventNames[i] = new char[strlen(szTmp)+1];
            strcpy( szEventNames[i], szTmp );
        }
        else
        {
            szEventNames[i] = new char[strlen(argv[i+2])+1];
            strcpy( szEventNames[i], argv[i+2] );
        }
        printf( " %s", szEventNames[i] );
    }
    printf( "\n" );
    pHandles = new HANDLE[iCount-1];
    for (i=0; i<iCount; i++)
    {
        pHandles[i] = CreateEvent( NULL, TRUE /* manual reset */, FALSE /*
initially non-signaled */, szEventNames[i] );
        if (pHandles[i] == NULL)
        {
            DWORD dwError = GetLastError();
            cout << "**ERROR* CreateEvent returned " << dwError << endl;
            exit(EXIT_FAILURE);
        }
    }
    for (i=iCount; i>0; i--)
    {
        int idx = WaitForMultipleObjects( i, pHandles, FALSE /* wait for all */,
INFINITE ) - WAIT_OBJECT_0;
        GetLocalTime( &Time );
        printf( "%4.4d-%2.2d-%2.2d %2.2d:%2.2d:%2.2d - signaled: %s\n",
Time.wYear, Time.wMonth, Time.wDay, Time.wHour, Time.wMinute,
Time.wSecond, szEventNames[idx] );
        HANDLE hTmp = pHandles[idx];
        pHandles[idx] = pHandles[i-1];
        pHandles[i-1] = hTmp;
        char* szTmp = szEventNames[idx];
        szEventNames[idx] = szEventNames[i-1];
        szEventNames[i-1] = szTmp;
    }
    for (i=0; i<iCount; i++)
        CloseHandle( pHandles[i] );
}
else if (eOP == eRelease)
{
    hSemaphore = OpenSemaphore( SEMAPHORE_MODIFY_STATE,
FALSE, argv[2] );
    if (hSemaphore == NULL)
    {

```

Appendix G: Price Quotations

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>

Microsoft

April 23, 2007

Hewlett-Packard Company
Mike Fitzner
One Microsoft Way
Redmond, WA 98052

Mr. Fitzner:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-H benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-04794	SQL Server 2005 Enterprise Itanium Edition Server License with 25 CALs Discount Schedule: Open Program - No Level Unit Price reflects a 39% discount from the retail unit price of \$13,969.	\$8,487	1	\$8,487
359-01911	SQL Server 2005 Client License Discount Schedule: Open Program - No Level Unit Price reflects a 4% discount from the retail unit price of \$163.	\$156	45	\$7,020
254-00170	Visual C++ Standard Edition No Discounts Applied	\$109	1	\$109
046-00856	Visual Basic 2003 .Net Professional No Discounts Applied	\$109	1	\$109
N/A	Microsoft Problem Resolution Services Professional Support (1 Incident)	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of Microsoft's authorized resellers can be found at:
<http://www.microsoft.com/products/info/render.aspx?view=22&type=mn&content=22/licensing>.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PHMiFi0704238335.

Please include this Reference ID in any correspondence regarding this price quote.



HP Integrity Superdome

Report Date: May 10, 2007

Description	Price Key	Part Number	Unit Price	Qty.	Extended Price	3 Yr Maint Price
HP Superdome 32p/64c Chassis	1	A9834A, Opt. 429	\$235,950	1	\$235,950	
IPF Superdome Cell Board (sx2000)	1	A9837A	\$19,250	8	\$154,000	
HP 12 Slot PCI-X Chassis for sx2000	1	A9836A	\$16,950	4	\$67,800	
3 Year Svc & Support Price (Hardware and Software)	1			1		\$667,176
HP Superdome Itanium2 1.6 GHz/18MB CPU	1	AB406A	\$23,000	32	\$736,000	
Superdome 256GB Memory Pack	1	A9856A	\$611,950	1	\$611,950	
Graphite I/O expansion power subsystem	1	A5861D	\$34,860	1	\$34,860	
12 Slot PCI I/O Enclosure	1	A9852A	\$25,750	1	\$25,750	
12 Slot PCI-X Chassis for rack expansion cabinet	1	A9836AZ	\$16,950	4	\$67,800	
HP ProCurve Switch2124	1	J4868AZ	\$279	1	\$279	\$219
HP Superdome Rack System Mgmt. Station	1	A9802B	\$6,500	1	\$6,500	
1U RackMT Display/Keyboard/Mouse	1	AB243AZ	\$3,046	1	\$3,046	
1000Base-T Gigabit Eth Adp	1	A9900A	\$486	1	\$486	
FC-HBA 2GB, 1 Channel	1	AB467A	\$1,520	2	\$3,040	
HP Smart Array Controller 6402 (incl. boot)	1	A9890A	\$1,669	49	\$81,781	
HP Dual Channel U320 SCSI Adapter	1	A7173A	\$795	1	\$795	
36GB, 15krpm Ultra3 Wide disk	1	286776-B22	\$319	994	\$317,086	
Storageworks MSA30 SB (incl boot)	1	302969-B21	\$2,829	97	\$274,413	
Storage MSA30 Support 3yrs 24x7 4 hr incl disks	1	HA110A3 #7GT	\$1,827	97		\$177,219
SW 4000 39FT Cable All	1	150214-B21	\$114	97	\$11,058	
HP Universal Rack 10642 G2	1	AF002A	\$1,489	7	\$10,423	
HP 10642 G2 Sidepanel Kit	1	AF054A	\$359	7	\$2,513	
4 Bay Rack Support	1	HA1103A Opt 6EC	\$1,558	1		\$1,558
HP 16A High Voltage Modular PDU	1	252663-B24	\$299	21	\$6,279	
Modular Storage Array 1000	1	201723-B22	\$6,995	2	\$13,990	
MSA1000 controller	1	218231-B22	\$4,290	4	\$17,160	
MSA1000 Fibre Channel I/O Module	1	218960-B21	\$375	2	\$750	
Storage MAS1000 Support 3yrs 24x7 4hr incl disks	1	HA110A3 #6FG	\$3,222	2		\$6,444
5M LC to LC Cable Kit	1	221692-B22	\$82	2	\$164	
SCSI Cable 10m VHDS68 / HDTS68 Multimd	1	C2363B	\$335	1	\$335	
SCSI Terminator LVD/SE HDTS68 Multimd	1	C2364A	\$100	1	\$100	
HP C13/C14 Jumper Cord 2.5M	1	E7742A	\$25	1	\$25	
5300 Tape Array	1	C7508BZ	\$1,045	1	\$1,045	
DVD Rom drive	1	Q1592A	\$649	1	\$649	
Server Subtotal					\$2,686,027	\$852,616
Microsoft Windows Server 2003 DC Edition 64-bit Service Pack 1	1	T2372A opt032	\$64,000	1	\$64,000	
Server Software Subtotal					\$64,000	
Total Extended Price						\$3,602,643
Total Discounts						\$1,650,643
* All discounts are based on US list prices and for similar quantities and configurations. A 46.64 % discount was based on the overall specific components						
3 year cost of ownership:						\$1,952,000

and support pricing from vendor 1 in this single quotation. Discounts for similarly sized configurations will be similar to those quoted here, but may vary based on the components in the configuration.	
Sales contact: HP Sales Development, 19111 Pruneridge Ave., Cupertino, CA 95014 (408) 447 2320	