

**TPC Benchmark™ H Full Disclosure Report**  
**for**  
**IBM® @server xSeries 346**  
**using**  
**IBM DB2® Universal Database 8.2**

**Submitted for Review**

**February 14, 2005**



## **First Edition - February 2004**

THE INFORMATION CONTAINED IN THIS DOCUMENT IS DISTRIBUTED ON AN AS IS BASIS WITHOUT ANY WARRANTY EITHER EXPRESSED OR IMPLIED. The use of this information or the implementation of any of these techniques is the customer's responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item has been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environment do so at their own risk.

In this document, any references made to an IBM licensed program are not intended to state or imply that only IBM's licensed program may be used; any functionally equivalent program may be used.

This publication was produced in the United States. IBM may not offer the products, services, or features discussed in this document in other countries, and the information is subject to change without notice. Consult your local IBM representative for information on products and services available in your area.

© Copyright International Business Machines Corporation 2004. All rights reserved.

Permission is hereby granted to reproduce this document in whole or in part, provided the copyright notice as printed above is set forth in full text on the title page of each item reproduced.

U.S. Government Users - Documentation related to restricted rights: Use, duplication, or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract with IBM Corp.

### ***Trademarks***


IBM, the IBM @server logo, DB2, DB2 Universal Database, and xSeries are trademarks or registered trademarks of International Business Machines Corporation.


The following terms used in this publication are trademarks of other companies as follows: TPC Benchmark, TPC-H, QppH QthH and QphH are trademarks of Transaction Processing Performance Council; Intel and Xeon are trademarks or registered trademarks of Intel Corporation; Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both. Other company, product, or service names, which may be denoted by two asterisks (\*\*), may be trademarks or service marks of others.

### ***Notes***

<sup>1</sup> GHz only measures microprocessor internal clock speed, not application performance. Many factors affect application performance.


<sup>2</sup> When referring to hard disk capacity, one GB equals one billion bytes. Total user-accessible capacity may be less.

		<b>IBM® @server™ x346 with IBM DB2® UDB 8.2</b>		<b>TPC-H Revision 2.0</b>	
				Report Date: <b>Feb 14, 2005</b>	
Total System Cost		Composite Query-per-hour Metric		Price/Performance	
<b>\$1,753,144</b>		<b>53,451.4</b> QphH@1000GB		<b>\$ 33</b> per QphH@1000GB	
Database Size	Database Manager	Operating System		Availability Date	
<b>1000GB</b>	<b>IBM DB2 UDB 8.2</b>	<b>SuSE Linux Enterprise Server 9</b>		<b>February 14, 2005</b>	

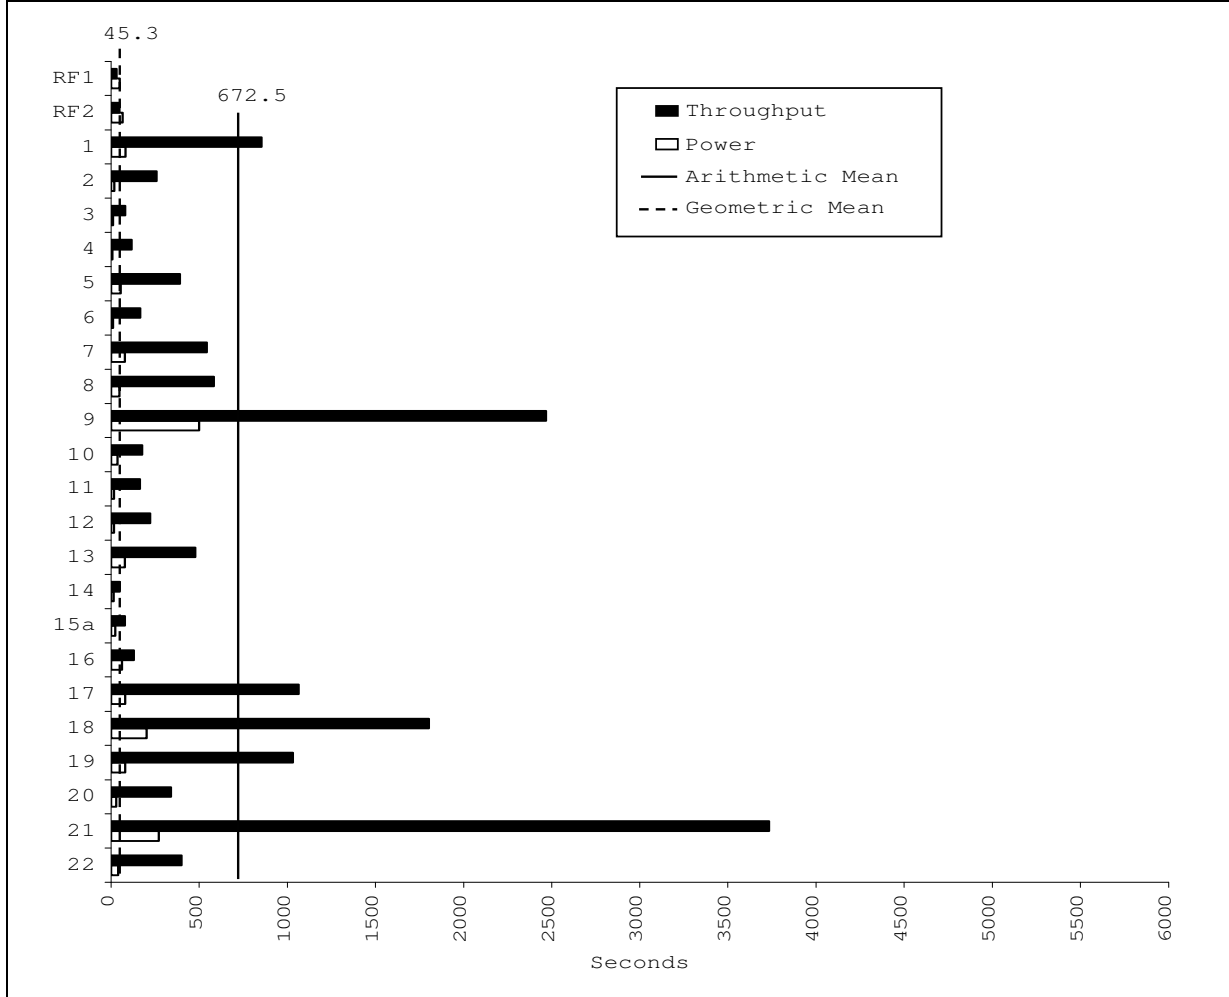

<b>Database Load Time: 0:49:01</b>	<b>Load Included Backup: N</b>	<b>Total Data Storage / Database Size: 26.25</b>
<b>RAID (Base Table): Y</b>	<b>RAID (Base Tables and Auxiliary Data Structures): Y</b>	<b>RAID (ALL): Y</b>

**System Configuration:**  
64 IBM @server x346 servers, each server with:  
Processor: 1 x 3.6GHz Intel Xeon with 2 MB cache  
Memory: Eight (8) 512MB PC-3200 ECC SDRAM RDIMMs  
Disk Controllers: One ServeRAID-7k Ultra320 SCSI controller  
Disk Drives: Six (6) 73.4GB 15K Ultra320 SCSI disk drives  
Total Disk Storage: 26,249 GB



**IBM® @server™ x346  
with IBM DB2® UDB 8.2**

**TPC-H Revision 2.0**

**Report Date:  
Feb 14, 2005**

Description	Part Number	Third Party Brand	Pricing	Unit Price	Quantity	Extended Price	3-Yr. Maint. Price
<b>Server Hardware</b>							
x346 3.6GHz/800MHz// 2 x 512MB DDR2, Open Bay	884041U	IBM xSeries	1	3,449	64	220,736	
1GB (2x512MB Kit) PC2-3200 CL3 ECC DDR2 SDRAM RDIMM (256Mb)	73P3522	IBM xSeries	1	399	192	76,608	
IBM ServeRAID 7k Controller	71P8642	IBM xSeries	1	449	64	28,736	
Epac 3 Year 24x7x4 Warranty Upgrade	21P2078	IBM xSeries	1	600	64		38,400
IBM 73.4 GB Hot-Swap U320 15 K SCSI SSL Drive	90P1319	IBM xSeries	1	499	384	191,616	
IBM S2 42U Standard Rack Cabinet	93074SX	IBM xSeries	1	1,489	4	5,956	
4.3m IEC Power Cable C13/ C14	94G7448	IBM xSeries	1	19	65	1,235	
IBM Preferred Pro Full-size Keyboard PS/2	31P7415	IBM xSeries	1	29	1	29	
IBM Sleek 2-Button Mouse	28L3673	IBM xSeries	1	15	1	15	
E54 15" Colour Monitor (Stealth Grey)	633147N	IBM xSeries	1	139	1	139	
Monitor Shelf	94G7444	IBM xSeries	1	169	1	169	
Keyboard Tray	28L4707	IBM xSeries	1	249	1	249	
connectors	1735L04	IBM xSeries	1	759	1	759	
Cable Kit, KVM Conversion (KCO) Long 1.5m	32P1652	IBM xSeries	1	559	16	8,944	
Universal Jumper Cord - 1.5m	24P7469	IBM xSeries	1	20	4	80	
3U Quick Install Panel Set	25R5560	IBM xSeries	1	75	7	525	
Epac 3 Year 24x7x4 Warranty Upgrade for Racks	41L2760	IBM xSeries	1	300	4		1,200
Epac 3 Year 24x7x4 Warranty Upgrade for LCM	41I2752	IBM xSeries	1	60	1		60
Epac 3 Year 24x7x4 Warranty Upgrade for Monitor	30P9183	IBM xSeries	1	90	1		90
e1350 Cisco 6503 Enclosure Bundle	26K7403	IBM xSeries	1	22,995	1	22,995	2,069
e1350 Cisco Cat6500 48-Port 10/100/1000 GE Mod: RJ-45(WS-X6548-GE-TX=)	02R2052	IBM xSeries	1	15,999	2	31,998	2,879
e1350 Cisco 6503 Air Duct Kit	26K7404	IBM xSeries	1	395	1	395	
Cisco Ethernet Cables	22P5031	IBM xSeries	1	20	64	1,279	
<b>Subtotal</b>						<b>592,463</b>	<b>44,698</b>
<b>Server Software</b>							
DB2 UDB Enterprise Server Edition ICE Edition MAINT 12 MO		IBM DB2	2	12,514	64	800,896	
DB2 UDB Database Partitioning Feature ICE Edition MAINT 12 MO		IBM DB2	2	3,759	64	240,576	
DB2 ICE SW maintenance renewal - 1 year		IBM DB2	2	596	128		76,288
DPF ICE SW maintenance renewal - 1 year		IBM DB2	2	179	128		22,912
SUSE Linux Enterprise Server 9 - incl. 3 yr upgrade	0662694556164	SUSE	3	870	64	55,680	
<b>Subtotal</b>						<b>1,097,152</b>	<b>99,200</b>
<b>Discount</b>						<b>80,369</b>	
<b>Total</b>						<b>1,609,246</b>	<b>143,898</b>
<b>Three-Year Cost of Ownership:</b>						<b>1,753,144</b>	

Pricing: 1 - IBM xSeries (pricing contact Alex Yost, ayost@us.ibm.com, 1-919-543-4505)  
 2 - IBM DB2 (pricing contact Jonathan Prial, jonprial@us.ibm.com, 1-914-766-1576)  
 Warranty and Maintenance: The standard warranty has been upgraded to 3 years of 24x7x4 coverage.

**QpH@1000GB: 53,451.4**  
  
**\$/QpH@1000GB: \$33**

Audited by Francois Raab, InfoSizing, Inc.

Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark specifications. If you find that stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.



IBM® @server™ x346  
with IBM DB2® UDB 8.2

TPC-H Revision 2.0

Report Date: Feb 14, 2005

Measurement Results:


Database Scale Factor	1000
Total Data Storage/Database Size	26.25
Start of Database Load	1:23:12
End of Database Load	2:12:13
Database Load Time	0:49:01
Query Streams for Throughput Test	7
TPC-H Power	79,465.6
TPC-H Throughput	35,953.3
TPC-H Composite Query-per-Hour (QphH@1000GB)	53,451.4
Total System Price over 3 Years	\$1,753,144
TPC-H Price/Performance Metric (\$/QphH@1000GB)	\$33

Measurement Interval:

Measurement Interval in Throughput Test (Ts) = 15420 seconds

Duration of Stream Execution:

	Seed	Query start date/time Query end date/time	RF1 start date/time RF1 end date/time	RF2 start date/time RF2 end date/time	Duration
Stream 00	209021213	02/09/05 02:55:21 02/09/05 03:24:40	02/09/05 02:54:14 02/09/05 02:55:21	02/09/05 03:24:58 02/09/05 03:25:49	0:31:35
Stream 01	209021214	02/09/05 03:25:52 02/09/05 07:31:39	02/09/05 03:26:06 02/09/05 07:35:10	02/09/05 07:35:10 02/09/05 07:36:12	4:05:47
Stream 02	209021215	02/09/05 03:25:53 02/09/05 07:27:41	02/09/05 07:36:12 02/09/05 07:36:31	02/09/05 07:36:31 02/09/05 07:37:16	4:01:48
Stream 03	209021216	02/09/05 03:25:55 02/09/05 07:29:28	02/09/05 07:37:16 02/09/05 07:37:37	02/09/05 07:37:37 02/09/05 07:38:22	4:03:33
Stream 04	209021217	02/09/05 03:25:54 02/09/05 07:33:48	02/09/05 07:38:22 02/09/05 07:38:45	02/09/05 07:38:45 02/09/05 07:39:29	4:07:54
Stream 05	209021218	02/09/05 03:25:54 02/09/05 07:28:32	02/09/05 07:39:29 02/09/05 07:39:52	02/09/05 07:39:52 02/09/05 07:40:35	4:02:38
Stream 06	209021219	02/09/05 03:25:54 02/09/05 07:33:52	02/09/05 07:40:35 02/09/05 07:41:00	02/09/05 07:41:00 02/09/05 07:41:44	4:07:58
Stream 07	209021220	02/09/05 03:25:54 02/09/05 07:32:22	02/09/05 07:41:44 02/09/05 07:42:08	02/09/05 07:42:08 02/09/05 07:42:52	4:06:28



IBM<sup>®</sup> @server™ x346  
with IBM DB2<sup>®</sup> UDB 8.2

TPC-H Revision 2.0

Report Date:

Feb 14, 2005

TPC-H Timing Intervals (in seconds):

Stream ID	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12
Stream 00	83.0	19.3	11.1	8.0	55.4	11.8	79.1	47.2	500.7	37.3	18.2	17.8
Stream 01	664.0	222.3	121.2	27.8	383.0	333.8	542.3	616.9	2419.8	129.8	200.2	184.1
Stream 02	846.4	182.6	83.4	132.3	427.2	155.7	543.3	451.3	2615.3	307.9	135.0	435.1
Stream 03	1172.1	212.9	43.4	101.8	466.6	108.3	829.3	489.8	2587.3	139.1	164.7	198.9
Stream 04	976.2	334.2	39.2	170.4	433.1	159.9	358.2	567.5	2214.2	184.3	197.7	259.9
Stream 05	727.0	267.1	84.2	147.1	296.3	180.7	547.5	738.9	2298.3	159.5	170.0	202.8
Stream 06	751.2	253.3	111.9	99.0	402.6	164.6	458.9	402.4	2820.7	209.6	147.8	226.2
Stream 07	828.9	341.8	82.7	141.9	331.3	53.7	530.8	809.9	2327.2	100.1	127.7	42.3
Minimum	664.0	182.6	39.2	27.8	296.3	53.7	358.2	402.4	2214.2	100.1	127.7	42.3
Average	852.3	259.2	80.9	117.2	391.4	165.2	544.3	582.4	2469.0	175.8	163.3	221.3
Maximum	1172.1	341.8	121.2	170.4	466.6	333.8	829.3	809.9	2820.7	307.9	200.2	435.1

Stream ID	Q13	Q14	Q15a	Q16	Q17	Q18	Q19	Q20	Q21	Q22	RF1	RF2
Stream 00	80.1	14.6	24.6	61.5	81.1	202.9	80.9	29.8	271.6	41.2	66.5	50.9
Stream 01	417.9	66.5	54.1	106.8	1049.7	2162.5	937.4	463.9	3220.9	422.3	77.1	61.7
Stream 02	485.7	37.1	96.0	103.3	882.8	1016.1	982.0	372.3	3642.4	574.7	19.3	45.0
Stream 03	547.0	42.3	98.3	116.1	1025.2	1163.6	1007.2	219.0	5303.4	312.8	20.8	45.0
Stream 04	517.8	46.1	53.2	136.6	1043.9	2400.6	970.2	72.4	3567.1	128.5	23.0	43.8
Stream 05	509.5	73.6	117.8	240.9	1164.3	1522.1	1032.5	357.6	3610.1	495.1	23.3	43.2
Stream 06	473.6	67.8	102.3	135.4	1305.7	2626.4	1083.6	272.6	3224.9	402.1	24.7	44.5
Stream 07	386.4	13.2	37.0	71.1	980.3	1731.8	1203.5	627.0	3560.3	458.8	24.0	44.0
Minimum	386.4	13.2	37.0	71.1	882.8	1016.1	937.4	72.4	3220.9	128.5	19.3	43.2
Average	476.8	49.5	79.8	130.0	1064.6	1803.3	1030.9	340.7	3732.7	399.2	30.3	46.7
Maximum	547.0	73.6	117.8	240.9	1305.7	2626.4	1203.5	627.0	5303.4	574.7	77.1	61.7

Benchmark Sponsor: Haider Rizvi  
 Mgr., DB2 Data Warehouse  
 Performance  
 IBM Canada Ltd;  
 8200 Warden Avenue  
 Markham, Ontario L6G 1C7

February 11, 2005

I verified the TPC Benchmark™ H performance of the following configuration:

Platform: **IBM @server xSeries 346**  
 Database Manager: **IBM DB2 UDB 8.2**  
 Operating System: **SuSE Linux Enterprise Server 9**

The results were:

CPU (Speed)	Memory	Disks	QphH@1,000GB
Sixty-four (64) <b>IBM @server xSeries 346</b> (each with)			
1 x Intel Xeon (3.6 GHz)	2 MB L2 Cache 4 GB Main	6 x 73.4 GB uSCSI	<b>53,451.4</b>

In my opinion, this performance result was produced in compliance with the TPC's requirements for the benchmark. The following verification items were given special attention:

- The database records were defined with the proper layout and size
- The database population was generated using DBGEN
- The database was properly scaled to 1TB (1,000 GB) and populated accordingly
- The compliance of the database auxiliary data structures was verified
- The database load time was correctly measured and reported

- The required ACID properties were verified and met
- The query input variables were generated by QGEN
- The query text was produced using minor modifications and an approved query variant
- The execution of the queries against the SF1 database produced compliant answers
- A compliant implementation specific layer was used to drive the tests
- The throughput tests involved 7 query streams
- The ratio between the longest and the shortest query was such that no query timing was adjusted
- The execution times for queries and refresh functions were correctly measured and reported
- The repeatability of the measured results was verified
- The required amount of database log was configured
- The system pricing was verified for major components and maintenance
- The major pages from the FDR were verified for accuracy

Additional Audit Notes:

None.

Respectfully Yours,

A handwritten signature in black ink, appearing to read "François Raab", with a long horizontal flourish extending to the right.

François Raab  
President



## ***Table of Contents***

<b>Preface</b>	12
<b>1 General Items</b>	14
1.1 Benchmark Sponsor	14
1.2 Parameter Settings	14
1.3 Configuration Diagrams	14
1.3.1 Measured and Priced Configurations	15
<b>2 Clause 1: Logical Database Design Related Items</b>	16
2.1 Database Table Definitions	16
2.2 Database Organization	16
2.3 Horizontal Partitioning	16
2.4 Replication	16
<b>3 Clause 2: Queries and Update Functions Related Items</b>	17
3.1 Query Language	17
3.2 Random Number Generation	17
3.3 Substitution Parameters Generation	17
3.4 Query Text and Output Data from Database	17
3.5 Query Substitution Parameters and Seeds Used	17
3.6 Query Isolation Level	17
3.7 Refresh Function Implementation	18
<b>4 Clause 3: Database System Properties Related Items</b>	19
4.1 Atomicity Requirements	19
4.1.1 Atomicity of Completed Transactions	19
4.1.2 Atomicity of Aborted Transactions	19
4.2 Consistency Requirements	19
4.2.1 Consistency Condition	19
4.2.2 Consistency Tests	20
4.3 Isolation Requirements	20
4.3.1 Isolation Test 1	20
4.3.2 Isolation Test 2	20
4.3.3 Isolation Test 3	20
4.3.4 Isolation Test 4	21
4.3.5 Isolation Test 5	21

4.3.6 Isolation Test 6	22
4.4 Durability Requirements	22
4.4.1 Failure of Durable Medium Containing Recovery Log Data, and Loss of System Power/Memory	22
4.4.2 Loss of Switch Power	23
<b>5 Clause 4: Scaling and Database Population Related Items</b>	24
5.1 Cardinality of Tables	24
5.2 Distribution of Tables and Logs	24
5.3 Database Partition / Replication Mapping	25
5.4 RAID Implementation	25
5.5 DBGEN Modifications	25
5.6 Database Load Time	25
5.7 Data Storage Ratio	25
5.8 Database Load Mechanism Details and Illustration	25
5.9 Qualification Database Configuration	26
<b>6 Clause 5: Performance Metrics and Execution Rules Related Items</b>	27
6.1 System Activity between Load and Performance Tests	27
6.2 Steps in the Power Test	27
6.3 Timing Intervals for Each Query and Refresh Function	27
6.4 Number of Streams for the Throughput Test	27
6.5 Start and End Date/Times for Each Query Stream	27
6.6 Total Elapsed Time for the Measurement Interval	27
6.7 Refresh Function Start Date/Time and Finish Date/Time	27
6.8 Timing Intervals for Each Query and Each Refresh Function for Each Stream	28
6.9 Performance Metrics	28
6.10 Performance Metric and Numerical Quantities from Both Runs	28
6.11 System Activity between Tests	28
<b>7 Clause 6: SUT and Driver Implementation Related Items</b>	29
7.1 Driver	29
7.2 Implementation-Specific Layer	29
7.3 Profile-Directed Optimization	29
<b>8 Clause 7: Pricing Related Items</b>	30
8.1 Hardware and Software Components	30
8.2 Three-Year Cost of System Configuration	30
8.3 Availability Dates	30

8.4 Country-Specific Pricing	30
<b>9 Clause 8: Audit Related Items</b>	31
9.1 Auditor's Report	31
<b>Appendix A: Tunable Parameters and System Configuration</b>	32
DB2 UDB 8.2 Database and Database Manager Configuration	32
DB2 Database Manager Configuration	35
DB2 Registry Variables	36
Linux Parameters	36
<b>Appendix B: Database Build Scripts</b>	36
buildtpcd	36
create_bufferpools	53
create_indexes	54
create_nodegroups	54
create_tables	55
create_tablespaces	57
createuftbls	58
db2nodes.cfg	59
Load_db2set.ksh	60
run_db2set.ksh	60
runstats.ddl	60
load_tables.ksh	61
load_tb_customer.ddl	62
load_tb_lineitem.ddl	62
load_tb_orders.ddl	62
load_tb_part.ddl	62
load_tb_partsupp.ddl	62
load_tb_supplier.ddl	62
Load_dbcfg.ddl	62
load_dbmcfg.ddl	63
run_dbcfg.ddl	63
run_dbmcfg.ddl	63
setlogpath.ksh	63
tpcd.setup	63
<b>Appendix C: Qualification Query Output</b>	70

Qualification Queries	70
<i>Query 1</i>	70
<i>Query 2</i>	71
<i>Query 3</i>	72
<i>Query 4</i>	73
<i>Query 5</i>	74
<i>Query 6</i>	74
<i>Query 7</i>	75
<i>Query 8</i>	75
<i>Query 9</i>	76
<i>Query 10</i>	77
<i>Query 11</i>	79
<i>Query 12</i>	79
<i>Query 13</i>	80
<i>Query 14</i>	81
<i>Query 15a</i>	81
<i>Query 16</i>	82
<i>Query 17</i>	83
<i>Query 18</i>	83
<i>Query 19</i>	86
<i>Query 20</i>	86
<i>Query 21</i>	87
<i>Query 22</i>	90
First 10 Rows of the Database	90
Query Substitution Parameters	97
<b>Appendix D: Driver Source Code</b>	101
ploaduf1	101
ploaduf2	101
load_line_uf	101
load_orders_uf	101
runpower	101
runthroughput	106
tpcdbatch.h	110
tpcdbatch.sqc	112

tpcdUF.sqc	157
<b>Appendix E: ACID Transaction Source Code</b>	166
acid.h	166
acid.sqc	166
makefile	184
<b>Appendix F: Price Quotations</b>	185

## Preface

TPC Benchmark H Standard Specification was developed by the Transaction Processing Performance Council (TPC). It was released on February 26, 1999, and most recently revised (Revision 2.0) October 29, 2002. This is the full disclosure report for benchmark testing of IBM @server x346 according to the TPC Benchmark H Standard Specification.

The TPC Benchmark H is a decision support benchmark. It consists of a suite of business-oriented ad hoc queries and concurrent data modifications. The queries and the data populating the database have been chosen to have broad industry-wide relevance while maintaining a sufficient degree of ease of implementation. This benchmark illustrates decision support systems that:

- Examine large volumes of data;
- Execute queries with a high degree of complexity;
- Give answers to critical business questions.

TPC-H evaluates the performance of various decision support systems by the execution of set of queries against a standard database under controlled conditions. The TPC-H queries:

- Give answers to real-world business questions;
- Simulate generated ad-hoc queries (e.g., via a point-and-click GUI interface);
- Are far more complex than most OLTP transactions;
- Include a rich breadth of operators and selectivity constraints;
- Generate intensive activity on the part of the database server component of the system under test;
- Are executed against a database complying with specific population and scaling requirements;
- Are implemented with constraints derived from staying closely synchronized with an on-line production database.

The TPC-H operations are modeled as follows:

- The database is continuously available 24 hours a day, 7 days a week, for ad-hoc queries from multiple end users and data modifications against all tables, except possibly during infrequent (e.g., once a month) maintenance sessions.
- The TPC-H database tracks, possibly with some delay, the state of the OLTP database through ongoing refresh functions, which batch together a number of modifications impacting some part of the decision support database.
- Due to the worldwide nature of the business data stored in the TPC-H database, the queries and the refresh functions may be executed against the database at any time, especially in relation to each other. In addition, this mix of queries and refresh functions is subject to specific ACIDity requirements, since queries and refresh functions may execute concurrently.
- To achieve the optimal compromise between performance and operational requirements, the database administrator can set, once and for all, the locking levels and the concurrent scheduling rules for queries and refresh functions.

The minimum database required to run the benchmark holds business data from 10,000 suppliers. It contains almost 10 million rows representing a raw storage capacity of about 1 gigabyte. Compliant benchmark implementations may also use one of the larger permissible database populations (e.g., 100 gigabytes), as defined in Clause 4.1.3).

The performance metrics reported by TPC-H is called the TPC-H Composite Query-per-Hour Performance Metric (QphH@Size), and reflects multiple aspects of the capability of the system to process queries. These aspects include the selected database size against which the queries are executed, the query processing power when queries are submitted by a single stream, and the query throughput when queries are submitted by multiple concurrent users. The TPC-H Price/Performance metric is expressed as  $\$/\text{QphH@Size}$ . To be compliant with the TPC-H standard, all references to TPC-H results for a given configuration must include all required reporting components (see Clause 5.4.6). The TPC believes that comparisons of TPC-H results measured against different database sizes are misleading and discourages such comparisons.

The TPC-H database must be implemented using a commercially available database management system (DBMS), and the queries executed via an interface using dynamic SQL. The specification provides for variants of SQL, as implementers are not required to have implemented a specific SQL standard in full.

Benchmarks results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-H should not be used as a substitute for specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

# 1 General Items

## 1.1 Benchmark Sponsor

*A statement identifying the benchmark sponsor(s) and other participating companies must be provided.*

IBM Corporation sponsored this TPC-H benchmark.

## 1.2 Parameter Settings

*Settings must be provided for all customer-tunable parameters and options that have been changed from the defaults found in actual products, including but not limited to:*

- *Database tuning options*
- *Optimizer/Query execution options*
- *Query Processing tool/language configuration parameters*
- *Recovery/commit options*
- *Consistency/locking options*
- *Operating system and configuration parameters*
- *Configuration parameters and options for any other software component incorporated into the pricing structure*
- *Compiler optimization options.*

Appendix A, “Tunable Parameters,” contains a list of all DB2 parameters and operating system parameters. Session initialization parameters can be set during or immediately after establishing the connection to the database within the tpcdbatch program documented in Appendix D, “Driver Source Code.” This result uses the default session initialization parameters established during preprocessing/binding of the tpcdbatch program.

## 1.3 Configuration Diagrams


*Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences. This includes, but is not limited to:*

- *Number and type of processors*
- *Size of allocated memory and any specific mapping/partitioning of memory unique to the test and type of disk units (and controllers, if applicable)*
- *Number and type of disk units (and controllers, if applicable)*
- *Number of channels or bus connections to disk units, including their protocol type*
- *Number of LAN (e.g., Ethernet) connections, including routers, workstations, terminals, etc., that were physically used in the test or are incorporated into the pricing structure*
- *Type and run-time execution location of software components (e.g., DBMS, query processing tools/languages, middleware components, software drivers, etc.).*

The configuration diagram for the tested and priced system is provided on the following page.



### 1.3.1 Priced and Measured Configurations

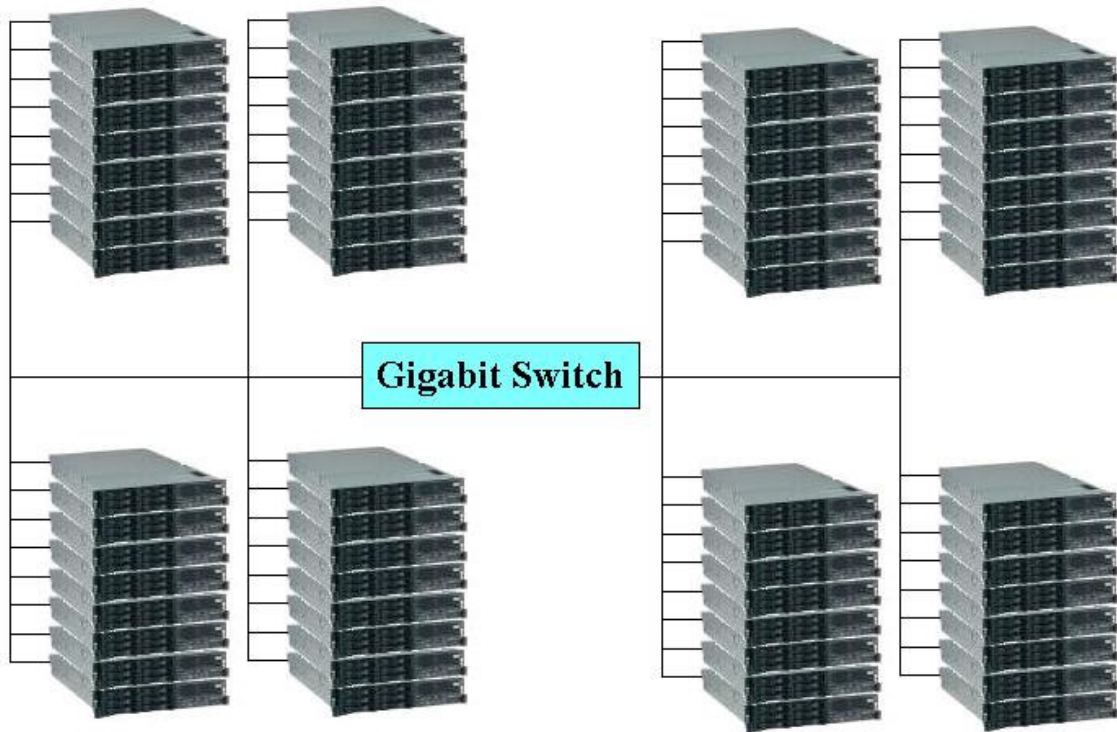

The priced configuration was an 64 x IBM @server xSeries 346 each with

- 1 Intel Xeon 3.6GHz processors, each with 2MB cache
- Eight (8) 512MB PC-3200 ECC SDRAM RDIMMs
- One embedded dual-port 10/100/1000 Ethernet interface
- One ServeRAID-7k Ultra320 SCSI controller
- Six (6) 73.4GB 15K Ultra320 SCSI disk drives

For full details of the priced configuration see the pricing spreadsheet in the Executive Summary.

## **2 Clause 1: Logical Database Design Related Items**

### ***2.1 Database Table Definitions***

*Listings must be provided for all table definition statements and all other statements used to set up the test and qualification databases. (8.1.2.1)*

Appendix B contains the scripts that were used to set up the TPC-H test and qualification databases.

### ***2.2 Database Organization***

*The physical organization of tables and indexes within the test and qualification databases must be disclosed. If the column ordering of any table is different from that specified in Clause 1.4, it must be noted.*

Appendix B contains the scripts that were used to create the indexes on the test and qualification databases.

### ***2.3 Horizontal Partitioning***

*Horizontal partitioning of tables and rows in the test and qualification databases must be disclosed (see Clause 1.5.4).*

Horizontal partitioning was used for all tables except for the nation and region tables. See Appendix B, "Database Build Scripts."

### ***2.4 Replication***

*Any replication of physical objects must be disclosed and must conform to the requirements of Clause 1.5.6).*

No replication was used.

## **3 Clause 2: Queries and Update Functions Related Items**

### ***3.1 Query Language***

*The query language used to implement the queries must be identified.*

SQL was the query language used.

### ***3.2 Random Number Generation***

*The method of verification for the random number generation must be described unless the supplied DBGEN and QGEN were used.*

The TPC-supplied DBGEN version 1.3.0 and QGEN version 1.3.0 were used to generate all database populations.

### ***3.3 Substitution Parameters Generation***

*The method used to generate values for substitution parameters must be disclosed. If QGEN is not used for this purpose, then the source code of any non-commercial tool used must be disclosed. If QGEN is used, the version number, release number, modification number and patch level of QGEN must be disclosed.*

The supplied QGEN version 1.3.0 was used to generate the substitution parameters.

### ***3.4 Query Text and Output Data from Database***

*The executable query text used for query validation must be disclosed along with the corresponding output data generated during the execution of the query text against the qualification database. If minor modifications (see Clause 2.2.3) have been applied to any functional query definitions or approved variants in order to obtain executable query text, these modifications must be disclosed and justified. The justification for a particular minor query modification can apply collectively to all queries for which it has been used. The output data for the power and throughput tests must be made available electronically upon request.*

Appendix C.1, “Qualification Queries,” contains the output for each of the queries. The functional query definitions and variants used in this disclosure use the following minor query modifications:

- Table names and view names are fully qualified. For example, the nation table is referred to as “TPCD.NATION.”
- The standard IBM SQL date syntax is used for date arithmetic. For example, DATE(‘1996-01-01’)+3 MONTHS.
- The semicolon (;) is used as a command delimiter.

### ***3.5 Query Substitution Parameters and Seeds Used***

*All query substitution parameters used for all performance tests must be disclosed in tabular format, along with the seeds used to generate these parameters.*

Appendix C contains the seed and query substitution parameters used.

### ***3.6 Query Isolation Level***

*The isolation level used to run the queries must be disclosed. If the isolation level does not map closely to one of the isolation levels defined in Clause 3.4, additional descriptive detail must be provided.*

The isolation level used to run the queries was “repeatable read.”

### **3.7 Refresh Function Implementation**

*The details of how the refresh functions were implemented must be disclosed (including source code of any non-commercial program used).*

The refresh functions are part of the implementation-specific layer/driver code included in Appendix D, "Driver Source Code."

## 4 Clause 3: Database System Properties Related Items

*The results of the ACID tests must be disclosed, along with a description of how the ACID requirements were met. This includes disclosing the code written to implement the ACID Transaction and Query.*

All ACID tests were conducted according to specifications. The Atomicity, Isolation, Consistency and Durability tests were performed on the IBM @server x346. Appendix E contains the ACID transaction source code.

### 4.1 Atomicity Requirements

*The system under test must guarantee that transactions are atomic; the system will either perform all individual operations on the data, or will assure that no partially completed operations leave any effects on the data.*

#### 4.1.1 Atomicity of Completed Transactions

*Perform the ACID transactions for a randomly selected set of input data and verify that the appropriate rows have been changed in the ORDER, LINEITEM and HISTORY tables.*

The following steps were performed to verify the Atomicity of completed transactions.

1. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a randomly selected order key. The number of records in the HISTORY table was also retrieved.
2. The ACID Transaction T1 was executed for the order key used in step 1.
3. The total price and extended price were retrieved for the same order key used in step 1 and step 2.

It was verified that:

$$T1.EXTENDEDPRICE=OLD.EXTENDEDPRICE+((T1.DELTA)*$$
$$(OLD.EXTENDEDPRICE/OLD.QUANTITY)),T1.TOTALPRICE=OLD.TOTALPRICE+$$
$$((T1.EXTENDEDPRICE-OLD.EXTENDEDPRICE)*(1-DISCOUNT)*(1+TAX)),$$

and that the number of records in the History table had increased by 1.

#### 4.1.2 Atomicity of Aborted Transactions

*Perform the ACID transactions for a randomly selected set of input data, and verify that the appropriate rows have been changed in the ORDER, LINEITEM and HISTORY tables.*

The following steps were performed to verify the Atomicity of the aborted ACID transaction:

1. The ACID application is passed a parameter to execute a rollback of the transaction instead of performing the commit.
2. The total price from the ORDER table and the extended price from the LINEITEM table were retrieved for a random order key. The number of records in the HISTORY table was also retrieved.
3. The ACID transaction was executed for the orderkey used in step 2. The transaction was rolled back.
4. The total price and the extended price were retrieved for the same orderkey used in step 2 and step 3. It was verified that the extended price and the total price were the same as in step 2.

### 4.2 Consistency Requirements

*Consistency is the property of the application that requires any execution of transactions to take the database from one consistent state to another.*

#### 4.2.1 Consistency Condition

*A consistent state for the TPC-H database is defined to exist when:*

$$O\_TOTALPRICE=SUM(L\_EXTENDEDPRICE*(1-L\_DISCOUNT)*(1+L\_TAX))$$

for each ORDER and LINEITEM defined by (O\_ORDERKEY=L\_ORDERKEY)

The following queries were executed before and after a measurement to show that the database was always in a consistent state both initially and after a measurement.

```
SELECT DECIMAL(SUM(DECIMAL(INTEGER(INTEGER(DECIMAL
(INTEGER(100*DECIMAL(L_EXTENDEDPRICE,20,2)),20,3))*
(1-L_DISCOUNT))*(1+L_TAX)),20,3)/100.0),20,3)
FROM TPCD.LINEITEM WHERE L_ORDEYKEY=okey
SELECT DECIMAL(SUM(O_TOTALPRICE,20,3)) from TPCD.ORDERS WHERE
O_ORDERKEY = okey
```

## **4.2.2 Consistency Tests**

*Verify that the ORDER and LINEITEM tables are initially consistent as defined in Clause 3.3.2.1, based on a random sample of at least 10 distinct values of O\_ORDERKEY.*

The queries defined in 4.2.1, “Consistency Condition,” were run after initial database build and prior to executing the ACID transaction. The queries showed that the database was in a consistent condition.

After executing 7 streams of 100 ACID transactions each, the queries defined in 4.2.1, “Consistency Condition,” were run again. The queries showed that the database was still in a consistent state.

## **4.3 Isolation Requirements**

### **4.3.1 Isolation Test 1**

*This test demonstrates isolation for the read-write conflict of a read-write transaction and a read-only transaction when the read-write transaction is committed.*

The following steps were performed to satisfy the test of isolation for a read-only and a read-write committed transaction:

1. First session: Start an ACID transaction with a randomly selected O\_KEY, L\_KEY and DELTA. The transaction is delayed for 60 seconds just prior to the Commit.
2. Second session: Start an ACID query for the same O\_KEY as in the ACID transaction.
3. Second session: The ACID query attempts to read the file but is locked out by the ACID transaction waiting to complete.
4. First session: The ACID transaction is released and the Commit is executed releasing the record. With the LINEITEM record now released, the ACID query can now complete.
5. Second session: Verify that the ACID query delays for approximately 60 seconds and that the results displayed for the ACID query match the input for the ACID transaction.

### **4.3.2 Isolation Test 2**

*This test demonstrates isolation for the read-write conflict of read-write transaction and read-only transaction when the read-write transaction is rolled back.*

The following steps were performed to satisfy the test of isolation for read-only and a rolled back read-write transaction:

1. First session: Perform the ACID transaction for a random O\_KEY, L\_KEY and DELTA. The transaction is delayed for 60 seconds just prior to the Rollback.
2. Second session: Start an ACID query for the same O\_KEY as in the ACID transaction. The ACID query attempts to read the LINEITEM table but is locked out by the ACID transaction.
3. First session: The ACID transaction is released and the Rollback is executed, releasing the read.
4. Second session: With the LINEITEM record now released, the ACID query completes.

### **4.3.3 Isolation Test 3**

*This test demonstrates isolation for the write-write conflict of two refresh transactions when the first transaction is committed.*

The following steps were performed to verify isolation of two refresh transactions:

1. First session: Start an ACID transaction T1 for a randomly selected O\_KEY, L\_KEY and DELTA. The transaction is delayed for 60 seconds just prior to the COMMIT.
2. Second session: Start a second ACID transaction T2 for the same O\_KEY, L\_KEY, and for a randomly selected DELTA2. This transaction is forced to wait while the 1st session holds a lock on the LINEITEM record requested by the second session.
3. First session: The ACID transaction T1 is released and the Commit is executed, releasing the record. With the LINEITEM record now released, the ACID transaction T2 can now complete.
4. Verify that:
 
$$T2.L\_EXTENDEDPRICE = T1.L\_EXTENDEDPRICE + DELTA * (T1.L\_EXTENDEDPRICE / T1.L\_QUANTITY)$$

#### **4.3.4 Isolation Test 4**

*This test demonstrates isolation for write-write conflict of two ACID transactions when the first transaction is rolled back.*

The following steps were performed to verify the isolation of two ACID transactions after the first one is rolled back:

1. First session: Start an ACID transaction T1 for a randomly selected O\_KEY, L\_KEY, and DELTA. The transaction is delayed for 60 seconds just prior to the rollback.
2. Second session: Start a second ACID transaction T2 for the same O\_KEY, L\_KEY used by the 1st session. This transaction is forced to wait while the 1st session holds a lock on the LINEITEM record requested by the second session.
3. First session: Rollback the ACID transaction T1. With the LINEITEM record now released, the ACID transaction T2 completes.
4. Verify that  $T2.L\_EXTENDEDPRICE = T1.L\_EXTENDEDPRICE$

#### **4.3.5 Isolation Test 5**

*This test demonstrates the ability of read and write transactions affecting different database tables to make progress concurrently.*

1. First session: Start an ACID transaction, T1, for a randomly selected O\_KEY, L\_KEY and DELTA. The ACID transaction was suspended prior to COMMIT.
2. First session: Start a second ACID transaction, T2, which selects random values of PS\_PARTKEY and PS\_SUPPKEY and returns all columns of the PARTSUPP table for which PS\_PARTKEY and PS\_SUPPKEY are equal to the selected values.
3. T2 completed.
4. T1 was allowed to complete.
5. It was verified that the appropriate rows in the ORDERS, LINEITEM and HISTORY tables have been changed.

### **4.3.6 Isolation Test 6**

*This test demonstrates that the continuous submission of arbitrary (read-only) queries against one or more tables of the database does not indefinitely delay refresh transactions affecting those tables from making progress.*

1. First session: A transaction T1, which executes modified TPC-H query 1 with DELTA=0, was started.
2. Second session: Before T1 completed, an ACID transaction T2, with randomly selected values of O\_KEY, L\_KEY and DELTA, was started.
3. Third session: Before T1 completed, a transaction T3, which executes modified TPC-H query 1 with a randomly selected value of DELTA (not equal to 0), was started.
4. T1 completed.
5. T2 completed.
6. T3 completed.
7. It was verified that the appropriate rows in the ORDERS, LINEITEM and HISTORY tables were changed.

## **4.4 Durability Requirements**

*The SUT must guarantee durability: the ability to preserve the effects of committed transactions and ensure database consistency after recovery from any one of the failures listed in Clause 3.5.3.*

### **4.4.1 Failure of Durable Medium Containing Recovery Log Data, and Loss of System Power/Memory**

*Guarantee the database and committed updates are preserved across a permanent irrecoverable failure of any single durable medium containing TPC-H database tables or recovery log tables.*

The database log was stored on RAID-5 protected storage. The tables for the database were stored on RAID-5 protected storage. The tests were conducted on the qualification database. The steps performed are shown below.

1. The consistency test described in section 4.2.1 was verified.
2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run 200 ACID transactions on each of 8 execution streams was started such that each stream executes a different set of transactions.
4. One of the disks containing the DB2 transaction log recovery data and DB2 database tables was powered off after at least 30 ACID transactions had completed from each of the execution streams.
5. Because the disks were in RAID 5 configuration the applications continued running the ACID transactions.
6. The system was shutdown by switching off circuit breakers on the power rail connected to all system component cabinets, after at least a total of 100 transactions had completed for each stream.
7. The system was powered back on and rebooted.
8. All volumes were re-established and RAID5 volumes were synchronized.
9. Step 2 was performed giving hist2. It was verified that hist2 - hist1 was greater than or equal to the number of records in the success file.
10. Consistency condition described in 4.2.1 was verified.

### **4.4.2. Loss of Switch Power**

This test was conducted on the qualification database. The following steps were performed:

1. The consistency test described in section 4.2.1 was verified.



2. The current count of the total number of records in the HISTORY table was determined giving hist1.
3. A test to run 200 ACID transactions on each of 8 execution streams was started such that each stream executes a different set of transactions.
4. The Gigabit switch was disconnected from the system.
5. Database detected the network loss and terminated processing.
6. Network connections were reestablished and the database was restarted.
7. Step 2 was performed giving hist2. It was verified that hist2 - hist1 was greater than or equal to the number of records in the success file.
8. Consistency condition described in 4.2.1 was verified.

## 5 Clause 4: Scaling and Database Population Related Items

### 5.1 Cardinality of Tables

The cardinality (e.g., the number of rows) of each table of the test database, as it existed at the completion of the database load (see Clause 4.2.5), must be disclosed.

Table Name	Rows
Order	1,500,000,000
Lineitem	5,999,989,709
Customer	150,000,000
Part	200,000,000
Supplier	10,000,000
Partsupp	800,000,000
Nation	25
Region	5

### 5.2 Distribution of Tables and Logs

The distribution of tables and logs across all media must be explicitly described.

Controller	Drives	Logical Partition	Size	Use
Internal	3 disk-73.4GB	/dev/sda1	50GB	OS root filesystem
Serve-RAID 7k	RAID5	/dev/sda2	8GB	swap
		/dev/sda5	10GB	Temp Tables
		/dev/sda6	15GB	DB Data
		/dev/sda7	10GB	Temp Tables
		/dev/sda8	5GB	Logs
	3 disk-73.4GB	/dev/sdb1	58GB	Filesystem
	RAID5	/dev/sdb5	10GB	Temp Tables
		/dev/sdb6	15GB	DB Data
		/dev/sdb7	10GB	Temp Tables
		/dev/sdb8	5GB	Logs

### 5.3 Database Partition / Replication Mapping

*The mapping of database partitions/replications must be explicitly described.*

The database was not replicated. The database was logically partitioned into 128 logical nodes, 2 nodes on each physical server.

### 5.4 RAID Implementation

*Implementations may use some form of RAID to ensure high availability. If used for data, auxiliary storage (e.g., indexes) or temporary space, the level of RAID must be disclosed for each device.*

RAID level 5 was used across all database tables, indexes, and recovery logs.

### 5.5 DBGEN Modifications

*Any modifications to the DBGEN (see Clause 4.2.1) source code must be disclosed. In the event that a program other than DBGEN was used to populate the database, it must be disclosed in its entirety.*

The standard distribution DBGEN version 1.3.0 was used for database population. No modifications were made.

### 5.6 Database Load Time

*The database load time for the test database (see Clause 4.3) must be disclosed.*

See the Executive Summary at the beginning of this report.

### 5.7 Data Storage Ratio

*The data storage ratio must be disclosed. It is computed as the ratio between the total amount of priced disk space and the chosen test database size as defined in Clause 4.1.3.*

The calculation of the data storage ratio is shown in the following table.

Disk Type	Number of Disks	Formatted Space per Disk	Total Disk Space	Scale Factor	Storage Ratio
73.4GB 15K Ultra160 SCSI Drive	384	68.359 GB	26,249.856 GB		
Total			26,249.856 GB	1000	26.25

The data storage ratio is 26.25, derived by dividing 26,249.856GB by the database size of 1000GB.


### 5.8 Database Load Mechanism Details and Illustration

*The details of the database load must be disclosed, including a block diagram illustrating the overall process. Disclosure of the load procedure includes all steps, scripts, input and configuration files required to completely reproduce the test and qualification databases.*

Flat files for each of the tables were created using DBGEN.

The NATION and REGION tables were created on node 0 and then loaded from dbgen output. The other tables were loaded on 128 logical nodes.

The tables were loaded as depicted in Figure 4-1.

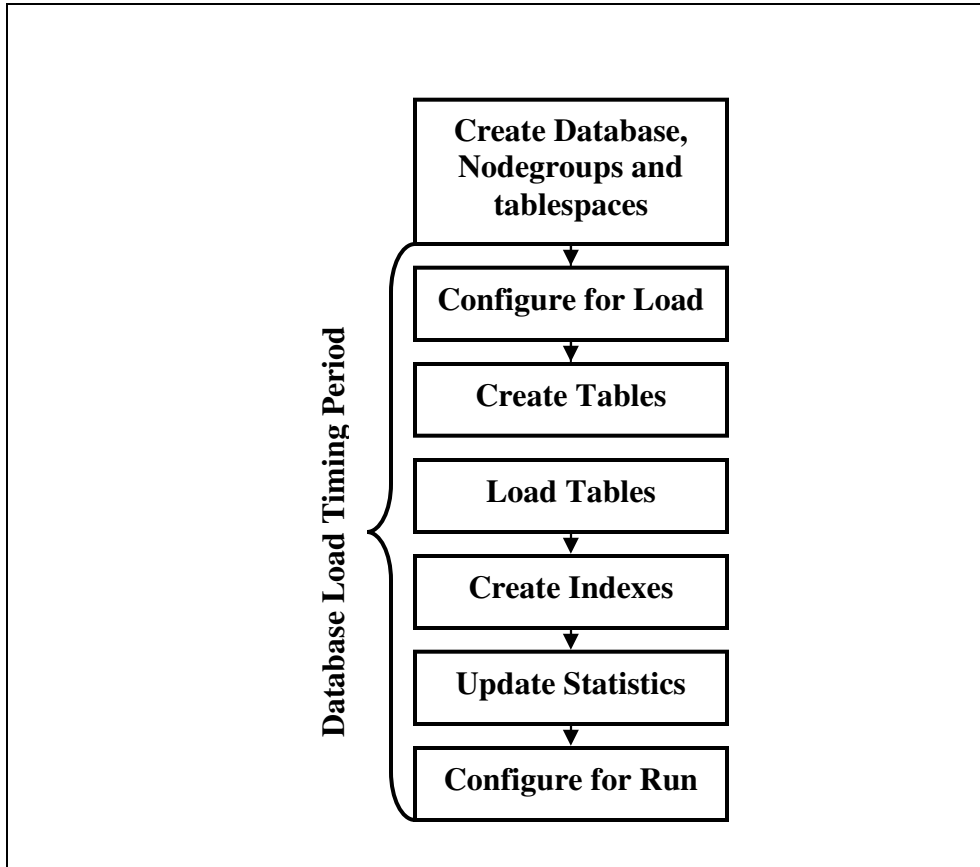

**Figure 4-1. Database Load Procedure**

### ***5.9 Qualification Database Configuration***

*Any differences between the configuration of the qualification database and the test database must be disclosed.*

The qualification database used identical scripts to create and load the data with changes to adjust for the database scale factor.

## **6 Clause 5: Performance Metrics and Execution Rules Related Items**

### ***6.1 System Activity between Load and Performance Tests***

*Any system activity on the SUT that takes place between the conclusion of the load test and the beginning of the performance test must be fully disclosed.*

The auditor requested that queries be run against the database to verify the correctness of the database load.

### ***6.2 Steps in the Power Test***

*The details of the steps followed to implement the power test (e.g., system reboot, database restart) must be disclosed.*

The following steps were used to implement the power test:

1. RF1 Refresh Transaction
2. Stream 00 Execution
3. RF2 Refresh Transaction

### ***6.3 Timing Intervals for Each Query and Refresh Function***

*The timing intervals for each query of the measured set and for both update functions must be reported for the power test.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report.

### ***6.4 Number of Streams for the Throughput Test***

*The number of execution streams used for the throughput test must be disclosed.*

Seven streams were used for the throughput test.

### ***6.5 Start and End Date/Times for Each Query Stream***

*The start time and finish time for each query execution stream must be reported for the throughput test.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report.

### ***6.6 Total Elapsed Time for the Measurement Interval***

*The total elapsed time for the measurement interval must be reported for the throughput test.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report..

### ***6.7 Refresh Function Start Date/Time and Finish Date/Time***

*The start time and finish time for each update function in the update stream must be reported for the throughput test.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report.

### **6.8 Timing Intervals for Each Query and Each Refresh Function for Each Stream**

*The timing intervals for each query of each stream and for each update function must be reported for the throughput test.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report.

### **6.9 Performance Metrics**

*The computed performance metrics, related numerical quantities, and the price/performance metric must be reported.*

See the Numerical Quantities Summary in the Executive Summary at the beginning of this report.

### **6.10 Performance Metric and Numerical Quantities from Both Runs**

*The performance metric and numerical quantities from both runs must be disclosed.*

Two consecutive runs of the TPC-H benchmark were performed. The following table contains the results for both runs.

	<b>QppH @ 1000GB</b>	<b>QthH @ 1000GB</b>	<b>QphH @ 1000GB</b>
<b>Run1</b>	79464.8	35950.9	53451.4
<b>Run2</b>	81080.2	36608.6	54481.6

### **6.11 System Activity between Tests**

*Any activity on the SUT that takes place between the conclusion of Run1 and the beginning of Run2 must be disclosed.*

The system was rebooted and DB2 was restarted between runs.

## 7 Clause 6: SUT and Driver Implementation Related Items

### 7.1 Driver

*A detailed textual description of how the driver performs its functions, how its various components interact and any product functionality or environmental setting on which it relies must be provided. All related source code, scripts and configurations must be disclosed. The information provided should be sufficient for an independent reconstruction of the driver.*

Appendix D, “Driver Source Code,” contains the source code used for the driver and all scripts used in connection with it.

The Power test is invoked by calling tpcdbatch with the stream number 0 specified, an indication that the refresh functions must be run, and the SQL file that contains the power stream queries.

The Throughput test is invoked by initiating a call to tpcdbatch for every query stream that will be run. Tpcdbatch gets the stream number for each of the streams, and the SQL file specific to that stream number as the queries to execute. The refresh function is initiated as a separate call to tpcdbatch with the SQL script for the refresh functions and the total number of query streams specified.

### 7.2 Implementation-Specific Layer

*If an implementation-specific layer is used, then a detailed description of how it performs its functions must be supplied, including any related source code or scripts. This description should allow an independent reconstruction of the implementation-specific layer.*

The implementation specific layer is a single executable SQL application that uses embedded dynamic SQL to process the EQT generated by QGEN. The application is called tpcdbatch to indicate that it processes a batch of TPC-H queries, although it is completely capable of processing any arbitrary SQL statement (both DML and DDL).

A separate instance of tpcdbatch is invoked for each stream. Each instance establishes a distinct connection to the database server through which the EQT is transmitted to the database and the results are returned through the implementation specific layer to the driver. When an instance of tpcdbatch is invoked, it is provided with a context of whether it is running a power test, query stream or refresh stream, as well as an input file containing the 22 queries and/or refresh functions. tpcdbatch then connects to the database, performs any session initialization as well as preparing output files required by the auditor. Then it proceeds to read from the input file and processes each query or refresh function in turn.

For queries, each query is prepared, described, and a cursor is opened and used to fetch the required number of rows. After the last row has been retrieved a commit is issued. For the refresh functions, during the database build all data is first split for each node using the db2split utility. For RF1, the data for each node is further split into n equal portions for both the lineitem and orders tables taking care that the records for the same orderkey remain in the same set. For RF2, the data for each node is further split into m equal portions. During the run, when tpcdbatch encounters a call to execute RF1, it first calls a shell script which loads these n sets of data into n sets of temporary tables (one each for lineitem and orders). Then tpcdbatch forks off n children to do an insert with subselect into the original lineitem and orders tables. When tpcdbatch encounters a call to execute RF2, it calls a shell script that loads these data into a single staging table. Then tpcdbatch forks off p children (where  $p * x = m$ ) to do x sets of deletes from the orders and lineitem tables with a subselect from the staging table.

### 7.3 Profile-Directed Optimization

Profile-directed optimization was not used.

## **8 Clause 7: Pricing Related Items**

### ***8.1 Hardware and Software Components***

*A detailed list of the hardware and software used in the priced system must be reported. Each item must have a vendor part number, description and release/revision level, and either general availability status or committed delivery date. If package-pricing is used, contents of the package must be disclosed. Pricing source(s) and effective date(s) must also be reported.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. The price quotations are included in Appendix F.

### ***8.2 Three-Year Cost of System Configuration***

*The total 3-year price of the entire configuration must be reported, including hardware, software and maintenance charges. Separate component pricing is recommended. The basis of all discounts must be disclosed.*

A detailed list of all hardware and software, including the 3-year price, is provided in the Executive Summary at the front of this report. The price quotations are included in Appendix F.

### ***8.3 Availability Dates***

*The committed delivery date for general availability (availability date) of products used in the price calculations must be reported. When the priced system includes products with different availability dates, availability date reported on the Executive Summary must be the date by which all components are committed to being available. The Full Disclosure Report must report availability dates individually for at least each of the categories for which a pricing subtotal must be provided (see Clause 7.3.1.3).*

The system as priced will be generally available February 14, 2005.

### ***8.4 Country-Specific Pricing***

*Additional Clause 7 related items may be included in the Full Disclosure Report for each country-specific priced configuration. Country-specific pricing is subject to Clause 7.1.7.*

The configuration is priced for the United States of America.



## **9 Clause 8: Audit Related Items**

### ***9.1 Auditor's Report***

*The auditor's agency name, address, phone number, and Attestation letter with a brief audit summary report indicating compliance must be included in the Full Disclosure Report. A statement should be included specifying who to contact in order to obtain further information regarding the audit process.*

This implementation of the TPC Benchmark H was audited by Francois Raab of InfoSizing, Inc. Further information can be downloaded from [www.tpc.org](http://www.tpc.org).

## Appendix A: Tunable Parameters and System Configuration

### DB2 UDB 8.2 Database and Database Manager Configuration

```
get database configuration for TPCD

      Database Configuration for Database
TPCD

      Database configuration release level
= 0x0a00
      Database release level
= 0x0a00

      Database territory
= US
      Database code page
= 819
      Database code set
= ISO8859-1
      Database country/region code
= 1
      Database collating sequence
= BINARY
      Alternate collating sequence
(ALT_COLLATE) =

      Dynamic SQL Query management
(DYN_QUERY_MGMT) = DISABLE

      Discovery support for this database
(DISCOVER_DB) = ENABLE

      Default query optimization class
(DFT_QUERYOPT) = 7
      Degree of parallelism
(DFT_DEGREE) = 1
      Continue upon arithmetic exceptions
(DFT_SQLMATHWARN) = NO
      Default refresh age
(DFT_REFRESH_AGE) = 0
      Default maintained table types for opt
(DFT_MTTB_TYPES) = SYSTEM
      Number of frequent values retained
(NUM_FREQVALUES) = 0
      Number of quantiles retained
(NUM_QUANTILES) = 300

      Backup pending
= NO

      Database is consistent
= NO
      Rollforward pending
= NO
      Restore pending
= NO

      Multi-page file allocation enabled
= YES

      Log retain for recovery status
= NO
      User exit for logging status
= NO
```

```
Data Links Token Expiry Interval (sec)
(DL_EXPINT) = 60
Data Links Write Token Init Expiry
Intvl(DL_WT_IEXPINT) = 60
Data Links Number of Copies
(DL_NUM_COPIES) = 1
Data Links Time after Drop (days)
(DL_TIME_DROP) = 1
Data Links Token in Uppercase
(DL_UPPER) = NO
Data Links Token Algorithm
(DL_TOKEN) = MAC0

      Database heap (4KB)
(DBHEAP) = 10000
      Size of database shared memory (4KB)
(DATABASE_MEMORY) = AUTOMATIC
      Catalog cache size (4KB)
(CATALOGCACHE_SZ) = (MAXAPPLS*4)
      Log buffer size (4KB)
(LOGBUFSZ) = 2048
      Utilities heap size (4KB)
(UTIL_HEAP_SZ) = 5000
      Buffer pool size (pages)
(BUFFPAGE) = 70000
      Extended storage segments size (4KB)
(ESTORE_SEG_SZ) = 16000
      Number of extended storage segments
(NUM_ESTORE_SEGS) = 0
      Max storage for lock list (4KB)
(LOCKLIST) = 40000

      Max size of appl. group mem set (4KB)
(APPGROUP_MEM_SZ) = 2000
      Percent of mem for appl. group heap
(GROUPHEAP_RATIO) = 70
      Max appl. control heap size (4KB)
(APP_CTL_HEAP_SZ) = 512

      Sort heap thres for shared sorts (4KB)
(SHEAPTHRES_SHR) = 250
      Sort list heap (4KB)
(SORTHEAP) = 20000
      SQL statement heap (4KB)
(STMTHEAP) = 10000
      Default application heap (4KB)
(APPLHEAPSZ) = 1024
      Package cache size (4KB)
(PCKCACHESZ) = (MAXAPPLS*8)
      Statistics heap size (4KB)
(STAT_HEAP_SZ) = 4384

      Interval for checking deadlock (ms)
(DLCHKTIME) = 10000
      Percent. of lock lists per application
(MAXLOCKS) = 20
      Lock timeout (sec)
(LOCKTIMEOUT) = -1

      Changed pages threshold
(CHNGPGS_THRESH) = 60
      Number of asynchronous page cleaners
(NUM_IOCLEANERS) = 1
      Number of I/O servers
(NUM_IOSEEVERS) = 4
      Index sort flag
(INDEXSORT) = YES
      Sequential detect flag
(SEQDETECT) = YES
```

```

Default prefetch size (pages)
(DFT_PREFETCH_SZ) = AUTOMATIC

Track modified pages
(TRACKMOD) = OFF

Default number of containers
= 1
Default tablespace extentsize (pages)
(DFT_EXTENT_SZ) = 32

Max number of active applications
(MAXAPPLS) = AUTOMATIC
Average number of active applications
(AVG_APPLS) = 1
Max DB files open per application
(MAXFILOP) = 1024

Log file size (4KB)
(LOGFILSIZ) = 50000
Number of primary log files
(LOGPRIMARY) = 4
Number of secondary log files
(LOGSECOND) = 1
Changed path to log files
(NEWLOGPATH) =
Path to log files
= /dev/raw/raw1
Overflow log path
(OVERFLOWLOGPATH) =
Mirror log path
(MIRRORLOGPATH) =
First active log file
=
Block log on disk full
(BLK_LOG_DSK_FUL) = NO
Percent of max active log space by
transaction (MAX_LOG) = 0
Num. of active log files for 1 active
UOW (NUM_LOG_SPAN) = 0

Group commit count
(MINCOMMIT) = 1
Percent log file reclaimed before soft
chckpt (SOFTMAX) = 360
Log retain for recovery enabled
(LOGRETAIN) = OFF
User exit for logging enabled
(USEREXIT) = OFF

HADR database role
= STANDARD
HADR local host name
(HADR_LOCAL_HOST) =
HADR local service name
(HADR_LOCAL_SVC) =
HADR remote host name
(HADR_REMOTE_HOST) =
HADR remote service name
(HADR_REMOTE_SVC) =
HADR instance name of remote server
(HADR_REMOTE_INST) =
HADR timeout value
(HADR_TIMEOUT) = 120
HADR log write synchronization mode
(HADR_SYNCMODE) = NEARSYNC

First log archive method
(LOGARCHMETH1) = OFF
Options for logarchmeth1
(LOGARCHOPT1) =

```

```

Second log archive method
(LOGARCHMETH2) = OFF
Options for logarchmeth2
(LOGARCHOPT2) =
Failover log archive path
(FAILARCHPATH) =
Number of log archive retries on error
(NUMARCHRETRY) = 5
Log archive retry Delay (secs)
(ARCHRETRYDELAY) = 20
Vendor options
(VENDOROPT) =

Auto restart enabled
(AUTORESTART) = ON
Index re-creation time and redo index build
(INDEXREC) = SYSTEM (RESTART)
Log pages during index build
(LOGINDEXBUILD) = OFF
Default number of loadrec sessions
(DFT_LOADREC_SES) = 1
Number of database backups to retain
(NUM_DB_BACKUPS) = 12
Recovery history retention (days)
(REC_HIS_RETENTN) = 366

TSM management class
(TSM_MGMTCLASS) =
TSM node name
(TSM_NODENAME) =
TSM owner
(TSM_OWNER) =
TSM password
(TSM_PASSWORD) =

Automatic maintenance
(AUTO_MAINT) = OFF
Automatic database backup
(AUTO_DB_BACKUP) = OFF
Automatic table maintenance
(AUTO_TBL_MAINT) = OFF
Automatic runstats
(AUTO_RUNSTATS) = OFF
Automatic statistics profiling
(AUTO_STATS_PROF) = OFF
Automatic profile updates
(AUTO_PROF_UPD) = OFF
Automatic reorganization
(AUTO_REORG) = OFF

```

## ***DB2 Database Manager Configuration***

### ***Database Manager***

```

get database manager configuration

Database Manager Configuration

Node type = Enterprise Server Edition
with local and remote clients

Database manager configuration release
level = 0x0a00

CPU speed (millisec/instruction)
(CPUSPEED) = 1.889377e-06
Communications bandwidth (MB/sec)
(COMM_BANDWIDTH) = 1.000000e+00

```

<p>Max number of concurrently active databases (NUMDB) = 1</p> <p>Data Links support (DATA LINKS) = NO</p> <p>Federated Database System Support (FEDERATED) = NO</p> <p>Transaction processor monitor name (TP_MON_NAME) =</p> <p>Default charge-back account (DFT_ACCOUNT_STR) =</p> <p>Java Development Kit installation path (JDK_PATH) = /opt/IBMJava2-141</p> <p>Diagnostic error capture level (DIAGLEVEL) = 0</p> <p>Notify Level (NOTIFYLEVEL) = 0</p> <p>Diagnostic data directory path (DIAGPATH) =</p> <p>Default database monitor switches</p> <p>  Buffer pool (DFT_MON_BUFPOOL) = OFF</p> <p>  Lock (DFT_MON_LOCK) = OFF</p> <p>  Sort (DFT_MON_SORT) = OFF</p> <p>  Statement (DFT_MON_STMT) = OFF</p> <p>  Table (DFT_MON_TABLE) = OFF</p> <p>  Timestamp (DFT_MON_TIMESTAMP) = OFF</p> <p>  Unit of work (DFT_MON_UOW) = OFF</p> <p>  Monitor health of instance and databases (HEALTH_MON) = OFF</p> <p>SYSADM group name (SYSADM_GROUP) =</p> <p>SYSCTRL group name (SYSCTRL_GROUP) =</p> <p>SYSMAINT group name (SYSMAINT_GROUP) =</p> <p>SYSMON group name (SYSMON_GROUP) =</p> <p>Client Userid-Password Plugin (CLNT_PW_PLUGIN) =</p> <p>Client Kerberos Plugin (CLNT_KRB_PLUGIN) =</p> <p>Group Plugin (GROUP_PLUGIN) =</p> <p>GSS Plugin for Local Authorization (LOCAL_GSSPLUGIN) =</p> <p>Server Plugin Mode (SRV_PLUGIN_MODE) = UNFENCED</p> <p>Server List of GSS Plugins (SRVCON_GSSPLUGIN_LIST) =</p> <p>Server Userid-Password Plugin (SRVCON_PW_PLUGIN) =</p> <p>Server Connection Authentication (SRVCON_AUTH) = NOT_SPECIFIED</p> <p>Database manager authentication (AUTHENTICATION) = SERVER</p> <p>Cataloging allowed without authority (CATALOG_NOAUTH) = NO</p> <p>Trust all clients (TRUST_ALLCLNTS) = YES</p>	<p>Trusted client authentication (TRUST_CLNTAUTH) = CLIENT</p> <p>Bypass federated authentication (FED_NOAUTH) = NO</p> <p>Default database path (DFTDBPATH) = /home/tpch</p> <p>Database monitor heap size (4KB) (MON_HEAP_SZ) = 90</p> <p>Java Virtual Machine heap size (4KB) (JAVA_HEAP_SZ) = 2048</p> <p>Audit buffer size (4KB) (AUDIT_BUF_SZ) = 0</p> <p>Size of instance shared memory (4KB) (INSTANCE_MEMORY) = AUTOMATIC</p> <p>Backup buffer default size (4KB) (BACKBUFSZ) = 1024</p> <p>Restore buffer default size (4KB) (RESTBUFSZ) = 1024</p> <p>Sort heap threshold (4KB) (SHEAPTHRES) = 100000</p> <p>Directory cache support (DIR_CACHE) = YES</p> <p>Application support layer heap size (4KB) (ASLHEAPSZ) = 15</p> <p>Max requester I/O block size (bytes) (RQRIOBLK) = 32767</p> <p>Query heap size (4KB) (QUERY_HEAP_SZ) = 1000</p> <p>Workload impact by throttled utilities(UTIL_IMPACT_LIM) = 10</p> <p>Priority of agents (AGENTPRI) = SYSTEM</p> <p>Max number of existing agents (MAXAGENTS) = 400</p> <p>Agent pool size (NUM_POOLAGENTS) = 64</p> <p>Initial number of agents in pool (NUM_INITAGENTS) = 4</p> <p>Max number of coordinating agents (MAX_COORDAGENTS) = (MAXAGENTS - NUM_INITAGENTS)</p> <p>Max no. of concurrent coordinating agents (MAXCAGENTS) = MAX_COORDAGENTS</p> <p>Max number of client connections (MAX_CONNECTIONS) = MAX_COORDAGENTS</p> <p>Keep fenced process (KEEPFENCED) = YES</p> <p>Number of pooled fenced processes (FENCED_POOL) = MAX_COORDAGENTS</p> <p>Initial number of fenced processes (NUM_INITFENCED) = 0</p> <p>Index re-creation time and redo index build (INDEXREC) = RESTART</p> <p>Transaction manager database name (TM_DATABASE) = 1ST_CONN</p> <p>Transaction resync interval (sec) (RESYNC_INTERVAL) = 180</p> <p>SPM name (SPM_NAME) =</p>
---	---

```

SPM log size
(SPM_LOG_FILE_SZ) = 256
SPM resync agent limit
(SPM_MAX_RESYNC) = 20
SPM log path
(SPM_LOG_PATH) =

TCP/IP Service name
(SVCENAME) = DB2_tpch_SVC
Discovery mode
(DISCOVER) = SEARCH
Discover server instance
(DISCOVER_INST) = ENABLE

Maximum query degree of parallelism
(MAX_QUERYDEGREE) = ANY
Enable intra-partition parallelism
(INTRA_PARALLEL) = NO

No. of int. communication
buffers(4KB) (FCM_NUM_BUFFERS) = 16384
Number of FCM request blocks
(FCM_NUM_RQB) = 8192
Number of FCM connection entries
(FCM_NUM_CONNECT) = AUTOMATIC
Number of FCM message anchors
(FCM_NUM_ANCHORS) = AUTOMATIC

Node connection elapse time (sec)
(CONN_ELAPSE) = 20
Max number of node connection retries
(MAX_CONNRETRIES) = 5
Max time difference between nodes (min)
(MAX_TIME_DIFF) = 1440

db2start/db2stop timeout (min)
(START_STOP_TIME) = 10

```

## DB2 Registry Variables

```

DB2NOLIOAIO=no
DB2_EXTENDED_OPTIMIZATION=Y
DB2_ANTIJOIN=Y
DB2_LIKE_VARCHAR=Y,Y
DB2BPVARS=/home/custom/bpvar.cfg
DB2RQTIME=30
DB2OPTIONS=-t -v +c
DB2COMM=tcPIP
DB2BQTRY=120
DB2_PARALLEL_IO=*

```

## Linux Parameters

```

kernel.shmmax=268435456
kernel.shmmni=4096
kernel.msgmni=1024
fs.file-max=8129
kernel.sem="250 32000 32 1024"
vm.swappiness=0

```

## Appendix B: Database Build Scripts

### buildtpcd

```
#!/usr/bin/perl
```

```

# usage buildtpcd [QUAL]
# ASSUMPTIONS: all ddl files have commits in
them!
($myName = $0) =~ s@.*/@@; $usage="
Usage: buildtpcd [QUAL]
      where QUAL is the optional parameter
saying to build the qualification
      database (sf = .1 =
100MB)\n";

$qual="";
if (@ARGV == 1){
    $qual = $ARGV[0];
}

# get TPC-D specific environment variables
require "getvars";
require "macro.pl";
require "tpcdmacro.pl";
require "version";
$timestamp=`perl gettimestamp "short"`;

# Make output unbuffered.
open(STDOUT, "| tee
buildtpcd.out.${timestamp}");
select(STDOUT);
$| = 1 ;
#-----
-----#
# verify that necessary environment
variables for building the database #
# are present. Default those that aren't
necessary #
#-----
-----#

# variables that must be specified for
script to run
@reqVars = ("TPCD_PLATFORM",
            "TPCD_PRODUCT",
            "TPCD_VERSION",
            "TPCD_DBNAME",
            "TPCD_MODE",
            "TPCD_SF",
            "TPCD_DDL_PATH",
            "TPCD_AUDIT",
            "TPCD_AUDIT_DIR",
            "TPCD_BUILD_STAGE");

# variables default to 'NULL' if unspecified
@defNullVars = ("TPCD_LOAD_SCRIPT",
                "TPCD_LOAD_SCRIPT_QUAL",
                "TPCD_INPUT",
                "TPCD_QUAL_INPUT",
                "TPCD_DBGEN",
                "TPCD_LOGPRIMARY",
                "TPCD_LOGSECOND",
                "TPCD_LOGFILSIZ",
                "TPCD_LOG_DIR",
                "TPCD_MACHINE",
                "TPCD_AGENTPRI",
                "TPCD_STAGING_TABLE_DDL",

                "TPCD_PRELOAD_STAGING_TABLE_SCRIPT",

                "TPCD_DELETE_STAGING_TABLE_SQL",
                "TPCD_RUNSTATSHORT",
                "TPCD_ADD_RI",
                "TPCD_AST",
                "TPCD_DBM_CONFIG",
                "TPCD_EXPLAIN_DDL",

```

```

        "TPCD_NODEGROUP_DEF",
        "TPCD_BUFFERPOOL_DEF",
        "TPCD_LOAD_DB2SET_SCRIPT",
        "TPCD_DB2SET_SCRIPT",
        "TPCD_LOG_DIR_SETUP_SCRIPT",
        "TPCD_LOAD_CONFIGFILE",
        "TPCD_LOAD_DBM_CONFIGFILE",
        "TPCD_TEMP");

&setVar(@reqVars, "ERROR");
&setVar(@defNullVars, "NULL");

if ( $qual eq "QUAL" ){
    @reqQualVars =      ("TPCD_QUAL_DBNAME",
                        "TPCD_QUAL_DDL",

"TPCD_QUAL_TBSP_DDL",

"TPCD_QUALCONFIGFILE",

"TPCD_DBM_QUALCONFIG",

"TPCD_LOAD_QUALCONFIGFILE",

"TPCD_LOAD_DBM_QUALCONFIGFILE");

    &setVar(@reqQualVars, "ERROR");

    if ( ($ENV{"TPCD_QUAL_INPUT"}) eq "NULL"
){
        if (((($ENV{"TPCD_DBGEN"}) eq "NULL")
||
        (($ENV{"TPCD_TEMP"}) eq
"NULL"))){
            die "TPCD_DBGEN and TPCD_TEMP
must be set if flatfiles are not
provided.\n";
        }
    }
}

$platform=$ENV{"TPCD_PLATFORM"};

if (length($ENV{"TPCD_DBPATH"}) <= 0){
    # if no db pathname specified, build the
db in the home directory
    if ( $platform eq "aix" ||
        $platform eq "sun" ||
        $platform eq "ptx" ||
        $platform eq "hp" ||
        $platform eq "linux"){
        $ENV{"TPCD_DBPATH"} = $ENV{"HOME"};
    }
    elsif ( $platform eq "nt" ){
        $ENV{"TPCD_DBPATH"} =
$ENV{"HOMEDRIVE"};
    }
    else{
        die "platform '$platform' not
supported yet\n";
    }
}
if ( ($ENV{"TPCD_INPUT"}) eq "NULL" ){
    if (((($ENV{"TPCD_DBGEN"}) eq "NULL" ) ||
        (($ENV{"TPCD_TEMP"}) eq "NULL"))){
        die "TPCD_DBGEN and TPCD_TEMP must
be set if flatfiles are not provided.\n";

```

```

    }
}
#-----#
# ddl script files found under custom
directory #
#-----#
if (length($ENV{"TPCD_DDL"}) <= 0){
    $ENV{"TPCD_DDL"} = "dss.ddl";
}
if (length($ENV{"TPCD_TBSP_DDL"}) <= 0){
    $ENV{"TPCD_TBSP_DDL"} = "dss.tbsp.ddl";
}
if (length($ENV{"TPCD_INDEXDDL"}) <= 0){
    $ENV{"TPCD_INDEXDDL"} = "dss.index";
}
if (length($ENV{"TPCD_RUNSTATS"}) <= 0){
    $ENV{"TPCD_RUNSTATS"} = "dss.runstats";
}
if (length($ENV{"TPCD_CONFIGFILE"}) <= 0){
    $ENV{"TPCD_CONFIGFILE"} =
"dss.dbconfig";
}
#-----#
# other settings
#
#-----#
if (length($ENV{"TPCD_BACKUP_DIR"}) <= 0){
    $ENV{"TPCD_BACKUP_DIR"} =
"${delim}dev${delim>null";
}
if (length($ENV{"TPCD_COPY_DIR"}) <= 0){
    $ENV{"TPCD_COPY_DIR"} =
"${delim}dev${delim>null";
}
if (length($ENV{"TPCD_TEMP"}) <= 1){
    $ENV{"TPCD_TEMP"} =
"/u/$instance/sql/lib/tmp";
}
if (length($ENV{"TPCD_PHYS_NODE"}) <= 0){
    $ENV{"TPCD_NODEGROUP_DEF"}="NULL"
}
if (length($ENV{"TPCD_GENERATE_SEED_FILE"})
<= 0){
    $ENV{"TPCD_GENERATE_SEED_FILE"} = "no";
}
if (length($ENV{"TPCD_SORTBUF"}) <= 0){
    $ENV{"TPCD_SORTBUF"} = 4096;
}
if (length($ENV{"TPCD_LOAD_PARALLELISM"}) <=
0){
    $ENV{"TPCD_LOAD_PARALLELISM"} = 0;
}
if (length($ENV{"TPCD_LOADSTATS"}) <= 0){
    $ENV{"TPCD_LOADSTATS"} = "no";
}
if (length($ENV{"TPCD_FASTPARSE"}) <= 0){
    $ENV{"TPCD_FASTPARSE"} = "no";
}
if (length($ENV{"TPCD_LOG"}) <= 0){
    $ENV{"TPCD_LOG"} = "no";
}
if (length($ENV{"TPCD_SMPDEGREE"}) <= 0 ){

```

```

        $ENV{"TPCD_SMPDEGREE"} = 1;
    }
    if (length($ENV{"TPCD_ACTIVATE"}) <= 0){
        $ENV{"TPCD_ACTIVATE"} = "no";
    }
    if (length($ENV{"TPCD_APPEND_ON"}) <= 0){
        $ENV{"TPCD_APPEND_ON"}="yes"
    }
    if (length($ENV{"TPCD_GENERATE_SEED_FILE"})
<= 0){
        $ENV{"TPCD_GENERATE_SEED_FILE"}="no";
    }

#setup global variables
$tpcdVersion=          $ENV{"TPCD_VERSION"};
$buildStage=
        $ENV{"TPCD_BUILD_STAGE"};
$mode=                  $ENV{"TPCD_MODE"};
$delim =
        $ENV{"TPCD_PATH_DELIM"};
$sep =                  $ENV{"COMMAND_SEP"};
$ddlpath=              $ENV{"TPCD_DDLPATH"};
$extraindex=
        $ENV{"TPCD_EXTRAINDEX"};
$earlyindex=
        $ENV{"TPCD_EARLYINDEX"};
$loadstats=
        $ENV{"TPCD_LOADSTATS"};
$addRI=                $ENV{"TPCD_ADD_RI"};
$astFile=              $ENV{"TPCD_AST"};
$genSeed=
        $ENV{"TPCD_GENERATE_SEED_FILE"};
$log=                  $ENV{"TPCD_LOG"};
$activate=
        $ENV{"TPCD_ACTIVATE"};
$RealAudit=           $ENV{"TPCD_AUDIT"};
$auditDir=
        $ENV{"TPCD_AUDIT_DIR"};
$loadsetScript=
        $ENV{"TPCD_LOAD_DB2SET_SCRIPT"};
$user=                 $ENV{"USER"};
$logDirScript=
        $ENV{"TPCD_LOG_DIR_SETUP_SCRIPT"};
$logprimary=
        $ENV{"TPCD_LOGPRIMARY"};
$logsecond=
        $ENV{"TPCD_LOGSECOND"};
$logfilsiz=
        $ENV{"TPCD_LOGFILSIZ"};
$dbpath =              $ENV{"TPCD_DBPATH"};
$explainDDL=
        $ENV{"TPCD_EXPLAIN_DDL"};
$platform=
        $ENV{"TPCD_PLATFORM"};
$buffpooldef=
        $ENV{"TPCD_BUFFERPOOL_DEF"};
$stagingTbl =
        $ENV{"TPCD_STAGING_TABLE_DDL"};
$preloadSampleUF=
        $ENV{"TPCD_PRELOAD_STAGING_TABLE_SCR
IPT"};
$deleteSampleUF=
        $ENV{"TPCD_DELETE_STAGING_TABLE_SQL"
};
$machine=              $ENV{"TPCD_MACHINE"};
$runstatShort =
        $ENV{"TPCD_RUNSTATSHORT"};
$runstats =
        $ENV{"TPCD_RUNSTATS"};
$smpdegree =
        $ENV{"TPCD_SMPDEGREE"};

$agentpri =
        $ENV{"TPCD_AGENTPRI"};
$setScript =
        $ENV{"TPCD_DB2SET_SCRIPT"};
$backupdir =
        $ENV{"TPCD_BACKUP_DIR"};
$nodegroupdef=
        $ENV{"TPCD_NODEGROUP_DEF"};
$dbgen=                $ENV{"TPCD_DBGEN"};
$appendOn=
        $ENV{"TPCD_APPEND_ON"};
$indexddl=
        $ENV{"TPCD_INDEXDDL"};

if($qual eq "QUAL"){
    $logDir=
        $ENV{"TPCD_LOG_QUAL_DIR"};
    $dbname=
        $ENV{"TPCD_QUAL_DBNAME"};
    $input=
        $ENV{"TPCD_QUAL_INPUT"};
    $sf=
        $ENV{"TPCD_QUAL_SF"};

    $loadconfigfile=$ENV{"TPCD_LOAD_QUAL
CONFIGFILE"};
    $loadDBMconfig=
        $ENV{"TPCD_LOAD_DBM_QUALCONFIGFILE"}
;
    $loadscript =
        $ENV{"TPCD_LOAD_SCRIPT_QUAL"};
    $configfile =
        $ENV{"TPCD_QUALCONFIGFILE"};
    $dbmconfig =
        $ENV{"TPCD_DBM_QUALCONFIG"};
    $ddl=
        $ENV{"TPCD_QUAL_DDL"};
    $tbspddl=
        $ENV{"TPCD_QUAL_TBSP_DDL"};
}else{
    $logDir=            $ENV{"TPCD_LOG_DIR"};
    $dbname=            $ENV{"TPCD_DBNAME"};
    $input=             $ENV{"TPCD_INPUT"};
    $sf=                $ENV{"TPCD_SF"};
    $loadconfigfile=$ENV{"TPCD_LOAD_CONF
IGFILE"};
    $loadDBMconfig=
        $ENV{"TPCD_LOAD_DBM_CONFIGFILE"};
    $loadscript =
        $ENV{"TPCD_LOAD_SCRIPT"};
    $configfile =
        $ENV{"TPCD_CONFIGFILE"};
    $dbmconfig =
        $ENV{"TPCD_DBM_CONFIG"};
    $ddl=               $ENV{"TPCD_DDL"};
    $tbspddl=
        $ENV{"TPCD_TBSP_DDL"};
}

if (( $mode eq "uni" ) || ( $mode eq "smp"
)){
    $all_ln="once";
    $all_pn="once";
    $once="once";
}
else{
    $all_ln="all_ln";
    $all_pn="all_pn";
    $once="once";
}
}

```

```

#-----#
# echo parameter settings to acknowledge
what is being built #
# and set db2set options for database load
#
#-----#

&printSummary;

print "\nSleeping for 15 seconds to give you
a chance to reconsider...\n";
sleep 15;

if ( $platform eq "nt" ){
    if (($mode eq "uni") || ($mode eq
"smp")){
        #spaces required for NT
        $src=&doddb_noconn("db2set
DB2OPTIONS=\" -t -v +c\";db2set
DB2NTNOCACHE=ON",$all_ln);
    }
    else{
        $src=&doddb_noconn("db2set
DB2OPTIONS=\\\" -t -v +c\\\";db2set
DB2NTNOCACHE=ON",$all_ln);
    }
}
else{
    if (($mode eq "uni") || ($mode eq
"smp")){
        $src=&doddb_noconn("db2set
DB2OPTIONS=\"-t -v +c\"",$all_ln);
    }
    else{
        # $src=&doddb_noconn("db2set
DB2OPTIONS=\\\"-t -v +c\\\"",$all_ln);
    }
}
if ( $rc != 0 ){
    die "failure setting db2 environment
variable : rc = $rc\n";
}

#-----#
# set the db2 env vars for loading, from the
TPCD_LOAD_DB2SET_SCRIPT script #
#-----#

if ( $loadsetScript ne "NULL" )
{
    if ( $platform eq "nt" ){
        if ( ( $mode eq "uni" ) || ( $mode eq
"smp" ) ){
            $src=system("${ddlpath}${delim}$loadsetScript
");
        }
        else{
            $src=system(" rah \" cd
${ddlpath} & $loadsetScript \" ");
        }
    }
    else{
        $src=system("${ddlpath}${delim}$loadsetScript
");
    }
}

($rc == 0) || die "failure loading
db2set parms from $loadsetScript \n";
}
!&stopStart || die;
#-----#
# Begin complete build: TPCD_BUILDSTAGE =
ALL #
#-----#

if($buildStage eq "ALL") {
    #create the database
    $src = &createDb;
    ($rc == 0) || die "ERROR: create
database failed. rc = $rc\n ";
    &setLog;
};
$src = &setLoadConfig;
#-----#
# Begin build from CreateTablespace or early
Indexes #
#-----#

if( $buildStage eq "ALL" ||
$buildStage eq "CRTTBSP" ||
($buildStage eq "INDEX" && $earlyindex
eq "yes")){
    !&createNodegroups || print "ERROR:
create nodegroups failed.\n";
    !&createBufferPools || print "ERROR:
create bufferpools failed.\n";
    &outtime("*** Start of audited Load
Time - starting to create tables");
    !&createTablespaces || print
"WARNING: create tablespaces error.\n";
    !&createExplainTbls || print
"ERROR: create EXPLAIN tables failed.\n";
    !&createTables || print "ERROR:
create tables failed.\n";

    mkdir("${delim}tmp${delim}$instance"
,0777);

    # if earlyindex requested, create
indexes
    if ( $earlyindex eq "yes" ){
        !&createIndexes("early") ||
die "ERROR: create early indexes failed.\n";
    }
    # start the dbgen and load....call
the specific mode for loading (uni,smp,mln)
    !&loadData || die "ERROR: failure
during load data\n";

    # remove the update.pair.num file so
when setupDir runs, it doesn't
    # hang waiting for an answer on nt
    &rm("${auditDir}${delim}$dbname.$user.
update.pair.num");
    # verify that the audit directory
exists
    $filename="${auditDir}";
    if (-e $filename){
        # set up the
$auditDir/$dbname.$user.update.pair.num file

```



```

# to start at update pair 1
#-----#
# Add RI/AST, set run configuration
#
#-----#
#-----#
if ( $addRI ne "NULL" ){
    &outtime("*** Adding RI constraints
started");

&dodb2file($dbname,"$ddlpath${delim}$addRI",
$once);
    &outtime("*** Adding RI constraints
completed");
}

#add the AST if it has been requested
if ( $astFile ne "NULL" ){
    &outtime("*** Adding AST started");

&dodb2file($dbname,"$ddlpath${delim}$astFile
",$once);
    &outtime("*** Adding AST completed");
}

# check tbsp info
&dodb_conn($dbname,"db2 list tablespaces
show detail",$once);

# set the configuration
&outtime("*** Set Configuration started");
#&outtime("*** Setting degree of
parallelism");

&setConfiguration;
# if logging is enabled, we must take a
backup of the database
if ( $log eq "yes" ){
    &createBackup;
}

# stop and restart the database to get
config parms recognized
!&stopStart || die;

&outtime("*** Set Configuration completed");
&outtime("*** End of audited Load Time");

#create generated seeds
if ( $genSeed ne "no" ){
    $src = system("perl createmseedme.pl
1000");
    ($src != 0) || warn "createmseedme
failed\n";
}

#-----#
#-----#
# Call buildtpcdbatch to compile tpcdbatch
#
#-----#
#-----#
# - if we are in real audit mode then we
have to do a number of things #
# set up the audit directory structure
and the run directory structure #
# so that once we have completed the
buildtpcd, we are ready to run. #
}; # end create/load/index phase of the
build

#-----#
#-----#
# Begin build from runstats
#
#-----#
#-----#
if( $buildStage eq "ALL" ||
$buildStage eq "CRTTBSP" ||
$buildStage eq "LOAD" ||
$buildStage eq "INDEX" ||
$buildStage eq "RUNSTATS"){
    # if statistics not gathered on the
load, run runstats (we have to run the
# stats at the same time as the
index creation whether it be both during
load,
# or after load)
# We need to run the runstats as
well if we have specifed an extra index file
# for "after load" indexes
if ( ( $loadstats eq "no" ) || (
$earlyindex eq "no" ) || ( $extraindex ne
"no" ) ){
    &doRunStats;
}
};

#-----#
#-----#
# End build phase: all/load/index/runstats
#

```

```

# first remove any old "update pair
number" file so we won't be prompted #
# doing setupDir.
#
# - before we stop the database for the
final time #
# if we are in the real audit mode then
run dbtables and dbcheck before #
# we print out the notice that we're
ready to run performance tests #
# if we are building the qualification
database then we'll bind to both #
# the dbname database and the
qualification database #
#-----#
#-----#

$rc = system("perl buildtpcdbatch $qual");
($rc == 0) || die "buildtpcdbatch failed
rc=$rc\n";

if ( $RealAudit eq "yes" ){
    &rm("$auditDir${delim}tools${delim}t
pcd.runsetup");
    system("perl setupRun");
    if ( $qual eq "QUAL" ){
        $verifyType="q";
    }
    else{
        $verifyType="t";
    }
    system("perl tablesdb $verifyType");
    &dodb2file($dbname,"$auditDir${delim
}tools${delim}first10rows.sql",$once);
}

#-----#
#-----#
# Create Catalog info
#
#-----#
#-----#
$rc = system("perl catinfo.pl b");
($rc == 0) || warn "catinfo failed!!! rc =
$rc\n";

$rc=system("db2stop");
($rc == 0) || die "failure during db2stop
rc = $rc \n";

&outtime("*** Ready to run the performance
tests once the dbm has restarted");

if ( $RealAudit ne "yes" ){
    # if we are not in a real audit, then we
can restart the database manager
    # if we are in a real audit, then we
don't want to do this until the
    # power test starts
    $rc=system("db2start");
    ($rc == 0) || die "failure during
db2start rc = $rc \n";
    if ( $activate eq "yes" ){
        &dodb_noconn("activate database
$dbname",$once);
    }
}

&outtime("*** Finished creating the
database");

```

```

#-----#
#-----#
# finished creating the database
#
#-----#
#-----#
#-----#
# Function: setLog
#
#-----#
#-----#
sub setLog{
    # update the log information first
    # set up the log directory before we
do any index creation
    my $rc;
    my $setLogs;
    my $setLogString;

    if ($logDirScript ne "NULL"){
        system ("perl
$dddlpath${delim}$logDirScript");
    }
    elsif ( $logDir ne "NULL" ){
        &dodb_noconn("db2 update
database configuration for $dbname using
newlogpath $logDir",$all_ln);
    }
    $setLogs=0;
    $setLogString="";
    if ( $logprimary ne "NULL" ){
        $setLogString.="db2 update db
cfg for $dbname using logprimary
$logprimary";
        $setLogs=1;
    }
    if ( $logsecond ne "NULL" ){
        if ( $setLogs != 0 ){
            $setLogString.=" $sep ";
        }
        $setLogString.="db2 update db
cfg for $dbname using logsecond $logsecond";
        $setLogs=1;
    }
    if ( $logfilsiz ne "NULL" ){
        if ( $setLogs != 0 ){
            $setLogString.=" $sep ";
        }
        $setLogString.="db2 update db
cfg for $dbname using logfilsiz $logfilsiz";
        $setLogs=1;
    }
    if ( $setLogs != 0 ){
        $setLogString.=" $sep ";
    }
    $setLogString.="db2 update db cfg
for $dbname using logbufsiz 128";
    # $rc =
&dodb_noconn("$setLogString",$all_ln);
}

#-----#
#-----#
# Function: createDb
#

```

```

#-----#
#-----#
sub createDb{
    &outtime("*** Starting to create the
database");
    # setup required variables
    my $rc;
    $rc = &dodb_noconn("db2 \ "create
database $dbname on $dbpath collate using
identity with 'TPC-D $sf GB'\", $once);
    ($rc == 0) || return($rc);
    # reset the db and dbm configuration
before we start
    &dodb_noconn("db2 reset database
configuration for $dbname", $all_ln);
    &dodb_conn($dbname, "db2 alter
bufferpool ibmdefaultbp size -1 $sep \
db2 grant connect on database
to public $sep \
db2 grant dbadm on database to
$dbname $sep \
db2 commit", $once);
    &dodb_noconn("db2 reset database
manager configuration", $once);
}

#-----#
# Function: createNodegroups
#
#-----#
sub createNodegroups{
    &outtime("*** Creating the
nodegroups.");
    my $rc;
    if ( $nodegroupdef ne "NULL"){
        $rc =
&dodb2file($dbname, "$ddlpath${delim}$nodegro
updef", $once);
    }
}

#-----#
# Function: createExplainTbls
#
#-----#
sub createExplainTbls{
    &outtime("*** Creating the EXPLAIN
tables.");
    my $rc;
    my $explnPathFile;
    my $home;
    my $sqlpath;

    if ( $explainDDL ne "NULL" ){
        $explnPathFile="$explainDDL";
    }
    else{
        if ( $platform eq "ptx" ){
            $home=$ENV{"HOME"};

            $sqlpath="$home${delim}sqllib";
        }
        if ( $platform ne "nt" ){
            $home=$ENV{"HOME"};

            $sqlpath="$home${delim}sqllib";
        }
    }

    else{
        $sqlpath=$ENV{"DB2PATH"};
    }

    $explnPathFile="$sqlpath${delim}misc
${delim}EXPLAIN.DDL";
}
$rc = &dodb_conn($dbname,
"db2 -tvf $explnPathFile $sep \
db2 alter table explain_instance
locksize table append on $sep \
db2 alter table explain_statement
locksize table append on $sep \
db2 alter table explain_argument
locksize table append on $sep \
db2 alter table explain_object
locksize table append on $sep \
db2 alter table explain_operator
locksize table append on $sep \
db2 alter table explain_predicate
locksize table append on $sep \
db2 alter table explain_stream
locksize table append on",
$once);
}

#-----#
# Function: createBufferPools
#
#-----#
sub createBufferPools{
    my $rc;
    &outtime("*** Creating the
bufferpools");
    if ( $buffpooldef ne "NULL" ){
        #run the create bufferpool
ddl
        $rc =
&dodb2file($dbname, "$ddlpath${delim}$buffpoo
ldef", $once);
    }
}

#-----#
# Function: createTablespaces
#
#-----#
sub createTablespaces{
    &outtime("*** Ready to start
creating the tablespaces");
    # setup required variables
    my $rc;
    $rc =
&dodb2file($dbname, "$ddlpath${delim}$tblspddl
", $once);
    ($rc == 0) || return $rc;
    # create/populate the staging tables
    if ( $stagingTbl ne "NULL" ){
        # staging tables must be
created for both test and qualification
database
        # but they do not need to be
populated for the qualification database
        $rc =
&dodb2file($dbname, "$ddlpath${delim}$staging
Tbl", $once);
        ($rc == 0) || return $rc;
    }
}

```

```

        if ( $qual ne "QUAL" ){
            if ( $preloadSampleUF
ne "NULL" ){
                # preload the
sample UF data for statistics gathering
                $src = system
("perl $ddlpath${delim}$preloadSampleUF");
                #($src == 0) ||
return $src;
            }
        }
        if ( $deleteSampleUF
ne "NULL" ){
            # delete the
sample rows now that stats have been
gathered
            $src =
&dodb2file($dbname, "$ddlpath${delim}$deleteS
ampleUF", $once);
            #($src == 0) ||
return $src;
        }
    }
}

#-----#
# Function: createTables
#
#-----#
sub createTables{
    my $src;
    $src =
&dodb2file($dbname, "$ddlpath${delim}$ddl", $o
nce);
    ($src == 0) || return $src;
    # update the locksize on the non-
updated tables to be table level locking
    # update the tables for appendmode
    if ($appendOn eq "yes"){
        $src = &dodb_conn($dbname,
            "db2 alter table
tpcd.nation locksize table $sep \
            db2 alter table
tpcd.region locksize table $sep \
            db2 alter table
tpcd.customer locksize table $sep \
            db2 alter table
tpcd.supplier locksize table $sep \
            db2 alter table
tpcd.part locksize table $sep \
            db2 alter table
tpcd.partsupp locksize table $sep \
            db2 alter table
tpcd.lineitem append on $sep \
            db2 alter table
tpcd.orders append on",
                $once);
    }
    else{
        $src = &dodb_conn($dbname,
            "db2 alter table
tpcd.nation locksize table $sep \
            db2 alter table
tpcd.region locksize table $sep \
            db2 alter table
tpcd.customer locksize table $sep \
            db2 alter table
tpcd.supplier locksize table $sep \
            db2 alter table
tpcd.part locksize table $sep \
            db2 alter table
tpcd.partsupp locksize table $sep \
            db2 alter table
tpcd.lineitem pctfree 0 $sep \
            db2 alter table
tpcd.orders pctfree 0",
                $once);
    }
}

#-----#
# Function: createIndexes
#
#-----#
sub createIndexes{
    # setup required variables
    local @args = @_;
    my $indexType = @args[0];
    my $src;
    &outtime("*** Starting to create
$indexType indexes");
    if( $indexType eq "extra"){
        $src =
&dodb2file($dbname, "$ddlpath${delim}$extrain
dex", $once);
    }elseif ($indexType eq "early" ||
$indexType eq "normal"){
        $src =
&dodb2file($dbname, "$ddlpath${delim}$indexdd
l", $once);
    }
    &outtime("*** Create $indexType
index completed");
    return $src;
}

#-----#
# Function: setLoadConfig
#
#-----#
sub setLoadConfig{
    &outtime("*** Setting LOAD
configuration.");
    my $src;
    my $buffpage;
    my $sortheap;
    my $sheaphres;
    my $util_heap_sz;
    my $ioservers;
    my $ioclnrs=          1;
    my $chnpggs=         60;

    if ($loadconfigfile eq "NULL"){
        if ( $machine eq "small" ){
            $buffpage = 5000;
            $sortheap = 3000;
            $sheaphres = 8000;
            $util_heap_sz = 5000;
            $ioservers = 6;
        }
    }
}

```

```

) {
    elsif ( $machine eq "medium"
        $buffpage = 10000;
        $sortheap = 8000;
        $sheapthres = 20000;
        $util_heap_sz =
10000;
        $ioservers = 10;
    }
    elsif ( $machine eq "big" ) {
        $buffpage = 30000;
        $sortheap = 20000;
        $sheapthres = 50000;
        $util_heap_sz =
30000;
        $ioservers = 20;
    }
    else {
        die "Neither a LOAD
config filename nor a valid machine size has
\
        been specified!\n";
    }
    $src = &dodb_noconn("db2
update db cfg for $dbname using buffpage
$buffpage $sep \
db2 update db cfg for $dbname
using sortheap $sortheap $sep \
db2 update db cfg for $dbname
using num_iocleaners $ioclnrs $sep \
db2 update db cfg for $dbname
using num_ioservers $ioservers $sep \
db2 update db cfg for $dbname
using util_heap_sz $util_heap_sz $sep \
db2 update db cfg for $dbname
using chngpgs_thresh $chngpgs", $all_ln);
}
else{
    $src =
&dodb2file_noconn("$ddlpath${delim}$loadconf
igfile", $all_ln);
}
($src == 0) || return $src;
if($loadDBMconfig ne "NULL"){
    $src =
&dodb2file_noconn("$ddlpath${delim}$loadDBMc
onfig", $once);
}
else{
    $src = &dodb_noconn("db2
update dbm cfg using sheapthres
$sheapthres", $once);
}
($src == 0) || return $src;
&dodb_noconn("db2 terminate", $once);
$src = &stopStart;
return $src;
}
#-----#
# Function: loadData
#
#-----#
sub loadData{
    # start the dbgen and load....call
the specific mode for loading (uni,smp,mln)
    my $src;
    if (( $mode eq "uni" ) || ( $mode eq
"smp" )){
        &outtime("*** Starting the
load");
        # call the appropriate
dbgen/load for uni/smp
        if ( $loadscript eq "NULL"){
            $src = system("perl
genloaduni $qual");
            ($src == 0) || print
"ERROR: genloaduni failed rc = $rc\n";
        }
        else{
            $src =
&dodb2file_noconn("$ddlpath${delim}$loadscri
pt", $once);
            ($src == 0) || print
"ERROR: load script: $loadscript failed. rc
= $rc\n";
        }
    }
    elsif (( $mode eq "mln" ) || ( $mode
eq "mpp" )){
        &outtime("*** Starting the
load");
        # call the appropriate
dbgen/split/(sort)/load for mln/mpp
        if ( $loadscript eq "NULL"){
            $src = system("perl
genloadmpp $qual");
            ($src == 0) || print
"ERROR: genloadmpp failed. rc = $rc\n";
        }
        else{
            system("$ddlpath${delim}$loadscri
pt $sf");
            $src =
&dodb2file_noconn("$ddlpath${delim}$loadscri
pt $sf");
            #($src == 0) || print
"ERROR: load script $loadscript failed. rc =
$rc\n";
        }
        else{
            print "TPCD_MODE not set to
one of uni, smp, mln or mpp\n";
            $src = 1;
        }
        ($src == 0) || &outtime("*** Load
complete");
        return $src;
    }
}
#-----#
# Function: doRunStats
#
#-----#
sub doRunStats{
    # if loadstats not gathered, then
index stats not gathered either.
    &outtime("*** Runstats started");
    if ( $runstatShort ne "NULL" ){
        # we've specified a second
runstats file...This runstats file should do
        # runstats for all table except
lineitem. The lineitem runstats command
        # should be left in the main
runstats file.
    }
}

```

```

        if ( $platform eq "aix" ||
$platform eq "sun" || $platform eq "ptx" ){
            print "runstats from
$ddlpath${delim}$runstatShort running
now\n";
            $rc = system("db2 -tvf
\"$ddlpath${delim}$runstatShort\" >
\"$auditDir${delim}tools${delim}runstatShort
.out\" & ");
            print "rc from
runstatshort=$rc\n";
        }
        elsif ( $platform eq "nt" ){
            system("start db2 -tvf
$ddlpath${delim}$runstatShort");
        }
        else
        {
            print "Don't know how to
start in background on $platform
platform\n";
            print "therefore running
runstats serially\n";

&dodb2file($dbname, "$ddlpath${delim}$runstat
Short", $once);
        }
        # run the full runstats, or the
remainder of what wasn't put into the short
# runstats file. You should be sure
that this runstats will take longer
# than the short runstats that is
running in the background, otherwise
# setting the config will happen
before this is done.

&dodb2file($dbname, "$ddlpath${delim}$runstat
s", $once);
        &outtime("*** Runstats completed");
    }

#-----#
# Function: setConfiguration
#
#-----#
sub setConfiguration{
    my $ret = 0;
    # &dodb_noconn("db2 update database
configuration for $dbname using dft_degree
$smpdegree", $all_ln);
    &dodb_noconn("db2 update database
manager configuration using max_querydegree
$smpdegree", $once);
    &dodb2file_noconn("${ddlpath}${delim
}$configfile", $all_ln);
    &dodb2file_noconn("${ddlpath}${delim
}$dbmconfig", $once);

    if ( $agentpri ne "NULL" ){
        &dodb_noconn("db2 update dbm cfg
using AGENTPRI $agentpri", $once);
    }
    # set the db2 environment variables
for running the benchmark
    if ( $setScript ne "NULL" ){
        if ( $platform eq "aix" ||
$platform eq "sun" || $platform eq "ptx"){
$ret=system("${ddlpath}${delim}$setScript");
        }
        elsif ( $platform eq "nt" ){
            if (($mode eq "uni" ) ||
($mode eq "smp" )){
                $ret = system("perl
${ddlpath}${delim}$setScript");
            }
            else{
                $ret = system(" rah \"
cd ${ddlpath} & $setScript\" ");
            }
        }
        #($ret == 0 ) || die "failure
setting runtime db2set parms from $setScript
\n";
    }
}

#-----#
# Function: createBackup
#
#-----#
sub createBackup{
    my $rc;
    &dodb_noconn("db2 update database
configuration for $dbname using LOGRETAIN
yes", $all_ln);
    print "\n NOTE: DO NOT RESET THE
DATABASE CONFIGURATION or you will lose
logretain\n";
    # force a connection to the database
on all nodes to ensure LOGRETAIN is
# set in effect.
# An error message will print to
screen if the logretain is set properly
# i.e. SQL116N A connection to or
activation of database <database name>
# cannot be made.
# This is expected and the lack of
this error message should be seen as an
# error in the database build.
# &dodb_conn($dbname, "db2 \"select
count(*) from tpcd.region\"", $all_ln);

    if ( $qual eq "QUAL" ){
        &outtime("*** Starting the
backup");
        if ( ( $mode eq "mln" ) || (
$mode eq "mpp" )){
            # must back up catalog
node first...assume node 00
            $rc=system("db2_all
\'}<<+000< db2 \"backup database $dbname to
$backupdir without prompting\" \\' ");
            ($rc == 0 ) || print
"ERROR: backup of catalog node failed rc =
$rc\n";

            # back up remaining nodes
            $rc=system("db2_all
\'}<<-000< db2 backup database $dbname to
/filesystem/backup/qual without prompting\'
");
            ($rc == 0 )|| print
"ERROR: backup of remaining nodes failed rc
= $rc\n";
        }
        else{

```

```

        $src = &dodb_noconn("db2
backup database $dbname to
/filesystem/backup/qual without
prompting", $once);
        $src = &dodb_noconn("db2
update db cfg for tpcd using newlogpath
/dev/raw/raw1 logfilesiz 100000 logprimary 20
softmax 1600", $once);
    }
    ($src == 0) || &outtime("***
Finished the backup");
}
else{
    # This is the test database.
    Clause 3.1.4 states that "the test sponsor
    is
        # not required to make or
    have backup copies of the test database;
    however
        # all other mechanisms that
    guarantee durability of the qualification
        # database must be enabled in
    the same way for the test database".
        # According to this clause we
    do need to keep the backup of the database.
        $src = &dodb_noconn("db2
backup database tpcd to
/filesystem/backup/test with 16 BUFFERS
PARALLELISM 8 without prompting", $once);
        $src = &dodb_noconn("db2
update db cfg for tpcd using newlogpath
/dev/raw/raw1 logfilesiz 100000 logprimary 20
softmax 1600", $once);
    }
    return $src;
}

#-----#
# Function: printSummary
#
#-----#
sub printSummary{
    if ( $buildStage ne "ALL" ){
        print " ***** STARTING the build
process at the $buildStage Stage *****\n";
    }
    print "Building a TPC-D Version
$tpcdVersion $sf GB database on $dbpath
with: \n";
    print "    Mode = $mode \n";
    print "    Tablespace ddl in
$ddlpath${delim}$tbspddl \n";
    if ( $nodegroupdef ne "NULL" ){
        print "    Nodegroup ddl in
$ddlpath${delim}$nodegroupdef \n";
    }
    if ( $buffpooldef ne "NULL" ){
        print "    Bufferpool ddl in
$ddlpath${delim}$buffpooldef \n";
    }
    print "    Table ddl in
$ddlpath${delim}$ddl \n";
    print "    Index ddl in
$ddlpath${delim}$indexddl \n";
    if ( $extraindex ne "no" ){
        print "    Indices to create after
the load $ddlpath${delim}$extraindex \n";
    }
    if ( $loadscript eq "NULL" ){

```

```

        if ( $input eq "NULL" ){
            print "    Data generated by
DBGEN in $dbggen\n";
        }
        else{
            print "    Data loaded from
flat files in $input\n";
        }
    }
    if ( $earlyindex eq "yes" ){
        print "    Indexes created before
loading\n";
    }
    else{
        print "    Indexes created after
loading\n";
    }
    if ( $addRI ne "NULL" ){
        print "    RI being used from
$ddlpath${delim}$addRI\n";
    }
    if ( $astFile ne "NULL" ){
        print "    AST being used from
$ddlpath${delim}$astFile\n";
    }
    if ( $loadstats eq "yes" ){
        if ( $earlyindex eq "yes" ){
            print "    Statistics for tables
and indexes gathered during load\n";
        }
        else{
            if ( $runstatShort eq "NULL" ){
                print "    Statistics for
tables and indexes gathered after load using
$ddlpath${delim}$runstats \n";
            }
            else{
                print "    Statistics for
tables and indexes gathered after load using
$ddlpath${delim}$runstats and
$ddlpath${delim}$runstatShort\n";
            }
        }
    }
    else{
        if ( $runstatShort eq "NULL" ){
            print "    Statistics for tables
and indexes gathered after load using
$ddlpath${delim}$runstats \n";
        }
        else{
            print "    Statistics for tables
and indexes gathered after load using
$ddlpath${delim}$runstats and
$ddlpath${delim}$runstatShort\n";
        }
    }
    if ( $loadconfigfile ne "NULL" ){
        print "    Database Configuration
parameters for LOAD taken from
$ddlpath${delim}$loadconfigfile\n";
    }
    if ( $loadDBMconfig ne "NULL" ){
        print "    Database manager
Configuration parameters for LOAD taken from
$ddlpath${delim}$loadDBMconfig\n";
    }
    if ( $configfile ne "NULL" ){
        print "    Database Configuration
parameters taken from
$ddlpath${delim}$configfile\n";
    }
}

```

```

    }
    else{
        print " Database Configuration
paramters taken from
$ddlpath${delim}dss.dbconfig${sfReal}GB\n";

$configfile="dss.dbconfig${sfReal}GB";
    }
    if ( $dbmconfig ne "NULL" ){
        print " Database Manager
Configuration paramters taken from
$ddlpath${delim}$dbmconfig\n";
    }
    else{
        print " Database Manager
Configuration paramters taken from
$ddlpath${delim}dss.dbmconfig${sfReal}GB\n";

$configfile="dss.dbmconfig${sfReal}GB";
    }
    #print " Copy image for load
command created in $copydir\n";
    if ( $log eq "yes" ){
        print " Backup files placed in
$backupdir\n";
    }
    else{
        print " No backup will be
taken.\n";
    }
    print " Log retain set to $log\n";
    if ( $logDir eq "NULL" ){
        print " Log files remain in
database path\n";
    }
    else{
        print " Log file path set to
$logDir\n";
    }
    if ( $logprimary eq "NULL" ){
        print " Log Primary left at
default\n";
    }
    else{
        print " Log Primary set to
$logprimary\n";
    }
    if ( $logsecond eq "NULL" ){
        print " Log Second left at
default\n";
    }
    else{
        print " Log second set to
$logsecond\n";
    }
    if ( $logfilsiz eq "NULL" ){
        print " Logfilsiz left at
default\n";
    }
    else{
        print " Logfilsiz set to
$logfilsiz\n";
    }
    if (($loadconfigfile eq "") ||
($loadconfigfile eq "NULL")){
        print " Machine size set to
$machine so the following configuration\n";
        print " parameters are used for
load, create index and runstats: \n";
        print " BUFFPAGE = $buffpage
\n";

```

```

        print " SORTHEAP = $sortheap
\n";
        print " SHEAPTHRES =
$sheapthres\n";
        print " NUM_IOSERVERS =
$ioservers\n";
        print " NUM_IOCLEANERS =
$ioclnrs\n";
        print " CHNGPGS_THRESH =
$chngpgs\n";
        print " UTIL_HEAP_SZ =
$util_heap_sz\n";
        print " Degree of parallelism
(dft_degree and max_querydegree) set to
$smpdegree\n";
        print " Parameters for load
are: temp file = $ldtemp\n";
        print "
sort buf = $sortbuf\n";
        print "
ld parallelism = $load_parallelism\n";
        if ( $fparse eq "yes" ){
            print "
FASTPARSE used on load\n";
        }
        if ( $loadscript ne "NULL"){
            print " Load commands in
$ddlpath${delim}$loadscript\n";
        }
        print " Degree of parallelism
(dft_degree and max_querydegree) set to
$smpdegree\n";
        if ( $agentpri ne "NULL" ){
            print " AGENTPRI set to
$agentpri\n";
        }
        if ( $activate eq "yes" ){
            print " Database will be
activated when build is complete\n";
        }
        if ( $explainDDL ne "NULL" ){
            print " EXPLAIN DDL being used
from $ddlpath${delim}$explainDDL\n";
        }
        else{
            print " EXPLAIN DDL being used
from default sqllib directory\n";
        }
    }
}
1;

```

### ***create\_bufferpools***

```

-----
-- Create Bufferpools
-----
ALTER BUFFERPOOL IBMDEFAULTBP SIZE -1;
COMMIT WORK;
CREATE BUFFERPOOL BP32K ALL NODES SIZE 25000
PAGESIZE 32K;
COMMIT WORK;
ALTER BUFFERPOOL BP32K NUMBLOCKPAGES 5000
BLOCKSIZE 16;
COMMIT WORK;

```



## **create\_indexes**

```
-----  
-----  
-- Create Indexes  
-----  
-----  
values(current timestamp);  
ALTER TABLE TPCD.REGION ADD PRIMARY KEY  
(R_REGIONKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.NATION ADD PRIMARY KEY  
(N_NATIONKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.PART ADD PRIMARY KEY  
(P_PARTKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.SUPPLIER ADD PRIMARY KEY  
(S_SUPPKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.PARTSUPP ADD PRIMARY KEY  
(PS_PARTKEY,PS_SUPPKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.CUSTOMER ADD PRIMARY KEY  
(C_CUSTKEY);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.LINEITEM ADD PRIMARY KEY  
(L_ORDERKEY,L_LINENUMBER);  
COMMIT WORK;  
  
values(current timestamp);  
ALTER TABLE TPCD.ORDERS ADD PRIMARY KEY  
(O_ORDERKEY);  
COMMIT WORK;  
  
values(current timestamp);  
CREATE INDEX TPCD.N_RK ON TPCD.NATION  
(N_REGIONKEY ASC) PCTFREE 0 ;  
commit work;  
  
values(current timestamp);  
CREATE INDEX TPCD.S_NK ON TPCD.SUPPLIER  
(S_NATIONKEY ASC) PCTFREE 0 ;  
commit work;  
  
values(current timestamp);  
CREATE INDEX TPCD.PS_PK ON TPCD.PARTSUPP  
(PS_PARTKEY ASC) PCTFREE 0 ;  
commit work;  
  
values(current timestamp);  
CREATE UNIQUE INDEX TPCD.PS_SKPK ON  
TPCD.PARTSUPP (PS_SUPPKEY ASC, PS_PARTKEY  
ASC) PCTFREE 0 ;  
commit work;
```

```
values(current timestamp);  
CREATE INDEX TPCD.PS_SK ON TPCD.PARTSUPP  
(PS_SUPPKEY ASC) PCTFREE 0 ;  
commit work;
```

```
values(current timestamp);  
CREATE INDEX TPCD.C_NK ON TPCD.CUSTOMER  
(C_NATIONKEY ASC) PCTFREE 0 ;  
commit work;
```

```
values(current timestamp);  
  
select  
substr(tbname,1,10),substr(name,1,18),create  
_time from sysibm.sysindexes  
where tbcreator='TPCD' order by 3;  
select substr(tbname,1,10),  
substr(name,1,18),indextype,substr(colnames,  
1,40) from sysibm.sysindexes where name like  
'SQL%' and tbcreator = 'TPCD' order by 1,2;
```

## **create\_nodegroups**

```
-----  
-----  
-- Create Nodegroups  
-----  
-----  
CREATE NODEGROUP ng_all ON NODES (0 to 127);  
CREATE NODEGROUP ng_node0 ON NODE (0);  
  
COMMIT WORK;
```

## **create\_tables**

```
-----  
-----  
-- Create Tables  
-----  
-----  
CREATE TABLE TPCD.NATION ( N_NATIONKEY  
INTEGER NOT NULL,  
  
N_NAME  
CHAR(25) NOT NULL,  
  
N_REGIONKEY  
INTEGER NOT NULL,  
  
N_COMMENT  
VARCHAR(152) NOT NULL)  
IN SMALL_DATA;  
  
CREATE TABLE TPCD.REGION ( R_REGIONKEY  
INTEGER NOT NULL,  
  
R_NAME  
CHAR(25) NOT NULL,  
  
R_COMMENT  
VARCHAR(152) NOT NULL)
```

<pre>                 IN SMALL_DATA;  CREATE TABLE TPCD.PART ( P_PARTKEY INTEGER NOT NULL,                  P_NAME VARCHAR(55) NOT NULL,                  P_MFGR CHAR(25) NOT NULL,                  P_BRAND CHAR(10) NOT NULL,                  P_TYPE VARCHAR(25) NOT NULL,                  P_SIZE INTEGER NOT NULL,                  P_CONTAINER CHAR(10) NOT NULL,                  P_RETAILPRICE FLOAT NOT NULL,                  P_COMMENT VARCHAR(23) NOT NULL )                  IN DATA_INDEX                  PARTITIONING KEY(P_PARTKEY) USING HASHING;  CREATE TABLE TPCD.SUPPLIER ( S_SUPPKEY INTEGER NOT NULL,                  S_NAME CHAR(25) NOT NULL,                  S_ADDRESS VARCHAR(40) NOT NULL,                  S_NATIONKEY INTEGER NOT NULL,                  S_PHONE CHAR(15) NOT NULL,                  S_ACCTBAL FLOAT NOT NULL,                  S_COMMENT VARCHAR(101) NOT NULL)                  IN DATA_INDEX                  PARTITIONING KEY(S_SUPPKEY) USING HASHING;  CREATE TABLE TPCD.PARTSUPP ( PS_PARTKEY INTEGER NOT NULL, </pre>	<pre>                 PS_SUPPKEY INTEGER NOT NULL,                  PS_AVAILQTY INTEGER NOT NULL,                  PS_SUPPLYCOST FLOAT NOT NULL,                  PS_COMMENT VARCHAR(199) NOT NULL )                  IN DATA_INDEX                  PARTITIONING KEY(PS_PARTKEY) USING HASHING;  CREATE TABLE TPCD.CUSTOMER ( C_CUSTKEY INTEGER NOT NULL,                  C_NAME VARCHAR(25) NOT NULL,                  C_ADDRESS VARCHAR(40) NOT NULL,                  C_NATIONKEY INTEGER NOT NULL,                  C_PHONE CHAR(15) NOT NULL,                  C_ACCTBAL FLOAT NOT NULL,                  C_MKTSEGMENT CHAR(10) NOT NULL,                  C_COMMENT VARCHAR(117) NOT NULL)                  IN DATA_INDEX                  PARTITIONING KEY(C_CUSTKEY) USING HASHING;  CREATE TABLE TPCD.ORDERS ( O_ORDERKEY BIGINT NOT NULL,                  O_CUSTKEY INTEGER NOT NULL,                  O_ORDERSTATUS CHAR(1) NOT NULL,                  O_TOTALPRICE FLOAT NOT NULL,                  O_ORDERDATE DATE NOT NULL,                  O_ORDERPRIORITY CHAR(15) NOT NULL,                  O_CLERK CHAR(15) NOT NULL, </pre>
--	--

```

O_SHIPPRIORITY
INTEGER NOT NULL,

O_COMMENT
VARCHAR(79) NOT NULL)

ORGANIZE BY (O_ORDERDATE)

    IN DATA_INDEX

    PARTITIONING KEY(O_ORDERKEY) USING
HASHING;

CREATE TABLE TPCD.LINEITEM ( L_ORDERKEY
BIGINT NOT NULL,

L_PARTKEY
INTEGER NOT NULL,

L_SUPPKEY
INTEGER NOT NULL,

L_LINENUMBER
INTEGER NOT NULL,

L_QUANTITY
FLOAT NOT NULL,

L_EXTENDEDPRICE
FLOAT NOT NULL,

L_DISCOUNT
FLOAT NOT NULL,

L_TAX
FLOAT NOT NULL,

L_RETURNFLAG
CHAR(1) NOT NULL,

L_LINESTATUS
CHAR(1) NOT NULL,

L_SHIPDATE
DATE NOT NULL,

L_COMMITDATE
DATE NOT NULL,

L_RECEIPTDATE
DATE NOT NULL,

L_SHIPINSTRUCT
CHAR(25) NOT NULL,

L_SHIPMODE
CHAR(10) NOT NULL,

L_COMMENT
VARCHAR(44) NOT NULL)

ORGANIZE BY (L_SHIPDATE)

    IN DATA_INDEX

    PARTITIONING KEY(L_ORDERKEY) USING
HASHING;

```

```
COMMIT WORK;
```

## ***create\_ tablespaces***

```
-----
-- Create Tablespaces
-----
```

```

CREATE regular tablespace data_index
  PAGESIZE 32K
  MANAGED BY database
  using (device '/dev/sda6' 15728624K)
  ON DBPARTITIONNUMS
(0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,
32,34,36,38,40,42,44,46,48,50,52,54,56,58,60
,62,64,66,68,70,72,74,76,78,80,82,84,86,88,9
0,92,94,96,98,100,102,104,106,108,110,112,11
4,116,118,120,122,124,126)
  using (device '/dev/sdb6' 15728624K)
  ON DBPARTITIONNUMS
(1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,
33,35,37,39,41,43,45,47,49,51,53,55,57,59,61
,63,65,67,69,71,73,75,77,79,81,83,85,87,89,9
1,93,95,97,99,101,103,105,107,109,111,113,11
5,117,119,121,123,125,127)

  EXTENTSIZE 16
  PREFETCHSIZE 32
  BUFFERPOOL BP32K
  OVERHEAD 35;

CREATE temporary tablespace TEMP32K
  PAGESIZE 32K
  MANAGED BY database
  using (device '/dev/sda5' 10485744K)
  ON DBPARTITIONNUMS
(0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,
32,34,36,38,40,42,44,46,48,50,52,54,56,58,60
,62,64,66,68,70,72,74,76,78,80,82,84,86,88,9
0,92,94,96,98,100,102,104,106,108,110,112,11
4,116,118,120,122,124,126)
  using (device '/dev/sdb5' 10485744K)
  ON DBPARTITIONNUMS
(1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,
33,35,37,39,41,43,45,47,49,51,53,55,57,59,61
,63,65,67,69,71,73,75,77,79,81,83,85,87,89,9
1,93,95,97,99,101,103,105,107,109,111,113,11
5,117,119,121,123,125,127)

  EXTENTSIZE 16
  PREFETCHSIZE 32
  BUFFERPOOL BP32K;

CREATE temporary tablespace TEMP4K
  PAGESIZE 4K
  MANAGED BY database
  using (device '/dev/sda7' 10485744K)
  ON DBPARTITIONNUMS
(0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,
32,34,36,38,40,42,44,46,48,50,52,54,56,58,60
,62,64,66,68,70,72,74,76,78,80,82,84,86,88,9
0,92,94,96,98,100,102,104,106,108,110,112,11
4,116,118,120,122,124,126)
  using (device '/dev/sdb7' 10485744K)
  ON DBPARTITIONNUMS
(1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,

```

```

33,35,37,39,41,43,45,47,49,51,53,55,57,59,61
,63,65,67,69,71,73,75,77,79,81,83,85,87,89,9
1,93,95,97,99,101,103,105,107,109,111,113,11
5,117,119,121,123,125,127)
EXTENTSIZE 48
PREFETCHSIZE 96;

CREATE regular TABLESPACE small_data
IN NODEGROUP ng_node0
PAGESIZE 4K
MANAGED BY system
USING (
'/data/small_data'
)
BUFFERPOOL ibmdefaultbp
OVERHEAD 25
TRANSFERRATE .3;
COMMIT WORK;

drop tablespace tempspacel;
commit work;

```

### **createuftbls**

```

-----
-- Create Update Function Tables
-----
CREATE TABLE TPCDTEMP.ORDERS_NEW ( APP_ID
INTEGER NOT NULL,
BIGINT NOT NULL,
INTEGER NOT NULL,
CHAR(1) NOT NULL,
FLOAT NOT NULL,
DATE NOT NULL,
CHAR(15) NOT NULL,
CHAR(15) NOT NULL,
INTEGER NOT NULL,
VARCHAR(79) NOT NULL WITH DEFAULT)
PARTITIONING KEY (O_ORDERKEY)
IN DATA_INDEX;

CREATE TABLE TPCDTEMP.ORDERS_DEL ( APP_ID
INTEGER NOT NULL,
BIGINT NOT NULL)
PARTITIONING KEY (O_ORDERKEY)
IN DATA_INDEX;

CREATE TABLE TPCDTEMP.LINEITEM_NEW ( APP_ID
INTEGER NOT NULL,
BIGINT NOT NULL,
INTEGER NOT NULL,
INTEGER NOT NULL,

```

```

INTEGER NOT NULL,
FLOAT NOT NULL,
FLOAT NOT NULL,
FLOAT NOT NULL,
FLOAT NOT NULL,
CHAR(1) NOT NULL,
CHAR(1) NOT NULL,
DATE NOT NULL,
DATE NOT NULL,
DATE NOT NULL,
CHAR(25) NOT NULL,
CHAR(10) NOT NULL,
VARCHAR(44) NOT NULL WITH DEFAULT)
PARTITIONING KEY (L_ORDERKEY)
IN DATA_INDEX;

```

```

CREATE INDEX TPCDTEMP.I_ORDERS_NEW ON
TPCDTEMP.ORDERS_NEW
(APP_ID,
O_ORDERKEY,
O_CUSTKEY,
O_ORDERSTATUS,
O_TOTALPRICE,
O_ORDERDATE,
O_ORDERPRIORITY,
O_CLERK,
O_SHIPPRIORITY,
O_COMMENT);

CREATE INDEX TPCDTEMP.I_LINEITEM_NEW ON
TPCDTEMP.LINEITEM_NEW (APP_ID);

CREATE UNIQUE INDEX TPCDTEMP.I_ORDERS_DEL ON
TPCDTEMP.ORDERS_DEL
(APP_ID, O_ORDERKEY);

COMMIT WORK;

```

### **db2nodes.cfg**

```

0 bbird001 0
1 bbird001 1
2 bbird002 0
3 bbird002 1
4 bbird003 0
5 bbird003 1
6 bbird004 0
7 bbird004 1
8 bbird005 0
9 bbird005 1
10 bbird006 0
11 bbird006 1
12 bbird007 0
13 bbird007 1
14 bbird008 0
15 bbird008 1

```

16 bbird009 0  
17 bbird009 1  
18 bbird010 0  
19 bbird010 1  
20 bbird011 0  
21 bbird011 1  
22 bbird012 0  
23 bbird012 1  
24 bbird013 0  
25 bbird013 1  
26 bbird014 0  
27 bbird014 1  
28 bbird015 0  
29 bbird015 1  
30 bbird016 0  
31 bbird016 1  
32 bbird017 0  
33 bbird017 1  
34 bbird018 0  
35 bbird018 1  
36 bbird019 0  
37 bbird019 1  
38 bbird020 0  
39 bbird020 1  
40 bbird021 0  
41 bbird021 1  
42 bbird022 0  
43 bbird022 1  
44 bbird023 0  
45 bbird023 1  
46 bbird024 0  
47 bbird024 1  
48 bbird025 0  
49 bbird025 1  
50 bbird026 0  
51 bbird026 1  
52 bbird027 0  
53 bbird027 1  
54 bbird028 0  
55 bbird028 1  
56 bbird029 0  
57 bbird029 1  
58 bbird030 0  
59 bbird030 1  
60 bbird031 0  
61 bbird031 1  
62 bbird032 0  
63 bbird032 1  
64 bbird033 0  
65 bbird033 1  
66 bbird034 0  
67 bbird034 1  
68 bbird035 0  
69 bbird035 1  
70 bbird036 0  
71 bbird036 1  
72 bbird037 0  
73 bbird037 1  
74 bbird038 0  
75 bbird038 1  
76 bbird039 0  
77 bbird039 1  
78 bbird040 0  
79 bbird040 1  
80 bbird041 0  
81 bbird041 1  
82 bbird042 0  
83 bbird042 1  
84 bbird043 0  
85 bbird043 1  
86 bbird044 0

87 bbird044 1  
88 bbird045 0  
89 bbird045 1  
90 bbird046 0  
91 bbird046 1  
92 bbird047 0  
93 bbird047 1  
94 bbird048 0  
95 bbird048 1  
96 bbird049 0  
97 bbird049 1  
98 bbird050 0  
99 bbird050 1  
100 bbird051 0  
101 bbird051 1  
102 bbird052 0  
103 bbird052 1  
104 bbird053 0  
105 bbird053 1  
106 bbird054 0  
107 bbird054 1  
108 bbird055 0  
109 bbird055 1  
110 bbird056 0  
111 bbird056 1  
112 bbird057 0  
113 bbird057 1  
114 bbird058 0  
115 bbird058 1  
116 bbird059 0  
117 bbird059 1  
118 bbird060 0  
119 bbird060 1  
120 bbird061 0  
121 bbird061 1  
122 bbird062 0  
123 bbird062 1  
124 bbird063 0  
125 bbird063 1  
126 bbird064 0  
127 bbird064 1

### **load\_db2set.ksh**

```
#!/bin/ksh
db2set DB2NOLIOAIO=no
db2set DB2OPTIONS="-t -v +c"
db2set DB2_EXTENDED_OPTIMIZATION=Y
db2set DB2_LIKE_VARCHAR=Y, Y
db2set DB2_ANTIJOIN=Y
db2set DB2BPVARS=/home/custom/bpvar.cfg
db2set DB2RQTIME=30
db2set DB2COMM=tcPIP
db2set DB2BQTRY=120
db2set DB2_PARALLEL_IO="*"
```

### **run\_db2set.ksh**

```
#!/bin/ksh
db2set DB2NOLIOAIO=no
db2set DB2OPTIONS="-t -v +c"
db2set DB2_EXTENDED_OPTIMIZATION=Y
db2set DB2_LIKE_VARCHAR=Y, Y
db2set DB2_ANTIJOIN=Y
db2set DB2BPVARS=/home/custom/bpvar.cfg
db2set DB2RQTIME=30
```

```
db2set DB2COMM=tcPIP
db2set DB2BQTRY=120
db2set DB2_PARALLEL_IO="**"
```

### **runstats.ddl**

```
RUNSTATS ON TABLE TPCD.NATION WITH
DISTRIBUTION on all columns
and columns (
  n_name like statistics,
  n_comment like statistics )
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.REGION WITH
DISTRIBUTION on all columns
and columns (
  r_name like statistics,
  r_comment like statistics )
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.SUPPLIER WITH
DISTRIBUTION on all columns
and columns (
  s_name like statistics,
  s_address like statistics,
  s_phone like statistics,
  s_comment like statistics)
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.PART WITH
DISTRIBUTION on all columns
and columns (
  p_name like statistics,
  p_mfgr like statistics,
  p_brand like statistics,
  p_type like statistics,
  p_container like statistics,
  p_comment like statistics)
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.PARTSUPP WITH
DISTRIBUTION on all columns
and columns (
  ps_comment like statistics)
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.CUSTOMER WITH
DISTRIBUTION on all columns
and columns (
  c_name like statistics,
  c_address like statistics,
  c_phone like statistics,
  c_mktsegment like statistics,
  c_comment like statistics)
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.ORDERS WITH
DISTRIBUTION on all columns
and columns (
  o_orderstatus like statistics,
  o_orderpriority like statistics,
  o_clerk like statistics,
  o_comment like statistics)
AND detailed INDEXES ALL;
commit;
RUNSTATS ON TABLE TPCD.LINEITEM WITH
DISTRIBUTION on all columns
and columns (
  l_returnflag like statistics,
```

```
  l_linestatus like statistics,
  l_shipinstruct like statistics,
  l_shipmode like statistics,
  l_comment like statistics)
AND detailed INDEXES ALL;
COMMIT WORK;
```

### **load\_tables.ksh**

```
#!/bin/ksh
messages=${TPCD_TMP_DIR}
rawdata=${TPCD_INPUT}
custom=${TPCD_DDL_PATH}

echo "Load Summary Time: " >
${messages}/loadstatus.out

# Nation and Region are loaded into the
current node

db2 connect to tpcd;

echo "Loading Nation at "`date` >>
${messages}/loadstatus.out
db2 "load from ${rawdata}/nation.tbl of del
modified by coldel| fastparse nohead
er messages ${messages}/nation.msg replace
into TPCD.NATION nonrecoverable"

echo "Loading Region at "`date` >>
${messages}/loadstatus.out
db2 "load from ${rawdata}/region.tbl of del
modified by coldel| fastparse nohead
er messages ${messages}/region.msg replace
into TPCD.REGION nonrecoverable"

echo "Loading Partsupp at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_partsupp.ddl
#
echo "Loading Orders at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_orders.ddl
#
echo "Loading Lineitem at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_lineitem.ddl
#
echo "Loading Customer at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_customer.ddl
#
echo "Loading Part at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_part.ddl
#
echo "Loading Supplier at "`date` >>
${messages}/loadstatus.out
db2 -tvf ${custom}/load_tb_supplier.ddl
#

db2 commit;
db2 terminate;

echo "Finished Loading at "`date` >>
${messages}/loadstatus.out
echo "-----" >> ${messages}/loadstatus.out
```

```

#echo "Starting Sanity Chequing at "`date`
>> ${messages}/loadstatus.out
db2 terminate;

echo "Finished Loading at "`date` >>
${messages}/loadstatus.out
echo "-----
-----" >> ${messages}/loadstatus.out

#echo "Starting Sanity Chequing at "`date`
>> ${messages}/loadstatus.out
#db2 connect to tpcd;
#db2 "select count_big(*) as lineitem from
tpcd.lineitem" >> ${messages}/loadsta
tus.out
#db2 "select count_big(*) as orders from
tpcd.orders" >> ${messages}/loadstata
tus.out
#db2 "select count_big(*) as partsupp from
tpcd.partsupp" >> ${messages}/loadsta
tus.out
#db2 "select count_big(*) as customer from
tpcd.customer" >> ${messages}/loadsta
tus.out
#db2 "select count_big(*) as part from
tpcd.part" >> ${messages}/loadstatus.out
#db2 "select count_big(*) as supplier from
tpcd.supplier" >> ${messages}/loadsta
tus.out
#db2 "select count(*) as nation from
tpcd.nation" >> ${messages}/loadstatus.out
#db2 "select count(*) as region from
tpcd.region" >> ${messages}/loadstatus.out
#db2 terminate;
#echo "Finish Sanity Chequing at "`date` >>
${messages}/loadstatus.out

```

### ***load\_tb\_customer.ddl***

```

load from
    customer.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/customer.msg
replace into TPCD.CUSTOMER
nonrecoverable
partitioned db config mode load_only
part_file_location /flat0
;

```

### ***load\_tb\_lineitem.ddl***

```

load from
    lineitem.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/lineitem.msg
replace into TPCD.LINEITEM
nonrecoverable
partitioned db config mode load_only
part_file_location /flat0

```

```

;
load_tb_orders.ddl
load from
    orders.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/orders.msg
replace into TPCD.ORDERS
nonrecoverable
partitioned db config mode load_only
part_file_location /flat0
;

```

### ***load\_tb\_part.ddl***

```

load from
    part.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/part.msg
replace into TPCD.PART
nonrecoverable
partitioned db config mode load_only
part_file_location /flat0
;

```

### ***load\_tb\_partsupp.ddl***

```

load from
    partsupp.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/partsupp.msg
replace into TPCD.PARTSUPP
nonrecoverable
partitioned db config mode load_only
part_file_location /flat0
;

```

### ***load\_tb\_supplier.ddl***

```

load from /flat0/supplier.tbl
of del
modified by coldel|
    fastparse
    messages
/home/tpch/tmp/supplier.msg
replace into TPCD.SUPPLIER
nonrecoverable
CPU_PARALLELISM 4
;

```

### ***load\_dbcfg.ddl***

```

UPDATE DB CFG FOR TPCD USING DBHEAP 15000
SORTHEAP 25000 SHEAPTHRES_SHR 0

```

```

APPGROUP_MEM_SZ 2000 DFT_QUERYOPT 7
DFT_DEGREE 4 NUM_FREQVALUES 0 NUM_QUANTILES
600 LOCKLIST 16384 MAXLOCKS 60
CHNGPGS_THRESH 15 NUM_IOCLEANERS 1
NUM_IOSERVERS 3 MAXFILOP 1024 LOGFILSIZ
10000 LOGPRIMARY 10 LOGSECOND 10 SOFTMAX 750
DATABASE_MEMORY AUTOMATIC UTIL_HEAP_SZ 50000
;

```

### ***load\_dbmcfg.ddl***

```

UPDATE DBM CFG USING
CPUSPEED 1.889377e-06
SHEAPTHRES 100000
MAX_QUERYDEGREE ANY
INTRA_PARALLEL NO
SVCENAME DB2_tpch_SVC
NUMDB 1
MAX_TIME_DIFF 1440
DFT_MON_TIMESTAMP OFF
DIAGLEVEL 0
NOTIFYLEVEL 0
;

```

### ***run\_dbcfg.ddl***

```

UPDATE DB CFG FOR TPCD USING DBHEAP 10000
SORTHEAP 20000 SHEAPTHRES_SHR 250
DATABASE_MEMORY automatic UTIL_HEAP_SZ 5000
DFT_QUERYOPT 7 DFT_DEGREE 1 NUM_FREQVALUES 0
NUM_QUANTILES 300 LOCKLIST 40000 MAXLOCKS 20
CHNGPGS_THRESH 60 NUM_IOCLEANERS 1
NUM_IOSERVERS 4 MAXFILOP 1024 LOGFILSIZ
50000 LOGPRIMARY 4 LOGSECOND 1 SOFTMAX 360
LOGBUFSZ 2048 MINCOMMIT 1 APPLHEAPSZ 1024
STMTHEAP 10000 BUFFPAGE 70000
;

```

### ***run\_dbmcfg.ddl***

```

UPDATE DBM CFG USING
HEALTH_MON OFF
SHEAPTHRES 100000
MAX_QUERYDEGREE ANY
INTRA_PARALLEL NO
FCM_NUM_BUFFERS 16384
FCM_NUM_RQB 8192
NUM_POOLAGENTS 64
NUM_INITAGENTS 4
JAVA_HEAP_SZ 2048
CONN_ELAPSE 20
DFT_MON_TIMESTAMP OFF
;

```

### ***setlogpath.ksh***

```

#!/usr/bin/ksh

typeset -i p

for p in 0 2 4 6 8 10 12 14 16 18 20 22 24
26 28 30 32 34 36 38 40 42 44 46 48 50 52 54
56 58 60 62 64 66 68 70 72 74 76 78 80 82 84
86 88 90 92 94 96 98 100 102 104 106 108 110
112 114 116 118 120 122 124 126; do

```

```

db2_all "\<<+&p< db2 update db cfg for
tpcd using newlogpath /dev/raw/raw1"

```

done

```

for p in 1 3 5 7 9 11 13 15 17 19 21 23 25
27 29 31 33 35 37 39 41 43 45 47 49 51 53 55
57 59 61 63 65 67 69 71 73 75 77 79 81 83 85
87 89 91 93 95 97 99 101 103 105 107 109 111
113 115 117 119 121 123 125 127; do

```

```

db2_all "\<<+&p< db2 update db cfg for
tpcd using newlogpath /dev/raw/raw2"
done

```

### ***tpcd.setup***

```

# NOTE: ALL variable defitions must have a
comment at the end - haven't got
# the getvars script recognizing the
uncommented line yet
TPCD_PLATFORM=linux #
aix, nt, sun .... #
TPCD_VERSION=2 # 1
or 2 (Version of tpcd). Default 1 #
TPCD_DBNAME=TPCD #
name to create database under #
TPCD_WORKLOAD=H # TPC
version (R for TPCR, H for TPCH) # top
TPCD_AUDIT_DIR=/home/tpch/tpcd # top
level directory of tar file for # all
the tpcd scripts #
TPCD_PRODUCT=v5 # v5
or pe #
pe if you really are using pe v1.2! # Use
I won't guarantee that it will work! # but
TPCD_MODE=mpp #
uni/smp/mln/mpp #
TPCD_PHYS_NODE=64 #
number of physical nodes #
TPCD_LN_PER_PN=2 #
number of logical nodes per physical node #
TPCD_SF=1000 #
size of the database (1=1GB,...) to # get
test size databases use: #
0.012 = 12MB #
0.1 = 100MB #
TPCD_BUILD_STAGE=ALL #
where to start the build - currently the #
following is possible: #
ALL - do everything (create,load, #
index,stats,config) (Default) #
CRTTBSP - start after create db and #
config setting. Start righ at #
create tbsp #
LOAD - start from the load of the tables #

```



```

INDEX - start from the index creation # use
(NOTE if earlyindex is specified, #
then this will do the create index #
followed by the load...) #
RUNSTATS - start from the runstats #
(NOTE Do not use this option if #
distribution stats are gathered #
as part of the load, this will #
start after the load and indices #
have been created. #
CONFIG - start from the setting up of #
the benchmark runs config setup #
TPCD_DBPATH=/home/tpch/DBPATH # path
for database (defaults to home) #
TPCD_DDL_PATH=/home/tpch/custom #
path for all ddl files and customized #
scripts (load script), config files,etc #
TPCD_BUFFERPOOL_DEF=create_bufferpools.ddl #
# name of file with bufferpool definitions #
# and sizes #
TPCD_NODEGROUP_DEF=create_nodegroups.ddl #
# name of file in ddlpath with nodegroup #
# definitions #
TPCD_EXPLAIN_DDL=NULL #
file with DDL for explains statments #
this is NULL then uses the default #
puts it in USERSPACE1 across all #
nodes...nt 1TB found it was faster if #
just in a single node nodegroup #
TPCD_TBSP_DDL=create_tablespace.ddl # ddl
file for tablespaces #
TPCD_DDL=create_tables.ddl # ddl
file for tables #
TPCD_QUAL_TBSP_DDL=create_tablespace_qual.d #
ddl # ddl file for tablespaces for qual #
TPCD_QUAL_DDL=create_tables.ddl # ddl
file for qualification database #
tablespaces and tables should be identical #
regular ddl except container names #
TPCD_INDEXDDL=create_indexes.ddl # ddl
file for indexes #
TPCD_EXTRAIINDEX=no # no
= no extra indexes #
filename = If you want to create some #
indices before #
load, and some indices after, then #
# use
this additional file to specify the
TPCD_ADD_RI=NULL #
file name that contains any RI #
constraints to add after index creation #
to NULL (default) if unused #
indices to create after the load. #
TPCD_AST=NULL #
file name that contains complete AST #
definition including connection to #
database, summary table creation, #
population, indexing and runstats. #
TPCD_RUNSTATS=runstats.ddl # ddl
file for runstats. If you have #
created indices before the load (ie #
TPCD_EARLYINDEX=yes), have specified to #
gather stats on the load command (either #
through your own load script or by using #
TPCD_LOADSTATS=yes, AND you have #
specified a file for TPCD_EXTRAIINDEX #
then this runstats file should include #
runstats commands specifically for #
extra indices. #
TPCD_RUNSTATSHORT=NULL #
NOTE!! THIS IS BUGGY....I can't get it to #
work on UNI successfully #
file for short runstats that are #
in the background while the #
TPCD_RUNSTATS are run in the foreground #
the build. If this is used, then #
TPCD_RUNSTATS should have the runstats #
command for lineitem and #
TPCD_RUNSTATSHORT should have runstats #
commands for all other tables. #
TPCD_DBGEN=/home/tpch/tpcd/appendix.v2/dbgen #
# path name to data generation code #
Parameters used to specify source of #
data for load scripts #
TPCD_INPUT=/flat0 #
NULL - use dbgen generated data OR #
path name - to the pre-generated #
flat files #

```

```

#
#
TPCD_QUAL_INPUT=NULL # used in load script only #
NULL - use dbgen generated data OR # TPCD_LOAD_PARALLELISM=0 #
# degree of parallelism to use on load # 0 =
path name - to the pre-generated # use the "intelligent default" that # the
flat files # load will chose at run time #
TPCD_TAILOR_DIR=/home/tpch/tpcd/tailor # used in load script only #
# path name for the directory used to # TPCD_COPY_DIR=NULL #
generate split specific config files # directory where copy image is created # on
# only used for partitioned environment # load command CURRENTLY UNUSED #
TPCD_EARLYINDEX=no # used in load script only #
create indexes before the load # TPCD_FASTPARSE=yes # use
# fastparse on load #
LOAD specific parameters follow: # used in load script only #
TPCD_LOAD_DB2SET_SCRIPT=load_db2set.ksh # #
Script that contains the db2set commands # #
# for Backup and logfile specific parameters #
the load process Use NULL if not # follow: #
specified # TPCD_BACKUP_DIR=/home/tpch/tpcd/backupdir #
TPCD_LOAD_CONFIGFILE=load_dbcfg.ddl # # directory where backup files are placed #
#config file with specific database config # TPCD_LOGPRIMARY=NULL #
# NULL/value = how many primary log files # to
parms for the load/index/runstats part # configure. If NULL is specified then # the
# of # default is not changed. #
the build. # set TPCD_LOGFILSIZ=NULL #
# set NULL/value = how 4KB pages to use for #
to NULL if use defaults # logfilsiz db cfg parameter. If NULL is #
TPCD_LOAD_DBM_CONFIGFILE=load_dbmcfg.ddl # #
# config file with specific # specified then the default is not changed #
# database manager config parts for the # TPCD_LOGSECOND=NULL #
# load/index/runstats part of the build. # NULL/value = how many secondary log files # to
# set to NULL if use defaults # configure. If NULL is specified then # the
TPCD_LOAD_QUALCONFIGFILE=load_dbcfg.ddl # #
config file with specific database config # default is not changed. #
# TPCD_LOG_DIR=NULL #
parms for the load/index/runstats part # directory where log files stored.. #
# of #
the build for qualification db. # NULL leaves them in the dbpath #
# set TPCD_LOG_QUAL_DIR=/home/logs #
to NULL if use defaults # directory where qual log files stored #
TPCD_LOAD_DBM_QUALCONFIGFILE=load_dbmcfg.ddl # #
# config file with specific # NULL leaves them in the dbpath #
# TPCD_LOG=no #
database manager config parts for the # yes/no - whether to turn LOG_RETAIN on #
# #
load/index/runstats part of the build. # i.e. are backups needed to be taken #
# set #
to NULL if use defaults # #
TPCD_LOADSTATS=no # #
gather statistics during load # CONFIG specific parameters #
# TPCD_DB2SET_SCRIPT=NULL #
ignored if EARLYINDEX is not set # Script that contains the db2set commands # for
# due #
to runstats limitation # the benchmark run. Use NULL if not #
TPCD_TEMP=/tmp/tpch # #
path for LOAD temp files # specified #
# TPCD_CONFIGFILE=run_dbcfg.ddl #
used in load script only # name of configuration file in ddl path #
TPCD_SORTBUF=4096 # #
sortbuf size for LOAD # that will be used for the benchmark run #

```

```

TPCD_DBM_CONFIG=run_dbmcfg.ddl # # v2
name of config file for database manager # cfg #
parms #
TPCD_QUALCONFIGFILE=run_dbcfg.ddl # #
name of database cfg file in ddl path # for # any
qualification database #
TPCD_DBM_QUALCONFIG=run_dbmcfg.ddl # TPCD_QUAL_DBNAME=TPCDQUAL #
name of config file for database # TPCD_NUMSTREAM=7 #
manager cfg parms # TPCD_FLATFILES=/data/ufdata #
TPCD_MACHINE=small # set where to generate/read flat files # for
to NULL if using load config file #
big/medium/small size of machine used to # update functions
determine buffpage, sorheap,sheapthres # #
ioservers parms for load, create # #
index and runstats # TPCD_PRELOAD_STAGING_TABLE_SCRIPT=NULL #
NOTE that this parameter is ignored if # #
TPCD_LOAD_CONFIGFILE is specified # a # and gathering stats on sample UF data
TPCD_SMPDEGREE=1 # # Note that the data used is sample data
1...# of degrees of parallelism to run # #
with # #
TPCD_AGENTPRI=NULL # set TPCD_DELETE_STAGING_TABLE_SQL=remove_UFtable
agentpri to this value (default # is s.ddl # file that contains the sql for
SYSTEM) # deleting
TPCD_ACTIVATE=no # # the preloaded data from the staging
activate the database upon build # #
completion # #
# run #
specific parameters #
TPCD_AUDIT=yes # #
no/yes # no #
- don't set up qualification db stuff # yes # The
- set up qualification db queries # #
- build the update function tables # #
and data before we get into the # #
timing of the creation of the # #
tables and the load. # #
TPCD_TMP_DIR=/tmp/tpch # #
place to put temp working files # #
TPCD_SHARED_TEMP_FULL_PATHNAME=/home/tpch/sq #
llib/tmp # just added # #
TPCD_QUERY_TEMPLATE_DIR=standard.V2 # #
subdirectory in AUDIT_DIR/queries # to #
use as the source of the query # #
templates. Currently there are # #

```

```

# be
evenly divisible by this number.
#
this controls the load portion of the
#
insert routine for partitioned databases
TPCD_CONCURRENT_DELETES=2 #
number of delete chunks that are run
TPCD_SPLIT_DELETES=64 #
number of portions to split the delete
#
function into.
#
this variable is only valid in UNI/SMP
#
mode.
TPCD_GEN_UPDATEPAIRS=18 #
number of pairs of update function data
# to
generate
# if
0 the update data generation and
#
setup will not be done. use this if
# you
don't want to run the update
#
functions (Update functions not
#
fully tested in new env't yet)
TPCD_GENERATE_SEED_FILE=yes #
yes/no These are the seed files for
#
generating the query substitution values
# yes
- generate a seed file base on
#
year/month/day (for audited runs)
# no
- use qgen's default seeds
TPCD_RUN_ON_MULTIPLE_NODES=NULL # pe
V1.2 only - will we be running each
#
query stream of throughput starting at
#
different nodes or from same node
TPCD_STATS_INTERVAL=30 #
timing interval for vmstats/iostats
TPCD_STATS_THRU_INT=300 #
timing interval for vmstats/iostats for
#
throughput run
TPCD_GATHER_STATS=off #
on/off - only implement for AIX yet
# on
= gather statistics around power
#
test run (vmstat,iostat,netstat)
# off
= no stats gathered during power run
#
TPCD_UFTEMP=DATA_INDEX #
base name of tablespace(s) where the
#
staging tables for the update functions
# are
created
#
this name will be used as the
#
basename for the tablespaces...eg
#
UFTEMP1 UFTEMP2 .... #
TPCD_HAVECOMPILER=yes #
rebuild tpcdbatch executable
#
yes/no
TPCD_SLEEP=5 # ?
TPCD_INLISTMAX=default # max
num of keys to delete at a time
# for
UF2, use "default" for default.
TPCD_LOAD_SCRIPT=load_tables.ksh #
script to run for loading tables
# in
TPCD_DDLPATH directory under mln/mpp
#
leave as NULL if using default genloaduni
TPCD_LOAD_SCRIPT_QUAL=NULL #
script to run for loading tables in
#
TPCD_DDLPATH directory under mln/mpp
# for
QUAL db
TPCD_ROOTPRIV=no # do
you have root privileges to be able
# get
values of things like schedtune
# and
vmtune (currently on AIX only)
#
acid test specific information
TPCD_DB2LOG=/home/tpch/sqllib/db2dump
# directory wehre the db2diag.log can
# be
found for the durability tests
TPCD_APPEND_ON=no # set
to no if the cluster indexes are used

```

## Appendix C: Qualification Query

### Output

#### Qualification Queries

#### Query 1

```

Start timestamp 02/10/05 12:55:40.323335
-----
-- Query 01 - Var_0 Rev_01 - Pricing Summary
Report Query

Tag: Q1      Stream: -1      Sequence number: 17

select
l_returnflag,
l_linestatus,
sum(l_quantity) as sum_qty,
sum(l_extendedprice) as sum_base_price,
sum(l_extendedprice * (1 - l_discount)) as
sum_disc_price,

```



9936.220 Supplier#000005250  
 UNITED KINGDOM 249  
 Manufacturer#4  
 B3rqp0xbSEim4Mpy2RH J  
 33-320-228-2957 blithely special packages  
 are. stealthily express deposits across the  
 closely final instructi  
 9923.770 Supplier#000002324  
 GERMANY 29821  
 Manufacturer#4 y3OD9UywSTok  
 17-779-299-1839 quickly express packages  
 breach quiet pinto beans. requ

... Lines Deleted

7894.560 Supplier#000007981  
 GERMANY 85472  
 Manufacturer#4 NSJ96vMROAbeXP  
 17-963-404-3760 regular, even theodolites  
 integrate carefully. bold, special  
 theodolites are slyly fluffily iron  
 7887.080 Supplier#000009792  
 GERMANY 164759  
 Manufacturer#3  
 Y28ITVeYriT3kIGdV2K8fSZ V2UqT5H1Otz  
 17-988-938-4296 pending, ironic packages  
 sleep among the carefully ironic accounts.  
 quickly final accounts

7871.500 Supplier#000007206  
 RUSSIA 104695  
 Manufacturer#1 3w  
 fNCnrVmvJjE95sgWZzvW 32-  
 432-452-7731 furiously dogged pinto beans  
 cajole. bold, express notornis until the  
 slyly pending

7852.450 Supplier#000005864  
 RUSSIA 8363  
 Manufacturer#4 WCNfBPZeSXh3h,c  
 32-454-883-3821 blithely regular deposits  
 7850.660 Supplier#000001518

UNITED KINGDOM 86501  
 Manufacturer#1 ONda3YJiHKJOC  
 33-730-383-3892 furiously final accounts  
 wake carefully idle requests. even dolphins  
 wake acc

7843.520 Supplier#000006683  
 FRANCE 11680  
 Manufacturer#4  
 2Z0JGkiv01Y00oCFwUGfviIbhzCdy  
 16-464-517-8943 carefully bold accounts  
 doub

Number of rows retrieved is: 100

Stop timestamp 02/10/05 12:53:11.589103  
 Query Time = 0.6 secs

### Query 3

Start timestamp 02/10/05 12:55:10.769335

-- Query 03 - Var\_0 Rev\_01 - Shipping  
 Priority Query  
 Tag: Q3 Stream: -1 Sequence number: 11

```
select
l_orderkey,
sum(l_extendedprice * (1 - l_discount)) as
revenue,
o_orderdate,
o_shippriority
from
tpcd.customer,
tpcd.orders,
tpcd.lineitem
where
c_mktsegment = 'BUILDING'
and c_custkey = o_custkey
and l_orderkey = o_orderkey
and o_orderdate < date ('1995-03-15')
and l_shipdate > date ('1995-03-15')
group by
l_orderkey,
o_orderdate,
o_shippriority
order by
revenue desc,
o_orderdate
fetch first 10 rows only
```

L_ORDERKEY	O_ORDERDATE	O_SHIPRIORITY	REVENUE
2456423	1995-03-05	0	406181.011
3459808	1995-03-04	0	405838.699
492164	1995-02-19	0	390324.061
1188320	1995-03-09	0	384537.936
2435712	1995-02-26	0	378673.056
4878020	1995-03-12	0	378376.795
5521732	1995-03-13	0	375153.922
2628192	1995-02-22	0	373133.309
993600	1995-03-05	0	371407.459
2300070	1995-03-13	0	367371.145

Number of rows retrieved is: 10

Stop timestamp 02/10/05 12:55:23.648548  
 Query Time = 12.9 secs

### Query 4

Start timestamp 02/10/05 12:55:26.469729

```
-----
-
-- Query 04 - Var_0 Rev_01 - Order Priority
Checking Query
```

Tag: Q4 Stream: -1 Sequence number: 14

```
select
o_orderpriority,
count(*) as order_count
from
tpcd.orders
where
o_orderdate >= date ('1993-07-01')
and o_orderdate < date ('1993-07-01') + 3
month
and exists (
select
*
from
tpcd.lineitem
where
l_orderkey = o_orderkey
and l_commitdate < l_receiptdate
)
group by
o_orderpriority
order by
o_orderpriority
```

O_ORDERPRIORITY	ORDER_COUNT
1-URGENT	10594
2-HIGH	10476
3-MEDIUM	10410
4-NOT SPECIFIED	10556
5-LOW	10487

Number of rows retrieved is: 5

Stop timestamp 02/10/05 12:55:39.314543  
Query Time = 12.8 secs

### Query 5

Start timestamp 02/10/05 12:56:18.059724

```
-- Query 05 - Var_0 Rev_02 Local Supplier
Volume Query
```

Tag: Q5 Stream: -1 Sequence number: 20

```
select
n_name,
sum(l_extendedprice * (1 - l_discount)) as
revenue
from
tpcd.customer,
tpcd.orders,
tpcd.lineitem,
```

```
tpcd.supplier,
tpcd.nation,
tpcd.region
where
c_custkey = o_custkey
and o_orderkey = l_orderkey
and l_suppkey = s_suppkey
and c_nationkey = s_nationkey
and s_nationkey = n_nationkey
and n_regionkey = r_regionkey
and r_name = 'ASIA'
and o_orderdate >= date ('1994-01-01')
and o_orderdate < date ('1994-01-01') + 1
year
group by
n_name
order by
revenue desc
```

N_NAME	REVENUE
INDONESIA	55502041.170
VIETNAM	55295086.997
CHINA	53724494.257
INDIA	52035512.000
JAPAN	45410175.695

Number of rows retrieved is: 5

Stop timestamp 02/10/05 12:56:33.420652  
Query Time = 15.4 secs

### Query 6

Start timestamp 02/10/05 12:53:39.953610

```
-- Query 06 - Var_0 Rev_01 - Forecasting
Revenue Change Query
```

Tag: Q6 Stream: -1 Sequence number: 5

```
select
sum(l_extendedprice * l_discount) as revenue
from
tpcd.lineitem
where
l_shipdate >= date ('1994-01-01')
and l_shipdate < date ('1994-01-01') + 1
year
and l_discount between .06 - 0.01 and .06 +
0.01
and l_quantity < 24
```

REVENUE

```

-----
123141078.228

Number of rows retrieved is:      1
-----
-

Stop timestamp 02/10/05 12:53:41.473944
Query Time =                      1.5 secs

```

### Query 7

```

Start timestamp 02/10/05 12:56:33.420652

-----
-

-- Query 07 - Var_0 Rev_01 - Volume Shipping
Query

Tag: Q7      Stream: -1      Sequence number: 21

```

```

select
supp_nation,
cust_nation,
l_year,
sum(volume) as revenue
from
(
select
n1.n_name as supp_nation,
n2.n_name as cust_nation,
year (l_shipdate) as l_year,
l_extendedprice * (1 - l_discount) as volume
from
tpcd.supplier,
tpcd.lineitem,
tpcd.orders,
tpcd.customer,
tpcd.nation n1,
tpcd.nation n2
where
s_suppkey = l_suppkey
and o_orderkey = l_orderkey
and c_custkey = o_custkey
and s_nationkey = n1.n_nationkey
and c_nationkey = n2.n_nationkey
and (
(n1.n_name = 'FRANCE' and n2.n_name =
'GERMANY')
or (n1.n_name = 'GERMANY' and n2.n_name =
'FRANCE')
)
and l_shipdate between date('1995-01-01')
and date('1996-12-31')
) as shipping
group by
supp_nation,
cust_nation,
l_year
order by
supp_nation,
cust_nation,
l_year

```

```

SUPP_NATION          CUST_NATION
L_YEAR      REVENUE
-----
-
FRANCE          GERMANY
1995          54639732.734
FRANCE          GERMANY
1996          54633083.308
GERMANY          FRANCE
1995          52531746.670
GERMANY          FRANCE
1996          52520549.022

```

```

Number of rows retrieved is:      4
-----
-

Stop timestamp 02/10/05 12:56:38.554067
Query Time =                      5.1 secs

```

### Query 8

```

Start timestamp 02/10/05 12:54:07.898720

-----
-

-- Query 08 - Var_0 Rev_01 - National Market
Share Query

Tag: Q8      Stream: -1      Sequence number: 8

```

```

select
o_year,
sum(case
when nation = 'BRAZIL' then volume
else 0
end) / sum(volume) as mkt_share
from
(
select
year(o_orderdate) as o_year,
l_extendedprice * (1 - l_discount) as
volume,
n2.n_name as nation
from
tpcd.part,
tpcd.supplier,
tpcd.lineitem,
tpcd.orders,
tpcd.customer,
tpcd.nation n1,
tpcd.nation n2,
tpcd.region
where
p_partkey = l_partkey
and s_suppkey = l_suppkey
and l_orderkey = o_orderkey
and o_custkey = c_custkey
and c_nationkey = n1.n_nationkey
and n1.n_regionkey = r_regionkey
and r_name = 'AMERICA'
and s_nationkey = n2.n_nationkey
and o_orderdate between date('1995-01-01')
and date ('1996-12-31')

```



```

and p_type = 'ECONOMY ANODIZED STEEL'
) as all_nations
group by
o_year
order by
o_year

```

```

O_YEAR      MKT_SHARE
-----
1995                0.034
1996                0.041

```

Number of rows retrieved is: 2

-

Stop timestamp 02/10/05 12:54:24.542533  
Query Time = 16.6 secs

### Query 9

Start timestamp 02/10/05 12:53:11.589103

-

-- Query 09 - Var\_0 Rev\_01 - Product Type  
Profit Measure Query

Tag: Q9 Stream: -1 Sequence number: 3

```

select
nation,
o_year,
sum(amount) as sum_profit
from
(
select
n_name as nation,
year(o_orderdate) as o_year,
l_extendedprice * (1 - l_discount) -
ps_supplycost * l_quantity as amount
from
tpcd.part,
tpcd.supplier,
tpcd.lineitem,
tpcd.partsupp,
tpcd.orders,
tpcd.nation
where
s_suppkey = l_suppkey
and ps_suppkey = l_suppkey
and ps_partkey = l_partkey
and p_partkey = l_partkey
and o_orderkey = l_orderkey
and s_nationkey = n_nationkey
and p_name like '%green%'
) as profit
group by
nation,
o_year
order by
nation,
o_year desc

```

```

NATION      O_YEAR
SUM_PROFIT
-----
ALGERIA      1998
31342867.235
ALGERIA      1997
57138193.023
ALGERIA      1996
56140140.133
ALGERIA      1995
53051469.653
ALGERIA      1994
53867582.129

```

... Lines Deleted

```

VIETNAM      1996
50488161.410
VIETNAM      1995
49658284.612
VIETNAM      1994
50596057.261
VIETNAM      1993
50953919.152
VIETNAM      1992
49613838.315

```

Number of rows retrieved is: 175

-

Stop timestamp 02/10/05 12:53:37.899615  
Query Time = 26.3 secs

### Query 10

Start timestamp 02/10/05 12:55:52.631102

-

-- Query 10 - Var\_0 Rev\_01 - Returned Item  
Reporting Query

Tag: Q10 Stream: -1 Sequence number: 18

```

select
c_custkey,
c_name,
sum(l_extendedprice * (1 - l_discount)) as
revenue,
c_acctbal,
n_name,
c_address,
c_phone,
c_comment
from
tpcd.customer,
tpcd.orders,
tpcd.lineitem,
tpcd.nation
where
c_custkey = o_custkey
and l_orderkey = o_orderkey
and o_orderdate >= date ('1993-10-01')

```

```

and o_orderdate < date ('1993-10-01') + 3
month
and l_returnflag = 'R'
and c_nationkey = n_nationkey
group by
c_custkey,
c_name,
c_acctbal,
c_phone,
n_name,
c_address,
c_comment
order by
revenue desc
fetch first 20 rows only

```

C_CUSTKEY	C_NAME	C_ACCTBAL	C_ADDRESS	C_PHONE	C_COMMENT
57040	Customer#0000057040				
734235.246		632.870	JAPAN		
Eioyzjf4pp					
22-895-641-3466	requests sleep blithely				
about the furiously i					
143347	Customer#0000143347				
721002.695		2557.470	EGYPT		
laReFYv,Kw4					
14-742-935-3718	fluffily bold excuses				
haggle finally after the u					
60838	Customer#0000060838				
679127.308		2454.770	BRAZIL		
64EaJ5vMAHWJlBOxJklpNc2RjiWE					
12-913-494-9813	furiously even pinto beans				
integrate under the ruthless foxes; ironic,					
even dolphins across the slyl					
101998	Customer#0000101998				
637029.567		3790.890	UNITED KINGDOM		
KINGDOM		01c9CILnNtfoQYmZj			
33-593-865-6378	accounts doze blithely!				
enticing, final deposits sleep blithely					
special accounts. slyly express accounts pla					
125341	Customer#0000125341				
633508.086		4983.510	GERMANY		
S29ODD6bceU8QSuuEJznkNaK					
17-582-695-5962	quickly express requests				
wake quickly blithely					
25501	Customer#0000025501				
620269.785		7725.040	ETHIOPIA		
W556MXuoiaYCCZamJI,Rn0B4ACUGdkQ8DZ					
15-874-808-6793	quickly special requests				
sleep evenly among the special deposits.					
special deposi					
115831	Customer#0000115831				
596423.867		5098.100	FRANCE		
rFeBbEEyk dl ne7zV5fDrmiq1oK09wV7pxqCgIc					
16-715-386-3788	carefully bold excuses				
sleep alongside of the thinly idle					
84223	Customer#0000084223				
594998.024		528.650	UNITED KINGDOM		
KINGDOM		nAVZCs6BaWap rrM27N			
2qBznc5WBauxbA		33-442-824-8191			
pending, final ideas haggle final requests.					

```

unusual, regular asymptotes affix according
to the even foxes.
54289 Customer#0000054289
585603.392 5583.020 IRAN
vXCxoCsU0Bad5JQI ,oobkZ
20-834-292-4707 express requests sublate
blithely regular requests. regular, even
ideas solve.
39922 Customer#0000039922
584878.113 7321.110 GERMANY
Zgy4s5012GKN4pLDPBU8m342gIw6R
17-147-757-8036 even pinto beans haggle.
slyly bold accounts inte
6226 Customer#0000006226
576783.761 2230.090 UNITED KINGDOM
8gPu8,NPGkfyQQ0hcIYUGPIBWC,ybP5g,
33-657-701-3391 quickly final requests
against the regular instructions wake
blithely final instructions. pa
922 Customer#0000000922
576767.533 3869.250 GERMANY
Az9RFaut7NkPnc5zSD2PwHgVwr4jRzq
17-945-916-9648 boldly final requests
cajole blith
147946 Customer#0000147946
576455.132 2030.130 ALGERIA
iANyZHjghyy7Ajah0pTrYyhJ
10-886-956-3143 furiously even accounts are
blithely above the furiouslyl
115640 Customer#0000115640
569341.193 6436.100 ARGENTINA
Vtgfia9qI 7EpHgecU1X
11-411-543-4901 final instructions are
slyly according to the
73606 Customer#0000073606
568656.858 1785.670 JAPAN
xuR0Tro5yChDfOCrjkd2ol
22-437-653-6966 furiously bold orbits about
the furiously busy requests wake across the
furiously quiet theodolites. d
110246 Customer#0000110246
566842.981 7763.350 VIETNAM
7KzflgX MDOq7sOkI
31-943-426-9837 dolphins sleep blithely
among the slyly final
142549 Customer#0000142549
563537.237 5085.990 INDONESIA
ChqEoK430ysjdHbtKcP6dKqjNyyvvi9
19-955-562-2398 regular, unusual
dependencies boost slyly; ironic attainments
nag fluffily into the unusual packages?
146149 Customer#0000146149
557254.986 1791.550 ROMANIA
s87fvzFQpU
29-744-164-6487 silent, unusual requests
detect quickly slyly regul
52528 Customer#0000052528
556397.351 551.790 ARGENTINA
NFztyTOR10UOJ
11-208-192-3205 unusual requests detect.
slyly dogged theodolites use slyly. deposit
23431 Customer#0000023431
554269.536 3381.860 ROMANIA
HgiV0phqhaIa9aydNoIlb
29-915-458-2654 instructions nag quickly.
furiously bold accounts cajol
Number of rows retrieved is: 20

```

-----  
-  
Stop timestamp 02/10/05 12:56:05.558944  
Query Time = 12.9 secs

### Query 11

Start timestamp 02/10/05 12:55:39.314543  
-----  
-

-- Query 11 - Var\_0 Rev\_01 - Important Stock  
Identification Query

Tag: Q11 Stream: -1 Sequence number: 15

```
select
ps_partkey,
sum(ps_supplycost * ps_availqty) as value
from
tpcd.partsupp,
tpcd.supplier,
tpcd.nation
where
ps_suppkey = s_suppkey
and s_nationkey = n_nationkey
and n_name = 'GERMANY'
group by
ps_partkey having
sum(ps_supplycost * ps_availqty) > (
select
sum(ps_supplycost * ps_availqty) *
0.0001000000
from
tpcd.partsupp,
tpcd.supplier,
tpcd.nation
where
ps_suppkey = s_suppkey
and s_nationkey = n_nationkey
and n_name = 'GERMANY'
)
order by
value desc
```

PS_PARTKEY	VALUE
129760	17538456.860
166726	16503353.920
191287	16474801.970
161758	16101755.540
34452	15983844.720

... Lines Deleted

154731	7888301.330
101674	7879324.600
51968	7879102.210
72073	7877736.110
5182	7874521.730

Number of rows retrieved is: 1048  
-----  
-

Stop timestamp 02/10/05 12:55:39.756484  
Query Time = 0.4 secs

### Query 12

Start timestamp 02/10/05 12:56:38.554067  
-----  
-

-- Query 12 - Var\_0 Rev\_02 - Shipping Modes  
and Order Priority Query

Tag: Q12 Stream: -1 Sequence number: 22

```
select
l_shipmode,
sum(case
when o_orderpriority = '1-URGENT'
or o_orderpriority = '2-HIGH'
then 1
else 0
end) as high_line_count,
sum(case
when o_orderpriority <> '1-URGENT'
and o_orderpriority <> '2-HIGH'
then 1
else 0
end) as low_line_count
from
tpcd.orders,
tpcd.lineitem
where
o_orderkey = l_orderkey
and l_shipmode in ('MAIL', 'SHIP')
and l_commitdate < l_receiptdate
and l_shipdate < l_commitdate
and l_receiptdate >= date ('1994-01-01')
and l_receiptdate < date ('1994-01-01') + 1
year
group by
l_shipmode
order by
l_shipmode
```

L_SHIPMODE	HIGH_LINE_COUNT	LOW_LINE_COUNT
MAIL	6202	9324
SHIP	6200	9262

Number of rows retrieved is: 2  
-----  
-

Stop timestamp 02/10/05 12:56:51.436467  
Query Time = 12.9 secs

### Query 13

Start timestamp 02/10/05 12:55:04.965693

-- Query 13 - Var\_0 Rev\_01 - Customer  
Distribution Query

Tag: Q13 Stream: -1 Sequence number: 10

```
select
c_count,
count(*) as custdist
from
(
select
c_custkey,
count(o_orderkey)
from
tpcd.customer left outer join tpcd.orders on
c_custkey = o_custkey
and o_comment not like '%special%requests%'
group by
c_custkey
) as c_orders (c_custkey, c_count)
group by
c_count
order by
custdist desc,
c_count desc
```

C_COUNT	CUSTDIST
0	50004
9	6641
10	6566
11	6058
8	5949

... Lines Deleted

37	7
40	4
38	4
39	2
41	1

Number of rows retrieved is: 42

Stop timestamp 02/10/05 12:55:10.769335  
Query Time = 5.8 secs

### Query 14

Start timestamp 02/10/05 12:53:09.046563

--#SET ROWS\_OUT -1 ROWS\_FETCH -1

-- Query 14 - Var\_0 Rev\_01 - Promotion  
Effect Query

Tag: Q14 Stream: -1 Sequence number: 1

```
select
100.00 * sum(case
when p_type like 'PROMO%'
then l_extendedprice * (1 - l_discount)
else 0
end) / sum(l_extendedprice * (1 -
l_discount)) as promo_revenue
from
tpcd.lineitem,
tpcd.part
where
l_partkey = p_partkey
and l_shipdate >= date ('1995-09-01')
and l_shipdate < date ('1995-09-01') + 1
month
```

PROMO\_REVENUE  
-----  
16.381

Number of rows retrieved is: 1

Stop timestamp 02/10/05 12:53:10.962219  
Query Time = 1.9 secs

### Query 15a

Start timestamp 02/10/05 12:55:39.756484

-- Query 15 - Var\_a Rev\_01 - Top Supplier  
Query

Tag: Q15a Stream: -1 Sequence number: 16

with revenue (supplier\_no, total\_revenue) as

```
(
select
l_suppkey,
sum(l_extendedprice * (1-l_discount))
from
tpcd.lineitem
where
l_shipdate >= date ('1996-01-01')
and l_shipdate < date ('1996-01-01') + 3
month
group by
l_suppkey
)
```

```
select
s_suppkey,
s_name,
s_address,
s_phone,
total_revenue
from
tpcd.supplier,
revenue
where
s_suppkey = supplier_no
and total_revenue = (
select
```

```

max(total_revenue)
from
revenue
)
order by
s_suppkey

S_SUPPKEY   S_NAME
S_ADDRESS
S_PHONE     TOTAL_REVENUE
-----
-----
            8449 Supplier#000008449
Wp34zim9qYFbVctdW
20-469-856-8873          1772627.209

```

Number of rows retrieved is: 1

Stop timestamp 02/10/05 12:55:40.323335  
Query Time = 0.6 secs

### Query 16

Start timestamp 02/10/05 12:55:25.666777

-- Query 16 - Var\_0 Rev\_01 - Parts/Supplier  
Relationship Query

Tag: Q16 Stream: -1 Sequence number: 13

```

select
p_brand,
p_type,
p_size,
count(distinct ps_suppkey) as supplier_cnt
from
tpcd.partsupp,
tpcd.part
where
p_partkey = ps_partkey
and p_brand <> 'Brand#45'
and p_type not like 'MEDIUM POLISHED%'
and p_size in (49, 14, 23, 45, 19, 3, 36, 9)
and ps_suppkey not in (
select
s_suppkey
from
tpcd.supplier
where
s_comment like '%Customer%Complaints%'
)
group by
p_brand,
p_type,
p_size
order by
supplier_cnt desc,
p_brand,
p_type,
p_size

```

```

P_BRAND   P_TYPE
P_SIZE    SUPPLIER_CNT
-----
-----
Brand#41  MEDIUM BRUSHED TIN
3         28
Brand#54  STANDARD BRUSHED COPPER
14        27
Brand#11  STANDARD BRUSHED TIN
23        24
Brand#11  STANDARD BURNISHED BRASS
36        24
Brand#15  MEDIUM ANODIZED NICKEL
3         24
... Lines Deleted
Brand#52  MEDIUM BRUSHED BRASS
45        3
Brand#53  MEDIUM BRUSHED TIN
45        3
Brand#54  ECONOMY POLISHED BRASS
9         3
Brand#55  PROMO PLATED BRASS
19        3
Brand#55  STANDARD PLATED TIN
49        3

```

Number of rows retrieved is: 18314

Stop timestamp 02/10/05 12:55:26.469729  
Query Time = 0.8 secs

### Query 17

Start timestamp 02/10/05 12:53:41.473944

-- Query 17 - Var\_0 Rev\_01 - Small-Quantity-  
Order Revenue Query

Tag: Q17 Stream: -1 Sequence number: 6

```

select
sum(l_extendedprice) / 7.0 as avg_yearly
from
tpcd.lineitem,
tpcd.part
where
p_partkey = l_partkey
and p_brand = 'Brand#23'
and p_container = 'MED BOX'
and l_quantity < (
select
0.2 * avg(l_quantity)
from
tpcd.lineitem
where
l_partkey = p_partkey
)

```

AVG\_YEARLY  
-----  
348406.054

Number of rows retrieved is: 1  
-----  
-

Stop timestamp 02/10/05 12:53:53.165451  
Query Time = 11.7 secs

### Query 18

Start timestamp 02/10/05 12:53:53.165451  
-----  
-

-- Query 18 - Var\_0 Rev\_01 - Large Volume  
Customer Query

Tag: Q18 Stream: -1 Sequence number: 7

```
select
c_name,
c_custkey,
o_orderkey,
o_orderdate,
o_totalprice,
sum(l_quantity)
from
tpcd.customer,
tpcd.orders,
tpcd.lineitem
where
o_orderkey in (
select
l_orderkey
from
tpcd.lineitem
group by
l_orderkey having
sum(l_quantity) > 300
)
and c_custkey = o_custkey
and o_orderkey = l_orderkey
group by
c_name,
c_custkey,
o_orderkey,
o_orderdate,
o_totalprice
order by
o_totalprice desc,
o_orderdate
fetch first 100 rows only
```

```
C_NAME          C_CUSTKEY
O_ORDERKEY      O_ORDERDATE
O_TOTALPRICE    6
-----
```

```
Customer#0000128120      128120
4722021 1994-04-07      544089.090
323.000
```

```
Customer#0000144617      144617
3043270 1997-02-12      530604.440
317.000
Customer#0000013940      13940
2232932 1997-04-13      522720.610
304.000
Customer#0000066790      66790
2199712 1996-09-30      515531.820
327.000
Customer#0000046435      46435
4745607 1997-07-03      508047.990
309.000
Customer#0000015272      15272
3883783 1993-07-28      500241.330
302.000
Customer#0000146608      146608
3342468 1994-06-12      499794.580
303.000
Customer#0000096103      96103
5984582 1992-03-16      494398.790
312.000
Customer#0000024341      24341
1474818 1992-11-15      491348.260
302.000
Customer#0000137446      137446
5489475 1997-05-23      487763.250
311.000
Customer#0000107590      107590
4267751 1994-11-04      485141.380
301.000
Customer#0000050008      50008
2366755 1996-12-09      483891.260
302.000
Customer#0000015619      15619
3767271 1996-08-07      480083.960
318.000
Customer#0000077260      77260
1436544 1992-09-12      479499.430
307.000
Customer#0000109379      109379
5746311 1996-10-10      478064.110
302.000
Customer#0000054602      54602
5832321 1997-02-09      471220.080
307.000
Customer#0000105995      105995
2096705 1994-07-03      469692.580
307.000
Customer#0000148885      148885
2942469 1992-05-31      469630.440
313.000
Customer#0000114586      114586
551136 1993-05-19      469605.590
308.000
Customer#0000105260      105260
5296167 1996-09-06      469360.570
303.000
Customer#0000147197      147197
1263015 1997-02-02      467149.670
320.000
Customer#0000064483      64483
2745894 1996-07-04      466991.350
304.000
Customer#0000136573      136573
2761378 1996-05-31      461282.730
301.000
Customer#0000016384      16384
502886 1994-04-12      458378.920
312.000
```

Customer#0000117919	117919
2869152 1996-06-20	456815.920
317.000	
Customer#0000012251	12251
735366 1993-11-24	455107.260
309.000	
Customer#0000120098	120098
1971680 1995-06-14	453451.230
308.000	
Customer#0000066098	66098
5007490 1992-08-07	453436.160
304.000	
Customer#0000117076	117076
4290656 1997-02-05	449545.850
301.000	
Customer#0000129379	129379
4720454 1997-06-07	448665.790
303.000	
Customer#0000126865	126865
4702759 1994-11-07	447606.650
320.000	
Customer#0000088876	88876
983201 1993-12-30	446717.460
304.000	
Customer#0000036619	36619
4806726 1995-01-17	446704.090
328.000	
Customer#0000141823	141823
2806245 1996-12-29	446269.120
310.000	
Customer#0000053029	53029
2662214 1993-08-13	446144.490
302.000	
Customer#0000018188	18188
3037414 1995-01-25	443807.220
308.000	
Customer#0000066533	66533
29158 1995-10-21	443576.500
305.000	
Customer#0000037729	37729
4134341 1995-06-29	441082.970
309.000	
Customer#0000003566	3566
2329187 1998-01-04	439803.360
304.000	
Customer#0000045538	45538
4527553 1994-05-22	436275.310
305.000	
Customer#0000081581	81581
4739650 1995-11-04	435405.900
305.000	
Customer#0000119989	119989
1544643 1997-09-20	434568.250
320.000	
Customer#0000003680	3680
3861123 1998-07-03	433525.970
301.000	
Customer#0000113131	113131
967334 1995-12-15	432957.750
301.000	
Customer#0000141098	141098
565574 1995-09-24	430986.690
301.000	
Customer#0000093392	93392
5200102 1997-01-22	425487.510
304.000	
Customer#0000015631	15631
1845057 1994-05-12	419879.590
302.000	

Customer#0000112987	112987
4439686 1996-09-17	418161.490
305.000	
Customer#0000012599	12599
4259524 1998-02-12	415200.610
304.000	
Customer#0000105410	105410
4478371 1996-03-05	412754.510
302.000	
Customer#0000149842	149842
5156581 1994-05-30	411329.350
302.000	
Customer#0000010129	10129
5849444 1994-03-21	409129.850
309.000	
Customer#0000069904	69904
1742403 1996-10-19	408513.000
305.000	
Customer#0000017746	17746
6882 1997-04-09	408446.930
303.000	
Customer#0000013072	13072
1481925 1998-03-15	399195.470
301.000	
Customer#0000082441	82441
857959 1994-02-07	382579.740
305.000	
Customer#0000088703	88703
2995076 1994-01-30	363812.120
302.000	

Number of rows retrieved is: 57

-

Stop timestamp 02/10/05 12:54:07.898720  
Query Time = 14.7 secs

### Query 19

Start timestamp 02/10/05 12:56:05.558944

-

-- Query 19 - Var\_0 Rev\_01 - Discounted Revenue Query

Tag: Q19 Stream: -1 Sequence number: 19

```
select
sum(l_extendedprice* (1 - l_discount)) as
revenue
from
tpcd.lineitem,
tpcd.part
where
(
p_partkey = l_partkey
and p_brand = 'Brand#12'
and p_container in ('SM CASE', 'SM BOX', 'SM
PACK', 'SM PKG')
and l_quantity >= 1 and l_quantity <= 1 + 10
and p_size between 1 and 5
and l_shipmode in ('AIR', 'AIR REG')
and l_shipinstruct = 'DELIVER IN PERSON'
```

```

)
or
(
p_partkey = l_partkey
and p_brand = 'Brand#23'
and p_container in ('MED BAG', 'MED BOX',
'MED PKG', 'MED PACK')
and l_quantity >= 10 and l_quantity <= 10 +
10
and p_size between 1 and 10
and l_shipmode in ('AIR', 'AIR REG')
and l_shipinstruct = 'DELIVER IN PERSON'
)
or
(
p_partkey = l_partkey
and p_brand = 'Brand#34'
and p_container in ('LG CASE', 'LG BOX', 'LG
PACK', 'LG PKG')
and l_quantity >= 20 and l_quantity <= 20 +
10
and p_size between 1 and 15
and l_shipmode in ('AIR', 'AIR REG')
and l_shipinstruct = 'DELIVER IN PERSON'
)

```

REVENUE

```

-----
3083843.058

```

Number of rows retrieved is: 1

```

-----
-

```

Stop timestamp 02/10/05 12:56:18.059724  
Query Time = 12.5 secs

## Query 20

Start timestamp 02/10/05 12:53:37.899615

```

-----
-

```

-- Query 20 - Var\_0 Rev\_01 - Potential Part  
Promotion Query

Tag: Q20 Stream: -1 Sequence number: 4

```

select
s_name,
s_address
from
tpcd.supplier,
tpcd.nation
where
s_suppkey in (
select
ps_suppkey
from
tpcd.partsupp
where
ps_partkey in (
select
p_partkey

```

```

from
tpcd.part
where
p_name like 'forest%'
)
and ps_availqty > (
select
0.5 * sum(l_quantity)
from
tpcd.lineitem
where
l_partkey = ps_partkey
and l_suppkey = ps_suppkey
and l_shipdate >= date ('1994-01-01')
and l_shipdate < date ('1994-01-01') + 1
year
)
)
and s_nationkey = n_nationkey
and n_name = 'CANADA'
order by
s_name

```

S\_NAME S\_ADDRESS

```

-----
Supplier#000000020
iybAE,RmTymrZVYaFZva2SH,j
Supplier#000000091
YV45D7TkfdQan00Z7q9QxkyGUapU1oOWU6q3
Supplier#000000197
YC2Acon6kjY3zj3Fbxs2k4Vdf7X0cd2F
Supplier#000000226
83qOdU2EYRdPQAQhEtn GRZEd
Supplier#000000285
Br7elnntlyxrw6ImgpJ7YdhFDjuBf

```

... Lines Deleted

```

Supplier#000009862 rJzweWeN58
Supplier#000009868
ROjGgx5gvtkmnUUoeyy7v
Supplier#000009869
ucLqxzrpBTRMewGSM29t0rNTM30g1Tu3Xgg3mKag
Supplier#000009899 7XdpAHzrzt,UQFZE
Supplier#000009974
7wJ,J5DKcxSU4KplcQLpbcAvB5AsvKT

```

Number of rows retrieved is: 204

```

-----
-

```

Stop timestamp 02/10/05 12:53:39.953610  
Query Time = 2.1 secs

## Query 21

Start timestamp 02/10/05 12:54:24.542533

```

-----
-

```

-- Query 21 - Var\_0 Rev\_01 - Suppliers Who  
Kept Orders Waiting Query

Tag: Q21 Stream: -1 Sequence number: 9



```

select
s_name,
count(*) as numwait
from
tpcd.supplier,
tpcd.lineitem l1,
tpcd.orders,
tpcd.nation
where
s_suppkey = l1.l_suppkey
and o_orderkey = l1.l_orderkey
and o_orderstatus = 'F'
and l1.l_receiptdate > l1.l_commitdate
and exists (
select
*
from
tpcd.lineitem l2
where
l2.l_orderkey = l1.l_orderkey
and l2.l_suppkey <> l1.l_suppkey
)
and not exists (
select
*
from
tpcd.lineitem l3
where
l3.l_orderkey = l1.l_orderkey
and l3.l_suppkey <> l1.l_suppkey
and l3.l_receiptdate > l3.l_commitdate
)
and s_nationkey = n_nationkey
and n_name = 'SAUDI ARABIA'
group by
s_name
order by
numwait desc,
s_name
fetch first 100 rows only

```

S_NAME	NUMWAIT	Supplier#	
Supplier#000002829	20	Supplier#000005649	15
Supplier#000005808	18	Supplier#000006027	15
Supplier#000000262	17	Supplier#000006795	15
Supplier#000000496	17	Supplier#000006800	15
Supplier#000002160	17	Supplier#000006824	15
Supplier#000002301	17	Supplier#000007131	15
Supplier#000002540	17	Supplier#000007382	15
Supplier#000003063	17	Supplier#000008913	15
Supplier#000005178	17	Supplier#000009787	15
Supplier#000008331	17	Supplier#000006633	14
Supplier#000002005	16	Supplier#000001960	14
Supplier#000002095	16	Supplier#000002323	14
Supplier#000005799	16	Supplier#000002490	14
Supplier#000005842	16	Supplier#000002993	14
Supplier#000006450	16	Supplier#000003101	14
Supplier#000006939	16	Supplier#000004489	14
Supplier#000009200	16	Supplier#000005435	14
Supplier#000009727	16	Supplier#000005583	14
Supplier#000000486	15	Supplier#000005774	14
Supplier#000000565	15	Supplier#000007579	14
Supplier#000001046	15	Supplier#000008180	14
Supplier#000001047	15	Supplier#000008695	14
Supplier#000001161	15	Supplier#000009224	14
Supplier#000001336	15	Supplier#000000357	13
Supplier#000001435	15	Supplier#000000436	13
Supplier#000003075	15	Supplier#000000610	13
Supplier#000003335	15	Supplier#000000788	13
		Supplier#000000889	13
		Supplier#000001062	13
		Supplier#000001498	13
		Supplier#000002056	13
		Supplier#000002312	13
		Supplier#000002344	13
		Supplier#000002596	13
		Supplier#000002615	13
		Supplier#000002978	13
		Supplier#000003048	13
		Supplier#000003234	13
		Supplier#000003727	13
		Supplier#000003806	13
		Supplier#000004472	13
		Supplier#000005236	13
		Supplier#000005906	13
		Supplier#000006241	13
		Supplier#000006326	13
		Supplier#000006384	13
		Supplier#000006394	13
		Supplier#000006624	13
		Supplier#000006629	13
		Supplier#000006682	13
		Supplier#000006737	13
		Supplier#000006825	13
		Supplier#000007021	13
		Supplier#000007417	13
		Supplier#000007497	13
		Supplier#000007602	13
		Supplier#000008134	13
		Supplier#000008234	13
		Supplier#000009435	13
		Supplier#000009436	13
		Supplier#000009564	13
		Supplier#000009896	13
		Supplier#000000379	12
		Supplier#000000673	12
		Supplier#000000762	12
		Supplier#000000811	12
		Supplier#000000821	12
		Supplier#000001337	12
		Supplier#000001916	12
		Supplier#000001925	12
		Supplier#000002039	12

Supplier#000002357 12  
Supplier#000002483 12

Number of rows retrieved is: 100

Stop timestamp 02/10/05 12:55:04.965693  
Query Time = 40.4 secs

## Query 22

Start timestamp 02/10/05 12:55:23.648548

-- Query 22 - Var\_0 Rev\_01 - Global Sales Opportunity Query

Tag: Q22 Stream: -1 Sequence number: 12

```
select
  cntrycode,
  count(*) as numcust,
  sum(c_acctbal) as totacctbal
from
  (
  select
    substr(c_phone, 1, 2) as cntrycode,
    c_acctbal
  from
    tpcd.customer
  where
    substr(c_phone, 1, 2) in
      ('13', '31', '23', '29', '30', '18', '17')
    and c_acctbal > (
      select
        avg(c_acctbal)
      from
        tpcd.customer
      where
        c_acctbal > 0.00
        and substr(c_phone, 1, 2) in
          ('13', '31', '23', '29', '30', '18', '17')
        )
    and not exists (
      select
        *
      from
        tpcd.orders
      where
        o_custkey = c_custkey
    )
  ) as custsale
group by
  cntrycode
order by
  cntrycode
```

CNTRYCODE	NUMCUST	TOTACCTBAL
13	888	6737713.990
17	861	6460573.720
18	964	7236687.400

23	892	6701457.950
29	948	7158866.630
30	909	6808436.130
31	922	6806670.180

Number of rows retrieved is: 7

Stop timestamp 02/10/05 12:55:25.666777  
Query Time = 2.0 secs

## First 10 Rows of the Database

SELECT \* FROM TPCD.REGION FETCH FIRST 10 ROWS ONLY

R\_REGIONKEY R\_NAME  
R\_COMMENT

```
-----
-----
-----
-----
-----
-----
-----
-----
-----
-----
-----
0 AFRICA
special Tiresias about the furiously even
dolphins are furi
1 AMERICA even,
ironic theodolites according to the bold
platelets wa
2 ASIA
silent, bold requests sleep slyly across the
quickly sly dependencies. furiously silent
instructions alongside
3 EUROPE
special, bold deposits haggle foxes.
platelet
4 MIDDLE EAST
furiously unusual packages use carefully
above the unusual, exp
5 record(s) selected.
```

SELECT \* FROM TPCD.NATION FETCH FIRST 10 ROWS ONLY

N\_NATIONKEY N\_NAME  
N\_REGIONKEY N\_COMMENT

```
-----
-----
-----
-----
-----
-----
-----
-----
-----
-----
-----
0 ALGERIA
0 final accounts wake quickly. special
reques
5 ETHIOPIA
0 fluffily ruthless requests integrate
fluffily. pending ideas wake blithely acco
14 KENYA
0 ironic requests boost. quickly pending
pinto beans cajole slyly slyly even
deposits. ironic packages
15 MOROCCO
0 ideas according to the fluffily final
pinto beans sleep furiously
```

16 MOZAMBIQUE  
0 ironic courts wake fluffily even, bold  
deposi  
1 ARGENTINA  
1 idly final instructions cajole stealthily.  
regular instructions wake carefully blithely  
express accounts. fluffi  
2 BRAZIL  
1 always pending pinto beans sleep sil  
3 CANADA  
1 foxes among the bold requests  
17 PERU  
1 final, final accounts sleep slyly across  
the requests.  
24 UNITED STATES  
1 blithely regular deposits serve furiously  
blithely regular warthogs! slyly fi  
10 record(s) selected.

SELECT \* FROM TPCD.PART FETCH FIRST 10 ROWS  
ONLY

P_PARTKEY	P_NAME	P_MFGR	P_BRAND	P_TYPE
43	medium khaki chocolate rosy			
44	PROMO POLISHED STEEL			
5	WRAP CASE			
98	frosted goldenrod chartreuse			
54	STANDARD ANODIZED BRASS			
22	MED JAR			
	furio			
144	wheat brown orange almond			
14	SMALL ANODIZED TIN			
26	SM BOX			
	blithely bold r			
232	ivory purple spring tan cornsilk			
	BURNISHED NICKEL			
	242 magenta deep lawn linen navy			
	POLISHED STEEL			
	final pearls wake b			
	royal			
	ECONOMY PLATED STEEL			
	45 LG PACK			
	fluffi			
612	midnight deep misty magenta			
	honeydew			
	PROMO PLATED STEEL			
	19 LG BOX			
	ironic, expr			
643	beige navy dim green forest			
	POLISHED STEEL			
	8 MED DRUM			
	1.543640000000000E+003			
	furiously regular			
	requ			

647 bisque violet dim lawn drab  
Manufacturer#3 Brand#35 LARGE  
BURNISHED STEEL 38 MED PKG  
+1.547640000000000E+003 quickly spec  
659 ivory green pink orange  
chartreuse  
Manufacturer#3 Brand#34 MEDIUM  
BRUSHED BRASS 20 LG JAR  
+1.559650000000000E+003 even,  
10 record(s) selected.

SELECT \* FROM TPCD.SUPPLIER FETCH FIRST 10  
ROWS ONLY

S_SUPPKEY	S_NAME	S_ADDRESS	S_NATIONKEY	S_PHONE	S_ACCTBAL	S_COMMENT
43	Supplier#000000043	Z5mLuAoTUEeKY5v22VnnA4D87Ao6jF2LvMYnlX8h	12	22-421-568-4862	+7.773410000000000E+003	slyly final accounts wake blithely slyly regular requests. sl
98	Supplier#000000098	ogHn8dpXB5Q	21	31-914-775-1978	+5.873070000000000E+003	slyly regular requests mold slyly regular depo
144	Supplier#000000144	f8tddEKps816HHqNwsKdn3	20	30-726-423-7363	+9.806290000000000E+003	even, fluffy somas cajole ironically. even instructions are after the bold deposits. silent ac
232	Supplier#000000232	90YJjotHlfwyieaTfuBJ8kohU50c83bESout,p	7	17-478-427-3811	+3.008000000000000E+002	carefully express asymptotes use among the accounts: final foxes c
242	Supplier#000000242	cpZMlI77TRq	11	21-489-286-5908	+3.736640000000000E+003	quickly express deposits sleep furiously regular accounts. quickly even accounts above the slyl
474	Supplier#000000474	USHBmdX8iFodU	0	10-327-319-7717	+5.226210000000000E+003	pending, express courts along the carefully express accounts use quickly final instr
612	Supplier#000000612	gt9T2nnuWBly5zcrWG2iSdZt,sAEYnd6	23	33-377-769-8060	-1.188600000000000E+002	bold, bold pinto beans use quickly. blithely even accounts are. slyly pending requ
643	Supplier#000000643	B Lxz2esIAW0GoxEwlrAU	18	28-782-409-7844	+1.218590000000000E+003	furiously brave packages cajole slyly p
647	Supplier#000000647	x5U7MBZmwfG9	23	33-258-202-4782	+9.828210000000000E+003	

regular hockey players sleep busily along  
the pe  
659 Supplier#000000659  
jjvP5XctV9jbyUnkoeFUTrgB,ke  
20 30-917-437-7814 +6.318600000000000E+002  
furiously express instructions among the re  
10 record(s) selected.

SELECT \* FROM TPCD.PARTSUPP FETCH FIRST 10  
ROWS ONLY

PS_PARTKEY	PS_SUPPKEY	PS_AVAILQTY	PS_SUPPLYCOST	PS_COMMENT
43	44	3211	+8.057800000000000E+002	final, express dependencies sleep according to the express requests. bold, regular accounts detect outside the slyly
43	2500044	6770	+4.931900000000000E+002	furiously special pinto beans cajole. ironic decoys across the
43	5000044	9506	+4.936500000000000E+002	carefully fluffy accounts across the blithely final accounts hang slyly according to the furiously special platelets. sil
43	7500044	3232	+3.071200000000000E+002	bold packages wake blithely above the furiously bold
98	99	9486	+9.082100000000000E+002	deposits haggle busily express deposits. furiously blithe platelets
98	2500099	8550	+6.571600000000000E+002	express, final deposits haggle along the regular foxes. carefully regular excuses wake against the carefully even pinto beans. furiously express pinto beans
98	5000099	3443	+1.390000000000000E+002	express, express pinto beans wake blithely. silent, pending requests around the special packages cajole after the quietly regular accounts. somas sleep.
98	7500099	3759	+8.115500000000000E+002	blithely silent instructions promise furiously across the blithely regular dependencies. unusual packages print across the ironic pinto beans. orbits sleep blithely against t
144	145	6295	+4.573700000000000E+002	carefully fluffy deposits wake slyly at the furiously final packages. regular instructions nag sometimes even dolphins. bold packages across the requests use unusual requests. qu
144	2500145	494	+8.499600000000000E+002	quickly silent accounts will detect quickly across the doggedly express deposits. quick p

10 record(s) selected.

SELECT \* FROM TPCD.CUSTOMER FETCH FIRST 10  
ROWS ONLY

C_CUSTKEY	C_NAME	C_ADDRESS	C_NATIONKEY	C_PHONE	C_ACCTBAL	C_MKTSEGMENT	C_COMMENT
43	Customer#0000000043	ouSbjHk8lh5fKX3zGso3ZSIj9Aa3PoaFd	19	29-316-665-2897	+9.904280000000000E+003	MACHINERY	idly regular sentiments affix. slyly pending foxes around the deposits haggle according to th
98	Customer#0000000098	7yiheXNSpuEAwbswDW	12	22-885-845-6889	-5.513700000000000E+002	BUILDING	blithely final foxes along the unusual realms detect accounts. idle theodolites use pinto beans. ev
144	Customer#0000000144	VxYZ3ebhgbltnetaGjNC8qCccjYU05 fePLOno8y	1	11-717-379-4478	+6.417310000000000E+003	MACHINERY	fluffily regular requests at the blithely even theodolites haggle around the requests. special frets x-
232	Customer#0000000232	oA9o,3YOXu2rzKONdd, cxpqCFXUv5kuxBYKp	22	32-283-563-2674	+5.547100000000000E+002	HOUSEHOLD	ideas eat furiously carefully special instructions
242	Customer#0000000242	apgzK3HWAjKHFteJ16Tg3OERViesqBbx	3	13-324-350-3564	+1.975410000000000E+003	MACHINERY	carefully express ideas nag final requests. slyly daring accounts cajole slyly blithely pend
474	Customer#0000000474	mvEKw,6zT0V8Yb2yTG hu990UX	21	31-247-536-6143	+9.165470000000000E+003	MACHINERY	packages after the carefully ironic packages haggle blithely against the carefully even foxes. regular deposits ab
612	Customer#0000000612	oNFqorGhq3a3woEp5q8xVDX	14	24-818-339-9984	+7.669160000000000E+003	HOUSEHOLD	final, final ideas mold after the quickly special dependencies. escapades sleep slyly. e
643	Customer#0000000643	2avhfyF PQ	0	10-978-597-2747	+5.184700000000000E+003	FURNITURE	quickly even instructions sleep slyly around the furiously special instructions. quickly silent deposits integrate c
647	Customer#0000000647	2Bx7,7i87h5cagC,ZBz49lyiziLqQoD	1	11-873-931-2886	-1.329700000000000E+002	BUILDING	ironic accounts are furiously! regular instruc
659	Customer#0000000659	ThR9miOedPuwVEZyz 3MMjHPwB	0	10-834-287-1466	+5.297680000000000E+003		

HOUSEHOLD final requests integrate  
carefully above the carefully ironic foxes.  
furiously bold re

10 record(s) selected.

SELECT \* FROM TPCD.ORDERS FETCH FIRST 10  
ROWS ONLY

O_ORDERKEY	O_CUSTKEY	O_ORDERSTATUS	O_TOTALPRICE	O_ORDERDATE	O_ORDERPRIORITY	O_CLERK	O_SHIPPRIORITY	O_COMMENT
560930	25046506	F	+2.621457600000000E+005	01/01/1992	3-MEDIUM	Clerk#000017603	0	pinto beans use carefully quickly ironic foxes! carefully ironic
682656	83852087	F	+1.848226400000000E+005	01/01/1992	5-LOW	Clerk#000795342	0	silent ideas doubt along the careful
1249954	37416013	F	+1.718665500000000E+005	01/01/1992	2-HIGH	Clerk#000383087	0	furiously express pinto beans sleep closely! slyly
5062656	43117543	F	+2.247812400000000E+005	01/01/1992	2-HIGH	Clerk#000022675	0	carefully quick foxes sleep slyly. furiou
5559427	52958279	F	+8.963183000000000E+004	01/01/1992	4-NOT SPECIFIED	Clerk#000697256	0	blithely bold instructions
7840449	143987464	F	+1.606503300000000E+005	01/01/1992	3-MEDIUM	Clerk#000981426	0	carefully final escapades alongside of the ironic gifts haggle furiously dari
8851235	76620619	F	+1.857449900000000E+005	01/01/1992	3-MEDIUM	Clerk#000565539	0	quickly regular deposits are
9209959	79681576	F	+1.818726100000000E+005	01/01/1992	2-HIGH	Clerk#000526170	0	carefully bold warhorses haggle carefully sly
9965413	39144652	F	+2.718986000000000E+004	01/01/1992	3-MEDIUM	Clerk#000705974	0	special somas sleep blithely about the carefully silent
10011840	149582956	F	+5.461480000000000E+003	01/01/1992	5-LOW	Clerk#000202963	0	blithely pending foxes wake quickly? slyly even realms affix furi

10 record(s) selected.

SELECT \* FROM TPCD.LINEITEM FETCH FIRST 10  
ROWS ONLY

L_ORDERKEY	L_PARTKEY	L_SUPPKEY	L_LINENUMBER	L_QUANTITY
------------	-----------	-----------	--------------	------------

L_EXTENDEDPRI	L_DISCOUNT	L_TAX	L_RETURNFLAG	L_LINESTATUS	L_SHIPDATE	L_COMMITDATE	L_RECEIPTDATE	L_SHIPINSTRUCT	L_SHIPMODE	L_COMMENT	
46797348	7669137	169138		2							
+7.000000000000000E+000				+7.740250000000000E+003	+1.000000000000000E-002	A	F	01/02/1992	03/23/1992	01/24/1992	NONE
				REG AIR	pending	theodolites	boost.	even1			
				49867331	1646631	4146632					
6				+4.200000000000000E+001							
+6.625710000000000E+004				+5.000000000000000E-002		R	F	01/02/1992	02/11/1992	01/25/1992	NONE
				TRUCK	slyly	regu					
				53469543	60109077	2609084					
1				+3.100000000000000E+001							
+3.357517000000000E+004				+1.000000000000000E-001		A	F	01/02/1992	03/28/1992	01/24/1992	NONE
				SHIP	bold,	final	dolphins	against	the		
				126754048	75155923	2655945					
4				+1.000000000000000E+001							
+1.975170000000000E+004				+0.000000000000000E+000							
				002	R	F		01/02/1992			
				02/25/1992	01/28/1992	TAKE	BACK	RETURN			
				SHIP	slyly	dari					
				169237793	125389539	7889552					
3				+3.000000000000000E+000							
+4.866810000000000E+003				+8.000000000000000E-002		R	F	01/02/1992	02/17/1992	01/19/1992	TAKE
				BACK	RETURN	REG	AIR	blithely			
				even	asymptotes	believe	fu				
				174545953	140418453	418454					
4				+2.200000000000000E+001							
+3.001746000000000E+004				+2.000000000000000E-002		A	F	01/02/1992	03/02/1992	01/18/1992	TAKE
				BACK	RETURN	REG	AIR	special,			
				regular	ideas	ha					
				192128197	83869221	6369230					
3				+1.100000000000000E+001							
+1.304633000000000E+004				+5.000000000000000E-002		R	F	01/02/1992	02/09/1992	01/26/1992	TAKE
				BACK	RETURN	TRUCK	regular,				
				ironic	h						
				195195204	51972177	4472183					
5				+1.100000000000000E+001							
+1.371238000000000E+004				+4.000000000000000E-002		R	F	01/02/1992	03/02/1992	01/22/1992	
				DELIVER	IN	PERSON	SHIP	slyly			
				ironic	deposits	grow	quic				
				250473639	182079701	2079702					
6				+4.300000000000000E+001							
+7.187880000000000E+004				+8.000000000000000E-002		R	F	01/02/1992	03/27/1992	01/10/1992	NONE

```

FOB          furiously special pinto beans
across the b
              309613188      4015449      4015450
3  +1.6000000000000000E+001
+2.1827840000000000E+004 +6.0000000000000000E-
002  +6.0000000000000000E-002 A          F
01/02/1992 02/09/1992 01/09/1992 TAKE
BACK RETURN      MAIL      final
requests sleep carefully across

```

10 record(s) selected.

### *Query Substitution parameters*

```

Power stream      Seed = 209021213
-- TPC TPC-H Parameter Substitution (Version
1.3.0)
-- using 209021213 as a seed to the RNG
Q1 DELTA          62
Q2 SIZE          50
   TYPE          BRASS
   REGION        AMERICA
Q3 SEGMENT        MACHINERY
   DATE          1995-03-07
Q4 DATE          1994-02-01
Q5 REGION        EUROPE
   DATE          1996-01-01
Q6 DATE          1996-01-01
   DISCOUNT    0.06
   QUANTITY      25
Q7 NATION1        KENYA
   NATION2        CHINA
Q8 NATION         CHINA
   REGION        ASIA
   TYPE          PROMO BURNISHED STEEL
Q9 COLOR          spring
Q10 DATE          1993-12-01
Q11 NATION        CANADA
   FRACTION      0.0000001000
Q12 SHIPMODE1    MAIL
   SHIPMODE2    TRUCK
   DATE          1997-01-01
Q13 WORD1        pending
   WORD2        deposits
Q14 DATE          1997-02-01
Q15 DATE          1997-08-01
Q16 BRAND        Brand#22
   TYPE          MEDIUM PLATED
   SIZE1         37
   SIZE2         40
   SIZE3         46
   SIZE4         16
   SIZE5         17
   SIZE6         21
   SIZE7         13
   SIZE8         29
Q17 BRAND        Brand#23
   CONTAINER     MED CAN
Q18 QUANTITY     313
Q19 BRAND1       Brand#34
   BRAND2        Brand#22
   BRAND3        Brand#45
   QUANTITY1     3
   QUANTITY2     10
   QUANTITY3     27
Q20 COLOUR       royal
   DATE          1994-01-01
   NATION        GERMANY

```

```

Q21 NATION       INDONESIA
Q22 I1           14
   I2            28
   I3            15
   I4            16
   I5            13
   I6            21
   I7            17

```

Throughput Stream = 1 Seed = 209021214  
-- TPC TPC-H Parameter Substitution (Version  
1.3.0)

-- using 209021214 as a seed to the RNG

```

Q1 DELTA          70
Q2 SIZE          38
   TYPE          NICKEL
   REGION        EUROPE
Q3 SEGMENT        BUILDING
   DATE          1995-03-24
Q4 DATE          1996-09-01
Q5 REGION        MIDDLE EAST
   DATE          1996-01-01
Q6 DATE          1996-01-01
   DISCOUNT    0.04
   QUANTITY      24
Q7 NATION1        FRANCE
   NATION2        IRAN
Q8 NATION         IRAN
   REGION        MIDDLE EAST
   TYPE          ECONOMY BRUSHED COPPER
Q9 COLOR          seashell
Q10 DATE          1994-09-01
Q11 NATION        MOZAMBIQUE
   FRACTION      0.0000001000
Q12 SHIPMODE1    TRUCK
   SHIPMODE2    SHIP
   DATE          1995-01-01
Q13 WORD1        unusual
   WORD2        deposits
Q14 DATE          1997-05-01
Q15 DATE          1995-05-01
Q16 BRAND        Brand#12
   TYPE          ECONOMY POLISHED
   SIZE1         44
   SIZE2         3
   SIZE3         13
   SIZE4         46
   SIZE5         34
   SIZE6         43
   SIZE7         6
   SIZE8         36
Q17 BRAND        Brand#24
   CONTAINER     JUMBO BOX
Q18 QUANTITY     315
Q19 BRAND1       Brand#42
   BRAND2        Brand#15
   BRAND3        Brand#44
   QUANTITY1     8
   QUANTITY2     11
   QUANTITY3     23
Q20 COLOUR       cream
   DATE          1993-01-01
   NATION        RUSSIA
Q21 NATION       ARGENTINA
Q22 I1           32
   I2            25
   I3            22
   I4            29
   I5            27
   I6            31
   I7            30

```

Throughput Stream = 2 Seed = 209021215  
 -- TPC TPC-H Parameter Substitution (Version 1.3.0)

-- using 209021215 as a seed to the RNG

Q1	DELTA	78
Q2	SIZE	26
	TYPE	TIN
	REGION	AMERICA
Q3	SEGMENT	MACHINERY
	DATE	1995-03-09
Q4	DATE	1994-06-01
Q5	REGION	AFRICA
	DATE	1997-01-01
Q6	DATE	1997-01-01
	DISCOUNT	0.09
	QUANTITY	24
Q7	NATION1	UNITED KINGDOM
	NATION2	BRAZIL
Q8	NATION	BRAZIL
	REGION	AMERICA
	TYPE	ECONOMY PLATED COPPER
Q9	COLOR	rose
Q10	DATE	1993-06-01
Q11	NATION	EGYPT
	FRACTION	0.0000001000
Q12	SHIPMODE1	AIR
	SHIPMODE2	TRUCK
	DATE	1997-01-01
Q13	WORD1	unusual
	WORD2	deposits
Q14	DATE	1997-08-01
Q15	DATE	1997-11-01
Q16	BRAND	Brand#42
	TYPE	SMALL ANODIZED
	SIZE1	24
	SIZE2	46
	SIZE3	39
	SIZE4	45
	SIZE5	40
	SIZE6	18
	SIZE7	16
	SIZE8	11
Q17	BRAND	Brand#21
	CONTAINER	JUMBO JAR
Q18	QUANTITY	312
Q19	BRAND1	Brand#44
	BRAND2	Brand#43
	BRAND3	Brand#43
	QUANTITY1	4
	QUANTITY2	12
	QUANTITY3	20
Q20	COLOUR	olive
	DATE	1996-01-01
	NATION	JAPAN
Q21	NATION	ROMANIA
Q22	I1	20
	I2	25
	I3	32
	I4	17
	I5	15
	I6	13
	I7	14

Throughput Stream = 3 Seed = 209021216  
 -- TPC TPC-H Parameter Substitution (Version 1.3.0)

-- using 209021216 as a seed to the RNG

Q1	DELTA	86
Q2	SIZE	14
	TYPE	STEEL

	REGION	MIDDLE EAST
Q3	SEGMENT	BUILDING
	DATE	1995-03-26
Q4	DATE	1996-12-01
Q5	REGION	AMERICA
	DATE	1997-01-01
Q6	DATE	1997-01-01
	DISCOUNT	0.06
	QUANTITY	25
Q7	NATION1	MOROCCO
	NATION2	ROMANIA
Q8	NATION	ROMANIA
	REGION	EUROPE
	TYPE	ECONOMY ANODIZED COPPER
Q9	COLOR	pink
Q10	DATE	1994-03-01
Q11	NATION	PERU
	FRACTION	0.0000001000
Q12	SHIPMODE1	REG AIR
	SHIPMODE2	MAIL
	DATE	1997-01-01
Q13	WORD1	unusual
	WORD2	deposits
Q14	DATE	1997-11-01
Q15	DATE	1995-08-01
Q16	BRAND	Brand#22
	TYPE	LARGE BURNISHED
	SIZE1	50
	SIZE2	3
	SIZE3	16
	SIZE4	17
	SIZE5	13
	SIZE6	20
	SIZE7	42
	SIZE8	15
Q17	BRAND	Brand#23
	CONTAINER	JUMBO CAN
Q18	QUANTITY	314
Q19	BRAND1	Brand#41
	BRAND2	Brand#31
	BRAND3	Brand#32
	QUANTITY1	9
	QUANTITY2	13
	QUANTITY3	27
Q20	COLOUR	beige
	DATE	1995-01-01
	NATION	BRAZIL
Q21	NATION	IRAQ
Q22	I1	12
	I2	11
	I3	10
	I4	30
	I5	17
	I6	14
	I7	22

Throughput Stream = 4 Seed = 209021217  
 -- TPC TPC-H Parameter Substitution (Version 1.3.0)

-- using 209021217 as a seed to the RNG

Q1	DELTA	94
Q2	SIZE	1
	TYPE	BRASS
	REGION	AMERICA
Q3	SEGMENT	HOUSEHOLD
	DATE	1995-03-11
Q4	DATE	1994-09-01
Q5	REGION	ASIA
	DATE	1997-01-01
Q6	DATE	1997-01-01
	DISCOUNT	0.04

	QUANTITY	24
Q7	NATION1	GERMANY
	NATION2	IRAQ
Q8	NATION	IRAQ
	REGION	MIDDLE EAST
	TYPE	LARGE POLISHED COPPER
Q9	COLOR	orange
Q10	DATE	1995-01-01
Q11	NATION	ETHIOPIA
	FRACTION	0.0000001000
Q12	SHIPMODE1	SHIP
	SHIPMODE2	MAIL
	DATE	1993-01-01
Q13	WORD1	unusual
	WORD2	packages
Q14	DATE	1993-03-01
Q15	DATE	1993-05-01
Q16	BRAND	Brand#12
	TYPE	PROMO POLISHED
	SIZE1	42
	SIZE2	24
	SIZE3	7
	SIZE4	34
	SIZE5	2
	SIZE6	49
	SIZE7	31
	SIZE8	23
Q17	BRAND	Brand#25
	CONTAINER	WRAP BOX
Q18	QUANTITY	315
Q19	BRAND1	Brand#53
	BRAND2	Brand#14
	BRAND3	Brand#32
	QUANTITY1	4
	QUANTITY2	14
	QUANTITY3	23
Q20	COLOUR	lawn
	DATE	1993-01-01
	NATION	MOZAMBIQUE
Q21	NATION	CANADA
Q22	I1	26
	I2	21
	I3	15
	I4	20
	I5	13
	I6	17
	I7	31

Throughput Stream = 5    Seed = 209021218  
-- TPC TPC-H Parameter Substitution (Version 1.3.0)  
-- using 209021218 as a seed to the RNG

Q1	DELTA	102
Q2	SIZE	39
	TYPE	NICKEL
	REGION	MIDDLE EAST
Q3	SEGMENT	BUILDING
	DATE	1995-03-28
Q4	DATE	1997-04-01
Q5	REGION	MIDDLE EAST
	DATE	1997-01-01
Q6	DATE	1997-01-01
	DISCOUNT	0.09
	QUANTITY	24
Q7	NATION1	UNITED STATES
	NATION2	CANADA
Q8	NATION	CANADA
	REGION	AMERICA
	TYPE	LARGE BURNISHED COPPER
Q9	COLOR	mint
Q10	DATE	1993-10-01

Q11	NATION	CHINA
	FRACTION	0.0000001000
Q12	SHIPMODE1	FOB
	SHIPMODE2	MAIL
	DATE	1993-01-01
Q13	WORD1	unusual
	WORD2	packages
Q14	DATE	1993-06-01
Q15	DATE	1995-11-01
Q16	BRAND	Brand#42
	TYPE	SMALL BRUSHED
	SIZE1	18
	SIZE2	44
	SIZE3	26
	SIZE4	7
	SIZE5	2
	SIZE6	28
	SIZE7	1
	SIZE8	24
Q17	BRAND	Brand#22
	CONTAINER	WRAP JAR
Q18	QUANTITY	313
Q19	BRAND1	Brand#55
	BRAND2	Brand#52
	BRAND3	Brand#21
	QUANTITY1	9
	QUANTITY2	15
	QUANTITY3	30
Q20	COLOUR	smoke
	DATE	1997-01-01
	NATION	FRANCE
Q21	NATION	SAUDI ARABIA
Q22	I1	24
	I2	13
	I3	15
	I4	32
	I5	30
	I6	31
	I7	10

Throughput Stream = 6    Seed = 209021219  
-- TPC TPC-H Parameter Substitution (Version 1.3.0)  
-- using 209021219 as a seed to the RNG

Q1	DELTA	110
Q2	SIZE	27
	TYPE	TIN
	REGION	ASIA
Q3	SEGMENT	HOUSEHOLD
	DATE	1995-03-13
Q4	DATE	1995-01-01
Q5	REGION	AFRICA
	DATE	1993-01-01
Q6	DATE	1993-01-01
	DISCOUNT	0.07
	QUANTITY	25
Q7	NATION1	MOZAMBIQUE
	NATION2	SAUDI ARABIA
Q8	NATION	SAUDI ARABIA
	REGION	MIDDLE EAST
	TYPE	LARGE ANODIZED TIN
Q9	COLOR	linen
Q10	DATE	1994-07-01
Q11	NATION	FRANCE
	FRACTION	0.0000001000
Q12	SHIPMODE1	MAIL
	SHIPMODE2	REG AIR
	DATE	1993-01-01
Q13	WORD1	unusual
	WORD2	packages
Q14	DATE	1993-09-01



```

Q15 DATE          1993-08-01
Q16 BRAND        Brand#22
    TYPE         ECONOMY BURNISHED
    SIZE1        37
    SIZE2        15
    SIZE3        26
    SIZE4        5
    SIZE5        17
    SIZE6        47
    SIZE7        9
    SIZE8        29
Q17 BRAND        Brand#24
    CONTAINER    WRAP CAN
Q18 QUANTITY     314
Q19 BRAND1      Brand#52
    BRAND2      Brand#35
    BRAND3      Brand#25
    QUANTITY1   5
    QUANTITY2   16
    QUANTITY3   26
Q20 COLOUR      floral
    DATE        1995-01-01
    NATION      VIETNAM
Q21 NATION      JAPAN
Q22 I1          28
    I2          23
    I3          33
    I4          20
    I5          24
    I6          25
    I7          26

```

```

Throughput Stream = 7      Seed = 209021220
-- TPC TPC-H Parameter Substitution (Version
1.3.0)
-- using 209021220 as a seed to the RNG
Q1 DELTA        118
Q2 SIZE        15
    TYPE       COPPER
    REGION    MIDDLE EAST
Q3 SEGMENT     AUTOMOBILE
    DATE      1995-03-30
Q4 DATE        1997-08-01
Q5 REGION     AMERICA
    DATE      1993-01-01
Q6 DATE        1993-01-01
    DISCOUNT 0.04
    QUANTITY  24
Q7 NATION1    INDIA
    NATION2    JAPAN
Q8 NATION     JAPAN
    REGION    ASIA
    TYPE      MEDIUM POLISHED TIN
Q9 COLOR      lace
Q10 DATE      1993-04-01
Q11 NATION    ROMANIA
    FRACTION  0.0000001000
Q12 SHIPMODE1 RAIL
    SHIPMODE2 FOB
    DATE      1993-01-01
Q13 WORD1     unusual
    WORD2     packages
Q14 DATE      1993-12-01
Q15 DATE      1996-03-01
Q16 BRAND     Brand#12
    TYPE      STANDARD PLATED
    SIZE1     2
    SIZE2     42
    SIZE3     11
    SIZE4     23
    SIZE5     10

```

```

    SIZE6     44
    SIZE7     13
    SIZE8     6
Q17 BRAND    Brand#21
    CONTAINER SM BOX
Q18 QUANTITY 312
Q19 BRAND1   Brand#14
    BRAND2   Brand#23
    BRAND3   Brand#24
    QUANTITY1 10
    QUANTITY2 17
    QUANTITY3 23
Q20 COLOUR   plum
    DATE      1994-01-01
    NATION    IRAQ
Q21 NATION   ETHIOPIA
Q22 I1       21
    I2       16
    I3       11
    I4       19
    I5       26
    I6       17
    I7       28

```

## Appendix D: Driver Source Code

### ***ploaduf1***

```

#!/bin/ksh
RFpair=$1
~/tpcd/tools/load_line_uf $RFpair &
~/tpcd/tools/load_orders_uf $RFpair

```

### ***ploaduf2***

```

#!/bin/ksh
RFpair=$1;
db2 connect to tpcd
db2 "load from delete.$RFpair of del
modified by coldel| fastparse messages
/dev/null replace into TPCDTEMP.ORDERS_DEL
nonrecoverable partitioned db config mode
load_only part_file_location /flat1/ufdata;"
db2 commit;
db2 connect reset
db2 terminate

```

### ***load\_line\_uf***

```

#!/bin/ksh
RFpair=$1;
db2 connect to tpcd
db2 "load from lineitem.tbl.u$RFpair of del
modified by coldel| fastparse messages
/dev/null replace into TPCDTEMP.LINEITEM_new
nonrecoverable partitioned db config mode
load_only part_file_location /flat1/ufdata;"
db2 commit;
db2 connect reset
db2 terminate

```

## load\_orders\_wf

```
#!/bin/ksh
RFpair=$1;
db2 connect to tpcd
db2 "load from orders.tbl.u$RFpair of del
modified by coldel| fastparse messages
/dev/null replace into TPCDTEMP.ORDERS_new
nonrecoverable partitioned db config mode
load_only part_file_location /flat1/ufdata;
"
db2 commit;
db2 connect reset
db2 terminate
```

## runpower

```
: # --Perl--
eval 'exec perl5 -S $0 ${1+"$@"}' # Horrible
kludge to convert this
if 0; # into a
"portable" perl script

# usage runpower [UF]
# where UF is the optional parameter that
says to run the power test
# with the update functions. By default,
the update functions are not
# run

push(@INC, split(':', $ENV{'PATH'}));

# Get TPC-D specific environment variables
require 'getvars';

# Use the macros in here so that they can
handle the platform differences.
# macro.pl should be sourced from cmvc,
other people wrote and maintain it.
require "macro.pl";
require "tpcdmacro.pl";

# Make output unbuffered.
select(STDOUT);
$| = 1 ;

if (@ARGV > 0)
{
    $runUF=$ARGV[0];
}
else
{
    $runUF="no";
}

if (length($ENV{"TPCD_AUDIT_DIR"}) <= 0)
{
    die "TPCD_AUDIT_DIR environment variable
not set\n";
}
if (length($ENV{"TPCD_RUN_DIR"}) <= 0)
{
    die "TPCD_RUN_DIR environment variable not
set\n";
}
if (length($ENV{"TPCD_DBNAME"}) <= 0)
{
```

```
die "TPCD_DBNAME environment variable not
set\n";
}
if (length($ENV{"TPCD_RUNNUMBER"}) <= 0)
{
    die "TPCD_RUNNUMBER environment variable
not set\n";
}
if (length($ENV{"TPCD_SF"}) <= 0)
{
    die "TPCD_SF environment variable not
set\n";
}
if (length($ENV{"TPCD_PLATFORM"}) <= 0)
{
    die "TPCD_PLATFORM environment variable
not set\n";
}
if (length($ENV{"TPCD_PATH_DELIM"}) <= 0)
{
    die "TPCD_PATH_DELIM environment variable
not set\n";
}
if (length($ENV{"TPCD_PRODUCT"}) <= 0)
{
    die "TPCD_PRODUCT environment variable not
set\n";
}
if (length($ENV{"TPCD_AUDIT"}) <= 0)
{
    die "Must set TPCD_AUDIT env't var.
Real audit timing sequence run if yes\n";
}
if (length($ENV{"TPCD_PHYS_NODE"}) <= 0)
{
    die "TPCD_PHYS_NODE env't var not
set\n";
}
if (length($ENV{"TPCD_LOG_DIR"}) <= 0)
{
    $ENV{"TPCD_LOG_DIR"} = "NULL";
}
if (length($ENV{"TPCD_MODE"}) <= 0)
{
    die "TPCD_MODE environment variable not
set - uni/smp/mln \n";
}
if (length($ENV{"TPCD_ROOTPRIV"}) <= 0)
{
    die "TPCD_ROOTPRIV environment variable
not set - yes/no \n";
}
}

#set up local variables
$runNum=$ENV{"TPCD_RUNNUMBER"};
$runDir=$ENV{"TPCD_RUN_DIR"};
$auditDir=$ENV{"TPCD_AUDIT_DIR"};
$dbname=$ENV{"TPCD_DBNAME"};
$sf=$ENV{"TPCD_SF"};
$platform=$ENV{"TPCD_PLATFORM"};
$delim=$ENV{"TPCD_PATH_DELIM"};
$gatherstats=$ENV{"TPCD_GATHER_STATS"};
$product=$ENV{"TPCD_PRODUCT"};
$RealAudit=$ENV{"TPCD_AUDIT"};
$inlistmax=$ENV{"TPCD_INLISTMAX"};
$spn=$ENV{"TPCD_PHYS_NODE"};
$logDir=$ENV{"TPCD_LOG_DIR"};
$rootPriv=$ENV{"TPCD_ROOTPRIV"};
$mode=$ENV{"TPCD_MODE"};
if (( $mode eq "uni" ) || ( $mode eq "smp"
))
```

```

{
  $all_ln="once";
  $all_pn="once";
  $once="once";
}
else
{
  $all_ln="all_ln";
  $all_pn="all_pn";
  $once="once";
}

if ($inlistmax eq "default")
{
  $inlistmax = 400;
}

# the auditoruns directory is where we have
already generate the sql files for the
# updates and the power tests

# append isolation level information about
tpcdbatch to the miso file
# the miso file is created here but appended
to for power and throughput
#information

$misofile="$runDir${delim}miso$runNum";
if ( -e $misofile )
{
  &rm("$misofile");
}
# if we are in real audit mode then we must
start the db manager now since
# there must be no activity on the database
between the time the build script
# has finished and the time the power test
is started
if ( $RealAudit eq "yes" )
{
  system("db2start");
  system("db2 activate database $dbname");
}

if ( $RealAudit ne "yes" )
{
  system("db2 activate database $dbname");
}

#Report current log info to the run#
directory in a file called startLog.Info
system("perl getLogInfo.pl startLog");

open(MISO, ">$misofile") || die "Can't open
$misofile: $!\n";
$curTs = `perl gettimestamp "long"`;
print MISO "Timestamp and isolation level of
tpcdbatch before power run at : $curTs\n";
close(MISO);
if ( $product eq "pe" )
{
  system("db2 \"connect to $dbname\"; db2
\"select
name,creator,valid,unique_id,isolation from
sysibm.sysplan where name like 'TPCD%'\";
db2 connect reset; db2 terminate >>
$runDir${delim}miso$runNum ");
}
else
{
  &verifyTPCDBatch("$misofile", "$dbname");
}

if ($platform eq "aix")
{
  # Create the sysunused file. This reports
what disks are attached, and which
# ones are being used. Its use spans both
the runpower and runthroughput tests
  system("echo \"The following disks are
assigned to the indicated volume groups\" >
$runDir/sysunused$runNum") && die "cannot
create $runDir/sysunused$runNum";

  system("lspv >>
$runDir/sysunused$runNum");
  system("echo \"The following volume groups
are currently online\" >>
$runDir/sysunused$runNum");
  $curTs = `perl gettimestamp "long"`;
  system("echo \"$curTs\" >>
$runDir/sysunused$runNum");
  system("lsvg -o >>
$runDir/sysunused$runNum");
  # show the disks that are used/unused
  #system("getdisks \"Before the start of
the Power Test\");
}
else
{
  # for all other platforms
  system("echo Assume that all portions of
the system are used >>
$runDir${delim}sysunused$runNum");
}

&getConfig("p");
if ( $rootPriv eq "yes" )
{
  # get the o/s tuning
parameters...currently AIX only and only if
your
  # user has root privileges to run this
  &getOSTune("p");
}
if ($gatherstats eq "on")
{
  # gather vm io and net stats
  if ($platform eq "aix" || $platform eq
"sun" || $platform eq "ptx" ||
$platform eq "hp" || $platform eq
"linux")
  {
    # gather vmstats and iostats (and net
stats if in mpp mode)
    system("perl getstats p &");
  }
  else
  {
    print "Stats gather not set up for
current platform $platform\n";
  }
}

# print to screen what type of run is
running and set variables to run
# the query and update streams in parallel

```

```

if ($runUF ne "UF")
{
    $semcontrol = "off";
    print "Beginning power stream...no
update functions\n";

    $streamEx = "";
    $streamExNT = "";
}
else
{
    $semcontrol = "on";
    print "Beginning power stream...with
update functions\n";
    if ( $platform eq "nt" )
    {
        $streamExNT = "start /b";
        $streamEx = "";
    }
    else
    {
        $streamExNT = "";
        $streamEx = "&";
    }
}

# bbe This new line (below) runs queries for
power test

print "Starting tpcdbatch...\n";
$ret=system("$streamExNT
$auditDir${delim}auditruns${delim}tpcdbatch
-d $dbname -f $runDir${delim}qtextpow.sql -r
on -b on -s $sf -u p1 -m $inlistmax -n 0 -p
$semcontrol $streamEx");

if ( $runUF eq "UF" )
{
    $ret2 =
system("$auditDir${delim}auditruns${delim}tp
cdbatch -d $dbname -f
$runDir${delim}qtextqf.sql -r on -b on -s
$sf -u p2 -m $inlistmax -n 0");
}
else
{
    $ret2 = 0; # If UFs were not running,
then the stream cannot fail
}

if (($ret2 == 0) && ($ret == 0))
{
    print "Power stream completed
succesfully.\n";
}
else
{
    print "Power stream failed. ret=$ret\n";
}

if ($platform eq "aix")
{
    # show that the same disks are still
used or unused
    # system("getdisks \"After completion of
the Power Test\");

    #clean up
}

if ($gatherstats eq "on")
{
    # gather vm io and net stats
    if ($platform eq "aix" || $platform eq
"sun" || $platform eq "ptx" || $platform eq
"linux")
    {
        # kill the stats that were being
gathered
        if ($platform eq "ptx")
        {
            $src= `perl5 zap "-f" "sar"`;
            $src= `perl5 zap "-f" "sadc"`;
        }
        else
        {
            $src= `perl5 zap "-f" "vmstat"`;
            $src= `perl5 zap "-f" "iostat"`;
        }
        if ( $pn > 1 )
        {
            $src= `perl5 zap "-f" "netstat"`;
        }
        $src= `perl5 zap "-f" "getstats"`;
    }
}

open(MISO, ">>$misofile") || die "Can't open
$misofile: $!\n";
$curTs = `perl gettimestamp "long"`;
print MISO "Timestamp and isolation level of
tpcdbatch after power run at : $curTs\n";
close(MISO);

if ( $product eq "pe" )
{
    system("db2 \"connect to $dbname\"; db2
\"select
name,creator,valid,unique_id,isolation from
sysibm.sysplan where name like 'TPCD%'\";db2
connect reset;db2 terminate >>
$runDir${delim}miso$runNum");
}
else
{
    &verifyTPCdbatch("$misofile",$dbname");
}
if ( $RealAudit ne "yes" )
{
    $curTs = `perl gettimestamp "short"`;
    # grab the db and dbm snapshot before we
deactivate
    system("db2 get snapshot for all on
$dbname >
$runDir${delim}dbrun$runNum.snap.$curTs");
    system("db2 get snapshot for database
manager >>
$runDir${delim}dbrun$runNum.snap.$curTs");
}

#####

# now copy the reports from the count of
streams files into one final file
&cat("$runDir${delim}pstrcnt*","$runDir${del
im}mpstrcnt$runNum");
#(NOTE: there is a dependancy that this
mpstrcnt file exist before the
# calcmetrics.pl script is called, both
because it is used as input for

```

```

# calcmetrics.pl, and because the output
from calcmetrics is used as
# the trigger for watchstreams to complete,
and watchstreams cats its
# output at the end of the mstrcnt file.

# generate the mpinter?.metrics file in the
run directory
#require 'calcmetricssp.pl';
if ( $runUF eq "UF" )
{
    system("perl calcmetricssp.pl UF");
}
else
{
    system("perl calcmetricssp.pl");
}

# concatenate all the throughput inter files
that were used to
# generate these results into the
calcmetrics output file (mpinterX.metrics)
#cd $TPCD_RUN_DIR
&cat ("$runDir${delim}mpqinter*", "$runDir${de
lim}mpinter${runNum}.metrics");

if ($runUF eq "UF" ) {

&cat ("$runDir${delim}mpufinter*", "$runDir${d
elim}mpinter${runNum}.metrics");
}

#if ($runUF eq "no" ) {
#    &rm("$runDir${delim}mpuf*");
#}

#####

# no longer activate/deactivate the database
#if ( $RealAudit ne "yes" )
#{
#    # deactivate the database
#    system("db2 deactivate database
$dbname");
#}

# do not stop the database after the power
test
#if ( $RealAudit ne "yes" )
#{
#    system("db2stop");
#}

1;

sub getConfig
{
    $testtype=$_[0];
    print "Getting database configuration.\n";

$dbtunefile="$runDir${delim}m${testtype}dbtu
ne${runNum}";
    open(DBTUNE, ">$dbtunefile") || die "Can't
open $dbtunefile: $!\n";
    $timestamp=`perl gettimestamp "long"`;
    print DBTUNE "Database and Database
manager configuration taken at :
$timestamp";
    close(DBTUNE);
    system("db2level >> $dbtunefile");

    system("db2 get database configuration for
$dbname >> $dbtunefile");
    system("db2 get database manager
configuration >> $dbtunefile");
    system("db2set >> $dbtunefile");
    if ( ( $mode eq "mln" ) || ( $mode eq
"mpp" ) )
    {
        $cfgfile="$runDir${delim}dbtune${runNum}.
";
        #removed by Alex due to hang
        #system("db2_all '||\' typeset -i
ln=###; db2 get db cfg for $dbname >
$cfgfile\${ln} ; db2 get dbm cfg >>
$cfgfile\${ln}; db2set >> $cfgfile\${ln};
db2 terminate '");
    }
}

sub getOSTune
{
    $testtype=$_[0];
    if ( $platform eq "aix" )
    {
        print "Getting OS and VMdatabase
configuration.\n";

        $ostunefile="$runDir${delim}m${testtype}ostu
ne${runNum}";
        open(OSTUNE, ">$ostunefile") || die
"Can't open $ostunefile: $!\n";
        $timestamp=`perl gettimestamp "long"`;
        print OSTUNE "Operating System and
Virtual Memory configuration taken at :
$timestamp";
        close(OSTUNE);

        system("${delim}usr${delim}samples${delim}ke
rnel${delim}schedtune >> $ostunefile");

        system("${delim}usr${delim}samples${delim}ke
rnel${delim}vmtune >> $ostunefile");
    }
    else
    {
        print "OS parameters retrieval not
supported for $platform \n";
    }
}

sub verifyTPCdbatch
{
    $logfile=$_[0];
    $dbname=$_[1];
    $file="verifytpcdbatch.clp";
    open(VERTBL, ">$file") || die "Can't open
$file: $!\n";
    print VERTBL "connect to $dbname;\n";
    print VERTBL "select
name,creator,valid,last_bind_time,isolation
from sysibm.sysplan where name like
'TPCD%';\n";
    print VERTBL "connect reset;\n";
    print VERTBL "terminate;\n";
    close(VERTBL);
    system("db2 -vtf $file >> $logfile");
}
-

```

## runthroughput

```
: # --Perl--
eval 'exec perl5 -S $0 ${1+"$@"}' # Horrible
kludge to convert this
    if 0; # into a
"portable" perl script

# usage runthroughput [UF]
# where UF is the optional parameter that
says to run the throughput test
# with the update functions. By default,
the update functions are not
# run
# If UF is not supplied and a number is
supplied, then that number is taken
# as the number of concurrent throughput
streams to run. This is also optional

push(@INC, split(':', $ENV{'PATH'}));

# Get TPC-D specific environment variables
require 'getvars';

# Use the macros in here so that they can
handle the platform differences.
# macro.pl should be sourced from cmvc,
other people wrote and maintain it.
require "macro.pl";
require "tpcdmacro.pl";

$runUF="no";
if (@ARGV > 0)
{
    if ($ARGV[0] eq "UF")
    {
        $runUF=$ARGV[0];
    }
}

@reqVars = ("TPCD_AUDIT_DIR",
            "TPCD_RUN_DIR",
            "TPCD_DBNAME",
            "TPCD_RUNNUMBER",
            "TPCD_SF",
            "TPCD_PLATFORM",
            "TPCD_PATH_DELIM",
            "TPCD_PRODUCT",
            "TPCD_AUDIT",
            "TPCD_PHYS_NODE",
            "TPCD_MODE",
            "TPCD_ROOTPRIV",
            "TPCD_NUMSTREAM");

&setVar(@reqVars, "ERROR");

if (length($ENV{"TPCD_LOG_DIR"}) <= 0)
{
    $ENV{"TPCD_LOG_DIR"} = "NULL";
}

#set up local variables
$runNum=$ENV{"TPCD_RUNNUMBER"};
$numStream=$ENV{"TPCD_NUMSTREAM"};
$runDir=$ENV{"TPCD_RUN_DIR"};
$auditDir=$ENV{"TPCD_AUDIT_DIR"};
```

```
$dbname=$ENV{"TPCD_DBNAME"};
$sf=$ENV{"TPCD_SF"};
$product=$ENV{"TPCD_PRODUCT"};
$platform=$ENV{"TPCD_PLATFORM"};
$delim=$ENV{"TPCD_PATH_DELIM"};
$RealAudit=$ENV{"TPCD_AUDIT"};
$inlistmax=$ENV{"TPCD_INLISTMAX"};
$gatherstats=$ENV{"TPCD_GATHER_STATS"};
$logDir=$ENV{"TPCD_LOG_DIR"};
$rootPriv=$ENV{"TPCD_ROOTPRIV"};
$mode=$ENV{"TPCD_MODE"};

$path="$auditDir${delim}auditruns";

if (( $mode eq "uni" ) || ( $mode eq "smp"
))
{
    $all_ln="once";
    $all_pn="once";
    $once="once";
}
else
{
    $all_ln="all_ln";
    $all_pn="all_pn";
    $once="once";
}

# return 1 if the given pattern(parameter
$_[0]) matches any file
sub existfile {
    if ($platform eq "aix" || $platform eq
"sun" || $platform eq "ptx" || $platform eq
"linux")
    {
        `ls $_[0] 2> /dev/null | wc -l` + 0 !=
0;
    }
    else
    {
        `dir /b $_[0] 2> NUL | wc -l` + 0 != 0;
    }
}

if ($inlistmax eq "default")
{
    $inlistmax = 400;
}

# no longer stop and start the dbm between
runs when not in realaudit mode
#if ( $RealAudit ne "yes" )
#{
#     # if we are not in real audit mode then
we must start the db manager now
#     system("db2start");
#     # activate the database
#     system("db2 activate database
$dbname");
#}

$misofile="$runDir${delim}miso$runNum";
# append isolation level information about
tpcdbatch to the miso file
open(MISO, ">>$misofile") || die "Can't open
$misofile: !\n";
$curTs = `perl gettimestamp "long"`;
print MISO "Timestamp and isolation level of
tpcdbatch before throughput run at :
$curTs\n";
close(MISO);
```

```

if ( $product eq "pe" )
{
    system("db2 \"connect to $dbname\"; db2
\"select
name,creator,valid,unique_id,isolation from
sysibm.sysplan where name like 'TPCD%'\>
$runDir${delim}miso$num " );
}
else
{
    &verifyTPCdbatch("$misofile","$dbname");
}

# kick off the script that will monitor for
the database applications during
# the running of the throughput tests. This
will quit when the mtinterX.metrics
# (where X=runnumber) file has been created.

# set variables to run streams in parallel
if ( $platform eq "nt" )
{
    $streamExNT = "start /b";
    $streamEx = "";
}
else
{
    $streamExNT = "";
    $streamEx = "&";
}
if ( $platform eq "aix" || $platform eq
"sun" || $platform eq "nt" || $platform eq
"hp" || $platform eq "linux")
{
    system("$streamExNT perl watchstreams
$streamEx");
}
else
{
    die "platform not supported, can't start
watchstreams in background";
}

# show the disks that are used/unused
#if ( $platform eq "aix")
#{
#    system("getdisks \"Before the start of
the Throughput Test\");
#}

if ($gatherstats eq "on")
{
    # gather vm io and net stats
    if ( $platform eq "aix" || $platform eq
"sun" || $platform eq "ptx" || $platform eq
"hp" || $platform eq "linux")
    {
        # gather vmstats and iostats (and net
stats if in mpp mode)
        system("perl getstats t &");
    }
    else
    {
        print "Stats gather not set up for
current platform $platform\n";
    }
}

# the auditruns directory is where we have
already generated the sql files
# for the updates and the power tests

$loopStream=1;

for ( $loopStream = 1; $loopStream <=
$numStream; $loopStream++)
{
    print "starting stream $loopStream\n";
    system("echo Executing stream
$loopStream out of $numStream.");
    # run the queries
    if ( $platform eq "aix" || $platform eq
"sun" || $platform eq "nt" || $platform eq
"ptx" ||
        $platform eq "hp" || $platform eq
"linux")
    {
        system("$streamExNT
$path${delim}tpcdbatch -d $dbname -f
$runDir${delim}qttextt$loopStream.sql -r on -
b on -s $sf -u t1 -m $inlistmax -n
$loopStream $streamEx");
    }
    else
    {
        die "platform $platform not
supported yet";
    }
}

# run the update function stream...this
will wait until the queries have
# completed to kick off the updates
print "starting update stream\n";

if ($runUF eq "no") {

$ret=system("$auditDir${delim}auditruns${del
im}tpcdbatch -d $dbname -f
$runDir${delim}quft.sql -r on -b on -s $sf -
u t -m $inlistmax -n $numStream");
}
else {

$ret=system("$auditDir${delim}auditruns${del
im}tpcdbatch -d $dbname -f
$runDir${delim}quft.sql -r on -b on -s $sf -
u t2 -m $inlistmax -n $numStream");
}

print "update stream done\n";

&getConfig("t");
if ( $rootPriv eq "yes" )
{
    # get the o/s tuning
parameters...currently AIX only and only if
your
    # user has root privileges to run this
&getOSTune("t");
}

#if ( $platform eq "aix")
#{
#    # show the disks that are used/unused
#    system("getdisks \"After the completion
of the Throughput Test\");
#}
if ($gatherstats eq "on")

```

```

{
    # gather vm io and net stats
    if ($platform eq "aix" || $platform eq
"sun" || $platform eq "ptx" || $platform eq
"linux")
    {
        # kill the stats that were being
gathered
        if ($platform eq "ptx")
        {
            $src= `perl5 zap -f "sar"`;
            $src= `perl5 zap -f "sadc"`;
        }
        else
        {
            $src= `perl5 zap -f "vmstat"`;
            $src= `perl5 zap -f "iostat"`;
        }
        if ( $pn > 1 )
        {
            $src= `perl5 zap -f "netstat"`;
        }
        $src= `perl5 zap -f "getstats"`;
    }
}

open(MISO, ">>$misofile") || die "Can't open
$misofile: $!\n";
$curTs = `perl gettimestamp "long"`;
print MISO "Timestamp and isolation level of
tpcdbatch after throughput run at :
$curTs\n";
close(MISO);

if ( $product eq "pe" )
{
    system("db2 \\"connect to $dbname\\"; db2
\\"select
name,creator,valid,unique_id,isolation from
sysibm.sysplan where name like 'TPCD%'\\" >>
$runDir${delim}miso$runNum");
}
else
{
    &verifyTPCdbatch("$misofile",$dbname");
}

if ( $RealAudit ne "yes" )
{
    $curTs = `perl gettimestamp "short"`;
    # grab the db and dbm snapshot before we
deactivate
    system("db2 get snapshot for all on
$dbname >
$runDir${delim}dbTrun$runNum.snap.$curTs");
    system("db2 get snapshot for database
manager >>
$runDir${delim}dbTrun$runNum.snap.$curTs");
}

# now copy the reports from the count of
streams files into one final file
&cat ("$runDir${delim}strcnt*", "$runDir${deli
m)mstrcnt$runNum");
#(NOTE: there is a dependency that this
mstrcnt file exist before the
# calcmetrics.pl script is called, both
because it is used as input for
# calcmetrics.pl, and because the output
from calcmetrics is used as
# the trigger for watchstreams to complete,
and watchstreams cats its
# output at the end of the mstrcnt file.

# generate the mtinter?.metrics file in the
run directory
#require 'calcmetrics.pl';

if ( $runUF ne "no")
{
    system("perl calcmetrics.pl $numStream
UF");
}
else
{
    system("perl calcmetrics.pl $numStream");
}

# concatenate all the throughput inter files
that were used to
# generate these results into the
calcmetrics output file (mtinterX.metrics)
#cd $TPCD_RUN_DIR
&cat ("$runDir${delim}mts*inter*", "$runDir${d
elim)mtinter$runNum.metrics");

if ( $runUF ne "no") {
    &cat ("$runDir${delim}mtufinter*", "$runDir${d
elim)mtinter$runNum.metrics");
}

if (&existfile("$runDir${delim}mp*")) {
    # generate the mplot stuff
    system("perl gen_mplot");

    # generate the mlog information file
    require 'buildmlog';
}

#if ( $runUF eq "no") {
#    &rm ("$runDir${delim}mtuf*");
#}

# deactivate the database this needs to
remain at the end of run throughput so
# asynchronous writing of the log files
completes.
system("db2 deactivate database $dbname");
$src=&dodb_noconn("db2 get db cfg for $dbname
| grep -i log >>
$runDir${delim}endLog.Info", $all_ln);
if ( $logDir ne "NULL" )
{
    $src=&dodb_noconn("$dircmd $logDir >>
$runDir${delim}endLog.Info", $all_ln);
}

#system("db2_all \'}db2 get db cfg for tpcd
| grep -i log >> $runDir${delim}endLog.Info
; db2 terminate\ '");
#system("ls -ltra /node??vg.log/NODE00* >>
$runDir${delim}endLog.Info");

#Create Catalog info
$src = system("perl catinfo.pl p");

if ( $src != 0 )
{
    warn "catinfo failed!!!\n";
}

```



```

}

#Report current log info to the run#
directory in a file called endLog.Info
system("perl getLogInfo.pl endLog");

# if we are in audit mode we must do a
db2stop at the end of the power/throughput
run
if ( $RealAudit eq "yes" )
{
    system("db2stop");
}

1;

sub getConfig
{
    $stesttype=$_[0];
    print "Getting database configuration.\n";

    $dbtunefile="$runDir${delim}m${testtype}dbtu
ne${runNum}";
    open(DBTUNE, ">$dbtunefile") || die "Can't
open $dbtunefile: $!\n";
    $timestamp=`perl gettimestamp "long"`;
    print DBTUNE "Database and Database
manager configuration taken at :
$timestamp";
    close(DBTUNE);
    system("db2level >> $dbtunefile");
    system("db2 get database configuration for
$dbname >> $dbtunefile");
    system("db2 get database manager
configuration >> $dbtunefile");
    system("db2set >> $dbtunefile");
}

sub getOSTune
{
    $stesttype=$_[0];
    if ( $platform eq "aix" || $platform eq
"linux")
    {
        print "Getting OS and VMdatabase
configuration.\n";

        $ostunefile="$runDir${delim}m${testtype}ostu
ne${runNum}";
        open(OSTUNE, ">$ostunefile") || die
"Can't open $ostunefile: $!\n";
        $timestamp=`perl gettimestamp "long"`;
        print OSTUNE "Operating System and
Virtual Memory configuration taken at :
$timestamp";
        close(OSTUNE);

        system("${delim}usr${delim}samples${delim}ke
rnel${delim}schedtune >> $ostunefile");

        system("${delim}usr${delim}samples${delim}ke
rnel${delim}vmtune >> $ostunefile");
    }
    else
    {
        print "OS parameters retrieval not
supported for $platform \n";
    }
}

```

```

sub verifyTPCdbatch
{
    $logfile=$_[0];
    $dbname=$_[1];
    $file="verifytpcdbatch.clp";
    open(VERTBL, ">$file") || die "Can't open
$file: $!\n";
    print VERTBL "connect to $dbname;\n";
    print VERTBL "select
name,creator,valid,last_bind_time,isolation
from sysibm.sysplan where name like
'TPCD%';\n";
    print VERTBL "connect reset;\n";
    print VERTBL "terminate;\n";
    close(VERTBL);
    system("db2 -vtf $file >> $logfile");
}
-

```

## tpcdbatch.h

```

/*****
*****
*
*   TPCDBATCH.H
*
*   Revision History:
*
*   27 may 99 bbe from (24 nov 98 jen)
fixNTtimestamp - fixed NT timestamp to print
millisecond correctly
*   27 may 99 bbe from (10 dec 98 jen) SUN -
added Haider's changes necessary for SUN
*   17 jun 99 jen   Increased version to 5.1
*   10 aug 99 bbe   Increased version to 5.2
*   13 aug 99 bbe   Increased version to 5.3
*   18 mar 02 ken   Increased version to 5.7
*****
*****/

/** Necessary header files */

/** System header files */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <math.h>
#include <fcntl.h> /* SUN bbe
*/

#include <time.h>
#include <ctype.h>
#if (defined(SQLAIX) || defined(SQLPTX) ||
defined(LINUX) || defined(SQLHP))
#include <unistd.h> /* SUN */
#include <sys/stat.h> /* SUN */
#endif
#if ((defined(SQLAIX) || defined(SQLPTX)) &&
!defined(LINUX))
#include <sys/vnode.h> /* SUN
*/
#endif
#ifndef SQLWINT
#include <sys/time.h>
/*@d33143aha*/
#include <sys/ipc.h>
#include <sys/sem.h>

```

```

#if (!defined(SQLPTX) && !defined(LINUX)&&
!defined(SQLHP))
#include <sys/mode.h>
#endif
#include <sys/timeb.h>
#include <sys/types.h>
#else
#include <windows.h>
#include <sys\timeb.h>
#endif
#include <errno.h>

/** External header files **/
#include "sqlda.h"
#include "sqlenv.h"
#include "sql.h"
#include "sqlmon.h"
#include "sqlca.h"
#include "sqlutil.h"
#include "sqlcodes.h"

/** Internal header files **/
/** #ifdef __cplusplus **/
/** #include "sqlz.h" **/
/** #include "sqlzcopy.h" **/
/** #endif **/

/*****
*****/
/* Define synonyms here
*/
/*****
*****/
#define TPCDBATCH_VERSION "5.7"

#define TPCDBATCH_NONSQL      10
/* @d23684 tjjg */
#define TPCDBATCH_SELECT      20
#define TPCDBATCH_NONSELECT   30
#define TPCDBATCH_EOBLOCK     40
/* @d30369 tjjg */
#define TPCDBATCH_INSERT      50
#define TPCDBATCH_DELETE      60

#define TPCDBATCH_MAX_COLS    100
/* @d30369 tjjg */

#define TPCDBATCH_CHAR char

#define TPCDBATCH_PRINT_FLOAT_WIDTH 20
/* kmw - allow 15 whole digit for %#.3f
format */
/* - note: use > 18, size of long
indentifier so that it will */
/* be larger than any column heading
*/
#define TPCDBATCH_PRINT_FLOAT_MAX 1e15
/* kmw */
/* #define TPCD_PREPARETIME 1 */ /* for
separate prep/exec on uf jen 1106 */

#ifdef SQLWINT
#define PATH_DELIM '\\'
#define sleep(a) Sleep((a)*1000)
#else
#define PATH_DELIM '/'
#endif

#define PARALLEL_UPDATES 1
#endif PARALLEL_UPDATES
#define UF1OUTSTREAMPATTERN
"%s%cuf1.%02d.%d.out"
#ifdef TPCD_NONPARTITIONED
#define UF2OUTSTREAMPATTERN
"%s%cuf2.%02d.%d.out"
#else
/* kelly add same as NONPART. */
#define UF2OUTSTREAMPATTERN
"%s%cuf2.%02d.%d.out"
/* kelly ... take this out ... should be
same name as for non-partitioned
#define UF2OUTSTREAMPATTERN
"%s%cuf2.%02d.%d.%d.out" */ /*DELjen
add delchunk*/
#endif
#define BUFSIZE 1024
#endif

#define T_STAMP_FORM_1 1
#define T_STAMP_FORM_2 2
/* jen TIME_ACC start */
#define T_STAMP_FORM_3 3
#define T_STAMP_1LEN 17
#if defined (SQLUNIX) || defined (SQLAIX) ||
defined (SQLHP)
#define T_STAMP_3LEN 24
#elif (defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS))
#define T_STAMP_3LEN 21 /* WIN NT
timestamp fix bbe */
#else
#error Unknown operating system
#endif
/* jen TIME_ACC start */

#define BLANKS "\0"
#define READMODE "r\0"
#define WRITEMODE "w\0"
#define APPENDMODE "a\0"
#define mem_error(xx)
\
{ fprintf(stderr, "\n--Out of memory when
%s.\n", xx); }
/* Display out-of-memory and end */

#define TPCDBATCH_MIN(x,y) ((x) <
(y) ? (x) : (y))
/** Returns the smaller of both x and y **/
#define TPCDBATCH_MAX(x,y) ((x) >
(y) ? (x) : (y)) /* @d22817 tjjg */
/** Returns the larger of both x and y **/

/** Defines needed for decimal conversion
**/
#define SQLZ_DYNLINK
#define TRUE 1
#define LEFT 1
#define RIGHT 0
#define FALSE 0
#define sqlrx_get_left_nibble(byte)
(((unsigned char)(byte)) >> 4)

#define sqlrx_get_right_nibble(byte)
(((unsigned char)(byte) & '\x0f'))
#define SQL_MAXDECIMAL 31

```

```

#define SQLRX_PREFERRED_PLUS 0x0c

/** Timer-necessary defines for portability
**/
#if (defined (SQLOS2) || defined (SQLWINT))
|| defined (SQLWIN) || defined (SQLDOS)
typedef struct timeb Timer_struct;
#elif (defined (SQLUNIX) || defined (SQLAIX)
|| defined (SQLHP)) /*TIMER
jen*/
typedef struct timeval Timer_struct;
#else
#error Unknown operating system
#endif

/* sleep time between starting subsequent
tpcdbatches running UF1 and UF2 */
#define UF1_SLEEP 1
#define UF2_SLEEP 1
#define UF_DEADLOCK_SLEEP 1 /* sleep between
deadlock retries in UF1,UF2 */

#define MAXWAIT 50 /* maximum retries for
deadlock encounters */

#define DEBUG 0 /* to be set to 1 for
diagnostic purposes if needed */
/* #define UF1DEBUG 1 */
/* #define UF2DEBUG 1 */

```

## ***tpcdbatch.sqc***

```

/*****
*****
*
*   TPCDBATCH.SQC
*
*   Revision History:
*
*   21 Dec 95 jen   Corrected calculation of
geometric mean to include in the
*                   count of statements the
update functions.
*   03 Jan 96 jen   Corrected calculation of
arithmetic mean to not include the
*                   timings for the update
functions. (only want query timings
*                   as part of arithmetic
mean)
*   15 Jan 96 jen   Added extra timestamps to
the update functions.
*   22 Jan 96 jen   Get rid of checking of
short_time....we always use the long
*                   timings.
*                   Fixed timings to print
query/uf times rounded up to 0.1 seconds
*                   and uses these rounded
time values in subsequent calculations
*                   Fixed bug where last seed
in mseedme file wasn't getting read
*                   correctly - EOF processing
done too soon.
*
*   22 Feb 96 kbs   port to NT
*   26 Mar 96 kbs   Fix to avoid countig UFs
as queries for min max
*   27 Jun 97 wlc   Temporarily fixed deadlock
problems when doing UF1, UF2

```

```

*   30 Jul 97 wlc   Add in support for
load_update and TPCD_SPLIT_DELETES
*   13 Aug 97 wlc   fixed UF1 log file
formatting problem,
*                   using TPCD_TMP_DIR for
temp files instead of /tmp,
*                   make summary table fit in
80-column,
*                   fixed UF2 # of deleted
rows reporting problem
*   18 Aug 97 wlc   added command line support
for inlistmax
*   20 Aug 97 wlc   added support for
runthroughput without UF
*   27 Aug 97 aph   Replaced hardcoded
'tpcdaudit' with getenv("TPCD_AUDIT_DIR")
*   05 Sep 97 wlc   fixing free() problem in NT
*   26 Sep 97 kmw   change FLOAT processing in
echo_sqllda and print_headings
*   10 oct 97 jen   add lock table in share
mode for staging tables
*   21 oct 97 jen   added explicit rollback on
failure of ufl
*   27 oct 97 jen   don't update
TPCD.xxxx.update.pair.num if not running UFs
in
*                   throughput run
*   01 nov 97 jen   temp code to do a prep then
execute stmt in UFs so we can
*                   get timings
*   03 nov 97 jen   realigned UF code for
readability
*                   pushed UF2 commit into loop
for inlistmax
*                   fixed UF2 code so rollback
performed
*   04 nov 97 jen   Added code to handle vldb
*   06 nov 97 jen   Commented out temp code for
prep then execute stmts using
*                   TPCD_PREPARETIME def
*                   Updated version number to
2.2
*                   send all output during
update functions to output files, not
*                   stderr
*   10 nov 97 jen   jenCI Updated version
number to 2.3
*                   Added handling of
TPCD_CONCURRENT_INSERTS. Change control of
*                   chunk processing to use the
concurrent_inserts value as the
*                   control. Now the inserts
will be run in TPCD_CONCURRENT_INSERTS
*                   sets, each having
concurrent_inserts/
*   13 nov 97 jen   jen DEADLOCK. FIxed bug
that Alex found where deadlock count
*                   (maxwait) was incremented
on every execution of the stmt as
*                   opposed to just when
deadlock really happened.
*   14 nov 97 jen   jenSEM - fix up error
reporting on semaphore failure
*                   sem_op now returns failure
to caller so caller can report where
*                   failure has happened.
*                   Forced dbname to be upper
case, an all other parts of update
*                   pair number to be lowercase
*   15 nov 97 jen   SEED Reworked code to grab
the seed from the seed file. Now

```

```

*           reusing seeds between runs,
so power run will always use first
*           seed, throughput will use
the 2nd - #stream+1 seeds
*
* 13 jan 98 jen LONG Increase stmt_str to
be able to hold inlists with larger
*           order key numbers
* 04 mar 98 jen IMPORT added support for
TPCD_UPDATE_IMPORT to chose whether
*           using import or load api's
for loading data into the staging
*           tables
* 04 mar 98 jen TIMER changed from using
gettimer to gettimeofday for unix
* 01 apr 98 jen Fixed IMPORT code to do the
proper checking on strcmp (ie !strcmp)
* 01 apr 98 jen removed code to handle vldb
- not needed
*           Upgraded version to 2.4
for ( chunk
* 01 apr 98 jen Fixed up import code on NT
so the variable is recognized in the
*           children
* 25 may 98 sks Reworked some of the
environment variable code so consolidate as
*           much as possible. Not all
complete because of differences in
*           the way nt and AIX calls
(and starts stuff in background) for UFs
* 29 may 98 jen REUSE_STAGE Changed UF1 so
we reuse the same staging tables
*           instead of having a new set
for each update pair
* 06 jul 98 jen Removed locking of staging
tables since they are created with
*           locksize table now
* 06 jul 98 jen 912RETRY - added code to
retry query execution on 912 as well
*           as 911
* 07 jul 98 jen Fixed summary_table() so
1000x adjustment not based on UF (setting
*           of max and min pointers
*           Added generic SleepSome
function to handle NT vs AIX sleep
differences
* 01 apr 98 djd Added change to permit the
use of table functions for UF1.
*           to enable this set
TPCD_UPDATE_IMPORT to tf in TPCD.SETUP file.
*           MERGED this into base copy
on Jul 07
* 10 jul 98 jen haider's fix for
'ostream' var for error processing in
*           runUF1_fn and runUF2_fn
*           Updated version to 2.5
* 25 sep 98 jen Added stream number
printing into mpqry* files and increases
*           accuracy of timestamp in
mpqry (and mts*qry*) files
* 06 oct 98 jen TIME_ACC Added accuracy of
timestamp in mpqry (and mts*qry*)
*           files. Cleaned up misuse of
Sleep and flushed buffers on
*           deadlocks
* 19 oct 98 kbs fix UF2_fn to correctly
count rows deleted in case of deadlock
* 20 oct 98 kbs rewrite UF2 and UF2_fn for
static SQL with staging table
* 23 oct 98 jen Cleaned up retrying of
order/lineitem on lineitem deadlock in UF1
* 24 oct 98 jen Used load_uf1 and load_uf2
instead of general load_updates
* 26 oct 98 kbs inject the UF1 with a
single staging table
* 02 nov 98 jen Fixed processing of
multiple chunks in uf2 so don't duplicate
* 21 nov 98 kmw Fixed BIGINT
* 05 dec 98 aph Moved runUF1_fn() and
runUF2_fn() into a separate file tpcdUF.sqc
*           so that it can be bound
separately with a different isolation level.
* 21 dec 98 aph Integrated Jennifer's QppD
calculation (rounding & adjustment) fixes.
* 22 dec 98 aph For UFs during Throughput
run, defer CONNECT until children launched.
* 28 dec 98 aph Removed error_check() call
after CONNECT RESET
* 29 dec 98 aph For UFs do not COMMIT in
tpcdbatch.sqc. COMMITs happen in
tpcdUF.sqc.
* 18 jan 99 kal replaced header with
#include "tpcdbatch.h"
* 27 may 99 bbeaton from (03 mar 99 jen)
Fixed SUN fix that wasn't compatible with
*           NT (using %D %T instead of
%x %X for strftime)
* 16 jun 99 jen Added missing LPCTSTR cast
of semaphore file name for NT
* 17 jun 99 jen SEMA Changes semaphore file
for update functions to look for tpcd.setup
*           not for the orders.***
update data file
* 21 jul 99 bbeaton Added semaphore control
that allows runpower to be run as two
*           separate streams (update
and query). This involves the use of
*           two semaphores to be used
as it executes in three different
*           sections. The first is the
update inserts. The next is the query
*           stream which is started
with the update stream, but waits until
*           the inserts are complete.
The third section is the update deletes
*           which execute after the
queries are complete.
* 21 jul 99 bbeaton Added functions to
handle semaphore creation, control, etc.
* 21 jul 99 bbeaton Modified output to
mp*inter files. It now only outputs
*           intermediate data that will
be calculated by calcmetricp.pl. This
*           is a result of the runpower
being split into two streams and thus
*           tpcdbatch not having access
to all data.
* 21 jul 99 bbeaton The start time for
runpower UF2 now does not start until after
*           the query stream is
complete so that its wait time is not
included
*           NOTE: The wait time that
the first UF1 in runthroughput still
*           includes the wait period
that occurs waiting on queries.
* 18 mar 02 kentond removed the need for
list files. Instead of using the *.list
*           files to determine the name
of the output files, the tags for the
*           source sql files are used.

```

```

*****
*****/

/* included in tpcdbatch.sqc and tpcdUF.sqc
*/

#include "tpcdbatch.h"

/*****
*****/
/* global structure containing elements
passed between different functions */
/*****
*****/
struct global_struct
{
    struct stmt_info      *s_info_ptr;
/* ptr to stmt_info list */
    struct stmt_info      *s_info_stop_ptr;
/* ptr to last struct in list */
    struct comm_line_opt  *c_l_opt;
/* ptr to comm_line_opt struct */
    struct ctrl_flags     *c_flags;
/* ptr to ctrl_flags struct */
    Timer_struct          stream_start_time;
/* start time for stream TIME_ACC */
    Timer_struct          stream_end_time;
/* end time for stream TIME_ACC */
    char                  file_time_stamp[50];
/* time stamp for output files */
    double                scale_factor;
/* scale factor of database */
    char                  run_dir[150];
/* directory for output files */
    int                   copy_on_load;
/* indication of whether or not */

/* to do use a copy directory */

/* (equiv to COPY YES) on load */

/* default is FALSE */
    long                 lSeed;
/* seed used to generate the */

/* queries for this particular */

/* run. */
    FILE                 *stream_list;
/* ptr to query list file */
    char
update_num_file[150]; /* name of file that
keeps track */

/* of which update pairs have run*/
    char                 sem_file[150];
/* semaphore name */
    char                 sem_file2[150];
/* semaphore name bbe */
    FILE                 *stream_report_file;
/* file to report start stop */

/* progress of the stream */
};

/*****
*****/
/* New type declaration to store details
about SQL statement */
*****
*****/

/*****
*****/
struct stmt_info
{
    long                 max_rows_fetch;
    long                 max_rows_out;
    int                  query_block;

/* @d30369 tjj */
    unsigned int         stmt_num;
/* @d24993 tjj */
    double               elapse_time;
/* @d24993 tjj */
    double               adjusted_time;
    char                 start_stamp[50];
/* start time stamp for block */
    char                 end_stamp[50];
/* end time stamp for block */
    char                 tag[50];
/* block tag */
    char                 qry_description[100];
    struct stmt_info     *next;
/* @d24993 tjj */
};

/*****
*****/
/* Structure containing command line options
*/
/*****
*****/
struct comm_line_opt
{
/* @d22275 tjj */
/* kjd715 */
/* char
str_file_name[256]; /* output filename
*/
/* kjd715 */
    char                 infile[256]; /*
input filename */
    int                  intStreamNum; /*
integer version of stream number */
    int                  a_commit; /*
auto-commit flag */
    int                  short_time; /*
time interval flag */
    int                  update;
    int                  outfile;
};

/*****
*****/
/* Structure used to hold precision for
decimal numbers */
/*****
*****/
struct declen
{
/* kmw */
    unsigned char m; /* # of digits
left of decimal */
    unsigned char n; /* # of digits
right of decimal */
};

/*****
*****/
*****
*****/

```

```

/* Structure containing control flags passed between functions */
/*****
*****
*/
struct ctrl_flags
{
/* @d25594 tjpg */
int eo_infile;
int time_stamp;
int eo_block;
/* @d30369 tjpg */
int select_status;
};

/*****
*****
*/
/* Function Prototypes */
/*****
*****
*/
int SleepSome( int amount );
int get_env_vars(void);
int Get_SQL_stmt(struct global_struct *g_struct);

void print_headings (struct sqllda *sqllda, int *col_lengths); /* @d22817 tjpg */
void echo_sqllda(struct sqllda *sqllda, int *col_lengths);
void allocate_sqllda(struct sqllda *sqllda);

void get_start_time(Timer_struct *start_time);
double get_elapsed_time (Timer_struct *start_time);

long error_check(void);
/* @d28763 tjpg */
void dumpCa(struct sqlca*); /*kmw*/

void display_usage(void);
char *uppercase(char *string);
char *lowercase(char *string);
void comm_line_parse(int argc, char *argv[], struct global_struct *g_struct);
int sqlrxd2a(char *decptr, char *asciiptr, short prec, short scal);
void init_setup(int argc, char *argv[], struct global_struct *g_struct);
void runUF1( struct global_struct *g_struct, int updatePair );
void runUF2( struct global_struct *g_struct, int updatePair );

/* These need to be extern because they're in another SQC file. aph 981205 */
/*extern void runUF1_fn( int updatePair, int i );*/ /* aph 981205 */
/*extern void runUF2_fn( int updatePair, int i, int numChunks );*/ /* aph 981205 */
/* Added four new arguments because SQL host vars can't be global. aph 981205 */
extern void runUF1_fn ( int updatePair, int i, char *dbname, char *userid, char *passwd );
extern void runUF2_fn ( int updatePair, int thisConcurrentDelete, int numChunks, char *dbname, char *userid, char *passwd );

int sem_op (int semid, int semnum, int value);

char *get_time_stamp(int form, Timer_struct *timer_pointer); /* TIME_ACC jen */
void summary_table (struct global_struct *g_struct);
void free_sqllda (struct sqllda *sqllda, int select_status); /* @d30369 tjpg */
void output_file(struct global_struct *g_struct);
int PreSQLprocess(struct global_struct *g_struct, Timer_struct *start_time);
void SQLprocess(struct global_struct *g_struct);
int PostSQLprocess(struct global_struct *g_struct, Timer_struct *start_time);
int cleanup(struct global_struct *g_struct);

/* Semaphore control functions */
void create_semaphores(struct global_struct *g_struct);
void throughput_wait(struct global_struct *g_struct);
void runpower_wait(struct global_struct *g_struct, int sem_num);
void release_semaphore(struct global_struct *g_struct, int sem_num);
#ifdef SQLWINT
HANDLE open_semaphore(struct global_struct *g_struct, int num);
#else
int open_semaphore(struct global_struct *g_struct);
#endif

EXEC SQL INCLUDE SQLCA;

/*****
*****
*/
/* Declare the SQL host variables. */
/*****
*****
*/
EXEC SQL BEGIN DECLARE SECTION;

char stmt_str1[4000] = "\0"; /* Assume max SQL statment of 4000 char */
struct { /* jen
LONG *
short len;
char data[32700];
} stmt_str; /* jen
LONG *
char dbname[9] = "\0";
char userid[9] = "\0";
char passwd[9] = "\0";
char sourcefile[256]; /* used for semaphores and table functions?*/
sqlint32 chunk = 0; /* jenCI counter for within the set of chunks*/

EXEC SQL END DECLARE SECTION;

/*****
*****
*/

```

```

/* Declare the global variables.
*/
/*****
*****
struct sqllda *sqllda; /*
SQL Descriptor area */

/* Global environment variables (sks May 25
98)*/
char env_tpcd_dbname[100];
char env_user[100];
char env_tpcd_audit_dir[150];
char env_tpcd_path_delim[2];
char env_tpcd_tmp_dir[150];
char env_tpcd_run_on_multiple_nodes[10];
char env_tpcd_copy_dir[150];
char env_tpcd_update_import[10];

/* Other globals */
FILE *instream, *outstream; /*
File pointers */
int verbose = 0; /*
Verbose option flag */
int semcontrol = 1;
/* allows/disallows smaphores usage */
int updatePairStart; /*
update pair to start at */
int currentUpdatePair; /*
update pair running */
int updatePairStop; /*
update pair to stop before */
char newtime[50]="\0"; /*
Des - moved from get_time_stamp */
char outstreamfilename[256]; /*
store filename of outstream

wlc 081397 */
int inlistmax = 400; /*
define # of keys to delete at a time

wlc 081897 */
int sqllda_allocated = 0; /*
fixing free() problem in NT

wlc 090597 */
int iImportStagingTbl=0; /*
IMPORT use import or load (default) */
char temp_time_stamp[50]; /*
holds end timestamp to be copied into
start_time_stamp of next query bbeaton */
Timer_struct temp_time_struct; /*
holds end time value to be copied into
start_time of next query bbeaton */

/* constants for the semaphores used; 1 for
throughput and 2 for power */
#define INSERT_POWER_SEM 1
#define QUERY_POWER_SEM 2
#define THROUGHPUT_SEM 1

/*****
*****
/* Start main program processing.
*/
/*****
*****
int main(int argc, char *argv[])
{
/* kjd715 */
/*struct comm_line_opt c_l_opt = {
"\0","\0", 0, 1, 0, 0, 0 };*/ /* kjd715 */
struct comm_line_opt c_l_opt = { "\0", 0,
1, 0, 0, 0 };
/* kjd715 */
/* command line options */
Timer_struct start_time;
/* start point for elapsed time */

struct stmt_info s_info = { -1, -1, 0,
1, -1, -1, "\0", "\0", "\0", "\0", NULL };
/* first stmt_info structure */

struct ctrl_flags c_flags = { 0, 1, 0,
TPCDBATCH_SELECT };
/* structure holding ctrl flags
passed between functions */

/* TIME_ACC jen start */
#if defined (SQLUNIX) || defined (SQLAIX)
struct global_struct g_struct =
{ NULL, NULL, NULL, NULL, {0,0}, {0,0},
"\0", 0.1, "\0", FALSE, 0,
NULL, "\0", "\0", "\0", NULL };
#elif (defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS))
struct global_struct g_struct =
{ NULL, NULL, NULL, NULL, {0,0,0,0},
{0,0,0,0}, "\0", 0.1, "\0", FALSE, 0,
NULL, "\0", "\0", "\0", NULL };
#else
#error Unknown operating system
#endif
/* TIME_ACC jen end */

/* Get environment variables */
if (get_env_vars() != 0)
return -1;

/* perform setup and initialization and
get process id of agent */
outstream = stdout;
g_struct.c_flags = &c_flags;

g_struct.s_info_ptr = &s_info;
g_struct.c_l_opt = &c_l_opt;

init_setup(argc, argv, &g_struct);
/* @d22275 tjg */

if ((g_struct.c_l_opt->update == 1) &&
(semcontrol == 1))
/* runpower: wait for insert function to
complete */
/* waiting on the INSERT_POWER_SEM
semaphore */
runpower_wait(&g_struct,
INSERT_POWER_SEM);

strcpy(temp_time_stamp, "0");

/*****
*****
*
* This is the transition from the
"driver" to the "SUT"
*
*
*/
}

```

```

*****
*****/

/*****
*****/
/* Read in each statement, prepare,
execute, and send output to file. */

/*****
*****/

while (!c_flags.eo_infile) { /* Check to
see if there's no more input */

    c_flags.eo_block = 0;

    if (c_l_opt.outfile)
        output_file(&g_struct); /* determine
appropriate name for output files */
        if ((g_struct.c_l_opt->update != 3) &&
(g_struct.c_l_opt->update != 4))
        {
            if (!strcmp(temp_time_stamp, "0")) /*
if first query, get timestamp */
            {
                get_start_time(&start_time);
                strcpy(g_struct.s_info_ptr-
>start_stamp,
get_time_stamp(T_STAMP_FORM_3,&start_time
)); /* TIME_ACC jen*/
            }
            else /* else get the end timestamp
of previous query */
            {
                strcpy(g_struct.s_info_ptr-
>start_stamp, temp_time_stamp);
                start_time = temp_time_struct;
            }
            /* write the start timestamp to the
file...if this is not a qualification */
            /* run, then write the seed used as
well */

            fprintf( outstream,"Start timestamp
%*. *s \n",
                    T_STAMP_3LEN,T_STAMP_3LEN,
/* TIME_ACC jen*/
                    g_struct.s_info_ptr-
>start_stamp);
            if (c_l_opt.intStreamNum >= 0)
            {
                if (g_struct.lSeed == -1)
                {
                    fprintf( outstream,"Using
default qgen seed file");
                }
                else
                    fprintf( outstream,"Seed used =
%ld",g_struct.lSeed);

                fprintf( outstream,"\n");
            }
            do { /* Loop through these statements
as long as we haven't reached
the end of the input file or
the end of a block of statements
*/
                /*** Read in the next statement ***/
                c_flags.select_status=Get_SQL_stmt (&g_struct
                );
                if (PreSQLprocess(&g_struct,
&start_time) == FALSE)
                    /* if after reading the next
statement we see that we should
exit this loop (i.e. eof, update
functions, etc...), get out
*/
                    break;

                /*****
                *****
                *
                * The SQLprocess function
                implements the implementation specific
                layer. *
                * It can handle arbitrary SQL
                statements.
                *
                *
                *****
                *****/

                /* If we've got up to here then
processing
a regular SQL statement */
                SQLprocess(&g_struct);

                } while ((!c_flags.eo_block) &&
(!c_flags.eo_infile)); /* @d30369 tjj */

                if
                (PostSQLprocess(&g_struct,&start_time) ==
FALSE)
                    /* if we've reached the end of the
input file, then get out
of this loop (i.e. no more
statements). Otherwise get
elapsed times and display info
about rows */
                    break;

                } /* end of for loop for multiple SQL
statements */

                g_struct.s_info_ptr = &s_info; /* set the
global pointer to start of
linked
list */

                cleanup(&g_struct); /* finish some
semaphore stuff, cleanup files,
and print out
summary table */

                /*****
                *****
                *****
                *****/

```



```

*
*
*   In cleanup we make the transition
back from the "SUT" to the "driver"
*
*
*****
*****/

return(0);

} /* end of main */

/*****
*****/
/* Generic form of Sleep */
int SleepSome( int amount)
{
#ifdef SQLWINT
    sleep (amount);
#else
    Sleep (amount*1000);          /* 10x for
NT DJD Changed "sleep" to "Sleep" */
#endif
    return 0;
}

/*****
*****/

/*****
*****/
/* Get environment variables.  (sks May 25
98) */
/*****
*****/
int get_env_vars(void) {
    if (strcpy(env_tpcd_dbname,
getenv("TPCD_DBNAME")) == NULL) {
        fprintf(stderr, "\n The environment
variable $TPCD_DBNAME is not setup
correctly.\n");
        return -1;
    }
    if (strcpy(env_user, getenv("USER")) ==
NULL) {
        fprintf(stderr, "\n The environment
variable $USER is not setup correctly.\n");
        return -1;
    }
    if (strcpy(env_tpcd_audit_dir,
getenv("TPCD_AUDIT_DIR")) == NULL) {
        fprintf(stderr, "\n The environment
variable $TPCD_AUDIT_DIR is not setup
correctly.\n");
        return -1;
    }
    if (strcpy(env_tpcd_tmp_dir,
getenv("TPCD_TMP_DIR")) == NULL) {
        fprintf(stderr, "\n The environment
variable $TPCD_TMP_DIR is not setup
correctly.\n");
        return -1;
    }
}
#endif
if (strcpy(env_tpcd_path_delim,
getenv("TPCD_PATH_DELIM")) == NULL ||
(strcmp(env_tpcd_path_delim, "/") &&
strcmp(env_tpcd_path_delim, "\\"))){
    fprintf(stderr, "\n The environment
variable $TPCD_PATH_DELIM is not setup
correctly , env_tpcd_path_delim'%s'.\n",
env_tpcd_path_delim);

    return -1;
}
#endif
strcpy( env_tpcd_path_delim , "/" );
/*kmw*/
if
(strcpy(env_tpcd_run_on_multiple_nodes,
getenv("TPCD_RUN_ON_MULTIPLE_NODES")) ==
NULL) {
    fprintf(stderr, "\n The environment
variable $TPCD_RUN_ON_MULTIPLE_NODES");
    fprintf(stderr, "\n is not setup
correctly.\n");
    return -1;
}
if (strcpy(env_tpcd_copy_dir,
getenv("TPCD_COPY_DIR")) == NULL) {
    fprintf(stderr, "\n The environment
variable $TPCD_COPY_DIR is not setup
correctly.\n");
    return -1;
}
/* If TPCD_UPDATE_IMPORT is not set then,
the default is set to false, */
/* which is done in init_setup subroutine
*/
strcpy(env_tpcd_update_import,
getenv("TPCD_UPDATE_IMPORT"));

return 0;
}

/*****
*****/
/* Get the SQL statement and any control
statements from input. */
/*****
*****/
int Get_SQL_stmt(struct global_struct
*g_struct)
{
    char input_ln[256] = "\0"; /*
buffer for 1 line of text */
    char temp_str[4000] = "\0"; /* temp
string for SQL stmt */
    char control_str[256] = "\0"; /*
control string */

    char *test_semi; /* ptr
to test for semicolon */
    char *control_opt; /* ptr
used in control_str parsing */
    char *select_status; /* ptr
to first word in query */
    char *temp_ptr; /*
general purpose temp ptr */

    int good_sql = 0; /* good-
sql stmt flag @d23684 tjq */
    int stmt_num_flag = 1; /* first
line of SQL stmt flag */
    int eostmt = 0; /* flag
to signal end of statement */

```

```

    stmt_str.data[0]='\0';          /*
Initialize statement buffer      */

    if (verbose)
        fprintf (stderr, "\n-----
-----\n");
    fprintf (outstream, "\n-----
-----\n");

    do {
        /** Read in lines from input one at a
time **/
        fscanf (instream, "\n%[\n]\n",
input_ln);

        if (strstr(input_ln, "--") == input_ln)
        { /* Skip all -- comments */

            if (strstr(input_ln, "--#SET") ==
input_ln) {
                /*
Store control string but
keep going to find SQL stmt */
                strcpy (control_str, input_ln);
                if (verbose)
                    fprintf (stderr, "%s\n",
uppercase (control_str));
                fprintf (outstream, "%s\n",
uppercase (control_str));

                /** Start parsing control str.
and update appropriate vars. **/
                control_opt =
strtok (control_str, " ");
                while (control_opt != NULL) {
                    if (strcmp (control_opt, "--
#SET") == 0) { /* Skip the #SET token */
                        if
(!strcmp (control_opt, "ROWS_FETCH"))
                            g_struct->s_info_ptr-
>max_rows_fetch = atoi (strtok (NULL, " "));

                        if
(!strcmp (control_opt, "ROWS_OUT"))
                            g_struct->s_info_ptr-
>max_rows_out = atoi (strtok (NULL, " "));
                    }

                    control_opt = strtok (NULL, "
");
                }
            }

            /* if the block option has been
set, then check if we've
reached the end of a block of
statements */
            if (g_struct->s_info_ptr-
>query_block) /* @d30369
tjg */
                if (strstr (input_ln, "--#EOBLK")
== input_ln) {
                    g_struct->c_flags->eo_block =
1;
                    return TPCDBATCH_EOBLOCK;
                }
            if (strstr (input_ln, "-- Query") ==
input_ln)
                strcpy (g_struct->s_info_ptr-
>qry_description, input_ln);

                if (strstr (input_ln, "--#TAG") ==
input_ln)
                    strcpy (g_struct->s_info_ptr-
>tag, (input_ln + sizeof ("--#TAG")));

                /* if we're using update functions,
return that info
appropriately */
                if (g_struct->c_l_opt->update != 0)
                {
                    if (strstr (input_ln, "--
#INSERT") == input_ln)
                        return TPCDBATCH_INSERT;

                    if (strstr (input_ln, "--
#DELETE") == input_ln)
                        return TPCDBATCH_DELETE;
                }

                if (strstr (input_ln, "--#COMMENT")
== input_ln) { /* @d25594 tjg */
                    temp_ptr = (input_ln + 11); /*
User-specified comments go to
the outfile */
                    if (verbose)
                        fprintf
(stderr, "%s\n", temp_ptr);
                    fprintf
(outstream, "%s\n", temp_ptr);
                }

                eostmt=0;
            }

            /* Need this hack here to check if
there's any more empty lines left
in the input file. Continue only
if there are aren't any */
            else if (strcmp (input_ln, "\0")) /*
HACK */ { /* A regular SQL statement */
                if (stmt_num_flag) { /* print this
out only if it's the first line
of the SQL
statement. We only want this
line to
appear once per statement */
                    if (verbose)
                        fprintf (stderr, "\n%s\n",
g_struct->s_info_ptr->qry_description);
                    fprintf (outstream, "\n%s\n",
g_struct->s_info_ptr->qry_description);

                    if (verbose)
                        fprintf (stderr, "\nTag: %-5.5s
Stream: %d Sequence number: %d\n",
g_struct->s_info_ptr-
>tag, g_struct->c_l_opt->intStreamNum,
g_struct->s_info_ptr-
>stmt_num); /*jen0925*/
                    fprintf (outstream, "\nTag: %-5.5s
Stream: %d Sequence number: %d\n",
g_struct->s_info_ptr-
>tag, g_struct->c_l_opt->intStreamNum,
g_struct->s_info_ptr-
>stmt_num); /*jen0925*/

                    /* Turn off this flag once the
number has been printed */
                }
            }
        }
    }
}

```

```

        stmt_num_flag = 0;

    } /** Print out this heading the
first time you encounter a
        non-comment statement **/

    /* Test to see if we've reached the
end of a statement */
    good_sql = TRUE;
/* @d23684 tjg */
    test_semi = strstr (input_ln, ";");
    if (test_semi == NULL) { /* if
there's no semi-colon keep on going */
        strcat (stmt_str.data, input_ln);
/* jen LONG */
        strcat (stmt_str.data, " ");
/* jen LONG */
        stmt_str.len = strlen(
stmt_str.data ); /* jen LONG */
        eostmt = 0;
    }

    else { /* else
replace the ; with a \0 and continue */
        *test_semi = '\0';
        strcat (stmt_str.data, input_ln);
/* jen LONG */
        stmt_str.len = strlen(
stmt_str.data ); /* jen LONG */
        eostmt = 1;
    }

    fprintf(outstream, "\n%s",
input_ln);
    if (verbose)
        fprintf(stderr, "\n%s",
input_ln);
}

    /** Test to see if we've reached the
EOF. Get out if that's the case **/
    if (feof(instream)) {
        eostmt = TRUE;
        g_struct->c_flags->eo_infile =
TRUE; /* @d22275 tjg */
    }

} while (!eostmt);

fprintf(outstream, "\n");
if (verbose)
    fprintf(stderr, "\n");

/** erase the old control string **/
strcpy(control_str, "\0");

/** Determine whether statement is a
SELECT or other SQL **/
if (good_sql) {
    strcpy(temp_str, stmt_str.data);
/* jen LONG */
    uppercase(temp_str); /* Make sure
that select is made to SELECT */
    select_status = strtok(temp_str, " ");
    if ( (stmt_str.data[0] == '(') ||
(!strcmp(select_status, "SELECT")) ||
(!strcmp(select_status, "VALUES"))
||
(!strcmp(select_status, "WITH")) )
        return TPCDBATCH_SELECT;
    else
        return TPCDBATCH_NONSELECT;
}

/** If you go through a file with just
comments or control statements
with no SQL, there's nothing to
process...Exit TPCDBATCH **/

else
/* @d23684 tjg */
    return TPCDBATCH_NONSQL;
} /* Get_SQL_stmt */

/*****
*****
***** allocate_sqlda -- This routine allocates
space for the SQLDA. */
*****
*****
*****/

void allocate_sqlda(struct sqlda *sqlda)
{
    int loopvar;
/* Loop counter */

    for (loopvar=0; loopvar<sqlda->sqld;
loopvar++)
    {
        switch (sqlda->
sqlvar[loopvar].sqltype)
        {
            case SQL_TYP_INTEGER:
/* INTEGER */
            case SQL_TYP_NINTEGER:
                if ((sqlda->
sqlvar[loopvar].sqldata=
(TPCDBATCH_CHAR
*)malloc(sizeof(sqlint32))) == NULL)
                    mem_error("allocating INTEGER");
                break;
            case SQL_TYP_BIGINT:
/* BIGINT */ /*kmwBIGINT*/
            case SQL_TYP_NBIGINT:
/*#ifdef SQLWINT */
/* if ((sqlda->
sqlvar[loopvar].sqldata=
(TPCDBATCH_CHAR
*)malloc(sizeof(__int64))) == NULL)*/
/* #else */
                if ((sqlda->
sqlvar[loopvar].sqldata=
(TPCDBATCH_CHAR
*)malloc(sizeof(sqlint64))) == NULL)
/* #endif*/
                    mem_error("allocating BIGINT");
                break;
            case SQL_TYP_CHAR:
/* CHAR */
            case SQL_TYP_NCHAR:
                if ((sqlda->
sqlvar[loopvar].sqldata=
(TPCDBATCH_CHAR
*)calloc(256, sizeof(char))) == NULL)
                    mem_error("allocating
CHAR/VARCHAR");
                break;
            case SQL_TYP_VARCHAR:
/* VARCHAR */

```

```

        case SQL_TYP_NVARCHAR:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(4002,sizeof(char)) == NULL)
                mem_error("allocating
CHAR/VARCHAR");
                break;
            case SQL_TYP_LONG:
/* LONG VARCHAR */
            case SQL_TYP_NLONG:
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(32702,sizeof(char)) == NULL)
                mem_error("allocating
VARCHAR/LONG VARCHAR");
                break;
            case SQL_TYP_FLOAT:
/* FLOAT */
            case SQL_TYP_NFLOAT:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)malloc(sizeof(double)) == NULL)
                mem_error("allocating FLOAT");
                break;
            case SQL_TYP_SMALL:
/* SMALLINT */
            case SQL_TYP_NSMAIL:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)malloc(sizeof(short)) == NULL)
                mem_error("allocating
SMALLINT");
                break;
            case SQL_TYP_DECIMAL:
/* DECIMAL */
            case SQL_TYP_NDECIMAL:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)malloc(20) == NULL)
                mem_error("allocating DECIMAL");
                break;
            case SQL_TYP_CSTR:
/* VARCHAR (null terminated) */
            case SQL_TYP_NCSTR:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(4001,sizeof(char)) == NULL)
                mem_error("allocating
CHAR/VARCHAR");
                break;
            case SQL_TYP_DATE:
/* DATE */
            case SQL_TYP_NDATE:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(13,sizeof(char)) == NULL)
                mem_error("allocating DATE");
                break;
            case SQL_TYP_TIME:
/* TIME */
            case SQL_TYP_NTIME:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(11,sizeof(char)) == NULL)
                mem_error("allocating TIME");
                break;
            case SQL_TYP_STAMP:
/* TIMESTAMP */
            case SQL_TYP_NSTAMP:
            if ((sqlda-
>sqlvar[loopvar].sqldata=
                (TPCDBATCH_CHAR
*)calloc(29,sizeof(char)) == NULL)
                mem_error("allocating
TIMESTAMP");
                break;
            }
            if ((sqlda->sqlvar[loopvar].sqlind=
                (short
*)calloc(1,sizeof(short)) == NULL)
                mem_error("allocating indicator");
            }
            sqlda_allocated = 1; /* fix free()
problem on NT
                                wlc 090597 */
            return; /* allocate_sqlda */
        }

/*****
*****/
/* echo_sqlda -- This routine displays the
contents of an SQLDA. */
/*****
*****/

void echo_sqlda(struct sqlda *sqlda, int
*col_lengths)
{
    int col; /*
Column counter */

    int col_type; /*
Type of column */

    char temp_string[100] = "\0"; /*
Temporary string */
    char decimal_string[100] = "\0"; /*
String holding decimals */
    char *temp_ptr;

    TPCDBATCH_CHAR m,n;
/* precision and accuracy

for decimal conversion */

    for (col=0; col<sqlda->sqld; col++) /*
Loop through column count */
    {
        col_type=sqlda->sqlvar[col].sqltype;
/* @d22817 tjj */

        if (*(sqlda->sqlvar[col].sqlind))
/* @d30369 tjj */
            fprintf(outstream, "%* n/a
", (col_lengths[col]-3));
        else
            switch (col_type)
            {
                case SQL_TYP_INTEGER:

```

```

        case SQL_TYP_NINTEGER:

            fprintf(outstream, "%*ld
", col_lengths[col],
                *(sqlint32 *) (sqlda-
>sqlvar[col].sqldata));
            break;

            case SQL_TYP_BIGINT:
/*kmwBIGINT*/
            case SQL_TYP_NBIGINT:
/*#ifdef SQLWINT*/
/*      fprintf(outstream, "%*I64d
", col_lengths[col], */
/*      *(__int64 *) (sqlda-
>sqlvar[col].sqldata)); */
/*#else*/
            fprintf(outstream, "%*lld
", col_lengths[col],
                *(sqlint64 *) (sqlda-
>sqlvar[col].sqldata));
/*#endif*/
            break;

            case SQL_TYP_CHAR:
            case SQL_TYP_NCHAR:

                fprintf(outstream, "%-*s
", col_lengths[col], sqlda-
>sqlvar[col].sqldata);
                break;
            case SQL_TYP_VARCHAR:
            case SQL_TYP_NVARCHAR:
            case SQL_TYP_LONG:
            case SQL_TYP_NLONG:
/* @d30369 t jg */
                ((struct sqlchar *)sqlda-
>sqlvar[col].sqldata)->
                    data[((struct sqlchar
*)sqlda->sqlvar[col].sqldata)->length] =
                    '\0';
                fprintf(outstream, "%-*s ",
                    col_lengths[col],
                    ((struct sqlchar
*)sqlda->sqlvar[col].sqldata)->data);
                break;
            case SQL_TYP_FLOAT:
            case SQL_TYP_NFLOAT:
            { /* kmw */
                if ( fabs(*(double *) (sqlda-
>sqlvar[col].sqldata)
                    <
                    TPCDBATCH_PRINT_FLOAT_MAX )
                    fprintf(outstream, "%#*.3f
", col_lengths[col],
                        *(double *) (sqlda-
>sqlvar[col].sqldata));
                    else
                        fprintf(outstream, "%*e
", col_lengths[col],
                            *(double *) (sqlda-
>sqlvar[col].sqldata));
                    break;
                }

            case SQL_TYP_SMALL:
            case SQL_TYP_NSMALL:

                fprintf(outstream, "%*hd
", col_lengths[col],

```

```

                *(short *) (sqlda-
>sqlvar[col].sqldata));
                break;
            case SQL_TYP_DECIMAL:
            case SQL_TYP_NDECIMAL:

                m=*(struct declen *)&sqlda-
>sqlvar[col].sqlen).m;
                n=*(struct declen *)&sqlda-
>sqlvar[col].sqlen).n;
                if (sqlrxd2a((char *)sqlda-
>sqlvar[col].sqldata,temp_string,m,n) != 0)
                {
                    fprintf(stderr, "\nThe
decimal value could not be converted.\n");
                    exit (-1);
                }
                else {

                    temp_ptr = temp_string;

                    if (*temp_ptr == '-')
                        strcpy(decimal_string, "-
");

                    else
                        strcpy(decimal_string, "
");

                    for (temp_ptr = temp_string +
1; *temp_ptr == '0'; temp_ptr++)
                        ;

                    strcat(decimal_string,temp_ptr);
                    fprintf(outstream, "%*s
", col_lengths[col], decimal_string);
                }

                break;

            case SQL_TYP_CSTR:
            case SQL_TYP_NCSTR:
            case SQL_TYP_DATE:
            case SQL_TYP_NDATE:
            case SQL_TYP_TIME:
            case SQL_TYP_NTIME:
            case SQL_TYP_STAMP:
            case SQL_TYP_NSTAMP:
                sqlda-
>sqlvar[col].sqldata[sqlda-
>sqlvar[col].sqlen+1]='\0';
                strcpy(temp_string, (char
*)sqlda->sqlvar[col].sqldata);
                fprintf(outstream, "%-*s
", (col_lengths[col]), temp_string);
                break;

            default:
                fprintf(stderr, "--Unknown column
type (%d). Aborting.\n", col_type);
                break;
            }
        }

        fprintf(outstream, "\n");

        return;
    }
}

```

```

/*****
*****
/* Calculate the elapsed time.
*/
/*****
*****

void get_start_time(Timer_struct
*start_time)
{
    int rc = 0;

#if defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS)
/*@d33143aha*/
    ftime (start_time);
#elif defined (SQLSNI)
    rc = gettimeofday (start_time);
#elif defined (SQLPTX)
    gettimeofday_mapped (start_time);
    rc = 0; /* gettimeofday_mapped
returns void */
#elif defined (SQLUNIX) || defined (SQLAIX)
/*TIMER jen*/
    rc = gettimeofday (start_time, NULL);
#else
#error Unknown operating system
#endif

    if (rc != 0) {
        fprintf (stderr, "Timer call failed,
aborting test\nExiting tpcdbatch..\n");
        exit (-1);
    }
}

/*****
*****
/* Calculate and return the elapsed time
given a starting time. */
/*****
*****
double get_elapsed_time ( Timer_struct
*start_time)
{
    int                status = 0;
    Timer_struct      end_time;
    double             result = -1.0;
#ifdef SQLWINT
    long int           result_sec;
    long int           result_usec;
#endif
#endif

#if defined (SQLSNI)
    status = gettimeofday (&end_time);
#elif defined (SQLPTX)
    gettimeofday_mapped (&end_time);
    status = 0; /* gettimeofday_mapped
returns void */
#elif defined (SQLUNIX) || defined (SQLAIX)
    status = gettimeofday (&end_time, NULL);
/*TIMER jen*/
#elif defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS)
    ftime (&end_time);
#else
    /** If
another operating system */
#error Unknown operating system
#endif
}

#endif

    if (status != 0)
        fprintf (stderr, "Bad return from
gettimeofday, don't trust timer
results...\n");

    else
    {
#if defined (SQLUNIX) || defined (SQLAIX)
        result_sec = end_time.tv_sec -
start_time->tv_sec;
        result = (double) result_sec;
        /* TIMER used micro seconds with
timeval (not nanoseconds) */
        if ((start_time->tv_usec > 0) && \
            (start_time->tv_usec < 1000000) &&
\
            (end_time.tv_usec > 0) && \
            (end_time.tv_usec < 1000000))
        {
            result_usec = end_time.tv_usec -
start_time->tv_usec;
            result = (double) result_sec +
((double) result_usec/1000000);
        }
#elif defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS)
        result = (double) (end_time.time -
start_time->time);
        result = result * 1000 +
(end_time.millitm - start_time->millitm);
        result = result/1000;
#else
#error Unknown operating system
#endif

    }

}

/*
* translate the time to that rounded to
the CLOSEST 0.1 seconds as
* required by the TPC-D spec.  ROUNDING
*/
/* result = (double)((long)((result +
0.099999) * 10))/10.0;*/
result = (double)((long)((result + 0.05)
* 10))/10.0;
return (result);
}

void dumpCa (struct sqlca *ca)
{
    int i;
    fprintf (outstream, "*****
DUMP OF SQLCA *****\n");
    fprintf (outstream, "SQLCAID   : %.8s\n",
ca->sqlcaid);
    fprintf (outstream, "SQLCABC   : %d\n", ca-
>sqlcabc);
    fprintf (outstream, "SQLCODE   : %d\n", ca-
>sqlcode);
    fprintf (outstream, "SQLERRML  : %d\n", ca-
>sqlerrml);
    fprintf (outstream, "SQLERRMC  : %.8s\n",
ca->sqlerrml, ca->sqlerrmc);
    fprintf (outstream, "SQLERRP  : %.8s\n",
ca->sqlerrp);

    for (i = 0; i < 6; i++)

```

```

    {
        fprintf(outstream,"SQLERRD[%d]: %d\n", i,
ca->sqlerrd[i] );
    }
    fprintf(outstream,"SQLWARN   : %.11s\n",
ca->sqlwarn);
    fprintf(outstream,"SQLSTATE   : %.5s\n",
ca->sqlstate);
    fprintf(outstream,"*****
END OF SQLCA DUMP *****\n");
    return;
}

/*****
*****
*/
/* error_check
*/
/* This function prints the contents of the
sqlca error information
*/
/* structure.
*/
/*****
*****
long error_check(void)
{
    char          buffer[512]="\0";
    unsigned short i;
    struct sqlca  temp_sqlca;
temporary sqlca */
/* @d30369 tjjg */

    temp_sqlca.sqlcode = 0;
    initialize the temporary sqlca to
avoid
any memory problems */

    if (sqlca.sqlcode != 0) {
        sqlaintp(buffer, sizeof(buffer), 80,
&sqlca);
        fprintf(stderr, "\n%0.200s\n",
buffer);
        fprintf(outstream, "\n%0.200s\n",
buffer);

        /* Decode the SQLCA in more detail
KBS 98/09/28 */
        if ((sqlca.sqlerrml) /* there's one
or more tokens */
        && (sqlca.sqlerrml <
sizeof(sqlca.sqlerrmc)) /* and field not
full */)
        {
            char *tokptr;
            int tokl;
            *(sqlca.sqlerrmc + sqlca.sqlerrml)
= '\0'; /* prevent strtok from scanning
beyond end */
            fprintf(stderr, "\n      SQLCA:
tokens:\n");
            fprintf(outstream, "\n      SQLCA:
tokens:\n");
            tokptr=strtok(sqlca.sqlerrmc,
"\xff");
            while ( tokptr
&&
                ( tokl =
(sizeof(sqlca.sqlerrmc) - (tokptr-
sqlca.sqlerrmc)) > 0)
                )
            {
                fprintf(stderr, "%.*s\n", tokl,
tokptr);
                fprintf(outstream, "%.*s\n",
tokl, tokptr);
                tokptr=strtok(NULL, "\xff");
            }
            fprintf(stderr, "\n      SQLCA:   errp=
%.8s, errd 1-6= %d %d %d %d %d %d\n",
sqlca.sqlerrp,
sqlca.sqlerrd[0], sqlca.sqlerrd[1],
sqlca.sqlerrd[2],
sqlca.sqlerrd[3],
sqlca.sqlerrd[4], sqlca.sqlerrd[5]);
            fprintf(outstream, "\n      SQLCA:
errp= %.8s, errd 1-6= %d %d %d %d %d %d\n",
sqlca.sqlerrp,
sqlca.sqlerrd[0], sqlca.sqlerrd[1],
sqlca.sqlerrd[2],
sqlca.sqlerrd[3],
sqlca.sqlerrd[4], sqlca.sqlerrd[5]);

            temp_sqlca = sqlca; /* Make a copy of
sqlca in case it gets changed
in the next
statement below */
/* @d30369 tjjg */

            /* Determine if the error is critical
or a connection can be made */

            EXEC SQL CONNECT ;
/* @d28763 tjjg */

            if (sqlca.sqlcode == SQLE_RC_NOSUDB )
{ /* no connection exists */

                /*Print out header for DUMP*/
                fprintf(outstream,
"*****\n");
                fprintf(outstream, "**
CONTENTS OF SQLCA
*\n");
                fprintf(outstream,
"*****\n\n");
            };

            /*Print out contents of SQLCA
variables*/
            fprintf(outstream, "SQLCABC =
%ld\n", temp_sqlca.sqlcabc);
            fprintf(outstream, "SQLCODE =
%ld\n", temp_sqlca.sqlcode);
            fprintf(outstream, "SQLERRMC =
%0.70s\n", temp_sqlca.sqlerrmc);
            fprintf(outstream, "SQLERRP =
%0.8s\n", temp_sqlca.sqlerrp);

            for (i = 0; i < 6; i++)
            {
                fprintf(outstream, "sqlerrd[%d]
= %lu \n", i, temp_sqlca.sqlerrd[i]);
            }

            fprintf(outstream, "SQLWARN =
%0.11s\n", temp_sqlca.sqlwarn);
            fprintf(outstream, "SQLSTATE =
%0.5s\n", temp_sqlca.sqlstate);

            fprintf(stderr, "\nCritical
SQLCODE. Exiting TPCDBATCH\n");
            exit(-1);
        }
    }
}

```

```

    }
}
return (temp_sqlca.sqlcode);
} /* error_check */

/*****
*****/
/* Displays a help screen
*/
/*****
*****/
void display_usage()
{
    printf("\ntpcdbatch -- version
%s",TPCDBATCH_VERSION);
    printf("\n\nSyntax is:\n");
    printf("tpcdbatch [-d dbname] [-f
file_name] [-l file_name] [-r on/off]");
    printf("\n          [-v on/off] [-b
on/off] [-u p/t/t1/t2]");
    printf("\n          [-s scale_factor] [-n
stream_num] [-m inlistmax] [-h]\n");
    printf("\n  where: -d Database name");
    printf("\n          Default -
dbname set in $DB2DBDFT");
    printf("\n          -f Input file
containing SQL statements");
    printf("\n          Default -
stdin ");
    printf("\n          -r Create set of
output files containing query results");
    printf("\n          Default -
off");
    printf("\n          -v Verbose. Sends
information to stderr during");
    printf("\n          query
processing");
    printf("\n          Default -
off");
    printf("\n          -b Process groups of
statements as blocks ");
    printf("\n          instead of
individually.");
    printf("\n          Default -
off");
    printf("\n          -u Update streams: p
- for power test");
    printf("\n          t
- for throughput test without");
    printf("\n          t1
UFs (run this instead of t2)");
    printf("\n          t1
- for throughput test step 1");
    printf("\n          t2
only running queries");
    printf("\n          t2
- for throughput test step 2");
    printf("\n          running update functions");
    printf("\n          -s Scale factor");
    printf("\n          Default -
0.1");
    printf("\n          -n Stream number");
    printf("\n          Default
- 0");
    printf("\n          Qualification
- -1");
}

```

```

    printf("\n          Power
- 0");
    printf("\n          Throughput
- >= 1 (actual number depends on the current
query stream");
    printf("\n          -m Maximum number of
keys to delete at a time");
    printf("\n          Default -
400");
    printf("\n          -h Display this help
screen");
    printf("\n          -p turns smeaphores
on or off");
    printf("\n          Default -
off");

    printf("\n\nControl statements specifying
output and performance details");
    printf("\ncan be included before SQL
statements; they will apply for");
    printf("\nthat and subsequent statements
until updated.");

    printf("\n\nSyntax:  --#SET <control
option> <value>");
    printf("\n\n  option          value
default");
    printf("\nROWS_FETCH  -1 to n      -1
(all rows fetched from answer set)");
    printf("\nROWS_OUT    -1 to n      -1
(all fetched rows sent to output)");
    printf("\n\n--#TAG      tag
(user specified tag name for sequence#)");
    printf("\n--#COMMENT  comment
(user specified comments for output)");
    printf("\nNote: All statements executed
with ISOLATION LEVEL RR");
    printf("\n          and must be terminated
with semi-colons.\n");
    exit (1);
}

/*****
*****/
/* Converts a string to upper case
characters */
/*****
*****/
char *uppercase( char *string )
{
    char *c; /* temp char used to
convert word to upper case */

    for ( c = string; *c != '\0'; c++)
        *c = (char) toupper( (int) *c );

    return (string);
}

/*****
*****/
/* Converts a string to lower case
characters */
/*****
*****/
char *lowercase( char *string )
{
    char *c; /* temp char used to
convert word to lower case */
}

```



```

    for ( c = string; *c != '\0'; c++)
        *c = (char) tolower( (int) *c );

    return (string);
}

/*****
*****/
/* Parses and processes command line
options. */
/*****
*****/

void comm_line_parse(int argc, char *argv[],
struct global_struct *g_struct)
{
    char authent_info[40] = "\0";
    char *testptr;
    int loopvar = 0;

    int comm_opt = 0;
#ifdef PARALLEL_UPDATES
    int running_updates=0;
    int updatePair=-1;
    int updateStream=-1;
    int function;
    int copyOnOrOff;
    int deleteChunk=0;          /*DELjen */
#endif

    while ((loopvar < argc) && (argc != 1)) {

        if (*argv[loopvar] == '-') {

            switch(*(argv[loopvar]+1)) {

                case 'f' :
/* @d26350 tjpg */
                case 'F' :
                    strcpy(g_struct-
>c_l_opt->infile,argv[++loopvar]);
                    break;

                    /* kjd715 */
                case 'l' :
                case 'L' :
                    loopvar+=1;
                    /*
                    strcpy(g_struct-
>c_l_opt->str_file_name,argv[++loopvar]);
                    */
                    break;

                    /* kjd715 */
                case 'r' :
/* @d26350 tjpg */
                case 'R' :
                    if
(!strcmp(uppercase(argv[++loopvar]),"ON"))
                        g_struct->c_l_opt->outfile=1;
                    else
                        g_struct->c_l_opt->outfile=0;
                    break;

                case 'd' :
/* @d26350 tjpg */
                case 'D' :

                    strcpy(dbname,argv[++loopvar]);
                    break;

                case 'v' :
/* @d26350 tjpg */

                    case 'V' :
                        if
(!strcmp(uppercase(argv[++loopvar]),"ON"))
                            verbose=1;
                        else
                            verbose=0;
                        break;

                    case 'u' :
/* @d26350 tjpg */
                    case 'U' :
                        g_struct->c_l_opt->update=-1; /*
init to invalid number */
                        if
(!strcmp(uppercase(argv[++loopvar]),"P1"))
                            g_struct->c_l_opt->update=1;
/* power query stream*/
                        if
(!strcmp(uppercase(argv[loopvar]),"P2"))
                            g_struct->c_l_opt-
>update=3; /* power update with updates*/
                        if
(!strcmp(uppercase(argv[loopvar]),"P"))
                            g_struct->c_l_opt->update=4;
/* power update without updates*/
                        if
(!strcmp(uppercase(argv[loopvar]),"T1"))
                            g_struct->c_l_opt-
>update=0; /*throughput query stream */
                        if
(!strcmp(uppercase(argv[loopvar]),"T2"))
                            g_struct->c_l_opt-
>update=2; /* throughput update with updates
*/
                        if
(!strcmp(uppercase(argv[loopvar]),"T"))
                            g_struct->c_l_opt-
>update=5; /* throughput update without
updates */

                            break;

                    case 'b' :
/* @d26350 tjpg */
                    case 'B' :
                        if
(!strcmp(uppercase(argv[++loopvar]),"ON"))
                            g_struct->s_info_ptr-
>query_block=1;
                        else
                            g_struct->s_info_ptr-
>query_block=0;
                        break;

                    case 'n' :
/* @d26350 tjpg */
                    case 'N' :
                        g_struct->c_l_opt->intStreamNum
= atoi(argv[++loopvar]);
                        break;

                    case 's' :
/* @d26350 tjpg */
                    case 'S' :
                        g_struct-
>scale_factor=atof(argv[++loopvar]); break;

                    case 'h':
                    case 'H' :
/* @d26350 tjpg */
                        display_usage();
                        break;

```

```

        case 'm' :
        case 'M' :
            inlistmax =
atoi(argv[++loopvar]); /* wlc 081897 */
            break;

        case 'p' :
        case 'P' :
            if
(!strcmp(uppercase(argv[++loopvar]),"ON"))
/* bbe 072599 */
                semcontrol = 1;
            else
                semcontrol = 0;
            break;

#ifdef PARALLEL_UPDATES
        case 'i':
            updatePair = atoi
(argv[++loopvar]);
#ifdef UF2DEBUG
            fprintf (stderr, "updatePair =
%d\n",updatePair);
            fflush(stderr);
#endif
            break;

        case 'j':
            function = atoi
(argv[++loopvar]);
#ifdef UF2DEBUG
            fprintf (stderr, "function =
%d\n",function);
            fflush(stderr);
#endif
            break;

        case 'k':
            updateStream = atoi (argv
[++loopvar]);
#ifdef UF2DEBUG
            fprintf (stderr, "updateStream =
%d\n",updateStream);
            fflush(stderr);
#endif
            break;

        case 'x':
/*DEL jen -x is chunk*/
            deleteChunk = atoi
(argv[++loopvar]); /* to delete for
this */
#ifdef UF2DEBUG
            fprintf (stderr, "DelChunk =
%d\n",deleteChunk);
            fflush(stderr);
#endif
            break;
/* invocation */

        case 'z':
            running_updates = 1;
            break;
#endif

        default :
            fprintf(stderr,"An invalid
option has been set\n");
            display_usage();
            break;

```

```

        } /** end switch */
    } /** end if */

    loopvar ++;
} /** end while */

/* checking if -u option is set */
if (g_struct->c_l_opt->update == -1) {
    fprintf(stderr, "-u option is not set,
exiting ...\n");
    exit(-1);
}

#ifdef PARALLEL_UPDATES
    if (running_updates) {
        if (updatePair == -1) {
            fprintf (stderr, "The parameters to
tpcdbatch have not been passed
correctly\n");
            exit (-1);
        }
        else {
            /* check to see if we are to use
copy on for the load */
            if (( getenv("TPCD_LOG") != NULL )
&&
(!strcmp(uppercase(getenv("TPCD_LOG")), "YES"
)))
                {
                    /* okay, we have set LOG_RETAIN
on so we need to use copy directory */
                    copyOnOrOff = TRUE;
                }
            else
                {
                    /* log retain off don't use copy
directory */
                    copyOnOrOff = FALSE;
                }

            if (function == 1)
                /* runUF1_fn (updatePair,
updateStream);  aph 981205 */
                runUF1_fn (updatePair,
updateStream, dbname, userid, passwd);
            else
                if (function == 2) {
                    fprintf(stderr, "A-Calling
runUF2_fn %d %d %d ...\n",
updatePair, updateStream, deleteChunk);
                    /* runUF2_fn (updatePair,
updateStream, deleteChunk);  aph 981205 */
                    runUF2_fn (updatePair,
updateStream, deleteChunk, dbname, userid,
passwd);
                }
            else {
                fprintf (stderr, "Wrong function
to tpcdbatch\n");
                exit (-1);
            }
            exit (0);
        }
    }
#endif /* PARALLEL_UPDATES */

```

```

/* If no database name is given, then use the one specified in the
environment variable DB2DBDFT, otherwise error */
if (!strcmp(dbname, "\0")) {
    testptr = getenv("DB2DBDFT");
    if (testptr == NULL) {
        fprintf(stderr, "\nNo database name
has been specified on command ");
        fprintf(stderr, "line\n\nor in
environment variable DB2DBDFT.");
        display_usage();
    }
    else
        strcpy(dbname, testptr);
}
/* kjd715 */
/*
if (g_struct->c_l_opt->outfile) &&
!strcmp(g_struct->c_l_opt-
>str_file_name, "\0")) {
    fprintf(stderr, "\nMust specify input
file for statement list.\n");
    display_usage();
}
*/
/* kjd715 */
}

/*****
*****/
/* Converts DECIMAL values to ASCII text
*/
/*****
*****/
int sqlrxd2a(
/*kmw*/

/* C++ */char *decptr,

/* C++ */char *asciiptr,

short prec,

short scal)
/* */
int allzero = TRUE;
/* C++ */char *srcptr;
unsigned char sign;
/* C++ */char *targptr, decimal_point =
'.';
int rc = 0;
/*kmw*/
int tmpint, src_nibble;
int count, j, limit[3];

targptr = &asciiptr[ prec + 1];
*(1 + targptr) = '\0';
srcptr = decptr + prec/2;

/* Validity check sign nibble */
if (((sign = sqlrx_get_right_nibble(
*srcptr )) < 0x0a)
|| (prec > SQL_MAXDECIMAL) || (prec <
scal ))
{
    goto exit;
}

}/** end end if invalid sign value **/

limit[ 0 ] = scal; limit[ 1 ] = prec -
scal; limit[ 2 ] = 0;
src_nibble = LEFT;
for( j = 0 ; j < 2 ; j++ )
{
    for( count = limit[ j ] ; count > 0 ;
count-- )
    {
        tmpint = ( (src_nibble == LEFT)?
sqlrx_get_left_nibble(
*srcptr-- ) :
sqlrx_get_right_nibble(
*srcptr ) );
        if( tmpint > 9 )
        {
            goto exit;
        }
        else
            *targptr-- = (/* C++
*/char)tmpint + '0';
        src_nibble = ((src_nibble == LEFT)
? RIGHT : LEFT);
        if ( tmpint != 0 ) allzero = FALSE;
    } /** end for scal > 0 **/

    if( j == 0 )
        *targptr-- = decimal_point;
    else
        *targptr = (/* C++ */char)((allzero
||
(sign == SQLRX_PREFERRED_PLUS)
||
(sign == 0x0a)
||
(sign == 0x0e)
||
(sign == 0x0f) ) ?
'+' : '-'
);
} /** end for limit[ j++ ] > 0 **/

exit :
if( rc < 0 )
{
    printf ("The decimal conversion has
failed\n");
    exit (-1);
}

return(rc);
} /** sqlrxd2a **/

/*****
*****/
/* Does some setup and initialization like
parsing command line */
/* and connecting to database. Returns
process id of agent. */
/*****
*****/
void init_setup(int argc, char *argv[],
struct global_struct *g_struct)
{
    int connect=0;
#ifdef SQLWINT

```

```

char *pid;
#endif
char temparray[256]="\0";
int loopvar=0;
FILE *updateFP;
FILE *fpSeed;
char file_name[256] = "\0";
short seedEntry;
long lSeed;
int i;

/** Parse and process command line
options **/
comm_line_parse (argc,argv,g_struct);

/*****
*****/
/* Start the mainline report processing.
*/
/*****
*****/
if (!strcmp(g_struct->c_l_opt-
>infile,"\0")) {
    instream=stdin;
}
else {
    instream=NULL;
    if ( (instream = fopen(g_struct-
>c_l_opt->infile, READMODE)) == NULL ) {
        /* kjd715 */
        fprintf(outstream, "XXThe input
file could not be opened.\n\n");
        /* kjd715 */
        fprintf(stdout,"Make sure that the
filename is correct.\n");
        fprintf(stdout,"filename =
%s\n",g_struct->c_l_opt->infile);
        exit(-1);
    } /* open the input file if specified
*/
}

/* IMPORT (begin) - determine whether we
should use the IMPORT api or */
/* LOAD api for loading into the staging
tables, default is load */
if (env_tpcd_update_import != NULL)
{
    if
(!strcmp(uppercase(env_tpcd_update_import),"
TRUE"))
    {
        iImportStagingTbl = 1; /* use
import */
    }
    /* DJD */
    else if
(!strcmp(uppercase(env_tpcd_update_import),"
TF"))
    {
        iImportStagingTbl = 2; /* Table
Functions */
    }
}

/* IMPORT (end) */

/* we want to print the seed in the
output files to show what seed was */
/* used to generate the queries. */
/* if intStreamNum is -1 then we are
running a qualification database */
/* and the default seed has been used so
skip this section */
if (g_struct->c_l_opt->intStreamNum >= 0)
{
    /* check to make sure the
TPCD_RUNNUMBER environment variable is set.
We */
    /* use this and the stream number to
determine which seed was used to */
    /* generate the current set of queries
*/
    if (getenv("TPCD_RUNNUMBER") == NULL)
    {
        fprintf(stderr,"\nThe
TPCD_RUNNUMBER environment variable is not
set");
        fprintf(stderr,"...exiting\n");
        exit(-1);
    }
    if (getenv("TPCD_NUMSTREAM") == NULL)
    {
        fprintf(stderr,"\nThe
TPCD_NUMSTREAM environment variable is not
set");
        fprintf(stderr,"...exiting\n");
        exit(-1);
    }
}

/*****
*****
* SEED jen
* we want to print the seed used in
the output files. For the seed usage
* we can now reuse the seeds from run
to run, therefore all the power runs
* will use the 1st seed in the file,
and the throughput streams will use
* the 2nd to #streams+1 seeds.
* determine the seed to use...e.g.
given 3 streams will have the following:
*
Entry in seed file
* TEST Stream Number
Run 1 Run 2
* power 0
1 1
* throughput 1
2 2
* 2
3 3
* 3
4 4
*****
*****/
seedEntry = g_struct->c_l_opt-
>intStreamNum + 1;
/* end SEED jen */
/* open the generated seed file...if
not there, try the default */

sprintf(file_name,
"%s%sauditruns%sseedme",
env_tpcd_audit_dir,

```

```

                env_tpcd_path_delim,
env_tpcd_path_delim);

        if ((fpSeed =
fopen(file_name,READMODE)) == NULL )
        {
            fprintf(stderr, "\nCannot open the
seed file, please ensure that\n");
            fprintf(stderr, "the file exists.
filename = %s\n", file_name);
            exit(-1);
        }
        for (i = 1; i <= seedEntry; i++)
        {
            if (feof(fpSeed))
            {
                lSeed = -1; /* seed not
available for some reason */
            }
            fscanf(fpSeed, "%ld\n", &lSeed);
        }
        g_struct->lSeed = lSeed;
        fclose(fpSeed);
    }

    /* check to see if we are to use copy on
for the load */
    if (( getenv("TPCD_LOG") != NULL ) &&

(!strcmp(uppercase(getenv("TPCD_LOG")), "YES"
)))
    {
        /* okay, we have set LOG_RETAIN on so
we need to use copy directory */
        g_struct->copy_on_load = TRUE;
    }
    else
    {
        /* log retain off don't use copy
directory */
        g_struct->copy_on_load = FALSE;
    }

    /*****
    *****/
    /* Make sure that DB2 is started.
*/
    /* CONNECT now unless this is a UF stream
for a Throughput test. */
    /* (aph 98/12/22)
*/
    /*****
    *****/

        if (g_struct->c_l_opt->update > 1)
        {
            /* This is an update function stream
in a throughput run. */
            /* Just make sure that DB2 is started.
Each UF child will CONNECT itself. */
            if (verbose)
                fprintf(stderr, "\nStarting the DB2 Database
Manager Now\n");
            sqlestar ();
        }
        else
        { /* In all other cases, CONNECT to the
target database. */
            do
            {
                if (!strcmp(userid, "\0")) /* No
authentication provided */
                    EXEC SQL CONNECT TO :dbname;
                else EXEC SQL CONNECT TO :dbname
USER :userid USING :passwd;
                if (sqlca.sqlcode ==
SQLE_RC_NOSTARTG) {
                    if (verbose)
                        fprintf(stderr, "\nStarting
the DB2 Database Manager Now\n");
                    sqlestar ();
                    connect=0;
                }
                else connect=1;
            } while (!connect);
            error_check();
        }

    /*****
    *****/
    * All session initialization is performed
at connect time or immediately *
    * following and is complete before
starting the stream. *
    /*****
    *****/

        /* Get start timestamp for stream */
        get_start_time(&(g_struct-
>stream_start_time)); /* TIME_ACC jen*/
        strcpy(g_struct->file_time_stamp,

get_time_stamp(T_STAMP_FORM_2, &(g_struct-
>stream_start_time)); /* TIME_ACC jen*/

        if (getenv("TPCD_RUN_DIR") != NULL)
            strcpy(g_struct-
>run_dir, getenv("TPCD_RUN_DIR"));
        else
            strcpy(g_struct->run_dir, ".");

        /* if we are running a throughput test,
then we must report the */
        /* stream count information...we will
report one file per stream */
        /* and amalgamate them after all streams
have completed */
        /* if the number of streams is greater
than 0 then this is a throughput test*/
        switch (g_struct->c_l_opt->update)
        {
            case (2):
            case (5):
                /* update throughput
function stream */
                sprintf(file_name, "%s%sstrcntuf.%s", g_struct
->run_dir,
                    env_tpcd_path_delim,
                    g_struct->file_time_stamp);
                break;
            case (3):
            case (4):
                /* update power function
stream */
                sprintf(file_name, "%s%spsstrcntuf.%s", g_struc
t->run_dir,

```

```

        env_tpcd_path_delim,
g_struct->file_time_stamp);
        break;
        case (1):
            /* power query stream */
            sprintf(file_name,
"%s%s%spstrcnt%d.%s",g_struct->run_dir,
env_tpcd_path_delim,
                g_struct->c_l_opt-
>intStreamNum,g_struct->file_time_stamp);
            break;
        case (0):
            /* throughput query stream
*/
            sprintf(file_name,
"%s%sstrcnt%d.%s",g_struct->run_dir,
env_tpcd_path_delim,
                g_struct->c_l_opt-
>intStreamNum,g_struct->file_time_stamp);
            break;
        }

        if( (g_struct->stream_report_file =
fopen(file_name, WRITEMODE)) == NULL )
        {
            fprintf(stderr,"\nThe output file for
the stream count information\n");
            fprintf(stderr,"could not be opened,
make sure the filename is correct\n");
            fprintf(stderr,"filename =
%s\n",file_name);
            exit(-1);
        }

        if (g_struct->c_l_opt->update > 1)
        {
            /* update function stream */
            fprintf(g_struct->stream_report_file,
"Update function stream
starting at %*.s\n",
                T_STAMP_3LEN,T_STAMP_3LEN, /*
TIME_ACC jen*/

get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_start_time)); /* TIME_ACC jen*/
        }
        else
        {
            /* query stream */
            fprintf(g_struct->stream_report_file,
"Stream number %d starting at
%*.s\n",
                g_struct->c_l_opt-
>intStreamNum,
                T_STAMP_3LEN,T_STAMP_3LEN,
/* TIME_ACC jen*/

get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_start_time)); /* TIME_ACC jen*/
        }

#ifdef LINUX

        fclose(g_struct->stream_report_file);

#endif

        /* set up the update_num_file name so
that if we do use semaphores, */
        /* we will have a filename to generate
the semkey */

        sprintf(g_struct->update_num_file,
"%s%s%.s.update.pair.num",
env_tpcd_audit_dir,
                env_tpcd_path_delim,
uppercase(env_tpcd_dbname),
lowercase(env_user));
        sprintf(g_struct->sem_file,
"%s.%s.semfile", env_tpcd_dbname, env_user);
        if (g_struct->c_l_opt->intStreamNum == 0)
        {
            sprintf(g_struct->sem_file2,
"%s.%s.semfile2", env_tpcd_dbname,
env_user);
        }
        if (verbose) { /* print out the update
pair number file for debugging */
            fprintf(stderr,"\n init_setup: strem %d
update pair numb file = %s\n",
                g_struct->c_l_opt-
>intStreamNum,g_struct->update_num_file);
        }

        /* update the
$TPCD_AUDIT_DIR/$TPCD_DBNAME.$USER.update.pa
ir.num file */
        /* update pairs have been run */
        if (( g_struct->c_l_opt->update >= 1 ) &&
( g_struct->c_l_opt->update < 4 ))
            /* on or onl, but not */ /* bbe or
> 1 */
            {
                updateFP = fopen(g_struct-
>update_num_file,"r");
                if (updateFP != NULL )
                {
                    fscanf(updateFP,"%d",&updatePairStart);
                    fclose(updateFP);
                    if (g_struct->c_l_opt->intStreamNum
== 0) /* on, 1 update pair */
                        updatePairStop = updatePairStart
+ 1;
                    else /* only, multiple
update pairs, stream number will be total */
                        updatePairStop = updatePairStart
+ g_struct->c_l_opt->intStreamNum;
                    currentUpdatePair =
updatePairStart;

                    if (updatePairStart <= 0)
                    {
                        fprintf(stderr,"updatePairStart
is bogus!");
                        exit(-1);
                    }
                }
                else
                {
                    fprintf(stderr,"\n %s not set up,
set this \n",g_struct->update_num_file);
                    fprintf(stderr,"file to contain the
number of the update pair to \n");
                    fprintf(stderr,"run and
resubmit\n");
                    exit(-1);
                }
            }

        return ;

```

```

}
/*****
*****/
/* A function to print out the column titles
for a returned set */
/*****
*****/
void print_headings (struct sqllda *sqllda,
int *col_lengths)
{
    int col = 0; /*
Column number */
    int col_width = 0; /*
width of column */
    int max_col_width = 0; /*
maximum column width */
    int col_name_length = 0; /*
sizeof column name string */
    int col_type = 0; /*
column type */

    int total_length = 0; /*
accumulator var. for
length of column headings */
    int loopvar = 0;

    char col_name[256] = "\0";
    unsigned char m,n; /*
precision and accuracy

decimal conversion */
    for
        fprintf (outstream, "\n");

    /** loop through for each column in
solution set
and determine the maximum column width
**/

    for (col = 0; col < sqllda->sqld; col++) {
        col_name_length=sqllda->sqlvar[col].sqlname.length;
        col_type = sqllda->sqlvar[col].sqltype;
        col_width = sqllda->sqlvar[col].sqlllen;
        strncpy (col_name, (char *)sqllda->sqlvar[col].sqlname.data, col_name_length) ;

        switch (col_type)
        {
            case SQL_TYP_SMALL:
            case SQL_TYP_NSMALL:
/* @d30369 tjj */
                col_lengths[col] = TPCDBATCH_MAX
(col_name_length, 6);
                break;
            case SQL_TYP_INTEGER:
            case SQL_TYP_NINTEGER:
                col_lengths[col] = TPCDBATCH_MAX
(col_name_length, 11);
                break;
            case SQL_TYP_BIGINT: /*kmwBIGINT*/
            case SQL_TYP_NBIGINT:
                col_lengths[col] = TPCDBATCH_MAX
(col_name_length, 19);
                break;
            case SQL_TYP_CSTR:
            case SQL_TYP_NCSTR:
            case SQL_TYP_DATE:
            case SQL_TYP_NDATE:
                case SQL_TYP_TIME:
                case SQL_TYP_NTIME:
                case SQL_TYP_STAMP:
                case SQL_TYP_NSTAMP:
                case SQL_TYP_CHAR:
                case SQL_TYP_NCHAR:
                case SQL_TYP_VARCHAR:
                case SQL_TYP_NVARCHAR:
                case SQL_TYP_LONG:
                case SQL_TYP_NLONG:
                    col_lengths[col] = TPCDBATCH_MAX
(col_name_length, col_width);
                    break;

                case SQL_TYP_FLOAT:
                case SQL_TYP_NFLOAT:
                    /* kmw - note:
TPCDBATCH_PRINT_FLOAT_WIDTH > max long
identifier */
                    col_lengths[col] =
TPCDBATCH_PRINT_FLOAT_WIDTH;
                    break;

                case SQL_TYP_DECIMAL:
                case SQL_TYP_NDECIMAL:

                    m=(*(struct declen *)&sqllda->sqlvar[col].sqlllen).m;
                    n=(*(struct declen *)&sqllda->sqlvar[col].sqlllen).n;

                    col_lengths[col] = TPCDBATCH_MAX
((int)(m+n), col_name_length);
                    /* Special handling for DECIMAL */
                    /* @d26350 tjj */
                    break;

                default:
                    fprintf(stderr, "--Unknown column
type (%d). Aborting.\n", col_type);
                    break;
        }

        fprintf(outstream, "%-*.s
", col_lengths[col], col_name_length, col_name)
;

        total_length += (col_lengths[col] +
2); /* 2 is from padding spaces */
    }

    fprintf(outstream, "\n");
    for (loopvar=0; loopvar < total_length;
loopvar++)
        fprintf(outstream, "-");
    fprintf(outstream, "\n");
}

/*****
*****/
/* Gets the current system time and prints
it out */
/*****
*****/
char *get_time_stamp(int form, Timer_struct
*time_pointer)
{
    Timer_struct temp_stamp; /* TIME_ACC jen
*/

```

```

struct tm *tp;
size_t timeLength = 0;

/* TIME_ACC jen start */
if (time_pointer == (Timer_struct *)NULL)
    get_start_time(&temp_stamp);
else
    temp_stamp = *time_pointer;

#if defined (SQLUNIX) || defined (SQLAIX)
    tp = localtime((time_t
*)&(temp_stamp.tv_sec));
#elif defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS))
    tp = localtime(&(temp_stamp.time));
#else
#error Unknown operating system
#endif
/* TIME_ACC jen stop*/

    if ((form == T_STAMP_FORM_1) || (form ==
T_STAMP_FORM_3))
    {
        /* SUN fix bbe start */
        #if (defined (SQLWINT) || defined (SQLWIN)
|| defined (SQLOS2) || defined (SQLDOS))
            timeLength = strftime(newtime,50,"%x
%X",tp);
        #elif (defined (SQLUNIX) || defined
(SQLAIX))
            timeLength = strftime(newtime,50,"%D
%T",tp); /* SUN ...test this */
        #else
#error Unknown operating system
#endif
        /* SUN fix bbe stop */
        /* TIME_ACC jen start*/
        if (form == T_STAMP_FORM_3)
        {
            /* concatenate the
microsecond/milliseconds on the end of the
*/
            /*timestamp jen1006 */
            #if defined (SQLUNIX) || defined (SQLAIX)

                sprintf(newtime+timeLength, ".%.6d",temp_sta
mp.tv_usec);
            #elif (defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS))

                sprintf(newtime+timeLength, ".%.3d",temp_sta
mp.millitm);
            #else
#error Unknown operating system
#endif
            /* TIME_ACC jen stop*/
        }
    }
    else
        if (form == T_STAMP_FORM_2)
            strftime(newtime,50,"%y%m%d-
%H%M%S",tp);

    return (newtime);
}

/*****
*****/

/* Handle all the processing for the summary
table */
/*****
*****/

void summary_table (struct global_struct
*g_struct)
{
    double arith_mean = 0;
    double geo_mean = 0;
    int num_stmt = 0;
    int num_stmt_for_geo_mean = 0;

    double adjusted_a_mean = 0;
    double adjusted_g_mean = 0;
    double adjusted_g_mean_intern;
    double adjusted_max_time = 0;

    double Ts = 0; /*
different TPC-D metrics */
    double Ts1;
    double Ts2;
    /* double QppD = 0; MARK
    double QthD = 0;
    double QphD = 0; */

    double db_size_frac_part = 0; /*
stores the fractional part of db size */
    double db_size = 0; /*
size in numbers */
    char db_size_qualifier[3] = "\0"; /*
MB, GB or TB */

    struct stmt_info
        *s_info_ptr,
        *s_info_head_ptr,
        *max,
        *min;

    /* Determine the size of the database
from the scale factor (1 SF = 1GB) */
    if (g_struct->scale_factor < 1.0) {
        db_size = g_struct->scale_factor *
1000;
        strcpy(db_size_qualifier, "MB");
    } else if (g_struct->scale_factor >=
1000.0) {
        db_size = g_struct->scale_factor /
1000;
        strcpy(db_size_qualifier, "TB");
    } else {
        db_size = g_struct->scale_factor;
        strcpy(db_size_qualifier, "GB");
    }

    /* computes the fractional part of
db_size */
    db_size_frac_part = db_size - (int)
db_size;

    s_info_ptr = g_struct->s_info_ptr; /*
Just use a local copy */
    s_info_head_ptr = s_info_ptr;

    max = s_info_head_ptr;
    /* ensure that we are not already setting
max to the UF timings */
    while ( strstr(max->tag, "UF") != NULL )
        max = max->next;
}

```



```

min = max;

if (g_struct->c_l_opt->outfile) /*
create the appropriate output file */
    output_file(g_struct);

/* write the seed used for this run
unless it is a qualification run */
/* (qualification runs use the default
seed for their queries) or */
/* unless it is the update function
stream (no seeds used for this) */
/* (this is an update stream iff update
is 2) */
if ((g_struct->c_l_opt->intStreamNum >=0)
&&
    (g_struct->c_l_opt->update != 2) )
{
    if (g_struct->lSeed == -1)
    {
        fprintf( outstream, "\nUsing default
qgen seed file");
    }
    else
        fprintf (outstream, "\nSeed used
for current run = %ld",g_struct->lSeed);
    fprintf( outstream, "\n");
}

/* print out the stream number if we are
in a throughput stream and if */
/* this is not the update stream portion
of the throughput test */
if ( (g_struct->c_l_opt->intStreamNum >
0) &&
    (g_struct->c_l_opt->update != 2) )
{
    fprintf( outstream, "Stream number =
%d\n",g_struct->c_l_opt->intStreamNum);
}
/* print the stream start timestamp to
the inter file */
fprintf (outstream, "Stream start time
stamp %*.s\n",
        T_STAMP_3LEN,T_STAMP_3LEN, /*
TIME_ACC jen*/

get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_start_time)); /* TIME_ACC jen*/
/* print the stream stop timestamp to the
inter file */
fprintf (outstream, "Stream stop time
stamp %*.s\n",
        T_STAMP_3LEN,T_STAMP_3LEN, /*
TIME_ACC jen*/

get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_end_time)); /* TIME_ACC jen*/

fprintf (outstream, "\n\nSummary of
Results\n=====\n");
fprintf (outstream,
        "\nSequence #      Elapsed Time
Adjusted Time Start Timestamp  End
Timestamp\n\n");

/* Go through the linked list and
determine which statement had the
highest and lowest elapsed times */
while ( (s_info_ptr != NULL) &&
(s_info_ptr != g_struct->s_info_stop_ptr) )
{
    /* check if we are in an update
function...if so, we do not want to */
    /* consider the update function times
as the min or max time */
    if ( strstr(s_info_ptr->tag,"UF") ==
NULL )
    {
        /* we are not in an update function
*/
        if (s_info_ptr->elapse_time > max-
>elapse_time)
            max = s_info_ptr;
        else
            if ((s_info_ptr->elapse_time <
min->elapse_time)
                && (s_info_ptr->elapse_time
> -1))
                min = s_info_ptr;
    }

    s_info_ptr = s_info_ptr->next;

s_info_ptr = s_info_head_ptr;

/** Start from the first structure and go
through until the stop
pointer is reached */
while ( (s_info_ptr != NULL) &&
(s_info_ptr != g_struct->s_info_stop_ptr) )
{
    if (s_info_ptr->elapse_time != -1) {
        s_info_ptr->adjusted_time =
s_info_ptr->elapse_time;
        /* determine whether the elapsed
times have to be adjusted or not */
        /* if this is an update function,
we do not adjust the elapsed time*/
        if ( strstr(s_info_ptr->tag,"UF")
== NULL )
        {
            /* this is not an update
function, adjust time if necessary */
            if (max->elapse_time/min-
>elapse_time > 1000)
            {
                /* jmc fix geo_mean
calculation...round adjusted time properly
ROUNDING*/
                adjusted_max_time = max-
>elapse_time/1000;
                if (s_info_ptr->elapse_time <
adjusted_max_time)
                {
                    s_info_ptr->adjusted_time
=
(double)(((long)((adjusted_max_time + 0.05)
* 10))/10.0);
                    if (s_info_ptr-
>adjusted_time < 0.1)
                        s_info_ptr-
>adjusted_time = 0.1;
                }
            }
        }
    }
}

```

```

        /*jmc fix geo_mean
calculation...round adjusted time properly
ROUNDING end*/
    }
}

/* a value was calculated */
    fprintf (outstream,
        "%-5d %-5.5s %15.1f %15.1f
%*. *s %*. *s\n",
        s_info_ptr-
>stmt_num,s_info_ptr->tag,
        s_info_ptr-
>elapsed_time,s_info_ptr->adjusted_time,

T_STAMP_1LEN,T_STAMP_1LEN,s_info_ptr-
>start_stamp, /* TIME_ACC jen*/

T_STAMP_1LEN,T_STAMP_1LEN,s_info_ptr-
>end_stamp); /* TIME_ACC jen*/

    /* Only update arithmetic mean for
queries not update functions */
    if ( strstr(s_info_ptr->tag,"UF")
== NULL )
    {
        arith_mean += s_info_ptr-
>elapsed_time;
        adjusted_a_mean += s_info_ptr-
>adjusted_time;
    }

    if (s_info_ptr->elapsed_time > 0) {
/* don't bother finding log of
numbers < 0 */
        geo_mean += log(s_info_ptr-
>elapsed_time);
        adjusted_g_mean +=
log(s_info_ptr->adjusted_time);
    }

    /* Only update num_stmt for queries
not update functions */
    if ( strstr(s_info_ptr->tag,"UF")
== NULL )
        num_stmt ++;
        num_stmt_for_geo_mean++;
    }
    else
        fprintf (outstream,"%-5d %-5.5s %-
15s %-15s\n",
        s_info_ptr->stmt_num,
        s_info_ptr->tag,"Not
Collected", "Not Collected");

    if (s_info_ptr != g_struct-
>s_info_stop_ptr)
        s_info_ptr=s_info_ptr->next;
    }

    fprintf(outstream, "\n\nNumber of
statements: %d\n\n", s_info_ptr->stmt_num -
1);
    /* Calculate the arithmetic and geometric
means */

```

```

    if (geo_mean != 0) { /*Used to test
if arith_mean != 0
                                Don't bother
doing any of this if the
                                elapsed
time mean is 0 */
        arith_mean = arith_mean / num_stmt;
        adjusted_a_mean = adjusted_a_mean /
num_stmt;
        geo_mean = exp(geo_mean /
num_stmt_for_geo_mean);
        adjusted_g_mean_intern =
adjusted_g_mean; /*MARK*/
        adjusted_g_mean = exp(adjusted_g_mean
/ num_stmt_for_geo_mean);
    }

    /* print out all the appropriate
information including the
different TPC-D metrics */
    /* do not bother with this if we are in
an update only stream */
    fprintf (outstream, "\nGeom. mean
queries %7.3f %15.3f\n",\
        geo_mean,adjusted_g_mean);
    if (g_struct->c_l_opt->update < 2)
    {
        fprintf (outstream, "Arith. mean
queries %7.3f %15.3f\n",\
            arith_mean,adjusted_a_mean);

        fprintf (outstream,
            "\n\nMax Qry %-3.3s %15.1f
%15.1f %*. *s %*. *s\n",
            max->tag,max-
>elapsed_time,max->adjusted_time,

T_STAMP_1LEN,T_STAMP_1LEN,max->start_stamp,
/* TIME_ACC jen*/

T_STAMP_1LEN,T_STAMP_1LEN,max->end_stamp);
/* TIME_ACC jen*/
        fprintf (outstream,
            "Min Qry %-3.3s %15.1f %15.1f
%*. *s %*. *s\n",
            min->tag,min-
>elapsed_time,min->adjusted_time,

T_STAMP_1LEN,T_STAMP_1LEN,min->start_stamp,
/* TIME_ACC jen*/

T_STAMP_1LEN,T_STAMP_1LEN,min->end_stamp);
/* TIME_ACC jen*/
    }

    if (g_struct->c_l_opt->intStreamNum == 0)
    {
        /* fprintf (outstream,
"\n\nMetrics\n=====\n\n"); */

        /* Increase the Ts measurement by one
second since the accuracy of our */
        /* timestamps is only to 1 second and
if the start was at 1.01 seconds, */
        /* and the end was at 5.99 seconds, we
get a free second ... this will */
        /* be made explicit in the upcoming
revision of the spec (after 1.0.1) */

```

```

        /* TIME_ACC jen start*/
        /* NOTE this can probably be better
        coded by changing get_elapsed_time */
        /* to just calculate the elapsed time
        give a start and an end time, and */
        /* to also give a precision for the
        calculation (sec, 10ths...). The */
        /* call then will grab a timestamp
        before calling. Then we can get rid */
        /* of the if def...and just call
        get_elapsed_time (whcih can handle the */
        /* os differences on its own */

#if defined (SQLUNIX) || defined (SQLAIX)
    Ts = g_struct->stream_end_time.tv_sec
- g_struct->stream_start_time.tv_sec + 1;
    Ts1 = (double)g_struct-
>stream_start_time.tv_sec +
((double)g_struct-
>stream_start_time.tv_usec/1000000);
    Ts2 = (double)g_struct-
>stream_end_time.tv_sec + ((double)g_struct-
>stream_end_time.tv_usec/1000000);

#elif defined (SQLOS2) || defined (SQLWINT)
|| defined (SQLWIN) || defined (SQLDOS))
    Ts = g_struct->stream_end_time.time -
g_struct->stream_start_time.time + 1;
    Ts1 = (double)g_struct-
>stream_start_time.time + ((double)g_struct-
>stream_start_time.millitm/1000);
    Ts2 = (double)g_struct-
>stream_end_time.time + ((double)g_struct-
>stream_end_time.millitm/1000);

#else
#error Unknown operating system
#endif

        /* TIME_ACC jen stop*/

        /* MARK
        ##Now do in calcmetrics.pl##
        QppD = (3600 * g_struct->scale_factor)
/ adjusted_g_mean;
        QthD = (num_stmt * 3600 * g_struct-
>scale_factor) / Ts;
        QphD = sqrt(QppD*QthD);
        */
        /* if the decimal part has some
        meaningful value then print the database
        size
        with decimal part; otherwise just
        print the integer part */

        fprintf (outstream,
                "\nGeometric mean interim
value = %10.3f\n\nStream Ts %11 =
%10.0f\n\nStream start int representation
%11 = %f\n\nStream stop int representation
%11 = %f",
adjusted_g_mean_intern,Ts,Ts1,Ts2);
    }

}

/*****
*****/

```

```

/* free up all the elements of the sqlda
after done processing */
/*****
*****/
void free_sqlda (struct sqlda *sqlda, int
select_status) /* @d30369 tjg */
{
    int loopvar;

    if (select_status == TPCDBATCH_SELECT)
        for (loopvar=0; loopvar<sqlda->sql;
loopvar++) {
        free(sqlda-
>sqlvar[loopvar].sqldata);
        free(sqlda-
>sqlvar[loopvar].sqlind);
    }

    free(sqlda);
    sqlda_allocated = 0; /* fix free()
problem on NT
wlc 090597 */
}

/*****
*****/
/* processing to run the insert update
function */
/*****
*****/
void runUF1 ( struct global_struct
*g_struct, int updatePair )
{
    char statement[3000];
    char sourcedir[256];

    int split_updates = 2; /* no. of
ways update records are split */
    int concurrent_inserts = 2; /* jenCI no
of concurrent updates to be */
/* jenCI run
at once*/
    int loop_updates = 1; /* jenCI no
of updates to be run in one */
/* jenCI
"concurrent" invocation. should*/
/* jenCI be
split_updates / concurrent_inserts*/
    int i;
    int streamNum;
#ifdef SQLWINT
    /* PROCESS_INFORMATION childprocess[100];
*/
    char commandline[256];
    HANDLE su_hSem;
    char UF1_semfile[256];
#else
    int childpid[100];
    int su_semid; /*
semaphore for controlling split updates*/
    key_t su_semkey; /* key to
generate semid */
#endif
    if (g_struct->c_l_opt->intStreamNum == 0)
        streamNum = 0;
    else
        streamNum = currentUpdatePair -
updatePairStart + 1;

```

```

    fprintf( outstream,"UF1 for update pair
%d, stream %d, starting\n",updatePair,
streamNum);

    /* Start by loading the data into the
staging table at each node */
    /* The orderkeys were split earlier by
the split_updates program */
    if (env_tpcd_audit_dir != NULL)
        strcpy(sourcedir,env_tpcd_audit_dir);
    else
        strcpy(sourcedir,".");

    /* Load the orderkeys into the staging
table */
    /* In SMP environments one could use a
load command but by using a */
    /* script we can keep the code common */
#ifdef SQLWINT
    sprintf (statement, "perl
%s\\tools\\ploadufl %d\n", sourcedir,
updatePair);
#else
    sprintf (statement, "perl
%s/tools/ploadufl %d 1", sourcedir,
updatePair);
#endif
    if (system(statement))
    {
        fprintf (stderr, "ploadufl failed for
UF1, examine UF1.log for cause.
Exiting.\n");
        if (verbose)
            fprintf (stderr,
                "ploadufl failed for UF1,
examine UF1.log for cause. Exiting.\n");
        exit (-1);
    }

    fprintf (outstream, "load_update finished
for UF1.\n");

    if (getenv ("TPCD_SPLIT_UPDATES") !=
NULL)
        split_updates = atoi (getenv
("TPCD_SPLIT_UPDATES"));
    if (getenv ("TPCD_CONCURRENT_INSERTS") !=
NULL)
        /*jenCI*/
        concurrent_inserts = atoi (getenv
("TPCD_CONCURRENT_INSERTS")); /*jenCI*/
        loop_updates = split_updates /
concurrent_inserts;
/*jenCI*/

#ifdef SQLWINT
    /* we will use the tpcd.setup file to
generate the semaphore key */
    if (getenv("TPCD_AUDIT_DIR") != NULL)
/*begin SEMA */
    {
        /* this is assuming that you will be
running this from 0th node */
        sprintf(sourcefile,
"%s%ctools%ctpcd.setup",
getenv("TPCD_AUDIT_DIR"),
PATH_DELIM,PATH_DELIM);
    }
    else
    {

```

```

        fprintf (stderr, "runUF1 Can't open
UF1 semaphore file,TPCD_AUDIT_DIR is not
defined.\n");
        exit (-1);
    }
    /*end SEMA */
    su_semkey = ftok (sourcefile, 'J');
    if ( (su_semid = semget (su_semkey, 1,
IPC_CREAT|S_IRUSR|S_IWUSR)) < 0)
    {
        fprintf (stderr, "Cannot get
semaphore! semget failed: errno =
%d\n",errno);
        exit (-1);
    }
#else /* SQLWINT */
    sprintf (UF1_semfile,
"%s.%s.UF1.semfile", env_tpcd_dbname,
env_user);
    su_hSem = CreateSemaphore(NULL, 0,
concurrent_inserts,
/*jenCI*/
(LPCTSTR)(UF1_semfile));
    if (su_hSem == NULL)
    {
        fprintf(stderr,
            "CreateSemaphore (ready
semaphore) failed, GetLastError: %d,
quitting\n",
            GetLastError());
        exit(-1);
    }
#endif /* SQLWINT */
    if (verbose) fprintf(stderr,"Semaphore
created successfully!\n");

    fclose(outstream); /* to prevent multiple
header caused by forking
                                wlc 081397 */

    for (i=0; i < concurrent_inserts; i++)
/*jenCI*/
    {
#ifdef SQLWINT
        if ((childpid[i] = fork()) == 0)
        {
            /* runUF1_fn (updatePair, i);   aph
981205 */
            runUF1_fn (updatePair, i, dbname,
userid, passwd);
        }
        else
        {
            /* This is the parent */
            if (verbose)
                fprintf (stderr, "stream #%d
started with pid %d\n", i, childpid[i]);
        }
#else /* SQLWINT */
        sprintf (commandline,
            "start /b
%s\\auditruns\\tpcdbatch.exe -z -d %s -i %d
-j 1 -k %d",
            env_tpcd_audit_dir, dbname,
updatePair, i ); /* aph 082797 */

        system (commandline);
#endif /* SQLWINT */
        // sleep (UF1_SLEEP);

```

```

    }

    /* All children have been created, now
    wait for them to finish */
#ifdef SQLWINT
    if (sem_op (su_sem, 0,
concurrent_inserts * -1) != 0)
/*jenCI*/
    {
/*jenSEM*/
        fprintf(stderr,
            "Failure to wait on insert
semaphone with %d of children\n",
            concurrent_inserts);
        exit(1);
    }
/*jenSEM*/
    semctl (su_sem, 0, IPC_RMID, 0);
#else
    for (i = 0; i < concurrent_inserts; i++)
/*jenCI*/
    {
        if (verbose)
        {
            fprintf(stderr, "About to wait again
...Sets to wait for %d\n",
                concurrent_inserts - i);
/*jenCI*/
        }
        if (WaitForSingleObject(su_hSem,
INFINITE) == WAIT_FAILED)
        {
            fprintf(stderr,
                "WaitForSingleObject (su
_hSem) failed in runUF1 on set %d, error:
%d, quitting\n",
                i, GetLastError());
            exit(-1);
        }
    }
    if (! CloseHandle(su_hSem))
    {
        fprintf(stderr,
            "RunUF1 Close Sem failed -
Last Error: %d\n", GetLastError());
        /* no exit here */
    }
#endif

    if( (outstream = fopen(outstreamfilename,
APPENDMODE)) == NULL )
    {
        fprintf(stderr, "\nThe output file
could not be opened. ");
        fprintf(stderr, "Make sure that the
filename is correct.\n");
        fprintf(stderr, "filename =
%s\n", outstreamfilename);
        exit(-1);
    }

    fprintf(ostream, "UF1 for update pair
%d complete\n", updatePair);
}

/* runUF1_fn() moved to another SQC file
aph 981205 */
/*****
*****/
/* processing to run the delete update
function */
/*****
*****/
void runUF2 ( struct global_struct
*g_struct, int updatePair )
{
    char statement[3000];
    char sourcedir[256];

    int split_deletes = 1; /* no. of
ways update records are split @dxxxxxhar
*/
    int concurrent_deletes = 1; /* number
of database partitions DELjen */
    int chunks_per_concurrent_delete = 1;

    int i;
    int streamNum;
#ifdef SQLWINT
    char commandline[256];
    HANDLE su_hSem;
    char UF2_semfile[256];
#else
    int childpid[100];
    char sourcefile[256];
    int su_sem; /*
semaphore for controlling split updates*/
    key_t su_semkey; /* key to
generate semid */
#endif
    if (g_struct->c_l_opt->intStreamNum ==
0)
        streamNum = 0;
    else
        streamNum = currentUpdatePair -
updatePairStart + 1;

    fprintf(ostream, "UF2 for update pair
%d, stream %d, starting\n", updatePair,
streamNum);

    /* We need to know both how many chunks
there are and how many chunks*/
    /* are to be executed by each concurrent
UF2 process. More chunks means */
    /* both smaller transactions (less
deadlock) and more potential concurrency */

    /* How many "chunks" have the orderkeys
been divided into? */
    if (getenv ("TPCD_SPLIT_DELETES") !=
NULL)
        split_deletes = atoi (getenv
("TPCD_SPLIT_DELETES"));
    /* How many deletes should run
concurrently */
    if (getenv ("TPCD_CONCURRENT_DELETES") !=
NULL)
        concurrent_deletes = atoi (getenv
("TPCD_CONCURRENT_DELETES"));
    /* How many chunks in each concurrently
running delete process */
    chunks_per_concurrent_delete =
split_deletes / concurrent_deletes;

    /* Start by loading the data into the
staging table at each node */

```

```

/* The orderkeys were split earlier by
the split_updates program */
if (env_tpcd_audit_dir != NULL)
    strcpy(sourcedir, env_tpcd_audit_dir);
else
    strcpy(sourcedir, ".");

/* Load the orderkeys into the staging
table */
/* In SMP environments one could use a
load command but by using a */
/* script we can keep the code common */

#ifdef SQLWINT
    sprintf (statement, "perl
%s\\tools\\ploaduf2 %d\\n", sourcedir,
updatePair);
#else
    sprintf (statement, "perl
%s/tools/ploaduf2 %d 2", sourcedir,
updatePair);
#endif
    if (system(statement))
    {
        fprintf (stderr, "ploaduf2 failed for
UF2, examine UF2.log for cause.
Exiting.\\n");
        exit (-1);
    }
    fprintf (outstream, "ploaduf2 finished
for UF2.\\n");

    fclose(outstream); /* to prevent multiple
header caused by forking
                                wlc 081397 */

/* Next we need to get ready to launch a
bunch of concurrent processes */
#ifdef SQLWINT
/* we will use the tpcd.setup file to
generate the semaphore key begin SEMA */
if (getenv("TPCD_AUDIT_DIR") != NULL)
{
    sprintf(sourcefile,
"%s%ctools%ctpcd.setup",
getenv("TPCD_AUDIT_DIR"),
PATH_DELIM, PATH_DELIM);
}
else
{
    fprintf (stderr, "runUF2 Can't open
UF2 semaphore file, TPCD_AUDIT_DIR is not
defined.\\n");
    exit (-1);
}

su_semkey = ftok (sourcefile, 'D'); /*
use D for deletes */
/* end SEMA */
if ( (su_semkey = semget (su_semkey, 1,
IPC_CREAT|S_IRUSR|S_IWUSR)) < 0)
{
    fprintf (stderr, "UF2 Can't get
semaphore! semget failed: errno = %d\\n",
errno);
    exit (-1);
}
#else
    sprintf (UF2_semfile,
"%s.%s.UF2.semfile", env_tpcd_dbname,
env_user);
    fprintf(stderr, "UF2 semfile =
%s\\n", UF2_semfile);
    su_hSem = CreateSemaphore(NULL, 0,
concurrent_deletes,
(LPCTSTR) (UF2_semfile));
    if (su_hSem == NULL)
    {
        fprintf(stderr,
"CreateSemaphore (ready
semaphore) failed, GetLastError: %d,
quitting\\n",
GetLastError());
        exit(-1);
    }
    fprintf(stderr, "Semaphore created
successfully!\\n");
#endif

    for (i=0; i < concurrent_deletes; i++)
    {
#ifdef SQLWINT
        if ((childpid[i] = fork()) == 0)
        {
            fprintf(stderr, "B-Calling
runUF2_fn %d %d %d ...\\n",
updatePair,
i, chunks_per_concurrent_delete);
            /* runUF2_fn (updatePair, i,
chunks_per_concurrent_delete); aph 981205
*/
            runUF2_fn (updatePair, i,
chunks_per_concurrent_delete, dbname,
userid, passwd);
        }
        else
        {
            /* This is the parent */
            if (verbose)
                fprintf (stderr, "stream #%d
started with pid %d\\n", i, childpid[i]);
        }
    }
    else
    {
        /* SECURITY_ATTRIBUTES
sec_process;
SECURITY_ATTRIBUTES sec_thread;
*/
        /* NEED TO FIX THIS UP - KBS
98/10/20 */
        sprintf (commandline,
"start /b
%s\\auditruns\\tpcdbatch.exe -z -d %s -i %d
-j 2 -k %d -x %d",
env_tpcd_audit_dir, dbname,
updatePair, i, chunks_per_concurrent_delete
); /* aph */
        /* the -x parm should be passed at
0...not 100% sure of this jen */
        fprintf(stderr, "commandline=
%s\\n", commandline);
        system (commandline);
        // sleep (UF2_SLEEP);
    }
}
#endif
}
}

```

```

/* All children have been created, now
wait for them to finish */
#ifdef SQLWINT
    fprintf(stderr, "About to wait on the
semaphore...\n");
    if (sem_op (su_semid, 0,
concurrent_deletes * -1) != 0)
/*jenSEM*/
    {
/*jenSEM*/
        fprintf(stderr,
            "Failure to update wait on
delete semaphore with %d children\n",
            concurrent_deletes);
        exit(1);
    }
/*jenSEM*/
    semctl (su_semid, 0, IPC_RMID, 0);
#else
// for (i = 0; i < split_deletes; i++)
//DJD Waits forever.....
    for (i = 0; i < concurrent_deletes; i++)
    {
        if (verbose)
        {
//          fprintf(stderr, "About to wait
again ...Sets to wait for %d\n",
//              split_deletes - i);
            fprintf(stderr, "About to wait again
...Sets to wait for %d\n",
                concurrent_deletes - i);
        }
        if (WaitForSingleObject (su_hSem,
INFINITE) == WAIT_FAILED)
        {
            fprintf(stderr,
                "WaitForSingleObject
(su_hSem) failed on set %d, error: %d,
quitting\n",
                i, GetLastError());
            exit(-1);
        }
    }
    if (! CloseHandle (su_hSem))
    {
        fprintf(stderr, "Close Sem failed -
Last Error: %d\n", GetLastError());
        /* no exit here */
    }
#endif

    if( (outstream = fopen(outstreamfilename,
APPENDMODE)) == NULL )
    {
        fprintf(stderr, "\nThe output file
could not be opened. ");
        fprintf(stderr, "Make sure that the
filename is correct.\n");
        fprintf(stderr, "filename =
%s\n", outstreamfilename);
        exit(-1);
    }

    fprintf(ostream, "UF2 for update pair
%d complete\n", updatePair);
}

/* runUF2_fn() moved to another SQC file
aph 981205 */

/*-----*/
/*-----*/
/*          General semaphore function.
*/
/*-----*/
/*-----*/
#ifdef SQLWINT
int sem_op (int semid, int semnum, int
value)
{
    struct sembuf sembuf; /* = {semnum
,value,0}; */
    sembuf.sem_num = semnum;
    sembuf.sem_op = value;
    sembuf.sem_flg = 0;

    if (semop(semid, &sembuf, 1) < 0)
    {
        fprintf(stderr, "ERROR*** sem_op
errorno = %d\n", errno);
        return(-1);
        /* exit(1); */
    }
    return (0); /* successful return
jenSEM */
}
#endif

/*****
*****/
/* Determines the proper name for the output
file to
be generated for a particular TPC-D
query, update function, or
interval summary
*/
/*****
*****/
void output_file(struct global_struct
*g_struct)
{
    char file_name[256] = "\0";
    char run_dir[150] = "\0";
    char time_stamp[50] = "\0";
    char delim[2] = "\0";
    int qnum=0, found=0; /*
kjd715 */
    char input_ln[256] = "\0"; /*
kjd715 */
    char tag[128] = "\0"; /*
kjd715 */

    strcpy(run_dir, g_struct->run_dir);
    sprintf(delim, "%s", env_tpcd_path_delim);
    strcpy(time_stamp, g_struct->
file_time_stamp);
    /* kjd715 */
    if (g_struct->stream_list == NULL)
    {
        if ((g_struct->stream_list =
fopen(g_struct->c_l_opt-
>infile, READMODE)) == NULL)
        {
            fprintf(stderr, "\nThe input file
could not be opened.");
            fprintf(stderr, "Make sure that the
filename is correct.\n");

```

```

        exit(-1);
    }
}
found = 0;
do {
    fscanf(g_struct->stream_list,
"\n%[^\\n]\\n", input_ln);
    if (strstr(input_ln, "--#TAG") ==
input_ln)
    {
        found = 1;
        strcpy(tag, (input_ln+sizeof("--
#TAG")));
        if (strncmp(tag, "UF", 2) == 0)
            qnum = atoi(tag+2)*(-1);
        else if (strncmp(tag, "Q", 1) == 0 )
        {
            /* for query 15a the 'a' must
be trimmed */
            /* off before converting to
integer */
            if (strlen(tag)>3)
                tag[3] =
'\0';
            qnum = atoi(tag+1);
        }
    }

    if (feof(g_struct->stream_list))
        found = 1;

}while (!found);

/*
    if ((g_struct->stream_list =
fopen(g_struct-
>c_l_opt->str_file_name, READMODE)) == NULL)
    {
        fprintf(stderr, "\nThe stream list
file could not be opened.");
        fprintf(stderr, "Make sure that the
filename is correct.\n");
        exit(-1);
    }

    fscanf(g_struct->stream_list, "%d", &qnum);
    */
/* kjd715 */

    switch (g_struct->c_l_opt->intStreamNum)
    {
        case -1: /* qualificiying */
            sprintf(file_name,
"%s%sqryqual%02d.%s", run_dir, delim, qnum, time
_stamp);
            break;
        case 0: /* power tests */
            if (qnum < 0) /* update functions */
                sprintf(file_name,
"%s%smps00uf%d.%02d.%s", run_dir, delim, abs(qn
um), \
currentUpdatePair, time_stamp);
            else
                sprintf(file_name,
"%s%smpqry%02d.%s", run_dir, delim, qnum, time_s
tamp);
            break;

        default:

```

```

        /*      if (qnum < 0) - replaced by
berni 96/03/26 */
        if (g_struct->c_l_opt->update == 2 ||
g_struct->c_l_opt->update == 5)
            sprintf(file_name,
"%s%smts%02duf%d.%02d.%s", run_dir, delim, \
currentUpdatePair -
updatePairStart + 1, abs(qnum),
currentUpdatePair, time_stamp);
            else
                sprintf(file_name,
"%s%smts%dqry%02d.%s", run_dir, delim, \
g_struct->c_l_opt-
>intStreamNum, qnum, time_stamp);
            break;
    }

    if (g_struct->c_flags->eo_infile)
        if (g_struct->c_l_opt->update == 2 ||
g_struct->c_l_opt->update == 5)
            sprintf(file_name,
"%s%smtufinter.%s", run_dir, delim, time_stamp)
;
            else
                switch (g_struct->c_l_opt-
>intStreamNum) {
                    case -1:
                        sprintf(file_name,
"%s%sqryqualinter.%s", run_dir, delim, time_sta
mp);
                        break;
                    case 0:
                        /*sprintf(file_name,
"%s%smpinter.%s", run_dir, delim, time_stamp);*/
                        /
                        if (g_struct->c_l_opt->update ==
1)
                            sprintf(file_name,
"%s%smpqinter.%s", run_dir, delim, time_stamp);
                        else
                            sprintf(file_name,
"%s%smpufinter.%s", run_dir, delim, time_stamp)
;
                        break;
                    default:
                        if (g_struct->c_l_opt-
>intStreamNum > 0)
                            sprintf(file_name,
"%s%smts%dinter.%s",
run_dir, delim, g_struct->c_l_opt-
>intStreamNum, time_stamp);
                        else
                            fprintf(stderr, "Invalid
stream number specified\n");
                        break;
                }

            strcpy(outstreamfilename, file_name); /*
wlc 081397 */

    if (!feof(instream) || g_struct->c_flags-
>eo_infile)
        /* Only create an output file if there
are input
statements left to process, or if
we're all done
and want to print out the summary
table file */

```



```

        if( (outstream = fopen(file_name,
WRITEMODE)) == NULL ) {
            fprintf(stderr, "\nThe output file
could not be opened. ");
            fprintf(stderr, "Make sure that the
filename is correct.\n");
            fprintf(stderr, "filename =
%s\n", file_name);
            exit(-1);
        }

        return;
    }

/*****
*****
/* Determine whether or not we should break
out of the block loop
because of an end of file, end of block,
or update function.
Also handle some semaphore stuff for
update functions */
/*****
*****
int PreSQLprocess(struct global_struct
*g_struct, Timer_struct *start_time)
{
    int                rc = 1;
    FILE               *updateFP;
#ifdef SQLWINT
    int                semid;
/* semaphore for controlling UFs*/
    key_t               semkey;
/* key to generate semid */
#else
    int                SemTimeout = 60000;
/* Des time out period of 1 minute */
#endif

    switch (g_struct->c_flags->select_status)
    {
        case TPCDBATCH_NONSQL:
            g_struct->s_info_stop_ptr = g_struct-
>s_info_ptr;
            /* if we're at the end of the input
file, set the stop
pointer to this structure */
            rc = FALSE;
            break;
        case TPCDBATCH_EOBLOCK:
            rc = FALSE;
            break;
        case TPCDBATCH_INSERT:
            /* we have to check whether or not
this is a throughput */
            /* test, and if it is, we have to set
up a semaphore to */
            /* control when the update functions
are run. We want */
            /* them to be run after all the query
streams have finished. */
            /* What we do is set up the semaphore
here, decrement it */
            /* in the query streams, and wait for
it to get cleared */
            /* before we allow the UFs to run.
*/
            /* Note: we only set up the semaphore
if: */

```

```

/*          1. we are running the
throughput test (num of */
/*          streams > 0)
*/
/*          2. we are at the first UF1
(i.e. this is the */
/*          case where
currentUpdatePair = updatePairStart */
/* we also want to check the sem_on
element in the global */
/* structure to see if we want to use
semaphores or let */
/* the calling script do the
synchronization of the update */
/* stream
*/
        if ( semcontrol == 1 )
        {
            /* yes we are to be using
semaphores */
            /* is this the 1st time into update
function 1 (uf1)? */
            if (currentUpdatePair ==
updatePairStart )
            {
                /* create the semaphores */
                create_semaphores(g_struct);
                if (g_struct->c_l_opt-
>intStreamNum != 0)
                /* wait period for
runthroughput updates */
                throughput_wait(g_struct);
            }
            /* otherwise continue to run*/
        }
        if ((g_struct->c_l_opt->update == 3)
|| (g_struct->c_l_opt->update == 4))
        {
            get_start_time(start_time);
            strcpy(g_struct->s_info_ptr-
>start_stamp,
get_time_stamp(T_STAMP_FORM_3, start_time ));
/* TIME_ACC jen*/
            /* write the start timestamp to the
file...if this is not a qualification */
            /* run, then write the seed used as
well */
            fprintf( outstream, "Start timestamp
%.4s \n",
                    T_STAMP_3LEN, T_STAMP_3LEN,
/* TIME_ACC jen*/
                    g_struct->s_info_ptr-
>start_stamp);
            if (g_struct->c_l_opt->intStreamNum
>= 0)
            {
                if (g_struct->lSeed == -1)
                {
                    fprintf( outstream, "Using
default qgen seed file");
                }
                else
                    fprintf( outstream, "Seed used =
%d", g_struct->lSeed);
                fprintf( outstream, "\n");
            }
        }
        if (g_struct->c_l_opt->update < 4){
            /* run only if updates are enabled */

```

```

        runUF1(g_struct, currentUpdatePair);
    }

    rc = FALSE;
    if ((g_struct->c_l_opt->intStreamNum
== 0) && (semcontrol == 1))
        /* RUNPOWER: release first semaphore
so the queries can run */
        release_semaphore(g_struct,
INSERT_POWER_SEM);
        break;
    case TPCDBATCH_DELETE:
        if ((g_struct->c_l_opt->intStreamNum
== 0) && (semcontrol == 1))
        {
            /* RUNPOWER: wait for queries to
finish */
            /* waiting on QUERY_POWER_SEM
semaphore */
            runpower_wait(g_struct,
QUERY_POWER_SEM);
        }
        if ((g_struct->c_l_opt->update == 3)
|| (g_struct->c_l_opt->update == 4))
        {
            get_start_time(start_time);
            strcpy(g_struct->s_info_ptr-
>start_stamp,

get_time_stamp(T_STAMP_FORM_3, start_time ));
/* TIME_ACC jen*/
            /* write the start timestamp to the
file...if this is not a qualification */
            /* run, then write the seed used as
well */
            fprintf( ostream, "Start timestamp
%*. *s \n",
                    T_STAMP_3LEN, T_STAMP_3LEN,
/* TIME_ACC jen*/
                    g_struct->s_info_ptr-
>start_stamp);
            if (g_struct->c_l_opt->intStreamNum
>= 0)
            {
                if (g_struct->lSeed == -1)
                {
                    fprintf( ostream, "Using
default qgen seed file");
                }
                else
                    fprintf( ostream, "Seed used =
%d", g_struct->lSeed);
                fprintf( ostream, "\n");
            }
            if (g_struct->c_l_opt->update < 4){
                /* run only if updates are enabled */
                runUF2(g_struct, currentUpdatePair);
                if (g_struct->c_l_opt->intStreamNum
== 0)
                    /* RUNPOWER */
                    fprintf(stderr, "UF2
completed\n");
            }
            currentUpdatePair += 1;
            /* update the update.pair.num file to
reflect the successfully completed */
            /* update pair */
            if (g_struct->c_l_opt->update < 4)
            {
                /*jen*/
                #ifndef NO_INCREMENT
                    /* don't update the pair, only for
my testing - Haider */
                    updateFP = fopen(g_struct-
>update_num_file, "w");
                    fprintf(updateFP, "%d\n", currentUpdatePair);
                    fclose(updateFP);
                #endif
            } /*jen*/
            rc = FALSE;
            break;
        }
    }
    return(rc);
}

/*****
*****
***** Handles actual processing of SQL
statement.  Initializes the SQLDA
for returned rows, does PREPARE, DECLARE,
and OPEN statements and
executed multiple FETCHes as needed.  If
not a SELECT statement,
goes into EXECUTE IMMEDIATE section
*/
/*****
*****
void SQLprocess(struct global_struct
*g_struct)
{
    int rc = 0;
    /* 912RETRY */
    int rows_fetch = 0;
    long sqlcode = SQL_RC_E911;
    /* Temporary sqlcode to test

for deadlocks */
    int max_wait = 1;
    /* Maximum number of retries

for deadlock scenario */

    int col_lengths[TPCDBATCH_MAX_COLS];
    /* array containing widths of

columns in returned set */
    struct stmt_info *s_info_ptr;

    s_info_ptr = g_struct->s_info_ptr;
    /*****
    *****/
    /* grab storage for the SQLDA
    */
    /*****
    *****/
    if ((sqlda=(struct sqlda
*)malloc(SQLDASIZE(100))) == NULL)
        mem_error("allocating sqlda");

    sqlda->sqln = TPCDBATCH_MAX_COLS;
    /* @d30369 tjj */

    /* Error-recovery code for errors
resulting from multi-stream errors */

    while (((sqlcode == SQL_RC_E911) ||
            (sqlcode == SQL_RC_E912) ||

```

```

                (sqlcode == SQL_RC_E901)) &&
                (max_wait < MAXWAIT) &&
                (rc==0) )
    {
        sqlcode = 0;          /* Re-
initialize sqlcode to avoid infinite-loop */
        if (g_struct->c_flags->select_status
== TPCDBATCH_SELECT)
        {
            /* Enter this loop if SQL stmt is a
SELECT */
            EXEC SQL PREPARE STMT1 INTO :sqllda
FROM :stmt_str;

            sqlcode = error_check();
            if (sqlcode < 0)
            {
                fprintf (stderr, "\nPrepare
failed. Stopping this query.\n");
                rc = -1;
            }
            else /* print out the column
headings for the answer set */
            {

print_headings(sqllda, col_lengths);
/* @d22817 tjt */

                allocate_sqllda(sqllda); /*
This is where we set storage for the */
SQLDA based on the column types in /*
the answer set table. */

                EXEC SQL DECLARE DYNCUR CURSOR
FOR STMT1;

                EXEC SQL OPEN DYNCUR;
                sqlcode = error_check();

                if (sqlcode < 0) /* we ran
into an error of some kind KBS 98/09/28 */
                {
                    max_wait ++;
                    fprintf (stderr, "\nAn error
has been detected on open...Retrying...\n");
                    SleepSome(10);
                }
                else
                {

/*****
*****
                /* Fetch appropriate number
of rows and determine whether or not to
*/
                /* send them to file.
*/

/*****
*****
                rows_fetch = 0;

                do
                {
                    /* Keep fetching as long
as we haven't finished reading
                all the rows and we
haven't gone past the limits set
in the control string */

                    EXEC SQL FETCH DYNCUR
USING DESCRIPTOR :sqllda;
                    if (sqlca.sqlcode == 100)
                    {
                        sqlcode =
sqlca.sqlcode;
                    }
                    else
                    {
                        sqlcode =
error_check();
                    }
                    if (sqlcode == 0)
                    {
                        rows_fetch++;
                        if ( (rows_fetch <=
s_info_ptr->max_rows_out) ||
(s_info_ptr->max_rows_out == -1) )
                        echo_sqllda(sqllda, col_lengths);
                    }
                    else if (sqlcode < 0)
                    {
                        max_wait++;
                        fprintf (stderr, "\nAn
error has been detected on
fetch...Retrying...\n");
                        SleepSome(10);
                    }
                    } while ( (sqlcode == 0) &&
\
                    ( (s_info_ptr->max_rows_fetch == -1) || \
                    (rows_fetch <
s_info_ptr->max_rows_fetch) ) );
                } /* end of successful open */
                } /* end of successful prepare */
            } /** End of block for handling SELECT
statements */

            else
            {
                /* SQL statement is not a
SELECT */
                EXEC SQL EXECUTE IMMEDIATE
:stmt_str;
                sqlcode = error_check();

                if (sqlcode < 0 )
                {
                    max_wait ++;
                    fprintf (stderr, "\nAn error has
been detected on execute
immediate...Retrying...\n");
                    SleepSome(10);
                }
            } /* end of block for handling NON-
select statements */

            if ( (sqlcode >= 0) &&
(g_struct->c_flags->select_status
== TPCDBATCH_SELECT))
            {
                /* we opened a cursor before */
                EXEC SQL CLOSE DYNCUR;
                sqlcode = error_check();
            }
        }
    }

```

```

        if ((s_info_ptr->max_rows_fetch ==
-1) ||
        (rows_fetch < s_info_ptr-
>max_rows_fetch))
#ifdef SQLPTX
        fprintf (outstream, "\n\nNumber of
rows retrieved is: %6d",
                rows_fetch);
        else
        fprintf (outstream, "\n\nNumber
of rows retrieved is: %6d",
                s_info_ptr-
>max_rows_fetch);
#else
        fprintf (outstream, "\n\nNumber of
rows retrieved is: %6d",
                rows_fetch);
        else
        fprintf (outstream, "\n\nNumber
of rows retrieved is: %6d",
                s_info_ptr-
>max_rows_fetch);
#endif
    }
/* @d28763 tjg */

    if (s_info_ptr->query_block == FALSE)
/* if block is off don't loop */
    g_struct->c_flags->eo_block = TRUE;

} /* end of while loop to retry if needed
*/

} /* end of SQLprocess */

/*****
*****
*/
/* performs some operations after a
statement has been processed,
including doing a COMMIT if necessary,
and calculating the
elapsed time. Also initializes a new
stmt_info structure
for the next block of statements
*/
/*****
*****
*/
int PostSQLprocess(struct global_struct
*g_struct, Timer_struct *start_time)
{
    struct stmt_info *s_info_ptr;
    Timer_struct      end_t;          /*
end point for elapsed time */

#ifdef DEBUG
    fprintf (outstream, "In
PostSQLprocess\n");
#endif

    s_info_ptr = g_struct->s_info_ptr;

    if (g_struct->c_flags->select_status ==
TPCDBATCH_NONSQL)
        return FALSE; /* get out if we've
reached the end of input file */

    if (g_struct->c_l_opt->update > 1)
    {
        /* This is an update function stream.
There is no need to COMMIT. */
        /* Each UF child will COMMIT its own
transactions. */
        ;
    }
    else
    { /* For non-UF cases, COMMIT now. */
        if (g_struct->c_l_opt->a_commit) {
            EXEC SQL COMMIT WORK;
            error_check();
        } /* @d22275 tjg */
    }

    fflush(outstream);

    s_info_ptr->elapse_time =
get_elapsed_time(start_time);

    if (g_struct->c_flags->time_stamp ==
TRUE) /* @d25594 tjg */
        get_start_time(&end_t); /* Get the end
time */
        strcpy(s_info_ptr->end_stamp,
get_time_stamp(T_STAMP_FORM_3,&end_t)
);
        /*get_time_stamp(T_STAMP_FORM_3,(time_t)NULL
);*/

        /* BBE: Pass on time stamp values for the
next query */
        temp_time_struct = end_t;
        strcpy(temp_time_stamp, s_info_ptr-
>end_stamp);

        /* write the start timestamp to the file
*/
        fprintf( outstream, "\n\nStop timestamp
%*.s \n",
                T_STAMP_3LEN, T_STAMP_3LEN, /*
TIME_ACC jen*/
                s_info_ptr->end_stamp);

        /* DJD print elapsed time in seconds */
        fprintf( outstream, "Query Time = %15.1f
secs\n", s_info_ptr->elapse_time);

        /* Allocate space for a new stmt_info
structure */ /* @d24993 tjg */
        s_info_ptr->next =
(struct stmt_info *)
malloc(sizeof(struct stmt_info));
        if (s_info_ptr->next != NULL) {
            memset(s_info_ptr->next, '\0',
sizeof(struct stmt_info));
            /** Transfer details from one
structure to another for
to apply for the next statement **/
            s_info_ptr->next->stmt_num =
s_info_ptr->stmt_num + 1;
            s_info_ptr->next->max_rows_fetch =
s_info_ptr->max_rows_fetch;
            s_info_ptr->next->max_rows_out =
s_info_ptr->max_rows_out;

            s_info_ptr->next->query_block =
s_info_ptr->query_block;
            s_info_ptr->next->elapse_time = -1;

            s_info_ptr = s_info_ptr->next;

```

```

    }
    else {
        mem_error("allocating next stmt
structure. Exiting\n");
        exit(-1);
    }

    /** Set the stop and travelling pointer
to the current info structure **/
    g_struct->s_info_stop_ptr = g_struct-
>s_info_ptr = s_info_ptr;

    if (sqlda_allocated)
        free_sqlda(sqlda,g_struct->c_flags-
>select_status);
    /* fix free() problem on NT
wlc 090597 */

    if (g_struct->c_l_opt->outfile != 0)
        fclose(outstream);

    return (TRUE);
}

/*****
*****
/* Does some cleaning up once all the
statements are processed. Disconnects
from the database, cleans up some
semaphore stuff from the update functions,
prints out the summary table, and closes
all file handles. */
/*****
*****
int cleanup(struct global_struct *g_struct)
{
#ifdef SQLWINT
    int          semid;
    /* semaphore for controlling UFs*/
    key_t        semkey;
    /* key to generate semid */
#endif
    char file_name[256] = "\0";

    /** End timestamp for stream **/
    /*g_struct->stream_end_time =
time(NULL);*/
    get_start_time(&(g_struct-
>stream_end_time)); /* TIME_ACC jen */

    switch (g_struct->c_l_opt->update)
    {
        case (2):
        case (5):
            /* update throughput
function stream */
            sprintf(file_name,"%s%stuf.%s",g_struct
->run_dir,
                    env_tpcd_path_delim,
g_struct->file_time_stamp);
            break;
        case (3):
        case (4):
            /* update power function
stream */
            sprintf(file_name,"%s%stuf.%s",g_struct
t->run_dir,
                    env_tpcd_path_delim,
g_struct->file_time_stamp);
            break;
        case (1):
            /* power query stream */
            sprintf(file_name,
"%s%stuf.%s",g_struct->run_dir,
env_tpcd_path_delim,
                    g_struct->c_l_opt-
>intStreamNum,g_struct->file_time_stamp);
            break;
        case (0):
            /* throughput query stream
*/
            sprintf(file_name,
"%s%stuf.%s",g_struct->run_dir,
env_tpcd_path_delim,
                    g_struct->c_l_opt-
>intStreamNum,g_struct->file_time_stamp);
            break;
    }
}

#ifdef LINUX
    if( (g_struct->stream_report_file =
fopen(file_name, APPENDMODE)) == NULL )
    {
        fprintf(stderr,"\nThe output file for
the stream count information\n");
        fprintf(stderr,"could not be opened,
make sure the filename is correct\n");
        fprintf(stderr,"filename =
%s\n",file_name);
        exit(-1);
    }
#endif

    /* print out the stream stop time in the
stream count information file*/
    if (g_struct->c_l_opt->update > 1)
    {
        /* update function stream */
        fprintf(g_struct->stream_report_file,
"Update function stream
stopping at %*.s\n",
                T_STAMP_3LEN,T_STAMP_3LEN, /*
TIME_ACC jen*/
                get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_end_time))); /* TIME_ACC jen*/
    }
    else
    {
        /* query stream(s) */
        fprintf(g_struct->stream_report_file,
"Stream number %d stopping at
%*.s\n",
                g_struct->c_l_opt-
>intStreamNum,
                T_STAMP_3LEN,T_STAMP_3LEN, /*
TIME_ACC jen*/
                get_time_stamp(T_STAMP_FORM_3,&(g_struct-
>stream_end_time))); /* TIME_ACC jen*/
    }
    fclose(g_struct->stream_report_file);

    /* No need to check for errors here.

```

```

    Also, the UF stream in a Throughput
run
    has no connection in tpcdbatch.sqc.
aph 98/12/26
    error_check();
    */

    /* if we are in a query stream AND this
is a throughput test, then need */
    /* do to some semaphore stuff (0
implies update functions are off) */
    /* AND we are supposed to be using
semaphores */

    if ( ( semcontrol == 1 ) &&
        ( g_struct->c_l_opt->update < 2))
        /* only queries need to release the
semaphore at this point */
        {
            if (g_struct->c_l_opt->intStreamNum ==
0)
                release_semaphore(g_struct,
QUERY_POWER_SEM); /* power stream */
            else
                release_semaphore(g_struct,
THROUGHPUT_SEM); /* throughput stream */

            EXEC SQL CONNECT RESET;
#ifdef SQLWINT
            if (verbose)
            {
                fprintf(stderr,
                    "cleanup: semkey = %ld,
semid = %d, file = %s, stream = %d\n",
                    semkey, semid, g_struct-
>update_num_file,
                    g_struct->c_l_opt-
>intStreamNum);
            }
        }
#endif

    /** Summary table processing **/
    /* @d24993 tjj */
    summary_table(g_struct);

    fprintf (outstream, "\n\n");

    fclose(outstream); /* Close
the output data stream. */
    fclose(instream); /* Close
the SQL input stream. */

    return (TRUE);
}

void create_semaphores(struct global_struct
*g_struct)
{
#ifdef SQLWINT
    int semid;
    /* semaphore for controlling UFs*/
    key_t semkey;
    /* key to generate semid */
#else
    HANDLE hSem;
    HANDLE hSem2;
    int SemTimeout = 60000;
    /* Des time out period of 1 minute */

```

```

#endif
        fprintf(stderr, "numstreams =
%d\n", g_struct->c_l_opt->intStreamNum);
        fprintf(stderr, "Update stream
creating semaphore(s) for update and query
sequencing\n");
#ifdef SQLWINT
        fprintf(stderr, "semfile =
%s\n", g_struct->sem_file);
        if (g_struct->c_l_opt->intStreamNum
== 0)
            /*RUNPOWER*/
            {
                fprintf(stderr, "semfile2 =
%s\n", g_struct->sem_file2);
                hSem = CreateSemaphore(NULL,
0, 1, (LPCTSTR) (g_struct->sem_file));
                hSem2 =
CreateSemaphore(NULL,
0, 1, (LPCTSTR) (g_struct->sem_file2));
                if ((hSem == NULL) || (hSem2
== NULL))
                    {
                        fprintf(stderr,
                            "CreateSemaphores
(ready semaphore) failed, GetLastError: %d,
quitting\n",
                                GetLastError());
                        exit(-1);
                    }
                fprintf(stderr, "Semaphores
created successfully!\n");
            }
            else
            {
                /* RUNTHROUGHPUT creates semaphores
based on the number of query streams while
the number of streams for runpower is
constant */
                hSem = CreateSemaphore(NULL,
0,
g_struct->c_l_opt->intStreamNum,
(LPCTSTR) (g_struct->sem_file));

                if (hSem == NULL)
                {
                    fprintf(stderr,
                        "CreateSemaphore (ready semaphore) failed,
GetLastError: %d, quitting\n",
                            GetLastError());
                    exit(-1);
                }
                fprintf(stderr, "Semaphore
created successfully!\n");
            }
        }
        /* AIX, SUN, etc. */
        /* create a semaphore key...use the
name of a file that */
        /* you know exists */
        fprintf(stderr, "semfile = %s\n",
g_struct->update_num_file);
        semkey = ftok(g_struct-
>update_num_file, 'J');
        if (g_struct->c_l_opt->intStreamNum
== 0)

```

```

/* RUNPOWER */
{
    if ( (semid =
semget (semkey,2,IPC_CREAT|S_IRUSR|S_IWUSR)
< 0)
        {
            fprintf(stderr,
                "Throughput
can't get initial semaphore! semget failed
errno = %d\n",
                    errno);
            exit(1);
        }
    }
    else
    /* THROUGHPUT */
    {
        if ( (semid =
semget (semkey,1,IPC_CREAT|S_IRUSR|S_IWUSR)
< 0)
            {
                fprintf(stderr,
                    "Throughput
can't get initial semaphore! semget failed
errno = %d\n",
                        errno);
                exit(1);
            }
        if (verbose)
        {
            fprintf(stderr,
                "insert:
semkey = %ld, semid = %d, file = %s, value =
%d\n",
semkey,semid,g_struct->update_num_file,
                    (g_struct-
>c_l_opt->intStreamNum * -1));
        }
    }

#endif
}

/*throughput update */
void throughput_wait(struct global_struct
*g_struct)
{
#ifdef SQLWINT
    int          semid;
    /* semaphore for controlling UFs*/
    key_t        semkey;
    /* key to generate semid */
#else
    HANDLE       hSem;
    int          j;
    int          SemTimeout = 600000;
    /* Des time out period of 1 minute */
#endif

#ifdef SQLWINT
    hSem = open_semaphore(g_struct,
THROUGHPUT_SEM);
    for (j = 0; j < g_struct->c_l_opt-
>intStreamNum; j++)
    {
        if (verbose)

```

```

        fprintf(stderr,"About to
wait again ... \n");
        if
(WaitForSingleObject(hSem, INFINITE) ==
WAIT_FAILED)
        {
            fprintf(stderr,
                "WaitForSingleObject (hSem) failed on stream
%d, error: %d, quitting\n",
                    j, GetLastError());
            exit(-1);
        }
        if (verbose)
        fprintf(stderr,"Streams to wait for %d\n",
j);
    }
    fprintf(stderr,"finished waiting on
stream semaphore! Ready to run updates!\n");
    /* close the semaphore handle */
    if (! CloseHandle(hSem)) {
        fprintf(stderr, "Close Sem failed
- Last Error: %d\n", GetLastError());
        /* no exit here */
    }
#else
    semid = open_semaphore(g_struct);
    /* call the sem_op routine to
decrement the semaphore by */
    /* however many streams ... by
calling this function with*/
    /* a negative number, this stream is
forced to wait until */
    /* the semaphore gets back to 0 */
    if (sem_op(semid, 0, (g_struct-
>c_l_opt->intStreamNum * -1)) != 0)
    {
        /*jenSEM*/
        fprintf(stderr,
            "Failure to wait on
throughput semaphone for %d streams\n",
                g_struct->c_l_opt-
>intStreamNum);
        exit(1);
    }
    /*jenSEM*/
    fprintf(stderr,"finished waiting on
stream semaphore! Ready to run updates!\n");
    semctl(semid,0,IPC_RMID,0); /*
we've finished waiting, now */
    /*
remove the semaphore */
#endif
}

void runpower_wait(struct global_struct
*g_struct, int sem_num)
{
    char semfile[150];
#ifdef SQLWINT
    HANDLE hSem;

    if (sem_num == 1)
        strcpy (semfile, g_struct-
>sem_file);
    else
        strcpy (semfile, g_struct-
>sem_file2);

```

```

#else /* AIX */
    int          semid;
    /* semaphore for controlling UFs*/
    key_t        semkey;
    /* key to generate semid */

    strcpy (semfile, g_struct-
>update_num_file);

#endif

    if (g_struct->c_l_opt->update == 1)
        fprintf(stderr,"querystream waiting for
update stream (UF1) to signal semaphore
based on %s\n", semfile);
    else
        fprintf(stderr,"updatestream (UF2)
waiting on querystream semaphore to signal
semaphore based on %s\n", semfile);

#ifdef SQLWINT

    hSem = open_semaphore(g_struct,
sem_num);
    if (verbose)
        fprintf(stderr,"Runpower queries about
to wait ...\n");
    if (WaitForSingleObject(hSem, INFINITE)
== WAIT_FAILED)
    {
        fprintf(stderr,
            "WaitForSingleObject (hSem) failed
on stream 0, error: %d, quitting\n",
            GetLastError());
        exit(-1);
    }
    if (! CloseHandle(hSem))
    {
        fprintf(stderr, "Close Sem
failed - Last Error: %d\n", GetLastError());
        /* no exit here */
    }
#else

    semid = open_semaphore(g_struct);

    /* call the sem_op routine to decrement
the semaphore by */
    /* however many streams .... by calling
this function with*/
    /* a negative number, this stream is
forced to wait until */
    /* the semaphore gets back to 0 */
    /* aix semaphores start at 0, not 1, so
sem_num -1 is used */
    if (sem_op(semid, sem_num - 1, -1) != 0)
    {
        /*jenSEM*/
        fprintf(stderr,
            "Failure to wait on runpower
semaphone for %d streams\n",
            g_struct->c_l_opt-
>intStreamNum);
        exit(1);
    }
    /*jenSEM*/
#endif
    if (g_struct->c_l_opt->update == 1)

```

```

        fprintf(stderr,"querystream finished
waiting on updatestream semaphore\n");
    else
        fprintf(stderr,"updatestream finished
waiting on querystream semaphore\n");
}

void release_semaphore(struct global_struct
*g_struct, int sem_num)
{
#ifdef SQLWINT
    int          semid;
    /* semaphore for controlling UFs*/
    key_t        semkey;
    /* key to generate semid */
#else
    HANDLE        hSem;
    int          SemTimeout = 600000;
    /* Des time out period of 1 minute */
#endif

#ifdef SQLWINT
    hSem = open_semaphore(g_struct,
sem_num); /* query */
    if (! ReleaseSemaphore(hSem,
        1,
(LPLONG) (NULL)))
    {
        fprintf(stderr,
"ReleaseSemaphore failed, Sem#: %d
LastError: %d, quit\n",
            sem_num,
GetLastError());
        exit(-1);
    }
#else
    semid = open_semaphore(g_struct); /*
query */
    /* aix semaphores start at 0, not 1,
so sem_num -1 is used */
    if (sem_op(semid, sem_num - 1, 1) !=
0)
        /*jenSEM*/
        {
            fprintf(stderr,
                "Failed to increment
semaphore %d for throughput stream %d\n",
                sem_num, g_struct-
>c_l_opt->intStreamNum);
            fprintf(stderr,
                "file for generation
of semaphore is: %s\n",
                g_struct-
>update_num_file);
            exit(1);
        }
#endif
    if (g_struct->c_l_opt->intStreamNum
== 0)
    { /* RUNPOWER */
        if (sem_num == 1)
        {
            fprintf(stderr, "UF1
completed.\n");
        }
        else
        {
            fprintf(stderr, "query stream
completed.\n");
        }
    }
}

```



```

    }
}

#ifdef SQLWINT /* Compile only in NT */
HANDLE open_semaphore(struct global_struct
*g_struct, int num)
{
    HANDLE hSem;
    LPCTSTR semfile;

    if (num == 1)
        semfile = (LPCTSTR)g_struct-
>sem_file;
    else
        semfile = (LPCTSTR)g_struct-
>sem_file2;

    while ((hSem =
OpenSemaphore(SEMAPHORE_ALL_ACCESS |
SEMAPHORE_MODIFY_STATE |
SYNCHRONIZE,
TRUE,
semfile))
        ==
(HANDLE) (NULL))
    {
        /*
        ** if cannot open the semaphore,
wait for 0.1 second
        */
        fprintf(stderr, "Retry Open
semaphore %s\n", semfile);

        Sleep(1000);
    }
    return hSem;
}

#else /* Compile only in non-NT (i.e. AIX)
*/
int open_semaphore(struct global_struct
*g_struct)
{
    int          semid;
    /* semaphore for controlling UFs*/
    key_t        semkey;
    /* key to generate semid */
    int num;

    if (g_struct->c_l_opt->intStreamNum
== 0)
        num = 2;
    else
        num = 1;

    semkey = ftok(g_struct-
>update_num_file, 'J');
    while ((semid =
semget(semkey, num, 0)) < 0)
    {
        if (errno == ENOENT)
        {
            sleep(2);

fprintf(stderr, "cleanUp: looping for access
to semaphore stream %d ",

```

```

g_struct-
>c_l_opt->intStreamNum);
fprintf(stderr, "semkey=%ld semid = %d
file=%s\n", semkey, semid,
g_struct-
>update_num_file);
    }
    else
    {
        fprintf(stderr, "query stream %d semget
failed errno = %d\n",
g_struct-
>c_l_opt->intStreamNum, errno);
        exit(1);
    }
}
return semid;
}
#endif
-

```

### **tpcdUF.sqc**

```

/*****
*****
*
* TPCDUF.SQC
*
* Revision History:
*
* 05 dec 98 aph Created tpcdUF.sqc
containing runUF1_fn() and runUF2_fn()
* so that it can be bound
separately with a different isolation level.
* 15 may 99 bbe Added cast (short) for type
conversion between a long and a short.
* 16 jun 99 jen Added in proper connect
reset code for UF functions (mistakenly
* removed
* 17 jun 99 jen SEMA Changes semaphore file
for update functions to look for tpcd.setup
* not for the orders.***
update data file (AIX only)
* 21 jul 99 bbe Commented out conditions in
SQL statments that searched on fields
* other than app_id.
*
*****
*****/

#define UF1DEBUG
#define UF2DEBUG

#if (defined(SQLPTX) && defined(SQLSUN))
#define exit(rc) _exit(rc)
#else
#define exit(rc) exit(rc)
#endif /* SQLPTX & SQLSUN*/

#include "tpcdbatch.h"
/** EXEC SQL INCLUDE SQLCA; */

#include "sqlca.h"
extern struct sqlca sqlca;

```

```

/*****
*****
*/
/* Function Prototypes
*/
/*****
*****
extern int SleepSome( int amount );
extern long error_check(void);
/* @d28763 tjpg */
extern void dumpCa(struct sqlca*);
/*kmw*/
extern int sem_op (int semid, int semnum,
int value);
extern char *get_time_stamp(int form,
Timer_struct *timer_pointer); /*
TIME_ACC jen */

/*****
*****
/* Declare the SQL host variables.
*/
/*****
*****
EXEC SQL BEGIN DECLARE SECTION;
char UF_dbname[9] = "\0";
char UF_userid[9] = "\0";
char UF_passwd[9] = "\0";
sqlint32 UF_chunk = 0;
short month = 0;
EXEC SQL END DECLARE SECTION;

/*****
*****
/* Declare the global variables.
*/
/*****
*****
extern char env_tpcd_tmp_dir[150];
extern FILE *instream, *outstream; /* File
pointers */
extern char sourcefile[256]; /* Used for
semaphores and table functions?*/
extern struct {
/* jen LONG */
short len;
char data[32700];
} stmt_str;
/* jen LONG */

/*****
*****
/* UF1 child
*/
/* (i is the application number.)
*/
/*****
*****
void runUF1_fn ( int updatePair, int i, char
*dbname, char *userid, char *passwd )
{
int rc = 0;
int split_updates = 2; /* no. of
ways update records are split */
int concurrent_inserts = 2; /* jenCI no
of concurrent updates to be */
/* jenCI run
at once*/
int loop_updates = 1; /* jenCI no
of updates to be run in one */
*****
*****
/* jenCI
"concurrent" invocation. should*/
/* jenCI be
split_updates / concurrent_inserts*/
int startChunk = 0; /* jenCI
number of first chunk to insert for */
/* jenCI
this child */
int stopChunk = 0; /* jenCI
number of last chunk to insert for */
/* jenCI
this child */
long insertedLineitem = 0; /*kmw*/
long insertedOrders = 0; /*kmw*/
long saveInsertedOrders = 0; /*kbs*/

long sqlcode;
int maxwait;

#ifdef SQLWINT
int su_semId;
key_t su_semkey;
#else
HANDLE su_hSem;
char UF1_semfile[256];
#endif

char myostreamfile[256];
FILE *myostream;

strcpy(UF_dbname, dbname);
strcpy(UF_userid, userid);
strcpy(UF_passwd, passwd);

/* Get ready to start logging diagnostic
output */
sprintf (myostreamfile,
UF1OUTSTREAMPATTERN, env_tpcd_tmp_dir,
PATH_DELIM,
updatePair, i);
if ( (myostream = fopen
(myostreamfile, WRITEMODE)) == NULL)
{
fprintf (stderr, "\nThe output file
's' for update pair %d set %d could not be
opened. runUF1_fn\n",
myostreamfile,updatePair,i);
rc=-1;
goto UF1_exit;
}
outstream=myostream; /* initialize
outstream for error_check dxxxxhar*/

fprintf( myostream,"\nUF1 for update
pair %d set %d starting at %*.s\n",
updatePair, i,
T_STAMP_1LEN,T_STAMP_1LEN, /*
TIME_ACC jen*/

get_time_stamp(T_STAMP_FORM_1, (Timer_struct
*)NULL)); /* TIME_ACC jen*/

if (getenv ("TPCD_SPLIT_UPDATES") !=
NULL)
split_updates = atoi (getenv
("TPCD_SPLIT_UPDATES"));
if (getenv ("TPCD_CONCURRENT_INSERTS") !=
NULL)
/*jenCI*/

```

```

        concurrent_inserts = atoi (getenv
("TPCD_CONCURRENT_INSERTS")); /*jenCI*/
        loop_updates = split_updates /
concurrent_inserts;
/*jenCI*/

        /* determine the starting and stopping
point of the chunks that this jenCI*/
        /* invocation will apply. i is starting
chunk number with range 0 jenCI*/
        /* through (concurrent_inserts -1)
jenCI*/
        startChunk = i * loop_updates;
/*jenCI*/
        stopChunk = startChunk + (loop_updates -
1); /*jenCI*/

        /* Establish a connection to the database
*/
        if (!strcmp(userid,"\0")) /** No
authentication provided **/
            EXEC SQL CONNECT TO :UF_dbname;
        else
            EXEC SQL CONNECT TO :UF_dbname USER
:UF_userid USING :UF_passwd;
        error_check();
        if (sqlca.sqlcode < 0)
        {
            rc=-1;
            goto UF1_exit;
        }

        /* Start processing each chunk in my
range */
#ifdef UF1DEBUG
        fprintf (myoutstream,"Before loop_a
startChunk = %d, stopChunk = %d\n",
startChunk, stopChunk);
        fflush(myoutstream);
#endif
        for ( UF_chunk = startChunk; UF_chunk <=
stopChunk; UF_chunk++ )
/*jenCI*/
        {
/*jenCI*/
            /* wlc 062797 */
            sqlcode = SQL_RC_E911;
            month = (short)UF_chunk; /* Cast
'short' added bbe */
            maxwait = 1;
            rc = 0;

#ifdef UF1DEBUG
            fprintf (myoutstream, "Before While_a
Chunk= %d \n",UF_chunk);
            fflush(myoutstream);
#endif
            /* Loop to handle any deadlocks */
            while (sqlcode == SQL_RC_E911 &&
maxwait <= MAXWAIT && rc==0)
            {
                sqlcode = 0;
#ifdef UF1DEBUG
                fprintf (myoutstream, "in loop before
orders exec sql\n");
                fflush(myoutstream);
#endif
                EXEC SQL INSERT INTO TPCD.ORDERS

```

```

                SELECT
O_ORDERKEY,O_CUSTKEY,O_ORDERSTATUS,O_TOTALPR
ICE,
O_ORDERDATE,O_ORDERPRIORITY,O_CLERK,O_SHIPPR
IORITY,O_COMMENT
                FROM TPCDTEMP.ORDERS_NEW
                WHERE APP_ID = :UF_chunk;
                /*AND
12*(YEAR(O_ORDERDATE)-
1992)+MONTH(O_ORDERDATE)-01 = :month;*/

                if (sqlca.sqlcode < 0)
                    sqlcode = error_check();

                if (sqlcode == SQL_RC_E911)
                {
                    /* we've hit a deadlock
*/
                    fprintf (myoutstream,
"\nDeadlock detected
inserting from tpcdtemp.orders_new for chunk
%d for pair
%d..Retrying...\n",UF_chunk,updatePair);
                    SleepSome(UF_DEADLOCK_SLEEP);
                    maxwait++;
/* jen DEADLOCK */
                }
                else if (sqlcode < 0)
                {
                    fprintf(myoutstream,
"Insert into orders pair
%d chunk %d failed sqlcode=%d\n",
updatePair,UF_chunk,sqlcode);
                    dumpCa(&sqlca);
                    rc = -1;
                }
                else
                {
                    /* Everything worked with
ORDERS, proceed with LINEITEM */
                    saveInsertedOrders =
sqlca.sqlerrd[2];

                    sqlcode = 0;
#ifdef UF1DEBUG
                    fprintf (myoutstream, "in
lineitem for update pair number %d set %d
chunk %d\n",
                        updatePair,
i,UF_chunk);
                    fflush(myoutstream);
#endif

                    EXEC SQL INSERT INTO
TPCD.LINEITEM
                SELECT
L_ORDERKEY,L_PARTKEY,L_SUPPKEY,L_LINENUMBER,
L_QUANTITY,
L_EXTENDEDPRICE,L_DISCOUNT,L_TAX,
L_RETURNFLAG,L_LINESTATUS,L_SHIPDATE,L_COMMI
TDATE,L_RECEIPTDATE,
L_SHIPINSTRUCT,L_SHIPMODE,L_COMMENT
                FROM TPCDTEMP.LINEITEM_NEW
                WHERE APP_ID = :UF_chunk;
                /* (AND L_ORDERKEY IN
(SELECT O_ORDERKEY FROM
TPCD.ORDERS

```

```

WHERE
12*(YEAR(O_ORDERDATE)-
1992)+MONTH(O_ORDERDATE)-01 = :month);*/

        if (sqlca.sqlcode < 0)
            sqlcode = error_check();

        if (sqlcode == SQL_RC_E911)
        {
            /* we've hit a
deadlock */
            fprintf (myostream,
                    "\nA deadlock has
been detected inserting from
tpcdtemp.lineitem%d_%d...Retrying...\n",
                    updatePair,
UF_chunk);
            SleepSome(UF_DEADLOCK_SLEEP);
            maxwait++;
/* jen DEADLOCK */
        }
        else if (sqlcode < 0)
        {
            fprintf(myostream,
                    "Insert into lineitem
pair %d chunk %d failed sqlcode=%d\n",
                    updatePair,UF_chunk,sqlcode);
            dumpCa(&sqlca);
            rc = -1;
        }
        else
        {
#ifdef UF1DEBUG
            fprintf (myostream,
                    "lineitem insert
succeeded\n");
            fflush(myostream);
#endif
            /* accumulate the number of
row inserted */
            /* Order count ONLY updated
if both orders and lineitem */
            /* go through */
            insertedOrders +=
saveInsertedOrders; /* kbs */
            sqlca.sqlerrd[2];
            insertedLineitem +=
            rc=0;
            EXEC SQL COMMIT WORK;
            error_check();

#ifdef UF1DEBUG
            /* report the number of row
inserted */
            fprintf(myostream, "
interim %ld rows for chunk %d into
TPCD.ORDERS at %*.s\n",
                    insertedOrders,UF_chunk,T_STAMP_1LEN,T_STAMP
_1LEN, /* TIME_ACC jen*/

            get_time_stamp(T_STAMP_FORM_1,(Timer_struct
*)NULL)); /* TIME_ACC jen*/
            /* report the number of row
deleted *s inserted */
            fprintf(myostream,
                    " interim %ld rows
for chunk %d into TPCD.LINEITEM at %*.s\n",
                    insertedLineitem,UF_chunk,
T_STAMP_1LEN,T_STAMP_1LEN, /* TIME_ACC
jen*/
            get_time_stamp(T_STAMP_FORM_1,
(Timer_struct *)NULL)); /* TIME_ACC jen*/
            /* process lineitem INSERTs */
            /* while loop for deadlocks */
            /* while processing chunks */

            /* report the number of row deleted */
            fprintf(myostream, "%ld rows inserted
into TPCD.ORDERS at %*.s\n",
                    insertedOrders,T_STAMP_1LEN,T_STAMP_1LEN,
/* TIME_ACC jen*/

            get_time_stamp(T_STAMP_FORM_1,(Timer_struct
*)NULL)); /* TIME_ACC jen*/
            fprintf(myostream, "%ld rows inserted
into TPCD.LINEITEM at %*.s\n",
                    insertedLineitem,T_STAMP_1LEN,T_STAMP_1LEN,
/* TIME_ACC jen*/

            get_time_stamp(T_STAMP_FORM_1,(Timer_struct
*)NULL)); /* TIME_ACC jen*/
            if (sqlcode < 0)
            {
                if (sqlcode == SQL_RC_E911)
                {
                    fprintf (myostream,"# of
deadlocks exceeds %i\n", MAXWAIT);
                }
                rc=-1;
                EXEC SQL ROLLBACK WORK;
                error_check(); /*
@d22275 tjj */

                goto UF1_exit;
            }

            /* UF1_conn_reset: */
            EXEC SQL CONNECT RESET;
            error_check(); /*
@d22275 tjj */

            UF1_exit:
                fclose (myostream);
                /* exiting, increment the semaphore */

```

```

/* we used the first flat file to
generate the semaphore key */

#ifndef SQLWINT
/* we will use the tpcd.setup file to
generate the semaphore key begin SEMA */
if (getenv("TPCD_AUDIT_DIR") != NULL)
{
/* this is assuming that you will be
running this from 0th node */
sprintf(sourcefile,
"%s%ctools%ctpcd.setup",
getenv("TPCD_AUDIT_DIR"),
PATH_DELIM,PATH_DELIM);
}
else
{
fprintf(stderr, "Can't open UF1
semaphore file TPCD_AUDIT_DIR is not
defined.\n");
exit (-1);
}
/* end SEMA */

su_semkey = ftok (sourcefile, 'J');
while ( (su_semid = semget (su_semkey, 1,
0)) < 0)
{
if (errno == ENOENT) {
sleep(2);
}
else {
fprintf(stderr,"update set %d:
semget failed errno = %d\n",
i, errno);
exit(1);
}
}
if (sem_op (su_semid, 0, 1) != 0)
/*jen SEM*/
{
fprintf(stderr,"Failure to increment
semaphore UF1 set %d\n",i);
fprintf(stderr," semaphore sourcefile
= %s su_semid = su_semid\n",sourcefile);
exit(1);
}
/*jenSEM*/

#else /* SQLWINT */
sprintf (UF1_semfile,
"%s.%s.UF1.semfile",
getenv("TPCD_DBNAME"),
getenv("USER"));
fprintf(stderr,"UF1 semfile =
%s\n",UF1_semfile);
while ((su_hSem =
OpenSemaphore(SEMAPHORE_ALL_ACCESS |
SEMAPHORE_MODIFY_STATE |
SYNCHRONIZE,
TRUE,
UF1_semfile))
== (HANDLE) (NULL))
{
/*
** if cannot open the semaphore, wait
for 0.1 second
*/
fprintf(stderr,"Retry Open semaphore
%s\n", UF1_semfile);

sleep(1);
}
if (! ReleaseSemaphore(su_hSem,
1,
(LPLONG) (NULL)))
{
fprintf(stderr, "ReleaseSemaphore
failed, LastError: %d, quit\n",
GetLastError());
exit (-1);
}
#endif /* SQLWINT */
exit(rc); /* child
exiting after finishing up */
}

/*****
*****/
/* UF2 child
*/
/*****
*****/
void runUF2_fn ( int updatePair, int
thisConcurrentDelete, int numChunks, char
*dbname, char *userid, char *passwd )
{
int rc = 0;
long sqlcode;
int maxwait;
int startChunk =
thisConcurrentDelete*numChunks; /* where do
we start? */
long deletedLineitems = 0; /*kmw*/
long deletedOrders = 0; /*kmw*/
long savedDeletedLineitems = 0; /*kbs*/

#ifndef SQLWINT
int su_semid; /*
semaphore for controlling split updates*/
key_t su_semkey; /* key to
generate semid */
#else
HANDLE su_hSem;
char UF2_semfile[256];
#endif

char myostreamfile[256];
FILE *myostream, *src_fh=NULL;

strcpy(UF2_dbname, dbname);
strcpy(UF2_userid, userid);
strcpy(UF2_passwd, passwd);

/* Generate the unique filename for this
concurrent delete process */
sprintf (myostreamfile,
UF2OUTSTREAMPATTERN, env_tpcd_tmp_dir,
PATH_DELIM,
updatePair,
thisConcurrentDelete);
if ( (myostream = fopen
(myostreamfile, WRTMODE)) == NULL)
{
fprintf (stderr,

```

```

        "\nThe output file '%s' for
update pair %d set %d could not be opened
runUF2_fn.\n",

myoutstreamfile,updatePair,thisConcurrentDelete);
        rc=-1;
        goto UF2_exit;
    }

    outstream=myoutstream; /* initialize
outstream for error_check dxxxxhar*/

#ifdef UF2DEBUG
    fprintf (myoutstream, "RunUF2 Called %d
%d \n",

                updatePair,
thisConcurrentDelete, numChunks );
    fflush(myoutstream);
#endif
    fprintf( myoutstream,
        "\nUF2 for update pair %d set %d
starting at %*.s\n",
                updatePair,
thisConcurrentDelete,
T_STAMP_1LEN,T_STAMP_1LEN, /* TIME_ACC
jen*/

get_time_stamp(T_STAMP_FORM_1,(Timer_struct
*)NULL)); /* TIME_ACC jen*/

#ifdef UF2DEBUG
    fprintf (myoutstream, "before
connect\n");
    fflush(myoutstream);
#endif

    if (!strcmp(userid,"\0")) /** No
authentication provided **/
        EXEC SQL CONNECT TO :UF_dbname;
    else
        EXEC SQL CONNECT TO :UF_dbname USER
:UF_userid USING :UF_passwd;
    error_check();

#ifdef UF2DEBUG
    fprintf (myoutstream, "after connect
startchunk= %d, EndChunk = %d\n",

startChunk, startChunk+numChunks);
    fflush(myoutstream);
#endif

    /* Start processing each chunk in my
range */
    for ( UF_chunk = startChunk; UF_chunk <
startChunk+numChunks; UF_chunk++ )
    {

        /* Set things up for the loop which
will retry if there is a deadlock */
        sqlcode = SQL_RC_E911;
        month = (short)UF_chunk;
        maxwait = 1;
        rc = 0;

#ifdef UF2DEBUG
        fprintf (myoutstream, "Chunk = %d\n",
UF_chunk);
        fflush(myoutstream);
#endif

```

```

        while (sqlcode == SQL_RC_E911 &&
maxwait <= MAXWAIT && rc == 0)
        {

#ifdef UF2DEBUG
            fprintf (myoutstream, "in loop before
orders exec sql\n");
            fflush(myoutstream);
#endif

            sqlcode = 0;

            EXEC SQL DELETE FROM TPCD.LINEITEM
                WHERE L_ORDERKEY IN
                    (SELECT O_ORDERKEY FROM
TPCDTEMP.ORDERS_DEL
                WHERE APP_ID =
:UF_chunk);

            /*AND O_ORDERKEY IN
                (SELECT O_ORDERKEY
FROM TPCD.ORDERS
                WHERE
12*(YEAR(O_ORDERDATE)-
1992)+MONTH(O_ORDERDATE)-01 = :month));*/
            if (sqlca.sqlcode < 0)
                sqlcode = error_check();

            if (sqlcode == SQL_RC_E911)
            {
                /* we've hit a deadlock
*/

                fprintf (myoutstream,
                    "\nA deadlock detected while
deleting from LINEITEM: update pair %d set
%d chunk %d. Retrying.\n",
                        updatePair,
thisConcurrentDelete, UF_chunk);
                dumpCa(&sqlca);
                SleepSome(UF_DEADLOCK_SLEEP);
                maxwait++; /* jen DEADLOCK
*/

            }
            else if (sqlcode < 0)
            {
                fprintf (myoutstream,"\n%s\n",
stmt_str.data);
                fprintf (myoutstream,"\nsqlcode
%d occurred deleting from TPCD.LINEITEM\n",
sqlca.sqlcode);
                dumpCa(&sqlca);
                fprintf (myoutstream,
                    "for update pair number
%d set %d chunk %d..Exiting\n",
                        updatePair,
thisConcurrentDelete,UF_chunk);
                rc=-1;
            }
            else
            {
                /* accumulate the number of row
deleted */
                savedDeletedLineitems =
sqlca.sqlerrd[2]; /*kbs*/

#ifdef UF2DEBUG
                fprintf (myoutstream, "in loop
for update pair number %d set %d chunk
%d\n",

                    updatePair,
thisConcurrentDelete,UF_chunk);
                fflush(myoutstream);
#endif

```

```

        /* delete the orders now */
        EXEC SQL DELETE FROM TPCD.ORDERS
        WHERE O_ORDERKEY IN
        (SELECT O_ORDERKEY FROM
        TPCDTEMP.ORDERS_DEL WHERE APP_ID =
        :UF_chunk);
        /*AND 12*(YEAR(O_ORDERDATE)-
        1992)+MONTH(O_ORDERDATE)-01 = :month;*/

        if (sqlca.sqlcode < 0)
            sqlcode = error_check();

        if (sqlcode == SQL_RC_E911)
        {
            /* we've hit a
        deadlock */
        #ifdef UF2DEBUG
            fprintf (myostream, "orders
        deadlocked\n");
            fflush(myostream);
        #endif
            fprintf (myostream,
            "\nA deadlock detected while
        deleting from ORDERS: update pair %d set %d
        chunk %d. Retrying.\n",
            updatePair,
        thisConcurrentDelete, UF_chunk);
            dumpCa(&sqlca);
            SleepSome(UF_DEADLOCK_SLEEP);
            maxwait++; /* jen
        DEADLOCK */
        }
        else if (sqlcode < 0)
        {
        #ifdef UF2DEBUG
            fprintf (myostream, "orders failed\n");
            fflush(myostream);
        #endif
            fprintf (myostream, "\nAn
        error %d occurred deleting from
        TPCD.ORDERS\n", sqlca.sqlcode);
            dumpCa(&sqlca);
            fprintf (myostream, "for
        update pair number %d set %d chunk
        %d..Exiting\n",
            updatePair,
        thisConcurrentDelete, UF_chunk);
            rc=-1;
        }
        else
        {
        #ifdef UF2DEBUG
            fprintf (myostream, "orders
        succeeded\n");
            fflush(myostream);
        #endif
            /* accumulate the number of
        row deleted */
            /* Order count ONLY updated
        if both orders and lineitem */
            /* go through */
            deletedLineitems +=
        savedDeletedLineitems; /* kbs */
            deletedOrders +=
        sqlca.sqlerrd[2];
            rc=0;
            EXEC SQL COMMIT WORK;
            error_check();
        #ifdef UF2DEBUG
            /* report the number of rows
        deleted */
            fprintf(myostream, "
        interim %ld rows for chunk %d from
        TPCD.ORDERS at %*.s\n",
        deletedOrders,UF_chunk,T_STAMP_1LEN,T_STAMP_
        1LEN, /* TIME_ACC jen*/
        get_time_stamp(T_STAMP_FORM_1,(Timer_struct
        *)NULL)); /* TIME_ACC jen*/
            fprintf(myostream, "
        interim %ld rows for chunk %d from
        TPCD.LINEITEM at %*.s\n",
        deletedLineitems,UF_chunk,T_STAMP_1LEN,T_STA
        MP_1LEN, /* TIME_ACC jen*/
        get_time_stamp(T_STAMP_FORM_1,(Timer_struct
        *)NULL)); /* TIME_ACC jen*/
            fprintf( myostream,
            " deletes for
        update pair %d chunk %d complete at
        %*.s\n\n",
            updatePair,
        UF_chunk,
        T_STAMP_1LEN,T_STAMP_1LEN, /* TIME_ACC
        jen*/
        get_time_stamp(T_STAMP_FORM_1,
        (Timer_struct *)NULL)); /* TIME_ACC jen*/
        #endif
        } /* process orders deletes */
        } /* while trying to delete one chunk
        loop */
        } /* while there are more chunks */
        #ifdef UF2DEBUG
            fprintf (myostream, "after loop\n");
            fflush(myostream);
        #endif
            /* report the number of row deleted */
            fprintf(myostream, "%ld rows deleted
        from TPCD.ORDERS at %*.s\n",
        deletedOrders,T_STAMP_1LEN,T_STAMP_1LEN, /*
        TIME_ACC jen*/
        get_time_stamp(T_STAMP_FORM_1,(Timer_struct
        *)NULL)); /* TIME_ACC jen*/
            fprintf(myostream, "%ld rows deleted
        from TPCD.LINEITEM at %*.s\n",
        deletedLineitems,T_STAMP_1LEN,T_STAMP_1LEN,
        /* TIME_ACC jen*/
        get_time_stamp(T_STAMP_FORM_1,(Timer_struct
        *)NULL)); /* TIME_ACC jen*/
            if (sqlca.sqlcode < 0)
            {
                fprintf (myostream, "# of deadlocks
            %d exceeds %i\n", maxwait,MAXWAIT);
                rc=-1;
                EXEC SQL ROLLBACK WORK;
                error_check(); /*
            @d22275 tjt */
            }
        }
    }
}

```

```

/* UF2_conn_reset: */
/*971101jen*/
EXEC SQL CONNECT RESET;
error_check(); /*
@d22275 tjjg */

UF2_exit:
fclose (myostream);

/* exiting, increment the semaphore */
#ifdef SQLWINT
/* we used the tpcd.setup file to
generate the semaphore key begin SEMA
*/
if (getenv("TPCD_AUDIT_DIR") != NULL)
{
sprintf(sourcefile,
"%s%ctools%ctpcd.setup",
getenv("TPCD_AUDIT_DIR"),
PATH_DELIM, PATH_DELIM);
}
else
{
fprintf(stderr, "Can't open UF2
semaphore file TPCD_AUDIT_DIR is not
defined.\n");
exit (-1);
}

su_semkey = ftok (sourcefile, 'D'); /*
use D for deletes */
/* end SEMA */
while ((su_semid = semget (su_semkey,1,0))
< 0)
{
if (errno == ENOENT)
sleep(2);
else {
fprintf(stderr,"UF2 update stream
%d: semget failed errno = %d\n",
updatePair, errno);
exit(1);
}
}
if (sem_op (su_semid, 0, 1) != 0 )
/*jenSEM*/
{
/*jenSEM*/
fprintf(stderr,"Failure to increment
semaphone UF2 set %d\n",
thisConcurrentDelete);
exit(1);
}
/*jenSEM*/

#else
sprintf (UF2_semfile,
"%s.%s.UF2.semfile",
getenv("TPCD_DBNAME"),
getenv("USER"));
fprintf(stderr,"UF2 semfile =
%s\n",UF2_semfile);
while ((su_hSem =
OpenSemaphore (SEMAPHORE_ALL_ACCESS |
SEMAPHORE_MODIFY_STATE |
SYNCHRONIZE,
TRUE,

```

```

UF2_semfile))
== (HANDLE) (NULL)) {
/*
** if cannot open the semaphore, wait
for 0.1 second
*/
fprintf(stderr,"Retry Open semaphore
%s\n", UF2_semfile);

SleepSome(1);
}
if (! ReleaseSemaphore(su_hSem,
1,
(LPLONG) (NULL)))
{
fprintf(stderr, "ReleaseSemaphore
failed, LastError: %d, quit\n",
GetLastError());
exit(-1);
}
#endif

exit(rc); /* child
exiting after finishing up */
}

```

## Appendix E: ACID Transaction

### Source Code

#### acid.h

```

/*****
*****
File: acid.h
*/
/*****
*****
#include <stdio.h>
#include <stdlib.h>

```



```

#include <time.h>

#ifdef SQLWINT
#include <windows.h>
#include <sys\timeb.h>
#include <sys\stat.h>
#include <stdlib.h>
#include <io.h>
#else
#include <unistd.h>
#include <sys/time.h>
#include <sys/timeb.h>
#endif

#include <string.h>
#include <math.h>

#define acidtime(tvsec,tvusec)
tvsec*1000+tvusec/1000
#define TSLEN 20

#if 0 /* needed on NT, not on AIX */
typedef struct timeval {
    long    tv_sec;        /* seconds
*/
    long    tv_usec;      /* and
microseconds */
};
#endif

struct update_struct {
    int     qnum;
};

struct acidQ_struct {
    int     tag;
    long    o_key;
    double  l_extendedprice;
};

struct acidT_struct {
    int     termination;
    int     tag;
    int     logging;
    long    o_key;
    long    l_key;
    long    delta;
    long    l_partkey;
    long    l_suppkey;
    double  l_quantity;
    double  l_tax;
    double  l_discount;
    double  l_extendedprice;
    double  o_totalprice;
};

/*
** in acid.sqc
*/

int updateQ (struct update_struct *us);

char del(void);

#ifdef SQLWINT
void sleep (int sec);
#endif

```

## acid.sqc

```

/*****
*****/
/*      File: acid.sqc
*/
/*****
*****/

/*  changes:
*
*  961109  jel      add EXEC SQL CLOSE for
each cursor in acidT
*
*          to avoid bug in db2pe
v1r2
*  980225  gav      port to NT
*  981103  kal      added ast_acidQ for
isolation test 7
*  981103  kal      changed ast query to be
the same as that used in
*
*          consistency tests. Fixed
so the long lEprice is
*
*          cast to a double.
Changed so uses 3 decimal points of
*
*          precision.
*/

#include "acid.h"

#if (defined(SQLPTX) || defined(SQLWINT) ||
defined(SQLSUN) || defined(Linux))
double nearest(double);
#endif /* SQLPTX */

#define DEADLOCK -911

/*
#define TRUNC2(d) ((floor((d)*100.0))/100.0)
*/
/*
#define TRUNC2(d)
((floor(nearest((d)*100.0)))*0.01)
*/
/*
#define TRUNC2(d)
((floor(nearest((d)*1000.0)/10.0)/100.0)
*/
#define TRUNC2(d)
((floor(nearest((d)*100000.0)/1000.0)/100.0)
)

void sqlerror(char * , struct sqlca *);

EXEC SQL INCLUDE SQLCA;
EXEC SQL BEGIN DECLARE SECTION;
char dbname[8]; /* = "tpcd"; */
EXEC SQL END DECLARE SECTION;

#ifdef SQLWINT

/*
** redefine gettimeofday so I don't have to
** change too much aix-specific code
*/
/*#typedef struct timeval { unsigned tv_sec;
unsigned tv_usec; }; */
typedef struct timezone { int dummy; };

```

```

struct timeb timer;

void gettimeofday( struct timeval *tv,
struct timezone *tz)
{
    ftime(&timer);
    tv->tv_sec = timer.time;
    tv->tv_usec = timer.millitm * 1000;
    tz->dummy = 0;
}
#endif

/*-----*/
/*      acidQ
*/
/*-----*/
int acidQ (struct acidQ_struct *acid)
{
    time_t timeT;
    FILE *out;
    char out_fn[50];
    struct timeval tv;
    struct timezone tz;
    int mypid;
    int rc = 0;

    EXEC SQL BEGIN DECLARE SECTION;
    sqlint32  okey;
    sqlint32  lEprice;
    double  eprice;
    EXEC SQL END DECLARE SECTION;

    okey = acid->o_key;

    /* mypid = getpid(); */
    mypid = acid->tag;

    sprintf(out_fn,
"%s%cacidQ.out.%d",getenv("TPCD_TMP_DIR"),de
l(),mypid);
    out=fopen(out_fn,"a");
    if (out == NULL)
    {
        fprintf(stderr, "ERROR input file %s
could not be appended to!!\n",out_fn);
    }

    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "\n----- START of acidQ
tag: %d ----- \n\n",mypid);
    fprintf(out, "acidQ tag: %d, begin
transaction time: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    fprintf(out, "okey: %d\n", okey);

    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "acidQ tag: %d, before read
of LINEITEM: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));

    /*
    ** use the same sql code as used in the
    consistsql.pl to
    ** run the consistency acid queries.
    Note we assign an long int
    ** to lEprice (we make it 10s of pennies
    by * 1000). Then divide
    ** by 1000.0 and cast it to a double
    (eprice) for printing
    */
    EXEC SQL
    SELECT
    INTEGER (DECIMAL (SUM (DECIMAL (INTEGER (INTEGER (
DECIMAL
(INTEGER (100*DECIMAL (L_EXTENDEDPRICE,20,3)),
20,3) *
(1-L_DISCOUNT)) *
(1+L_TAX)),20,3)/100.0),20,3) * 1000)
into :lEprice
FROM
TPCD.LINEITEM
WHERE
L_ORDERKEY = :okey;

    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        fprintf(out, "acidQ **ERROR** sqlcode =
%d\n", sqlca.sqlcode);
        sqlerror("acidQ: select
sum(l_extendedprice)", &sqlca);
        goto Qerror;
    }
    eprice = (double)lEprice / 1000.0; /*
translate to double for printout*/

    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "ACID tag: %d, after read of
LINEITEM: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    fprintf(out, "okey: %d \t
sum(l_extendedprice): %0.3f\n",
        okey, eprice);

    EXEC SQL COMMIT;
    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        fprintf(out, "acidQ **ERROR** sqlcode =
%d\n", sqlca.sqlcode);
        sqlerror("acidQ: COMMIT", &sqlca);
        goto Qerror;
    }
    acid->l_extendedprice = eprice;

    rc = 0;
    goto Qexit;

Qerror:
    EXEC SQL rollback work;
    if (sqlca.sqlcode != 0) sqlerror("acidQ:
ROLLBACK FAILED", &sqlca);

Qexit:
    fprintf(out, "\n----- END of acidQ
tag: %d ----- \n\n",mypid);
    fflush(out); fclose(out);
    return(rc);
}

```

```

/*-----*/
/*          ast_acidQ
*/
/*-----*/
int ast_acidQ (struct acidQ_struct *acid)
{
    time_t timeT;
    FILE *out;
    char out_fn[50];
    struct timeval tv;
    struct timezone tz;
    int mypid;
    int rc = 0;

    EXEC SQL BEGIN DECLARE SECTION;
    double  ast_lEprice;
    double  ast_eprice;
    EXEC SQL END DECLARE SECTION;

    /* mypid = getpid(); */
    mypid = acid->tag;

    sprintf(out_fn,
"%s%cast_acidQ.out.%d",getenv("TPCD_TMP_DIR"
),del(),mypid);
    out=fopen(out_fn,"a");
    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "\n----- START of
ast_acidQ tag: %d ----- \n\n",mypid);
    fprintf(out, "ast_acidQ tag: %d, begin
transaction time: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));

    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "ast_acidQ tag: %d, before
read of LINEITEM: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));

    /*
    ** use the same query acidQ except don't
    select for specfic okey.
    ** this ensures that the ast will be used
    instead of the base table
    ** Have to use ast_lEprice as double
    since this sum is so big
    */
    EXEC SQL
    SELECT
        SUM ( L_EXTENDEDPRI* (1-
L_DISCOUNT)*(1 + L_TAX))
        into :ast_lEprice
    FROM
        TPCD.LINEITEM;

    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        fprintf(out, "ast_acidQ **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        sqlerror("ast_acidQ: select
sum(l_extendedprice)", &sqlca);
        goto Qerror;
    }

    ast_eprice = ast_lEprice; /* use
ast_eprice for printout to be consistent*/

    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out, "AST_ACID tag: %d, after read
of LINEITEM: (%s %06uu) %s",
        mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    fprintf(out, "sum(l_extendedprice):
%0.3f\n",
        ast_eprice);

    EXEC SQL COMMIT;
    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        fprintf(out, "ast_acidQ **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        sqlerror("ast_acidQ: COMMIT", &sqlca);
        goto Qerror;
    }
    acid->l_extendedprice = ast_eprice;

    rc = 0;
    goto Qexit;

Qerror:
    EXEC SQL rollback work;
    if (sqlca.sqlcode != 0)
        sqlerror("ast_acidQ: ROLLBACK FAILED",
&sqlca);

Qexit:
    fprintf(out, "\n----- END of
ast_acidQ tag: %d ----- \n\n",mypid);
    fflush(out); fclose(out);
    return(rc);
}
/*-----*/
/*          acidT
*/
/*-----*/
int acidT (struct acidT_struct *acid)
{
    time_t timeT;
    FILE *out;
    char out_fn[50];
    struct timeval tv;
    struct timezone tz;
    int mypid;
    int rc = 0;

    EXEC SQL BEGIN DECLARE SECTION;
    sqlint32  o_key, l_key, delta;
    sqlint32  l_partkey, l_suppkey;
    double    l_quantity, l_tax, l_discount,
l_extendedprice;
    double    o_totalprice;
    double    new_quantity, rprice, cost,
new_extprice, new_ototal, ototal;
    EXEC SQL END DECLARE SECTION;

    EXEC SQL DECLARE l_cursor CURSOR FOR
        SELECT l_partkey, l_suppkey,
l_quantity,
l_tax, l_discount,
l_extendedprice
        FROM tpcd.lineitem

```

```

        WHERE l_orderkey = :o_key
        AND l_linenumber = :l_key
        FOR UPDATE OF l_extendedprice,
l_quantity;

EXEC SQL DECLARE o_cursor CURSOR FOR
SELECT o_totalprice
FROM tpcd.orders
WHERE o_orderkey = :o_key
FOR UPDATE OF o_totalprice;

if (acid->termination < 0 || acid-
>termination > 3) acid->termination = 0;
o_key = acid->o_key;
l_key = acid->l_key;
delta = acid->delta;

if (acid->logging) {
/* mypid = getpid(); */
mypid = acid->tag;
sprintf(out_fn,
"%s%acidT.out.%d",getenv("TPCD_TMP_DIR"),de
l(),mypid);
out=fopen(out_fn,"a");
gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out, "\n----- START of
acidT tag: %d ----- \n\n",mypid);
fprintf(out, "acidT tag: %d, begin
transaction time: (%s %06uu) %s",
mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
fprintf(out, "o_key: %d\tl_key:
%d\tdelta: %d\n", o_key, l_key, delta);
}
#ifdef DEBUG
printf("o_key: %d\tl_key: %d\tdelta:
%d\n", o_key, l_key, delta);
#endif

retry_tran:

if (acid->logging) {
gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out, "acidT tag: %d, before
read of LINEITEM: (%s %06uu) %s",
mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
}

EXEC SQL OPEN l_cursor;
if (sqlca.sqlcode != 0) {
if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
rc = sqlca.sqlcode;
if (acid->logging) {
fprintf(out, "acidT **ERROR** sqlcode
= %d\n", sqlca.sqlcode);
} else {
fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
} /* endif */
sqlerror("acidT: OPEN l_cursor",
&sqlca);
goto Terror;
}

EXEC SQL FETCH l_cursor INTO
:l_partkey, :l_suppkey, :l_quantity,
:l_tax,

```

```

:l_discount, :l_extendedprice;
if (sqlca.sqlcode != 0) {
if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
rc = sqlca.sqlcode;
if (acid->logging) {
fprintf(out, "acidT **ERROR** sqlcode
= %d\n", sqlca.sqlcode);
} else {
fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
} /* endif */
sqlerror("acidT: FETCH l_cursor",
&sqlca);
goto Terror;
}
}

#ifdef DEBUG
printf("l_quantity =
%0.3f\n", l_quantity);
printf("l_tax = %0.3f \n", l_tax);
printf("l_discount = %0.3f
\n", l_discount);
printf("l_extendedprice = %0.3f \n",
l_extendedprice);
#endif

if (acid->logging) {
gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out, "acidT tag: %d, after read
of LINEITEM: (%s %06uu) %s",
mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
fprintf(out, "l_partkey: %d
l_suppkey: %d l_quantity: %0.3f\nl_tax:
%0.3f l_discount: %0.3f l_extendedprice:
%0.3f\n",
l_partkey, l_suppkey,
l_quantity, l_tax, l_discount,
l_extendedprice);
}

rprice = TRUNC2(
l_extendedprice/l_quantity );
cost = TRUNC2( rprice * delta );
new_extprice = l_extendedprice + cost;
new_quantity = l_quantity + delta;

#ifdef DEBUG
printf("rprice = %0.3f\n", rprice );
printf("cost = %0.3f\n", cost );
printf("new_extprice = %0.3f\n",
new_extprice );
printf("new_quantity = %0.3f\n",
new_quantity );
#endif

EXEC SQL UPDATE tpcd.lineitem
SET l_extendedprice = :new_extprice,
l_quantity = :new_quantity
WHERE CURRENT OF l_cursor;

if (sqlca.sqlcode != 0) {
if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
rc = sqlca.sqlcode;
if (acid->logging) {
fprintf(out, "acidT **ERROR** sqlcode
= %d\n", sqlca.sqlcode);
} else {

```

```

        fprintf(stderr,"acidT **ERROR**
sqlcode = %d\n",sqlca.sqlcode);
    } /* endif */
    sqlerror("acidT: UPDATE l_cursor",
&sqlca);
    goto Terror;
}

    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out,"acidT tag: %d, after
update of LINEITEM: (%s %06uu) %s",
            mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
        fprintf(out, "updated l_extendedprice:
%0.3f\n", new_extprice );
        fprintf(out, "updated l_quantity:
%0.3f\n", new_quantity );
    }

    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out,"acidT tag: %d, before
read of ORDER: (%s %06uu) %s",
            mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    }

    EXEC SQL OPEN o_cursor;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out,"acidT **ERROR** sqlcode
= %d\n",sqlca.sqlcode);
        } else {
            fprintf(stderr,"acidT **ERROR**
sqlcode = %d\n",sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: OPEN o_cursor",
&sqlca);
        goto Terror;
    }

    EXEC SQL FETCH o_cursor INTO
:o_totalprice;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging)
        {
            fprintf(out,"acidT **ERROR** sqlcode
= %d\n",sqlca.sqlcode);
        }
        else
        {
            fprintf(stderr,"acidT **ERROR**
sqlcode = %d\n",sqlca.sqlcode);
        }
        sqlerror("acidT: FETCH o_cursor",
&sqlca);
        goto Terror;
    }

#ifdef DEBUG
    printf("o_totalprice =
%0.3f\n",o_totalprice);
#endif
    }
#endif

    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out,"acidT tag: %d, after read
of ORDER: (%s %06uu) %s",
            mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
        fprintf(out, "o_totalprice: %0.3f\n",
o_totalprice);
    }

#ifdef DEBUG
    {
        double zeroone= l_extendedprice * (1.0-
l_discount);
        double zeroonetimes= (l_extendedprice *
(1.0- l_discount))*100.0;
        double firstone= TRUNC2(l_extendedprice
* (1.0-l_discount));
        double notone= TRUNC2 ( l_extendedprice
* (1.0-l_discount) ) * (1.0+l_tax);
        double secondone= TRUNC2( TRUNC2(
l_extendedprice * (1.0-l_discount) ) *
(1.0+l_tax) );
        printf("firstone= %f\n", firstone);
        printf("zeroone= %f\n", zeroone);
        printf("zeroonetimes= %f\n",
zeroonetimes);
        printf("notone= %f\n", notone);
        printf("secondone= %f\n", secondone);
    }
#endif
    ototal = o_totalprice -
        TRUNC2( TRUNC2(
l_extendedprice * (1-l_discount) ) *
(1+l_tax) );
    new_ototal = TRUNC2( new_extprice * (1.0-
l_discount) );
    new_ototal = TRUNC2( new_ototal *
(1.0+l_tax) );
    new_ototal = ototal + new_ototal;

#ifdef DEBUG
    printf("o_totalprince=
%f\n",o_totalprice);
    printf("ototal= %0.3f\n",ototal);
    printf("ototal= %f\n",ototal);
    printf("new_ototal= %0.3f\n",new_ototal);
#endif

    EXEC SQL UPDATE tpcd.orders
        SET o_totalprice = :new_ototal
        WHERE CURRENT OF o_cursor;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out,"acidT **ERROR** sqlcode
= %d\n",sqlca.sqlcode);
        } else {
            fprintf(stderr,"acidT **ERROR**
sqlcode = %d\n",sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: UPDATE o_cursor",
&sqlca);
        goto Terror;
    }
}

```

```

        if (acid->logging) {
            gettimeofday(&tv, &tz);
            time(&timeT);
            fprintf(out, "acidT tag: %d, after
update of ORDER: (%s %06uu) %s",
                mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
            fprintf(out, "updated o_totalprice:
%0.3f\n", new_ototal) ;
        }

/*
** why is this code in here? we don't want
to
** commit until the history table has been
updated as well
    if (acid->termination == 0) {
        EXEC SQL CLOSE L_CURSOR;
        EXEC SQL CLOSE O_CURSOR;
        EXEC SQL COMMIT;
        if (sqlca.sqlcode != 0) {
            if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
            rc = sqlca.sqlcode;
            if (acid->logging) {
                fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
            } else {
                fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
            }
            sqlerror("acidT: COMMIT", &sqlca);
            goto Terror;
        }
    }

    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d, before
insert into HISTORY: (%s %06uu) %s",
                mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    }

    EXEC SQL INSERT INTO tpcd.history values
(:l_partkey, :l_suppkey, :o_key,
:l_key, :delta, CURRENT TIMESTAMP);
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out, "acidT **ERROR** sqlcode
= %d\n", sqlca.sqlcode);
        } else {
            fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: INSERT INTO history",
&sqlca);
        goto Terror;
    }

    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d, after
insert into HISTORY: (%s %06uu) %s",
                mypid, tv.tv_sec, tv.tv_usec,
ctime(&timeT));
    }

    /* sleep for 1 second for 80% of the
transactions */
#ifdef SQLWINT
    if ( ((rand() % (100)) + 1) < 80 )
sleep(1);
#else
    if ( ((random() % (100)) + 1) < 80 )
sleep(1);
#endif

    switch (acid->termination) {
        case 1:
            {
                if (acid->logging)
                {
                    gettimeofday(&tv, &tz);
                    time(&timeT);
                    fprintf(out, "acidT tag: %d, wait
before COMMIT: (%s %06uu) %s",
                        mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
                }
                sleep(60);
            }
        case 0:
            if (acid->logging) {
                gettimeofday(&tv, &tz);
                time(&timeT);
                fprintf(out, "acidT tag: %d,
immediately before COMMIT: (%s %06uu) %s",
                    mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
            }
            EXEC SQL CLOSE L_CURSOR;
            if (sqlca.sqlcode != 0) {
                if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
                rc = sqlca.sqlcode;
                if (acid->logging) {
                    fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
                } else {
                    fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
                } /* endif */
                sqlerror("acidT: CLOSE L_CURSOR",
&sqlca);
                goto Terror;
            }
            EXEC SQL CLOSE O_CURSOR;
            if (sqlca.sqlcode != 0) {
                if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
                rc = sqlca.sqlcode;
                if (acid->logging) {
                    fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
                } else {
                    fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
                } /* endif */
                sqlerror("acidT: CLOSE O_CURSOR",
&sqlca);
                goto Terror;
            }
            EXEC SQL COMMIT;
            if (sqlca.sqlcode != 0) {

```

```

        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } else {
            fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: COMMIT", &sqlca);
        goto Terror;
    }
    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d, after
COMMIT: (%s %06uu) %s",
                mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
    }
    break;
case 3:
    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d, wait
before ROLLBACK: (%s %06uu) %s",
                mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
    }
    sleep(60);
case 2:
    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d,
immediately before ROLLBACK: (%s %06uu)
%s",
                mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
    }
    EXEC SQL CLOSE L_CURSOR;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } else {
            fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: CLOSE L_CURSOR",
&sqlca);
        goto Terror;
    }
    EXEC SQL CLOSE O_CURSOR;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } else {
            fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: CLOSE O_CURSOR",
&sqlca);
        goto Terror;
    }
    EXEC SQL rollback work;
    if (sqlca.sqlcode != 0) {
        if (sqlca.sqlcode == DEADLOCK) goto
retry_tran;
        rc = sqlca.sqlcode;
        if (acid->logging) {
            fprintf(out, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } else {
            fprintf(stderr, "acidT **ERROR**
sqlcode = %d\n", sqlca.sqlcode);
        } /* endif */
        sqlerror("acidT: ROLLBACK",
&sqlca);
        goto Terror;
    }
    if (acid->logging) {
        gettimeofday(&tv, &tz);
        time(&timeT);
        fprintf(out, "acidT tag: %d, after
ROLLBACK: (%s %06uu) %s",
                mypid, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
    }
    break;
}

acid->l_partkey = l_partkey;
acid->l_suppkey = l_suppkey;
acid->l_quantity = l_quantity;
acid->l_tax = l_tax;
acid->l_discount = l_discount;
acid->l_extendedprice = l_extendedprice;
acid->o_totalprice = o_totalprice;

rc = 0;
goto Texit;

Terror:
    EXEC SQL CLOSE L_CURSOR;
    EXEC SQL CLOSE O_CURSOR;
    EXEC SQL rollback work;
    if (sqlca.sqlcode != 0) sqlerror("acidT:
ROLLBACK FAILED", &sqlca);

Texit:
    if (acid->logging) {
        fprintf(out, "\n----- END of acidT
tag: %d ----- \n\n", mypid);
        fflush(out); fclose(out);
    }
    return(rc);
}

/*-----*/
/*          updateQ
*/
/*-----*/
int updateQ (struct update_struct *us)
{
    FILE *out;
    time_t timeT;
    struct timeval tv;
    struct timezone tz;
    int qnum;

```

```

int rc = 0;
int i;
int secs2sleep;
char buff[256];
struct acidtype {int logging;} a, *acid;

EXEC SQL BEGIN DECLARE SECTION;
double acctbal;
double discount;
double price;
sqlint32 availqty;
sqlint32 size;
EXEC SQL END DECLARE SECTION;

qnum = us->qnum;

acid = &a;
acid->logging= 1;

sprintf(buff,
"%s%cupdate.out",getenv("TPCD_TMP_DIR"),del(
));
out=fopen(buff,"a");

gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out, "\n----- START of update
-----\n\n");
fprintf(out, "update query number: %d,
begin transaction time: (%us %06uu) %s",
qnum, tv.tv_sec, tv.tv_usec,
ctime(&timeT));

sqlca.sqlcode = 0;
discount = 0.25;
price = 5000.50;
acctbal = 1000.00;
availqty = 10;
size = 5;

for (i=1; i <= 2; i++) {
gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out, "update query number: %d,
pass %d, immediately before UPDATE: (%us
%06uu) %s",
qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));

switch (qnum)
{
case 1:
{
EXEC SQL
UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
WHERE L_ORDERKEY IN
(326,512,928,995);
if (sqlca.sqlcode != 0) {
rc = sqlca.sqlcode;
if (acid->logging)
{
fprintf(out, "update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
qnum, i,
sqlca.sqlcode);
}
else
{

```

```

fprintf(stderr, "update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
qnum, i,
sqlca.sqlcode);
}
sqlerror("update query number
1", &sqlca);
goto Uerror;
}
discount = discount * (-1);
secs2sleep = 300;
break;
}
case 2:
{
EXEC SQL
UPDATE TPCD.SUPPLIER set
S_ACCTBAL = S_ACCTBAL + :acctbal
WHERE S_NAME in
('Supplier#000000647', 'Supplier#000000070',
'Supplier#000000802');
if (sqlca.sqlcode != 0) {
rc = sqlca.sqlcode;
if (acid->logging)
{
fprintf(out, "update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
qnum, i,
sqlca.sqlcode);
}
else
{
fprintf(stderr, "update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
qnum, i,
sqlca.sqlcode);
}
sqlerror("update query number
2", &sqlca);
goto Uerror;
}
acctbal = acctbal * (-1);
secs2sleep = 90;
break;
}
case 3:
{
EXEC SQL
UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
WHERE L_ORDERKEY IN (260930,
402497, 457859, 509889, 58117,
538311,
588421, 416167, 97830, 90276);
if (sqlca.sqlcode != 0) {
rc = sqlca.sqlcode;
if (acid->logging)
{
fprintf(out, "update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
qnum, i,
sqlca.sqlcode);
}
else
{

```



```

                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
            sqlerror("update query number
3", &sqlca);
            goto Uerror;
        }
        discount = discount * (-1);
        secs2sleep = 300;
        break;
    }
    case 4:
    {
        if ( i ==1 ) {
            EXEC SQL
                UPDATE TPCD.ORDERS set
O_ORDERDATE = O_ORDERDATE - 6 MONTHS
                WHERE O_ORDERKEY = 67461;
            /* WHERE O_ORDERKEY IN
(22400,28515,34338,46596,67461,92644,98307);
*/
        } else {
            EXEC SQL
                UPDATE TPCD.ORDERS set
O_ORDERDATE = O_ORDERDATE + 6 MONTHS
                WHERE O_ORDERKEY = 67461;
        }
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
            else
            {
                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
            sqlerror("update query number
4", &sqlca);
            goto Uerror;
        }
        secs2sleep = 300;
        break;
    }
    case 5:
    {
        EXEC SQL
            UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
            WHERE L_ORDERKEY IN
(70976,566279,152897,84226,232483);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }

```

```

        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
5", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 6:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
        WHERE L_ORDERKEY in
(33,131,161,195,229,230,231,323,353,356);
    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        if (acid->logging)
        {
            fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
6", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 7:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
        WHERE L_ORDERKEY IN
(562917,410659,16550,398401,157634,429920,45
411);
    if (sqlca.sqlcode != 0) {
        rc = sqlca.sqlcode;
        if (acid->logging)
        {
            fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        else
        {

```

```

                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
7", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 8:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
WHERE L_ORDERKEY IN
(129569,343591,270242,254983,98500,28963);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
8", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 9:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
WHERE L_ORDERKEY IN
(113509,232997,246691,379233,448162,32134);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }

```

```

        }
        sqlerror("update query number
9", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 10:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
WHERE L_ORDERKEY IN
(516487,245411,265799,253025,6914,562020);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
10", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 300;
    break;
}
case 11:
{
    EXEC SQL
        UPDATE TPCD.PARTSUPP set
PS_AVAILQTY = PS_AVAILQTY + :availqty
WHERE PS_PARTKEY IN
(12098,5134,13334,17052,3452,12552,1084,5797
);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
        }
        else
        {
            fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
        }
        sqlerror("update query number
11", &sqlca);
        goto Uerror;
    }

```

```

    }
    availqty = availqty * (-1);
    secs2sleep = 180;
    break;
}
case 12:
{
    if ( i ==1 ) {
        EXEC SQL
            UPDATE TPCD.LINEITEM set
L_RECEIPTDATE = L_RECEIPTDATE - 3 YEARS
            WHERE L_ORDERKEY IN
(33,70,195,355,677,837,960,962,1028);
        } else {
            EXEC SQL
                UPDATE TPCD.LINEITEM set
L_RECEIPTDATE = L_RECEIPTDATE + 3 YEARS
                WHERE L_ORDERKEY IN
(33,70,195,355,677,837,960,962,1028);
            }
            if (sqlca.sqlcode != 0) {
                rc = sqlca.sqlcode;
                if (acid->logging)
                {
                    fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
                else
                {
                    fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
                sqlerror("update query number
12", &sqlca);
                goto Uerror;
            }
            secs2sleep = 300;
            break;
        }
    case 13:
    {
        EXEC SQL
            UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
            WHERE L_ORDERKEY IN
(263,9476,32355,34854,53445,56901);
            if (sqlca.sqlcode != 0) {
                rc = sqlca.sqlcode;
                if (acid->logging)
                {
                    fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
                else
                {
                    fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
            }
        }
    }
}

```

```

        sqlerror("update query number
13", &sqlca);
        goto Uerror;
    }
    discount = discount * (-1);
    secs2sleep = 90;
    break;
}
case 14:
{
    EXEC SQL
        UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
        WHERE L_ORDERKEY IN
(32,225,326,448,449,483,512);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
            else
            {
                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                qnum, i,
sqlca.sqlcode);
            }
            sqlerror("update query number
14", &sqlca);
            goto Uerror;
        }
        discount = discount * (-1);
        secs2sleep = 180;
        break;
    }
    case 15:
    {
        EXEC SQL
            UPDATE TPCD.LINEITEM set
L_DISCOUNT = L_DISCOUNT + :discount
            WHERE L_ORDERKEY IN
(1,4,7,35,135,131300);
            if (sqlca.sqlcode != 0) {
                rc = sqlca.sqlcode;
                if (acid->logging)
                {
                    fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
                else
                {
                    fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
                }
            }
            sqlerror("update query number
15", &sqlca);
            goto Uerror;
        }
        discount = discount * (-1);
    }
}

```

```

        secs2sleep = 180;
        break;
    }
    case 16:
    {
        EXEC SQL
            UPDATE TPCD.PART set P_SIZE =
P_SIZE + :size
            WHERE P_PARTKEY IN
(4,7,15,1313);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
            }
            else
            {
                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
            }
            sqlerror("update query number
16", &sqlca);
            goto Uerror;
        }
        size = size * (-1);
        secs2sleep = 180;
        break;
    }
    case 17:
    {
        EXEC SQL
            UPDATE TPCD.LINEITEM set
L_EXTENDEDPRI = L_EXTENDEDPRI + :price
            WHERE L_ORDERKEY IN
(4065,110372,165061,265702,87138);
        if (sqlca.sqlcode != 0) {
            rc = sqlca.sqlcode;
            if (acid->logging)
            {
                fprintf(out,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
            }
            else
            {
                fprintf(stderr,"update query
number: %d, pass %d, **ERROR** sqlcode =
%d\n",
                    qnum, i,
sqlca.sqlcode);
            }
            sqlerror("update query number
17", &sqlca);
            goto Uerror;
        }
        price = price * (-1);
        secs2sleep = 90;
        break;
    }
    default:
    {

```

```

        fprintf(out,"ERROR: Invalid query
number specified %d\n", qnum);
        rc = 1;
        goto Uexit;
    }
}

gettimeofday(&tv, &tz);
time(&timeT);

if (acid->logging)
    fprintf(out,"update query number:
%d, pass %d, after UPDATE: (%s %06uu) %s",
        qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
else
    fprintf(stderr,"update query
number: %d, pass %d, after UPDATE: (%s
%06uu) %s",
        qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));

if ( i == 2 ) {
    gettimeofday(&tv, &tz);
    time(&timeT);
    fprintf(out,"update query number:
%d, pass %d, sleeping for %d seconds: (%s
%06uu) %s",
        qnum, i, secs2sleep,
tv.tv_sec, tv.tv_usec, ctime(&timeT));
    fflush(out);
    system("touch
/tmp/tpcd/update.sync.sleep");
    sleep(secs2sleep);
}

gettimeofday(&tv, &tz);
time(&timeT);
fprintf(out,"update query number: %d,
pass %d, immediately before COMMIT: (%s
%06uu) %s",
    qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));

EXEC SQL COMMIT;
if (sqlca.sqlcode != 0) {
    rc = sqlca.sqlcode;
    fprintf(out,"update pass %d,
**ERROR** sqlcode = %d\n", i,
sqlca.sqlcode);
    sqlerror("update: COMMIT", &sqlca);
    goto Uerror;
}
gettimeofday(&tv, &tz);
time(&timeT);
if (acid->logging)
    fprintf(out,"update query number:
%d, pass %d, after COMMIT: (%s %06uu) %s",
        qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
else
    fprintf(stderr,"update query
number: %d, pass %d, after COMMIT: (%s
%06uu) %s",
        qnum, i, tv.tv_sec,
tv.tv_usec, ctime(&timeT));
}

rc = 0;
goto Uexit;

```

```

Uerror:
    EXEC SQL rollback work;
    if (sqlca.sqlcode != 0) sqlerror("update:
ROLLBACK FAILED", &sqlca);
    system("touch
/tmp/tpcd/update.sync.sleep");

Uexit:
    fprintf(out, "\n----- END of update -
-----\n\n");
    fflush(out); fclose(out);
    return(rc);
}

/*-----*/
/*          connect_to_TM
*/
/*-----*/
void connect_to_TM( void )
{
    char *dbname_ptr;
    if ((dbname_ptr =
getenv("TPCD_QUAL_DBNAME")) != NULL) {
        fprintf(stderr, "***** %s
*****\n", dbname_ptr);
        strcpy (dbname, dbname_ptr);
    }

    EXEC SQL CONNECT TO :dbname IN SHARE
MODE;
    if (sqlca.sqlcode < 0) {
        fprintf(stderr, "CONNECT TO %s failed
SQLCODE = %d\n", dbname, sqlca.sqlcode);
        exit(-1);
    }
    return;
}

/*-----*/
/*          disconnect_from_TM
*/
/*-----*/
void disconnect_from_TM ( void )
{
    EXEC SQL CONNECT RESET;
    if (sqlca.sqlcode < 0) {
        fprintf(stderr, "DISCONNECT failed
SQLCODE = %d\n", sqlca.sqlcode);
        exit(-1);
    }
    return;
}

/*-----*/
/*          sqlerror
*/
/*-----*/
void sqlerror(char *msg, struct sqlca
*psqlca)
{
    FILE *err_fp;

    char err_fn[256];

    int j,k;

    sprintf(err_fn,
"%s%cacid.sqlerrors", getenv("TPCD_TMP_DIR"),
del());
    err_fp=fopen(err_fn,"a");
    fprintf(err_fp,"acid: sqlcode: %4d %s\n",
psqlca->sqlcode, msg);
    fprintf(stderr,"acid: sqlcode: %4d %s\n",
psqlca->sqlcode, msg);
    fflush(stderr);
    if (psqlca->sqlerrmc[0] != ' ' || psqlca-
>sqlerrmc[1] != ' ') {
        fprintf(err_fp,"acid: slerrmc: ");
        for(j = 0; j < 5; j++)
        {
            for(k = 0; k < 14; k++)
                fprintf(err_fp,"%x ", psqlca-
>sqlerrmc[j*10+k]);
            fprintf(err_fp," ");
            for(k = 0; k < 14; k++)
                fprintf(err_fp,"%c", psqlca-
>sqlerrmc[j*10+k]);
            fprintf(err_fp, "\n");
            if (j < 4) fprintf(err_fp, "
");
        }
        fprintf(err_fp,"acid: sqlerrp: ");
        for(j = 0; j < 8; j++)
            fprintf(err_fp,"%c", psqlca->sqlerrp[j]);
        fprintf(err_fp, "\n");

        fprintf(err_fp,"acid: sqlerrd: ");
        for(j = 0; j < 6; j++)
            fprintf(err_fp," %d", psqlca->sqlerrd[j]);
        fprintf(err_fp, "\n");

        if (psqlca->sqlwarn[0] != ' ') {
            fprintf(err_fp,"acid: sqlwarn: ");
            for(j = 0; j < 8; j++)
                fprintf(err_fp,"%c ", psqlca->sqlwarn[j]);
            fprintf(err_fp, "\n");
        }

        fprintf(err_fp, "\n");
        fflush(err_fp); fclose(err_fp);
    }

#ifdef SQLWINT
void sleep(int sec)
{
    Sleep(sec * 1000);
}
#endif

char del(void)
{
#ifdef SQLWINT
    return '\\';
#else
    return '/';
#endif
}

#ifdef defined(SQLPTX) || defined(SQLWINT) ||
defined(SQLSUN) || defined(Linux)

```

```

/* added fot PTX as this one is not there in
libm */
double nearest(double x)
{
    double y, z;

    y = x;
    if (x < 0)
        y = -x;
    z = y - (int)y;
    if (z == 0.5) {
        if ((int)floor(y) % 2) {
            return((x < 0) ? -
ceil(y) : ceil(y));
        } else {
            return((x < 0) ? -
floor(y) : floor(y));
        }
    } else if (z < 0.5)
        return((x < 0) ? -
floor(y) : floor(y));
    else
        return((x < 0) ? -
ceil(y) : ceil(y));
}
#endif /* SQLPTX */
□

```

## makefile

```

DBNAME = $(TPCD_QUAL_DBNAME)

INCLUDE = $(HOME)/sqllib/include

#CFLAGS = -I$(INCLUDE) -g -Dpascal= -
DLINT_ARGS \
# -Dfar= -D_loadadds= -
DSQLA_NOLINES -qflag=i:i -qlanglvl=ansi

#LFLAGS = -lm -lcurses -ls -ll -ly -
liconv -lbsd
CFLAGS = -I$(INCLUDE) -Dpascal= -
DLINT_ARGS \
-DSQLA_NOLINES -DLinux
# .. sun -DSQLA_NOLINES

LFLAGS = -lm
# sun .... LFLAGS = -lm

LIB = -L$(HOME)/sqllib/lib -ldb2

CC = g++

HDR = acid.h
C = mainacid.c
SQC = acid.sqc
SRC = $(HDR) $(C)
$(SQC)
OBJ = acid.o
EXEC = mainacid

TARGET = $(EXEC) tsec

.SUFFIXES: .o .c .sqc .bnd

.c.o:
$(CC) -c $(C) $(CFLAGS)

```

```

all: $(TARGET)

mainacid: $(SRC) $(OBJ) mainacid.o
$(CC) -o $@ $(CFLAGS) $(OBJ)
mainacid.o $(LIB) $(LFLAGS)

acid.c: acid.sqc $(HDR)
db2 connect to $(DBNAME); \
db2 prep acid.sqc BINDFILE ISOLATION
RR NOLINEMACRO PACKAGE; \
db2 bind acid.bnd GRANT PUBLIC; \
db2 connect reset; \
db2 terminate

acid.o: acid.c
$(CC) $(CFLAGS) -c acid.c -o acid.o

tsec: tsec.c
$(CC) $(CFLAGS) $(LFLAGS) -o tsec
tsec.c

clean:
rm -f *.o *.bnd $(EXEC) tsec
rm -f acid.c

```


## **Appendix F: Price Quotations**

SUSE LINUX AG | Maxfeldstr. 5 | D-90409 Nuernberg

Chris King  
IBM eServer xSeries Performance

Fax: 919-486-2327

Approved by:

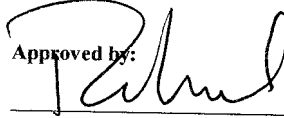 2-8-05

Peter Woodward  
Novell Global Alliances

Your sign

Our Sign

Customer No

Offer No

Date

02/01/05

**SUSE LINUX Enterprise Server 9 for x86\_64**

Per your request for pricing information for SUSE Linux Enterprise Server 9 for AMD64 and Intel EM64T to be used in your TPC-H benchmark testing, Novell is pleased to provide the following quote. All prices are shown in USD excl. VAT.

Partnumber	Description	Units	Unit Price	Extended Price
00662644456164	SUSE Linux Enterprise Server 9 for X86 and for AMD64 & Intel EM64T 1Server up to 2-CPU 3-Year Upgrade Protection	1	\$870.00	\$870.00
			Total	\$870.00

This offering is based for a machine type x86, AMD 64 or Intel EM64T equipped with up to 2 CPUs, i.e. the standard price for SUSE LINUX Enterprise Server 9 for x86 .


Maintenance Program / Upgrade Protection includes Installation Support.

Prices are valid for 30 days.

The quote is based on Novells NSPP program.

Qualifying customers may take advantage of price savings through the Novell Volume Licensing Programs. For more information, see <http://www.novell.com/licensing/price.html>.

Novell, Inc., SUSE Linux

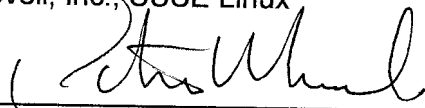

Peter Woodward, Director, Global Alliances

Date

2-8-05