



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant DL580-G2/2GHz
using
Microsoft SQL Server 2000 Enterprise Edition SP3
and
Windows .NET Enterprise Server 2003

First Edition
November 2002

First Edition –November 2002

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2002 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2002

HP, NonStop, ProLiant DL580-G2, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2000, Windows .NET and SQL Server 2000 are registered trademarks of Microsoft Corporation.

Pentium III is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS.....	III
PREFACE.....	V
TPC BENCHMARK C OVERVIEW	V
ABSTRACT	VI
OVERVIEW	VI
TPC BENCHMARK C METRICS.....	VI
STANDARD AND EXECUTIVE SUMMARY STATEMENTS.....	VI
AUDITOR.....	VI
GENERAL ITEMS	10
TEST SPONSOR	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS.....	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS.....	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	13
INSERT AND DELETE OPERATIONS	13
PARTITIONING.....	13
REPLICATION, DUPLICATION OR ADDITIONS	13
CLAUSE 2 RELATED ITEMS	14
RANDOM NUMBER GENERATION	14
INPUT/OUTPUT SCREEN LAYOUT	14
PRICED TERMINAL FEATURE VERIFICATION	14
PRESENTATION MANAGER OR INTELLIGENT TERMINAL	14
TRANSACTION STATISTICS	14
QUEUING MECHANISM.....	15
CLAUSE 3 RELATED ITEMS	16
TRANSACTION SYSTEM PROPERTIES (ACID).....	16
ATOMICITY	16
<i>Completed Transactions</i>	16
<i>Aborted Transactions</i>	16
CONSISTENCY	16
ISOLATION	16
DURABILITY.....	17
<i>Durable Media Failure</i>	17
<i>Instantaneous Interruption and Loss of Memory</i>	17
CLAUSE 4 RELATED ITEMS	19
INITIAL CARDINALITY OF TABLES	19
DATABASE LAYOUT.....	19
TYPE OF DATABASE.....	20
DATABASE MAPPING	20
60 DAY SPACE	20

CLAUSE 5 RELATED ITEMS	21
THROUGHPUT.....	21
KEYING AND THINK TIMES	21
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	22
STEADY STATE DETERMINATION.....	25
WORK PERFORMED DURING STEADY STATE	26
MEASUREMENT PERIOD DURATION	26
REGULATION OF TRANSACTION MIX	27
TRANSACTION STATISTICS.....	27
CHECKPOINT COUNT AND LOCATION	28
CHECKPOINT DURATION	28
CLAUSE 6 RELATED ITEMS	29
RTE DESCRIPTIONS	29
EMULATED COMPONENTS.....	29
FUNCTIONAL DIAGRAMS	29
NETWORKS	29
OPERATOR INTERVENTION.....	29
CLAUSE 7 RELATED ITEMS	30
SYSTEM PRICING.....	30
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	30
COUNTRY SPECIFIC PRICING.....	30
USAGE PRICING	30
CLAUSE 9 RELATED ITEMS	31
AUDITOR'S REPORT	31
AVAILABILITY OF THE FULL DISCLOSURE REPORT	31

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.0, released March 7, 2001.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant DL580-G2. The operating system used for the benchmark was Windows .NET Enterprise Server 2003. The DBMS used was Microsoft SQL Server 2000 Enterprise Edition SP3.

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

77,905.18 tpmC
\$5.32 per tpmC

The availability date is December 31, 2002.


Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company		ProLiant DL580 G2/2GHz 4P C/S with 5 ProLiant DL360R		TPC-C Rev. 5.0
				Report Date: Nov 19, 2002
Total System Cost		TPC-C Throughput	Price/Performance	Availability Date
\$413,764		77,905.18	\$5.32	Dec 31, 2002
Processors	Database Manager	Operating System	Other Software	Number of Users
4 Intel Xeon 2.0 GHz – Server 10 Pentium III 1.4 GHz – Clients	Microsoft SQL Server 2000 Enterprise Edition SP3	Windows .NET Enterprise Server 2003	Microsoft Visual C++ Microsoft COM+	62000

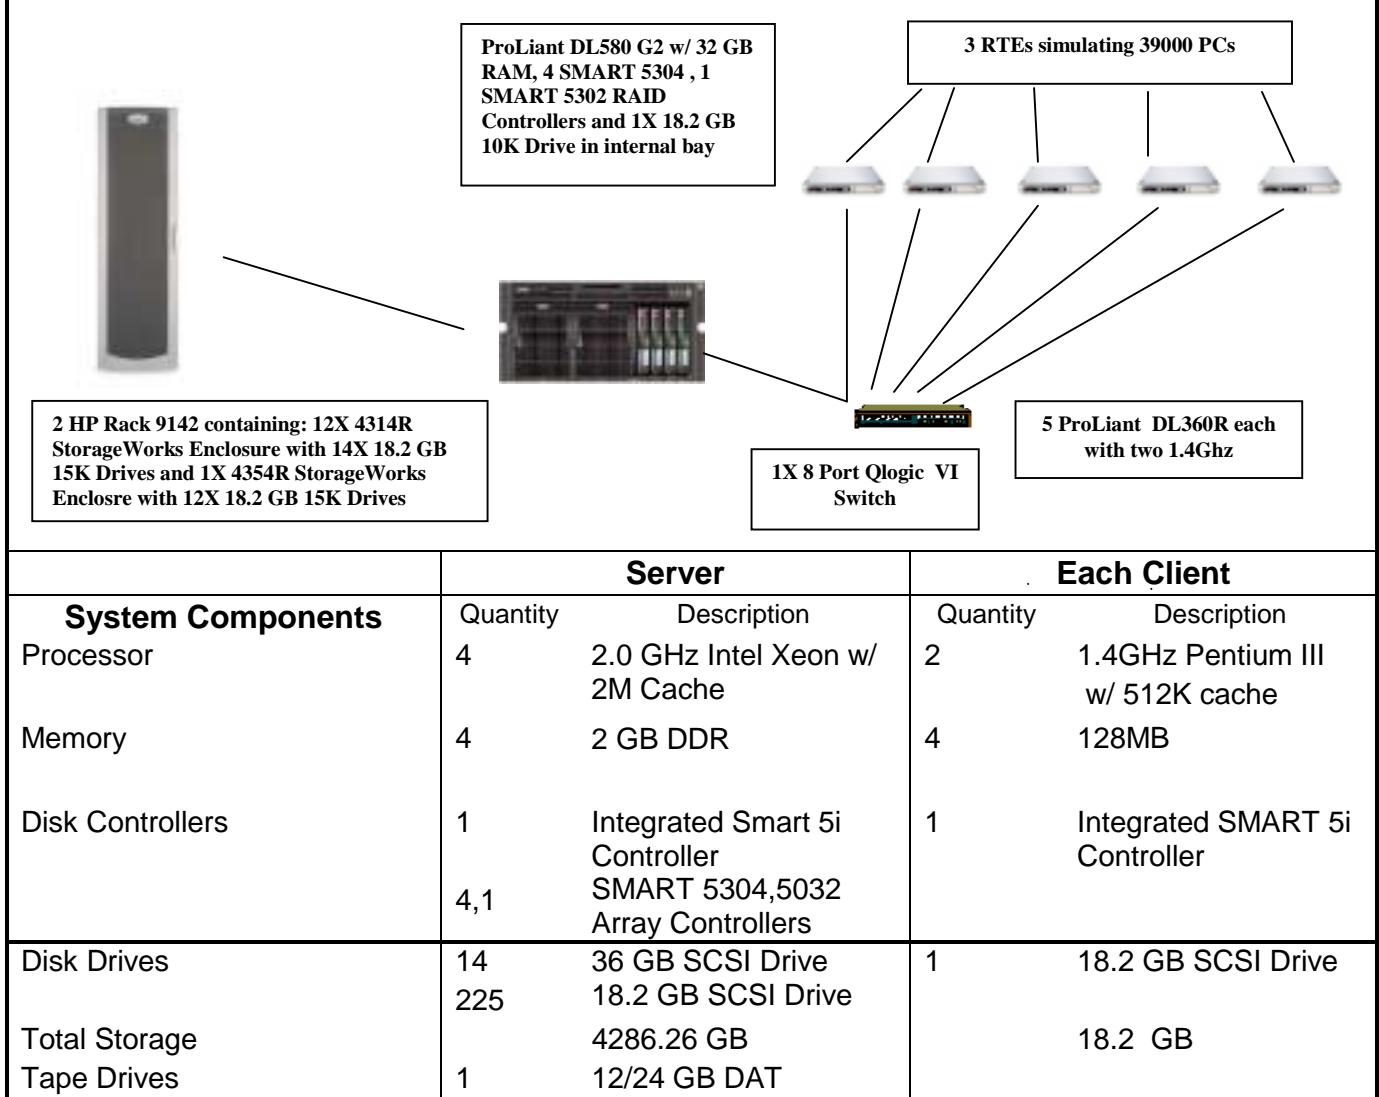

Hewlett-Packard Company	HP ProLiant DL580 G2/2GHz-4P			TPC-C Rev. 5.0		
	Client/Server			Report Date: 19-Nov-02		
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price
Server Hardware						
ProLiant DL580 X1600 2P X2GB, Integrated Smart Array Controller 5.0 GHz 1M processor	202176-001		19,499	1	19,499	
8GB (4x2GB) DDR ECC 200MHz Memory	226776-B21		6,199	2	12,398	
StorageWorks Enclosure Model 4314R	202173-B21		25,909	4	103,636	
StorageWorks Enclosure Model 4354	190209-001		2,955	16	47,280	
Smart Array 5304/128 Controller	190211-001		3,523	1	3,523	
Smart Array 5302/64 Controller	158939-B21		2,099	4	8,396	
V570 Color Monitor - 15 inch CRT - Opal	124992-B21		1,399	1	1,399	
HP Mouse	228113-001		169	1	169	
HP Enhanced Keyboard	170299-B21		23	1	23	
12/24-Gigabyte DAT Drive (Internal)	122660-006		44	1	44	
HP Rack Model 9142 (42U - Opal) - Flat Pallet	295513-B22		682	1	682	
HP Rack Sidewall Kit	120663-B21		1,352	2	2,704	
UPS R3000 XR	120670-B21		212	1	212	
18.2-GB Pluggable 1" Universal WideUltra3 10K HDD	192186-001		1,703	1	1,703	
18.2-GB Pluggable 1" Universal WideUltra3 15K HDD	142673-B22		319	1	319	
18.2-GB Pluggable 1" Universal WideUltra3 15K HDD (10% spares)	188122-B22		399	224	89,376	
36.4-GB Pluggable 1" Universal WideUltra3 15K HDD	188122-B22		399	23		9,177
36.4-GB Pluggable 1" Universal WideUltra3 15K HDD (2 spares)	232916-B22		619	14	8,666	
FM-MI724-36 3YR 24X7 4HR 500 SERIES SVR	401782-002		619	2		1,238
FM-4E724-36 3YR 24X7/4HR EMPTY DISK ENCL	171242-002		1,795	1		1,795
Qlogic QLA-2350 Fibre-Channel VI Adapter	QLA2350-BK		1,57	17		2,669
			2,095	1	2,095	
				Subtotal	302,124	14,879
Server Software						
Microsoft SQL Server 2000 Enterprise Edition(per processor)	810-00845	Microsoft	16,541	4	66,164	5,850
Microsoft Visual C++ 6.0	048-00317	Microsoft	549	1	549	Incl Above
Microsoft Windows .NET Enterprise Server 2003	NA	Microsoft	2,699	1	2,699	Incl Above
				Subtotal	69,412	5,850
Client Hardware						
ProLiant DL360R01 P1.4GHz 512KB 128MB	233271-001		2,679	5	13,395	
Dual Integrated Gigabit NIC, Integrated Smart Array Controller 5i 1.40GHz PIII Processor Option Kit (DL360 G2)	128277-B21		1,099	5	5,495	
128 MB 133 DIMM	201099-B21		149	15	2,235	
V570 Color Monitor - 15 inch CRT - Opal	228113-001		169	5	845	
HP Mouse	170299-B21		23	5	115	
HP Enhanced Keyboard	122660-006		44	5	220	
18.2-GB Pluggable 1" Universal WideUltra3 10K HDD	142673-B22		319	5	1,595	
FM-EL724-36 3YR 24X7 4HR ENTRY 300 SVR	162675-002		750	5		3,750
Qlogic QLA-2350 Fibre-Channel VI Adapter	QLA2350-BK		2,095	7	14,665	
				Subtotal	38,565	3,750
Client Software						
Microsoft Windows 2000 Server	C11-00821	Microsoft	738	5	3,690	Incl. Above
				Subtotal	3,690	0
User Connectivity						
Qlogic SANBox-1 8-Port Switch	SANBOX2-8P		8,750	3	26,250	
				Subtotal	26,250	0
Large Purchase and Cash discount (See Note 1)	16.0%		1		(\$48,375)	(\$2,381)
				Total	\$391,666	\$22,098
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				Three-Year Cost of Ownership: \$413,764		
Pricing: 1=HP Direct 2= Microsoft 3=Qlogic				tpmC Rating: 77905.18		
Note 1 = Discount based on HP Direct guidance and large cash purchase level.				\$ / tpmC: \$5.32		
Note: The benchmark results and test methodology were audited by Lorna Livingtree of Performance Metrics, Inc.						

Numerical Quantities Summary			
MQTH, Computed Maximum Qualified Throughput	77905.18 tpmC		
Response Times (in seconds)	Average	90%	Maximum
New-Order	0.38	0.63	7.60
Payment	0.30	0.54	8.08
Order-Status	0.32	0.56	5.87
Delivery (interactive portion)	0.10	0.11	0.43
Delivery (deferred portion)	0.16	0.22	0.63
Stock-Level	0.86	1.23	9.25
Menu	0.10	0.11	1.09
Transaction Mix, in percent of total transaction			
New-Order			44.96%
Payment			43.01%
Order-Status			4.01%
Delivery			4.02%
Stock-Level			4.01%
Emulation Delay (in seconds)	Resp.Time	Menu	
New-Order	0.10	0.10	
Payment	0.10	0.10	
Order-Status	0.10	0.10	
Delivery (interactive)	0.10	0.10	
Stock-Level	0.10	0.10	
Keying/Think Times (in seconds)	Min.	Average	Max.
New-Order	18.00/0.00	18.02/12.02	18.05/120.21
Payment	3.00/0.00	3.02/12.01	3.05/120.21
Order-Status	2.00/0.00	2.01/10.00	2.04/100.21
Delivery (interactive)	2.00/0.00	2.01/5.02	2.05/50.21
Stock-Level	2.00/0.00	2.01/5.02	2.04/50.21
Test Duration			
Ramp-up time			30 minutes
Measurement interval			120 minutes
Transactions (all types) completed during measurement interval			20,792,598
Ramp down time			5 minutes
Checkpointing			
Number of checkpoints			4
Checkpoint interval			30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.


Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are the same and included on the following page.

Figure 1. Benchmarked and Priced Configuration

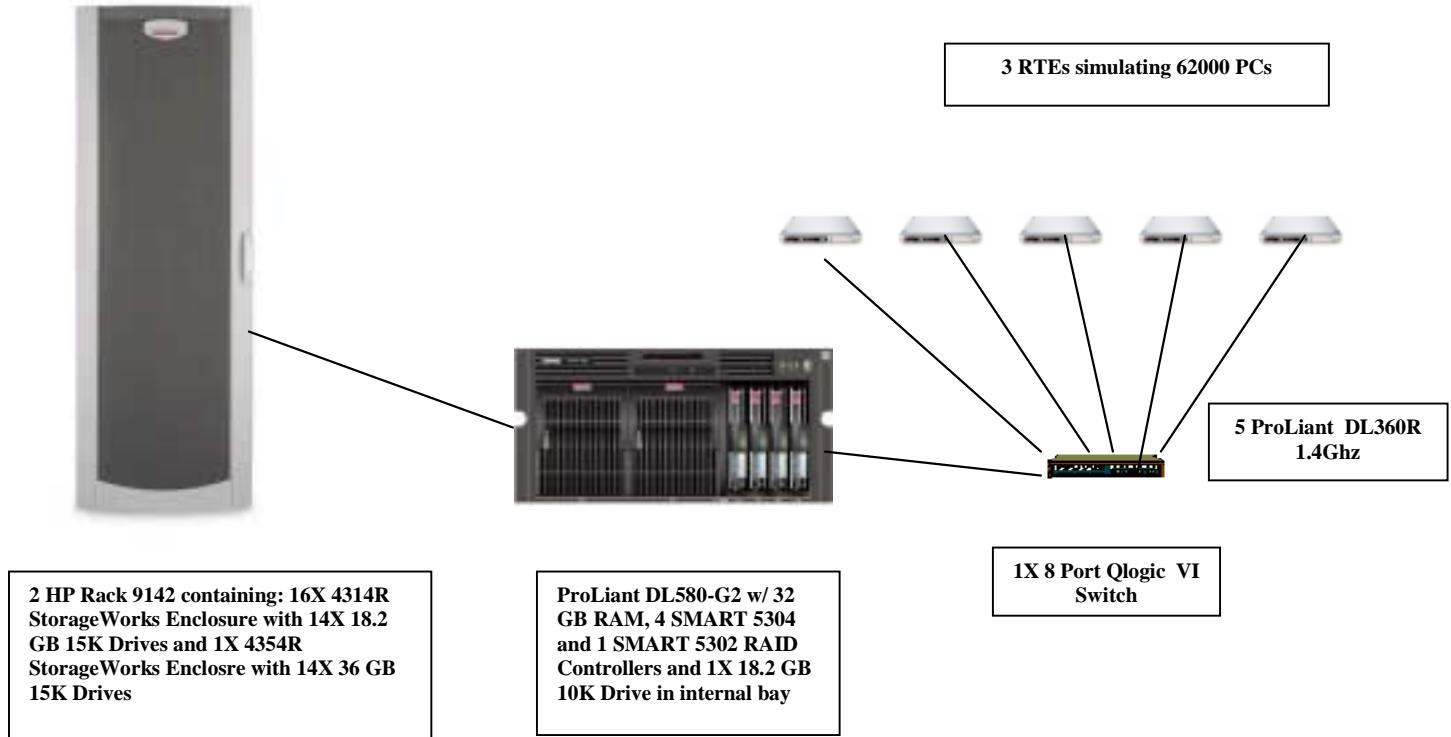

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of: 238 drives at 18.2GB, one 18.2 GB drive for the operating system. Fifty-six drives for four controllers, fourteen drives for the fifth controller, and one drive for the integrated Smart 5i controller.

Benchmarked Configuration:

U3 SCSI Integrated Controller, Array A

EISA UTILITIES PARTITION Total Capacity = 36 MB

 HP System Configuration Utilities

LOGICAL DRIVE C: Total Capacity = 18.2 GB

 Microsoft Windows .NET Enterprise Server 2003

SMART-5302 Controller, Slot 6, Array A

LOGICAL DRIVE E: Total Capacity = 230 GB RAID 0+1

 MSSQL70_tpcc_log

SMART-5302 Controller, Slot 2, Array A

LOGICAL DRIVE F: Total Capacity = 96.7 GB RAID 0

 MSSQL70_cs1

SMART-5302 Controller, Slot 2, Array B

LOGICAL DRIVE L: Total Capacity = 57.6 GB RAID 0

 MSSQL70_misc1

SMART-5302 Controller, Slot 2, Array C

LOGICAL DRIVE W: Total Capacity = 396 GB RAID 0+1

 Tpccback1

SMART-5302 Controller, Slot 3, Array A

LOGICAL DRIVE G: Total Capacity = 96.7 GB RAID 0

 MSSQL70_cs2

SMART-5302 Controller, Slot 3, Array B

LOGICAL DRIVE M: Total Capacity = 57.6 GB RAID 0

 MSSQL70_misc2

SMART-5302 Controller, Slot 3, Array C

LOGICAL DRIVE X: Total Capacity = 396 GB RAID 0+1

 Tpccback2

SMART-5302 Controller, Slot 4, Array A
LOGICAL DRIVE H: Total Capacity =96.7 GB RAID 0
MSSQL70_cs3

SMART-5302 Controller, Slot 4, Array B
LOGICAL DRIVE N: Total Capacity =57.6 GB RAID 0
MSSQL70_misc3

SMART-5302 Controller, Slot 4, Array C
LOGICAL DRIVE Y: Total Capacity = 396 GB RAID 0+1
Tpccback3

SMART-5302 Controller, Slot 5, Array A
LOGICAL DRIVE I: Total Capacity =96.7 GB RAID 0
MSSQL70_cs4

SMART-5302 Controller, Slot 5, Array B
LOGICAL DRIVE O: Total Capacity =57.6 GB RAID 0
MSSQL70_misc4

Priced Configuration vs. Measured Configuration:

The measured and priced configuration differ in that the measured configuration used disk drives for database backup and the priced configuration used a DAT drive for backup.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none were found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%

Statistic		Value
	Accessed by last name	60.01%
Order Status	Accessed by last name	60.04%
Transaction Mix	New Order	44.96%
	Payment	43.01%
	Order status	4.01%
	Delivery	4.02%
	Stock level	4.01%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed:

- A new database containing more than 10% of the warehouses of the full database was created and was backed up to extra disks.
- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 10000 users.
- The test was allowed to run for a minimum of 10 minutes.
- One log disk was removed from the drive cabinet.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the users status on the RTE.
- One of the data disks was removed from the drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down.
- A dump of the transaction log was taken and the Microsoft SQL Server was shutdown.
- A new log disk was inserted into the log drive cabinet. A new data disk was inserted into the data drive cabinet. After the RAID recovery process finished, the system was rebooted and Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 13 and 14 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 6200 warehouses under a full load of 62000 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 62000 users.
- The test was allowed to run for a minimum of 10 minutes.
- A checkpoint was performed.
- System crash and loss of memory were induced by switching the power off. The power cords were then physically removed from the SUT. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was shutdown.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.

- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 10 and 11 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	6,500
District	65,000
Customer	195,000,000
History	195,000,000
Orders	195,000,000
New Order	58,500,000
Order Line	1,949,993,927
Stock	650,000,000
Item	100,000
Deleted Warehouses	300

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 4 SMART-5304 and 1 SMART-5302 Array controllers with 4 SCSI channels. Each controller is capable of accessing up to 14 disk drives per channel, and supports RAID 0, RAID 0+1, and RAID 5 per each logical volume configured. The data tables were stored on 4 RAID arrays of (56) 18.2GB 15K drives each. Each array was configured as RAID 0 and housed a logical drives for database data. Some of these controllers also housed a RAID 0+1 volume used for backup of the database. The other SMART-5304 Array controller had one array consisting of (14) 36 GB 15K drives, and housed a RAID 0+1 logical volume for the database log .The operating system was housed internally on the integrated Smart 5i controller as one 18.2 GB 10K drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives of cs file groups on those controllers. The controller for the transaction log had the cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the filegroups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2000 Enterprise Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using `dbcc sqlperf(logspace)`.
- Transactions were run against the database with a full load of users.
- The free space was again queried using `dbcc sqlperf(logspace)`.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

The details of both the 8-hour transaction log space requirement and the 60-day space requirement is shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC	77,905.18 tpmC
Price per tpmC	\$5.32 per tpmC

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.38	0.63	7.60
Payment	0.30	0.54	8.08
Order-Status	0.32	0.56	5.87
Interactive Delivery	0.10	0.11	0.43
Deferred Delivery	0.16	0.22	0.63
Stock-Level	0.86	1.23	9.25
Menu	0.10	0.11	1.09

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.00	18.02	18.05
Payment	3.00	3.02	3.04
Order-Status	2.00	2.01	2.04
Interactive Delivery	2.00	2.01	2.05
Stock-Level	2.00	2.01	2.04

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.02	120.21
Payment	0.00	12.01	120.21
Order-Status	0.00	10.00	100.21
Interactive Delivery	0.00	5.02	50.21
Stock-Level	0.00	5.02	50.21

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 2. New Order Response Time Distribution

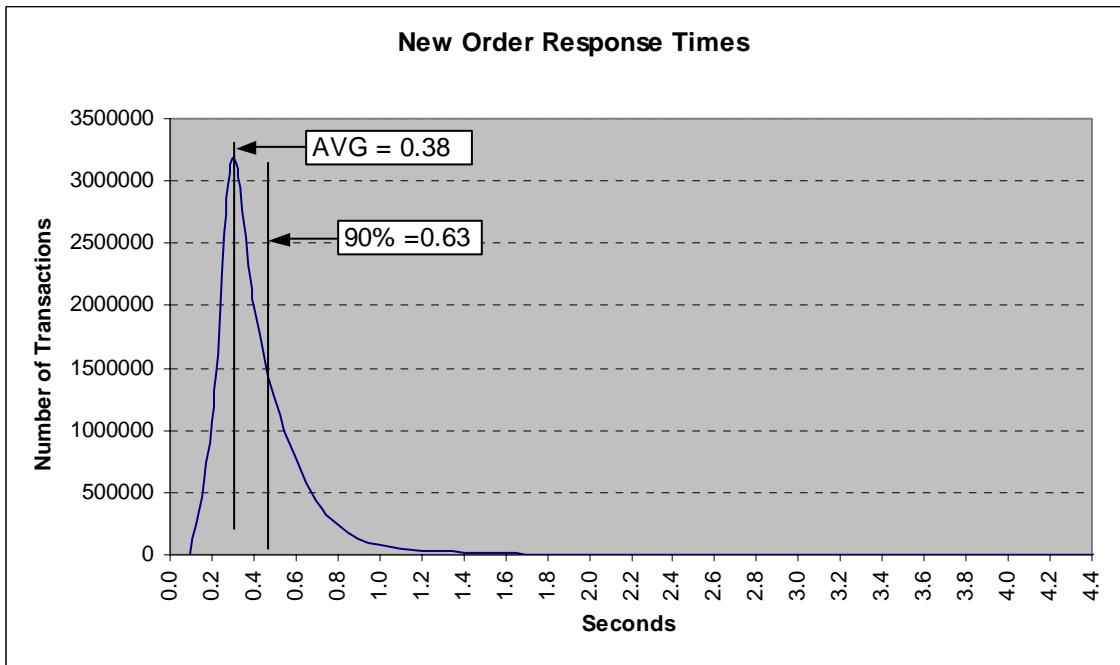


Figure 3. Payment Response Time Distribution

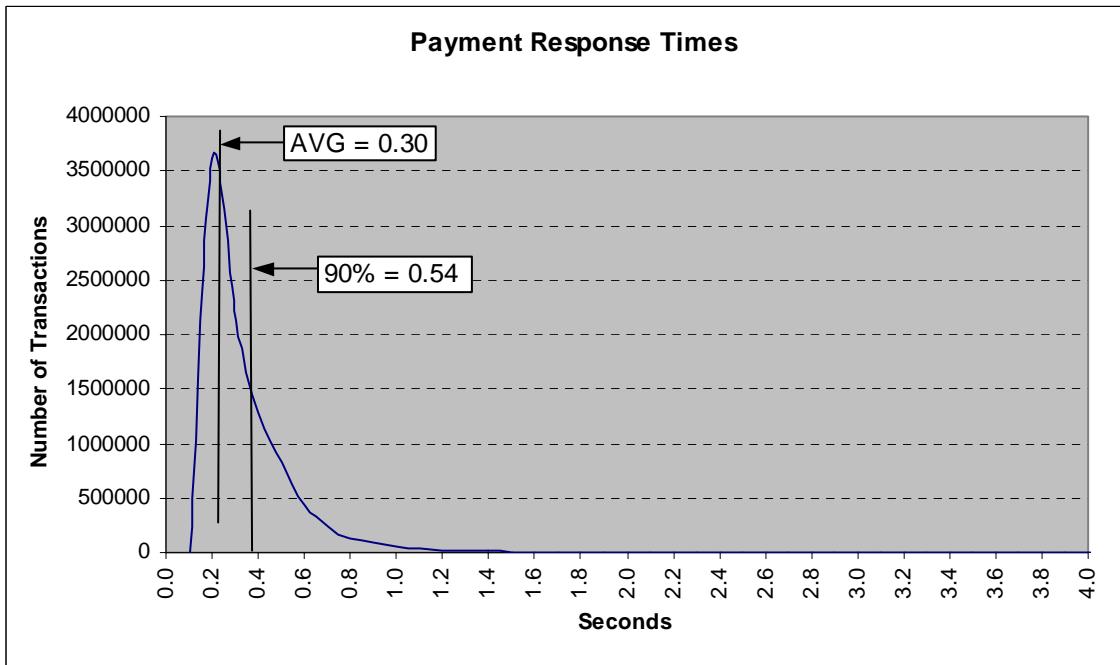


Figure 4. Order Status Response Time Distribution

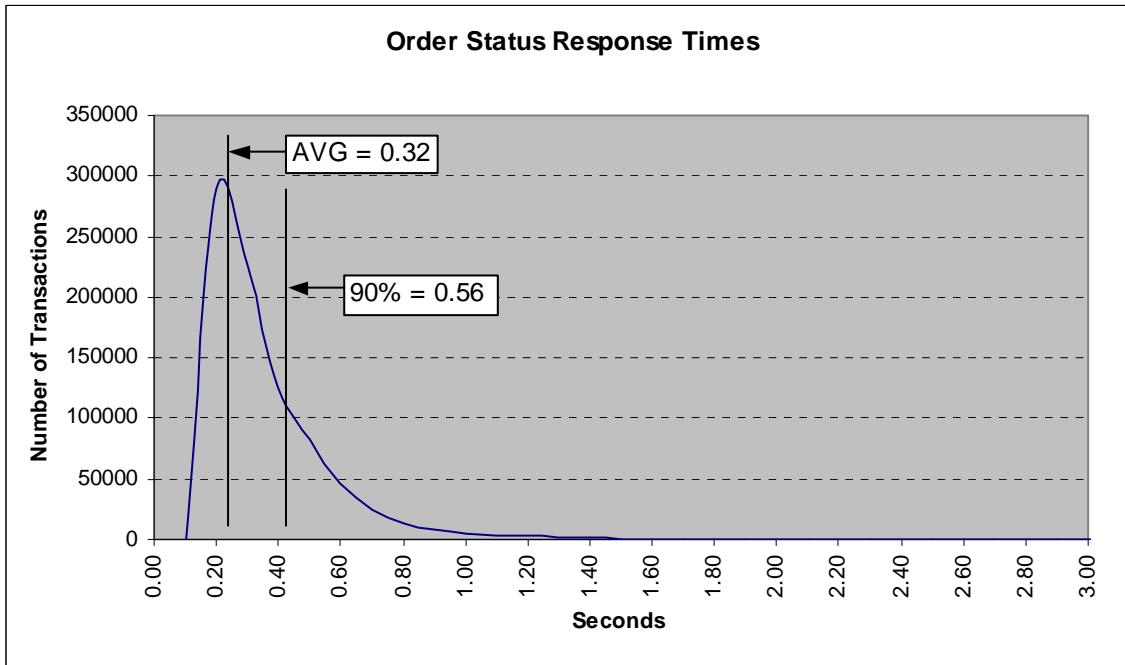


Figure 5. Delivery Response Time Distribution

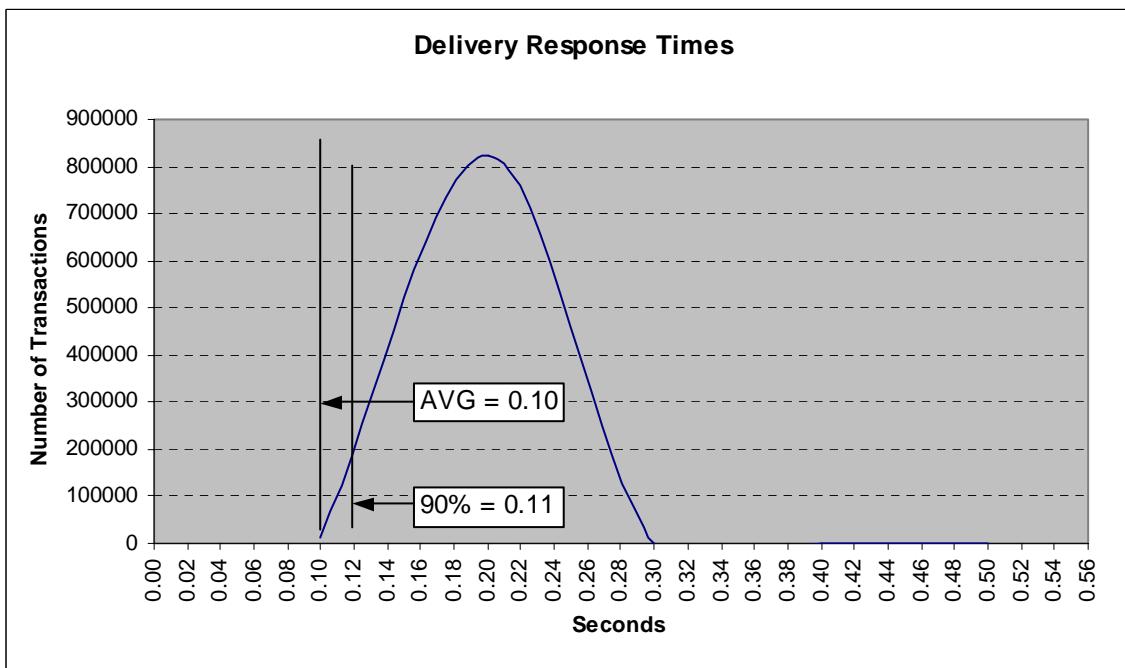


Figure 6. Stock Level Response Time Distribution

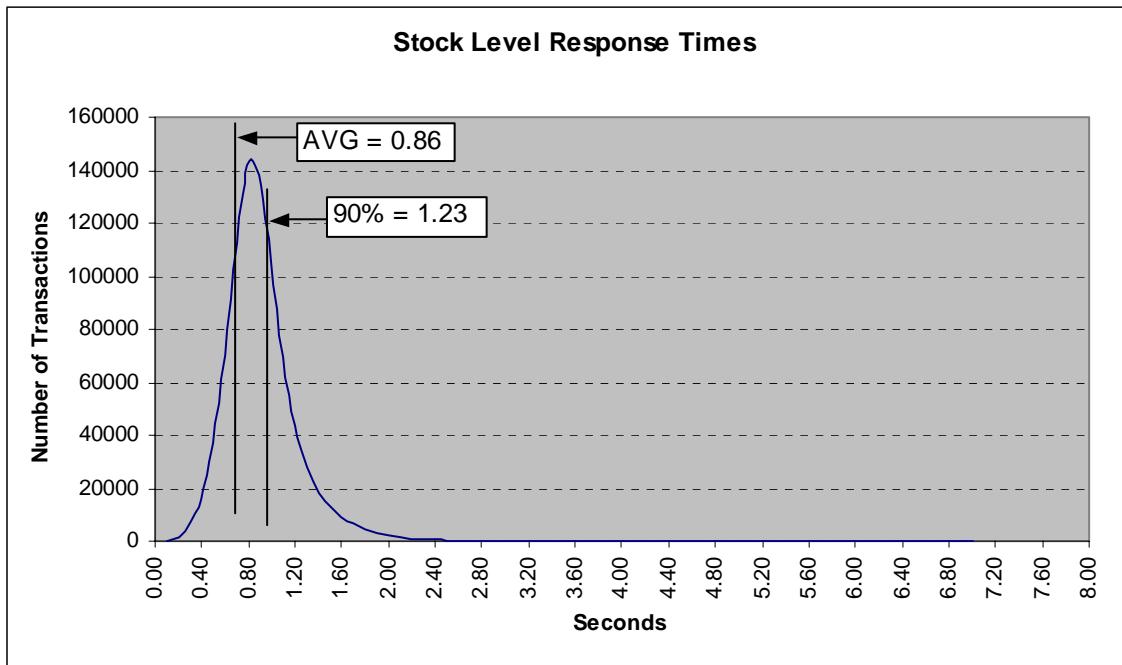


Figure 7. Response Time vs. Throughput

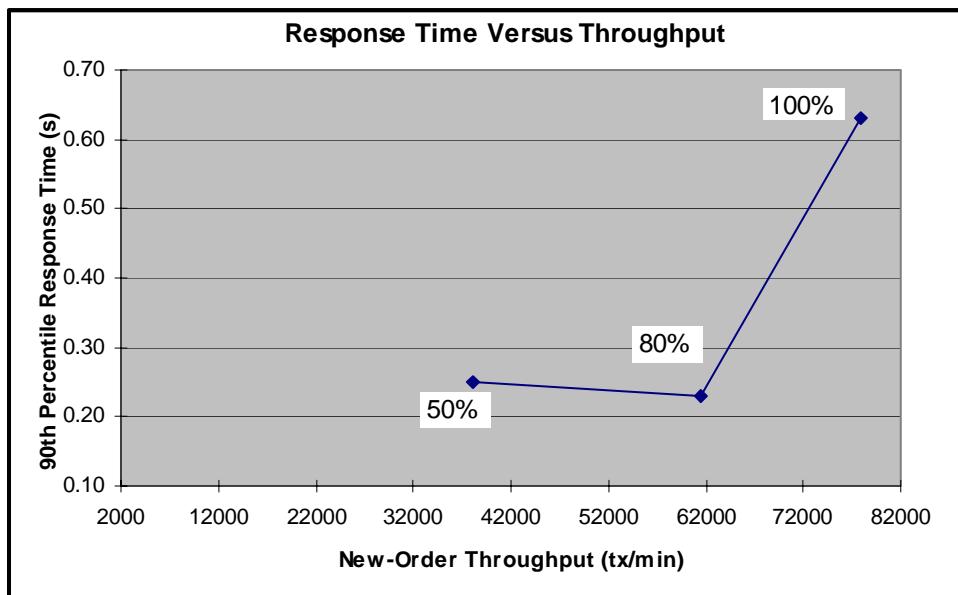


Figure 8. New Order Think Time Distribution


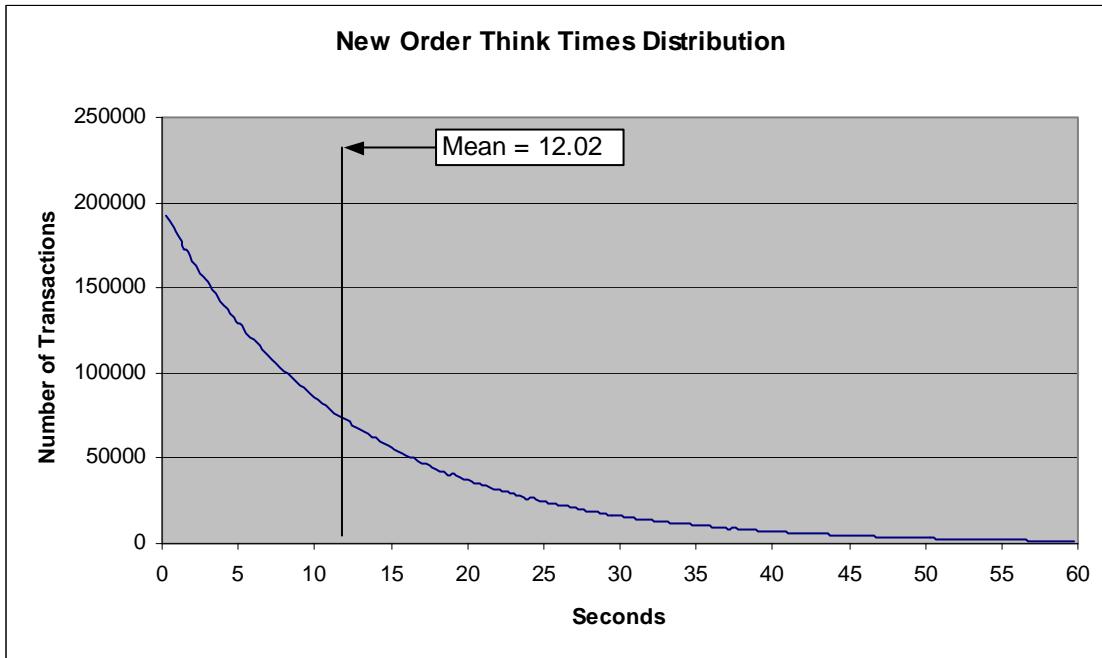


Figure 9. Throughput vs. Time Distribution

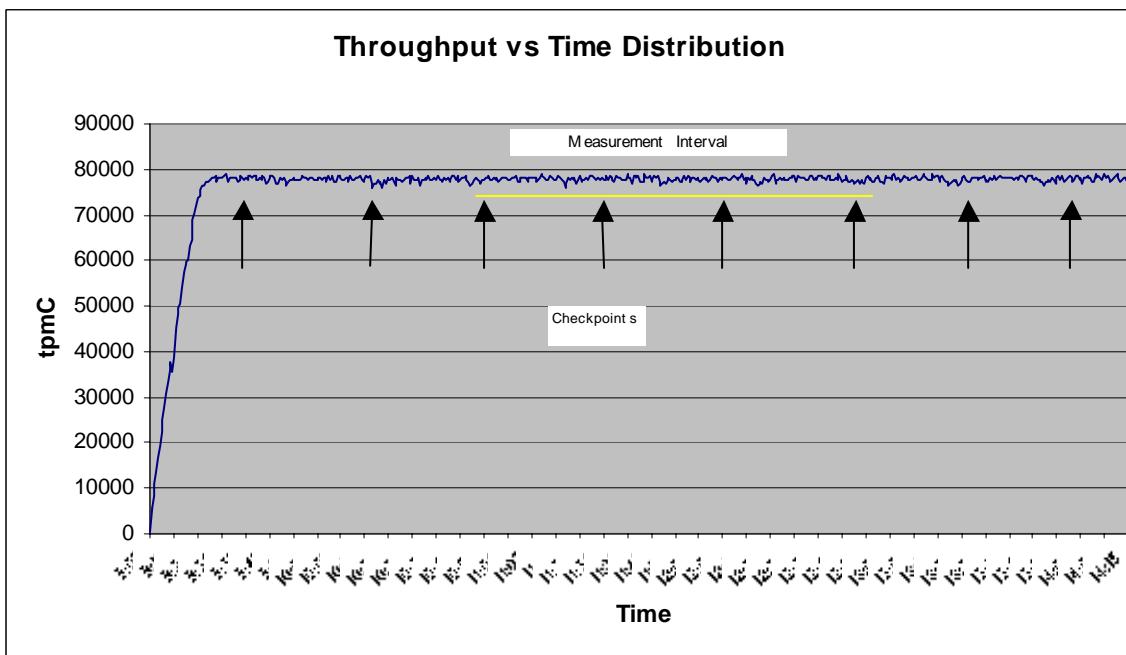

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over VI LANs using DBLIB and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 110 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes so that the checkpoint interval was an integral multiple of the measurement interval, which was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 10.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.02%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.08%
Transaction Mix	New Order	44.96%
	Payment	43.01%
	Order status	4.01%
	Delivery	4.02%
	Stock level	4.01%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 40 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted approximately 14 minutes. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
11:12:47a.m.	27 minutes, 30 seconds
11:42:45a.m.	27 minutes, 30 seconds
12:12:43p.m.	27 minutes, 30 seconds
12:42:41p.m	27 minutes, 30 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 4 HP ProLiant servers. These driver machines emulated the users web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 3 driver (RTE) machines were connected through a 10/100 switch to the client machines at 100Mbs, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a VI switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

• Maximum Qualified Throughput	77,905.18 tpmC
• Price per tpmC	\$5.32 per tpmC
• Availability	December 31, 2002

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 5 Microsoft Windows 2000 Server
- 1 Microsoft Windows .NET Enterprise Server 2003
- 1 Microsoft SQL Server 2000 Enterprise Edition SP3 (per processor)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
137 Yankton St., Suite 101
Folsom, CA 95630
(phone) (916) 985-1131
(fax) (916) 985-1185
e-mail: lorna@perfmetrics.com

Availability of the Full Disclosure Report


The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

Transaction Processing Performance Council
c/o Shanley Public Relations
777 North First Street, Suite 600
San Jose, CA 95112-6311

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000

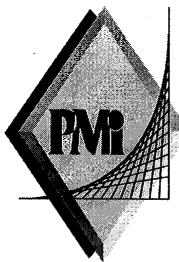

PERFORMANCE METRICS INC.
TPC Certified Auditors

November 18, 2002

Mr. Paul Cao
Hewlett-Packard Company
20555 SH 249
Houston, TX 77070

I have verified on by remote the TPC Benchmark™ C client/server for the following configuration:

Platform: ProLiant DL580-4P G2
Database Manager: Microsoft SQL Server 2000 Enterprise Edition
Operating System: Microsoft Windows .NET Enterprise Server 2003
Transaction Monitor: Microsoft COM+

Servers: ProLiant DL580 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
4 Pentium III <u>Xeon@2Ghz</u>	Main: 32 GB Cache: 1024 KB	224 @ 18GB 14 @ 36GB	0.63	77,905.18
5 Clients: DL360R each with:				
Pentium III Xeon @ 1.4 Ghz	Main: 512 MB Cache: 512 KB	1 @ 18 GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized and populated.
- The database was properly scaled with 6,500 warehouses of which only 6,200 were active during the performance run.
- The ACID properties were successfully demonstrated.

PERFORMANCE METRICS INC.
TPC Certified Auditors

- The log loss and data loss durability test were demonstrated on a subset of the configured system using 1,000 warehouses.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 day space calculation was verified.
- The controller cache was disabled on the log disk controllers.
- The steady state portion of the test was 120 minutes.
- One checkpoint was taken before the measured interval.
- Four checkpoints were taken during the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes: None.

Sincerely,



Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

Methods.h

```
/*      FILE:          METHODS.H
*      *          Microsoft
TPC-C Kit Ver. 4.20.000
*          Copyright
Microsoft, 1999
*          All Rights Reserved
*
*          not yet
audited
*
*      PURPOSE: Header file for COM components.
*
*      Change history:
*          4.20.000 - first version
*/
enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    }
}
```

```
dwSystemErr;
m_SystemErr =
m_szErrorText = NULL;
};

~CCOMPONENT_ERR()
{
    if (m_szTextDetail != NULL)
        delete [];

m_szTextDetail;
if (m_szErrorText != NULL)
    delete [];

m_szErrorText;
};

COMPONENT_ERROR m_Error;
char *m_szTextDetail;
char *m_szErrorText;
DWORD m_SystemErr;

int ErrorType() {return
ERR_TYPE_COMPONENT;};
int ErrorNum() {return m_Error;};
char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

///////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IOObjectControl,
public IOObjectConstruct,
public CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IOObjectControl)
    COM_INTERFACE_ENTRY(IOObjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
};

HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);

HRESULT __stdcall CallSetComplete();

// IOObjectControl
STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
STDMETHODIMP Activate() { return S_OK; }
// we don't support COM Services
transactions (no enlistment)
STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }

// IOObjectConstruct
STDMETHODIMP Construct(IDispatch * pUnk);

// helper methods
private:
BOOL m_bCanBePooled;
CTPCC_BASE *m_pTxn;

struct COM_DATA
{
    int retval;
    int error;
    union
    {
        NEW_ORDER_DATA
NewOrder;
        PAYMENT_DATA
Payment;
        DELIVERY_DATA
Delivery;
        STOCK_LEVEL_DATA
StockLevel;
        ORDER_STATUS_DATA
OrderStatus;
    } u;
};

///////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx())
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()
}
```

```

};

///////////////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

BEGIN_COM_MAP(CNewOrder)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
//     HRESULT __stdcall NewOrder(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
//     HRESULT __stdcall OrderStatus(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

///////////////
// COrderStatus
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
//     HRESULT __stdcall NewOrder(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}

```

```

    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
//     HRESULT __stdcall OrderStatus(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

///////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
&CLSID_Payment>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
//     HRESULT __stdcall NewOrder(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
//     HRESULT __stdcall Payment(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

///////////////
// CStockLevel
class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
    COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
//     HRESULT __stdcall NewOrder(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}

```

```

    HRESULT __stdcall Payment(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
//     HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
//         VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};


```

ReadRegistry.c pp

```

/*      FILE:          READREGISTRY.CPP
*           Microsoft
TPC-C Kit Ver. 4.20.000
Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           not yet
audited
*
*           PURPOSE: Implementation for TPC-C Tuxedo
class.
*           Contact: Charles Levine
(clevine@microsoft.com)
*
*           Change history:
*           4.20.000 - first version
*/

/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. There parameters are
under the TPCC key.
*
* RETURNS FALSE = no errors
*                      TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use; may
be either ODBC or DBLIB
    pReg->eDB_Protocol = Unspecified;
}


```

```

        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
            if ( !strcmp(szTmp,
szDBNames[ODBC]) )
                pReg->eDB_Protocol =
ODBC;
            else if ( !strcmp(szTmp,
szDBNames[DBLIB]) )
                pReg->eDB_Protocol =
DBLIB;
}
        pReg->eTxnMon = None;
        // determine txn monitor to use; may be
either TUXEDO, or blank
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
            if ( !strcmp(szTmp,
szTxnMonNames[TUXEDO]) )
                pReg->eTxnMon = TUXEDO;
            else if ( !strcmp(szTmp,
szTxnMonNames[ENCINA]) )
                pReg->eTxnMon = ENCINA;
            else if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
                pReg->eTxnMon = COM;
}
        pReg->bCOM_SinglePool = FALSE;
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
            if ( !strcmp(szTmp, "YES") )
                pReg->bCOM_SinglePool =
TRUE;
}
        pReg->dwMaxConnections = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxConnections = dwTmp;

        pReg->dwMaxPendingDeliveries = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxPendingDeliveries =
dwTmp;

        pReg->dwNumberOfDeliveryThreads = 0;
        size = sizeof(dwTmp);

```

```

        if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwNumberOfDeliveryThreads =
dwTmp;

        size = sizeof( pReg->szPath );
        if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
            pReg->szPath[0] = 0;

        size = sizeof( pReg->szDbServer );
        if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) != ERROR_SUCCESS
)
            pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) != ERROR_SUCCESS
)
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) != ERROR_SUCCESS
)
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) != ERROR_SUCCESS
)
            pReg->szDbPassword[0] = 0;

        RegCloseKey(hKey);

        return FALSE;
}

```

ReadRegistry.h

```

/*
 *      FILE:          ReadRegistry.h
 *                      Microsoft
TPC-C Kit Ver. 4.20.000
 *
 *                      Copyright
Microsoft, 1999
 *
 *                      All Rights Reserved
*
*                      not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:
*                      4.20.000 - first version
*/
enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC",
"DBLIB" };

```

```

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO",
"ENCINA", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    char szPath[128];
    char szDbServer[32];
    char szdbName[32];
    char szdbUser[32];
    char szdbPassword[32];
} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

WEBCLNT.DSP

```

# Microsoft Developer Studio Project File -
Name="webclnt" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 5.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Application" 0x0101

CFG=webclnt - Win32 Release
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "Webclnt.mak" CFG="webclnt - Win32
Release"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "webclnt - Win32 Release" (based on "Win32
(x86) Application")
!MESSAGE "webclnt - Win32 Debug" (based on "Win32
(x86) Application")
!MESSAGE
# Begin Project
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe

```

```

MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "webclnt - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir ".\Release"
# PROP BASE Intermediate_Dir ".\Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\Release"
# PROP Intermediate_Dir ".\Release"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D
# _DEBUG /D _WINDOWS /YX /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG"
# /D _WINDOWS /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /machine:I386

!ELSEIF "$(CFG)" == "webclnt - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir ".\Debug"
# PROP BASE Intermediate_Dir ".\Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\Debug"
# PROP Intermediate_Dir ".\Debug"
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32"
# /D _DEBUG /D _WINDOWS /YX /c
# ADD CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32" /D
# _DEBUG /D _WINDOWS /YX /FD /c
# ADD MTL /nologo /D "DEBUG" /mktyplib203 /win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib

```

```

odbcpp32.lib /nologo /subsystem:windows /debug
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /debug
/machine:I386

```

!ENDIF

```

# Begin Target
# Name "webclnt - Win32 Release"
# Name "webclnt - Win32 Debug"
# End Target
# End Project

```

Webclnt.dsw

Microsoft Developer Studio Workspace File, Format Version 6.00
WARNING: DO NOT EDIT OR DELETE THIS WORKSPACE FILE!

```

#####
#####
```

Project: "db_dblib_dll"=. \db_dblib_dll \db_dblib_dll.dsp -
Package Owner=<4>

```

Package=<5>
{{{
}}}
```

```

Package=<4>
{{{
}}}
```

```

#####
#####
```

Project: "db_odbc_dll"=. \db_odbc_dll \db_odbc_dll.dsp -
Package Owner=<4>

```

Package=<5>
{{{
}}}
```

```

Package=<4>
{{{
}}}
```

```

#####
#####
```

Project: "install"=. \install \install.dsp - Package
Owner=<4>

```

Package=<5>
{{{
}}}
```

```

Package=<4>
{{{
Begin Project Dependency
Project_Dep_Name isapi_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tuxapp
End Project Dependency
Begin Project Dependency
Project_Dep_Name db_dblib_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name db_odbc_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_com_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_tuxedo_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tpcc_com_all
End Project Dependency
Begin Project Dependency
Project_Dep_Name tpcc_com_ps
End Project Dependency
}}}

#####
#####
```

Project: "isapi_dll"=. \isapi_dll \isapi_dll.dsp -
Package Owner=<4>

```

Package=<5>
{{{
}}}
```

```

Package=<4>
{{{
Begin Project Dependency
Project_Dep_Name db_dblib_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name db_odbc_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_tuxedo_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_com_dll
End Project Dependency
Begin Project Dependency
Project_Dep_Name tm_encina_dll
End Project Dependency
}}}

#####
#####
```

Project: "tm_com_dll"=. \tm_com_dll \tm_com_dll.dsp -
Package Owner=<4>

```

Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name tpcc_com_ps
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name tpcc_com_all
    End Project Dependency
}}}

#####
Project:
"tm_encina_dll"=.\tm_encina_dll\tm_encina_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project:
"tm_tuxedo_dll"=.\tm_tuxedo_dll\tm_tuxedo_dll.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project:
"tpcc_com_all"=.\tpcc_com_all\tpcc_com_all.dsp -
Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

    Begin Project Dependency
    Project_Dep_Name tpcc_com_ps
    End Project Dependency
}}
```

```

#####
Project: "tpcc_com_ps"=.\tpcc_com_ps\tpcc_com_ps.dsp
- Package Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
}}}

#####
Project: "tuxapp"=.\tuxapp\tuxapp.dsp - Package
Owner=<4>

Package=<5>
{{{
}}}

Package=<4>
{{{
    Begin Project Dependency
    Project_Dep_Name db_dblib_dll
    End Project Dependency
    Begin Project Dependency
    Project_Dep_Name db_odbc_dll
    End Project Dependency
}}}

#####
Global:
Package=<5>
{{{
}}}

Package=<3>
{{{
}}}

#####
# Microsoft Developer Studio Project File -
Name="db_dblib_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

```

db_dblib_dll.ds

p

```

# Microsoft Developer Studio Project File -
Name="db_dblib_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

```

```

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=db_dblib_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_dblib_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_dblib_dll.mak"
CFG="db_dblib_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_dblib_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_dblib_dll - Win32 Debug" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_dblib_dll - Win32 IceCAP" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF   "$(CFG)" == "db_dblib_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktypib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktypib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe

```

```

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ntdplib.lib kernel32.lib user32.lib
gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib /nologo
/subsystem:windows /dll /machine:I386
/out:".\\bin\\tpcc_dblib.dll"
!ELSEIF "$(CFG)" == "db_dblib_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\\bin"
# PROP Intermediate_Dir ".\\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32"
/D "NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntdplib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\\bin\\tpcc_dblib.dll"
/pdbtype:sept
# ADD LINK32 icap.lib ntdplib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\\bin\\tpcc_dblib.dll"
/pdbtype:sept
!ENDIF
# Begin Target
# Name "db_dblib_dll - Win32 Release"
# Name "db_dblib_dll - Win32 Debug"
# Name "db_dblib_dll - Win32 IceCAP"
# Begin Group "Source"
# PROP Default_Filter "*.cpp"
# Begin Source File
SOURCE=.\\src\\tpcc_dblib.cpp
# End Source File
# End Group
# Begin Group "Header"
# PROP Default_Filter "*.h"
# Begin Source File
SOURCE=..\\common\\src\\error.h
# End Source File
# Begin Source File
SOURCE=.\\src\\tpcc_dblib.h
# End Source File
# Begin Source File
SOURCE=..\\common\\src\\trans.h
# End Source File
# Begin Source File
SOURCE=..\\common\\src\\txn_base.h
# End Source File
# End Group
# End Target
!ELSEIF "$(CFG)" == "db_dblib_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_dblib"
# PROP BASE Intermediate_Dir "db_dblib"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\\bin"
# PROP Intermediate_Dir ".\\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /Mdd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32"
/D "NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 ntdplib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\\bin\\tpcc_dblib.dll"
/pdbtype:sept
# ADD LINK32 icap.lib ntdplib.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\\bin\\tpcc_dblib.dll"
/pdbtype:sept
# Begin Project
# End Project

```

End Project

db_odbc_dll.ds

p

```

# Microsoft Developer Studio Project File -
Name="db_odbc_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102
CFG=db_odbc_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "db_odbc_dll.mak" CFG="db_odbc_dll
- Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "db_odbc_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE "db_odbc_dll - Win32 IceCAP" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE
# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe
!IF "$(CFG)" == "db_odbc_dll - Win32 Release"
# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\\bin"
# PROP Intermediate_Dir ".\\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /GX /O2 /D "WIN32" /D
"NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
/win32 "NUL"
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o /win32
"NUL"
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386 /out:".\\bin\\tpcc_odbc.dll"

!ELSEIF "$(CFG)" == "db_odbc_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\\bin"
# PROP Intermediate_Dir ".\\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /Zi /Od /D "WIN32" /D
"_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
/win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o /win32
"NUL"
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdtype:sept
# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\\bin\\tpcc_odbc.dll"
/pdctype:sept

```

```

!ELSEIF  "$(CFG)" == "db_odbc_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "db_odbc_"
# PROP BASE Intermediate_Dir "db_odbc_"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /Gm /GX /Zi /Od /D
# "/WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /Gm /GX /Zi /O2 /D "WIN32"
# "/NDEBUG" /D "_WINDOWS" /D "ICECAP" /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktypplib203 /o
# /win32 "NUL"
# ADD MTL /nologo /D "_DEBUG" /mktypplib203 /o /win32
# "NUL"
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
# winspool.lib comdlg32.lib advapi32.lib shell32.lib
# ole32.lib oleaut32.lib uuid.lib odbc32.lib
# odbc32.lib /nologo /subsystem:windows /dll /debug
# /machine:I386 /out:".\\bin\tpcc_odbc.dll"
/pdbtype:sept
# ADD LINK32 icap.lib kernel32.lib user32.lib
# gdi32.lib winspool.lib comdlg32.lib advapi32.lib
# shell32.lib ole32.lib oleaut32.lib uuid.lib
# odbc32.lib odbc32.lib /nologo /subsystem:windows
# /dll /debug /machine:I386 /out:".\\bin\tpcc_odbc.dll"
/pdbtype:sept

!ENDIF

# Begin Target

# Name "db_odbc_dll - Win32 Release"
# Name "db_odbc_dll - Win32 Debug"
# Name "db_odbc_dll - Win32 IceCAP"
# Begin Group "Source"

# PROP Default_Filter "*.*"
# Begin Source File

SOURCE=.\\src\\tpcc_odbc.cpp
# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.*"
# Begin Source File

SOURCE=..\common\\src\\error.h

```

```

# End Source File
# Begin Source File

SOURCE=..\src\tpcc_odbch.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project



---



## dlldata.c



---



```

DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL

compile.

To completely reconstruct this file, delete it

rerun MIDL

on all the IDL files in this DLL, specifying t

file for the

/dlldata command line option

*****/

#include <rpcproxy.h>

#ifndef __cplusplus

extern "C" {

#endif

EXTERN_PROXY_FILE(tpcc_com_ps)

PROXYFILE_LIST_START

/* Start of list */

REFERENCE_PROXY_FILE(tpcc_com_ps),

/* End of list */

PROXYFILE_LIST_END

DLLDATA_ROUTINES(aProxyFileList, GET_DLL_CLSID)

#ifndef __cplusplus

} /*extern "C" */

#endif

/* end of generated dlldata file */

```


```

error.h

```
/*      FILE:          ERROR.H      Microsoft
*
*      *          Microsoft, 1999          Copyright
*      *          All Rights Reserved
*      *
*      *          Version
*      4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE: Header file for error exception
classes.
*
*      Change history:
*      4.20.000 - updated rev number to
match kit
*      4.21.000 - fixed bug: ~CBaseErr
needed to be declared virtual
*/
#pragma once

#ifndef _INC_STRING
    #include <string.h>
#endif

const int m_szMsg_size = 512;
const int m_szApp_size = 64;
const int m_szLoc_size = 64;

//error message structure used in ErrorText routines
typedef struct _SERRORMSG
{
    int             iError;
    //error id of message
    char            szMsg[256];
    //message to sent to browser
} SERRORMSG;

typedef enum _ErrorLevel
{
    ERR_FATAL_LEVEL           =
1,
    ERR_WARNING_LEVEL         = 2,
    ERR_INFORMATION_LEVEL     = 3
} ErrorLevel;

#define ERR_TYPE_LOGIC           -1
    //logic error in program; internal error
#define ERR_SUCCESS              0
    //success (a non-error error)
#define ERR_BAD_ITEM_ID          1
    //expected abort record in txnRecord
```

```
#define ERR_TYPE_DELIVERY_POST          2
    //expected delivery post failed
#define ERR_TYPE_WEBDLL                 3
    //tpcc web generated error
#define ERR_TYPE_SQL                    4
    //sql server generated error
#define ERR_TYPE_DBLIB                  5
    //dblib generated error
#define ERR_TYPE_ODBC                  6
    //odbc generated error
#define ERR_TYPE_SOCKET                7
    //error on communication socket client rte
only
#define ERR_TYPE_DEADLOCK              8
    //dblib and odbc only deadlock condition
#define ERR_TYPE_COM                   9
    //error from COM call
#define ERR_TYPE_TUXEDO                10
    //tuxedo error
#define ERR_TYPE_OS                     11
    //operating system error
#define ERR_TYPE_MEMORY                12
    //memory allocation error
#define ERR_TYPE_TPCC_ODBC             13
    //error from tpcc odbc txn module
#define ERR_TYPE_TPCC_DBLIB            14
    //error from tpcc dblib txn module
#define ERR_TYPE_DELISRV               15
    //delivery server error
#define ERR_TYPE_TXNLOG                16
    //txn log error
#define ERR_TYPE_BCCONN                17
    //Benchcraft connection class
#define ERR_TYPE_TPCC_CONN              18
    //Benchcraft connection class
#define ERR_TYPE_ENCINA                19
    //Encina error
#define ERR_TYPE_COMPONENT              20
    //error from COM component
#define ERR_TYPE_RTE                   21
    //Benchcraft rte

#define ERR_TYPE_AUTOMATION            22
    //Benchcraft automation errors
#define ERR_TYPE_DRIVER                23
    //Driver engine errors
#define ERR_TYPE_RTE_BASE              24
    //Framework errors

#define ERR_INS_MEMORY                "Insufficient Memory to continue."
#define ERR_UNKNOWN                   "Unknown error."
#define ERR_MSG_BUF_SIZE              512
#define INV_ERROR_CODE                -1

class CBaseErr
{
public:
    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg = INV_ERROR_CODE;
        if (szLoc)
        {
            m_szLoc = new char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;
        if (szLoc)
        {
            m_szLoc = new char[m_szLoc_size];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
{}}
```

```

        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];

        if (szStr)
            j += wsprintf(szTmp,
"%s\n", szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        ::MessageBox(hwnd, szTmp,
m_szApp, MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }
    virtual int ErrorType() = 0; // a value
which distinguishes the kind of error that occurred
    virtual char *ErrorText() = 0; // a string
(i.e., human readable) representation of the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where
the error occurred
    int m_idMsg;
};

class CSocketErr : public CBaseErr
{
public:
    enum Action
    {
        eNone,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
    };
    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);
    Action m_eAction;
};

```

```

        int ErrorType() { return ERR_TYPE_SOCKET; }
        char *ErrorText(void);
    };

    class CSystemErr : public CBaseErr
    {
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        eBeginThread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
    };

    CSystemErr(Action
eAction, LPCTSTR szLocation);
        int ErrorType() { return
ERR_TYPE_OS; }
        char *ErrorText(void);
        void Draw(HWND hwnd, LPCTSTR szStr =
NULL);
        Action m_eAction;
    private:
        char m_szMsg[ERR_MSG_BUF_SIZE];
    };

    class CMemoryErr : public CBaseErr
    {
public:
    CMemoryErr();
    int ErrorType() { return ERR_TYPE_MEMORY; }
    char *ErrorText() { return ERR_INS_MEMORY; }
    };

```

install.c

```

/*
 * FILE:           INSTALL.C
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * PURPOSE: Automated installation
application for TPC-C Web Kit
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - added COM installation
steps
 */

#include <windows.h>
#include <direct.h>
#include <iostream.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "...\\common\\src\\ReadRegistry.h"

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeLS;
DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllLS;

// TPC-C registry settings
TPCCREGISTRYDATA Reg;

static int iPoolThreadLimit;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;

static int iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; // last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);

```

```

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd,
char *szDllPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char *szFileName);
static int CopyFiles(HWND hDlg, char *szDllPath);
static BOOL GetInstallPath(char *szDllPath);
static void GetVersionInfo(char *szDLLPath, char *szExePath);
static BOOL CheckWWWebService(void);
static BOOL StartWWWebService(void);
static BOOL StopWWWebService(void);
static void UpdateDialog(HWND hDlg);

BOOL install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;
    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {

            DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
        }
    }

    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)

```

```

{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;
    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0));
            PostMessage(hwnd,
WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo);
            pSrc = (BYTE
*)LockResource(hRes);
            pDst = (unsigned char
*)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst,
pSrc, dwSize);
                pDst[dwSize]
= 0;
                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
                free(pDst);
            }
            else
                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
            return TRUE;
        case WM_DESTROY:
            DeleteObject(hFont);
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL
)
                EndDialog(hwnd, FALSE);
            default:
                break;
    }
    return FALSE;
}

```

```

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )
                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char szDllPath[256];
    static char szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inet srv is not installed.", NULL, MB_ICONSTOP |
MB_OK);
                EndDialog(hwnd, FALSE);
            }
            return TRUE;
        // set default values
        ZeroMemory( &Reg,
sizeof(Reg) );
    }
}

```

```

Reg.dwNumberOfDeliveryThreads = 4;
Reg.dwMaxConnections =
100;

Reg.dwMaxPendingDeliveries = 100;
Reg.eDB_Protocol =
DBLIB;
Reg.eTxnMon = None;
strcpy(Reg.szDbServer,
"");
strcpy(Reg.szDbName,
"tpcc");
strcpy(Reg.szDbUser,
"sa");
strcpy(Reg.szDbPassword, "");

iMaxPhysicalMemory * 2;
iPoolThreadLimit =
iThreadTimeout = 86400;
iListenBackLog = 15;
iAcceptExOutstanding =
40;

ReadTPCCRegistrySettings( &Reg );
ReadRegistrySettings();

GetModuleFileName(hInst, szExePath,
sizeof(szExePath));

GetVersionInfo(szDllPath, szExePath);

wsprintf(szTmp,
"Version %d.%2.2d.%3.3d", versionExeMS, versionExeMM,
versionExeLS);
SetDlgItemText(hwnd,
IDC_VERSION, szTmp);

SetDlgItemText(hwnd,
IDC_PATH, szDllPath);

SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);

SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);

```

```

SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

CheckDlgButton(hwnd,
IDC_DBLIB, 0);
CheckDlgButton(hwnd,
IDC_ODBC, 0);
if ( Reg.eDB_Protocol
== DBLIB )
    CheckDlgButton(hwnd, IDC_DBLIB, 1);
else
    CheckDlgButton(hwnd, IDC_ODBC, 1);

// check OS version
level for COM. Must be at least Windows 2000
VI.dwOSVersionInfoSize
= sizeof(VI);
GetVersionEx( &VI );
if (VI.dwMajorVersion <
5)
{
    HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
    EnableWindow(
hDlg, 0 ); // disable COM option
if
(Reg.eTxnMon == COM)

    Reg.eTxnMon = None;
}
CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
CheckDlgButton(hwnd,
IDC_TM_TUXEDO, 0);
CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
CheckDlgButton(hwnd,
IDC_TM_ENCINA, 0);
switch (Reg.eTxnMon)
{
case None:
    CheckDlgButton(hwnd, IDC_TM_NONE, 1);
    break;
case TUXEDO:
    CheckDlgButton(hwnd, IDC_TM_TUXEDO, 1);
    break;
case ENCINA:
    CheckDlgButton(hwnd, IDC_TM_ENCINA, 1);
    break;
case COM:
    CheckDlgButton(hwnd, IDC_TM_MTS, 1);

```

```

break;
}

return TRUE;
case WM_PAINT:
    if ( IsIconic(hwnd) )
    {
        BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
    }
    return TRUE;
break;
case WM_COMMAND:
    if ( HIWORD(wParam) ==
BN_CLICKED )
    {
        switch(
LOWORD(wParam) )
        {
            case IDC_DBLIB:
                return TRUE;
            case IDC_ODBC:
                return TRUE;
            case IDOK:
                ProcessOK(hwnd, szDllPath);
                return TRUE;
            case IDCANCEL:
                EndDialog(hwnd, FALSE);
                return TRUE;
            default:
                return FALSE;
        }
    }
    break;
default:
    break;
}
return FALSE;
}

static void ProcessOK(HWND hwnd, char *szDllPath)
{
    int d;
    HWND hDlg;
    int rc;
    char szFullName[256];

```

```

char      szErrTxt[128];

// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);

GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));

if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
{
    Reg.eDB_Protocol = DBLIB;
    rc = 1;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_ODBC) )
{
    Reg.eDB_Protocol = ODBC;
    rc = 2;
}

if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE)
)
{
    Reg.eTxnMon = None;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_TUXEDO) )
{
    Reg.eTxnMon = TUXEDO;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
{
    Reg.eTxnMon = COM;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_ENCINA) )
{
    Reg.eTxnMon = ENCINA;

iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);

// write binaries to inetpub\wwwroot
rc = CopyFiles(hDlg, szDllPath);

```

```

if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s) occurred when creating " );
    strcat( szErrTxt, szLastFileName );
}
MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
EndDialog(hwnd, 0);
return;

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;

// if using COM
if (Reg.eTxnMon == COM)
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    if (install_com(szDllPath))
    {
        ShowWindow(hwnd,
SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt,
"Error occurred when configuring COM settings." );
        MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
    Sleep(100);
}
}

```

```

ShowWindow(hwnd, SW_SHOWNA);
DestroyWindow(hDlg);
EndDialog(hwnd, rc);
return;
}

static void ReadRegistrySettings(void)
{
    HKEY      hKey;
    DWORD     size;
    DWORD     type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Services\Inetinfo\Parameters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size = sizeof(iPoolThreadLimit);
        if ( RegQueryValueEx(hKey,
"PoolThreadLimit", 0, &type, (char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
            if ( !iPoolThreadLimit )
                iPoolThreadLimit = iMaxPhysicalMemory * 2;

        size = sizeof(iThreadTimeout);
        if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
            if ( !iThreadTimeout )
                iThreadTimeout = 86400;

        size = sizeof(iListenBackLog);
        if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
            if ( !iListenBackLog )
                iListenBackLog = 15;

        RegCloseKey(hKey);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Services\W3SVC\Parameters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
    {
        size =
sizeof(iAcceptExOutstanding);
        if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char *)
&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
            if ( !iAcceptExOutstanding )
                iAcceptExOutstanding = 40;

        RegCloseKey(hKey);
    }
}

```

```

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY hKey;
    DWORD dwDisposition;
    char szTmp[256];
    char *ptr;
    int iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char
*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

        RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

        RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param

```

```

eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
        RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));
        RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters",
0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
    {
        RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 15));
        SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
    if ( lpDllEntryPoint != NULL )

```

```

    {
        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL hGlobal;
    HRSRC hResrc;
    HANDLE hHandle;
    DWORD dwSize;
    BYTE *pSrc;
    DWORD d;
    char szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath)
{
    BOOL bSvcRunning;

    bSvcRunning = CheckWWWWebService();
    if ( bSvcRunning )
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
        StopWWWWebService();
    }
}

```

```

        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if (!FileFromResource( "DBLIB_DLL",
IDR_DBLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tuxapp.exe
    strcpy( szLastFileName, "tuxapp.exe" );
    if (!FileFromResource( "TUXEDO_APP",
IDR_TUXEDO_APP, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_tuxedo.dll
    strcpy( szLastFileName, "tpcc_tuxedo.dll" );
    if (!FileFromResource( "TUXEDO_DLL",
IDR_TUXEDO_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
        return 0;

```

```

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_ps.dll
        strcpy( szLastFileName, "tpcc_com_ps.dll" );
        if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSPS_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        // install tpcc_com_all.dll
        strcpy( szLastFileName, "tpcc_com_all.dll" );
        if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
            return 0;
        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        //if we stopped service restart it.
        if ( bSvcRunning )
        {
            SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
            SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
            UpdateDialog(hDlg);
            StartWWWebService();
        }

        SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    char *ptr;
    int iRc;

    szDllPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\\Services\W3SVC\Parameters",
0, KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"/", NULL, NULL, szData, &sv ); // used by IIS 3.0
        if (iRc == ERROR_FILE_NOT_FOUND)

```

```

            iRc = RegQueryValueEx(
hKey, "/", NULL, NULL, szData, &sv ); // used by
IIS 4.0
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szDllPath,
szData);
            if ( (ptr =
strchr(szDllPath, ',')) )
                *ptr = 0;
            len =
strlen(szDllPath);
            if ( szDllPath[len-1]
!= '\\\\' )
            {
                szDllPath[len] = '\\\\';
                szDllPath[len+1] = 0;
            }
            RegCloseKey(hKey);
        }
        return bRc;
    }

    static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD dwSize;
    DWORD dwBytes;
    char *ptr;
    VS_FIXEDFILEINFO *vs;
    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char
*)malloc(dwSize);
            GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
            VerQueryValue(ptr,
"\\", &vs, &dwBytes);
            versionDllMS = vs->dwProductVersionMS;
            versionDllLS = vs->dwProductVersionLS;
            free(ptr);
        }
    }
}

```

```

    }

    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs,
&dwBytes);

        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}

static BOOL CheckWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    if (!ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;
ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWService(void)
{
    SC_HANDLE          schSCManager;

```

```

    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD             dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!StartService(schService, 0, NULL) )
        goto StartWWWErr;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint)           //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StartWWWErr;
    CloseServiceHandle(schService);
    return TRUE;
StartWWWErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD             dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);

```

```

    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService,
&ssStatus) )
        goto StopWWWErr;

    if (!ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWErr;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
&ssStatus) )
        goto StopWWWErr;
    while( ssStatus.dwCurrentState ==
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
ssStatus.dwCheckPoint)           //Break if
the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
        goto StopWWWErr;
    CloseServiceHandle(schService);
    return TRUE;
StopWWWErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

```

install.h

```
//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//

#define IDD_DIALOG1 101
#define IDR_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDR_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
```

install.rc

```
//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////////////////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"
////////////////////////////////////////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////////////////////////////////////////
// English (U.S.) resources
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////////////////////////////////////////
// Dialog
//
IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_MODALFRAME | DS_CENTER | WS_MINIMIZEBOX |
WS_POPUP | WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT     ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    CONTROL
    "None",IDC_TM_NONE,"Button",BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP,43,100,33,10
    CONTROL
    "COM",IDC_TM_MTS,"Button",BS_AUTORADIOBUTTON |
    WS_TABSTOP,43,113,32,10
    CONTROL
    "TUXEDO",IDC_TM_TUXEDO,"Button",BS_AUTORADIOBUTTON |
    WS_TABSTOP,106,100,46,10
    CONTROL
    "ENCINA",IDC_TM_ENCINA,"Button",BS_AUTORADIOBUTTON |
    WS_DISABLED |
WS_TABSTOP,106,113,43,10
    EDITTEXT
    ED_DB_SERVER,131,152,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_USER_ID,131,165,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_PASSWORD,131,178,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_NAME,131,191,67,12,ES_AUTOHSCROLL
    CONTROL
    "DBLIB",IDC_DBLIB,"Button",BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP,45,219,39,12
    CONTROL
    "ODBC",IDC_ODBC,"Button",BS_AUTORADIOBUTTON |
    WS_TABSTOP,
    91,219,39,12
    EDITTEXT
    ED_IIS_MAX_THREAD_POOL_LIMIT,164,263,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,277,34,12,ES_RI
GHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_THREAD_TIMEOUT,164,291,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_LISTEN_BACKLOG,164,305,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    PUSHBUTTON "OK",IDOK,53,331,50,14
    PUSHBUTTON "Cancel",IDCANCEL,119,331,50,14
    EDITTEXT
    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY
    LTEXT
    "Number of Delivery"
Threads:",IDC_STATIC,35,45,115,12
    LTEXT
    "Max Number of
Connections:",IDC_STATIC,35,73,115,12
    RTEXT
    "Version
4.11",IDC_VERSION,120,4,89,9
    LTEXT
    "IIS Max Thread Pool
Limit:",IDC_STATIC,36,263,115,12
    LTEXT
    "Web Service Backlog Queue
Size:",IDC_STATIC,36,277,115,
    12
    LTEXT
    "IIS Thread Timeout
(seconds):",IDC_STATIC,36,291,115,12
    LTEXT
    "IIS Listen
Backlog:",IDC_STATIC,36,307,115,10
    GROUPBOX
    "Database
Interface",IDC_STATIC,35,208,163,27,WS_GROUP
    LTEXT
    "Installation
directory:",IDC_STATIC,35,29,71,10
    GROUPBOX
    "Transaction
Monitor",IDC_STATIC,33,90,165,37
    LTEXT
    "Server
Name:",IDC_STATIC,35,155,56,8
    LTEXT
    "User ID:",IDC_STATIC,35,168,60,8
    LTEXT
    "User
Password:",IDC_STATIC,35,181,83,8

```

```

LTEXT          "Database
Name:", IDC_STATIC, 35, 194, 54, 8
GROUPBOX      "SQL Server Connection
Properties", IDC_STATIC, 22, 139, 187,
               102
GROUPBOX      "Web Client
Properties", IDC_STATIC, 22, 15, 187, 118
GROUPBOX      "IIS
Settings", IDC_STATIC, 22, 247, 187, 79
LTEXT          "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFOREGROUND | DS_3DLOOK | DS_CENTER |
WS_POPUP | WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON   "OK", IDOK, 33, 45, 50, 9
    CTEXT          "HTML TPC-C Installation
Successfull", IDC_RESULTS, 7, 22,
               102, 18, 0, WS_EX_CLIENTEDGE
    ICON           IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
               WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG DISCARDABLE 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_MODALFRAME | DS_3DLOOK |
DS_CENTER | WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL         "Progress1", IDC_PROGRESS1, "msctls_progress32", WS_BORD
ER,
               7, 20, 77, 13
    CTEXT          "Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
END

IDD_DIALOG4 DIALOG DISCARDABLE 0, 0, 291, 202
STYLE DS_MODALFRAME | DS_CENTER | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT        IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
    |             ES_AUTOHSCROLL | ES_READONLY |
    WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON  "I Agree", IDOK, 87, 181, 50, 14
    PUSHBUTTON     "&Cancel", IDCANCEL, 153, 181, 50, 14
END

////////////////////////////////////////////////////////////////
// DESIGNINFO
//

```

```

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 345
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END
#endif // APSTUDIO_INVOKED

#ifndef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

```

```

END
#endif // APSTUDIO_INVOKED

////////////////////////////////////////////////////////////////
// Icon
//
// Icon with lowest ID value placed first to ensure
application icon
// remains consistent on all systems.
IDI_ICON1      ICON      DISCARDABLE
"icon1.ico"
IDI_ICON2      ICON      DISCARDABLE
"icon2.ico"

////////////////////////////////////////////////////////////////
// TPCCDLL
//
IDR_TPCCDLL    TPCCDLL DISCARDABLE
"..\..\isapi_dll\bin\tpcc.dll"

#ifndef _MAC
////////////////////////////////////////////////////////////////
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,20,0
PRODUCTVERSION 0,4,20,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client
Installer\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "install1\0"
            VALUE "FileVersion", "0, 4, 20, 0\0"
            VALUE "InternalName", "install\0"
            VALUE "LegalCopyright", "Copyright ©
1999\0"
            VALUE "Originalfilename", "install.exe\0"
            VALUE "ProductName", "Microsoft
install\0"
        END
    END

```

```

        VALUE "ProductVersion", "0, 4, 20, 0\0"
    END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
#endif // !_MAC

///////////////////////////////
// LICENSE
//
IDR_LICENSE1          LICENSE DISCARDABLE
"license.txt"

///////////////////////////////
// DBLIB_DLL
//
IDR_DBLIB_DLL          DBLIB_DLL DISCARDABLE
"..\\..\\db_dblib_dll\\bin\\tpcc_dblib.dll"

///////////////////////////////
// ODBC_DLL
//
IDR_ODBC_DLL           ODBC_DLL DISCARDABLE
"..\\..\\db_odbc_dll\\bin\\tpcc_odbc.dll"

///////////////////////////////
// TUXEDO_APP
//
IDR_TUXEDO_APP         TUXEDO_APP DISCARDABLE
"..\\..\\tuxapp\\bin\\tuxapp.exe"

///////////////////////////////
// TUXEDO_DLL
//
IDR_TUXEDO_DLL          TUXEDO_DLL DISCARDABLE
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"

///////////////////////////////
// COM_DLL
//

```

```

IDR_COM_DLL             COM_DLL DISCARDABLE
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"
/////////////////////////////
// COM_PS_DLL
//
IDR_COMPS_DLL           COM_PS_DLL DISCARDABLE
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"
/////////////////////////////
// COM_ALL_DLL
//
IDR_COMALL_DLL          COM_ALL_DLL DISCARDABLE
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"
#endif // English (U.S.) resources
/////////////////////////////
#ifndef APSTUDIO_INVOKED
/////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
//
/////////////////////////////
#endif // not APSTUDIO_INVOKED

```

install_com.cp

p

```

/*      FILE:           INSTALL_COM.CPP
*                               Microsoft
TPC-C Kit Ver. 4.20.000
*                               Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                               not audited
*
*      PURPOSE:  installation code for COM
application for TPC-C Web Kit
*      Contact: Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*      4.20.000 - first version
*/

```

```

#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection* pCatalogCollectionMethod = NULL;

    ICatalogObject* pCatalogObjectApp
= NULL;
    ICatalogObject* pCatalogObjectCo
= NULL;
    ICatalogObject* pCatalogObjectItf
= NULL;
    ICatalogObject* pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bImp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
NULL,
CLSCCTX_INPROC_SERVER,
IID_ICOMAdminCatalog,
(void**) &pCOMAdminCat);

    if (!SUCCEEDED(hr)) goto Error;

```

```

bstrTemp = "Applications";

// Attempt to connect to "Applications" in
the Catalog
hr = pCOMAdminCat->GetCollection(bstrTemp,
                                    (IDispatch**)&pCatalogCollectionApp);
if (!SUCCEEDED(hr)) goto Error;

// Attempt to load the "Applications"
collection
hr = pCatalogCollectionApp->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionApp-
>get_Count(&lCount);
if (!SUCCEEDED(hr)) goto Error;

// iterate through applications to delete
existing "TPC-C" application (if any)
while (lCount > 0)
{
    hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)&pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogObjectApp-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    if (wcscmp(vTmp.bstrVal, L"TPC-
C"))
    {
        lCount--;
        continue;
    }
    else
    {
        hr =
pCatalogCollectionApp->Remove(lCount - 1);
        if (!SUCCEEDED(hr))
goto Error;
        break;
    }
}

hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp-
>Add((IDispatch**)&pCatalogObjectApp);
if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);

```

```

if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process)
application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp =
COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components
collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component
installation will work
hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
// app name
bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll";
bstrTemp3 = "";
// type
library (TLB)
bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll";
// proxy/stub dll
hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
bstrTemp2,
bstrTemp3,
bstrTemp4);
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

```

```

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in
application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)&pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;

    // used for debugging (view the
name)
    hr = pCatalogObjectCo-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructionEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructorString";
    bstrTemp2 = "dummy string (do not
remove)";
    vTmp = bstrTemp2;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"JustInTimeActivation";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "MaxPoolSize";
    vTmp.Clear(); // clear
variant so it isn't stored as a bool (_variant_t
feature)
    vTmp = (long)30;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"ObjectPoolingEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

```

```

        // save key to get the
InterfacesForComponent collection
        hr = pCatalogObjectCo-
>get_Key(&vKey);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp =
"InterfacesForComponent";
        hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionItf);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through interfaces in
component
        while (lCountItf > 0)
        {
            hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**)&pCatalogObjectItf);
            if (!SUCCEEDED(hr))
goto Error;

            // save key to get the
MethodsForInterface collection
            hr = pCatalogObjectItf-
>get_Key(&vKey);
            if (!SUCCEEDED(hr))
goto Error;

            bstrTemp =
"MethodsForInterface";
            hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**)&pCatalogCollectionMethod);
            if (!SUCCEEDED(hr))
goto Error;

            hr =
pCatalogCollectionMethod->Populate();
            if (!SUCCEEDED(hr))
goto Error;

            hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
            if (!SUCCEEDED(hr))
goto Error;

            // iterate through
methods of interface
            while (lCountMethod >
0)
            {

```

```

                hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**)&pCatalogObjectMethod);
                if
(!SUCCEEDED(hr)) goto Error;

                bstrTemp =
"AutoComplete";
                bTmp = TRUE;
                vTmp = bTmp;
                hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
                if
(!SUCCEEDED(hr)) goto Error;

                pCatalogObjectMethod->Release();
                pCatalogObjectMethod = NULL;
                lCountMethod-
-;
            }
            // save changes
            hr = pCatalogCollectionMethod->SaveChanges(&lActProp);
            if (!SUCCEEDED(hr))
goto Error;
            pCatalogObjectItf-
>Release();
            pCatalogObjectItf =
NULL;
            lCountItf--;
        }

        pCatalogObjectCo->Release();
        pCatalogObjectCo = NULL;
        lCountCo--;
    }

    // save changes
    hr = pCatalogCollectionCo-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

    pCatalogCollectionApp->Release();
    pCatalogCollectionApp = NULL;
    pCatalogCollectionCo->Release();
    pCatalogCollectionCo = NULL;
    pCatalogCollectionItf->Release();
    pCatalogCollectionItf = NULL;
    pCatalogCollectionMethod->Release();
    pCatalogCollectionMethod = NULL;

```

```

Error: CoUninitialize();

if (!SUCCEEDED(hr))
{
    LPTSTR lpBuf;
    DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER |
FORMAT_MESSAGE_FROM_SYSTEM,
NULL,
hr,
MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
(LPTSTR)
&lpBuf,
0,
NULL);
// _tprintf(_T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
    return TRUE;
}
else
    return FALSE;
}

```

isapi_dll.dsp

```

# Microsoft Developer Studio Project File -
Name="isapi_dll" - Package Owner:<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102
CFG=isapi_dll - Win32 IceCAP
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "isapi_dll.mak" CFG="isapi_dll - Win32 IceCAP"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "isapi_dll - Win32 Release" (based on "Win32
(x86) Dynamic-Link Library")

```

```

!MESSAGE "isapi_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE "isapi_dll - Win32 IceCAP" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "isapi_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /Zi /Od /D "_DEBUG" /D
"WIN32" /D "_WINDOWS" /FR /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ..\common\txnlog\lib\release\rtetime.lib
..\common\txnlog\lib\release\spinlock.lib
..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\debug\txnlog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/nodefaultlib:"LIBCMTD" /out:".\bin\tpcc.dll"
/pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /nodefaultlib

!ELSEIF "$(CFG)" == "isapi_dll - Win32 IceCAP"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "isapi_dll"
# PROP BASE Intermediate_Dir "isapi_dll"
# PROP BASE Ignore_Export_Lib 0
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MDd /W3 /GX /Zi /Od /D
"_DEBUG" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD CPP /nologo /MD /W3 /GX /Zi /Od /D "NDEBUG" /D
"ICECAP" /D "WIN32" /D "_WINDOWS" /FR /YX /FD /Gh /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe

```

```

# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /GX /Zi /Od /D "_DEBUG" /D
"WIN32" /D "_WINDOWS" /FR /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdbtype:sept
# ADD LINK32 ..\common\txnlog\lib\debug\rtetime.lib
..\common\txnlog\lib\debug\spinlock.lib
..\common\txnlog\lib\debug\error.lib
..\common\txnlog\lib\debug\txnlog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/nodefaultlib:"LIBCMTD" /out:".\bin\tpcc.dll"
/pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /nodefaultlib

!ELSEIF "$(CFG)" == "isapi_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
BSC32=bscmake.exe

```

```

# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".\bin\tpcc.dll" /pdbtype:sept
# SUBTRACT BASE LINK32 /profile /pdb:none
# ADD LINK32 icap.lib
..\common\txnlog\lib\release\rtetime.lib
..\common\txnlog\lib\release\spinlock.lib
..\common\txnlog\lib\release\error.lib
..\common\txnlog\lib\release\txnlog.lib wsock32.lib
kernel32.lib user32.lib gdi32.lib winspool.lib
comdlg32.lib advapi32.lib shell32.lib ole32.lib
oleaut32.lib uuid.lib odbc32.lib odbcpp32.lib /nologo
/subsystem:windows /dll /debug /machine:I386
/out:".\bin\tpcc.dll" /pdbtype:sept
# SUBTRACT LINK32 /profile /pdb:none /map
ENDIF

# Begin Target

# Name "isapi_dll - Win32 Release"
# Name "isapi_dll - Win32 Debug"
# Name "isapi_dll - Win32 IceCAP"
# Begin Group "Source"
# PROP Default_Filter "*.*"
# Begin Source File
SOURCE=.\src\tpcc.cpp
# End Source File
# Begin Source File
SOURCE=.\src\tpcc.def
# End Source File
# Begin Source File
SOURCE=.\src\tpcc.rc
# End Source File
# End Group
# Begin Group "Header Files"
# PROP Default_Filter "*.h, *.hpp"
# Begin Source File
SOURCE=..\common\src\error.h
# End Source File
# Begin Source File
SOURCE=..\common\src\ReadRegistry.h
# End Source File
# Begin Source File
SOURCE=.\src\tpcc.h
# End Source File
# Begin Source File
SOURCE=..\db_dblib_dll\src\tpcc_dblib.h
# End Source File

```

```

# Begin Source File
SOURCE=..\db_odbcc_dll\src\tpcc_odbcc.h
# End Source File
# Begin Source File

SOURCE=..\tm_tuxedo_dll\src\tpcc_tux.h
# End Source File
# Begin Source File

SOURCE=..\common\src\trans.h
# End Source File
# Begin Source File

SOURCE=..\common\src\txn_base.h
# End Source File
# End Group
# End Target
# End Project

```

rftime.h

```

/* FILE: rftime.h : header file
 * Copyright 1997 Microsoft Corp., All rights
reserved.
*
* Source code licensed to Tandem Computers for
Internal
* use only. Redistribution of source or object
files or
* any derivative works is prohibited. By agreement,
this
* notice may not be removed.
*
* Authors: Charles Levine, Philip Durr
* Microsoft Corp.
*/
//FILE: RTETIME.H

#define MAX_JULIAN_TIME
0x7FFFFFFFFFFFFF
#define JULIAN_TIME __int64
#define TC_TIME DWORD
extern "C"
{
BOOL InitJulianTime(LPSYSTEMTIME
lpInitTime);
JULIAN_TIME GetJulianTime(void);
DWORD MyTickCount(void);
void GetJulianAndTC(JULIAN_TIME
*pJulian, DWORD *pTC);
JULIAN_TIME ConvertTo64BitTime(int iYear, int
iMonth, int iDay, int iHour, int iMinute, int
iSecond);
JULIAN_TIME Get64BitTime(LPSYSTEMTIME
lpInitTime);
int JulianDay( int yr, int
mm, int dd );

```

```

void JulianToTime(JULIAN_TIME
julianTS, int* yr, int* mm, int* dd, int *hh, int
*mi, int *ss );
void JulianToCalendar( int day, int*
yr, int* mm, int* dd );

```

spinlock.h

```

/* FILE: SPINLOCK.H
 *
* Copyright 1997 Microsoft Corp., All rights
reserved.
*
* Source code licensed to Tandem Computers for
Internal
* use only. Redistribution of source or object
files or
* any derivative works is prohibited. By agreement,
this
* notice may not be removed.
*
* Authors: Mike Parkes, Charles Levine, Philip Durr
* Microsoft Corp.
*/
#ifndef _INC_Spinlock
const LONG LockClosed = 1;
const LONG LockOpen = 0;

*****
* Spinlock and Semaphore locking.
* This class provides a very
conservative locking scheme.
* The assumption behind the code is that
locks will be
* held for a very short time. When a
lock is taken a memory
* location is exchanged. All other
threads that want this
* lock wait by spinning and sometimes
sleeping on a semaphore
* until it becomes free again. The only
other choice is not
* to wait at all and move on to do
something else. This
* module should normally be used in
conjunction with cache
* aligned memory to minimize cache line
misses.
*
*****
class Spinlock
{
    // Private data.

```

```

HANDLE
Semaphore; volatile LONG
m_Spinlock; volatile LONG
Waiting;

#ifdef _DEBUG
// Counters for
debugging builds.
TotalLocks; volatile LONG
TotalSleeps; volatile LONG
TotalSpins; volatile LONG
TotalWaits; volatile LONG
#endif

public:
// Public functions.
Spinlock( void );
inline BOOL ClaimLock(
BOOL Wait = TRUE );
inline void ReleaseLock( void );
~Spinlock( void );
// Disabled operations.
Spinlock( const
Spinlock & Copy );
void operator=( const
Spinlock & Copy );

private:
// Private functions.
inline BOOL
ClaimSpinlock( volatile LONG *sl );
void WaitForLock( void );
void WakeAllSleepers(
void );
};

*****
* A guaranteed atomic exchange.
*
* An attempt is made to claim the
Spinlock. This action is
* guaranteed to be atomic.
*

inline BOOL Spinlock::ClaimSpinlock(
volatile LONG *Spinlock )
{
#ifdef _DEBUG

```

```

        InterlockedIncrement(
(LPLONG) & TotalLocks );
        #endif
        return ( ((*Spinlock) ==
LockOpen) && (InterlockedExchange( (LPLONG)Spinlock,
LockClosed ) == LockOpen) );
    }

    ****
    *
    *      Claim the Spinlock.
    *
    *      Claim the lock if available else wait
or exit.
    *

    ****
        inline BOOL Spinlock::ClaimLock( BOOL Wait
)
    {
        if ( ! ClaimSpinlock( (volatile
LONG*) & m_Spinlock ) )
        {
            if ( Wait )

                WaitForLock();
            return Wait;
        }
        return TRUE;
    }

    ****
    *
    *      Release the Spinlock.
    *
    *      Release the lock and if needed wakeup
any sleepers.
    *

    ****
    ***

        inline void Spinlock::ReleaseLock( void )
{
    m_Spinlock = LockOpen;
    if ( Waiting > 0 )
        WakeAllSleepers();
}

#define _INC_Spinlock
#endif

```

tm_com_dll.ds

p

```

# Microsoft Developer Studio Project File -
Name="tm_com_dll" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tm_com_dll - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tm_com_dll.mak" CFG="tm_com_dll -
Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tm_com_dll - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "tm_com_dll - Win32 Debug" (based on "Win32
(x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rsrc.exe

!IF $(CFG) == "tm_com_dll - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MDd /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktypplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktypplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386

# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386 /out:".bin\tpcc_com.dll"

!ELSEIF $(CFG) == "tm_com_dll - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MD /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktypplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktypplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe

# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdctype:sept

# ADD LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /out:".bin\tpcc_com.dll" /pdctype:sept

!ENDIF

# Begin Target

# Name "tm_com_dll - Win32 Release"
# Name "tm_com_dll - Win32 Debug"
# Begin Source File

SOURCE=.src\tpcc_com.cpp
# End Source File
# Begin Source File
```

```
SOURCE=.\src\tpcc_com.h
# End Source File
# End Target
# End Project
```

tpcc.cpp

```
/*
 * FILE: TPCC.C Microsoft
 * TPC-C Kit Ver. 4.20.000 Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * Version 4.10.000 audited by Richard Gimarc, Performance Metrics, 3/17/99
 *
 * PURPOSE: Main module for TPCC.DLL which is an ISAPI service dll.
 * Contact: Charles Levine (clevine@microsoft.com)
 *
 * Change history:
 * 4.20.000 - reworked error handling; added options for COM and Encina txn monitors
 */

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys/timeb.h>
#include <iob.h>
#include <assert.h>

#include <sqatypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "..\common\src\trans.h"
//tpckit transaction header contains definitions of structures specific to TPC-C
#include "..\common\src\error.h"
#include "..\common\src\txnbase.h"
#include "..\common\src\ReadRegistry.h"

#include "..\common\txnlog\include\runtime.h"
#include "..\common\txnlog\include\spinlock.h"
#include "..\common\txnlog\include\txnlog.h"

// Database layer includes
```

```
#include "..\db_dblib_dll\src\tpcc_dbllib.h"
// DBLIB implementation of TPC-C txns
#include "..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on TPC-C txns
#include "..\tm_tuxedo_dll\src\tpcc_tux.h"
// interface to Tuxedo libraries
#include "..\tm_encina_dll\src\tpcc_enc.h"
// interface to Encina libraries

#include "httpext.h"
//ISAPI DLL information header
#include "tpcc.h"
//this dlls specific structure, value e.t. header.

#define LEN_ERR_STRING 256
// defines for Make<Txn>Form calls to distinguish input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];
;

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version level of this web client interface.
// The RTE must be synchronized with the interface level on login, otherwise the login will fail. This is a sanity check to catch problems resulting from mismatched versions // of the RTE and web client.
#define WEBCLIENT_VERSION "410"

static CRITICAL_SECTION TermCriticalSection;
static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog *txnDelilog = NULL;
//used to log delivery transaction information
```

```
HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery transactions cache
DELIVERY_TRANSACTION *pDelBuff = NULL;
DWORD dwDelBuffSize = 100;
// size of circular buffer for delivery txns
DWORD dwDelBuffFreeCount;
// number of buffers free
DWORD dwDelBuffBusyIndex = 0;
// index position of entry waiting to be delivered
DWORD dwDelBuffFreeIndex = 0;
// index position of unused entry
#include "..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point for the DLL. This implementation is based on the
* fact that DLL_PROCESS_ATTACH is only called from the inet service once.
*
* ARGUMENTS: HANDLE hModule
* module handle
* DWORD ul_reason_for_call reason for call
* LPVOID lpReserved
* reserved for future use
*
* RETURNS: BOOL FALSE
* errors occurred in initialization
*
* TRUE
* successfully initialized
*/
BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
```

```

        DWORD i;
        char szEvent[LEN_ERR_STRING] = "\0";
        char szLogFile[128];
        char szDlName[128];

        try
        {
            switch( ul_reason_for_call )
            {
                case
DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
                    GetComputerName(szMyComputerName, &dwSize);
                    szMyComputerName[dwSize] = 0;
                }

                DisableThreadLibraryCalls((HMODULE)hModule)
;

                InitializeCriticalSection(&TermCriticalSection);

                if (
                    ReadTPCCRegistrySettings( &Reg ) )
                    throw new CWEBCNNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

                    dwDelBuffSize
= min( Reg.dwMaxPendingDeliveries, 10000 ); // min
with 10000 as a sanity constraint

                    dwNumDeliveryThreads = min(
Reg.dwNumberOfDeliveryThreads, 100 ); // min with
100 as a sanity constraint

                    TermInit();
                }

                // load DLL
for txn monitor
                if
(Reg.eTxnMon == TUXEDO)
                {
                    strcpy( szDlName, Reg.szPath );
                    strcat( szDlName, "tpcc_tuxedo.dll");
                    hLibInstanceTm = LoadLibrary( szDlName );
                    if
(hLibInstanceTm == NULL)
                        throw new CWEBCNNT_ERR( ERR_LOADDLL_FAILED,
szDlName, GetLastError() );
                }

                // get function pointer to wrapper for class constructor

```

```

pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
GetProcAddress(hLibInstanceTm, "CTPCC_TUXEDO_new");
if
(pCTPCC_TUXEDO_new == NULL)
    throw new CWEBCNNT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
else if
(Reg.eTxnMon == ENCINA)
{
    strcpy( szDlName, Reg.szPath );
    strcat( szDlName, "tpcc_encina.dll");
    hLibInstanceTm = LoadLibrary( szDlName );
    if
(hLibInstanceTm == NULL)
        throw new CWEBCNNT_ERR( ERR_LOADDLL_FAILED,
szDlName, GetLastError() );
    // get function pointer to wrapper for class constructor
    pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_new");
    pCTPCC_ENCINA_post_init =
(TYPE_CTPCC_ENCINA*)
GetProcAddress(hLibInstanceTm, "CTPCC_ENCINA_post_init
");
    if
(pCTPCC_ENCINA_new == NULL)
        throw new CWEBCNNT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
else if
(Reg.eTxnMon == COM)
{
    strcpy( szDlName, Reg.szPath );
    strcat( szDlName, "tpcc_com.dll");
    hLibInstanceTm = LoadLibrary( szDlName );
    if
(hLibInstanceTm == NULL)
        throw new CWEBCNNT_ERR( ERR_LOADDLL_FAILED,
szDlName, GetLastError() );
    // get function pointer to wrapper for class constructor
    pCTPCC_COM_new = (TYPE_CTPCC_COM*)
GetProcAddress(hLibInstanceTm, "CTPCC_COM_new");
    if
(pCTPCC_COM_new == NULL)

```

```

        throw new CWEBCNNT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
    }

    // load DLL
for database connection
    if
((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
    {
        if
(Reg.eDB_Protocol == DBLIB)
    {
        strcpy( szDlName, Reg.szPath );
        strcat( szDlName, "tpcc_dblib.dll");
        hLibInstanceDb = LoadLibrary( szDlName );
        if
(hLibInstanceDb == NULL)
            throw new CWEBCNNT_ERR(
ERR_LOADDLL_FAILED, szDlName, GetLastError() );
        // get function pointer to wrapper for
        class constructor
        pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");
        if
(pCTPCC_DBLIB_new == NULL)
            throw new CWEBCNNT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
        else if
(Reg.eDB_Protocol == ODBC)
    {
        strcpy( szDlName, Reg.szPath );
        strcat( szDlName, "tpcc_odbc.dll");
        hLibInstanceDb = LoadLibrary( szDlName );
        if
(hLibInstanceDb == NULL)
            throw new CWEBCNNT_ERR(
ERR_LOADDLL_FAILED, szDlName, GetLastError() );
        // get function pointer to wrapper for
        class constructor
        pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
        if
(pCTPCC_ODBC_new == NULL)
            throw new CWEBCNNT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
    }
}

```

```

        }

    }

(dwNumDeliveryThreads)
{
}

for deferred delivery txns:                                //

    hDoneEvent = CreateEvent( NULL, TRUE /* manual reset */ , FALSE /* initially not signalled */ , NULL );

    InitializeCriticalSection(&DelBuffCriticalSection);

    hWorkerSemaphore = CreateSemaphore( NULL, 0, dwDelBuffSize, NULL );

    dwDelBuffFreeCount = dwDelBuffSize;

    InitJulianTime(NULL);

    // create unique log file name based on delilog-yyyymmdd-hhmm.log

    SYSTEMTIME Time;
    GetLocalTime( &Time );
    wsprintf( szLogFile, "%sdelivery-%2.2d%2.2d%2.2d%2.2d.log",
              Reg.szPath, Time.wYear % 100,
              Time.wMonth, Time.wDay, Time.wHour, Time.wMinute );

    txnDelilog = new CTxnLog(szLogFile,
                           TXN_LOG_WRITE);

    // write event into txn log for START

    txnDelilog->WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
                                   sizeof(szMyComputerName));

    // allocate structures for delivery buffers and thread mgmt

    pDeliHandles = new HANDLE[dwNumDeliveryThreads];
    pDelBuff = new DELIVERY_TRANSACTION[dwDelBuffSize];           //

    launch DeliveryWorkerThread to perform actual delivery txns

    for(i=0; i<dwNumDeliveryThreads; i++)
    {
}

```

```

        }

        if (pDeliHandles[i] == INVALID_HANDLE_VALUE)

            throw new CWEBCLNT_ERR(
ERR_DELIVERY_THREAD_FAILED );
        }

        break;

        case DLL_PROCESS_DETACH:
        if (dwNumDeliveryThreads)
        {
            if (txnDelilog != NULL)
            {
                //write event into txn log for STOP

                txnDelilog->WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
                                   sizeof(szMyComputerName));

                // This will do a clean shutdown of the delivery log file

                CTxnLog *txnDelilogLocal = txnDelilog;
                txnDelilog= NULL;
                delete txnDelilogLocal;
            }

            delete [] pDeliHandles;
            delete [] pDelBuff;

            CloseHandle( hWorkerSemaphore );
            CloseHandle( hDoneEvent );
            DeleteCriticalSection(&DelBuffCriticalSection);
        }

        DeleteCriticalSection(&TermCriticalSection);
        if (hLibInstanceTm != NULL)
            FreeLibrary( hLibInstanceTm );
}

```

```

        hLibInstanceTm = NULL;
        if (hLibInstanceDb != NULL)
            FreeLibrary( hLibInstanceDb );
        hLibInstanceDb = NULL;
        Sleep(500);
        break;

        default: /* nothing */
    }

    catch (CBaseErr *e)
    {
        WriteMessageToEventLog( e->ErrorText() );
        delete e;
        TerminateExtension(0);
        return FALSE;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled exception. DLL could not load."));
        TerminateExtension(0);
        return FALSE;
    }
    return TRUE;
}

/* FUNCTION: GetExtensionVersion
 *
 * PURPOSE: This function is called by the inet service when the DLL is first loaded.
 *
 * ARGUMENTS: HSE_VERSION_INFO *pVer
 *            passed in structure in which to place expected version number.
 *
 * RETURNS: TRUE      inet service expected return value.
 */

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO *pVer)
{
    pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpyn(pVer->lpszExtensionDesc, "TPC-C Server.", HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
}

```

```

        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
 *
 * PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.
 *           Release all resources
in anticipation of being unloaded.
 *
 * RETURNS:      TRUE      inet service
expected return value.
 */

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
 *
 * PURPOSE: This function is the main entry
point for the TPCC DLL. The internet service
           calls this function
passing in the http string.
 *
 * ARGUMENTS: EXTENSION_CONTROL_BLOCK
 *             *pECB      structure pointer to passed in
internet
 *
           service information.
 *
 * RETURNS:      DWORD
 *               HSE_STATUS_SUCCESS
connection can be dropped if
error
 *
           HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
 *
 * COMMENTS: None
 *
 */
DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int                     iCmd, FormId,
TermId, iSyncId;

```

```

char          szBuffer[4096];
int           lpbSize;
static char   szHeader[] = "200 Ok";
DWORD         dwSize = 6;
/* initial value is strlen(szHeader)
char          szHeader[4096];

#endif ICECAP
StartCAP();
#endif

try
{
    //process http query
    ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

    if (TermId != 0)
    {
        if (TermId < 0 ||
Term.pClientData[TermId].iNextFree != -1 )
        {
            // debugging...
            szTmp[128];
            wsprintf(
szTmp, "Invalid term ID; Termid = %d", TermId );

            WriteMessageToEventLog( szTmp );
            throw new
CWEBCLNT_ERR( ERR_INVALID_TERMID );
        }
        //must have a valid
syncid here since termid is valid
        if (iSyncId !=
Term.pClientData[TermId].iSyncId)
            throw new
CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
        //set use time
        Term.pClientData[TermId].iTickCount =
GetTickCount();
    }

    switch(iCmd)
    {
        case 0:
            WelcomeForm(pECB,
szBuffer);
            break;
        case 1:
            switch( FormId )
            {
                case
WELCOME_FORM:
MAIN_MENU_FORM:
                break;
NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId,
szBuffer);
                break;
PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId, szBuffer);
                break;
DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId,
szBuffer);
                break;
ORDER_STATUS_FORM:
                ProcessOrderStatusForm(pECB, TermId,
szBuffer);
                break;
STOCK_LEVEL_FORM:
                ProcessStockLevelForm(pECB, TermId,
szBuffer);
                break;
            }
            break;
        case 2: // new-order selected
from menu; display new-order input form
            MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
            break;
        case 3: // payment selected
from menu; display payment input form
            MakePaymentForm(TermId,
NULL, INPUT_FORM, szBuffer);
            break;
        case 4: // delivery selected
from menu; display delivery input form
            MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
            break;
        case 5: // order-status
selected from menu; display order-status input form
    }
}

```

```

        MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
                break;
        case 6: // stock-level selected
from menu; display stock-level input form

        MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
                break;
        case 7: // ExitCmd
TermDelete(TermId);
WelcomeForm(pECB,
szBuffer);
                break;
        case 8: SubmitCmd(pECB,
szBuffer);
                break;
        case 9: // menu

        MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
                break;
        case 10: // CMD=Clear
// resets all
connections; should only be used when no other
connections are active
TermDeleteAll();
TermInit();
WelcomeForm(pECB,
szBuffer);
                break;
        case 11: // CMD=Stats
StatsCmd(pECB,
szBuffer);
                break;
}
}
catch (CBaseErr *e)
{
        ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
        delete e;
}
catch (...)
{
        ErrorForm( pECB, ERR_TYPE_WEBDLL,
0, TermId, iSyncId, "Error: Unhandled exception in
Web Client.", szBuffer );
}

#ifndef ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);

```

```

wsprintf(szHeader1,
"text/html\r\n"
"\r\n"
"%d\r\n"
"\r\n"
"Content-Type: "
"Content-Length: "
"Connection: Keep-Alive\r\n"
"\r\n"
(*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatuscode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));

    _sprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                    EVENTLOG_ERROR_TYPE, // event type
                    0, // event category
                    0, // event ID
                    NULL, // current user's
SID
                    2, // strings in
lpszStrings
                    0, // no bytes of raw
data
                    (LPCTSTR *)lpszStrings, // array of
error strings
                    NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred
delivery txns. There are typically several
* threads running this
routine. The number of threads is determined by an
entry

```

```

* read from the registry.
The thread waits for work by waiting on semaphore.
* When a delivery txn is
posted, the semaphore is released. After processing
* the delivery txn,
information is logged to record the txn status and
execution
*
time.

/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE *pTxn = NULL;

    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF txnDeliRec;

    DWORD index;
    HANDLE handles[2];

    SYSTEMTIME trans_end;
    time //delivery transaction finished

    SYSTEMTIME trans_start;
    //delivery transaction start time

    int iRetryCnt = 0;
    static int iMaxRetries = 10;

    assert(txnDeliLog != NULL);

    Reconnect:
    try
    {
        if (Reg.eDB_Protocol == ODBC)
            pTxn = pCTPCC_ODBC_new(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol ==
DBLIB)
            pTxn =
pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
            pDeliveryData = pTxn-
>BuffAddr_Delivery();
    }
    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
"%s.
Server=%s, User=%s, Password=%s, Database=%s",
e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
    }
}

```

```

        delete e;

        // will retry connection up to
ten times
        if (iRetryCnt++ < iMaxRetries)
        {
            Sleep(5000);           // delay for 5 seconds
            goto Reconnect;
        }

        wsprintf( szTmp, "Delivery Txn thread terminating after %d retries.", iMaxRetries );
        WriteMessageToEventLog( szTmp );
        goto ErrorExit;
    }

    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled exception caught in DeliveryWorkerThread. Delivery Txn thread terminating."));
        goto ErrorExit;
    }

    while (TRUE)
    {
        try
        {
            //while delivery thread running, i.e. user has not requested termination
            while (TRUE)
            {
                // need to wait for multiple objects: program exit or worker semaphore;
                handles[0] = hDoneEvent;
                handles[1] =
hWorkerSemaphore;
                index = WaitForMultipleObjects( 2, &handles[0], FALSE,
INFINITE );
                if (index ==
WAIT_OBJECT_0)

                goto ErrorExit;

                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;
                // make a local copy of current entry from delivery buffer and increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection
n);

```

```

        *(pDelBuff+dwDelBuffBusyIndex);

        dwDelBuffFreeCount++;

        dwDelBuffBusyIndex++;
        if (dwDelBuffBusyIndex == dwDelBuffSize) // wrap-around if at end of buffer
            dwDelBuffBusyIndex = 0;

        LeaveCriticalSection(&DelBuffCriticalSection
n);

        pDeliveryData->w_id = delivery.w_id;
        pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;
        txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;
        txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);
        GetLocalTime(
&trans_start );
        pTxn-
>Delivery();
        GetLocalTime(
&trans_end );
        //log txn
        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
i<10; i++)
            txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];
        txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);
        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));
        if (txnDeliLog != NULL)
            txnDeliLog->WriteToLog(&txnDeliRec);
        catch (CBaseErr *e)
        {

```

```

            char szTmp[1024];
            wsprintf( szTmp, "Error in Delivery Txn thread. %s", e->ErrorText() );
            WriteMessageToEventLog( szTmp );

            // log the error txn
            txnDeliRec.TxnStatus =
e->ErrorType();
            if (txnDeliLog != NULL)
                txnDeliLog-
>WriteToLog(&txnDeliRec);

            delete e;
        }
        catch (...)
        {
            // unhandled exception;
            shouldn't happen; not much we can do...
            WriteMessageToEventLog(TEXT("Unhandled exception caught in DeliveryWorkerThread."));
        }
    }

    ErrorExit:
        delete pTxn;
        _endthread();
}

/* FUNCTION: PostDeliveryInfo
 *
 * PURPOSE: This function enters the delivery txn into the deferred delivery buffer.
 *
 * RETURNS:      BOOL      FALSE
 *               delivery information posted successfully
 *               TRUE      error cannot post delivery info
 */
BOOL PostDeliveryInfo(short w_id, short o_carrier_id)
{
    BOOL bError;
    EnterCriticalSection(&DelBuffCriticalSection
n);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)->w_id =
w_id;
        (pDelBuff+dwDelBuffFreeIndex)->o_carrier_id =
o_carrier_id;
        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex-
>queue));
        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex ==
dwDelBuffSize)

```

```

        dwDelBuffFreeIndex = 0;
    buffer
    }
    else
        // wrap-around if at end of
        // No free buffers. Return an
        error, which indicates that the delivery buffer is
        full.
        // Most likely, the number of
        delivery worker threads needs to be increased to keep
        up
        // with the txn rate.
        bError = TRUE;
        LeaveCriticalSection(&DelBuffCriticalSection);
    }

    if (!bError)
        // increment worker semaphore to
        wake up a worker thread
        ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );
    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the
relevent information out of the http command passed
in from
* the browser.
*
* COMMENTS: If this is the initial connection
i.e. client is at welcome screen then
* there will
not be a terminal id or current form id. If this is
the case
* then the
pTermid and pFormid return values are undefined.
*/
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncid)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmnds[] =
    {
        "Process", "..NewOrder..",
        "..Payment..", "..Delivery..", "..Order-Status..",
        "..Stock-Level..",
        "...Exit..", "Submit", "Menu",
        "Clear", "Stats", ""
    };
    *pCmd      = 0;           // default is
the login screen
    *pTermId = 0;
}

```

```

        // if no params (i.e., empty query string),
        then return login screen
        if (strlen(pECB->lpszQueryString) == 0)
            return;

        // parse FORMID, TERMID, and SYNCID
        *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
        *pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
        *pSyncid = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

        // parse CMD
        GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

        // see which command it matches
        for(i=0; ; i++)
        {
            if (szCmnds[i][0] == 0)
                // no more; no match;
            return error
            throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
            if ( !strcmp(szCmnds[i], szBuffer)
)
            {
                *pCmd = i+1;
                break;
            }
        }

/* FUNCTION: void WelcomeForm
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szbuffer,
"<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"

        "<font face=\"Courier New\"><PRE>"
        "Compiled: __DATE__ , __TIME__ <BR>
        "Source: __FILE__ ( __TIMESTAMP__ )"
<BR>"

        "</PRE></font>"

        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">"

```

```

        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">"

        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">"

        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">"

        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"0\">"

        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">"

        "<INPUT TYPE=\"hidden\" NAME=\"VERSION\" VALUE=\"\" WEBCLIENT_VERSION \">"

        sprintf( szTmp, "Configuration
Settings: <BR><font face=\"Courier New\" color=\"blue\"><PRE>"

        "Txn Monitor          = <B>%s</B><BR>
        "Database protocol     = <B>%s</B><BR>
        "Max Connections       = <B>%d</B><BR>
        "# of Delivery Threads = <B>%d</B><BR>
        "Max Pending Deliveries = <B>%d</B><BR>
        szTxnMonNames[Reg.eTxnMon],
        szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
        dwNumDeliveryThreads, dwDelBuffSize );
        strcat( szBuffer, szTmp );

        if (Reg.eTxnMon == COM)
        {
            sprintf( szTmp, "COM Single
Pool      = <B>%s</B><BR>",
            Reg.bCOM_SinglePool ?
"YES" : "NO" );
            strcat( szBuffer, szTmp );
        }
        strcat( szBuffer, "</PRE></font>");

        if (Reg.eTxnMon == None)
            // connection options may be
specified when not using a txn monitor
            sprintf( szTmp, "Please enter
your database options for this connection:<BR>
        "<font face=\"Courier New\" color=\"blue\"><PRE>"

        "DB Server      = <INPUT NAME=\"db_server\" SIZE=20 VALUE=\"%s\"><BR>"


```

```

        "DB User ID    = <INPUT NAME=\"db_user\"  

SIZE=20 VALUE=\"%s\"><BR>"  

        "DB Password   = <INPUT NAME=\"db_passwd\"  

SIZE=20 VALUE=\"%s\"><BR>"  

        "DB Name       = <INPUT NAME=\"db_name\"  

SIZE=20 VALUE=\"%s\"><BR>"  

        "</PRE></font>"  

, Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,  

Reg.szDbName );  

        else  

            // if using a txn monitor,  

connection options are determined from registry;  

can't  

            // set per user. show options  

fyi  

            sprintf( szTmp, "Database  

options which will be used by the transaction  

monitor:<BR>"  

        "<font face=\"Courier New\"  

color=\"blue\"><PRE>"  

        "DB Server      = <B>%s</B><BR>"  

        "DB User ID     = <B>%s</B><BR>"  

        "DB Password    = <B>%s</B><BR>"  

        "DB Name        = <B>%s</B><BR>"  

        "</PRE></font>"  

, Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,  

Reg.szDbName );  

        strcat( szBuffer, szTmp );  

        sprintf( szTmp, "Please enter your  

Warehouse and District for this session:<BR>"  

        "<font face=\"Courier New\"  

color=\"blue\"><PRE>" );
        strcat( szBuffer, szTmp );
        strcat( szBuffer, "Warehouse ID = <INPUT  

NAME=\"w_id\" SIZE=4<BR>"  

        "District ID   = <INPUT NAME=\"d_id\"  

SIZE=2><BR>"  

        "</PRE></font><HR>"  

        "<INPUT TYPE=\"submit\" NAME=\"CMD\"  

VALUE=\"Submit\">"  

        "</FORM></BODY></HTML>" );
    }  

/* FUNCTION: SubmitCmd
*/

```

```

        * PURPOSE: This function allocated a new  

terminal id in the Term structure array.  

        *  

        */  

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char  

*szBuffer)  

{
    int             iNewTerm;
    char    *ptr = pECB->lpszQueryString;
    char    szVersion[32]      = { 0 };
    char    szServer[32]       = { 0 };
    char    szUser[32]         = "sa";
    char    szPassword[32]     = { 0 };
    char    szDatabase[32]     = "tpcc";  

    // validate version field; the version  

field ensures that the RTE is synchronized with the  

web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );
  

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);
    }
  

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );
  

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );
  

    iNewTerm = TermAdd();
  

    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

```

```

try
{
    if (Reg.eTxnMon == TUXEDO)
        Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
    else if (Reg.eTxnMon == ENCINA)
        Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
    else if (Reg.eTxnMon == COM)
        Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
    else if (Reg.eDB_Protocol ==
ODBC)
        Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName, szDatabase );
    else if (Reg.eDB_Protocol ==
DBLIB)
        Term.pClientData[iNewTerm].pTxn =
pCTPCC_DBLIB_new( szServer, szUser, szPassword,
szMyComputerName, szDatabase );
}
catch (...)
{
    TermDelete(iNewTerm);
    throw; // pass
exception upward
}

MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the
browser the total number of active terminal ids.
* This routine is for
development/debugging purposes.
*/
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char  

*szBuffer)
{
    int i;
    int    iTotal;
    EnterCriticalSection(&TermCriticalSection);
    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)                                iTotal++;
    }
}
```

```

LeaveCriticalSection(&TermCriticalSection);

wsprintf( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>" 
        "<BODY><B><BIG> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>" 
            , iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {           ERR_COMMAND_UNDEFINED,
        "Command undefined."
                    },
        {           ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10."
                    },
        {           ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range
must be 1 - 10."
                    },
        {           ERR_DELIVERY_CARRIER_INVALID,
        "Delivery Carrier ID invalid must be
numeric 1 - 10."
                    },
        {           ERR_DELIVERY_MISSING_OCD_KEY,
        "Delivery missing Carrier ID key \\"OCD*\"."
                    },
        {           ERR_DELIVERY_THREAD_FAILED,
        "Could not start delivery worker
thread."
                    },
        {           ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL.  GetProcAddress
error.  DLL="
                    },
        {           ERR_HTML_ILL_FORMED,
        "Required key field is missing from HTML
string."
                    },
        {           ERR_INVALID_SYNC_CONNECTION,
        "Invalid Terminal Sync ID."
                    },
        {           ERR_INVALID_TERMID,
        "Invalid Terminal ID."
                    },
    };
}

```

```

        {
            ERR_LOADDLL_FAILED,
            "Load of DLL failed.  DLL="
                    },
        {
            ERR_MAX_CONNECTIONS_EXCEEDED,
            "No connections available.  Max Connections
is probably too low."
                    },
        {
            ERR_MISSING_REGISTRY_ENTRIES,
            "Required registry entries are missing.
Rerun INSTALL to correct."
                    },
        {
            ERR_NEWORDER_CUSTOMER_INVALID,
            "New Order customer id invalid
data type, range = 1 to 3000."
                    },
        {
            ERR_NEWORDER_CUSTOMER_KEY,
            "New Order missing Customer key
\"CID*\"."
                    },
        {
            ERR_NEWORDER_DISTRICT_INVALID,
            "New Order District ID Invalid
range 1 - 10."
                    },
        {
            ERR_NEWORDER_FORM_MISSING_DID,
            "New Order missing District key
\"DID*\"."
                    },
        {
            ERR_NEWORDER_ITEMID_INVALID,
            "New Order Item Id is wrong data type, must
be numeric."
                    },
        {
            ERR_NEWORDER_ITEMID_RANGE,
            "New Order Item Id is out of
range. Range = 1 to 99999."
                    },
        {
            ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
            "New Order Item_Id field entered without a
corresponding Supp_W."
                    },
        {
            ERR_NEWORDER_MISSING_IID_KEY,
            "New Order missing Item Id key \\"IID*\"."
                    },
        {
            ERR_NEWORDER_MISSING_QTY_KEY,
            "New Order Missing Qty key \\"Qty##*\\"."
                    },
        {
            ERR_NEWORDER_MISSING_SUPPW_KEY,
            "New Order missing Supp_W key
\"SP##*\\"."
                    },
        {
            ERR_NEWORDER_NOITEMS_ENTERED,
            "New Order No order lines entered."
        },
        {
            ERR_NEWORDER_QTY_INVALID,
            "New Order Qty invalid must be
numeric range 1 - 99."
        },
        {
            ERR_NEWORDER_QTY_RANGE,
            "New Order Qty is out of range. Range = 1
to 99."
        },
        {
            ERR_NEWORDER_QTY_WITHOUT_SUPPW,
            "New Order Qty field entered
without a corresponding Supp_W."
        },
        {
            ERR_NEWORDER_SUPPW_INVALID,
            "New Order Supp_W invalid data
type must be numeric."
        },
        {
            ERR_NO_SERVER_SPECIFIED,
            "No Server name specified."
        },
        {
            ERR_ORDERSTATUS_CID_AND_CLT,
            "Order Status Only Customer ID or Last Name
may be entered, not both."
        },
        {
            ERR_ORDERSTATUS_CID_INVALID,
            "Order Status Customer ID invalid, range
must be numeric 1 - 3000."
        },
        {
            ERR_ORDERSTATUS_CLT_RANGE,
            "Order Status Customer last name
longer than 16 characters."
        },
        {
            ERR_ORDERSTATUS_DID_INVALID,
            "Order Status District invalid, value must
be numeric 1 - 10."
        },
        {
            ERR_ORDERSTATUS_MISSING_CID_CLT,
            "Order Status Either Customer ID or Last
Name must be entered."
        },
        {
            ERR_ORDERSTATUS_MISSING_CID_KEY,
            "Order Status missing Customer key
\"CID*\"."
        },
        {
            ERR_ORDERSTATUS_MISSING_CLT_KEY,
            "Order Status missing Customer Last Name
key \\"CLT*\"."
        },
        {
            ERR_ORDERSTATUS_MISSING_DID_KEY,
            "Order Status missing District key
\"DID*\"."
        },
        {
            ERR_PAYMENT_CDI_INVALID,
            "Payment Customer district
"
        },
    };
}

```

```

invalid must be numeric."
},
{
    ERR_PAYMENT_CID_AND_CLT,
    "Payment Only Customer ID or Last
Name may be entered, not both."
},
{
    ERR_PAYMENT_CUSTOMER_INVALID,
    "Payment Customer data type invalid, must
be numeric."
},
{
    ERR_PAYMENT_CWI_INVALID,
    "Payment Customer Warehouse
invalid, must be numeric."
},
{
    ERR_PAYMENT_DISTRICT_INVALID,
    "Payment District ID is invalid, must be 1
- 10."
},
{
    ERR_PAYMENT_HAM_INVALID,
    "Payment Amount invalid data type
must be numeric."
},
{
    ERR_PAYMENT_HAM_RANGE,
    "Payment Amount out of range, 0 - 9999.99."
},
{
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    "Payment Customer last name
longer than 16 characters."
},
{
    ERR_PAYMENT_MISSING_CDI_KEY,
    "Payment missing Customer district key
\"CDI*\"."
},
{
    ERR_PAYMENT_MISSING_CID_CLT,
    "Payment Either Customer ID or Last Name
must be entered."
},
{
    ERR_PAYMENT_MISSING_CID_KEY,
    "Payment missing Customer Key \"CID*\"."
},
{
    ERR_PAYMENT_MISSING_CLT_KEY,
    "Payment missing Customer Last Name key
\"CLT*\"."
},
{
    ERR_PAYMENT_MISSING_CWI_KEY,
    "Payment missing Customer Warehouse key
\"CWI*\"."
},
{
    ERR_PAYMENT_MISSING_DID_KEY,
    "Payment missing District Key \"DID*\"."
},

```

```

{
    ERR_PAYMENT_MISSING_HAM_KEY,
    "Payment missing Amount key \"HAM*\"."
},
{
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    "Stock Level; missing Threshold key
\"TT*\"."
},
{
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    "Stock Level; Threshold value must be in
the range = 1 - 99."
},
{
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    "Stock Level Threshold out of
range, range must be 1 - 99."
},
{
    ERR_VERSION_MISMATCH,
    "Invalid version field. RTE and Web Client
are probably out of sync."
},
{
    ERR_W_ID_INVALID,
    "Invalid Warehouse ID."
},
{
    0,
    ""
},
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );

```

```

return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE: This function parses a http
formatted string for specific key values.
*
* ARGUMENTS: char
*             *pQueryString      http string from client
browser
*             *pKey                char
key
value to look for
*             *pValue               char
character array into which to place key's
value
*             iMax                  int
maximum length of key value array.
*             err                   WEBERROR
err
error value to throw
*
* RETURNS: nothing.
*
* ERROR: if (the pKey value is not found)
then
*             if (err == 0)
*
*             return (empty string)
*
*             else
*
*             throw CWEBCLNT_ERR(err)
*
* COMMENTS: http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*             TPC-C input
fields in such a manner that the keys can be
extracted in the
*             above manner.
*/
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
null
    while( *ptr && *ptr != '=' && iMax )
    {

```

```

        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWEBCNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
 *
 * PURPOSE: This function parses a http
formatted string for a specific key value.
*
 * ARGUMENTS: char
 *             *pQueryString      http string from client
browser
 *             char
 *             *pKey            key
value to look for
 *             WEBERROR
key not found
 *             NoKeyErr        error value to throw if
value not found
 *             WEBERROR
NotIntErr        error value to throw if
value not numeric
 *
 * RETURNS: integer
 *
 * ERROR: if (the pKey value is not found)
then
 *             if
(NoKeyErr != NO_ERR)
 *
        throw CWEBCNT_ERR(err)
 *
        else
 *
        return 0
 *
        else if (non-
numeric char found) then
 *             if
(NotIntErr != NO_ERR) then
 *
        throw CWEBCNT_ERR(err)
 *
        else
 *
        return 0
 *
 * COMMENTS: http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
 *
 *             TPC-C input
fields in such a manner that the keys can be
extracted in the
 *
 *             above manner.
 */

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;

    ptr0 = ptr; // remember
starting point
    // scan string until a terminator (null or
&) or a non-digit
    while( *ptr && *ptr != '=' && isdigit(*ptr)
)
        ptr++;

    // make sure we stopped scanning for the
right reason
    if ((ptr0 == ptr) || (*ptr && *ptr != '=' ))
    {
        if (NotIntErr != NO_ERR)
            throw new CWEBCNT_ERR(
NoKeyErr );
        return 0;
    }

    *pQueryString = ptr;
    return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWEBCNT_ERR( NoKeyErr );
    return 0;
}

/* FUNCTION: TermInit
 *
 * PURPOSE: This function initializes the
client terminal structure; it is called when the
TPCC.DLL
 *
 *             is first loaded by the
inet service.
 */
 */

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
}

```

```

if (Term.pClientData == NULL)
{
    LeaveCriticalSection(&TermCriticalSection);
    throw new CWEBCNT_ERR(
ERR_MEM_ALLOC_FAILED );
}

ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

Term.iFreeList =
Term.iNumEntries-1;
// build free list
// note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
// This is intentional, as the zero
entry is used as an anchor and never
// allocated as an actual
terminal.
for(int i=0; i<Term.iNumEntries; i++)
    Term.pClientData[i].iNextFree =
i-1;

LeaveCriticalSection(&TermCriticalSection);

/* FUNCTION: TermDeleteAll
 *
 * PURPOSE: This function frees allocated
resources associated with the terminal structure.
 *
 * ARGUMENTS: none
 *
 * RETURNS: None
 *
 * COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
 */
 */

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;
    }

    Term.iFreeList = 0;
    Term.iNumEntries = 0;
    if (Term.pClientData)
        free(Term.pClientData);
    Term.pClientData = NULL;
}

LeaveCriticalSection(&TermCriticalSection);

/* FUNCTION: TermAdd
 */

```

```

/*
 * PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
* assigned terminal id
*/
 */

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
// indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0xFFFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
                iTickCount =
Term.pClientData[i].iTickCount;
            iNewTerm = i;
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requestor.
        if ((GetTickCount() - iTickCount) < 60000)
    }

    LeaveCriticalSection(&TermCriticalSection);
    throw new CWEBCNLT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
}

Term.pClientData[iNewTerm].iTickCount =
GetTickCount();

```

```

Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
Term.pClientData[iNewTerm].pTxn = NULL;

LeaveCriticalSection(&TermCriticalSection);
return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int
* id
* Terminal id of client exiting
*/
void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list

        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncid, char
*szErrorText, char *szBuffer )
{
    wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>" "
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMID\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">
        "</FORM></BODY></HTML>" , iTermId, iSyncid, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
*/
void MakeMainMenuForm(int iTermId, int iSyncid, char
*szForm)
{
    wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>" "Select Desired
Transaction.<BR><HR>" "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMID\" VALUE=\"%d\">
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">
        "</FORM></BODY></HTML>" , iTermId, iSyncid);
}

```

```

        "%s"
        "<BR><BR><HR>" "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">
        "</FORM></BODY></HTML>" , iTermId, iSyncid, szErrorText );

/* FUNCTION: MakeStockLevelForm
*
* PURPOSE: This function constructs the
Stock Level HTML page.

```

```

* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/
}

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int         c;

    c = wsprintf(szForm,
                 "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\""
METHOD=\\"GET\\\""
                 "<INPUT TYPE=\"hidden\""
NAME=\\"STATUSID\\\" VALUE=\"0\">"
                 "<INPUT TYPE=\"hidden\""
NAME=\\"ERROR\\\" VALUE=\"0\">"
                 "<INPUT TYPE=\"hidden\""
NAME=\\"FORMID\\\" VALUE=\"%d\">"
                 "<INPUT TYPE=\"hidden\""
NAME=\\"TERMINAL\\\" VALUE=\"%d\">"
                 "<INPUT TYPE=\"hidden\""
NAME=\\"SYNCID\\\" VALUE=\"%d\\\""
                 "<PRE><font face=\"Courier\">
Stock-Level<BR>"           "Warehouse: %4.4d    District:
%2.2d<BR> <BR>",
                 STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
               "Stock Level Threshold:
<INPUT NAME=\\"TT*\\\" SIZE=2><BR> <BR>
                \" low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>">
                \" <BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"           "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\"Process\\\">
                "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\"Menu\\\">"           "</FORM></HTML> ");
    }
    else
    {
        wsprintf(szForm+c,
               "Stock Level Threshold:
%2.2d<BR> <BR>"
                " low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>">
                " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR></PRE><HR>"

```

```

        "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...NewOrder..\\\">"           "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...Payment..\\\">"           "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...Delivery..\\\">"          "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...Order-Status..\\\">"       "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...Stock-Level..\\\">"         "<INPUT TYPE=\"submit\""
NAME=\\\"CMD\\\" VALUE=\\\"...Exit..\\\">"                 "</FORM></HTML>"
                                         , pStockLevelData-
>threshold, pStockLevelData->low_stock);
}
}

/* FUNCTION: MakeNewOrderForm
*
* COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
*                                     be freed
except when the client terminal id is no longer
needed.
*/
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int             i, c;
    BOOL            bValid;
    static   char szBR[] = "<BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

    c = wsprintf(szForm,
                  "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY> "
                  "<FORM ACTION=\\\"tpcc.dll\\\""
METHOD=\\\"GET\\\""
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"STATUSID\\\" VALUE=\\\"%d\\\">"           "<INPUT TYPE=\"hidden\""
NAME=\\\"ERROR\\\" VALUE=\\\"0\\\">"                 "<INPUT TYPE=\"hidden\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\">"           "<INPUT TYPE=\"hidden\""
NAME=\\\"TERMID\\\" VALUE=\\\"%d\\\">"           "<INPUT TYPE=\"hidden\""
NAME=\\\"SYNCID\\\" VALUE=\\\"%d\\\">"           "<PRE><font face=\\\"Courier\\\">
New Order<BR> "

```

```

        , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

    if ( bInput )
    {
        c += wsprintf(szForm+c,
"Warehouse: %4.4d      ", Term.pClientData[iTermId].w_id
);

        strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID\" SIZE=1>
Date:<BR>"                                "Customer: <INPUT
NAME=\"CID\" SIZE=4>      Name:
Credit:          %Disc:<BR>"                  "Order Number:
Number of Lines:           W_tax:            D_tax:<BR>
<BR>"                                         "Supp_W Item_Id Item
Name          Qty   Stock B/G Price
Amount<BR>"                                     " <INPUT
NAME=\"SP00*\" SIZE=4>  <INPUT NAME=\"IID00*\""
SIZE=6>                                         <INPUT
NAME=\"Qty00*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP01*\" SIZE=4>  <INPUT NAME=\"IID01*\""
SIZE=6>                                         <INPUT
NAME=\"Qty01*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP02*\" SIZE=4>  <INPUT NAME=\"IID02*\""
SIZE=6>                                         <INPUT
NAME=\"Qty02*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP03*\" SIZE=4>  <INPUT NAME=\"IID03*\""
SIZE=6>                                         <INPUT
NAME=\"Qty03*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP04*\" SIZE=4>  <INPUT NAME=\"IID04*\""
SIZE=6>                                         <INPUT
NAME=\"Qty04*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP05*\" SIZE=4>  <INPUT NAME=\"IID05*\""
SIZE=6>                                         <INPUT
NAME=\"Qty05*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP06*\" SIZE=4>  <INPUT NAME=\"IID06*\""
SIZE=6>                                         <INPUT
NAME=\"Qty06*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP07*\" SIZE=4>  <INPUT NAME=\"IID07*\""
SIZE=6>                                         <INPUT
NAME=\"Qty07*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP08*\" SIZE=4>  <INPUT NAME=\"IID08*\""
SIZE=6>                                         <INPUT
NAME=\"Qty08*\" SIZE=1><BR>"                  " <INPUT
NAME=\"SP09*\" SIZE=4>  <INPUT NAME=\"IID09*\""
SIZE=6>                                         <INPUT
NAME=\"Qty09*\" SIZE=1><BR>"                  " <INPUT

```

```

" <INPUT
NAME=\"SP10*\\" SIZE=4> <INPUT NAME=\"IID10*\"
SIZE=6> <INPUT
NAME=\"Qty10*\\" SIZE=1><BR>" " <INPUT
NAME=\"SP11*\\" SIZE=4> <INPUT NAME=\"IID11*\"
SIZE=6> <INPUT
NAME=\"Qty11*\\" SIZE=1><BR>" " <INPUT
NAME=\"SP12*\\" SIZE=4> <INPUT NAME=\"IID12*\"
SIZE=6> <INPUT
NAME=\"Qty12*\\" SIZE=1><BR>" " <INPUT
NAME=\"SP13*\\" SIZE=4> <INPUT NAME=\"IID13*\"
SIZE=6> <INPUT
NAME=\"Qty13*\\" SIZE=1><BR>" " <INPUT
NAME=\"SP14*\\" SIZE=4> <INPUT NAME=\"IID14*\"
SIZE=6> <INPUT
NAME=\"Qty14*\\" SIZE=1><BR>" "Execution Status:
Total:<BR>" "</font></PRE><HR>
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">" "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">" "</FORM></HTML>"
);
}
else
{
    c += wsprintf(szForm+c,
"Warehouse: %4.4d    District: %2.2d
Date: ", pNewOrderData->w_id,
pNewOrderData->d_id);

    if ( bValid )
    {
        c += wsprintf(szForm+c
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pNewOrderData->o_entry_d.day,
pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
    }

    c += wsprintf(szForm+c,
" <BR>Customer: %4.4d    Name: %-16s    Credit: %-2s
",
pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

    if ( bValid )

```

```

    {
        c += sprintf(szForm+c,
                    "%%Disc: %5.2f           <BR>"

                    "Order Number: %8.8d  Number of Lines:
%2.2d          W_tax: %5.2f   D_tax: %5.2f  <BR> <BR>"

                    "  Supp_W  Item_Id  Item Name
Qty  Stock B/G  Price      Amount<BR>",

                    100.0*pNewOrderData->c_discount,
                    pNewOrderData->o_id,
                    pNewOrderData->o.ol_cnt,           100.0 *
pNewOrderData->w_tax,           100.0 *
pNewOrderData->d_tax);

                    for(i=0;
i<pNewOrderData->o.ol_cnt; i++)
{
                    c +=
sprintf(szForm+c, "  %4.4d  %6.6d  %-24s  %2.2d
%3.3d  %1.1s  $%6.2f  $%7.2f  <BR>",

                    pNewOrderData->OL[i].ol_supply_w_id,
                    pNewOrderData->OL[i].ol_i_id,
                    pNewOrderData->OL[i].ol_i_name,
                    pNewOrderData->OL[i].ol_quantity,
                    pNewOrderData->OL[i].ol_stock,
                    pNewOrderData->OL[i].ol_brand_generic,
                    pNewOrderData->OL[i].ol_i_price,
                    pNewOrderData->OL[i].ol_amount );
}
else
{
        c += wsprintf(szForm+c,
                      "%Disc:<BR>" "Order
Number: %8.8d  Number of Lines:          W_tax:
D_tax:<BR> <BR>" "Supp_W
Item_Id  Item Name
Price      Amount<BR>" "Qty  Stock B/G

pNewOrderData->o_id);

                    i = 0;
}
strncpy( szForm+c, szBR, (15-i)*5
);

```

```

c += (15-i)*5;

if ( bValid )
    c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: $%8.2f ",

pNewOrderData->total_amount);
else
    c += wsprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");

strcpy(szForm+c,
"  
</font></PRE><HR>"           "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.NewOrder..\\\">"      "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.Payment..\\\">"        "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.Delivery..\\\">"       "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.Order-Status..\\\">"     "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.Stock-Level..\\\">"      "<INPUT TYPE=\"submit\""
NAME=\\"CMD\\\" VALUE=\\.\\.Exit..\\\">"             "<INPUT TYPE=\"submit\""
                                         "</FORM></HTML>"           ")"
);

}

/* FUNCTION: MakePaymentForm
 *
 * COMMENTS:          The internal client buffer is
 * created when the terminal id is assigned and should
 * not
 *                      be freed
 * except when the client terminal id is no longer
 * needed.
 */

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"           "<FORM ACTION=\\\"tpcc.dll\\\""
METHOD=\\"GET\\\" >"                     "<INPUT TYPE=\"hidden\""
NAME=\\"STATUSID\\\" VALUE=\\\"0\\\">"        "<INPUT TYPE=\"hidden\""
NAME=\\"ERROR\\\" VALUE=\\\"0\\\">"           "<INPUT TYPE=\"hidden\""
NAME=\\"FORMID\\\" VALUE=\\\"%d\\\">"         "<INPUT TYPE=\"hidden\""
NAME=\\"TERMID\\\" VALUE=\\\"%d\\\">"         "<INPUT TYPE=\"hidden\""
NAME=\\"SYNCID\\\" VALUE=\\\"%d\\\">"         "<INPUT TYPE=\"hidden\""

```

```

Payment<BR>"                                     "<PRE><font face=\\"Courier\\">
                                                 "Date: "
                                                 , PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

if ( !bInput )
{
    c += wsprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                                         pPaymentData-
>h_date.day,
                                         pPaymentData-
>h_date.month,
                                         pPaymentData-
>h_date.year,
                                         pPaymentData-
>h_date.hour,
                                         pPaymentData-
>h_date.minute,
                                         pPaymentData-
>h_date.second);
}

if ( bInput )
{
    c += wsprintf(szForm+c,
                                         "<BR> <BR>Warehouse:
%4.4d"
                                         "
District: <INPUT NAME=\\"DID*\\" SIZE=1><BR> <BR> <BR>
<BR> <BR>"                                         "Customer: <INPUT
NAME=\\"CID*\\" SIZE=4>"                         "
NAME=\\"CWI*\\" SIZE=4>   "                         "Cust-Warehouse: <INPUT
NAME=\\"CDI*\\" SIZE=1><BR>"                     "Cust-District: <INPUT
<INPUT NAME=\\"CLT*\\" SIZE=16>                      "Name:
Since:<BR>"                                         "
Credit:<BR>"                                         "
Disc:<BR>"                                         "
Phone:<BR> <BR>"                                     "Amount Paid:
$<INPUT NAME=\\"HAM*\\" SIZE=7>           New Cust-
Balance:<BR>"                                         "
                                                 "Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"                                         "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\ VALUE=\\"Process\\"><INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\ VALUE=\\"Menu\\">"                         "</BODY></FORM></HTML>"

Term.pClientData[iTermId].w_id);
}
else
{
    c += wsprintf(szForm+c,

```

```

c = wsprintf(szForm,
             "<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>" 
             "<FORM ACTION=\\"tpcc.dll\\"
METHOD=\\"GET\\\" >
             "<INPUT TYPE=\\"hidden\\"
NAME=\\"STATUSID\\\" VALUE=\\"0\\\">
             "<INPUT TYPE=\\"hidden\\"
NAME=\\"ERROR\\\" VALUE=\\"0\\\">
             "<INPUT TYPE=\\"hidden\\"
NAME=\\"FORMID\\\" VALUE=\\"%d\\\">
             "<INPUT TYPE=\\"hidden\\"
NAME=\\"TERMINAL\\\" VALUE=\\"%d\\\">
             "<INPUT TYPE=\\"hidden\\"
NAME=\\"SYNCCID\\\" VALUE=\\"%d\\\">
             "<PRE><font face=\\"Courier\\\">
Order-Status<BR>" 
             "Warehouse: %4.4d ", 
             ORDER_STATUS_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

if ( bInput )
{
    strcpy(szForm+c,
           "District: <INPUT
NAME=\\"DID\\\" SIZE=1><BR>" 
           "Customer: <INPUT
NAME=\\"CID\\\" SIZE=4> Name:
<INPUT NAME=\\"CLT\\\" SIZE=23><BR>" 
           "Cust-Balance:<BR>
<BR>" 
           "Order-Number:
Entry-Date:
Carrier-
Number:<BR>" 
           "Supply-W Item-Id
Qty      Amount      Delivery-Date<BR> <BR> <BR>
<BR>" 
           "<BR> <BR> <BR> <BR> <BR></font></PRE>" 
           "<HR><INPUT
TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"Process\\\"><INPUT
TYPE=\\"submit\\\" NAME=\\"CMD\\\" VALUE=\\"Menu\\\">
             "</BODY></FORM></HTML>"
);
}
else
{
    c += wsprintf(szForm+c,
                  "District: %2.2d<BR>" 
                  "Customer: %4.4d
Name: %-16s %-2s %-16s<BR>", 
                  pOrderStatusData->d_id,
pOrderStatusData->c_id, 
                  pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);

    c += sprintf(szForm+c, "Cust-
Balance: %%9.2f<BR>", 
                  pOrderStatusData-
>c_balance);
}

```

```

c += wsprintf(szForm+c,
              "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>" 
              "Supply-W Item-Id
Qty      Amount      Delivery-Date<BR> ", 
              pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.day, 
              pOrderStatusData-
>o_entry_d.month, 
              pOrderStatusData-
>o_entry_d.year, 
              pOrderStatusData-
>o_entry_d.hour, 
              pOrderStatusData-
>o_entry_d.minute, 
              pOrderStatusData-
>o_entry_d.second, 
              pOrderStatusData-
>o_carrier_id);

for(i=0; i< pOrderStatusData-
>o_cnt; i++)
{
    c += sprintf(szForm+c,
    " %4.4d      %6.6d      %2.2d      %%8.2f      %%2.2d-
%%2.2d-%4.4d<BR> ", 
    pOrderStatusData->OL[i].ol_supply_w_id,
pOrderStatusData->OL[i].ol_i_id,
pOrderStatusData->OL[i].ol_quantity,
pOrderStatusData->OL[i].ol_amount,
pOrderStatusData->OL[i].ol_delivery_d.day,
pOrderStatusData-
>OL[i].ol_delivery_d.month,
pOrderStatusData-
>OL[i].ol_delivery_d.year);
}

strncpy( szForm+c, szBR, (15-i)*5
);
c += (15-i)*5;

strcpy(szForm+c,
      "</font></PRE><HR><INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..NewOrder..\\\">
      "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Payment..\\\">
      "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Delivery..\\\">
      "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Order-Status..\\\">
      "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Stock-Level..\\\">" );

```

```

" <INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"..Exit..\\\">
             "</BODY></FORM></HTML>" );
}
}

/* FUNCTION: MakeDeliveryForm
*
* COMMENTS: The internal client buffer is
* created when the terminal id is assigned and should
* not
* be freed
* except when the client terminal id is no longer
* needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int      c;

    c = wsprintf(szForm,
                 "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>" 
                 "<FORM ACTION=\\"tpcc.dll\\"
METHOD=\\"GET\\\" >
                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"STATUSID\\\" VALUE=\\"%d\\\">
                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"ERROR\\\" VALUE=\\"0\\\">
                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"FORMID\\\" VALUE=\\"%d\\\">
                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"TERMINAL\\\" VALUE=\\"%d\\\">
                 "<INPUT TYPE=\\"hidden\\"
NAME=\\"SYNCCID\\\" VALUE=\\"%d\\\">
                 "<PRE><font face=\\"Courier\\\">
Delivery<BR>" 
                 "Warehouse: %4.4d<BR> <BR>,
(!bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy( szForm+c,
                "Carrier Number: <INPUT
NAME=\\"OCD\\\" SIZE=1><BR> <BR>
                "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
                "<BR> <BR> <BR> <BR></font></PRE><HR>" 
                "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Process\\\">
                "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\\" VALUE=\\"Menu\\\">
                "</BODY></FORM></HTML>" );
    }
}

```

```

else
{
    wsprintf( szForm+c,
              "Carrier Number:
%2.2d<BR> <BR>
                      "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR>" 
              "<BR> <BR> <BR> </font></PRE>" 
              "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">>
              "<INPUT TYPE='submit' "
NAME=\"CMD\" VALUE=\"..Payment..\">>
              "<INPUT TYPE='submit' "
NAME=\"CMD\" VALUE=\"..Delivery..\">>
              "<INPUT TYPE='submit' "
NAME=\"CMD\" VALUE=\"..Order-Status..\">>
              "<INPUT TYPE='submit' "
NAME=\"CMD\" VALUE=\"..Stock-Level..\">>
              "<INPUT TYPE='submit' "
NAME=\"CMD\" VALUE=\"..Exit..\">>
              "</BODY></FORM></HTML>

              , pDeliveryData-
>o_carrier_id,
              (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed"
);
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates
the input data from the new order form
* filling in the required
input variables. it then calls the SQLNewOrder
* transaction, constructs
the output form and writes it back to client
* browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
                        *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA          pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();

    ZeroMemory(pNewOrder,
    sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
    Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
    pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
}

```

```

        MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates
the input data from the payment form
* filling in the required
input variables. It then calls the SQLPayment
* transaction, constructs
the output form and writes it back to client
* browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
            *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
                        *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA          pPayment;
    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
    Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
    pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates
the input data from the Order Status
* form filling in the
required input variables. It then calls the
* SQLOrderStatus
transaction, constructs the output form and writes it
* back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
            *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/

```

```

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
                           *pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
    Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
    sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
    Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
    pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
    Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates
the input data from the delivery form
* filling in the required
input variables. It then calls the PostDeliveryInfo
* Api. The client is then
informed that the transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
            *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
                        *pECB, int iTermId, char *szBuffer)
{
    char      *ptr = pECB->lpszQueryString;

    PDELIVERY_DATA          pDelivery;
    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
    sizeof(DELIVERY_DATA));
    pDelivery->w_id =
    Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
    GetIntKeyValue(&ptr, "OCD",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )

```

```

        throw new CWEBCNLT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates
the input data from the Stock Level
form filling in the
required input variables. It then calls the
SQLStockLevel
transaction, constructs the output form and writes it
back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB passed in structure pointer from
inetsrv.
*
* int
*
* iTermId client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;

    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );

    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;
}

```

```

        pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
        if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
            throw new CWEBCNLT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

        Term.pClientData[iTermId].pTxn-
>StockLevel();

        pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
        MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE: This function extracts and
validates the new order form data from an http
command string.
*
* ARGUMENTS: LPSTR
lpszQueryString client
browser http command string
*
* NEW_ORDER_DATA *pNewOrderData
pointer to new order data structure
*/
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char szTmp[26];
    int i;
    short items;
    int ol_i_id, ol_quantity;
    char *ptr = lpszQueryString;

    static char szSP[MAX_OI_NEW_ORDER_ITEMS][6]
=
    { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*", "SP05*", "SP06*", "SP07*",
"SP08*", "SP09*", "SP10*", "SP11*", "SP12*",
"SP13*", "SP14*"};
    static char
szIID[MAX_OI_NEW_ORDER_ITEMS][7] =
    { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*", "IID05*", "IID06*", "IID07*",
"IID08*", "IID09*", "IID10*", "IID11*", "IID12*",
"IID13*", "IID14*"};
    static char
szQty[MAX_OI_NEW_ORDER_ITEMS][7] =
    { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*",

```

```

        "Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*", "Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*"};
    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID",
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID",
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OI_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp),
ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp)
)
                throw new
CWEBCNLT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OI[items].ol_supply_w_id = (short)atoi(szTmp);

            ol_i_id =
pNewOrderData->OI[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )
                throw new
CWEBCNLT_ERR( ERR_NEWORDER_ITEMID_RANGE );
            ol_quantity =
pNewOrderData->OI[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99
|| ol_quantity < 1 )
                throw new
CWEBCNLT_ERR( ERR_NEWORDER_QTY_RANGE );
            items++;
        }
        else
        {
            // nothing entered for
supply warehouse, so item id and qty must also be
blank
            GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new
CWEBCNLT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
        }
    }
}

```

```

        GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
        if ( szTmp[0] )
            throw new
CWEBCLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
    }
    if ( items == 0 )
        throw new CWEBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );
    pNewOrderData->o.ol_cnt = items;
}

/* FUNCTION: GetPaymentData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS: LPSTR lpszQueryString client
browser http command string
* PAYMENT_DATA *pPaymentData pointer to
payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char szTmp[26];
    char *ptr = lpszQueryString;
    BOOL bCustIdBlank;

    pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify
        that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);
}

```

```

        if ( bCustIdBlank )
            { // customer id is blank, so last
            name must be entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] == 0 )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

                _strupr( szTmp );
                if ( strlen(pPaymentData->c_last) >
LAST_NAME_LEN )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
                strcpy(pPaymentData->c_last,
szTmp);
            }
            else
            {
                // parse customer id and verify
                that last name was NOT entered
                GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
                if ( szTmp[0] != 0 )
                    throw new CWEBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
            }

            GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
            if ( !IsDecimal(szTmp) )
                throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
            pPaymentData->h_amount = atof(szTmp);
            if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
                throw new CWEBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char szTmp[26];
    char *ptr = lpszQueryString;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        // customer id is blank, so last
        name must be entered

```

```

        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(pOrderStatusData->c_last) >
LAST_NAME_LEN )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );
        strcpy(pOrderStatusData->c_last,
szTmp);
    }
    else
    {
        // parse customer id and verify
        that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWEBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }

    /* FUNCTION: BOOL IsNumeric(char *ptr)
    *
    * PURPOSE: This function determines if a
    string is numeric. It fails if any characters other
    than numeric and null
    terminator are present.
    */
    /* ARGUMENTS: char
    * PTR pointer to string to check.
    */
    /* RETURNS: BOOL FALSE if
    string is not all numeric
    */
    TRUE if string contains only numeric
    characters i.e. '0' - '9'
    */

BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE: This function determines if a
string is a non-negative decimal value.

```

```

/*
   It fails if any characters other than a
series of numbers followed by
   a decimal point,
another series of numbers, and a null terminator are
present.
*/
* ARGUMENTS:      char
                  *ptr      pointer to string to check.
*
* RETURNS:         BOOL      FALSE      if
string is not a valid non-negative decimal value
*
      TRUE      if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if (*ptr == 0)
        return FALSE;

    // find decimal point
    dotptr = strchr(ptr, '.');
    if (dotptr == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if (*ptr != 0)
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ((*dotptr+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if ((*dotptr+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

```

LIBRARY TPCC.DLL

EXPORTS

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/*      FILE:          TPCC.H
*
*      TPC-C Kit Ver. 4.20.000           Microsoft
*                                         Copyright
Microsoft, 1999
*                                         All Rights Reserved
*
*                                         Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
*
*/

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE          101
#define _APS_NEXT_COMMAND_VALUE          40001
#define _APS_NEXT_CONTROL_VALUE          1000
#define _APS_NEXT_SYMED_VALUE            101
#define TP_MAX_RETRIES                  50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM                   1
//beginning form no term id assigned, form
id
#define MAIN_MENU_FORM                 2
//term id assigned main menu form id
#define NEW_ORDER_FORM                 3
//new order form id
#define PAYMENT_FORM                  4
//payment form id
#define DELIVERY_FORM                 5
//delivery form id
#define ORDER_STATUS_FORM              6
//order
status id
#define STOCK_LEVEL_FORM               7
//stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter

```

```

#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int                                     iNextFree;           //index of
next free element or -1 if this entry in use.
    int                                     w_id;                //warehouse
id assigned at welcome form
    int                                     d_id;                //district id
assigned at welcome form

    int                                     iSyncId;             //synchronization id
    int                                     iTickCount;          //time of
last access;

    CTPCC_BASE                            *pTxn;

} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int                                     iNumEntries;        //total allocated terminal array entries
    int                                     iFreeList;           //free list
    int                                     iMasterSyncId;       //synchronization id
    CLIENTDATA                            *pClientData;        //pointer to
allocated client data
} TERM;

typedef TERM *PTERM;                                //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
}
```

```

ERR_INVALID_SYNC_CONNECTION,
ERR_INVALID_TERMID,
ERR_LOADDLL_FAILED,
ERR_MAX_CONNECTIONS_EXCEEDED,
ERR_MEM_ALLOC_FAILED,
ERR_MISSING_REGISTRY_ENTRIES,
ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,
ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CID_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID
};

class CWEBCLNTRR : public CBaseErr
{
public:
    CWEBCLNTRR(WEBERROr Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
    }
};

```

```

        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CWEBCLNTRR(WEBERROr Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
        char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
        szTextDetail );
        m_SystemErr =
        dwSystemErr;
        m_szErrorText = NULL;
    }

    ~CWEBCLNTRR()
    {
        if (m_szTextDetail != NULL)
            delete []
        m_szTextDetail;
        if (m_szErrorText != NULL)
            delete []
        m_szErrorText;
    }

    WEBEROOr m_Error;
    char
    *m_szTextDetail; //char
    *m_szErrorText; //DWORD
    m_SystemErr;

    int ErrorType() {return
ERR_TYPE_WEBDLL;}; int ErrorNum() {return m_Error;};
char *ErrorText();

};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);

```

```

void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBEROOr err);
int GetIntKeyValue(char **pQueryString, char *pKey,
WEBEROOr NoKeyErr, WEBEROOr NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(short w_id, short
o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"
#define APSTUDIO_READONLY_SYMBOLS

```

```

// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

#define APSTUDIO_READONLY_SYMBOLS

// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#ifndef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // !_WIN32

#ifndef _MAC
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifndef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server
(DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL
Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200

```

```

TOPMARGIN, 7
BOTTOMMARGIN, 88
END
#endif      // APSTUDIO_INVOKED

#endif      // English (U.S.) resources
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
// Generated from the TEXTINCLUDE 3 resource.
// 

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
#endif      // not APSTUDIO_INVOKED



---



## tpcc_com.cpp



```

/* FILE: TPCC_COM.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Source file for TPC-C COM+ class
implementation.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec(dllexport)

#include "...\\common\\src\\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_com.h"

#include "...\\tpcc_com_ps\\src\\tpcc_com_ps_i.c"

```


```

tpcc_com.cpp

```

/*
 *          FILE:          TPCC_COM.CPP
 *          Microsoft
TPC-C Kit Ver. 4.20.000
*                                         Copyright
Microsoft, 1999
*                     All Rights Reserved
*
*                                         not yet
audited
*
*
* PURPOSE:  Source file for TPC-C COM+ class
implementation.
* Contact:  Charles Levine
(clevine@microsoft.com)
*
* Change history:
*                         4.20.000 - first version
*/
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "...\\common\\src\\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txm_base.h"
#include "tpcc_com.h"

#include "...\\tpcc_com_ps\\src\\tpcc_com_ps_i.c"

```

```

#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
    SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for
each txn
    }
}

```

```

        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);

    }

    // call setcomplete to release each
component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment-
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pStockLevel-
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus-
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    CTPCC_COM::~CTPCC_COM()
    {
        if (m_pTxn)
            SafeArrayDestroy(m_vTxn.parray);

        ReleaseInterface(m_pNewOrder);
        if (!m_bSinglePool)
        {
            ReleaseInterface(m_pPayment);
            ReleaseInterface(m_pStockLevel);
            ReleaseInterface(m_pOrderStatus);
        }
        CoUninitialize();
    }
}

void CTPCC_COM::NewOrder()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );

    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );

    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );

    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );

    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
}

```

```

SafeArrayDestroy(vTxn_out.parray);

if ( m_pTxn->ErrorType != ERR_SUCCESS )
    throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}



---


tpcc_com.h


---


/* FILE: TPCC_COM.H Microsoft
 * TPC-C Kit Ver. 4.20.000 Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
audited
*
* PURPOSE: Header file for TPC-C COM+ class
implementation.
*
* Change history:
* 4.20.000 - first version
*/


---


#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine
COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
    // impersonate a non-COM error type
    CCOMERR( int iErrorType, int
iError )
    {
        m_iErrorType =
iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }
}

```

```

}
int          m_hr;
int          m_iErrorType;
int          m_iError;

// A CCOMERR class can
impersonate another class, which happens if the error
// was not actually a COM
Services error, but was simply transmitted back via
COM.

int ErrorType()
{
    if (m_iErrorType == 0)
        return
ERR_TYPE_COM;
    else
        return
m_iErrorType;
}

int ErrorNum() {return m_hr;}

char *ErrorText()
{
    if (m_hr == S_OK)
        sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    else
        sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
    return m_szErrorText;
}

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC* m_pNewOrder;
    ITPCC* m_pPayment;
    ITPCC* m_pStockLevel;
    ITPCC* m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {

```

```

STOCK_LEVEL_DATA StockLevel;
ORDER_STATUS_DATA OrderStatus;
} u;
} *m_pTxn;

public:
    VARIANT m_vTxn;
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; }

    void NewOrder();
    void Payment();
    void StockLevel();
    void OrderStatus();
    void Delivery();

{ throw new CCOMERR(E_NOTIMPL); } // not supported
};



---



```

```

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

```

tpcc_com_all.c

pp

```

/* FILE: TPCC_COM_ALL.CPP Microsoft
TPC-C Kit Ver. 4.20.000

```

```

/*
Copyright
Microsoft, 1999
All Rights Reserved
*
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
PURPOSE: Implementation for TPC-C Tuxedo
class.
Contact: Charles Levine
(clevine@microsoft.com)
*
Change history:
4.20.000 - updated rev number to
match kit
*/
#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADS

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>
#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"           //tpckit transaction
header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"   // DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"    // ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;
BEGIN_OBJECT_MAP(ObjectMap)

```

```

OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

static HINSTANCE hLibInstanceDb = NULL;
TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID *lpReserved*)
{
    char szDllName[128];

    try
    {
        if (dwReason ==
DLL_PROCESS_ATTACH)
        {
            _Module.Init(ObjectMap,
hInstance);

            DisableThreadLibraryCalls(hInstance);

            DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

            GetComputerName(szMyComputerName, &dwSize);
            szMyComputerName[dwSize] = 0;

            if (
ReadTPCCRegistrySettings( &Reg ) )
                throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );
            if (Reg.eDB_Protocol ==
DBLIB)
            {
                strcpy(
szDllName, Reg.szPath );
                strcat(
szDllName, "tpcc_dblib.dll");
                hLibInstanceDb = LoadLibrary( szDllName );

```

```

if
(hLibInstanceDb == NULL)
    throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
// get
function pointer to wrapper for class constructor
pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");
if
(pCTPCC_DBLIB_new == NULL)
    throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
else if
(Reg.eDB_Protocol == ODBC)
{
    strcpy(
szDllName, Reg.szPath );
    strcat(
szDllName, "tpcc_odbc.dll");

    hLibInstanceDb = LoadLibrary( szDllName );
if
(hLibInstanceDb == NULL)
    throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );
// get
function pointer to wrapper for class constructor
pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
if
(pCTPCC_ODBC_new == NULL)
    throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
else
    throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
else if (dwReason ==
DLL_PROCESS_DETACH)
    _Module.Term();

}
catch (CBaseErr *e)
{
    WriteMessageToEventLog(e->ErrorText());
    delete e;
    return FALSE;
}
catch (...)
{

```

```

        WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
            return FALSE;
    }

    return TRUE; // OK
}

///////////////
// Used to determine whether the DLL can be unloaded
by OLE

STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount() == 0) ? S_OK :
S_FALSE;
}

///////////////
// Returns a class factory to create an object of the
requested type

STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
iid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, iid,
ppv);
}

///////////////
// DllRegisterServer - Adds entries to the system
registry

STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

///////////////
// DllUnregisterServer - Removes entries from the
system registry

STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
}

```

```

    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));

    _strprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                     EVENTLOG_ERROR_TYPE, // event type
                     0, // event category
                     0, // event ID
                     NULL, // current user's
SID
                     2, // strings in
lpszStrings
                     0, // no bytes of raw
data
                     (LPCTSTR *)lpszStrings, // array of
error strings
                     NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
          "Required entries missing from registry." },
        { ERR_LOADDLL_FAILED,
          "Load of DLL failed. DLL=" },
        { ERR_GETPROCADDR_FAILED,
          "Could not map proc in DLL. GetProcAddress
error. DLL=" },
        { ERR_UNKNOWN_DB_PROTOCOL,
          "Unknown database protocol specified in
registry." },
        { 0, "" }
    };
}

```

```

    }

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown
error number. " );
            break;
        }
        if (m_Error ==
errorMsgs[i].iError)
        {
            strcpy( szTmp,
errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    if (m_pTxn)
        delete m_pTxn;
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IOObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IOObjectContext, (void **) &pObjectContext );
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

// // called by the ctor activator

```

```

STDMETHODIMP CTPCC_Common::Construct(IDispatch * pUnk)
{
    // Code to access construction string, if needed later...
    // if (!pUnk)
    //     return E_UNEXPECTED;
    // IObjectConstructString * pString
= NULL;
    // HRESULT hr = pUnk->QueryInterface(IID_IObjectConstructString, (void **) &pString);
    // pString->Release();

    try
    {
        if (Reg.eDB_Protocol == ODBC)
            m_pTxn =
pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        else if (Reg.eDB_Protocol ==
DBLIB)
            m_pTxn =
pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );
        catch (CBaseErr *e)
        {
            WriteMessageToEventLog(e->ErrorText());
            delete e;
            return E_FAIL;
        }
        catch (...)
        {

            WriteMessageToEventLog(TEXT("Unhandled exception in object ::Construct"));
            return E_FAIL;
        }
        return S_OK;
    }

    HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA      pNewOrder;
    COM_DATA              *pData;
    try
    {
        pData = (COM_DATA*) txn_in.parray->pvData;
        pNewOrder = m_pTxn->BuffAddr_NewOrder();
        memcpy(pNewOrder, &pData->u.NewOrder, sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder();           // do the actual txn
        VariantInit(txn_out);         // do the actual txn
    }
}

```

```

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector(VT_UI1,
                     txn_in.parray->rgsabound->cElements,
                     txn_in.parray->rgsabound->cElements);
        pData = (COM_DATA*) txn_out->pvData;
        memcpy( &pData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA      pPayment;
    COM_DATA              *pData;
    try
    {
        pData = (COM_DATA*) txn_in.parray->pvData;
        pPayment = m_pTxn->BuffAddr_Payment();
        memcpy(pPayment, &pData->u.Payment, sizeof(PAYMENT_DATA));
        m_pTxn->Payment();           // do the actual txn
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA      pStockLevel;
    COM_DATA              *pData;
    try
    {
        pData = (COM_DATA*) txn_in.parray->pvData;
        pStockLevel = m_pTxn->BuffAddr_StockLevel();
        memcpy(pStockLevel, &pData->u.StockLevel, sizeof(STOCK_LEVEL_DATA));
    }
}

```

```

        m_pTxn->StockLevel();

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                      txin_in.parray->rgsabound-
>cElements,
                      txin_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*)txn_out-
>parray->pvData;

        memcpy( &pData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
connection: if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||

((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA          *pData;
    try
    {
        pData = (COM_DATA*)txin_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();
    }
}

```

```

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                      txin_in.parray->rgsabound-
>cElements,
                      txin_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*)txn_out-
>parray->pvData;

        memcpy( &pData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
connection: if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||

((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

```

tpcc_com_all.def

; tpcc_com_all.def : Declares the module parameters.

LIBRARY "tpcc_com_all.dll"

EXPORTS

```

DllCanUnloadNow      @1 PRIVATE
DllGetClassObject     @2 PRIVATE
DllRegisterServer     @3 PRIVATE
DllUnregisterServer   @4 PRIVATE

```

tpcc_com_all.d sp

```

# Microsoft Developer Studio Project File -
Name="tpcc_com_all" - Package Owner=<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Dynamic-Link Library" 0x0102

CFG=tpcc_com_all - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_all.mak"
CFG=tpcc_com_all - Win32 Debug
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_all - Win32 Release" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE "tpcc_com_all - Win32 Debug" (based on
"Win32 (x86) Dynamic-Link Library")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF   "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""


```

```

# ADD BASE CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
" NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MT /W3 /GX /O2 /D "WIN32" /D
" NDEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "NDEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "NDEBUG"
# ADD RSC /l 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll
/machine:I386
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dbllib.lib
..\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbcpp32.lib /nologo
/subsystem:windows /dll /machine:I386

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /MTd /W3 /Gm /GX /Zi /Od /D
"WIN32" /D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /MTd /W3 /Gm /GX /ZI /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /dll /debug
/machine:I386 /pdbtype:sept
# ADD LINK32 ..\db_dblib_dll\bin\tpcc_dbllib.lib
..\db_odbc_dll\bin\tpcc_odbc.lib kernel32.lib
user32.lib gdi32.lib winspool.lib comdlg32.lib
advapi32.lib shell32.lib ole32.lib oleaut32.lib
uuid.lib odbc32.lib odbcpp32.lib /nologo

```

```

/subsystem:windows /dll /debug /machine:I386
/pdbtype:sept
!ENDIF

# Begin Target

# Name "tpcc_com_all - Win32 Release"
# Name "tpcc_com_all - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter "*.*"

# Begin Source File

SOURCE=.\\src\\tpcc_com_all.cpp
# SUBTRACT CPP /YX
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.def
# End Source File
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.idl
!IF "$(CFG)" == "tpcc_com_all - Win32 Release"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\\src\\tpcc_com_all.idl

BuildCmds= \
midl /Oicf /n "tpcc_com_all.h" /iid
"tpcc_com_all_i.c" ".\\src\\tpcc_com_all.idl"
/out ".\\src"

".\\src\\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)

".\\src\\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)

".\\src\\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_all - Win32 Debug"

# PROP Ignore_Default_Tool 1
# Begin Custom Build - Performing MIDL step
InputPath=.\\src\\tpcc_com_all.idl

BuildCmds= \
midl /Oicf /n "tpcc_com_all.h" /iid
"tpcc_com_all_i.c" ".\\src\\tpcc_com_all.idl"
/out ".\\src"

".\\src\\tpcc_com_all.tlb" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)

```

```

".\\src\\tpcc_com_all.h" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)

".\\src\\tpcc_com_all_i.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$(BuildCmds)
# End Custom Build

!ENDIF

# End Source File
# End Group
# Begin Group "Header"

# PROP Default_Filter "*.*"

# Begin Source File

SOURCE=.\\src\\Methods.h
# End Source File
# Begin Source File

SOURCE=.\\src\\resource.h
# End Source File
# End Group
# Begin Source File

SOURCE=.\\src\\tpcc_com_all.rc
# End Source File
# End Target
# End Project

```

tpcc_com_all.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
/* Compiler settings for .\\src\\tpcc_com_all.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run),
   ms_ext, c_ext
   error checks: allocation ref bounds_check enum
   stub_data
      VC __declspec() decoration level:
         __declspec(uuid()), __declspec(selectany),
         __declspec(novtable)
            DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING()

/* verify that the <rpcndr.h> version is high enough
to compile this file*/

```

```

#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h_
#define __tpcc_com_all_h_

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

```

Ifdef __cplusplus

```

typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifndef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifndef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifndef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

```

```

#ifndef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifndef __cplusplus
extern "C"{
#endif

void __RPC_FAR * __RPC_USER
MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifndef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifndef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifndef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;

```

```

#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifndef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifndef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifndef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif

#ifndef __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif
#endif

```

tpcc_com_all.idl

```

/* FILE: TPCC.IDL
   * Microsoft
TPC-C Kit Ver. 4.20.000
   * Copyright
Microsoft, 1999
   * All Rights Reserved
   *
   * not yet
audited
   *
   * PURPOSE: IDL source for TPCC.dll. This
file is processed by the MIDL tool to
   * produce the
type library (TPCC.tlb) and marshalling code.
   *

```

```

* Change history:
*        4.20.000 - first version
*/
interface TPCC;
interface NewOrder;
interface OrderStatus;
interface Payment;
interface StockLevel;

import "oaidl.idl";
import "ocidl.idl";
import "..\tpcc_com_ps\src\tpcc_com_ps.idl";

[
    uuid(122A3117-2520-11D3-BA71-00C04FBFE08B),
    version(1.0),
    helpstring("TPC-C 1.0 Type Library")
]
library TPCCLib
{
    importlib("stdole32.tlb");
    importlib("stdole2.tlb");

    [
        uuid(122A3128-2520-11D3-BA71-
00C04FBFE08B),
        helpstring("All Txns Class")
    ]
    coclass TPCC
    {
        [default] interface ITPCC;
    }

    [
        uuid(975BAABF-84A7-11D2-BA47-
00C04FBFE08B),
        helpstring("NewOrder Class")
    ]
    coclass NewOrder
    {
        [default] interface ITPCC;
    }

    [
        uuid(266836AD-A50D-11D2-BA4E-
00C04FBFE08B),
        helpstring("OrderStatus Class")
    ]
    coclass OrderStatus
    {
        [default] interface ITPCC;
    }

    [
        uuid(CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B),
        helpstring("Payment Class")
    ]

```

```

coclass Payment
{
    [default] interface ITPCC;
};

[
    uuid(2668369E-A50D-11D2-BA4E-
00C04FBFE08B),
    helpstring("StockLevel Class")
]
coclass StockLevel
{
    [default] interface ITPCC;
};



---



## tpcc_com_all.r



### C



---



```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///
// Generated from the TEXTINCLUDE 2 resource.
///
#include "winres.h"

///
// English (U.S.) resources
///
#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#endif // _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // __WIN32

#endif // APSTUDIO_INVOKED
///
// TEXTINCLUDE
//

1 TEXTINCLUDE DISCARDABLE
BEGIN
 "resource.h\0"
END

```


```

```

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"winres.h\"\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "1 TYPELIB \"tpcc_com_all.tlb\"\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

#ifndef _MAC
////////////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////////////
// Version
////////////////////////////////////////////////////////////////////////
VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3FL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904B0"
BEGIN
VALUE "CompanyName", "\0"
VALUE "FileDescription", "tpcc_com_all
Module\0"
VALUE "FileVersion", "1, 0, 0, 1\0"
VALUE "InternalName", "TPCCNEWORDER\0"
VALUE "LegalCopyright", "Copyright
1997\0"
VALUE "OriginalFilename",
"tpcc_com_all.DLL\0"
VALUE "ProductName", "tpcc_com_all
Module\0"
VALUE "ProductVersion", "1, 0, 0, 1\0"
VALUE "OLESelfRegister", "\0"
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
#endif
#endif // !_MAC

```

```

////////// /////////////////
// REGISTRY
// 

IDR_TPCC      REGISTRY DISCARDABLE
"tpcc_com_all.rgs"
IDR_NEWORDER   REGISTRY DISCARDABLE
"tpcc_com_no.rgs"
IDR_ORDERSTATUS REGISTRY DISCARDABLE
"tpcc_com_os.rgs"
IDR_PAYMENT    REGISTRY DISCARDABLE
"tpcc_com_pay.rgs"
IDR_STOCKLEVEL REGISTRY DISCARDABLE
"tpcc_com_sl.rgs"

////////// /////////////////
// String Table
// 

STRINGTABLE DISCARDABLE
BEGIN          "tpcc_com_all"
END

#endif // English (U.S.) resources
////////// /////////////////
// Generated from the TEXTINCLUDE 3 resource.
// 
1 TYPELIB "tpcc_com_all.tlb"

////////// /////////////////
#endif // not APSTUDIO_INVOKED

```

tpcc_com_all.rgs

```

HKCR
{
    TPCC.AllTxns.1 = s 'All Txns Class'
    {
        CLSID = s '{122A3128-2520-11D3-
BA71-00C04FBFE08B}'
    }
    TPCC.AllTxns = s 'TPCC Class'
}

```

```

        CurVer = s 'TPCC.AllTxns.1'
    }
    NoRemove CLSID
    {
        ForceRemove {122A3128-2520-11D3-
BA71-00C04FBFE08B} = s 'TPCC Class'
        {
            ProgID = s
            'TPCC.AllTxns.1'

            VersionIndependentProgID = s 'TPCC.AllTxns'
            InprocServer32 = s
            '%MODULE%'
            {
                val
            ThreadingModel = s 'Both'
            }
        }
    }
}

```

tpcc_com_all.i.

C

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run),
ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifndef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

```

```

#endif // _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef // !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
const type name =
{l,w1,{b1,b2,b3,b4,b5,b6,b7,b8}}}

#ifndef !_MIDL_USE_GUIDDEF_
MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#define MIDL_DEFINE_GUID
#endif __cplusplus
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:19 2000
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oifc (OptLev=i2), W1, Zp8, env=Win64 (32b
run, appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcreg.h>

#ifndef _MIDL_USE_GUIDDEF_

```

```

#define INITGUID
#else
#include <guiddef.h>
#endif

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#else // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}};

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#define MIDL_DEFINE_GUID
#endif __cplusplus
#endif
#endif /* defined(_M_IA64) || defined(_M_AXP64) */

```

tpcc_com_no.rgs

```

HKCR
{
    TPCC.NewOrder.l = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-
BA47-00C04FBFE08B}';
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
    }
    NoRemove CLSID
    {
        ForceRemove {975BAABF-84A7-11D2-
BA47-00C04FBFE08B} = s 'NewOrder Class'
        {
            ProgID = s
'TPCC.NewOrder.1'

            VersionIndependentProgID = s
'TPCC.NewOrder'
InprocServer32 = s
'%MODULE%'
        {
            val
ThreadingModel = s 'Both'
        }
    }
}

```

tpcc_com_os.rgs

```

HKCR
{
    TPCC.OrderStatus.l = s 'OrderStatus Class'
    {

```

```

        CLSID = s '{266836AD-A50D-11D2-
BA4E-00C04FBFE08B}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {
        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
        ForceRemove {266836AD-A50D-11D2-
BA4E-00C04FBFE08B} = s 'OrderStatus Class'
        {
            ProgID = s
'TPCC.OrderStatus.1'

            VersionIndependentProgID = s
'TPCC.OrderStatus'
                InprocServer32 = s
'%MODULE%'
                {
                    val
ThreadingModel = s 'Both'
                }
            }
        }
    }


```

tpcc_com_pay. rgs

```

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-
BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
    }
    NoRemove CLSID
    {
        ForceRemove {CD02F7EF-A4FA-11D2-
BA4E-00C04FBFE08B} = s 'Payment Class'
        {
            ProgID = s
'TPCC.Payment.1'

            VersionIndependentProgID = s 'TPCC.Payment'
                InprocServer32 = s
'%MODULE%'
                {
                    val
ThreadingModel = s 'Both'
                }
            }
        }
    }


```

tpcc_com_ps.d ef

```

LIBRARY      "tpcc_com_ps"
DESCRIPTION   'Proxy/Stub DLL'
EXPORTS
    DllGetClassObject     @1  PRIVATE
    DllCanUnloadNow       @2  PRIVATE
    GetProxyDllInfo      @3  PRIVATE
    DllRegisterServer    @4  PRIVATE
    DllUnregisterServer  @5  PRIVATE

```

tpcc_com_ps.d sp

```

# Microsoft Developer Studio Project File -
Name="tpcc_com_ps" - Package Owner:<4>
# Microsoft Developer Studio Generated Build File,
Format Version 6.00
# ** DO NOT EDIT **

# TARGTYPE "Win32 (x86) Application" 0x0101

CFG=tpcc_com_ps - Win32 Debug
!MESSAGE This is not a valid makefile. To build this
project using NMAKE,
!MESSAGE use the Export Makefile command and run
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak".
!MESSAGE
!MESSAGE You can specify a configuration when running
NMAKE
!MESSAGE by defining the macro CFG on the command
line. For example:
!MESSAGE
!MESSAGE NMAKE /f "tpcc_com_ps.mak" CFG="tpcc_com_ps
- Win32 Debug"
!MESSAGE
!MESSAGE Possible choices for configuration are:
!MESSAGE
!MESSAGE "tpcc_com_ps - Win32 Release" (based on
"Win32 (x86) Application")
!MESSAGE "tpcc_com_ps - Win32 Debug" (based on "Win32
(x86) Application")
!MESSAGE

# Begin Project
# PROP AllowPerConfigDependencies 0
# PROP Scc_ProjName ""
# PROP Scc_LocalPath ""
CPP=cl.exe
MTL=midl.exe

```

```

RSC=rc.exe

!IF  "$(CFG)" == "tpcc_com_ps - Win32 Release"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 0
# PROP BASE Output_Dir "Release"
# PROP BASE Intermediate_Dir "Release"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 0
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""
# ADD BASE CPP /nologo /W3 /GX /O2 /D "WIN32" /D
"DEBUG" /D _WINDOWS" /YX /FD /c
# ADD CPP /nologo /W3 /GX /O2 /D "WIN32" /D "NDEBUG"
/D _WIN32_WINNT=0x0400 /D "REGISTER_PROXY_DLL" /FD /c
# SUBTRACT CPP /YX
# ADD BASE MTL /nologo /D "NDEBUG" /mktypplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "NDEBUG" /mktypplib203 /o "NUL"
/win32
# ADD BASE RSC /I 0x409 /d "NDEBUG"
# ADD RSC /I 0x409 /d "NDEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbc32.lib /nologo /subsystem:windows /machine:I386
# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib
rpcrt4.lib oleaut32.lib uuid.lib /nologo
/entry:"DllMain" /subsystem:windows /dll /pdb:none
/machine:I386 /def:".\\src\\tpcc_com_ps.def"
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.\\bin\\tpcc_com_ps.dll
SOURCE="$(InputPath)"

..\\tpcc_com_all\\src\\tpcc_com_ps.h : $(SOURCE)
"$(INITDIR)" "$(OUTDIR)"
copy ..\\src\\tpcc_com_ps.h
..\\tpcc_com_all\\src\\

# End Custom Build

!ELSEIF  "$(CFG)" == "tpcc_com_ps - Win32 Debug"

# PROP BASE Use_MFC 0
# PROP BASE Use_Debug_Libraries 1
# PROP BASE Output_Dir "Debug"
# PROP BASE Intermediate_Dir "Debug"
# PROP BASE Target_Dir ""
# PROP Use_MFC 0
# PROP Use_Debug_Libraries 1
# PROP Output_Dir ".\bin"
# PROP Intermediate_Dir ".\obj"
# PROP Ignore_Export_Lib 0
# PROP Target_Dir ""

```

```

# ADD BASE CPP /nologo /W3 /Gm /GX /Zi /Od /D "WIN32"
/D "_DEBUG" /D "_WINDOWS" /YX /FD /c
# ADD CPP /nologo /ZI /Od /D "WIN32" /D "_DEBUG" /D
_WIN32_WINNT=0x0400 /D "REGISTER_PROXY_DLL" /FD /c
# ADD BASE MTL /nologo /D "_DEBUG" /mktyplib203 /o
"NUL" /win32
# ADD MTL /nologo /D "_DEBUG" /mktyplib203 /o "NUL"
/win32
# ADD BASE RSC /l 0x409 /d "_DEBUG"
# ADD RSC /l 0x409 /d "_DEBUG"
BSC32=bscmake.exe
# ADD BASE BSC32 /nologo
# ADD BSC32 /nologo
LINK32=link.exe
# ADD BASE LINK32 kernel32.lib user32.lib gdi32.lib
winspool.lib comdlg32.lib advapi32.lib shell32.lib
ole32.lib oleaut32.lib uuid.lib odbc32.lib
odbcpp32.lib /nologo /subsystem:windows /debug
/machine:I86 /pdbtype:sept
# ADD LINK32 kernel32.lib rpcndr.lib rpcns4.lib
rpcrt4.lib oleaut32.lib uuid.lib /nologo
/entry:"DllMain" /dll /debug /machine:I86
/def:".src\tpcc_com_ps.def" /pdbtype:sept
# SUBTRACT LINK32 /pdb:none
# Begin Custom Build - Copying tpcc_com_ps.h
InputPath=.bin\tpcc_com_ps.dll
SOURCE=$(InputPath)

..\tpcc_com_all\src\tpcc_com_ps.h : $(SOURCE)
$(INTDIR) $(OUTDIR)
copy .src\tpcc_com_ps.h
..\tpcc_com_all\src\

# End Custom Build

!ENDIF

# Begin Target

# Name "tpcc_com_ps - Win32 Release"
# Name "tpcc_com_ps - Win32 Debug"
# Begin Group "Source"

# PROP Default_Filter ""
# Begin Source File

SOURCE=.src\dlldata.c
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.def
# PROP Exclude_From_Build 1
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps.idl

!IF "$(CFG)" == "tpcc_com_ps - Win32 Release"
# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

```

```

BuildCmds=
    midl /Oicf /n "tpcc_com_ps.h" /iid
"tpcc_com_ps_i.c" ".src\tpcc_com_ps.idl" /out
".src"
".src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
".src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
".src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$BuildCmds
".src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
# End Custom Build

!ELSEIF "$(CFG)" == "tpcc_com_ps - Win32 Debug"
# PROP Ignore_Default_Tool 1
# Begin Custom Build
InputPath=.src\tpcc_com_ps.idl

BuildCmds=
    midl /Oicf /n "tpcc_com_ps.h" /iid
"tpcc_com_ps_i.c" ".src\tpcc_com_ps.idl" /out
".src"
".src\tpcc_com_ps.h" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
".src\tpcc_com_ps_i.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
".src\dlldata.c" : $(SOURCE) "$(INTDIR)" "$(OUTDIR)"
$BuildCmds
".src\tpcc_com_ps_p.c" : $(SOURCE) "$(INTDIR)"
$(OUTDIR)
$BuildCmds
# End Custom Build

!ENDIF

# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps_i.c
# End Source File
# Begin Source File

SOURCE=.src\tpcc_com_ps_p.c
# End Source File
# End Group
# End Target
# End Project

```

tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run),
ms_ext, c_ext
   error checks: allocation ref bounds_check enum
stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING()

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h_
#define __tpcc_com_ps_h_

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "caidl.h"
#include "ocidl.h"

#endif /* __tpcc_com_ps_h_*/

```

```

extern "C" {
#endif

void __RPC_FAR * __RPC_USER
MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void __RPC_FAR * );

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object]
*/
EXTERN_C const IID IID_ITPCC;

#if defined(_cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out) =
0;

    virtual HRESULT __stdcall CallSetComplete(
void) = 0;
}

```

```

};

#else      /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE *QueryInterface )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void __RPC_FAR * __RPC_FAR *ppvObject);

    ULONG ( STDMETHODCALLTYPE *AddRef )( 
        ITPCC __RPC_FAR * This);

    ULONG ( STDMETHODCALLTYPE *Release )( 
        ITPCC __RPC_FAR * This);

    HRESULT ( STDMETHODCALLTYPE *NewOrder )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Payment )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Delivery )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE *StockLevel )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE *OrderStatus )( 
        ITPCC __RPC_FAR * This,
        /* [in] */ VARIANT txin,
        /* [out] */ VARIANT __RPC_FAR *txn_out);

    HRESULT ( STDMETHODCALLTYPE *CallSetComplete )( 
        ITPCC __RPC_FAR * This);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl __RPC_FAR *lpVtbl;
};

```

```

#endif /* COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl ->QueryInterface(This,riid,ppvObject)

#define ITPCC_AddRef(This) \
    (This)->lpVtbl -> AddRef(This)

#define ITPCC_Release(This) \
    (This)->lpVtbl -> Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl -> NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \
    (This)->lpVtbl -> Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txin,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txin,
    /* [out] */ VARIANT __RPC_FAR *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,

```

```

DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC __RPC_FAR * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT __RPC_FAR * txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC __RPC_FAR * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long VARIANT_UserSize(      unsigned long __RPC_FAR *,
unsigned long , VARIANT __RPC_FAR * );

```

```

unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserMarshal( unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
unsigned char __RPC_FAR * __RPC_USER
VARIANT_UserUnmarshal(unsigned long __RPC_FAR *,
unsigned char __RPC_FAR *, VARIANT __RPC_FAR * );
void __RPC_USER
VARIANT_UserFree(     unsigned long __RPC_FAR *,
VARIANT __RPC_FAR * );

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif



---



## tpcc_com_ps.i dl



```

/* FILE: ITPCC.IDL
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++
components.
*
* Change history:
* 4.20.000 - first version
*/
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

{
 object,
 oleautomation,
 uuid(FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B),
 helpstring("ITPCC Interface"),
 pointer_default(unique)
}
interface ITPCC : IUnknown
{
 HRESULT __stdcall NewOrder
 (

```


```

```

        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
HRESULT __stdcall Payment
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall Delivery
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall StockLevel
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall OrderStatus
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall CallSetComplete
(
);
};

} // interface ITPCC

```

tpcc_com_ps_i .c

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf (OptLev=i2), W1, Zp8, env=Win32 (32b run),
ms_ext, c_ext
   error checks: allocation ref bounds_check enum
stub_data
   VC __declspec() decoration level:
      __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
      DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AXP64)

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#define _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif // !_MIDL_USE_GUIDDEF_

#ifndef MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);
#define MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#endif // !_MIDL_USE_GUIDDEF_

#ifndef __cplusplus
#endif
#endif // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__
#endif // _MIDL_USE_GUIDDEF_

```

```

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif // !_MIDL_USE_GUIDDEF_

#ifndef MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);
#define MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#endif // !_MIDL_USE_GUIDDEF_

#ifndef __cplusplus
#endif
#endif // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__
#endif // _MIDL_USE_GUIDDEF_

```

```

#endif // __IID_DEFINED__

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#define _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif // !_MIDL_USE_GUIDDEF_

#ifndef __cplusplus
#endif
#endif // !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__
#endif // _MIDL_USE_GUIDDEF_

```

tpcc_com_ps_. p.c

```
#pragma warning( disable: 4049 ) /* more than 64k  
source lines */  
  
/* this ALWAYS GENERATED file contains the proxy stub  
code */  
  
/* File created by MIDL compiler version 5.03.0280  
*/  
/* at Mon Jun 12 18:15:12 2000  
*/  
/* Compiler settings for .\src\tpcc_com_ps.idl:  
    Oifc (OptLevel=i2), W1, Zp8, env=Win32 (32b run),  
    ms_ext, c_ext  
    error checks: allocation ref bounds_check enum  
    stub_data  
    VC __declspec() decoration level:  
        __declspec(uuid()), __declspec(selectany),  
        __declspec(novtable)  
        DECLSPEC_UUID(), MIDL_INTERFACE()  
*/  
//@@MIDL_FILE_HEADING( )  
  
#if !defined(_M_IA64) && !defined(_M_AXP64)  
#define USE_STUBLESS_PROXY  
  
/* verify that the <rpcproxy.h> version is high  
enough to compile this file*/  
#ifndef __RPCPROXY_H_VERSION__  
#define __REQUIRED_RPCPROXY_H_VERSION__ 440  
#endif  
  
#include "rpcproxy.h"  
#ifndef __RPCPROXY_H_VERSION__  
#error this stub requires an updated version of  
<rpcproxy.h>  
#endif // __RPCPROXY_H_VERSION__  
  
#include "tpcc_com_ps.h"  
  
#define TYPE_FORMAT_STRING_SIZE 997  
#define PROC_FORMAT_STRING_SIZE 193  
#define TRANSMIT_AS_TABLE_SIZE 0  
#define WIRE_MARSHAL_TABLE_SIZE 1  
  
typedef struct _MIDL_TYPE_FORMAT_STRING  
{  
    short Pad;  
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];  
} MIDL_TYPE_FORMAT_STRING;
```

```
typedef struct _MIDL_PROC_FORMAT_STRING  
{  
    short Pad;  
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];  
} MIDL_PROC_FORMAT_STRING;  
  
extern const MIDL_TYPE_FORMAT_STRING  
__MIDL_TypeFormatString;  
extern const MIDL_PROC_FORMAT_STRING  
__MIDL_ProcFormatString;  
  
/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,  
ver. 0.0,  
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0  
x00,0x00,0x00,0x00}} */  
  
/* Object interface: IUnknown, ver. 0.0,  
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0  
x00,0x00,0x00,0x46}} */  
  
/* Object interface: ITPCC, ver. 0.0,  
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0  
x4F,0xBF,0xE0,0x8B}} */  
  
extern const MIDL_STUB_DESC Object_StubDesc;  
  
extern const MIDL_SERVER_INFO ITPCC_ServerInfo;  
  
#pragma code_seg(".ropc")  
static const unsigned short  
ITPCC_FormatStringOffsetTable[] =  
{  
    0,  
    34,  
    68,  
    102,  
    136,  
    170  
};  
  
static const MIDL_SERVER_INFO ITPCC_ServerInfo =  
{  
    &Object_StubDesc,  
    0,  
    __MIDL_ProcFormatString.Format,  
    &ITPCC_FormatStringOffsetTable[-3],  
    0,  
    0,  
    0,  
    0  
};  
  
static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo  
= {  
    &Object_StubDesc,  
    __MIDL_ProcFormatString.Format,  
    &ITPCC_FormatStringOffsetTable[-3],  
    0,  
    0,  
    0,  
    0  
};  
  
CINTERFACE_PROXYVtbl(9) _ITPCCProxyVtbl =  
{  
    &ITPCC_ProxyInfo,  
    &IID_ITPCC,  
    Unknown_QueryInterface_Proxy,  
    Unknown_AddRef_Proxy,  
    Unknown_Release_Proxy,  
    (void *)-1 /* ITPCC::NewOrder */ ,  
    (void *)-1 /* ITPCC::Payment */ ,  
    (void *)-1 /* ITPCC::Delivery */ ,  
    (void *)-1 /* ITPCC::StockLevel */ ,  
    (void *)-1 /* ITPCC::OrderStatus */ ,  
    (void *)-1 /* ITPCC::CallSetComplete */  
};  
  
const CInterfaceStubVtbl _ITPCCStubVtbl =  
{  
    &IID_ITPCC,  
    &ITPCC_ServerInfo,  
    9,  
    0, /* pure interpreted */  
    CStdStubBuffer_METHODS  
};  
  
extern const USER_MARSHAL_ROUTINE_QUADRUPLE  
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];  
  
static const MIDL_STUB_DESC Object_StubDesc =  
{  
    0,  
    NdrOleAllocate,  
    NdrOleFree,  
    0,  
    0,  
    0,  
    0,  
    0,  
    __MIDL_TypeFormatString.Format,  
    1, /* -error bounds_check flag */  
    0x20000, /* Ndr library version */  
    0,  
    0x5030118, /* MIDL Version 5.3.280 */  
    0,  
    UserMarshalRoutines,  
    0, /* notify & notify_flag routine table */  
    0x1, /* MIDL flag */  
    0, /* Reserved3 */  
    0, /* Reserved4 */  
    0 /* Reserved5 */  
};  
  
#pragma data_seg(".rdata")
```

```

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
    ,VARIANT_UserMarshal
    ,VARIANT_UserUnmarshal
    ,VARIANT_UserFree
    }
};

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if !(TARGET_IS_NT40_OR_LATER)
#error You need Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {

        /* Procedure NewOrder */

        0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#if defined(_ALPHA)
#endif
#if defined(_PPC)
#endif
#if !defined(_MIPS_)
/* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
        NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
        NdrFcShort( 0x28 ), /* Alpha Stack
size/offset = 40 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
    }
};

```

```

/* 14 */ 0x7,           /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3,                 /* */
3 */

        /* Parameter txn_in */

/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef _MIPS_
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
        NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
        NdrFcShort( 0x8 ), /* PPC Stack
size/offset = 8 */
#endif
#endif
/* 20 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

        /* Parameter txn_out */

/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef _MIPS_
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
        NdrFcShort( 0x18 ), /* MIPS Stack
size/offset = 24 */
#endif
#else
        NdrFcShort( 0x18 ), /* PPC Stack
size/offset = 24 */
#endif
#endif
/* 26 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

        /* Return value */

/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef _MIPS_
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */

```

```

#else
        NdrFcShort( 0x1c ), /* MIPS Stack
size/offset = 28 */
#endif
#endif
#endif
/* 32 */ 0x8,           /* FC_LONG */
0x0,                 /* */
0 */

        /* Procedure Payment */

/* 34 */ 0x33,           /* FC_AUTO_HANDLE */
0x6c,                 /* Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef _MIPS_
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
        NdrFcShort( 0x20 ), /* MIPS Stack
size/offset = 32 */
#endif
#else
        NdrFcShort( 0x20 ), /* PPC Stack
size/offset = 32 */
#endif
#endif
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7,           /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3,                 /* */
3 */

        /* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef _MIPS_
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
        NdrFcShort( 0x8 ), /* MIPS Stack
size/offset = 8 */
#endif
#else
        NdrFcShort( 0x8 ), /* PPC Stack
size/offset = 8 */
#endif
#endif

```

```

#endif
#else
    NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 54 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
    NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif
#else
    NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#else
    NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 60 */ NdrFcShort( 0x3da ), /* Type
Offset=968 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
    NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#else
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#else
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 66 */ 0x8, /* FC_LONG */
0x0, /* */
0 */ /* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */

```

```

/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
    NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */
3 */ /* Parameter txn_in */

/* 84 */ NdrFcShort( 0xb ), /* Flags: must size,
must free, in, by val */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
    NdrFcShort( 0x8 ), /* MIPS Stack size/offset = 8 */
#endif
#else
    NdrFcShort( 0x8 ), /* PPC Stack size/offset = 8 */
#endif
#else
    NdrFcShort( 0x8 ), /* Alpha Stack size/offset = 8 */
#endif
/* 88 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
    NdrFcShort( 0x18 ), /* MIPS Stack size/offset = 24 */
#endif

```

```

#endif
#else
    NdrFcShort( 0x18 ), /* PPC Stack size/offset = 24 */
#endif
#else
    NdrFcShort( 0x18 ), /* Alpha Stack size/offset = 24 */
#endif
/* 94 */ NdrFcShort( 0x3da ), /* Type
Offset=968 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
    NdrFcShort( 0x1c ), /* MIPS Stack size/offset = 28 */
#endif
#else
    NdrFcShort( 0x1c ), /* PPC Stack size/offset = 28 */
#endif
#else
    NdrFcShort( 0x20 ), /* Alpha Stack size/offset = 32 */
#endif
/* 100 */ 0x8, /* FC_LONG */
0x0, /* */
0 */ /* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
    NdrFcShort( 0x20 ), /* MIPS Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x20 ), /* PPC Stack size/offset = 32 */
#endif
#else
    NdrFcShort( 0x28 ), /* Alpha Stack size/offset = 40 */
#endif
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 116 */ 0x7,                                /* Oi2 Flags:  srv must
size, clt must size, has return, */
                                                /* 0x3,
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags:  must size,
must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
MIPS Stack size/offset = 8 */
#endif
#ifndef _PPC_
#endif
#else
NdrFcShort( 0x8 ), /* */
PPC Stack size/offset = 8 */
#endif
#ifndef _PPC_
#endif
Alpha Stack size/offset = 8 */
#endif
/* 122 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
MIPS Stack size/offset = 24 */
#endif
#ifndef _PPC_
#endif
#else
NdrFcShort( 0x18 ), /* */
PPC Stack size/offset = 24 */
#endif
#ifndef _PPC_
#endif
Alpha Stack size/offset = 24 */
#endif
/* 128 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags:  out, return
base type, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */

```

```

#else
MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*

PPC Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*

Alpha Stack size/offset = 32 */
#endif
/* 134 */ 0x8,
/* FC_LONG */
0x0,
/* */

0 */

/* Procedure OrderStatus */

/* 136 */ 0x33,
/* FC_AUTO_HANDLE */
0x6c,
/* */

Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
#else
NdrFcShort( 0x20 ), /*

MIPS Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /*

PPC Stack size/offset = 32 */
#endif
#else
NdrFcShort( 0x20 ), /*

Alpha Stack size/offset = 40 */
#endif
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7,
/* Oi2 Flags: srv must
size, clt must size, has return, */
0x3,
/* */

3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
#ifndef _PPC_
#if !defined(_MIPS_)
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*

MIPS Stack size/offset = 8 */
#endif
#else
NdrFcShort( 0x8 ), /*

PPC Stack size/offset = 8 */

```

```

#endif
#else
Alpha Stack size/offset = 8 */
#endif
/* 156 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
#else
NdrFcShort( 0x18 ), /*

MIPS Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*

PPC Stack size/offset = 24 */
#endif
#else
NdrFcShort( 0x18 ), /*

Alpha Stack size/offset = 24 */
#endif
/* 162 */ NdrFcShort( 0x3da ), /* Type
Offset=986 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type */
#ifndef _ALPHA_
#ifndef _PPC_
#ifndef !_MIPS_
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
#else
NdrFcShort( 0x1c ), /*

MIPS Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x1c ), /*

PPC Stack size/offset = 28 */
#endif
#else
NdrFcShort( 0x20 ), /*

Alpha Stack size/offset = 32 */
#endif
/* 168 */ 0x8, /* FC_LONG */
0x0, /*

0 */ /*

Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*

Old Flags: object 0i2 */

```

```

/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
#ifndef _ALPHA_
/* 178 */ NdrFcShort( 0x8 ), /* x86, MIPS, PPC Stack
size/offset = 8 */
#else
NdrFcShort( 0x10 ), /*
Alpha Stack size/offset = 16 */
#endif
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /* */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 188 */ NdrFcShort( 0x4 ), /* x86, MIPS, PPC Stack
size/offset = 4 */
#else
NdrFcShort( 0x8 ), /*
Alpha Stack size/offset = 8 */
#endif
/* 190 */ 0x8, /* FC_LONG */
0x0, /* */

0x0
};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
0,
{
NdrFcShort( 0x0 ), /* */
0 */ /* */
0x12, 0x0, /* */
FC_UP */
/* 4 */ NdrFcShort( 0x3b0 ), /* Offset= 944 (948) */
/* 6 */ 0x2b, /* */
FC_NON_ENCAPSULATED_UNION */
0x9, /* */
FC ULONG */
/* 8 */ 0x7, /* Corr desc: FC USHORT */
*/
0x0, /* */
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2b ), /* 43 */
/* 18 */ NdrFcLong( 0x3 ), /* 3 */
/* 22 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 24 */ NdrFcLong( 0x11 ), /* 17 */
/* 28 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYT */
/* 30 */ NdrFcLong( 0x2 ), /* 2 */
/* 34 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 36 */ NdrFcLong( 0x4 ), /* 4 */
/* 40 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 42 */ NdrFcLong( 0x5 ), /* 5 */
/* 46 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 48 */ NdrFcLong( 0xb ), /* 11 */
/* 52 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 54 */ NdrFcLong( 0xa ), /* 10 */
/* 58 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 60 */ NdrFcLong( 0x6 ), /* 6 */
/* 64 */ NdrFcShort( 0xd6 ), /* Offset= 214 (278) */
/* 66 */ NdrFcLong( 0x7 ), /* 7 */
/* 70 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 72 */ NdrFcLong( 0x8 ), /* 8 */
/* 76 */ NdrFcShort( 0xd0 ), /* Offset= 208 (284) */
/* 78 */ NdrFcLong( 0xd ), /* 13 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0x9 ), /* 9 */
/* 88 */ NdrFcShort( 0xee ), /* Offset= 238 (326) */
/* 90 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 94 */ NdrFcShort( 0xfa ), /* Offset= 250 (344) */
/* 96 */ NdrFcLong( 0x24 ), /* 36 */
/* 100 */ NdrFcShort( 0x308 ), /* Offset= 776 (876) */
/* 102 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 106 */ NdrFcShort( 0x302 ), /* Offset= 770 (876) */
/* 108 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 112 */ NdrFcShort( 0x300 ), /* Offset= 768 (880) */
/* 114 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 118 */ NdrFcShort( 0x2fe ), /* Offset= 766 (884) */
/* 120 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 124 */ NdrFcShort( 0x2fc ), /* Offset= 764 (888) */
/* 126 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 130 */ NdrFcShort( 0x2fa ), /* Offset= 762 (892) */
/* 132 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 136 */ NdrFcShort( 0x2f8 ), /* Offset= 760 (896) */
/* 138 */ NdrFcLong( 0x400b ), /* 16395 */
/* 142 */ NdrFcShort( 0x2e6 ), /* Offset= 742 (884) */
/* 144 */ NdrFcLong( 0x400a ), /* 16394 */
/* 148 */ NdrFcShort( 0x2e4 ), /* Offset= 740 (888) */
/* 150 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 154 */ NdrFcShort( 0x2ea ), /* Offset= 746 (900) */
/* 156 */ NdrFcLong( 0x4007 ), /* 16391 */

```

```

/* 160 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (896) */
/* 162 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 166 */ NdrFcShort( 0x2e2 ), /* Offset= 738 (904) */
/* 168 */ NdrFcLong( 0x400d ), /* 16397 */
/* 172 */ NdrFcShort( 0x2e0 ), /* Offset= 736 (908) */
/* 174 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 178 */ NdrFcShort( 0x2de ), /* Offset= 734 (912) */
/* 180 */ NdrFcLong( 0x4000 ), /* 24576 */
/* 184 */ NdrFcShort( 0x2dc ), /* Offset= 732 (916) */
/* 186 */ NdrFcLong( 0x400c ), /* 16396 */
/* 190 */ NdrFcShort( 0x2da ), /* Offset= 730 (920) */
/* 192 */ NdrFcLong( 0x4010 ), /* 16 */
/* 196 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 198 */ NdrFcLong( 0x4012 ), /* 18 */
/* 202 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 204 */ NdrFcLong( 0x4013 ), /* 19 */
/* 208 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 210 */ NdrFcLong( 0x4016 ), /* 22 */
/* 214 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 216 */ NdrFcLong( 0x4017 ), /* 23 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x40e ), /* 14 */
/* 226 */ NdrFcShort( 0x2be ), /* Offset= 702 (928) */
/* 228 */ NdrFcLong( 0x400e ), /* 16398 */
/* 232 */ NdrFcShort( 0x2c4 ), /* Offset= 708 (940) */
/* 234 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 238 */ NdrFcShort( 0x2c2 ), /* Offset= 706 (944) */
/* 240 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 244 */ NdrFcShort( 0x280 ), /* Offset= 640 (884) */
/* 246 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 250 */ NdrFcShort( 0x27e ), /* Offset= 638 (888) */
/* 252 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 256 */ NdrFcShort( 0x278 ), /* Offset= 632 (888) */
/* 258 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 262 */ NdrFcShort( 0x272 ), /* Offset= 626 (888) */
/* 264 */ NdrFcLong( 0x400 ), /* 0 */
/* 268 */ NdrFcShort( 0x0 ), /* Offset= 0 (268) */
/* 270 */ NdrFcLong( 0x1 ), /* 1 */
/* 274 */ NdrFcShort( 0x0 ), /* Offset= 0 (274) */
/* 276 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(275) */
/* 278 */ /*

FC_STRUCT */
0x15, /* */

```

<pre> 7 */ /* 280 */ NdrFcShort(0x8), /* 8 */ /* 282 */ 0xb, /* FC_HYPER */ 0x5b, /* */ FC_END */ /* 284 */ 0x12, 0x0, /* */ FC_UP */ /* 286 */ NdrFcShort(0xc), /* Offset= 12 (298) */ /* 288 */ 0x1b, /* */ FC_CARRAY */ 0x1, /* */ 1 */ /* 290 */ NdrFcShort(0x2), /* 2 */ /* 292 */ 0x9, /* Corr desc: FC ULONG */ */ 0x0, /* */ /* 294 */ NdrFcShort(0xffffc), /* -4 */ /* 296 */ 0x6, /* FC_SHORT */ 0x5b, /* */ FC_END */ /* 298 */ 0x17, /* */ FC_CSTRUCT */ 0x3, /* */ 3 */ /* 300 */ NdrFcShort(0x8), /* 8 */ /* 302 */ NdrFcShort(0xfffffffff2), /* Offset= -14 (288) */ /* 304 */ 0x8, /* FC_LONG */ 0x8, /* */ FC_LONG */ /* 306 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 308 */ 0x2f, /* */ FC_IP */ 0x5a, /* */ FC_CONSTANT_IID */ /* 310 */ NdrFcLong(0x0), /* 0 */ /* 314 */ NdrFcShort(0x0), /* 0 */ /* 316 */ NdrFcShort(0x0), /* 0 */ /* 318 */ 0xc0, /* 192 */ 0x0, /* */ 0 */ /* 320 */ 0x0, /* 0 */ 0x0, /* */ 0 */ /* 322 */ 0x0, /* 0 */ 0x0, /* */ 0 */ /* 324 */ 0x0, /* 0 */ 0x46, /* */ 70 */ /* 326 */ 0x2f, /* */ FC_IP */ 0x5a, /* */ FC_CONSTANT_IID */ </pre>	<pre> 0x7, /* */ /* 328 */ NdrFcLong(0x20400), /* 132096 */ /* 332 */ NdrFcShort(0x0), /* 0 */ /* 334 */ NdrFcShort(0x0), /* 0 */ /* 336 */ 0xc0, /* 192 */ 0x0, /* */ 0 */ /* 338 */ 0x0, /* 0 */ 0x0, /* */ 0 */ /* 340 */ 0x0, /* 0 */ 0x0, /* */ 0 */ /* 342 */ 0x0, /* 0 */ 0x46, /* */ 70 */ /* 344 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 346 */ NdrFcShort(0x2), /* Offset= 2 (348) */ /* 348 */ 0x12, 0x0, /* */ FC_UP */ /* 350 */ NdrFcShort(0x1fc), /* Offset= 508 (858) */ /* 352 */ 0x2a, /* */ FC_ENCAPSULATED_UNION */ 0x49, /* */ 73 */ /* 354 */ NdrFcShort(0x18), /* 24 */ /* 356 */ NdrFcShort(0xa), /* 10 */ /* 358 */ NdrFcLong(0x8), /* 8 */ /* 362 */ NdrFcShort(0x58), /* Offset= 88 (450) */ /* 364 */ NdrFcLong(0xd), /* 13 */ /* 368 */ NdrFcShort(0x78), /* Offset= 120 (488) */ /* 370 */ NdrFcLong(0x9), /* 9 */ /* 374 */ NdrFcShort(0x94), /* Offset= 148 (522) */ /* 376 */ NdrFcLong(0xc), /* 12 */ /* 380 */ NdrFcShort(0xbc), /* Offset= 188 (568) */ /* 382 */ NdrFcLong(0x24), /* 36 */ /* 386 */ NdrFcShort(0x114), /* Offset= 276 (662) */ /* 388 */ NdrFcLong(0x800d), /* 32781 */ /* 392 */ NdrFcShort(0x130), /* Offset= 304 (696) */ /* 394 */ NdrFcLong(0x10), /* 16 */ /* 398 */ NdrFcShort(0x148), /* Offset= 328 (726) */ /* 400 */ NdrFcLong(0x2), /* 2 */ /* 404 */ NdrFcShort(0x160), /* Offset= 352 (756) */ /* 406 */ NdrFcLong(0x3), /* 3 */ /* 410 */ NdrFcShort(0x178), /* Offset= 376 (786) */ /* 412 */ NdrFcLong(0x14), /* 20 */ /* 416 */ NdrFcShort(0x190), /* Offset= 400 (816) */ /* 418 */ NdrFcShort(0xffffffff), /* Offset= -1 (417) */ /* 420 */ 0x1b, /* */ FC_CARRAY */ </pre>	<pre> 0x3, /* */ 3 */ /* 422 */ NdrFcShort(0x4), /* 4 */ /* 424 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 426 */ NdrFcShort(0x0), /* 0 */ /* 428 */ 0x4b, /* */ FC_PP */ 0x5c, /* */ FC_PAD */ /* 430 */ 0x48, /* */ FC_VARIABLE_REPEAT */ 0x49, /* */ FC_FIXED_OFFSET */ /* 432 */ NdrFcShort(0x4), /* 4 */ /* 434 */ NdrFcShort(0x0), /* 0 */ /* 436 */ NdrFcShort(0x1), /* 1 */ /* 438 */ NdrFcShort(0x0), /* 0 */ /* 440 */ NdrFcShort(0x0), /* 0 */ /* 442 */ 0x12, 0x0, /* FC_UP */ /* 444 */ NdrFcShort(0xfffffffff6e), /* Offset= -146 (298) */ /* 446 */ 0x5b, /* */ FC_END */ 0x8, /* */ FC_LONG */ /* 448 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 450 */ 0x16, /* */ FC_PSTRUCT */ 0x3, /* */ 3 */ /* 452 */ NdrFcShort(0x8), /* 8 */ /* 454 */ 0x4b, /* */ FC_PP */ 0x5c, /* */ FC_PAD */ /* 456 */ 0x46, /* */ FC_NO_REPEAT */ 0x5c, /* */ FC_PAD */ /* 458 */ NdrFcShort(0x4), /* 4 */ /* 460 */ NdrFcShort(0x4), /* 4 */ /* 462 */ 0x11, 0x0, /* FC_RP */ /* 464 */ NdrFcShort(0xfffffffffd4), /* Offset= -44 (420) */ /* 466 */ 0x5b, /* */ FC_END */ 0x8, /* */ FC_LONG */ /* 468 */ 0x8, /* FC_LONG */ </pre>
---	---	--

```

    0x5b,          /* */
FC_END */
/* 470 */
    0x21,          /* */
FC_BOGUS_ARRAY */
    0x3,           /* */
3 */
/* 472 */ NdrFcShort( 0x0 ), /* 0 */
/* 474 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
    0x0,           /* */
*/
/* 476 */ NdrFcShort( 0x0 ), /* 0 */
/* 478 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 482 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
    0x0,           /* */
0 */
/* 484 */ NdrFcShort( 0xfffffff50 ), /* Offset= -
176 (308) */
/* 486 */ 0x5c, /* FC_PAD */
    0x5b,           /* */
FC_END */
/* 488 */
    0x1a,          /* */
FC_BOGUS_STRUCT */
    0x3,           /* */
3 */
/* 490 */ NdrFcShort( 0x8 ), /* 8 */
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x6 ), /* Offset= 6 (500) */
/* 496 */ 0x8,
    0x36,           /* */
FC_POINTER */
/* 498 */ 0x5c, /* FC_PAD */
    0x5b,           /* */
FC_END */
/* 500 */
    0x11, 0x0, /* */
FC_RP */
/* 502 */ NdrFcShort( 0xffffffe0 ), /* Offset= -
32 (470) */
/* 504 */
    0x21,          /* */
FC_BOGUS_ARRAY */
    0x3,           /* */
3 */
/* 506 */ NdrFcShort( 0x0 ), /* 0 */
/* 508 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
    0x0,           /* */
*/
/* 510 */ NdrFcShort( 0x0 ), /* 0 */
/* 512 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
    0x0,           /* */
0 */
/* 518 */ NdrFcShort( 0xfffffff40 ), /* Offset= -
192 (326) */
/* 520 */ 0x5c, /* FC_PAD */
    0x5b,           /* */
FC_END */

```

<pre> /* 522 */ 0x1a, /* */ FC_BOGUS_STRUCT */ 0x3, /* */ 3 */ /* 524 */ NdrFcShort(0x8), /* 8 */ /* 526 */ NdrFcShort(0x0), /* 0 */ /* 528 */ NdrFcShort(0x6), /* Offset= 6 (534) */ /* 530 */ 0x8, 0x36, /* */ FC_POINTER */ /* 532 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 534 */ 0x11, 0x0, /* */ FC_RP */ /* 536 */ NdrFcShort(0xfffffff0), /* Offset= - 32 (504) */ /* 538 */ 0x1b, /* */ FC_CARRAY */ 0x3, /* */ 3 */ /* 540 */ NdrFcShort(0x4), /* 4 */ /* 542 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ */ /* 544 */ NdrFcShort(0x0), /* 0 */ /* 546 */ 0x4b, /* */ FC_PP */ 0x5c, /* */ FC_PAD */ /* 548 */ 0x48, /* */ FC_VARIABLE_REPEAT */ 0x49, /* */ FC_FIXED_OFFSET */ /* 550 */ NdrFcShort(0x4), /* 4 */ /* 552 */ NdrFcShort(0x0), /* 0 */ /* 554 */ NdrFcShort(0x1), /* 1 */ /* 556 */ NdrFcShort(0x0), /* 0 */ /* 558 */ NdrFcShort(0x0), /* 0 */ /* 560 */ 0x12, 0x0, /* FC_UP */ /* 562 */ NdrFcShort(0x182), /* Offset= 386 (948) */ /* 564 */ 0x5b, /* */ FC_END */ 0x8, /* */ FC_LONG */ /* 566 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 568 */ 0x1a, /* */ FC_BOGUS_STRUCT */ 0x3, /* */ 3 */ /* 570 */ NdrFcShort(0x8), /* 8 */ </pre>	<pre> /* 572 */ NdrFcShort(0x0), /* 0 */ /* 574 */ NdrFcShort(0x6), /* Offset= 6 (580) */ /* 576 */ 0x8, 0x36, /* */ FC_POINTER */ /* 578 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 580 */ 0x11, 0x0, /* */ FC_RP */ /* 582 */ NdrFcShort(0xfffffff4d), /* Offset= - 44 (538) */ /* 584 */ 0x2f, /* */ FC_IP */ 0x5a, /* */ FC_CONSTANT_IID */ /* 586 */ NdrFcLong(0x2f), /* 47 */ /* 590 */ NdrFcShort(0x0), /* 0 */ /* 592 */ NdrFcShort(0x0), /* 0 */ /* 594 */ 0xc0, 0x0, /* */ 0 */ /* 596 */ 0x0, /* */ 0 */ /* 598 */ 0x0, /* */ 0 */ /* 600 */ 0x0, /* */ 0x46, 70 */ /* 602 */ 0x1b, /* */ FC_CARRAY */ 0x0, /* */ 0 */ /* 604 */ NdrFcShort(0x1), /* 1 */ /* 606 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ */ /* 608 */ NdrFcShort(0x4), /* 4 */ /* 610 */ 0x1, 0x5b, /* */ FC_END */ /* 612 */ 0x1a, /* */ FC_BOGUS_STRUCT */ 0x3, /* */ 3 */ /* 614 */ NdrFcShort(0x10), /* 16 */ /* 616 */ NdrFcShort(0x0), /* 0 */ /* 618 */ NdrFcShort(0xa), /* Offset= 10 (628) */ /* 620 */ 0x8, 0x8, /* */ FC_LONG */ /* 622 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ 0x0, /* */ 0 */ </pre>
--	--

```

/* 624 */ NdrFcShort( 0xfffffd8 ), /* Offset= -40 (584) */
/* 626 */ 0x36, /* FC_POINTER */
          0x5b, /* */
FC_END */
/* 628 */
          0x12, 0x0, /* */
FC_UP */
/* 630 */ NdrFcShort( 0xffffffe4 ), /* Offset= -28 (602) */
/* 632 */
          0x1b, /* */
FC_CARRAY */
          0x3, /* */
3 */
/* 634 */ NdrFcShort( 0x4 ), /* 4 */
/* 636 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
          0x0, /* */
*/
/* 638 */ NdrFcShort( 0x0 ), /* 0 */
/* 640 */
          0x4b, /* */
FC_PP */
          0x5c, /* */
FC_PAD */
/* 642 */
          0x48, /* */
FC_VARIABLE_REPEAT */
          0x49, /* */
FC_FIXED_OFFSET */
/* 644 */ NdrFcShort( 0x4 ), /* 4 */
/* 646 */ NdrFcShort( 0x0 ), /* 0 */
/* 648 */ NdrFcShort( 0x1 ), /* 1 */
/* 650 */ NdrFcShort( 0x0 ), /* 0 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x12, 0x0, /* FC_UP */
/* 656 */ NdrFcShort( 0xfffffd4 ), /* Offset= -44 (612) */
/* 658 */
          0x5b, /* */
FC_END */
          0x8, /* */
FC_LONG */
/* 660 */ 0x5c, /* FC_PAD */
          0x5b, /* */
FC_END */
/* 662 */
          0x1a, /* */
FC_BOOGUS_STRUCT */
          0x3, /* */
3 */
/* 664 */ NdrFcShort( 0x8 ), /* 8 */
/* 666 */ NdrFcShort( 0x0 ), /* 0 */
/* 668 */ NdrFcShort( 0x6 ), /* Offset= 6 (674) */
/* 670 */ 0x8,
          0x36, /* */
FC_POINTER */
/* 672 */ 0x5c, /* FC_PAD */
          0x5b, /* */
FC_END */
/* 674 */

```

<pre> 0x11, 0x0, /* */ FC_RP */ /* 676 */ NdrFcShort(0xfffffd4), /* Offset= -44 (632) */ /* 678 */ 0x1d, /* */ FC_SMFARRAY */ 0x0, /* */ 0 */ /* 680 */ NdrFcShort(0x8), /* 8 */ /* 682 */ 0x2, 0x5b, /* */ FC_END */ /* 684 */ 0x15, /* */ FC_STRUCT */ 0x3, /* */ 3 */ /* 686 */ NdrFcShort(0x10), /* 16 */ /* 688 */ 0x8, 0x6, /* */ FC_SHORT */ /* 690 */ 0x6, 0x4c, /* */ FC_EMBEDDED_COMPLEX */ /* 692 */ 0x0, 0x5b, /* */), /* Offset= -15 (678) */ FC_END */ /* 696 */ 0x1a, /* */ FC_BOOGUS_STRUCT */ 0x3, /* */ 3 */ /* 698 */ NdrFcShort(0x18), /* 24 */ /* 700 */ NdrFcShort(0x0), /* 0 */ /* 702 */ NdrFcShort(0xa), /* Offset= 10 (712) */ /* 704 */ 0x8, 0x36, /* */ FC_POINTER */ /* 706 */ 0x4c, 0x0, /* */ 0 */ /* 708 */ NdrFcShort(0xfffffe8), /* Offset= -24 (684) */ /* 710 */ 0x5c, 0x5b, /* */ FC_END */ /* 712 */ 0x11, 0x0, /* */ FC_RP */ /* 714 */ NdrFcShort(0xfffffd0c), /* Offset= -244 (470) */ /* 716 */ 0x1b, /* */ FC_CARRAY */ 0x0, /* */ 0 */ /* 718 */ NdrFcShort(0x1), /* 1 */ /* 720 */ 0x19, 0x5b, /* */ </pre>	<pre> 0x0, /* */ */ /* 722 */ NdrFcShort(0x0), /* 0 */ /* 724 */ 0x1, 0x5b, /* */ FC_END */ /* 726 */ 0x16, /* */ FC_PSTRUCT */ 0x3, /* */ 3 */ /* 728 */ NdrFcShort(0x8), /* 8 */ /* 730 */ 0x4b, /* */ FC_PP */ 0x5c, /* */ FC_PAD */ /* 732 */ 0x46, /* */ FC_NO_REPEAT */ 0x5c, /* */ FC_PAD */ /* 734 */ NdrFcShort(0x4), /* 4 */ /* 736 */ NdrFcShort(0x4), /* 4 */ /* 738 */ 0x12, 0x0, /* FC_UP */ /* 740 */ NdrFcShort(0xfffffe8), /* Offset= -24 (716) */ /* 742 */ 0x5b, /* */ FC_END */ 0x8, /* */ FC_LONG */ /* 744 */ 0x8, 0x5b, /* */ FC_END */ /* 746 */ 0x1b, /* */ FC_CARRAY */ 0x1, /* */ 1 */ /* 748 */ NdrFcShort(0x2), /* 2 */ /* 750 */ 0x19, 0x0, /* */ Corr desc: field pointer, FC ULONG */ 0x0, /* */ */ /* 752 */ NdrFcShort(0x0), /* 0 */ /* 754 */ 0x6, 0x5b, /* */ FC_END */ /* 756 */ 0x16, /* */ FC_PSTRUCT */ 0x3, /* */ 3 */ /* 758 */ NdrFcShort(0x8), /* 8 */ /* 760 */ 0x4b, /* */ FC_PP */ 0x5c, /* */ FC_PAD */ /* 762 */ </pre>
---	--

<pre> FC_NO_REPEAT */ 0x46, /* 0x46, */ /* 0x5c, */ FC_PAD */ /* 764 */ NdrFcShort(0x4), /* 4 */ /* 766 */ NdrFcShort(0x4), /* 4 */ /* 768 */ 0x12, 0x0, /* FC_UP */ /* 770 */ NdrFcShort(0xffffffe8), /* Offset= -24 (746) */ /* 772 */ FC_END */ /* 0x5b, */ FC_LONG */ /* 774 */ 0x8, /* FC_LONG */ /* 0x5b, */ FC_END */ /* 776 */ /* 0x1b, */ FC_CARRAY */ /* 0x3, */ 3 */ /* 778 */ NdrFcShort(0x4), /* 4 */ /* 780 */ 0x19, /* Corr desc: field pointer, FC ULONG */ /* 0x0, */ */ /* 782 */ NdrFcShort(0x0), /* 0 */ /* 784 */ 0x8, /* FC_LONG */ /* 0x5b, */ FC_END */ /* 786 */ /* 0x16, */ FC_PSTRUCT */ /* 0x3, */ 3 */ /* 788 */ NdrFcShort(0x8), /* 8 */ /* 790 */ /* 0x4b, */ FC_PP */ /* 0x5c, */ FC_PAD */ /* 792 */ /* 0x46, */ FC_NO_REPEAT */ /* 0x5c, */ FC_PAD */ /* 794 */ NdrFcShort(0x4), /* 4 */ /* 796 */ NdrFcShort(0x4), /* 4 */ /* 798 */ 0x12, 0x0, /* FC_UP */ /* 800 */ NdrFcShort(0xffffffe8), /* Offset= -24 (776) */ /* 802 */ /* 0x5b, */ FC_END */ /* 0x8, */ FC_LONG */ /* 804 */ 0x8, /* FC_LONG */ /* 0x5b, */ FC_END */ /* 806 */ </pre>	<pre> /* 0x1b, */ FC_CARRAY */ /* 0x7, */ 7 */ /* 808 */ NdrFcShort(0x8), /* 8 */ /* 810 */ 0x19, /* Corr desc: field pointer, FC ULONG */ /* 0x0, */ */ /* 812 */ NdrFcShort(0x0), /* 0 */ /* 814 */ 0xb, /* FC_HYPER */ /* 0x5b, */ FC_END */ /* 816 */ /* 0x16, */ FC_PSTRUCT */ /* 0x3, */ 3 */ /* 818 */ NdrFcShort(0x8), /* 8 */ /* 820 */ /* 0x4b, */ FC_PP */ /* 0x5c, */ FC_PAD */ /* 822 */ /* 0x46, */ FC_NO_REPEAT */ /* 0x5c, */ FC_PAD */ /* 824 */ NdrFcShort(0x4), /* 4 */ /* 826 */ NdrFcShort(0x4), /* 4 */ /* 828 */ 0x12, 0x0, /* FC_UP */ /* 830 */ NdrFcShort(0xffffffe8), /* Offset= -24 (806) */ /* 832 */ /* 0x5b, */ FC_END */ /* 0x8, */ FC_LONG */ /* 834 */ 0x8, /* FC_LONG */ /* 0x5b, */ FC_END */ /* 836 */ /* 0x15, */ FC_STRUCT */ /* 0x3, */ 3 */ /* 838 */ NdrFcShort(0x8), /* 8 */ /* 840 */ 0x8, /* FC_LONG */ /* 0x8, */ FC_LONG */ /* 842 */ 0x5c, /* FC_PAD */ /* 0x5b, */ FC_END */ /* 844 */ /* 0x1b, */ FC_CARRAY */ /* 0x3, */ 3 */ /* 846 */ NdrFcShort(0x8), /* 8 */ /* 848 */ 0x7, /* Corr desc: FC USHORT */ </pre>	<pre> /* 0x0, */ /* 850 */ NdrFcShort(0xfffffd8), /* -40 */ /* 852 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 0x0, */ 0 */ /* 854 */ NdrFcShort(0xfffffff8), /* Offset= -18 (836) */ /* 856 */ 0x5c, /* FC_PAD */ /* 0x5b, */ FC_END */ /* 858 */ /* 0x1a, */ FC_BOGUS_STRUCT */ /* 0x3, */ 3 */ /* 860 */ NdrFcShort(0x28), /* 40 */ /* 862 */ NdrFcShort(0xfffffff8), /* Offset= -18 (844) */ /* 864 */ NdrFcShort(0x0), /* Offset= 0 (864) */ /* 866 */ 0x6, /* FC_SHORT */ /* 0x6, */ FC_SHORT */ /* 868 */ 0x38, /* FC_ALIGNM4 */ /* 0x8, */ FC_LONG */ /* 870 */ 0x8, /* FC_LONG */ /* 0x4c, */ FC_EMBEDDED_COMPLEX */ /* 872 */ 0x0, /* 0 */ /* NdrFcShort(0xfffffd7), /* Offset= -521 (352) */ /* 0x5b, */ FC_END */ /* 876 */ /* 0x12, 0x0, */ FC_UP */ /* 878 */ NdrFcShort(0xfffffef6), /* Offset= -266 (612) */ /* 880 */ /* 0x12, 0x8, */ FC_UP [simple_pointer] */ /* 882 */ 0x1, /* FC_BYTE */ /* 0x5c, */ FC_PAD */ /* 884 */ /* 0x12, 0x8, */ FC_UP [simple_pointer] */ /* 886 */ 0x6, /* FC_SHORT */ /* 0x5c, */ FC_PAD */ /* 888 */ /* 0x12, 0x8, */ FC_UP [simple_pointer] */ /* 890 */ 0x8, /* FC_LONG */ /* 0x5c, */ FC_PAD */ /* 892 */ /* 0x12, 0x8, */ FC_UP [simple_pointer] */ /* 894 */ 0xa, /* FC_FLOAT */ /* / * FC_FLOAT */ </pre>
---	---	---

```

    0x5c,          /* */
FC_PAD */
/* 896 */
    0x12, 0x8,      /* */
FC_UP [simple_pointer] */
/* 898 */ 0xc,
    /* FC_DOUBLE */
    0x5c,          /* */
FC_PAD */
/* 900 */
    0x12, 0x0,      /* */
FC_UP */
/* 902 */ NdrFcShort( 0xfffffd90 ), /* Offset= - 624 (278) */
/* 904 */
    0x12, 0x10,     /* */
FC_UP [pointer_deref] */
/* 906 */ NdrFcShort( 0xfffffd92 ), /* Offset= - 622 (284) */
/* 908 */
    0x12, 0x10,     /* */
FC_UP [pointer_deref] */
/* 910 */ NdrFcShort( 0xfffffd46 ), /* Offset= - 602 (308) */
/* 912 */
    0x12, 0x10,     /* */
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfffffdb4 ), /* Offset= - 588 (326) */
/* 916 */
    0x12, 0x10,     /* */
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfffffdc2 ), /* Offset= - 574 (344) */
/* 920 */
    0x12, 0x10,     /* */
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0x2 ), /* Offset= 2 (924) */
/* 924 */
    0x12, 0x0,      /* */
FC_UP */
/* 926 */ NdrFcShort( 0x16 ), /* Offset= 22 (948) */
/* 928 */
    0x15,          /* */
FC_STRUCT */
    0x7,           /* */
7 */
/* 930 */ NdrFcShort( 0x10 ), /* 16 */
/* 932 */ 0x6,
    /* FC_SHORT */
    0x1,           /* */
FC_BYTE */
/* 934 */ 0x1,
    /* FC_BYTE */
    0x38,          /* */
FC_ALIGNM4 */
/* 936 */ 0x8,
    /* FC_LONG */
    0x39,          /* */
FC_ALIGNM8 */
/* 938 */ 0xb,
    /* FC_HYPER */
    0x5b,          /* */
FC_END */
/* 940 */
    0x12, 0x0,      /* */
FC_UP */
    0x5c,          /* */
/* 942 */ NdrFcShort( 0xfffffffff2 ), /* Offset= - 14 (928) */
/* 944 */
    0x12, 0x8,      /* */
FC_UP [simple_pointer] */
/* 946 */ 0x2,
    /* FC_CHAR */
    0x5c,          /* */
FC_PAD */
/* 948 */
    0xa1,          /* */
FC_BOGUS_STRUCT */
    0x7,           /* */
7 */
/* 950 */ NdrFcShort( 0x20 ), /* 32 */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x0 ), /* Offset= 0 (954) */
/* 956 */ 0x8,
    /* FC_LONG */
    0x8,           /* */
FC_LONG */
/* 958 */ 0x6,
    /* FC_SHORT */
    0x6,           /* */
FC_SHORT */
/* 960 */ 0x6,
    /* FC_SHORT */
    0x6,           /* */
FC_SHORT */
/* 962 */ 0x4c,
    /* FC_EMBEDDED_COMPLEX */
    0x0,           /* */
0 */
/* 964 */ NdrFcShort( 0xfffffc42 ), /* Offset= - 958 (6) */
/* 966 */ 0x5c,
    /* FC_PAD */
    0x5b,           /* */
FC_END */
/* 968 */ 0xb4,
    /* FC_USER_MARSHAL */
    0x83,           /* */
131 */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x10 ), /* 16 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffc32 ), /* Offset= - 974 (2) */
/* 978 */
    0x11, 0x4,      /* */
FC_RP [allocoed_on_stack] */
/* 980 */ NdrFcShort( 0x6 ), /* Offset= 6 (986) */
/* 982 */
    0x13, 0x0,      /* */
FC_OP */
/* 984 */ NdrFcShort( 0xfffffdc ), /* Offset= - 36 (948) */
/* 986 */ 0xb4,
    /* FC_USER_MARSHAL */
    0x83,           /* */
131 */
/* 988 */ NdrFcShort( 0x0 ), /* 0 */
/* 990 */ NdrFcShort( 0x10 ), /* 16 */
/* 992 */ NdrFcShort( 0x0 ), /* 0 */
/* 994 */ NdrFcShort( 0xfffffffff4 ), /* Offset= - 12 (982) */
    0x0
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl * ) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl * ) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, piID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * piID, int * pIndex )
{
    if( !_tpcc_com_ps_CHECK_IID(0) )
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList * ) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList * ) &
_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AXP64) */

```

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 5.03.0280
*/
/* at Mon Jun 12 18:15:12 2000
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf (OptLevel2), W1, Zp8, env=Win64 (32b
run, appending), ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AXP64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 979
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;

```

```

extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0
};

```

```

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    Unknown_QueryInterface_Proxy,
    Unknown_AddRef_Proxy,
    Unknown_Release_Proxy ,
    (void *)-1 /* ITPCC::NewOrder */ ,
    (void *)-1 /* ITPCC::Payment */ ,
    (void *)-1 /* ITPCC::Delivery */ ,
    (void *)-1 /* ITPCC::StockLevel */ ,
    (void *)-1 /* ITPCC::OrderStatus */ ,
    (void *)-1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrAllocate,
    NdrFree,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x50002, /* Ndr library version */
    0,
    0x5030118, /* MIDL Version 5.3.280 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* Reserved3 */
    0, /* Reserved4 */
    0 /* Reserved5 */
};

#pragma data_seg(".rdata")

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

```

```

};

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    {
        /* Procedure NewOrder */
        0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
#ifndef _ALPHA_
/* 8 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x47,      /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /* 3 */
/* 16 */ 0xa,       /* 10 */
        0x7,           /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 18 */ NdrFcShort( 0x20 ), /* 32 */
/* 20 */ NdrFcShort( 0x20 ), /* 32 */
/* 22 */ NdrFcShort( 0x0 ), /* 0 */
/* 24 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

/* 26 */ NdrFcShort( 0xb8 ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
/* 28 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
        NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 30 */ NdrFcShort( 0xb6 ), /* Type
Offset=950 */

        /* Parameter txn_out */

/* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */

```

```

#ifndef _ALPHA_
/* 34 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 36 */ NdrFcShort( 0xc8 ), /* Type
Offset=968 */

        /* Return value */

/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 40 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 42 */ 0x8,           /* FC_LONG */
        0x0,           /* 0 */

        /* Procedure Payment */

/* 44 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
#ifndef _ALPHA_
/* 52 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /* 3 */
/* 60 */ 0xa,           /* 10 */
        0x7,           /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */

/* 70 */ NdrFcShort( 0xb8 ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
/* 72 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else

```

```

NdrFcShort( 0x8 ), /* */
axp64 Stack size/offset = 8 */
#endif
/* 74 */ NdrFcShort( 0xb6 ), /* Type
Offset=950 */

        /* Parameter txn_out */

/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifndef _ALPHA_
/* 78 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
        NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 80 */ NdrFcShort( 0xc8 ), /* Type
Offset=968 */

        /* Return value */

/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 84 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
        NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 86 */ 0x8,           /* FC_LONG */
        0x0,           /* 0 */

        /* Procedure Delivery */

/* 88 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /* Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
#ifndef _ALPHA_
/* 96 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
        NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /* 3 */
/* 104 */ 0xa,           /* 10 */
        0x7,           /* Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 112 */ NdrFcShort( 0x0 ), /* 0 */
          /* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
/* 116 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 118 */ NdrFcShort( 0x3b6 ), /* Type
Offset=950 */

          /* Parameter txn_out */

/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifndef _ALPHA_
/* 122 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 124 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

          /* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 128 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 130 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

          /* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
#ifndef _ALPHA_
/* 140 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* */
3 */
/* 148 */ 0xa, /* 10 */
0x7, /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

          /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
/* 160 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
NdrFcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 162 */ NdrFcShort( 0x3b6 ), /* Type
Offset=950 */

          /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifndef _ALPHA_
/* 166 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
NdrFcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 168 */ NdrFcShort( 0x3c8 ), /* Type
Offset=968 */

          /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 172 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
NdrFcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif
/* 174 */ 0x8, /* FC_LONG */
0x0, /* */
0 */

          /* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */
Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */

```

```

/* 182 */ NdrFcShort( 0x7 ), /* 7 */
#ifndef _ALPHA_
/* 184 */ NdrFcShort( 0x38 ), /* ia64 Stack
size/offset = 56 */
#else
NdrFcShort( 0x30 ), /* axp64 Stack size/offset = 48 */
#endif
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /* */
3 */
/* 192 */ 0xa, /* 10 */
0x7, /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ N/rfcShort( 0x0 ), /* 0 */

          /* Parameter txn_in */

/* 202 */ N/rfcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
#ifndef _ALPHA_
/* 204 */ N/rfcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
#else
N/rfcShort( 0x8 ), /* axp64 Stack size/offset = 8 */
#endif
/* 206 */ N/rfcShort( 0x3b6 ), /* Type
Offset=950 */

          /* Parameter txn_out */

/* 208 */ N/rfcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
#ifndef _ALPHA_
/* 210 */ N/rfcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
#else
N/rfcShort( 0x20 ), /* axp64 Stack size/offset = 32 */
#endif
/* 212 */ N/rfcShort( 0x3c8 ), /* Type
Offset=968 */

          /* Return value */

/* 214 */ N/rfcShort( 0x70 ), /* Flags: out, return,
base type, */
#ifndef _ALPHA_
/* 216 */ N/rfcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
#else
N/rfcShort( 0x28 ), /* axp64 Stack size/offset = 40 */
#endif

```

```

/* 218 */ 0x8,           /* FC_LONG */
0x0,             /* */
0 */

/* Procedure CallSetComplete */

/* 220 */ 0x33,          /* FC_AUTO_HANDLE */
0x6c,             /* */
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64, axp64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44,           /* Oi2 Flags: has
return, has ext, */
return, has ext, /* */
0x1,             /* */
1 */
/* 236 */ 0xa,            /* 10 */
0x1,             /* */
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64, axp64 Stack
size/offset = 8 */
/* 250 */ 0x8,             /* FC_LONG */
0x0,             /* */
0 */

0x0
};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* */
0 */
/* 2 */          0x12, 0x0, /* */
FC_UP */
/* 4 */          NdrFcShort( 0x39e ), /* Offset=
926 (930) */
/* 6 */          0x2b, /* */
FC_NON_ENCAPSULATED_UNION */
/* 8 */          0x9, /* */
FC ULONG */
/* 8 */          0x7, /* */
/* */
0x0,             /* */
/* 10 */         NdrFcShort( 0xffff8 ), /* -8 */
/* */
/* 12 */         NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */         NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */         NdrFcShort( 0x10 ), /* 16 */
/* 18 */         NdrFcShort( 0x2b ), /* 43 */
/* 20 */         NdrFcLong( 0x3 ), /* 3 */
/* 24 */         NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 26 */         NdrFcLong( 0x11 ), /* 17 */
/* 30 */         NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 32 */         NdrFcLong( 0x2 ), /* 2 */
/* 36 */         NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 38 */         NdrFcLong( 0x4 ), /* 4 */
/* 42 */         NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 44 */         NdrFcLong( 0x5 ), /* 5 */
/* 48 */         NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 50 */         NdrFcLong( 0xb ), /* 11 */
/* 54 */         NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 56 */         NdrFcLong( 0xa ), /* 10 */
/* 60 */         NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 62 */         NdrFcLong( 0x6 ), /* 6 */
/* 66 */         NdrFcShort( 0xd6 ), /* Offset= 214 (280) */
/* 68 */         NdrFcLong( 0x7 ), /* 7 */
/* 72 */         NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 74 */         NdrFcLong( 0x8 ), /* 8 */
/* 78 */         NdrFcShort( 0xd0 ), /* Offset= 208 (286) */
/* 80 */         NdrFcLong( 0xd ), /* 13 */
/* 84 */         NdrFcShort( 0xe4 ), /* Offset= 228 (312) */
/* 86 */         NdrFcLong( 0x9 ), /* 9 */
/* 90 */         NdrFcShort( 0xf0 ), /* Offset= 240 (330) */
/* 92 */         NdrFcLong( 0x2000 ), /* 8192 */
/* 96 */         NdrFcShort( 0xfc ), /* Offset= 252 (348) */
/* 98 */         NdrFcLong( 0x24 ), /* 36 */
/* 102 */        NdrFcShort( 0x2f4 ), /* Offset=
756 (858) */
/* 104 */        NdrFcLong( 0x4024 ), /* 16420 */
/* 108 */        NdrFcShort( 0x2ee ), /* Offset=
750 (858) */
/* 110 */        NdrFcLong( 0x4011 ), /* 16401 */
/* 114 */        NdrFcShort( 0x2ec ), /* Offset=
748 (862) */
/* 116 */        NdrFcLong( 0x4002 ), /* 16386 */
/* 120 */        NdrFcShort( 0x2ea ), /* Offset=
746 (866) */
/* 122 */        NdrFcLong( 0x4003 ), /* 16387 */
/* 126 */        NdrFcShort( 0x2e8 ), /* Offset=
744 (870) */
/* 128 */        NdrFcLong( 0x4004 ), /* 16388 */
/* 132 */        NdrFcShort( 0x2e6 ), /* Offset=
742 (874) */
/* 134 */        NdrFcLong( 0x4005 ), /* 16389 */
/* 138 */        NdrFcShort( 0x2e4 ), /* Offset=
740 (878) */
/* 140 */        NdrFcLong( 0x400b ), /* 16395 */
/* 144 */        NdrFcShort( 0x2d2 ), /* Offset=
722 (866) */
/* 146 */        NdrFcLong( 0x400a ), /* 16394 */
/* 150 */        NdrFcShort( 0x2d0 ), /* Offset=
720 (870) */
/* 152 */        NdrFcLong( 0x4006 ), /* 16390 */
/* 156 */        NdrFcShort( 0x2d6 ), /* Offset=
726 (882) */
/* 158 */        NdrFcLong( 0x4007 ), /* 16391 */
/* 162 */        NdrFcShort( 0x2cc ), /* Offset=
716 (878) */
/* 164 */        NdrFcLong( 0x4008 ), /* 16392 */
/* 168 */        NdrFcShort( 0x2ce ), /* Offset=
718 (886) */
/* 170 */        NdrFcLong( 0x400d ), /* 16397 */
/* 174 */        NdrFcShort( 0x2cc ), /* Offset=
716 (890) */
/* 176 */        NdrFcLong( 0x4009 ), /* 16393 */
/* 180 */        NdrFcShort( 0x2ca ), /* Offset=
714 (894) */
/* 182 */        NdrFcLong( 0x6000 ), /* 24576 */
/* 186 */        NdrFcShort( 0x2c8 ), /* Offset=
712 (898) */
/* 188 */        NdrFcLong( 0x400c ), /* 16396 */
/* 192 */        NdrFcShort( 0x2c6 ), /* Offset=
710 (902) */
/* 194 */        NdrFcLong( 0x10 ), /* 16 */
/* 198 */        NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 200 */        NdrFcLong( 0x12 ), /* 18 */
/* 204 */        NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 206 */        NdrFcLong( 0x13 ), /* 19 */
/* 210 */        NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 212 */        NdrFcLong( 0x16 ), /* 22 */
/* 216 */        NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 218 */        NdrFcLong( 0x17 ), /* 23 */
/* 222 */        NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 224 */        NdrFcLong( 0xe ), /* 14 */
/* 228 */        NdrFcShort( 0x2aa ), /* Offset=
682 (910) */
/* 230 */        NdrFcLong( 0x400e ), /* 16398 */
/* 234 */        NdrFcShort( 0x2b0 ), /* Offset=
688 (922) */
/* 236 */        NdrFcLong( 0x4010 ), /* 16400 */
/* 240 */        NdrFcShort( 0x2ae ), /* Offset=
686 (926) */
/* 242 */        NdrFcLong( 0x4012 ), /* 16402 */
/* 246 */        NdrFcShort( 0x26c ), /* Offset=
620 (866) */
/* 248 */        NdrFcLong( 0x4013 ), /* 16403 */
/* 252 */        NdrFcShort( 0x26a ), /* Offset=
618 (870) */
/* 254 */        NdrFcLong( 0x4016 ), /* 16406 */
/* 258 */        NdrFcShort( 0x264 ), /* Offset=
612 (870) */
/* 260 */        NdrFcLong( 0x4017 ), /* 16407 */
/* 264 */        NdrFcShort( 0x25e ), /* Offset=
606 (870) */
/* 266 */        NdrFcLong( 0x0 ), /* 0 */
/* 270 */        NdrFcShort( 0x0 ), /* Offset= 0 (270) */
/* 272 */        NdrFcLong( 0x1 ), /* 1 */

```

```

/* 276 */ NdrFcShort( 0x0 ), /* Offset= 0 (276) */
/* 278 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(277) */
/* 280 */
0x15,      /*
FC_STRUCT */
0x7,       /*
7 */
/* 282 */ NdrFcShort( 0x8 ), /* 8 */
/* 284 */ 0xb,      /* FC_HYPER */
0x5b,      /*
FC_END */
/* 286 */
0x12, 0x0, /*
FC_UP */
/* 288 */ NdrFcShort( 0xe ), /* Offset= 14 (302) */
/* 290 */
0x1b,      /*
FC_CARRAY */
0x1,       /*
1 */
/* 292 */ NdrFcShort( 0x2 ), /* 2 */
/* 294 */ 0x9,      /* Corr desc: FC ULONG
*/
0x0,       /*
*/
/* 296 */ NdrFcShort( 0xffffc ), /* -4 */
/* 298 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 300 */ 0x6,      /* FC_SHORT */
0x5b,      /*
FC_END */
/* 302 */
0x17,      /*
FC_CSTRUCT */
0x3,       /*
3 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ NdrFcShort( 0xfffffff0 ), /* Offset= -
16 (290) */
/* 308 */ 0x8,      /* FC_LONG */
0x8,       /*
FC_LONG */
/* 310 */ 0x5c,      /* FC_PAD */
0x5b,      /*
FC_END */
/* 312 */
0x2f,      /*
FC_IP */
0x5a,      /*
FC_CONSTANT_IID */
/* 314 */ NdrFcLong( 0x0 ), /* 0 */
/* 318 */ NdrFcShort( 0x0 ), /* 0 */
/* 320 */ NdrFcShort( 0x0 ), /* 0 */
/* 322 */ 0xc0,      /* 192 */
0x0,       /*
0 */
/* 324 */ 0x0,      /* 0 */
0x0,       /*
0 */
/* 326 */ 0x0,      /* 0 */
0x0,       /*
0 */
/* 328 */ 0x0,      /* 0 */
0x46,      /*
70 */
/* 330 */
0x2f,      /*
FC_IP */
0x5a,      /*
FC_CONSTANT_IID */
/* 332 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 336 */ NdrFcShort( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ 0xc0,      /* 192 */
0x0,       /*
0 */
/* 342 */ 0x0,      /* 0 */
0x0,       /*
0 */
/* 344 */ 0x0,      /* 0 */
0x0,       /*
0 */
/* 346 */ 0x0,      /* 0 */
0x46,      /*
70 */
/* 348 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 350 */ NdrFcShort( 0x2 ), /* Offset= 2 (352) */
/* 352 */
0x12, 0x0, /*
FC_UP */
/* 354 */ NdrFcShort( 0x1e6 ), /* Offset=
486 (840) */
/* 356 */
0x2a,      /*
FC_ENCAPSULATED_UNION */
0x89,      /*
137 */
/* 358 */ NdrFcShort( 0x20 ), /* 32 */
/* 360 */ NdrFcShort( 0xa ), /* 10 */
/* 362 */ NdrFcLong( 0x8 ), /* 8 */
/* 366 */ NdrFcShort( 0x50 ), /* Offset= 80 (446) */
/* 368 */ NdrFcLong( 0xd ), /* 13 */
/* 372 */ NdrFcShort( 0x70 ), /* Offset= 112 (484) */
/* 374 */ NdrFcLong( 0x9 ), /* 9 */
/* 378 */ NdrFcShort( 0x90 ), /* Offset= 144 (522) */
/* 380 */ NdrFcLong( 0xc ), /* 12 */
/* 384 */ NdrFcShort( 0xb0 ), /* Offset= 176 (560) */
/* 386 */ NdrFcLong( 0x24 ), /* 36 */
/* 390 */ NdrFcShort( 0x104 ), /* Offset=
260 (650) */
/* 392 */ NdrFcLong( 0x800d ), /* 32781 */
/* 396 */ NdrFcShort( 0x120 ), /* Offset=
288 (684) */
/* 398 */ NdrFcLong( 0x10 ), /* 16 */
/* 402 */ NdrFcShort( 0x13a ), /* Offset=
314 (716) */
/* 404 */ NdrFcLong( 0x2 ), /* 2 */
/* 408 */ NdrFcShort( 0x150 ), /* Offset=
336 (744) */
/* 410 */ NdrFcLong( 0x3 ), /* 3 */
/* 414 */ NdrFcShort( 0x166 ), /* Offset=
358 (772) */
/* 416 */ NdrFcLong( 0x14 ), /* 20 */
/* 420 */ NdrFcShort( 0x17c ), /* Offset=
380 (800) */
/* 422 */ NdrFcShort( 0xfffffff ), /* Offset= -1
(421) */
/* 424 */
0x21,      /*
FC_BOGUS_ARRAY */
0x3,       /*
3 */
/* 426 */ NdrFcShort( 0x0 ), /* 0 */
/* 428 */ 0x19,      /* Corr desc: field
pointer, FC ULONG */
0x0,       /*
*/
/* 430 */ NdrFcShort( 0x0 ), /* 0 */
/* 432 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 434 */ NdrFcLong( 0xfffffff ), /* -1 */
/* 438 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 440 */
0x12, 0x0, /*
FC_UP */
/* 442 */ NdrFcShort( 0xfffffff74 ), /* Offset= -
140 (302) */
/* 444 */ 0x5c,      /* FC_PAD */
0x5b,      /*
FC_END */
/* 446 */
0x1a,      /*
FC_BOGUS_STRUCT */
0x3,       /*
3 */
/* 448 */ NdrFcShort( 0x10 ), /* 16 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ NdrFcShort( 0x6 ), /* Offset= 6 (458) */
/* 454 */ 0x8,      /* FC_LONG */
0x39,      /*
FC_ALIGNNM8 */
/* 456 */ 0x36,      /* FC_POINTER */
0x5b,      /*
FC_END */
/* 458 */
0x11, 0x0, /*
FC_RP */
/* 460 */ NdrFcShort( 0xfffffffdc ), /* Offset=
36 (424) */
/* 462 */
0x21,      /*
FC_BOGUS_ARRAY */
0x3,       /*
3 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x19,      /* Corr desc: field
pointer, FC ULONG */
0x0,       /*
*/
/* 468 */ NdrFcShort( 0x0 ), /* 0 */
/* 470 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* */
/* 472 */ NdrFcLong( 0xfffffff ), /* -1 */
/* 476 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 478 */ 0x4c,      /* FC_EMBEDDED_COMPLEX
*/

```

<pre> 0x0, /* /* 480 */ NdrFcShort(0xffffffff58), /* Offset= -168 (312) */ /* 482 */ 0x5c, /* FC_PAD */ FC_END */ /* 484 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 486 */ NdrFcShort(0x10), /* 16 */ /* 488 */ NdrFcShort(0x0), /* 0 */ /* 490 */ NdrFcShort(0x6), /* Offset= 6 (496) */ /* 492 */ 0x8, /* FC_LONG */ 0x39, /* FC_ALIGNM8 */ /* 494 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 496 */ 0x11, 0x0, /* FC_RP */ /* 498 */ NdrFcShort(0xfffffffffd), /* Offset= -36 (462) */ /* 500 */ 0x21, /* FC_BOGUS_ARRAY */ 0x3, /* 3 */ /* 502 */ NdrFcShort(0x0), /* 0 */ /* 504 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 506 */ NdrFcShort(0x0), /* 0 */ /* 508 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 510 */ NdrFcLong(0xffffffff), /* -1 */ /* 514 */ NdrFcShort(0x0), /* Corr flags: */ /* 516 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ */ 0x0, /* 0 */ /* 518 */ NdrFcShort(0xffffffff44), /* Offset= -188 (330) */ /* 520 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 522 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 524 */ NdrFcShort(0x10), /* 16 */ /* 526 */ NdrFcShort(0x0), /* 0 */ /* 528 */ NdrFcShort(0x6), /* Offset= 6 (534) */ /* 530 */ 0x8, /* FC_LONG */ 0x39, /* FC_ALIGNM8 */ /* 532 */ 0x36, /* FC_POINTER */ </pre>	<pre> 0x5b, /* FC_END */ /* 534 */ 0x11, 0x0, /* FC_RP */ /* 536 */ NdrFcShort(0xfffffffffd), /* Offset= -36 (500) */ /* 538 */ 0x21, /* FC_BOGUS_ARRAY */ 0x3, /* 3 */ /* 540 */ NdrFcShort(0x0), /* 0 */ /* 542 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 544 */ NdrFcShort(0x0), /* 0 */ /* 546 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 548 */ NdrFcLong(0xffffffff), /* -1 */ /* 552 */ NdrFcShort(0x0), /* Corr flags: */ /* 554 */ 0x12, 0x0, /* FC_UP */ /* 556 */ NdrFcShort(0x176), /* Offset= -374 (930) */ /* 558 */ 0x5b, /* FC_END */ /* 560 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 562 */ NdrFcShort(0x10), /* 16 */ /* 564 */ NdrFcShort(0x0), /* 0 */ /* 566 */ NdrFcShort(0x6), /* Offset= 6 (572) */ /* 568 */ 0x39, /* FC_ALIGNM8 */ /* 570 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 572 */ 0x11, 0x0, /* FC_RP */ /* 574 */ NdrFcShort(0xfffffffffd), /* Offset= -36 (538) */ /* 576 */ 0x2f, /* FC_IP */ 0x5a, /* FC_CONSTANT_IID */ /* 578 */ NdrFcLong(0x2f), /* 47 */ /* 582 */ NdrFcShort(0x0), /* 0 */ /* 584 */ NdrFcShort(0x0), /* 0 */ /* 586 */ 0xc0, /* 192 */ 0x0, /* 0 */ /* 588 */ 0x0, /* 0 */ 0x0, /* 0 */ </pre>	<pre> /* 590 */ 0x0, /* 0 */ /* 592 */ 0x46, /* FC_CARRAY */ 0x0, /* 0 */ /* 596 */ NdrFcShort(0x1), /* 1 */ /* 598 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 600 */ NdrFcShort(0x4), /* 4 */ /* 602 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 604 */ 0x1, /* FC_BYTE */ 0x5b, /* FC_END */ /* 606 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 608 */ NdrFcShort(0x18), /* 24 */ /* 610 */ 0x0, /* */ /* 612 */ NdrFcShort(0xc), /* Offset= 12 (624) */ /* 614 */ 0x8, /* FC_LONG */ /* 616 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ */ 0x0, /* 0 */ /* 618 */ NdrFcShort(0xfffffffffd), /* Offset= -42 (576) */ /* 620 */ 0x36, /* FC_POINTER */ /* 622 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 624 */ 0x12, 0x0, /* FC_UP */ /* 626 */ NdrFcShort(0xffffffe0), /* Offset= -32 (594) */ /* 628 */ 0x21, /* FC_BOGUS_ARRAY */ 0x3, /* 3 */ /* 630 */ NdrFcShort(0x0), /* 0 */ /* 632 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 634 */ NdrFcShort(0x0), /* 0 */ /* 636 */ NdrFcShort(0x1), /* Corr flags: early, */ </pre>
---	---	---

```

/* 638 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 642 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 644 */
0x12, 0x0, /* FC_UP */
/* 646 */ NdrFcShort( 0xfffffff8 ), /* Offset= -40 (606) */
/* 648 */ 0x5c, /* FC_PAD */
0x5b, /* FC_END */
/* 650 */
0xla, /* FC_BOGUS_STRUCT */
0x3, /* FC_ALIGNM8 */
/* 652 */ NdrFcShort( 0x10 ), /* 16 */
/* 654 */ NdrFcShort( 0x0 ), /* 0 */
/* 656 */ NdrFcShort( 0x6 ), /* Offset= 6 (662) */
/* 658 */ 0x8,
0x39, /* FC_LONG */
FC_ALIGNM8 */
/* 660 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 662 */
0x11, 0x0, /* FC_RP */
/* 664 */ NdrFcShort( 0xfffffff8 ), /* Offset= -36 (628) */
/* 666 */
0x1d, /* FC_SMFARRAY */
0x0, /* FC_STRUCT */
0 */
/* 668 */ NdrFcShort( 0x8 ), /* 8 */
/* 670 */ 0x2,
/* FC_END */
/* 672 */
0x15, /* FC_SHORT */
0x3, /* FC_EMBEDDED_COMPLEX */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ 0x8,
/* FC_SHORT */
/* 678 */ 0x6, /* FC_SHORT */
0x4c, /* FC_EMBEDDED_COMPLEX */
/* 680 */ 0x0,
/* 682 */ NdrFcShort( 0xffffffff ),
/* Offset= -15 (666) */
0x5b, /* FC_END */
/* 684 */
0xla, /* FC_BOGUS_STRUCT */
0x3, /* FC_ALIGNM8 */
/* 686 */ NdrFcShort( 0x20 ), /* 32 */
/* 688 */ NdrFcShort( 0x0 ), /* 0 */
/* 690 */ NdrFcShort( 0xa ), /* Offset= 10 (700) */

```

```

/* 692 */ 0x8, /* FC_LONG */
0x39, /* FC_ALIGNM8 */
/* 694 */ 0x36, /* FC_POINTER */
0x4c, /* FC_EMBEDDED_COMPLEX */
/* 696 */ 0x0,
/* 697 */ NdrFcShort( 0xffffffe7 ),
/* Offset= -25 (672) */
0x5b, /* FC_END */
/* 700 */
0x11, 0x0, /* FC_RP */
/* 702 */ NdrFcShort( 0xfffffff10 ), /* Offset= -240 (462) */
/* 704 */
0x1b, /* FC_CARRAY */
0x0, /* 0 */
/* 706 */ NdrFcShort( 0x1 ), /* 1 */
/* 708 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* 0 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 714 */ 0x1, /* FC_BYTE */
0x5b, /* FC_END */
/* 716 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* FC_ALIGNM8 */
/* 718 */ NdrFcShort( 0x10 ), /* 16 */
/* 720 */ NdrFcShort( 0x0 ), /* 0 */
/* 722 */ NdrFcShort( 0x6 ), /* Offset= 6 (728) */
/* 724 */
0x39, /* FC_LONG */
FC_ALIGNM8 */
/* 726 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 728 */
0x12, 0x0, /* FC_UP */
/* 730 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (704) */
/* 732 */
0x1b, /* FC_CARRAY */
0x1, /* 1 */
/* 734 */ NdrFcShort( 0x2 ), /* 2 */
/* 736 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* 0 */
/* 738 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 740 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 742 */ 0x6, /* FC_SHORT */
0x5b, /* FC_END */
/* 744 */
0xla, /* FC_BOGUS_STRUCT */
0x3, /* 3 */
/* 746 */ NdrFcShort( 0x10 ), /* 16 */
/* 748 */ NdrFcShort( 0x0 ), /* 0 */
/* 750 */ NdrFcShort( 0x6 ), /* Offset= 6 (756) */
/* 752 */
0x39, /* FC_ALIGNM8 */
/* 754 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 756 */
0x12, 0x0, /* FC_UP */
/* 758 */ NdrFcShort( 0xfffffe6 ), /* Offset= -26 (732) */
/* 760 */
0x1b, /* FC_CARRAY */
0x3, /* 0 */
/* 762 */ NdrFcShort( 0x4 ), /* 4 */
/* 764 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* 0 */
/* 766 */ NdrFcShort( 0x0 ), /* 0 */
/* 768 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 770 */
0x8, /* FC_LONG */
0x5b, /* FC_END */
/* 772 */
0x1a, /* FC_BOGUS_STRUCT */
0x3, /* FC_ALIGNM8 */
/* 774 */ NdrFcShort( 0x10 ), /* 16 */
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ NdrFcShort( 0x6 ), /* Offset= 6 (784) */
/* 780 */
0x39, /* FC_LONG */
FC_ALIGNM8 */
/* 782 */ 0x36, /* FC_POINTER */
0x5b, /* FC_END */
/* 784 */
0x12, 0x0, /* FC_UP */
/* 786 */ N/rfcShort( 0xfffffe6 ), /* Offset= -26 (760) */
/* 788 */
0x1b, /* FC_CARRAY */

```

<pre> 7 */ /* 790 */ NdrFcShort(0x8), /* 8 */ /* 792 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ */ /* 794 */ NdrFcShort(0x0), /* 0 */ /* 796 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 798 */ 0xb, /* FC_HYPER */ 0x5b, /* */ FC_END */ /* 800 */ 0x1a, /* */ FC_BOGUS_STRUCT */ 0x3, /* */ */ /* 802 */ NdrFcShort(0x10), /* 16 */ /* 804 */ NdrFcShort(0x0), /* 0 */ /* 806 */ NdrFcShort(0x6), /* Offset= 6 (812) */ /* 808 */ 0x8, /* FC_LONG */ 0x39, /* */ FC_ALIGNM8 */ /* 810 */ 0x36, /* FC_POINTER */ 0x5b, /* */ FC_END */ /* 812 */ 0x12, 0x0, /* */ FC_UP */ /* 814 */ NdrFcShort(0xffffffe6), /* Offset= - 26 (788) */ /* 816 */ 0x15, /* */ FC_STRUCT */ 0x3, /* */ */ /* 818 */ NdrFcShort(0x8), /* 8 */ /* 820 */ 0x8, /* FC_LONG */ 0x8, /* */ FC_LONG */ /* 822 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 824 */ 0x1b, /* */ FC_CARRAY */ 0x3, /* */ */ /* 826 */ NdrFcShort(0x8), /* 8 */ /* 828 */ 0x7, /* Corr desc: FC USHORT */ 0x0, /* */ */ /* 830 */ NdrFcShort(0xfffc8), /* -56 */ /* 832 */ NdrFcShort(0x1), /* Corr flags: early, */ /* 834 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ 0x0, /* */ 0 */ /* 836 */ NdrFcShort(0xfffffec), /* Offset= - 20 (816) */ </pre>	<pre> /* 838 */ 0x5c, /* FC_PAD */ 0x5b, /* */ FC_END */ /* 840 */ 0x1a, /* */ FC_BOGUS_STRUCT */ 0x3, /* */ 3 */ /* 842 */ NdrFcShort(0x38), /* 56 */ /* 844 */ NdrFcShort(0xffffffffec), /* Offset= - 20 (824) */ /* 846 */ NdrFcShort(0x0), /* Offset= 0 (846) */ /* 848 */ 0x6, /* FC_SHORT */ 0x6, /* */ FC_SHORT */ /* 850 */ 0x38, /* FC_ALIGNM4 */ 0x8, /* */ FC_LONG */ /* 852 */ 0x8, /* FC_LONG */ 0x4c, /* */ FC_EMBEDDED_COMPLEX */ /* 854 */ 0x4, /* 4 */ NdrFcShort(0xfffffe0d), /* Offset= -499 (356) */ 0x5b, /* */ FC_END */ /* 858 */ 0x12, 0x0, /* */ FC_UP */ /* 860 */ NdrFcShort(0xfffffff02), /* Offset= - 254 (606) */ /* 862 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 864 */ 0x1, /* FC_BYTE */ 0x5c, /* */ FC_PAD */ /* 866 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 868 */ 0x6, /* FC_SHORT */ 0x5c, /* */ FC_PAD */ /* 870 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 872 */ 0x8, /* FC_LONG */ 0x5c, /* */ FC_PAD */ /* 874 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 876 */ 0xa, /* FC_FLOAT */ 0x5c, /* */ FC_PAD */ /* 878 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 880 */ 0xc, /* FC_DOUBLE */ 0x5c, /* */ FC_PAD */ /* 882 */ </pre>	<pre> 0x12, 0x0, /* */ FC_UP */ /* 884 */ NdrFcShort(0xfffffd4), /* Offset= - 604 (280) */ /* 886 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 888 */ NdrFcShort(0xfffffd6), /* Offset= - 602 (286) */ /* 890 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 892 */ NdrFcShort(0xfffffd8), /* Offset= - 580 (312) */ /* 894 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 896 */ NdrFcShort(0xfffffdca), /* Offset= - 566 (330) */ /* 898 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 900 */ NdrFcShort(0xfffffd8), /* Offset= - 552 (348) */ /* 902 */ 0x12, 0x10, /* */ FC_UP [pointer_deref] /* 904 */ NdrFcShort(0x2), /* Offset= 2 (906) */ /* 906 */ 0x12, 0x0, /* */ FC_UP */ /* 908 */ NdrFcShort(0x16), /* Offset= 22 (930) */ /* 910 */ 0x15, /* */ FC_STRUCT */ 0x7, /* */ */ /* 912 */ NdrFcShort(0x10), /* 16 */ /* 914 */ 0x6, /* FC_SHORT */ 0x1, /* */ FC_BYTE */ /* 916 */ 0x1, /* FC_BYTE */ 0x38, /* */ FC_ALIGNM4 */ /* 918 */ 0x8, /* FC_LONG */ 0x39, /* */ FC_ALIGNM8 */ /* 920 */ 0xb, /* FC_HYPER */ 0x5b, /* */ FC_END */ /* 922 */ 0x12, 0x0, /* */ FC_UP */ /* 924 */ NdrFcShort(0xfffffff2), /* Offset= - 14 (910) */ /* 926 */ 0x12, 0x8, /* */ FC_UP [simple_pointer] /* 928 */ 0x2, /* FC_CHAR */ 0x5c, /* */ FC_PAD */ /* 930 */ </pre>
--	---	--

```

FC_BOGUS_STRUCT */          0x1a,           /*
7 */
/* 932 */ NdrFcShort( 0x20 ), /* 32 */
/* 934 */ NdrFcShort( 0x0 ), /* 0 */
/* 936 */ NdrFcShort( 0x0 ), /* Offset= 0 (936) */
/* 938 */ 0x8,               /* FC_LONG */
/* 940 */ 0x8,               /* FC_LONG */
/* 942 */ 0x6,               /* FC_SHORT */
/* 944 */ 0x4c,               /* FC_EMBEDDED_COMPLEX */
/* 946 */ NdrFcShort( 0xfffffc54 ), /* Offset= -940 (6) */
/* 948 */ 0x5c,               /* FC_PAD */
/* 950 */ 0xb4,               /* FC_USER_MARSHAL */
/* 952 */ NdrFcShort( 0x0 ), /* 0 */
/* 954 */ NdrFcShort( 0x18 ), /* 24 */
/* 956 */ NdrFcShort( 0x0 ), /* 0 */
/* 958 */ NdrFcShort( 0xfffffc44 ), /* Offset= -956 (2) */
/* 960 */ 0x11, 0x4,           /* FC_RP [alloced_on_stack] */
/* 962 */ NdrFcShort( 0x6 ), /* Offset= 6 (968) */
/* 964 */ 0x13, 0x0,           /* FC_OP */
/* 966 */ NdrFcShort( 0xfffffff0 ), /* Offset= -36 (930) */
/* 968 */ 0xb4,               /* FC_USER_MARSHAL */
/* 970 */ NdrFcShort( 0x0 ), /* 0 */
/* 972 */ NdrFcShort( 0x18 ), /* 24 */
/* 974 */ NdrFcShort( 0x0 ), /* 0 */
/* 976 */ NdrFcShort( 0xfffffff4 ), /* Offset= -12 (964) */
/* 978 */ 0x0
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

```

```

const CInterfaceStubVtbl * _tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const _tpcc_com_ps_InterfaceNamesList[] =
{
    "TPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, piID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID * piID, int * pIndex )
{
    if(! _tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo =
{
    (PCInterfaceProxyVtblList *) &_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    &_tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* defined(_M_IA64) || defined(_M_AXP64)*/

```

tpcc_com_sl.rg

S
HKCR

```

TPCC.StockLevel.1 = s 'StockLevel Class'
{
    CLSID = s '{2668369E-A50D-11D2-B4AE-00C04FBFE08B}'
}
TPCC.StockLevel = s 'StockLevel Class'
{
    CurVer = s 'TPCC.StockLevel.1'
}
NoRemove CLSID
{
    ForceRemove {2668369E-A50D-11D2-B4AE-00C04FBFE08B} = s 'StockLevel Class'
    {
        ProgID = s 'TPCC.StockLevel.1'
        VersionIndependentProgID = s 'TPCC.StockLevel'
        InprocServer32 = s '%MODULE%'
        {
            val ThreadingModel = s 'Both'
        }
    }
}

```

tpcc_dbllib.cpp

```

/* FILE:           TPCC_DBLIB.CPP
 *               Microsoft
TPC-C Kit Ver. 4.20.000
*               Copyright
Microsoft, 1999
*               All Rights Reserved
*
*               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*               PURPOSE: Implements dbllib calls for TPC-C
txns.
*               Contact: Charles Levine
(clevine@microsoft.com)
*
*               Change history:
*               4.20.000 - updated rev number to
match kit
*               4.10.001 - not deleting error
class in catch handler on deadlock retry;
*               not a
functional bug, but a memory leak
*               - had to
tweak some declarations to compile with latest SDK;
no functional change
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

```

```

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.10.000";

const
    iMaxRetries = 10;
    // how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOLEDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit(); // close all dblib structures/connections
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;
    assert(dbproc != NULL);

```

```

        pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

        if (pConn != NULL)
        {
            pConn->SetDbLibError( severity,
dberr, oserr, dberrstr, oserrstr );
        }
        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS           *dbproc
DBPROCESS id pointer
*
*           DBINT
*
*           msgno
message number
*
*           int
msgstate
*
*           int
severity
*
*           char
msgtext
printable
message description
*
* RETURNS: int
INT_CONTINUE continue if
error is SQLETIME else INT_CANCEL action
*
*           INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*/
/*
// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {

```

```

        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }

    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDst and places a
*           null character at the
end of the destination string.
*
* ARGUMENTS: char
*pDest destination string pointer
*           char
*pSrc source string pointer
*           int
n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strcpy this function
ensures that the result string is
*           always null
terminated.
*/
inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id.name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
    };

```

```

        { 0,
          ""
      };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,                      // name of
SQL server
    LPCSTR szUser,                        // user name for login
    LPCSTR szPassword,                   // password
for login
    LPCSTR szHost,                       // workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                  // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,                      // name of
SQL server
    LPCSTR szUser,                        // user name for login
    LPCSTR szPassword,                   // password
for login
    LPCSTR szHost,                       // workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                  // name of
database to use
{
    LOGINREC *login;
    const BYTE     *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;
}

        m_MaxRetries = 10;           // how many
retries on deadlock

        // increase max number of connections if
getting close
        if ( dbgetmaxprocs() < (iConnectionCount+5)
)
        {
            if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
                ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if ( login == NULL )
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler
functions
        if (dbprocerrhandle(login, err_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsgshandle(login, msg_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
        DBSETLVERSION(login, DBVER60);
        // use dblib ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);

        // deallocate login structure before
checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that
the message and error handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);
}

        // Use the the right database
if (dbuse(m_dbproc, szDatabase) == FAIL)
    ThrowError(CDBLIBERR::eDbUse);

        // set connection properties to match those
used by ODBC
        dbcmd(m_dbproc, "set ANSI_DEFAULTS ON ");
        dbcmd(m_dbproc, "set CURSOR_CLOSE_ON_COMMIT
OFF ");
        dbcmd(m_dbproc, "set IMPLICIT_TRANSACTIONS
OFF ");
        dbcmd(m_dbproc, "set NOCOUNT ON ");
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON ");
        // rollback transaction on abort

        // for coyote
        dbcmd(m_dbproc, "set ansi_warnings on ");
        //
        dbcmd(m_dbproc, "set ansi_nulls on ");
        //

        if (dbsqlexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);

        // This value must match the number of
commands above.
        // DiscardNextResults(2);
        DiscardNextResults(5);           // coyote

        // verify that version of stored procs on
server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        char szSrvVersion[16];
        pData=dbdata(m_dbproc, 1);
        if (pData)
            UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
        else
            szSrvVersion[0]=0;
        if (strcmp(szSrvVersion,sVersion))
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

        DiscardNextRows(0);
        DiscardNextResults(0);
}

```

```

CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate
resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {
        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
        strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
    }

    if (oserrstr != NULL)
    {
        m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
        strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
    }
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer
}

```

```

DiscardNextRows(-1);
DiscardNextResults(-1);

    // check for SQL Server error first;  if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR          *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else
    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; // clear our
pointer to instance; catch handler will
        delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int                  iRowsRead = 0;
    RETCODE   rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }
}

```

```

if ((iExpectedCount >= 0) &&
    (iExpectedCount != iRowsRead))
{
    ThrowError(CDBLIBERR::eWrongRowCount);
}

// Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
{
    int                  iResultsRead = 0;
    RETCODE   rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }
}

if ((iExpectedCount >= 0) &&
    (iExpectedCount != iResultsRead))
{
    ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int                  iTryCount =
0;
    const BYTE           *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id
            smallint
        }
    }
}

```

```

        dbRPCParam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)          // @d_id
&m_txn.StockLevel.d_id);                      tinyint
                                                dbRPCParam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)          // @threshhold
&m_txn.StockLevel.threshold);                smallint
                                                if (dbRPCExec(m_dbproc)
== FAIL)

        ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbResults(m_dbproc)
!= SUCCEED)

        ThrowError(CDBLIBERR::eDbResults);

        if (dbNextRow(m_dbproc)
!= REG_ROW)

        ThrowError(CDBLIBERR::eDbNextRow);

        if
(pData=dbdata(m_dbproc, 1))

        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||

== iErrOleDbProvider &&
strstr(e-
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(+iTryCount
<= iMaxRetries))
        {
            // hit
deadlock; backoff for increasingly longer period
            delete e;
Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
}

//if (iTryCount)
//    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);

```

```

void CTPCC_DBLIB::NewOrder()
{
    int                               i;
    DBINT                commit_flag;
    DBDATETIME          datetime;
    DBDATEREC daterec;

    int                               iTryCount = 0;
    const BYTE             *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *) &m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *) &m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *) &m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *) &m_txn.NewOrder.o_ol_cnt);

            // check whether any
order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
(m_txn.NewOrder.OL[i].ol_supply_w_id != m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse

                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *) &m_txn.NewOrder.o_all_local);
            for (i = 0; i < m_txn.NewOrder.o_ol_cnt; i++)
        }
    }
}

```

```

        dbRPCParam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);

        dbRPCParam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);

        dbRPCParam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
    }

    if (dbRPCExec(m_dbproc)
== FAIL)

        ThrowError(CDBLIBERR::eDbRpcExec);

    // Get order line
results

    m_txn.NewOrder.total_amount = 0;
    for (i = 0;
i<m_txn.NewOrder.o.ol_cnt; i++)
    {
        if
(dbresults(m_dbproc) != SUCCEED)

            ThrowError(CDBLIBERR::eDbResults);

        if
(dbnumcols(m_dbproc) != 5)

            ThrowError(CDBLIBERR::eWrongNumCols);

        if
(dbnextrow(m_dbproc) != REG_ROW)

            ThrowError(CDBLIBERR::eDbNextRow);

        if(pData=dbdata(m_dbproc, 1))

            UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));

        if(pData=dbdata(m_dbproc, 2))

            m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;

        if(pData=dbdata(m_dbproc, 3))

            UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge-
neric, pData, dbdatlen(m_dbproc, 3));

        if(pData=dbdata(m_dbproc, 4))

            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),

            SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);

```

```

    if(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

        m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

        DiscardNextRows(0);
    }

    // get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag
                if (dbresults(m_dbproc)
!= SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);

                    if (dbnextrow(m_dbproc)
!= REG_ROW)
                        ThrowError(CDBLIBERR::eDbNextRow);

                        if (dbnumcols(m_dbproc)
!= 8)
                            ThrowError(CDBLIBERR::eWrongNumCols);

                            if
(pData=dbdata(m_dbproc, 1))

                                dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
                                if
(pData=dbdata(m_dbproc, 2))

                                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
                                    if
(pData=dbdata(m_dbproc, 3))

                                        m_txn.NewOrder.o_id = (*DBINT * ) pData;
                                        if
(pData=dbdata(m_dbproc, 4))

```

```

                UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
                if
(pData=dbdata(m_dbproc, 5))

                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
                    if
(pData=dbdata(m_dbproc, 6))

                        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
                        if
(pData=dbdata(m_dbproc, 7))
{
                datetime =
*((DBDATETIME * ) pData);

                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.NewOrder.o_entry_d.year =
daterec.year;
                m_txn.NewOrder.o_entry_d.month =
daterec.month;
                m_txn.NewOrder.o_entry_d.day =
daterec.day;
                m_txn.NewOrder.o_entry_d.hour =
daterec.hour;
                m_txn.NewOrder.o_entry_d.minute =
daterec.minute;
                m_txn.NewOrder.o_entry_d.second =
daterec.second;
}
                if
(pData=dbdata(m_dbproc, 8))
{
                commit_flag =
(*DBTINYINT * ) pData);

                DiscardNextRows(0);
                DiscardNextResults(0);

                if (commit_flag == 1)
{
                    m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                    m_txn.NewOrder.exec_status_code = eOK;
}
                else
                    m_txn.NewOrder.exec_status_code =
eInvalidItem;

```

```

                return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||

== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL) &&
(iMaxRetries) )
{
    // hit
deadlock; backoff for increasingly longer period
delete e;
Sleep(10 *
iTryCount);
}
else
    throw;
}
// while (TRUE)
//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC            daterec;
    int                  iTryCount =
0;
    const BYTE            *pData;
    ResetError();
    while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_payment", 0);

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);

```

```

        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);

        // if customer id is
zero, then payment is by name
        if ((m_txn.Payment.c_id
== 0)

        dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);

        if (dbrpcexec(m_dbproc
== FAIL)

        ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc)
!= SUCCEED)

        ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)

        ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 27)

        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        m_txn.Payment.c_id = *((DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 2))

        UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if
(pData=dbdata(m_dbproc, 3))
        {
            datetime =
*((DBDATETIME *) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);

            m_txn.Payment.h_date.year = daterec.year;

            m_txn.Payment.h_date.month =
daterec.month;

            m_txn.Payment.h_date.day = daterec.day;

            m_txn.Payment.h_date.hour = daterec.hour;

```

```

            m_txn.Payment.h_date.minute =
daterec.minute;

            m_txn.Payment.h_date.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))

        UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));
        if
(pData=dbdata(m_dbproc, 8))

        UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if
(pData=dbdata(m_dbproc, 9))

        UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if
(pData=dbdata(m_dbproc, 10))

        UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if
(pData=dbdata(m_dbproc, 11))

        UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if
(pData=dbdata(m_dbproc, 12))

        UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if
(pData=dbdata(m_dbproc, 13))

        UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if
(pData=dbdata(m_dbproc, 14))

        UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));

```

```

        if
(pData=dbdata(m_dbproc, 15))

        UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if
(pData=dbdata(m_dbproc, 16))

        UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if
(pData=dbdata(m_dbproc, 17))

        UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if
(pData=dbdata(m_dbproc, 18))

        UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if
(pData=dbdata(m_dbproc, 19))

        UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if
(pData=dbdata(m_dbproc, 20))

        UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if
(pData=dbdata(m_dbproc, 21))

        UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if
(pData=dbdata(m_dbproc, 22))
        {
            datetime =
*((DBDATETIME *) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);

            m_txn.Payment.c_since.year =
daterec.year;

            m_txn.Payment.c_since.month =
daterec.month;

            m_txn.Payment.c_since.day = daterec.day;

            m_txn.Payment.c_since.hour =
daterec.hour;

            m_txn.Payment.c_since.minute =
daterec.minute;

            m_txn.Payment.c_since.second =
daterec.second;
        }
        if(pData=dbdata(m_dbproc, 23))

```

```

        UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));

        if(pData=dbdata(m_dbproc, 24))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);

        if(pData=dbdata(m_dbproc, 25))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);

        if(pData=dbdata(m_dbproc, 26))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);

        if(pData=dbdata(m_dbproc, 27))

        UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));

        DiscardNextRows(0);
DiscardNextResults(0);

        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else
            m_txn.Payment.exec_status_code = eOK;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_sgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
            // hit
deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
}

```

```

//      if (iTryCount)
//          throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int                               i;
    DBDATETIME           datetime;
    DBDATEREC  daterec;
    int                               iTryCount =
0;
    RETCODE                rc;
    const BYTE              *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);
            // if customer id is
zero, then order status is by name
            if
(m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            // Get order lines
            if (dbresults(m_dbproc)
!= SUCCEED)
                {
                    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
                    else

```

```

ThrowError(CDBLIBERR::eDbResults);
}
if (dbnumcols(m_dbproc)
!= 5)
    ThrowError(CDBLIBERR::eWrongNumCols);
i = 0;
while (TRUE)
{
    rc =
dbnextrow(m_dbproc);
    if (rc ==
NO_MORE_ROWS)
        break;
REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

    if(pData=dbdata(m_dbproc, 1))
        m_txn.OrderStatus.OL[i].ol_supply_w_id =
(*DBSMALLINT *) pData;
    if(pData=dbdata(m_dbproc, 2))
        m_txn.OrderStatus.OL[i].ol_i_id = (*DBINT
*) pData;
    if(pData=dbdata(m_dbproc, 3))
        m_txn.OrderStatus.OL[i].ol_quantity =
(*DBSMALLINT *) pData;
    if(pData=dbdata(m_dbproc, 4))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.OL[i].ol_amount, 8);
    if(pData=dbdata(m_dbproc, 5))
    {
        datetime = *((DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec, &datetime);
        m_txn.OrderStatus.OL[i].ol_delivery_d.year
= daterec.year;
        m_txn.OrderStatus.OL[i].ol_delivery_d.month
= daterec.month;
        m_txn.OrderStatus.OL[i].ol_delivery_d.day
= daterec.day;
    }
}

```

```

        m_txn.OrderStatus.OL[i].ol_delivery_d.hour
= daterec.hour;

        m_txn.OrderStatus.OL[i].ol_delivery_d.minute
= daterec.minute;

        m_txn.OrderStatus.OL[i].ol_delivery_d.second
= daterec.second;
    }
    i++;
}

m_txn.OrderStatus.o.ol_cnt = i;

if (dbresults(m_dbproc)
!= SUCCEED)

    ThrowError(CDBLIBERR::eDbResults);

    if (dbnextrow(m_dbproc)
!= REG_ROW)

        ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)

            ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))

            m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

        if(pData=dbdata(m_dbproc, 2))

            UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

        if(pData=dbdata(m_dbproc, 3))

            UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

        if(pData=dbdata(m_dbproc, 4))

            UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

        if(pData=dbdata(m_dbproc, 5))
    {
        datetime =
*((DBDATETIME *) pData);

        dbdatecrack(m_dbproc, &daterec, &datetime);

        m_txn.OrderStatus.o_entry_d.year =
daterec.year;
    }
}

```

```

        m_txn.OrderStatus.o_entry_d.month =
daterec.month;

        m_txn.OrderStatus.o_entry_d.day =
daterec.day;

        m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;

        m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;

        m_txn.OrderStatus.o_entry_d.second =
daterec.second;
    }

    if(pData=dbdata(m_dbproc, 6))

        m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

    if(pData=dbdata(m_dbproc, 7))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,7),
SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

    if(pData=dbdata(m_dbproc, 8))

        m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

    DiscardNextRows(0);
    DiscardNextResults(0);

    if
(m_txn.OrderStatus.o.ol_cnt == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);

    else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
    else

        m_txn.OrderStatus.exec_status_code = eOK;

        return;
    }

    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||

        (e->m_msgno
== iErrOleDbProvider &&
strstr(e-
>m_mgtext, sErrTimeoutExpired) != NULL)) &&

```

```

        (++iTryCount

<= iMaxRetries))
{
    // hit
    deadlock; backoff for increasingly longer period
    delete e;
    Sleep(10 *
iTryCount);
}
else
throw;
}
// while (TRUE)

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    i;
    iTryCount =
0;
    const BYTE
    *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_delivery", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            if (dbresults(m_dbproc)
!= SUCCEED)

                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)

                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc)
!= 10)

                ThrowError(CDBLIBERR::eWrongNumCols);

```

```

        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))

m_txn.Delivery.o_id[i] = *((DBINT *)pData);
}

DiscardNextRows(0);
DiscardNextResults(0);

m_txn.Delivery.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
||

(e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) != NULL)) &&
(<= iMaxRetries))
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

```

tpcc_dblib.h

```

/*
 *      FILE:          TPCC_DBLIB.H
 *      Microsoft
TPC-C Kit Ver. 4.20.000
 *      Copyright
Microsoft, 1999
 *          All Rights Reserved
 *
 *          Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 *          PURPOSE: Header file for TPC-C txn class
implementation.
 *
 *          Change history:
 *          4.20.000 - updated rev number to
match kit
 */
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    }

    ~CSQLERR()
    {
        delete [] m_msgtext;
    }

    int           m_msgno;
    int           m_msgstate;
    int           m_severity;
    char *m_msgtext;

    int ErrorType() {return
ERR_TYPE_SQL;};
    int ErrorNum() {return m_msgno;};
    char *ErrorText() {return
m_msgtext;};
};

class CDBLIBERR : public CBaseErr

```

```

{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin,
        // error from dblogin
        eDbOpen,
        // error from dbopen
        eDbUse,
        // error from dbuse
        eDbSqlExec,
        // error from dbsqlexec
        eDbSet,
        // error from one of the dbset*
routines
        eDbNextRow,
        // error from dbnextrow
        eWrongRowCount,
        // more or less rows returned than expected
        eWrongNumCols,
        // more or less columns returned than
expected
        eDbResults,
        // error from dbresults
        eDbRpcExec,
        // error from drpcexec
        eDbSetMaxProcs,
        // error from dbsetmaxprocs
        eDbProcHandler
        // error from either dbprocerrhandle or
dbprocmsghandle
    };

    CDBLIBERR(ACTION eAction, int
severity = 0, int dberror = 0, int oserr = 0)
    {
        m_eAction = eAction;
        m_severity = severity;
        m_dberror = dberror;
        m_oserr = oserr;

        m_dberrstr = NULL;
        m_oserrstr = NULL;
    }

    ~CDBLIBERR()
    {
        delete [] m_dberrstr;
        delete [] m_oserrstr;
    }

    ACTION   m_eAction;
    int      m_severity;
    int      m_dberror;
    int      m_oserr;
    char    *m_dberrstr;
    char    *m_oserrstr;

    int ErrorType() {return
ERR_TYPE_DBLIB;};

```

```

m_dberror;};           int ErrorNum() {return
                        char *ErrorText() {return
m_dberrstr;};

};

class CTPCC_DBLIB_ERR : public CBaseErr
{
    public:
        enum CTPCC_DBLIB_ERRS
        {
            ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id.name."
            ERR_NO SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRYED_TRANS,
            // "Retries before transaction
succeeded."
        };

        CTPCC_DBLIB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; }

        CTPCC_DBLIB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; }

        int             m_errno;
        int             m_iTryCount;

        int ErrorType() {return
ERR_TYPE_TPPC_DBLIB;};
        int ErrorNum() {return m_errno;};

        char *ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        PDBPROCESS          m_dbproc;
        CDBLIBERR *m_DbLibErr;
        // not allocated until needed (maybe never)
        CSQLErr             *m_SqlErr;
                                // not allocated until
needed (maybe never)
        int
        m_MaxRetries;         // retry
count on deadlock

        void DiscardNextRows(int
iExpectedCount);      void DiscardNextResults(int
iExpectedCount);
        void ThrowError(
CDBLIBERR::ACTION eAction );

```

```

void ResetError();

union
{
    NEW_ORDER_DATA
    PAYMENT_DATA
    DELIVERY_DATA
    STOCK_LEVEL_DATA
    ORDER_STATUS_DATA
};

m_txn;

public:
    CTPCC_DBLIB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase );
    ~CTPCC_DBLIB(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder()           { return
&m_txn.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment()           { return
&m_txn.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery()          { return
&m_txn.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel()         { return
&m_txn.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus()        { return
&m_txn.OrderStatus; }

    void NewOrder                ();
    void Payment                 ();
    void Delivery                ();
    void StockLevel              ();
    void OrderStatus              ();

    // these are public because they
must be called from the dblib err_handler and
msg_hanlder
    // outside of the class
    void SetDbLibError(int severity,
int dberr, int oserr, LPCSTR dberrstr, LPCSTR
oserrstr);
    void SetSqlError( int msgno, int
msgstate, int severity, LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );

```

```

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR);

```

tpcc_odbc.cpp

```

/*
 *      FILE:          TPCC_ODBC.CPP
 *      Microsoft
TPC-C Kit Ver. 4.20.000
 *
Microsoft, 1999
*           All Rights Reserved
*
*           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*           PURPOSE: Implements ODBC calls for TPC-C
txns.
*           Contact: Charles Levine
(clevine@microsoft.com)
*
*           Change history:
*           4.20.000 - updated rev number to
match kit
*           4.10.001 - not deleting error
class in catch handler on deadlock retry;
*           not a
functional bug, but a memory leak
*/
#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#define include <sqltypes.h>
#define include <sql.h>
#define include <sqlext.h>
#define include <odbcss.h>

#ifndef ICECAP
#define include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec(dllexport)

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.10.000";

const iMaxRetries = 10;           // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

```

```

static SQLHENV henv = SQL_NULL_HENV;
    // ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)

SQLFreeEnv(henv);
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
*/
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0,
        "" }

    };
    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {

```

```

        if ( m_errno ==
errorMsgs[i].iError )
            break;
        if ( !errorMsgs[i].szMsg[0] )
            return szNotFound;
        else
            return errorMsgs[i].szMsg;
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
        LPCSTR szServer,           // name of
        SQL server
        LPCSTR szUser,             // user name for login
        LPCSTR szPassword,         // password
        for login
        LPCSTR szHost,             // not used
        LPCSTR szDatabase )        // name of
        database to use
    {
        return new CTPCC_ODBC( szServer, szUser,
        szPassword, szHost, szDatabase );
    }

    CTPCC_ODBC::CTPCC_ODBC (
        LPCSTR szServer,
        // name of SQL server
        LPCSTR szUser,
        // user name for login
        LPCSTR szPassword,
        // password for login
        LPCSTR szHost,
        // not used
        LPCSTR szDatabase
        // name of database to use
    )

    {
        RETCODE          rc;
        // initialization
        m_hdbc = SQL_NULL_HDBC;
        m_hstmt = SQL_NULL_HSTMT;

        m_hstmtNewOrder = SQL_NULL_HSTMT;
        m_hstmtPayment = SQL_NULL_HSTMT;
        m_hstmtDelivery = SQL_NULL_HSTMT;
        m_hstmtOrderStatus = SQL_NULL_HSTMT;
        m_hstmtStockLevel = SQL_NULL_HSTMT;

        m_descNewOrderCols1 = SQL_NULL_HDESC;
        m_descNewOrderCols2 = SQL_NULL_HDESC;
        m_descOrderStatusCols1 = SQL_NULL_HDESC;
        m_descOrderStatusCols2 = SQL_NULL_HDESC;

        if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )
            ThrowError(CODBCERR::eAllocHandle);

```

```

        if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )
            ThrowError(CODBCERR::eConnOption);

        {
            char szConnectStr[256];
            char szOutStr[1024];
            SQLSMALLINT iOutStrLen;

            sprintf( szConnectStr,
"DRIVER=SQL
Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );

            rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT );

            if ( rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO )
                ThrowError(CODBCERR::eConnect);
        }

        if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)
            ThrowError(CODBCERR::eAllocHandle);

        {
            char buffer[128];
            // set some options affecting
            connection behavior
            strcpy(buffer, "set nocount on
");
            strcat(buffer, "set XACT_ABORT ON
");
            // for coyote
            strcat(buffer, "set ansi_warnings
on ");
            strcat(buffer, "set ansi_nulls on
");

            rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
            if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            // verify that version of stored
            procs on server is correct
            char db_sp_version[10];

```

```

        strcpy(buffer, "call
tpcc_version)");
        rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
        if (rc != SQL_SUCCESS && rc != SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);
            if (SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

                ThrowError(CODBCERR::eBindCol);
                if (SQLFetch(m_hstmt) == SQL_ERROR )

                    ThrowError(CODBCERR::eFetch);
                    if
(strcmp(db_sp_version,sVersion))
                        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION );
                }

                SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
            }

            // Bind parameters for each of the
transactions
            InitNewOrderParams();
            InitPaymentParams();
            InitOrderStatusParams();
            InitDeliveryParams();
            InitStockLevelParams();
        }

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically
released when the connection is dropped
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

    SQLDisconnect(m_hdbe);
    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbe);
}

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction
)
{
    RETCODE          rc;
    SDWORD           lNativeError;
    char             szState[6];
    char             szMsg[SQL_MAX_MESSAGE_LENGTH];

```

```

        char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODBCERR *pODBCErr;
// not allocated until needed (maybe never)

pODBCErr = new CODBCERR();

pODBCErr->m_NativeError = 0;
pODBCErr->m_eAction = eAction;
pODBCErr->m_bDeadLock = FALSE;

szTmp[0] = 0;
while (TRUE)
{
    rc = SQLError(henv, m_hdbe,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
        break;

    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
sErrTimeoutExpired) != NULL)
        pODBCErr->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
        pODBCErr->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ((strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)))
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
    strcat( szTmp, szMsg );
}

if (pODBCErr->m_odberrstr != NULL)
{
    delete [] pODBCErr->m_odberrstr;
    pODBCErr->m_odberrstr = NULL;
}

if (strlen(szTmp) > 0)
{
    pODBCErr->m_odberrstr = new
char[ strlen(szTmp)+1 ];
    strcpy( pODBCErr->m_odberrstr,
szTmp );
}

```

```

    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if (SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbe, &m_hstmtStockLevel) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    if (SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindCol);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE          rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_stocklevel(?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt)
== SQL_ERROR )

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txn.StockLevel.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        }
        catch (CDBCERR *e)
        {
            if ((!e->m_BadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }

        //      if (iTryCount)
        //          throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
    }

void CTPCC_ODBC::InitNewOrderParams()
{
    if (SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
        ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS
        )

    ThrowError(CDBCERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;

    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER) != SQL_SUCCESS)

    ThrowError(CDBCERR::eSetStmtAttr);

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHTORT, SQL_SMALLINT, 0, 0,
&m_txtn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txtn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txtn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txtn.NewOrder.o_i_cnt, 0, NULL) != SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txtn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
    ThrowError(CDBCERR::eBindParam);

    for (int j=0; j<MAX_OI_NEW_ORDER_ITEMS;
j++)

```

```

        {
            if (SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txtn.NewOrder.OI[j].ol_i_id, 0, NULL) != SQL_SUCCESS
                ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHTORT, SQL_SMALLINT, 0, 0,
&m_txtn.NewOrder.OI[j].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
                ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHTORT, SQL_SMALLINT, 0, 0,
&m_txtn.NewOrder.OI[j].ol_quantity, 0, NULL) != SQL_SUCCESS
                )

            ThrowError(CDBCERR::eBindParam);
        }

#ifndef new_order strstr
        // set the bind offset pointer
        if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER) != SQL_SUCCESS)

        ThrowError(CDBCERR::eSetStmtAttr);

        i = 0;
        if (SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txtn.NewOrder.OL[0].ol_i_name,
sizeof(m_txtn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SSHTORT, &m_txtn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txtn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txtn.NewOrder.OL[0].ol_brand_generic), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txtn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txtn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
            )

        ThrowError(CDBCERR::eBindCol);
#else
        // prototype to eliminate patindex in
server; shift work to client
        i = 0;
        if (SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_ol_i_name, sizeof(m_ol_i_name), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SSHTORT, &m_ol_stock, 0, NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_i_data, sizeof(m_i_data), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_s_data, sizeof(m_s_data), NULL) != SQL_SUCCESS
            )

        ThrowError(CDBCERR::eBindCol);
#endif

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_ol_i_price, 0, NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_ol_amount, 0, NULL) != SQL_SUCCESS
        )
    ThrowError(CDBCERR::eBindCol);

    // associate the column bindings for the
second result set
    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER) != SQL_SUCCESS)

    ThrowError(CDBCERR::eSetStmtAttr);

    i = 0;
    if (SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txtn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SSHTORT, &m_txtn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txtn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txtn.NewOrder.c_last,
sizeof(m_txtn.NewOrder.c_last), NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txtn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txtn.NewOrder.c_credit,
sizeof(m_txtn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txtn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) != SQL_SUCCESS
        )
    ThrowError(CDBCERR::eBindCol);

void CTPCC_ODBC::NewOrder()
{
    int
    i;
    RETCODE
    int
    iTryCount = 0;
    rc;
    0      1      2
    // 012345678901234567890123456789
    wchar_t
    szSqlTemplate[] = L"{'call
tpcc_neworder(?, ?, ?, ?, ?,'"

```

```

        }

#ifndef new_order_strstr
// set the
bind offset value...
m_BindOffset

= i * sizeof(m_txn.NewOrder.OL[0]);
if (
SQLFetch(m_hstmt) == SQL_ERROR)

        ThrowError(CODBCERR::eFetch);

#else
        if (
SQLFetch(m_hstmt) == SQL_ERROR)

        ThrowError(CODBCERR::eFetch);

strcpy(
m_txn.NewOrder.OL[i].ol_i_name, m_ol_i_name );
if (
strstr(m_i_data, "ORIGINAL") != NULL &&
strstr(m_s_data, "ORIGINAL") != NULL )

        m_txn.NewOrder.OL[i].ol_brand_generic[0] =
'B';
else

        m_txn.NewOrder.OL[i].ol_brand_generic[0] =
'G';

        m_txn.NewOrder.OL[i].ol_brand_generic[1] =
0;

m_txn.NewOrder.OL[i].ol_stock
= m_ol_stock;

m_txn.NewOrder.OL[i].ol_i_price
= m_ol_i_price;

m_txn.NewOrder.OL[i].ol_amount
= m_ol_amount;
#endif

// move to
the next resultset
if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

        ThrowError(CODBCERR::eMoreResults);

m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
}

// associate the column
bindings for the second result set
if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

```

```

        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), 0,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
)
ThrowError(CODBCERR::eBindParam);

i = 0;
if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) != SQL_SUCCESS
)

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,
sizeof(m_txn.Payment.d_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) != SQL_SUCCESS
)
ThrowError(CODBCERR::eBindCol);

```

```

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;
    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SOLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_payment(?,?,?,?,?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch());

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!e->m_bDeadLock)
                if (++iTryCount > iMaxRetries)
                    throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    //     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

        if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
            ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
            ||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
        )

        ThrowError(CODBCERR::eAllocHandle);

        m_hstmt = m_hstmtOrderStatus;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
            ||
SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        // configure block cursor
        if ( SQLSetStmtAttrW(m_hstmt,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
            ||
SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS
        )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT,
&m_txn.OrderStatus.OL[0].ol_supply_w_id, 0, NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS
        )
    }

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
            ||
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL) != SQL_SUCCESS
            ||
SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

void CTPCC_ODBC::OrderStatus()
{
    int          iTryCount = 0;
    RETCODE      rc;
    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

```

```

        if ( m_txn.OrderStatus.c_id != 0)
            m_txn.OrderStatus.c_last[0] = 0;

        while (TRUE)
        {
            try
            {
                // configure block
                cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                rc =
SOLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_orderstatus(?, ?, ?, ?)", SQL_NTS);
                    if ( ((rc == SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0)) ||
(rc == SQL_ERROR) )
                        ThrowError(CODBCERR::eExecDirect);

                // configure block
                cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
                    if ( ((rc == SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0)) ||
(rc == SQL_ERROR) )
                        ThrowError(CODBCERR::eFetchScroll);

                m_txn.OrderStatus.o_ol_cnt =
(short)m_RowsFetched;

                if
(m_txn.OrderStatus.o_ol_cnt != 0)
                {
                    if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )
                        ThrowError(CODBCERR::eSetStmtAttr);

                    if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                        ThrowError(CODBCERR::eMoreResults);
                    if ( (rc = SQLFetch(m_hstmt)) == SQL_ERROR )

```

```

        ThrowError(CODBCERR::eFetch);
    }

    SQLFreeStmt(m_hstmt,
    SQL_CLOSE);

    if
    (m_txn.OrderStatus.o.ol_cnt == 0)
        throw new
    CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
    else if
    (m_txn.OrderStatus.c_id == 0 &&
    m_txn.OrderStatus.c_last[0] == 0)
        throw new
    CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
    else

        m_txn.OrderStatus.exec_status_code = eOK;

        break;
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

if (iTryCount)
//      throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if (SQLAllocHandle(SQL_HANDLE_STMT,
    m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS)

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtDelivery;

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SSSHORT, SQL_SMALLINT, 0, 0,
    &m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
    SQL_PARAM_INPUT, SQL_C_SSSHORT, SQL_SMALLINT, 0, 0,
    &m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    for (i=0;i<10;i++)
    {

```

```

        if (SQLBindCol(m_hstmt,
        (UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
        0, NULL) != SQL_SUCCESS)

            ThrowError(CODBCERR::eBindCol);
    }

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int              iTryCount = 0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, (SQLWCHAR*)L"call
tpcc_delivery(?,?)", SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt)
== SQL_ERROR)

                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
            SQL_CLOSE);

            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
}

if (iTryCount)
//      throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

tpcc_odbc.h

/* FILE: TPCC_ODBC.H

```

/*
TPC-C Kit Ver. 4.20.000
*
Microsoft, 1999
* All Rights Reserved
*
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C txn class
implementation.
*
* Change history:
*           4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
        eConnOption,
        // error from SQLSetConnectOption
        eConnect,
        // error from SQLConnect
        eAllocStmt,
        // error from SQLAllocStmt
        eExecDirect,
        // error from SQLExecDirect
        eBindParam,
        // error from SQLBindParameter
        eBindCol,
        // error from SQLBindCol
        eFetch,
        // error from SQLFetch
        eFetchScroll,
        // error from SQLFetchScroll
        eMoreResults,
        // error from SQLMoreResults
        ePrepare,
        // error from SQLPrepare
        eExecute,
        // error from SQLExecute
        eSetEnvAttr,
        // error from SQLSetEnvAttr
        eSetStmtAttr
        // error from SQLSetStmtAttr
    };
}
```

```

    };

    CODBCERR(void)
    {
        m_eAction = eNone;
        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

    ~CODBCERR()
    {
        if (m_odbcerrstr != NULL)
            delete []
        m_odbcerrstr;
    };

    ACTION m_eAction;
    int m_NativeError;
    BOOL m_bDeadLock;
    char *m_odbcerrstr;

    int ErrorType() {return
ERR_TYPE_ODBC;};
    int ErrorNum() {return
m_NativeError;};
    char *ErrorText() {return
m_odbcerrstr;};
};

class CTPCC_ODBC_ERR : public CBaseErr
{
public:
    enum TPCC_ODBC_ERRS
    {
        ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
                ERR_INVALID_CUST,
                // "Invalid Customer id.name."
                ERR_NO SUCH ORDER,
                // "No orders found for
customer."
                ERR_RETRYED_TRANS,
                // "Retries before transaction
succeeded."
    };
};

CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

int m_errno;
int m_iTryCount;

int ErrorType() {return
ERR_TYPE_TPCC_ODBC;};

```

```

        int ErrorNum() {return m_errno;};

        char *ErrorText();

};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
private:
    // declare variables and private
functions here...
    BOOL m_bDeadlock;
    // transaction was selected as
deadlock victim
    int m_MaxRetries;
    // retry
    count on deadlock

    SQLHENV m_henv;
    // ODBC environment
handle
    SQLHDBC m_hdbc;
    SQLHSTMT m_hstmt;
    // the current hstmt

    SQLHSTMT m_hstmtNewOrder;
    SQLHSTMT m_hstmtPayment;
    SQLHSTMT m_hstmtDelivery;
    SQLHSTMT m_hstmtOrderStatus;
    SQLHSTMT m_hstmtStockLevel;

    SQLHDESC m_descNewOrderCols1;
    SQLHDESC m_descNewOrderCols2;
    SQLHDESC m_descOrderStatusCols1;
    SQLHDESC m_descOrderStatusCols2;

    // new-order specific fields
    SQLINTEGER m_BindOffset;
    SQLINTEGER m_RowsFetched;
    int m_no_commit_flag;

#ifndef new_order_strstr
    // for new-order txn;
    // output params
    char m.ol.i_name[I_NAME_LEN+1];
    double m.ol.i_price;
    double m.ol.amount;
    short m.ol.stock;
    // used locally, but not returned
    to caller
    char m.i_data[I_DATA_LEN];
    char m.s_data[S_DATA_LEN];
#endif

    void ThrowError( CODBCERR::ACTION
eAction );

    void InitNewOrderParams();
    void InitPaymentParams();

```

```

void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

union
{
    NEW_ORDER_DATA
    NewOrder;
    PAYMENT_DATA
    Payment;
    DELIVERY_DATA
    Delivery;
    STOCK_LEVEL_DATA
    StockLevel;
    ORDER_STATUS_DATA
    OrderStatus;
} m_txn;

public:
    CTPCC_ODBC(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase);
    ~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; }

    void NewOrder();
    void Payment();
    void Delivery();
    void StockLevel();
    void OrderStatus();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );

typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR);

```

trans.h

```
/* FILE: TRANS.H
```

```

/*
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 *
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C structure
 * templates.
 *
 * Change history:
 * 4.20.000 - updated rev number to
 * match kit
 */
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OI_NEW_ORDER_ITEMS 15
#define MAX_OI_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqatypes.h, but is not available
// when compiling with dblib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqatypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    short
    /* SQLSMALLINT */ year;
    unsigned short     /*
SQLSMALLINT */ month;

```

```

    SQLUSMALLINT */ day;           unsigned short /* */
    SQLUSMALLINT */ hour;          unsigned short /* */
    SQLUSMALLINT */ minute;        unsigned short /* */
    SQLUSMALLINT */ second;        unsigned long   /* */
    SQLUINT32 */ fraction;        } TIMESTAMP_STRUCT;

#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK,                                // 0
    "Transaction committed."             // 1
    eInvalidItem,                      "Item number
is not valid."
    eDeliveryFailed,                   // 2
    "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    short
    ol_supply_w_id;
    long
    ol_i_id;
    short
    ol_quantity;

    // output params
    char
    ol_i_name[I_NAME_LEN+1];
    char
    ol_brand_generic[BRAND_LEN+1];
    double
    ol_i_price;
    double
    ol_amount;
    short
    ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    short     w_id;
    short     d_id;
    long      c_id;
    short     o.ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char
    c_credit[CREDIT_LEN+1];
    double   c_discount;
    double   w_tax;
    double   d_tax;
    long     o_id;
    short   o_commit_flag;
    TIMESTAMP_STRUCT o_entry_d;
    short   o_all_local;
    double   total_amount;
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    short
    w_id;
    short
    d_id;
    long
    c_id;
    short
    c_d_id;
    short
    c_w_id;
    double
    h_amount;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
    TIMESTAMP_STRUCT h_date;
    char
    w_street_1[ADDRESS_LEN+1];
    char
    w_street_2[ADDRESS_LEN+1];
    char
    w_city[ADDRESS_LEN+1];
    char
    w_state[STATE_LEN+1];
    char
    w_zip[ZIP_LEN+1];
    char
    d_street_1[ADDRESS_LEN+1];
    char
    d_street_2[ADDRESS_LEN+1];
    char
    d_city[ADDRESS_LEN+1];
    char
    d_state[STATE_LEN+1];
    char
    d_zip[ZIP_LEN+1];
    char
    c_first[FIRST_NAME_LEN+1];
    char
    c_middle[MIDDLE_NAME_LEN + 1];
    char
    c_street_1[ADDRESS_LEN+1];
    char
    c_street_2[ADDRESS_LEN+1];
} OL_DIST_INFO;

```

```

    char
c_city[ADDRESS_LEN+1];
    char
c_state[STATE_LEN+1];
    char
c_zip[ZIP_LEN+1];
    char
c_phone[PHONE_LEN+1];
    TIMESTAMP_STRUCT      c_since;
    char
c_credit[CREDIT_LEN+1];
    double
c_credit_lim;
    double
c_discount;
    double
c_balance;
    char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long
ol_i_id;
    short
ol_supply_w_id;
    short
ol_quantity;
    double
ol_amount;
    TIMESTAMP_STRUCT      ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    short          w_id;
    short          d_id;
    long           c_id;
    char
c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
exec_status_code;
    char
c_first[FIRST_NAME_LEN+1];
    char
c_middle[MIDDLE_NAME_LEN+1];
    double         c_balance;
    long           o_id;
    TIMESTAMP_STRUCT      o_entry_d;
    short          o_carrier_id;
    OL_ORDER_STATUS_DATA
OL[MAX_OL_ORDER_STATUS_ITEMS];
    short          o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    short          w_id;
    short          o_carrier_id;

```

```

        // output params
        EXEC_STATUS
exec_status_code;
        SYSTEMTIME           queue_time;
        long                 o_id[10];           // id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

// This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME           queue;
    //time delivery transaction queued
    short                w_id;
    //delivery warehouse
    short                o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    short          w_id;
    short          d_id;
    short          c_id;
    short          threshold;

    // output params
    EXEC_STATUS
exec_status_code;
    long           low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/*      FILE:          TXN_BASE.H
*                                         Microsoft
TPC-C Kit Ver. 4.20.000
*                                         Copyright
Microsoft, 1999
*                                         All Rights Reserved
*
*                                         Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE: Header file for TPC-C txn class
implementation.
*
*      Change history:
*                                         4.20.000 - updated rev number to
match kit
*/
#pragmacma once

```

```

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
() = 0;
    virtual void Payment
() = 0;
    virtual void Delivery
() = 0;
    virtual void StockLevel
() = 0;
    virtual void OrderStatus
() = 0;
};

```

txnlog.h

```

/*      FILE:          TXNLOG.H
*                                         Microsoft
TPC-C Kit Ver. 4.10.000
*                                         not yet
audited
*
*      PURPOSE: Header file for txn log class
*                                         Copyright
Microsoft, 1999
*                                         All Rights Reserved
*
#pragmacma once

typedef struct _TXN_NEWORDER
{
    BYTE          OL_Count;           //range 0 to
31
    BYTE          OL_Remote_Count;   //range 0 to
31
    WORD          c_id;
    int           o_id;
} TXN_NEWORDER;

```

```

typedef struct _TXN_PAYMENT
{
    BYTE CustByName;
    BYTE IsRemote;
} TXN_PAYMENT;

typedef struct _TXN_ORDERSTATUS
{
    BYTE CustByName;
} TXN_ORDERSTATUS;

typedef union _TXN_DETAILS
{
    TXN_NEWORDER NewOrder;
    TXN_PAYMENT Payment;
    TXN_ORDERSTATUS OrderStatus;
} TXN_DETAILS;

// Common header for all records in txn
log. The TxnType field is
// a switch which identifies the particular
variant.
#define TXN_REC_TYPE_CONTROL 1
#define TXN_REC_TYPE_TPCC 2 // replaces TRANSACTION_TYPE_TPCC
#define TXN_REC_TYPE_TPCC_DELIV_DEF 3

typedef struct _TXN_RECORD_HEADER
{
    JULIAN_TIME TxnStartT0;
    // start of txn
    BYTE TxnType;
    // one of TXN_REC_TYPE_*
    BYTE TxnSubType;
    // depends on TxnType
} TXN_RECORD_HEADER, *PTXN_RECORD_HEADER;

typedef struct _TXN_RECORD_CONTROL
{
    // common header; must exactly
match TXN_RECORD_HEADER
    JULIAN_TIME TxnStartT0;
    // start of txn
    BYTE TxnType;
// = TXN_REC_TYPE_CONTROL
    BYTE TxnSubType;
    // depends on TxnType
    // end of common header

    DWORD Len;
    // number of bytes after this
field
    } TXN_RECORD_CONTROL, *PTXN_RECORD_CONTROL;

// TPC-C Txn Record Layout:
//
```

```

    // 'TxnStartT0' is a Julian timestamp
    corresponding to the moment the
    // txn is sent to the SUT, i.e., beginning of
    response time. Deltas
    // are in milliseconds. Note that if RTDelay > 0,
    then the txn was
    // delayed by this amount. The delay occurs at
    the beginning of the
    // response time. So if RTDelay > 0, then the txn
    was actually sent
    // at TxnStartT0 + RTDelay.

    // Graphically:
    //
    // time -->
    //
    // |--- Menu ---|--- Keying ---|--- Response --
    |--- Think ---|
    //   <- DeltaT1 -> <- DeltaT2 -> <- DeltaT4 ->
    <- DeltaT3 ->
    //
    //                                         ^
    //                                         ^ TxnStartT0
    //
    // RTDelay is the amount of response time delay
    included in DeltaT4.

    // RTDelay is recorded per txn because this value
    can be changed on
    // the fly, and so may vary from txn to txn.

    //
    // TxnStatus is the txn completion code. It is
    used to indicate errors.
    // For example, in the New Order txn, 1% of txns
    abort. TxnStatus will
    // reflect this.

    typedef struct _TXN_RECORD_TPCC
    {
        // common header; must exactly
match TXN_RECORD_HEADER
        JULIAN_TIME TxnStartT0;
        // start of txn
        BYTE TxnType;
// = TXN_REC_TYPE_TPCC
        BYTE TxnSubType;
        // depends on TxnType
        // end of common header

        int DeltaT1; // menu time (ms)
        int DeltaT2; // keying time (ms)
        int DeltaT3; // think time (ms)
        int DeltaT4; // response time (ms)
        int RTDelay; // response time delay (ms)
        int TxnError; // error code providing more detail for
TxnStatus
        WORD w_id; // warehouse ID
    
```

```

        BYTE d_id;
        // assigned district ID for this thread
        BYTE d_id_ThisTxn; // district ID chosen for this particular
        BYTE TxnStatus; // completion status for txn to indicate
errors
        BYTE reserved; // for word alignment
        TXN_DETAILS TxnDetails;
    }
} TXN_RECORD_TPCC, *PTXN_RECORD_TPCC;

// TPC-C Deferred Delivery Txn Record
Layout:
//
// Incorporating delivery transaction information
into the above
// structure would increase the size of
TXN_DETAILS from 8 to 42 bytes.
// Hence, we store delivery transaction details in
a separate structure.
//
typedef struct _TXN_RECORD_TPCC_DELIV_DEF
{
    // common header; must exactly
match TXN_RECORD_HEADER
    JULIAN_TIME TxnStartT0;
    // start of txn
    BYTE TxnType;
// = TXN_REC_TYPE_TPCC_DELIV_DEF
    BYTE TxnSubType;
    // = 0
    // end of common header

    int DeltaT4; // response time (ms)
    int DeltaTxnExec; // execution time (ms)
    WORD w_id; // warehouse ID
    BYTE TxnStatus; // completion status for txn to indicate
errors
    BYTE reserved; // for word alignment
    short o_carrier_id; // carrier id
    long o_id[10]; // returned delivery transaction ids
} TXN_RECORD_TPCC_DELIV_DEF,
*PTXN_RECORD_TPCC_DELIV_DEF;

#define TXN_LOG_VERSION 1
#define TXN_DATA_START 4096 // offset in log file where log
records start
#define TXN_LOG_EYE_CATCHER "BC" // signature bytes at the start of log file

```

```

////////// /////////////////
// The transaction log has a header as the
first 4K block.
//
typedef struct _TXN_LOG_HEADER
{
    char
    EyeCatcher[2]; // signature bytes;
should always be "EC"
    int
    LogVersion; // set to
TXN_LOG_VERSION
    JULIAN_TIME
    BeginTxnTS; // timestamp
of first (lowest) txn start
    JULIAN_TIME
    EndTxnTS; // timestamp of last
(highest) txn completion time
    int
    iRecCount; // number of
records in log file
    BOOL
    bLogSorted;
    int
    iFileSize; // file size
in bytes

        // the record map provides a fast
way to get close to a particular timestamp in a
sorted log file.
//
//           struct
//           {
//               TS; // timestamp
of record
//               int
//               iPos; // byte
position in file
//               }
    RecMap[RecMapSize];
//#define RecMapSize
200

} TXN_LOG_HEADER, *PTXN_LOG_HEADER;

#define READ_BUFFER_SIZE 64*1024
#define WRITE_BUFFER_SIZE 8*1024

#define NUM_READ_BUFFERS 1
#define NUM_WRITE_BUFFERS 2
#define MAX_NUM_BUFFERS 2

// flags passed in to the constructor
#define TXN_LOG_WRITE 0x01
#define TXN_LOG_READ 0x02
#define TXN_LOG_SORTED 0x04

#define TXN_LOG_OS_ERROR 1
#define TXN_LOG_NOT_SORTED 2

```

```

#define SKIP_CTRL_RECS 1

class CTxnLog
{
private:
    DWORD iBufferSize;
    //buffer allocated size
    DWORD iBytesFreeInBuffer; //total bytes
available for use in buffer
    int iNumBuffers;
    //buffers in use
    int iActiveBuffer;
    //indicates which buffer is active: 0 or 1
    int iIoBuffer;
    //buffer for any pending IO operation
    int iFilePointer;
    //position in file.
    int iNextRec;
    //when reading, ordinal value of next
record

        // A "save point" is remembered
each time GetNextRecord is called with a start time
specified.
        // The next time it is called, if
start time is after the save point, we start scanning
from the
        // save point. This is
particularly useful in FindBestInterval, where the
log is scanned repeatedly.
    JULIAN_TIME
    SavePtTime;
    int
    iSavePtFilePointer;
    int
    iSavePtNextRec;

    JULIAN_TIME lastTS;
    //when
writing sorted output, used to verify records are
sorted
    BOOL bWrite;
    //writing log
file

    BOOL
    bLogSorted; // is log file sorted? applies to both input and output
    JULIAN_TIME
    BeginTxnTS; // timestamp of first (lowest) txn start
    JULIAN_TIME
    EndTxnTS; // timestamp of last (highest) txn completion time

int
iRecCount; // number of records in log file
BYTE *pCurrent; //ptr to
current buffer
BYTE *pBuffer[MAX_NUM_BUFFERS];
PTXN_RECORD_HEADER *TxnArray; //transaction record pointer
array for sort

DWORD dwError;
HANDLE hTxnFile; //handle to log file
HANDLE hMapFile; //map file used when
sorting the log
HANDLE hIoComplete; //event to signify that
there are no pending IOs
HANDLE hLogFileIo; //event to
signal the IO thread to write the inactive buffer

Spinlock Spin; //spin lock to protect
the txn log file buffers

int Write(BYTE *ptr, DWORD Size);
static void LogFileIO(CTxnLog *);

public:
    CTxnLog::CTxnLog(LPCTSTR szFileName, DWORD dwOpts);
    ~CTxnLog(void);

    int WriteToLog(PTXN_RECORD_TPCC pTxnRcd);
    int WriteToLog(PTXN_RECORD_TPCC_DELIV_DEF pTxnRcd);
    int WriteToLog(PTXN_RECORD_CONTROL pCtrlRec);
    int WriteToLog(PTXN_RECORD_HEADER pCtrlRec);

    int WriteCtrlRecToLog(BYTE SubType, LPTSTR lpStr, DWORD dwLen);

    void CloseTransactionLogFile(void);

    PTXN_RECORD_HEADER GetNextRecord(BOOL bSkipCtrlRecs = FALSE);
    PTXN_RECORD_HEADER GetNextRecord(JULIAN_TIME SeekTimeT0, BOOL bSkipCtrlRecs = FALSE);

    int Sort(void);
    PTXN_RECORD_HEADER GetSortedRecord(int index);

```

```

        inline BOOL IsSorted(void) {
return bLogSorted; }
        inline JULIAN_TIME BeginTS(void)
{ return BeginTxnTS; }
        inline JULIAN_TIME EndTS(void) {
return EndTxnTS; }
        inline int RecordCount(void) {
return iRecCount; }
};

class CTXNLOG_ERR : public CBaseErr
{
public:
    enum CTXNLOG_ERRS
    {
        ERR_BAD_FILE_FORMAT,
        // "File format is invalid."
        ERR_UNKNOWN_LOG_VERSION,      // "Log file
version is unknown."
        ERR_BROKEN_LOG_FILE,
        // "Log file is broken."
        ERR_LOG_NOT_SORTED,
        // "Log file is not sorted"
        ERR_INVALID_TIME_SEQ,
        // "Internal Error: Record Time
Sequence invalid."
    };
    CTXNLOG_ERR(int iErr) :
CBaseErr(iErr) {}

    int ErrorType() {return
ERR_TYPE_TXNLOG; }

    char *ErrorText()
    {
        static char *szMsgs[] =
{
            "File format
is invalid.",
            "Log file
version is unknown.",
            "Log file is
broken.",
            "Log file is
not sorted",
            "Internal
Error: Record Time Sequence invalid.",
            ""
        };
        for(int i = 0;
szMsgs[i][0]; i++)
        {
            if ( m_idMsg
== i )
                break;
        }
    }
};

```

```

        return(szMsgs[i][0] ?
szMsgs[i] : ERR_UNKNOWN);
    };
}

```

Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

VerifyTpccLoad.sql

```
-- File:      VERIFYTPCCLOAD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Performs series of TPCC database checks
to verify
--           that database load completed
correctly

print      " "
select    convert(char(30), getdate(),9)
print      " "

use tpcc
go

-- *****
-- Check rows per table from SYSINDEXES
-- *****

print      'WAREHOUSE TABLE'

select    rows
from     sysindexes
where    id      = object_id("warehouse")
go

print      'DISTRICT TABLE = (10 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("district")
go

print      'ITEM TABLE = 100,000'

select    rows
```

```
from     sysindexes
where    id      = object_id("item")
go

print      'CUSTOMER TABLE = (30,000 * No of
warehouses)'

select    rows
from     sysindexes
where    id      = object_id("customer")
go

print      'ORDERS TABLE = (30,000 * No of warehouses)'

select    rows
from     sysindexes
where    id      = object_id("orders")
go

print      'HISTORY TABLE = (30,000 * No of
warehouses)'

select    rows
from     sysindexes
where    id      = object_id("history")
go

print      'STOCK TABLE = (100,000 * No of
warehouses)'

select    rows
from     sysindexes
where    id      = object_id("stock")
go

print      'ORDER_LINE TABLE = (300,000 * No of
warehouses + some change)'

select    rows
from     sysindexes
where    id      = object_id("order_line")
go

print      'NEW_ORDER TABLE = (9000 * No of
warehouses)'

select    rows
from     sysindexes
where    id      = object_id("new_order")
go

-- *****
-- Check indices
-- *****

print      '*****Index Check*****'

use tpcc
go

sp_helpindex      customer
```

```
go

sp_helpindex      stock
go

sp_helpindex      district
go

sp_helpindex      item
go

sp_helpindex      new_order
go

sp_helpindex      orders
go

sp_helpindex      order_line
go

sp_helpindex      warehouse
go
```

backup.sql

```
-- File:      BACKUP.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates backup of tpcc database

exec sp_dboption 'tpcc', 'torn page detection', false
go

dump database tpcc to tpccback1, tpccback2, tpccback3
with init, stats = 1
go
```

backupdev.sql

```
-- File:      BACKUPDEVB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates tpcc database Backup Devices

use master
go

-- create backup devices

exec sp_addumpdevice
'disk','tpccback1','Y:\tpccback1.dmp'
go
exec sp_addumpdevice
'disk','tpccback2','X:\tpccback2.dmp'
go
exec sp_addumpdevice
'disk','tpccback3','W:\tpccback3.dmp'
go
```

createdb.sql

```
-- File:      CREATEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 1999, 2000
-- Purpose:   Creates tpcc database and backup files
for 3120 warehouses

use master
go

-- Create temporary table for timing

if exists ( select name from sysobjects where name =
'tpcc_timer' )
    drop table tpcc_timer
go

create table tpcc_timer
(
    start_date
    char(30),
    end_date
    char(30)
)
insert into tpcc_timer values (0,0)
go

-- Store starting time

update tpcc_timer
set start_date = (select
convert(char(30), getdate(),9))
go

-- create main database files

CREATE DATABASE tpcc
ON PRIMARY
(
    NAME          = MSSQL_tpcc_root,
    FILENAME     = "C:\MSSQL_tpcc_root.mdf",
    SIZE          = 8MB,
    FILEGROWTH   = 0),
FILEGROUP MSSQL_cs_fg
(
    NAME          = MSSQL_CS1,
    FILENAME     = "F:",,
    SIZE          = 99000MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_CS2,
    FILENAME     = "G:",,
    SIZE          = 99000MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_CS3,
    FILENAME     = "H:",,
    SIZE          = 99000MB,
    FILEGROWTH   = 0),
```

```
(    NAME          = MSSQL_CS4,
    FILENAME     = "I:",,
    SIZE          = 99000MB,
    FILEGROWTH   = 0),

FILEGROUP MSSQL_misc_fg
(
    NAME          = MSSQL_Misc1,
    FILENAME     = "J:",,
    SIZE          = 59000MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_Misc2,
    FILENAME     = "K:",,
    SIZE          = 59000MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_Misc3,
    FILENAME     = "L:",,
    SIZE          = 59000MB,
    FILEGROWTH   = 0),
(
    NAME          = MSSQL_Misc4,
    FILENAME     = "M:",,
    SIZE          = 59000MB,
    FILEGROWTH   = 0)

LOG ON
(
    NAME          =MSSQL_tpcc_log,
    FILENAME     ="E:",,
    SIZE          = 230000MB,
    FILEGROWTH   = 0)
COLLATE Latin1_General_Bin
go

-- Store ending time
update tpcc_timer
set end_date = (select convert(char(30),
getdate(),9))
go

select "Elapsed time (in seconds): "
datediff(second,(select start_date from
tpcc_timer),(select end_date from tpcc_timer))

-- remove temporary table

if exists ( select name from sysobjects where name =
'tpcc_timer' )
    drop table tpcc_timer
go
```

config.sql

```
-- File:      CONFIG.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 1996
-- Purpose:   Collects SQL Server configuration
parameters
```

```
print " "
select convert(char(30), getdate(),9)
print " "
go

sp_configure "show advanced",1
go
reconfigure with override
go
exec sp_configure "affinity mask", 255
exec sp_configure "cost threshold for parallelism", 5
exec sp_configure "index create memory", 0
exec sp_configure "lightweight pooling", 1
exec sp_configure "awe enabled", 1
exec sp_configure "locks", 9000
exec sp_configure "max degree of parallelism", 1
exec sp_configure "max server memory", 2147483647
exec sp_configure "max worker threads", 310
exec sp_configure "min memory per query", 1024
exec sp_configure "min server memory", 0
exec sp_configure "nested triggers", 1
exec sp_configure "network packet size", 4098
exec sp_configure "open objects", 0
exec sp_configure "priority boost", 1
exec sp_configure "recovery interval", 56
exec sp_configure "set working set size", 0
exec sp_configure "user connections", 0
go

reconfigure with override
go
sp_configure
go
```

dbopt1.sql

```
-- File:      DBOPT1.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Sets database options for data load

use master
go

exec sp_dboption tpcc,'select into/bulkcopy',true
exec sp_dboption tpcc,'trunc. log on chkpt.',true
go

use tpcc
go

checkpoint
go
```

dbopt2.sql

```
-- File:      DBOPT2.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Resets database options after data load

sp_dboption tpcc,'select into/bulkcopy',FALSE
GO

sp_dboption tpcc,'trunc. log on chkpt.',FALSE
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE      @msg          varchar(50)

--          OPTIONS FOR SQL SERVER 8.0
-- Set option values for user-defined indexes --
--          ---

SET      @msg      = ''
PRINT    @msg
SET      @msg      = 'Setting SQL Server
indexoptions'
PRINT    @msg
SET      @msg      = ''
PRINT    @msg

EXEC sp_indexoption 'customer',
'DisAllowPageLocks',      TRUE
EXEC sp_indexoption 'district',
'DisAllowPageLocks',      TRUE
EXEC sp_indexoption 'warehouse',
'DisAllowPageLocks',      TRUE
EXEC sp_indexoption 'stock', 'DisAllowPageLocks',
TRUE
EXEC sp_indexoption 'order_line',
'DisAllowRowLocks',      TRUE
EXEC sp_indexoption 'orders', 'DisAllowRowLocks',
TRUE
EXEC sp_indexoption 'new_order',
'DisAllowRowLocks',      TRUE
EXEC sp_indexoption 'item',
'DisAllowRowLocks',      TRUE
EXEC sp_indexoption 'item',
'DisAllowPageLocks',      TRUE
GO
```

```
Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print '  Lockflag = 0 ==> No pre-specified
hierarchy'
Print '  Lockflag = 1 ==> Lock at Page-level then
Table-level'
Print '  Lockflag = 2 ==> Lock at Row-level then
Table-level'
Print '  Lockflag = 3 ==> Lock at Table-level'
Print ' '

SELECT      name,lockflags
FROM        sysindexes
WHERE       object_id('warehouse')      = id OR
           object_id('district')      = id OR
           object_id('customer')     = id OR
           object_id('stock')        = id OR
           object_id('orders')       = id OR
           object_id('order_line')   = id OR
           object_id('history')     = id OR
           object_id('new_order')    = id OR
           object_id('item')         = id
ORDER      BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO
```

delivery.sql

```
-- File:      DELIVERY.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates delivery transaction stored
procedure
--           -- Interface Level: 4.10.000
use tpcc
go
```

```
if exists (select name from sysobjects where name =
"tpcc_delivery" )
drop procedure tpcc_delivery
go

create proc tpcc_delivery      @w_id
smallint,
@o_carrier_id
smallint
as

declare @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     numeric(12,2),
        @oid1     int,
        @oid2     int,
        @oid3     int,
        @oid4     int,
        @oid5     int,
        @oid6     int,
        @oid7     int,
        @oid8     int,
        @oid9     int,
        @oid10    int

select @d_id = 0
begin tran d

while (@d_id < 10)
begin

        select      @d_id = @d_id + 1,
                    @total = 0,
                    @o_id = 0

        select      top 1
                    @o_id      = no_o_id
                    from      new_order (serializable
updlock)
                    where     no_w_id = @w_id and
                               no_d_id = @d_id
                    order by no_o_id asc

        if (@@rowcount <> 0)
        begin

-- claim the order for this district

                    delete      new_order
                    where      no_w_id =
                               @w_id and
                               no_d_id =
                               @d_id and
                               no_o_id =
                               @o_id

-- set carrier_id on this order (and get customer
id)
```

```

        update    orders
        set      o_carrier_id
= @o_carrier_id,
          @c_id
= o_c_id
        where    o_w_id
= @w_id and
          o_d_id
= @d_id and
          o_id
= @o_id

-- set date in all lineitems for this order (and sum
amounts)

        update    order_line
        set      ol_delivery_d
= getdate(),
          @total
= @total + ol_amount
        where    ol_w_id
= @w_id and
          ol_d_id
= @d_id and
          ol_o_id
= @o_id

-- accumulate lineitem amounts for this order into
customer

        update    customer
        set      c_balance =
c_balance + @total,
          c_delivery_cnt
= c_delivery_cnt + 1
        where    c_w_id
= @w_id and
          c_d_id
= @d_id and
          c_id
= @c_id
        end

        select @oid1 = case @d_id when 1 then
@o_id else @oid1 end,
          @oid2 = case @d_id when 2 then @o_id
else @oid2 end,
          @oid3 = case @d_id when 3 then @o_id
else @oid3 end,
          @oid4 = case @d_id when 4 then @o_id
else @oid4 end,
          @oid5 = case @d_id when 5 then @o_id
else @oid5 end,
          @oid6 = case @d_id when 6 then @o_id
else @oid6 end,
          @oid7 = case @d_id when 7 then @o_id
else @oid7 end,
          @oid8 = case @d_id when 8 then @o_id
else @oid8 end,
          @oid9 = case @d_id when 9 then @o_id
else @oid9 end,

```

```

        @oid10 = case @d_id when 10 then @o_id
else @oid10 end
        end
        commit tran d
        -- return delivery data to client
        select @oid1,
          @oid2,
          @oid3,
          @oid4,
          @oid5,
          @oid6,
          @oid7,
          @oid8,
          @oid9,
          @oid10
        go

```

getargs.c

```

// File:           GETARGS.C
//                 Microsoft
// TPC-C Kit Ver. 4.22
// Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001
// Purpose:        Source file for command line
processing

// Includes
#include "tpcc.h"

=====
// Function name: GetArgsLoader
// =====
=====

void GetArgsLoader(int argc, char **argv,
TPCCCLDR_ARGS *pargs)
{
    int             i;
    char  *ptr;

#ifndef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n",
(int)GetCurrentThreadid());
#endif

    /* init args struct with some useful values */
    pargs->server            = SERVER;
    pargs->user              = USER;
    pargs->password          = PASSWORD;
    pargs->database           = DATABASE;
    pargs->batch              = BATCH;
    pargs->num_warehouses     = UNDEF;

```

```

    pargs->tables_all         =
TRUE;   pargs->table_item          =
FALSE;  pargs->table_warehouse      =
FALSE;  pargs->table_customer       =
FALSE;  pargs->table_orders         =
FALSE;  pargs->loader_res_file     =
LOADER_RES_FILE;
    pargs->pack_size           =
DEFLDPACKSIZE;
    pargs->starting_warehouse  =
DEF_STARTING_WAREHOUSE;
    pargs->build_index          =
BUILD_INDEX;
    pargs->index_order          =
INDEX_ORDER;
    pargs->index_script_path    =
INDEX_SCRIPT_PATH;
    pargs->scale_down           =
SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' &&
argv[i][1] != ' ' )
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }
    ptr = argv[i];
    switch (ptr[1])
    {
        case 'h':    /* Fall through */
        case 'H':
            GetArgsLoaderUsage();
            break;
        case 'D':
            pargs->database = ptr+2;
            break;
        case 'P':
            pargs->password = ptr+2;
            break;
        case 'S':
            pargs->server = ptr+2;
            break;
    }
}

```

```

        case 'U':
            pargs->user =
ptr+2;
            break;

        case 'b':
            pargs->batch =
atol(ptr+2);
            break;

        case 'W':
            pargs-
>num_warehouses = atol(ptr+2);
            break;

        case 's':
            pargs-
>starting_warehouse = atol(ptr+2);
            break;

        case 't':
            {

                pargs->tables_all = FALSE;
                if
(strncmp(ptr+2,"item") == 0)

                    pargs->table_item = TRUE;

                else if (strncmp(ptr+2,"warehouse") == 0)

                    pargs->table_warehouse = TRUE;

                else if (strncmp(ptr+2,"customer") == 0)

                    pargs->table_customer = TRUE;

                else if (strncmp(ptr+2,"orders") == 0)

                    pargs->table_orders = TRUE;

                else

                {

                    printf("\nUnrecognized command");

                    GetArgsLoaderUsage();

                    exit(1);

                }

            }

        case 'f':
            pargs-
>loader_res_file = ptr+2;
            break;

        case 'p':

```

```

            >pack_size = atol(ptr+2);
            pargs-
break;

            case 'i':
                pargs-
>build_index = atol(ptr+2);
                break;

            case 'o':
                pargs-
>index_order = atol(ptr+2);
                break;

            case 'c':
                pargs-
>scale_down = atol(ptr+2);
                break;

            case 'd':
                pargs-
>index_script_path = ptr+2;
                break;

            default:
                GetArgsLoaderUsage();
                exit(-1);
                break;
            }

            /* check for required args */
            if (pargs->num_warehouses == UNDEF )
            {
                printf("Number of Warehouses is
required\n");
                exit(-2);
            }

            return;
}

//=====
// Function name: GetArgsLoaderUsage
//
//=====

void GetArgsLoaderUsage()
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering
GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
    #endif

    printf("TPCCLDR:\n\n");
    printf("Parameter
Default\n");
}

```

```

printf("-----
-----\n");
printf("-W Number of Warehouses to Load
Required \n");
printf("-S Server
%s\n", SERVER);
printf("-U Username
%s\n", USER);
printf("-P Password
%s\n", PASSWORD);
printf("-D Database
%s\n", DATABASE);
printf("-b Batch Size
%ld\n", (long) BATCH);
printf("-p TDS packet size
%ld\n", (long) DEFLDPACKSIZE);
printf("-f Loader Results Output Filename
%s\n", LOADER_RES_FILE);
printf("-s Starting Warehouse
%ld\n", (long) DEF_STARTING_WAREHOUSE);
printf("-i Build Option (data = 0, data and
index = 1)
%ld\n", (long) BUILD_INDEX);
printf("-o Cluster Index Build Order
(before = 1, after = 0)
%ld\n", (long) INDEX_ORDER);
printf("-c Build Scaled Database (normal =
0, tiny = 1)
%ld\n", (long) SCALE_DOWN);
printf("-d Index Script Path
%s\n", INDEX_SCRIPT_PATH);
printf("-t Table to Load
all tables\n");
printf(" [item|warehouse|customer|orders]\n");
printf(" Notes: \n");
printf(" - the '-t' parameter may be included
multiple times to \n");
printf(" specify multiple tables to be
loaded \n");
printf(" - 'item' loads ITEM table \n");
printf(" - 'warehouse' loads WAREHOUSE,
DISTRICT, and STOCK tables \n");
printf(" - 'customer' loads CUSTOMER and
HISTORY tables \n");
printf(" - 'orders' load NEW-ORDER, ORDERS,
ORDER-LINE tables \n");

printf("\nNote: Command line switches are
case sensitive.\n");
exit(0);
}

```

idxcuscl.sql

```

-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.41
-- Copyright Microsoft, 2001
-- Purpose: Creates clustered index on customer
table

use tpcc

```

```

go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'customer_c1' )
    drop index customer.customer_c1

create unique clustered index customer_c1 on
customer(c_w_id, c_d_id, c_id)
    on MSSQL_customer_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxcusnc.sql

```

-- File:      IDXCUSNC.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on customer
table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'customer_nc1' )
    drop index customer.customer_nc1

create unique nonclustered index customer_nc1 on
customer(c_w_id, c_d_id, c_last, c_first, c_id)
    on MSSQL_customer_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxdiscl.sql

```

-- File:      IDXDISCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on district
table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'district_c1' )
    drop index district.district_c1

create unique clustered index district_cl on
district(d_w_id, d_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxitmcl.sql

```

-- File:      IDXITMCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on item table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'item_c1' )
    drop index item.item_c1

create unique clustered index item_c1 on item(i_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

```

```

go

-- File:      IDXNODCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on new_order
table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'new_order_c1' )
    drop index new_order.new_order_c1

create unique clustered index new_order_c1 on
new_order(no_w_id, no_d_id, no_o_id)
    on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxodlcl.sql

```

-- File:     >IDXODLCL.SQL
--             Microsoft TPC-C Benchmark Kit Ver. 4.41
--             Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on order_line
table

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'order_line_c1' )
    drop index order_line.order_line_c1

create unique clustered index order_line_c1 on
order_line.ol_w_id, ol_d_id, ol_o_id, ol_number)
    on MSSQL_orderline_fg

```

```

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxordcl.sql

```

-- File:      IDXORDCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on orders table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'orders_c1' )
    drop index orders.orders_c1

create unique clustered index orders_c1 on
orders(o_w_id, o_d_id, o_id)
    on MSSQL_orders_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxordnc.sql

```

-- File:      IDXORDNC.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates non-clustered index on orders
table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()

```

```

select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'orders_ncl' )
    drop index orders.orders_ncl

create index orders_ncl on orders(o_w_id, o_d_id,
o_c_id, o_id)
    on MSSQL_orders_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxstkcl.sql

```

-- File:      IDXSTKCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on stock table

```

```

use tpcc
go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'stock_c1' )
    drop index stock.stock_c1

create unique clustered index stock_c1 on
stock(s_i_id, s_w_id)
    on MSSQL_stock_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

idxwarcl.sql

```

-- File:      IDXWARCL.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates clustered index on warehouse
table

```

```

use tpcc

```

```

go

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:",
convert(varchar(30),@startdate,9)

if exists ( select name from sysindexes where name =
'warehouse_c1' )
    drop index warehouse.warehouse_c1

create unique clustered index warehouse_c1 on
warehouse(w_id)
    with fillfactor=100 on MSSQL_misc_fg

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go

```

neword.sql

```

-- File:      NEWORD.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates new order transaction stored
procedure
--           Interface Level: 4.10.000

```

```

use tpcc
go

if exists ( select name from sysobjects where name =
"tpcc_neworder" )
    drop procedure tpcc_neworder
go

create proc tpcc_neworder
    @w_id          smallint,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt     tinyint,
    @o.all_local   tinyint,
    @i_id1         int = 0, @s_w_id1  smallint = 0,
    @ol_qty1       smallint = 0,
    @i_id2         int = 0, @s_w_id2  smallint = 0,
    @ol_qty2       smallint = 0,

```

```

@i_id3 int = 0, @s_w_id3 smallint = 0,
@ol_qty3 smallint = 0,
@i_id4 int = 0, @s_w_id4 smallint = 0,
@ol_qty4 smallint = 0,
@i_id5 int = 0, @s_w_id5 smallint = 0,
@ol_qty5 smallint = 0,
@i_id6 int = 0, @s_w_id6 smallint = 0,
@ol_qty6 smallint = 0,
@i_id7 int = 0, @s_w_id7 smallint = 0,
@ol_qty7 smallint = 0,
@i_id8 int = 0, @s_w_id8 smallint = 0,
@ol_qty8 smallint = 0,
@i_id9 int = 0, @s_w_id9 smallint = 0,
@ol_qty9 smallint = 0,
@i_id10 int = 0, @s_w_id10 smallint = 0,
@ol_qty10 smallint = 0,
@i_id11 int = 0, @s_w_id11 smallint = 0,
@ol_qty11 smallint = 0,
@i_id12 int = 0, @s_w_id12 smallint = 0,
@ol_qty12 smallint = 0,
@i_id13 int = 0, @s_w_id13 smallint = 0,
@ol_qty13 smallint = 0,
@i_id14 int = 0, @s_w_id14 smallint = 0,
@ol_qty14 smallint = 0,
@i_id15 int = 0, @s_w_id15 smallint = 0,
@ol_qty15 smallint = 0

as
declare @w_tax numeric(4,4),
        @d_tax numeric(4,4),
        @c_last char(16),
        @c_credit char(2),
        @c_discount numeric(4,4),
        @i_price numeric(5,2),
        @i_name char(24),
        @i_data char(50),
        @o_entry_d datetime,
        @remote_flag int,
        @s_quantity smallint,
        @s_data char(50),
        @s_dist char(24),
        @li_no int,
        @o_id int,
        @commit_flag tinyint,
        @li_id int,
        @li_s_w_id smallint,
        @li_qty smallint,
        @ol_number int,

```

```

@c_id_local int
begin
begin transaction n
-- get district tax and next available order id and
update
-- plus initialize local variables

update set district
        @d_tax = d_tax,
        @o_id = d_next_o_id,
        d_next_o_id = d_next_o_id + 1,
        @o_entry_d = getdate(),
        @li_no = 0,
        @commit_flag = 1
where d_w_id = @w_id and
        d_id = @d_id

-- process orderlines
while (@li_no < @o.ol_cnt)
begin
        select @li_no = @li_no + 1

-- set i_id, s_w_id, and qty for this lineitem
select @li_id = case @li_no
        when 1 then
@i_id1
        when 2 then
@i_id2
        when 3 then
@i_id3
        when 4 then
@i_id4
        when 5 then
@i_id5
        when 6 then
@i_id6
        when 7 then
@i_id7
        when 8 then
@i_id8
        when 9 then
@i_id9
        when 10 then
@i_id10
        when 11 then
@i_id11
        when 12 then
@i_id12
        when 13 then
@i_id13
        when 14 then
@i_id14
        when 15 then
@i_id15
end,
```

```

@li_s_w_id = case
@li_no
        when 1 then
@ol_qty1
        when 2 then
@ol_qty2
        when 3 then
@ol_qty3
        when 4 then
@ol_qty4
        when 5 then
@ol_qty5
        when 6 then
@ol_qty6
        when 7 then
@ol_qty7
        when 8 then
@ol_qty8
        when 9 then
@ol_qty9
        when 10 then
@ol_qty10
        when 11 then
@ol_qty11
        when 12 then
@ol_qty12
        when 13 then
@ol_qty13
        when 14 then
@ol_qty14
```

```

then @ol_qty15                                when 15
                                              end

-- get item data (no one updates item)

      select  @i_price = i_price,
              @i_name = i_name,
              @i_data = i_data
      from   item (tablock
repeatableread)
      where  i_id = @li_id

-- update stock values

      update  stock
      set     s_ytd          =
s_ytd + @li_qty,
              @s_quantity      =
s_quantity = s_quantity - @li_qty +
              case when (s_quantity - @li_qty < 10)
then 91 else 0 end,
              s_order_cnt      =
s_order_cnt + 1,
              s_remote_cnt     =
s_remote_cnt + case when (@li_s_w_id = @w_id) then 0
else 1 end,
              @s_data          =
s_data,
              @s_dist          =
case @d_id

when 1  then s_dist_01
when 2  then s_dist_02
when 3  then s_dist_03
when 4  then s_dist_04
when 5  then s_dist_05
when 6  then s_dist_06
when 7  then s_dist_07
when 8  then s_dist_08
when 9  then s_dist_09
when 10 then s_dist_10
end
      where  s_i_id      =
@li_id and
              s_w_id          =
@li_s_w_id
-- if there actually is a stock (and item) with
these ids, go to work
      if (@@rowcount > 0)

```

```

begin
-- insert order_line data (using data from item and
stock)
      insert into order_line
values(@o_id,
              @d_id,
              @w_id,
              @li_no,
              @li_id,
              @li_s_w_id,
              "dec 31, 1899",
              @li_qty,
              @i_price * @li_qty,
              @s_dist)

-- send line-item data to client
      select  @i_name,
              @s_quantity,
              b_g = case
when ( (patindex("%ORIGINAL%","@i_data") > 0) and
              (patindex("%ORIGINAL%","@s_data") > 0) ) then
              "B" else "G" end,
              @i_price,
              @i_price *
@li_qty
      end
      else
      begin
-- no item (or stock) found - triggers rollback
condition
      select "",0,"",0,0
      select @commit_flag = 0
      end
      end
-- get customer last name, discount, and credit
rating
      select  @c_last      = c_last,
              @c_discount  = c_discount,
              @c_credit    = c_credit,
              @c_id_local  = c_id
      from   customer (repeatableread)
      where  c_id          =
@c_id and
              c_w_id        =
@w_id and

```

```

c_d_id          =
@d_id
-- insert fresh row into orders table
      insert into orders values (  @o_id,
              @d_id,
              @w_id,
              @c_id_local,
              @o_entry_d,
              0,
              @o.ol_cnt,
              @o.all_local)
-- insert corresponding row into new-order table
      insert into new_order values (
@o_id,
              @d_id,
              @w_id)
-- select warehouse tax
      select  @w_tax      = w_tax
      from   warehouse (repeatableread)
      where  w_id        =
@w_id
      if (@commit_flag = 1)
              commit transaction n
      else
              rollback transaction n
-- all that work for nuthin!!!
-- return order data to client
      select  @w_tax,
              @d_tax,
              @o_id,
              @c_last,
              @c_discount,
              @c_credit,
              @o_entry_d,
              @commit_flag
      end
go

```

ordstat.sql

```

-- File:      ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22

```

```

-- Copyright Microsoft, 2001
-- Purpose: Creates order status transaction stored
procedure
--
-- Interface Level: 4.10.000
use tpcc
go

if exists ( select name from sysobjects where name =
"tpcc_orderstatus" )
    drop procedure tpcc_orderstatus
go

create proc tpcc_orderstatus @w_id      smallint,
                            @d_id       tinyint,
                            @c_id       int,
                            @c_last     char(16) = ""
as

declare @c_balance      numeric(12,2),
        @c_first       char(16),
        @c_middle      char(2),
        @o_id          int,
        @o_entry_d     datetime,
        @o_carrier_id  smallint,
        @cnt           smallint

begin tran o
if (@c_id = 0)
    begin

-- get customer id and info using last name
        select @cnt = (count(*)+1)/2
        from customer
        (repeatableread)
        where c_last = @c_last and
              c_w_id = @w_id and
              c_d_id = @d_id
        set rowcount @cnt
        select @c_id = @c_first
        @c_balance = @c_middle
        @c_first = @c_last
        @c_last = @c_middle
        from customer
        (repeatableread)

```

```

        where c_last = @c_last and
              c_w_id = @w_id and
              c_d_id = @d_id
        order by c_w_id, c_d_id,
              c_last, c_first
        end
        set rowcount 0
        else
            begin
-- get customer info if by id
                select @c_balance = c_balance,
                       @c_first = c_first,
                       @c_middle = c_middle,
                       @c_last = c_last
                from customer
                (repeatableread)
                where c_id = @c_id and
                      c_d_id = @d_id and
                      c_w_id = @w_id
                select @cnt = @@rowcount
                end
-- if no such customer
                if (@cnt = 0)
                    begin
                        raiserror("Customer not
found",18,1)
                        goto custnotfound
                    end
-- get order info
                select @o_id = o_id,
                       @o_entry_d = o_entry_d,
                       @o_carrier_id = o_carrier_id
                from orders (serializable)
                where o_c_id = @c_id and
                      o_d_id = @d_id and
                      o_w_id = @w_id
                order by o_id asc
-- select order lines for the current order
                select ol_supply_w_id,
                       ol_i_id,
                       ol_quantity,

```

```

from order_line (repeatableread)
ol_o_id = @o_id and
ol_d_id = @d_id and
ol_w_id = @w_id

```

```

custnotfound:
commit tran o
-- return data to client
select @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id
go

```

payment.sql

```

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose: Creates payment transaction stored
procedure
--
-- Interface Level: 4.10.000
use tpcc
go

if exists (select name from sysobjects where name =
"tpcc_payment" )
    drop procedure tpcc_payment
go

create proc tpcc_payment @w_id
smallint,
@c_w_id
smallint,
@h_amount
numeric(6,2),
@d_id
tinyint,
@c_d_id
tinyint,
@c_id
int,
@c_last
char(16) = ""
as

```

```

declare @w_street_1      char(20),
        @w_street_2      char(20),
        @w_city          char(20),
        @w_state         char(2),
        @w_zip           char(9),
        @w_name          char(10),
        @d_street_1      char(20),
        @d_street_2      char(20),
        @d_city          char(20),
        @d_state         char(2),
        @d_zip           char(9),
        @d_name          char(10),
        @c_first          char(16),
        @c_middle         char(2),
        @c_street_1      char(20),
        @c_street_2      char(20),
        @c_city          char(20),
        @c_state         char(2),
        @c_zip            char(9),
        @c_phone          char(16),
        @c_since          datetime,
        @c_credit         char(2),
        @c_credit_lim     numeric(12,2),
        @c_balance        numeric(12,2),
        @c_discount       numeric(4,4),
        @data             char(500),
        @c_data           char(500),
        @datetime         datetime,
        @w_ytd            numeric(12,2),
        @d_ytd            numeric(12,2),
        @cnt              smallint,
        @val              smallint,
        @screen_data      char(200),
        @_id_local        tinyint,
        @_w_id_local      smallint,
        @_c_id_local      int

select @screen_data = ""

begin tran p

-- get payment date
    select      @datetime = getdate()

    if (@c_id = 0)
    begin

-- get customer id and info using last name
        select      @cnt      = count(*)
        from       customer
        (repeatableread)
        where      c_last    = @c_last and
                  c_w_id    = @c_w_id and
                  c_d_id    = @c_d_id

        select      @val = (@cnt + 1) / 2
        set        rowcount @val

        select      @_c_id    = c_id
    end

```

<pre> (repeatableread) from customer where c_last = @c_last and c_w_id = @c_w_id and c_d_id = @c_d_id order by c_last, c_first set rowcount 0 end -- get customer info and update balances update customer set @c_balance = c_balance = c_balance - @h_amount, c_payment_cnt = c_payment_cnt + 1, c_ytd_payment = c_ytd_payment + @h_amount, @c_first = c_first, @c_middle = c_middle, @c_last = c_last, @c_street_1 = c_street_1, @c_street_2 = c_street_2, @c_city = c_city, @c_state = c_state, @c_zip = c_zip, @c_phone = c_phone, @c_credit = c_credit, @c_credit_lim = c_credit_lim, @c_discount = c_discount, @c_since = c_since, @data = c_data, @_c_id_local = c_id where c_id = @_c_id and c_w_id = @_w_id and c_d_id = @_c_d_id -- if customer has bad credit get some more info if (@c_credit = "BC") begin -- compute new info select @_c_data = convert(char(5), @_c_id) + convert(char(4), @_c_d_id) + convert(char(5), @_c_w_id) + convert(char(4), @_d_id) + convert(char(5), @_w_id) + convert(char(19), @_h_amount) + substring(@data, 1, 458) end </pre>	<pre> from customer where c_last = @c_last and c_w_id = @c_w_id and c_d_id = @c_d_id order by c_last, c_first set rowcount 0 end -- get customer info and update balances update customer set @c_balance = c_balance = c_balance - @h_amount, c_payment_cnt = c_payment_cnt + 1, c_ytd_payment = c_ytd_payment + @h_amount, @c_first = c_first, @c_middle = c_middle, @c_last = c_last, @c_street_1 = c_street_1, @c_street_2 = c_street_2, @c_city = c_city, @c_state = c_state, @c_zip = c_zip, @c_phone = c_phone, @c_credit = c_credit, @c_credit_lim = c_credit_lim, @c_discount = c_discount, @c_since = c_since, @data = c_data, @_c_id_local = c_id where c_id = @_c_id and c_w_id = @_w_id and c_d_id = @_c_d_id -- if customer has bad credit get some more info if (@c_credit = "BC") begin -- compute new info select @_c_data = convert(char(5), @_c_id) + convert(char(4), @_c_d_id) + convert(char(5), @_c_w_id) + convert(char(4), @_d_id) + convert(char(5), @_w_id) + convert(char(19), @_h_amount) + substring(@data, 1, 458) end </pre>	<pre> update customer set c_data = @_c_data where c_id = @_c_id and c_w_id = @_w_id and c_d_id = @_c_d_id select @_screen_data = substring(@_c_data, 1, 200) end -- get district data and update year-to-date update district set d_ytd = d_ytd + @_h_amount, @_d_street_1 = d_street_1, @_d_street_2 = d_street_2, @_d_city = d_city, @_d_state = d_state, @_d_zip = d_zip, @_d_name = d_name, @_d_id_local = d_id where d_w_id = @_w_id and d_id = @_d_id -- get warehouse data and update year-to-date update warehouse set w_ytd = w_ytd + @_h_amount, @_w_street_1 = w_street_1, @_w_street_2 = w_street_2, @_w_city = w_city, @_w_state = w_state, @_w_zip = w_zip, @_w_name = w_name, @_w_id_local = w_id where w_id = @_w_id -- create history record insert into history values (@_c_id_local, @_c_d_id, @_c_w_id, @_d_id_local, @_w_id_local, @_datetime, @_h_amount, @_w_name + " " + @_d_name) commit tran p -- return data to client select @_c_id, </pre>
--	--	--

```

@c_last,
@datetime,
@w_street_1,
@w_street_2,
@w_city,
@w_state,
@w_zip,
@d_street_1,
@d_street_2,
@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data

```

go

random.c

```

// File: RANDOM.C Microsoft
//
TPC-C Kit Ver. 4.22 Copyright
Microsoft, 1996, 1997, 1998, 1999, 2000, 2001
// Purpose: Random number generation routines
for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed
*/

```

```

* Implements a GOOD pseudo random number
generator. This generator *
* will/should? run the complete period before
repeating.
*
*
* Copied from:
*
* Random Numbers Generators: Good Ones Are Hard
to Find. *
* Communications of the ACM - October 1988
Volume 31 Number 10 *
*
*
* Machine Dependencies:
*
* long must be 2 ^ 31 - 1 or greater.
*
*
*****
* seed - load the Seed value used in irand and drand.
Should be used before *
* first call to irand or drand.
*
*****
void seed(long val)
{
#endif DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int)
GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed,
val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

*****
* irand - returns a 32 bit integer pseudo random
number with a period of *
* 1 to 2 ^ 32 - 1.
*
*
* parameters:
*
```

```

* none.
*
*
*
* returns:
*
* 32 bit integer - defined as long ( see above
).
*
*
* side effects:
*
* seed get recomputed.
*****
long irand()
{
    register long s; /* copy of seed */
    register long test; /* test flag */
    register long hi; /* tmp value for speed
*/
    register long lo; /* tmp value for speed
*/
#endif DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int)
GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

*****
* drand - returns a double pseudo random number
between 0.0 and 1.0. *
* See irand.
*
*****
double drand()
{
#endif DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int)
GetCurrentThreadId());
#endif
}
```

```

        return( (double)irand() / 2147483647.0;
}

//=====
// Function : RandomNumber
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n",
    (int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96 perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld
=> %ld\n",
    (int) GetCurrentThreadId(), lower, upper, rand_num);
#endif

    return rand_num;
}

#if 0
//Orginal code pgd 08/13/96

long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n",
    (int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;

```

```

        else
            rand_num = lower + irand() %
((upper > lower) ? upper - lower : upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld
=> %ld\n",
    (int) GetCurrentThreadId(), lower, upper, rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function : NURand
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n",
    (int) GetCurrentThreadId());
#endif

    rand_num = (((RandomNumber(0,iConst) |
RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
    printf("[%ld]DBG: NURand: num = %d\n",
    (int) GetCurrentThreadId(), rand_num);
#endif

    return rand_num;
}

```

removedb.sql

```

-- File:      REMOVEDB.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Removes tpcc database and backup files

use master
go

-- remove any existing database and backup files

```

```

exec sp_dbremove tpcc, dropdev
go

exec sp_dropdevice 'tpccback1'
exec sp_dropdevice 'tpccback2'
exec sp_dropdevice 'tpccback3'
exec sp_dropdevice 'tpccback4'
go

```

restore.sql

```

-- File:      RESTORE.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Loads database backup from backup files

declare @startdate datetime
declare @enddate datetime
select @startdate = getdate()
select "Start date:", convert(varchar(30),@startdate,9)

load database tpcc from tpccback1, tpccback2,
tpccback3 with stats = 1, replace

select @enddate = getdate()
select "End date: ", convert(varchar(30),@enddate,9)
select "Elapsed time (in seconds): ",
datediff(second, @startdate, @enddate)

go
sp_dboption 'tpcc', 'torn page detection', FALSE
go

```

sqlshutdown.s ql

```

use tpcc
go
checkpoint
go
shutdown
go

```

stocklev.sql

```

-- File:      STOCKLEV.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.22
--           Copyright Microsoft, 2001
-- Purpose:   Creates stock level transaction stored
procedure
--

-- Interface Level: 4.10.000

use tpcc
go

```

```

if exists (select name from sysobjects where name =
"tpcc_stocklevel" )
    drop procedure tpcc_stocklevel
go

create proc tpcc_stocklevel    @w_id
    smallint,
        @d_id
    tinyint,
        @threshold
    smallint
as

declare  @o_id_low int,
@o_id_high int

select  @o_id_low = (d_next_o_id - 20),
@o_id_high      = (d_next_o_id - 1)
from    district
where   d_w_id          = @w_id and
d_id       = @d_id

select  count(distinct(s_i_id))
from    stock, order_line
where   ol_w_id         = @w_id and
ol_d_id          = @d_id and
ol_o_id          between @o_id_low
and
@s_w_id           = @o_id_high and
s_i_id            = ol_i_id and
s_quantity        < @threshold

go

```

strings.c

```

// File:           STRINGS.C
//                 Microsoft
// TPC-C Kit Ver. 4.22
//                 Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001
// Purpose: Source file for database loader
string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

=====

// Function name: MakeAddress
// =====
void MakeAddress(char *street_1,

```

```

*street_2,
char
char *city,
char *state,
char *zip)

{
#ifdef DEBUG
printf("[%ld]DBG: Entering MakeAddress()\n",
(int) GetCurrentThreadId());
#endif

MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
MakeAlphaString (10, 20, ADDRESS_LEN, city);
MakeAlphaString ( 2, 2, STATE_LEN, state);
MakeZipNumberString( 9, 9, ZIP_LEN, zip);

#ifdef DEBUG
printf("[%ld]DBG: MakeAddress: street_1: %s,
street_2: %s, city: %s, state: %s, zip: %s\n",
(int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

return;
}

=====

// Function name: LastName
// =====
void LastName(int num,           char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI"
, "PRES" ,
        "ESE" , "ANTI" , "CALLY",
"ATION" , "EING"
    };

#ifdef DEBUG
printf("[%ld]DBG: Entering LastName()\n", (int)
GetCurrentThreadId());
#endif

if ((num >= 0) && (num < 1000))
{
    strcpy(name, n[(num/100)%10]);
    strcat(name, n[(num/10)%10]);
    strcat(name, n[(num/1)%10]);

    if (strlen(name) < LAST_NAME_LEN)
    {

```

```

        PaddString(LAST_NAME_LEN, name);
    }
}
else
{
    printf("\nError in LastName()...
num <%ld> out of range (0,999)\n", num);
    exit(-1);
}

#ifdef DEBUG
printf("[%ld]DBG: LastName: num = %d ==>
[%d][%d][%d]\n",
(int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
printf("[%ld]DBG: LastName: String = %s\n",
(int) GetCurrentThreadId(), name);
#endif

return;
}

=====

=====
// Function name: MakeAlphaString
// =====
//philipdu 08/13/96 Changed MakeAlphaString to use A-
Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a
string of random alphanumeric
//(respectively, numeric) characters of a random
length of minimum x, maximum y,
//and mean (y-x)/2. Alphanumerics are A..Z, a..z, and
0..9. The only other
//requirement is that the character set used "must be
able to represent a minimum
//of 128 different characters". We are using 8-bit
chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing
chars into the text fields.
//CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char
*str)
{
    int len;
    int i;
    char cc = 'a';

```

```

static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
static int chArrayMax = 61;

#ifndef DEBUG
printf("[%ld]DBG: Entering MakeAlphaString()\n",
(int) GetCurrentThreadId());
#endif

len= RandomNumber(x, y);

for (i=0; i<len; i++)
{
    cc = chArray[RandomNumber(0,
chArrayMax)];
    str[i] = cc;
}

if ( len < z )
    memset(str+len, ' ', z - len);
str[len] = 0;

return len;
}

//=====
// Function name: MakeOriginalAlphaString
//=====

int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifndef DEBUG
printf("[%ld]DBG: Entering
MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

// verify percentage is valid
if ((percent < 0) || (percent > 100))
{
    printf("MakeOriginalAlphaString:
Invalid percentage: %d\n", percent);
    exit(-1);
}

// verify string is at least 8 chars in length

```

```

if ((x + y) <= 8)
{
    printf("MakeOriginalAlphaString:
string length must be >= 8\n");
    exit(-1);
}

// Make Alpha String
len = MakeAlphaString(x,y, z, str);

val = RandomNumber(1,100);
if (val <= percent)
{
    start = RandomNumber(0, len - 8);
    strncpy(str + start, "ORIGINAL",
8);
}

#endif DEBUG
printf("[%ld]DBG: MakeOriginalAlphaString:
%s\n",
(int)
GetCurrentThreadId(), str);
#endif

return strlen(str);
}

//=====
// Function name: MakeNumberString
//=====

int MakeNumberString(int x, int y, int z, char
*str)
{
    char tmp[16];

    //MakeNumberString is always called
    MakeZipNumberString(16, 16, 16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
// Function name: MakeZipNumberString
//=====

```

```

//=====
=====
int MakeZipNumberString(int x, int y, int z, char
*str)
{
    char tmp[16];

    //MakeZipNumberString is always called
    MakeZipNumberString(9, 9, 9, string)

    strcpy(str, "00001111");
    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
// Function name: InitString
//=====

void InitString(char *str, int len)
{
#ifndef DEBUG
printf("[%ld]DBG: Entering InitString()\n", (int)
GetCurrentThreadId());
#endif

memset(str, ' ', len);
str[len] = 0;
}

//=====
// Function name: InitAddress
//=====

void InitAddress(char *street_1, char *street_2, char
*city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}


```

```

}

=====

// Function name: PaddString
// =====
=====

void PaddString(int max, char *name)
{
    int             len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

tables.sql

```

-- File:      TABLES.SQL
--           Microsoft TPC-C Benchmark Kit Ver. 4.41
--           Copyright Microsoft, 2001
-- Purpose:   Creates TPC-C tables

use tpcc
go

-- Remove all existing TPC-C tables
--

if exists ( select name from sysobjects where name =
'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name =
'district' )
    drop table district
go
if exists ( select name from sysobjects where name =
'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name =
'history' )
    drop table history
go
if exists ( select name from sysobjects where name =
'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name =
'orders' )
    drop table orders
go

```

```

if exists ( select name from sysobjects where name =
'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name =
'item' )
    drop table item
go
if exists ( select name from sysobjects where name =
'stock' )
    drop table stock
go
-- Create new tables
--
create table warehouse
(
    w_id
    smallint,
    w_name
    char(10),
    w_street_1
    char(20),
    w_street_2
    char(20),
    w_city
    char(20),
    w_state
    char(2),
    w_zip
    char(9),
    w_tax
    numeric(4,4),
    w_ytd
    numeric(12,2)
) on MSSQL_misc_fg
go
create table district
(
    d_id
    tinyint,
    d_w_id
    smallint,
    d_name
    char(10),
    d_street_1
    char(20),
    d_street_2
    char(20),
    d_city
    char(20),
    d_state
    char(2),
    d_zip
    char(9),
    d_tax
    numeric(4,4),
    d_ytd
    numeric(12,2),
    d_next_o_id
    int
) on MSSQL_misc_fg
go
create table customer
(
    c_id
    int,
    c_d_id
    tinyint,
    c_w_id
    smallint,
    c_first
    char(16),
    c_middle
    char(2),
    c_last
    char(16),
    c_street_1
    char(20),
    c_street_2
    char(20),
    c_city
    char(20),
    c_state
    char(2),
    c_zip
    char(9),
    c_phone
    char(16),
    c_since
    datetime,
    c_credit
    char(2),
    c_credit_lim
    numeric(12,2),
    c_discount
    numeric(4,4),
    c_balance
    numeric(12,2),
    c_ytd_payment
    numeric(12,2),
    c_payment_cnt
    smallint,
    c_delivery_cnt
    smallint,
    c_data
    char(500)
) on MSSQL_customer_fg
go
create table history
(
    h_c_id
    int,
    h_c_d_id
    tinyint,
    h_c_w_id
    smallint,
    h_d_id
    tinyint,
    h_w_id
    smallint,
    h_date
    datetime,
    h_amount
    numeric(6,2),
    h_data
    char(24)
) on MSSQL_misc_fg
go

```

```

create table new_order
(
    no_o_id
    int,
    no_d_id
    tinyint,
    no_w_id
    smallint
) on MSSQL_misc_fg
go

create table orders
(
    o_id
    int,
    o_d_id
    tinyint,
    o_w_id
    smallint,
    o_c_id
    int,
    o_entry_d
    datetime,
    o_carrier_id
    tinyint,
    o.ol_cnt
    tinyint,
    o.all_local
    tinyint
) on MSSQL_orders_fg
go

create table order_line
(
    ol_o_id
    int,
    ol_d_id
    tinyint,
    ol_w_id
    smallint,
    ol_number
    tinyint,
    ol_i_id
    int,
    ol_supply_w_id
    smallint,
    ol_delivery_d
    datetime,
    ol_quantity
    smallint,
    ol_amount
    numeric(6,2),
    ol_dist_info
    char(24)
) on MSSQL_orderline_fg
go

create table item
(
    i_id
    int,
    i_im_id
    int,
    i_name
    char(24),
    i_price
    numeric(5,2),
    i_data
    char(50)
) on MSSQL_misc_fg

```

```

go

create table stock
(
    s_i_id
    int,
    s_w_id
    smallint,
    s_quantity
    smallint,
    s_dist_01
    char(24),
    s_dist_02
    char(24),
    s_dist_03
    char(24),
    s_dist_04
    char(24),
    s_dist_05
    char(24),
    s_dist_06
    char(24),
    s_dist_07
    char(24),
    s_dist_08
    char(24),
    s_dist_09
    char(24),
    s_dist_10
    char(24),
    s_ytd
    int,
    s_order_cnt
    smallint,
    s_remote_cnt
    smallint,
    s_data
    char(50)
) on MSSQL_stock_fg
go

```

time.c

```

// File: TIME.C Microsoft
// TPC-C Kit Ver. 4.22 Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
// Function name: TimeNow
//=====
long TimeNow()
{
    long      time_now;
    struct _timeb el_time;

```

```

printf("[%ld]DBG: Entering TimeNow()\n", (int)
GetCurrentThreadId());
#endif

_ftime(&el_time);

time_now = ((el_time.time - start_sec) * 1000) +
el_time.millitm;

return time_now;
}

```

tpcc.h

```

// File: TPCC.H Microsoft
// TPC-C Kit Ver. 4.22 Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001
// Purpose: Header file for TPC-C database
// loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.22"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timemb.h>
#include <sys\types.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbcss.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"

```

```

#define USER
    "sa"
#define PASSWORD
    ""
// Default loader arguments
#define BATCH           10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "logs\\load.out"
#define LOADER_NURAND_C 123
#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX
    1 // build both data and indexes
#define INDEX_ORDER     1 // build indexes before load
#define SCALE_DOWN      0 // build a normal scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all; // set if loading all tables
    BOOL table_item; // set if loading ITEM table specifically
    BOOL table_warehouse; // set if loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set if loading CUSTOMER and HISTORY
    BOOL table_orders; // set if loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
}

```

```

long build_index;
long index_order;
long scale_down;
char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_DL_NEW_ORDER_ITEMS 15
#define MAX_DL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

```

```

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeOriginalAlphaString();
int MakeNumberString();
int MakeZipNumberString();
void InitString();
void InitAddress();
void PaddString();

```

tpcldr.c

```

// File: TPCCLDR.C
// Microsoft
// TPC-C Kit Ver. 4.22
// Copyright
// Microsoft, 2000, 2001
// Purpose: Source file for TPC-C database
// loader

// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS 100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
void CheckSQL();
void CheckDataBase();

long NURand();
void LoadItem();
void LoadWarehouse();

void Stock();
void District();

void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();

void LoadOrders();
void OrdersBufinit();
void OrdersBufLoad();
void LoadOrdersTable();

```

```

void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void OpenConnections();
void BuildIndex();
void FormatDate();

// Shared memory structures

typedef struct
{
    long          ol;
    long          ol_i_id;
    short         ol_supply_w_id;
    short         ol_quantity;
    double        ol_amount;
    char          ol_dist_info[DIST_INFO_LEN+1];
    char          ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long          o_id;
    short         o_d_id;
    short         o_w_id;
    long          o_c_id;
    short         o_carrier_id;
    short         o.ol_cnt;
    short         o.all_local;
    ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long          c_id;
    short         c_d_id;
    short         c_w_id;
    char          c_first[FIRST_NAME_LEN+1];
    char          c_middle[MIDDLE_NAME_LEN+1];
    char          c_last[LAST_NAME_LEN+1];
    char          c_street_1[ADDRESS_LEN+1];
    char          c_street_2[ADDRESS_LEN+1];
    char          c_city[ADDRESS_LEN+1];
    char          c_state[STATE_LEN+1];
    char          c_zip[ZIP_LEN+1];
    char          c_phone[PHONE_LEN+1];
    char          c_credit[CREDIT_LEN+1];
    double        c_credit_lim;
}
double
c_discount;
// fix to avoid ODBC float to numeric conversion
problem.
// double
c_balance;
char
c_balance[6];

double
c_ytd_payment;
short
c_payment_cnt;
short
c_delivery_cnt;
char
c_data[C_DATA_LEN+1];
double
h_amount;
char
h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char          c_last[LAST_NAME_LEN+1];
    char          c_first[FIRST_NAME_LEN+1];
    long          c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long          time_start;
} LOADER_TIME_STRUCT;

// Global variables
char      szLastError[300];
HENV     henv;
HDBC     v_hdbc;           // for SQL Server version
                           verification
HDBC     i_hdbc1;          // for ITEM table
HDBC     w_hdbc1;          // for WAREHOUSE, DISTRICT, STOCK
HDBC     c_hdbc1;          // for CUSTOMER
HDBC     c_hdbc2;          // for HISTORY
HDBC     o_hdbc1;          // for ORDERS
HDBC     o_hdbc2;          // for NEW-ORDER
HDBC     o_hdbc3;          // for ORDER-LINE
HSTMT   v_hstmt;
// for SQL Server version verification
HSTMT   i_hstmt1;
HSTMT   w_hstmt1;
HSTMT   c_hstmt1, c_hstmt2;
HSTMT   o_hstmt1, o_hstmt2, o_hstmt3;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long     orders_rows_loaded;
long     new_order_rows_loaded;
long     order_line_rows_loaded;
long     history_rows_loaded;
long     customer_rows_loaded;
long     stock_rows_loaded;
long     district_rows_loaded;
long     item_rows_loaded;
long     warehouse_rows_loaded;
long     main_time_start;
long     main_time_end;
long     max_items;
long     customers_per_district;
long     orders_per_district;
long     first_new_order;
long     last_new_order;

TPCCLDR_ARGS *aptr, args;

=====

// Function name: main
// =====
int main(int argc, char **argv)
{
    DWORD
dwThreadID[MAX_MAIN_THREADS];
    HANDLE
hThread[MAX_MAIN_THREADS];
    FILE
*fLoader;
    char
buffer[255];
    int
i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");
    printf("\n* Microsoft SQL Server
*");
    printf("\n*");
    printf("\n* TPC-C BENCHMARK KIT: Database
loader
*");
}

```

```

        printf("\n* Version %s
*", TPCKIT_VER);
        printf("\n*
***");
        printf("\n*****\n\n");
// process command line arguments
aptr = &args;
GetArgsLoader(argc, argv, aptr);

// verify database and tables exist before
attempting to load

CheckSQL();
CheckDataBase();

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index
creation.\n");
else
    printf("Data load and index
creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be
created after bulk load.\n");
else
    printf("Clustered indexes will be
created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("**** Scaled Down Database
***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district =
CUSTOMERS_SCALE_DOWN;
    orders_per_district =
ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district =
CUSTOMERS_PER_DISTRICT;
    orders_per_district =
ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

```

```

        // open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file
open failed.");
    exit(-1);
}

// start loading data

sprintf(buffer,"TPC-C load started for %ld
warehouses.\n",aptr->num_warehouses);

printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads

if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting
loader threads for: item\n");

hThread[0] = CreateThread(NULL,
                           0,
                           (LPTHREAD_START_ROUTINE) LoadItem,
                           NULL,
                           0,
                           &dwThreadID[0]);
}

if (hThread[0] == NULL)
{
    printf("Error, failed
in creating creating thread = 0.\n");
    exit(-1);
}

if (aptr->tables_all || aptr-
>table_warehouse)
{
    fprintf(fLoader, "Starting loader
threads for: warehouse\n");

hThread[1] = CreateThread(NULL,
                           0,
                           (LPTHREAD_START_ROUTINE) LoadWarehouse,
                           NULL,
                           0,
                           &dwThreadID[1]);
}

```

```

NULL,
0,
&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed
in creating creating thread = 1.\n");
    exit(-1);
}

if (aptr->tables_all || aptr-
>table_customer)
{
    fprintf(fLoader, "Starting loader
threads for: customer\n");

hThread[2] = CreateThread(NULL,
                           0,
                           (LPTHREAD_START_ROUTINE) LoadCustomer,
                           NULL,
                           0,
                           &dwThreadID[2]);

if (hThread[2] == NULL)
{
    printf("Error, failed
in creating creating main thread = 2.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_orders)
{
    fprintf(fLoader, "Starting loader
threads for: orders\n");

hThread[3] = CreateThread(NULL,
                           0,
                           (LPTHREAD_START_ROUTINE) LoadOrders,
                           NULL,
                           0,
                           &dwThreadID[3]);
}

if (hThread[3] == NULL)
{

```

```

        printf("Error, failed
in creating creating main thread = 3.\n");
        exit(-1);
    }

    // Wait for threads to finish...
    for (i=0; i<MAX_MAIN_THREADS; i++)
    {
        if (hThread[i] != NULL)
        {
            WaitForSingleObject(
hThread[i], INFINITE );

            CloseHandle(hThread[i]);
            hThread[i] = NULL;
        }
    }

    main_time_end = (TimeNow() / MILLI);

    sprintf(buffer,"\\nTPC-C load completed
successfully in %ld minutes.\n",
        (main_time_end -
main_time_start)/60);

    printf("%s",buffer);
    fprintf(fLoader, "%s", buffer);

    fclose(fLoader);

    SQLFreeEnv(henv);

    exit(0);

    return 0;
}

//=====
// Function name: LoadItem
//=====
void LoadItem()
{
    long          i_id;
    long          i_im_id;
    char          i_name[I_NAME_LEN+1];
    double        i_price;
    char          i_data[I_DATA_LEN+1];
    char          name[20];
    long          time_start;
    RETCODE       rc;
    DBINT         rcint;
    char          bcphint[128];

    // Seed with unique number
    seed(1);
}

```

```

        printf("Loading item table...\n");

        // if build index before load
        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
            BuildIndex("idxitmcl");

        InitString(i_name, I_NAME_LEN+1);
        InitString(i_data, I_DATA_LEN+1);

        sprintf(name, "%s..%s", aptr->database,
"item");

        rc = bcp_init(i_hdbc1, name, NULL,
"logs\\\\item.err", DB_IN);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);

        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            sprintf(bcphint, "tablock, order
(i_id), ROWS_PER_BATCH = 100000");
            rc = bcp_control(i_hdbc1,
BCPHINTS, (void*) bcphint);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, 2);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0,
I_NAME_LEN, NULL, 0, 3);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            rc = bcp_bind(i_hdbc1, (BYTE *) &i_price,
0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 4);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0,
I_DATA_LEN, NULL, 0, 0, 5);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);

            time_start = (TimeNow() / MILLI);

            item_rows_loaded = 0;

            for (i_id = 1; i_id <= max_items; i_id++)
            {
                i_im_id = RandomNumber(1L,
10000L);

```

```

                MakeAlphaString(14, 24,
I_NAME_LEN, i_name);
                i_price = ((float)
RandomNumber(100L, 10000L))/100.0;

                MakeOriginalAlphaString(26, 50,
I_DATA_LEN, i_data, 10);

                rc = bcp_sendrow(i_hdbc1);

                if (rc != SUCCEED)
                    HandleErrorDBC(i_hdbc1);

                item_rows_loaded++;
                CheckForCommit(i_hdbc1, i_hstmt1,
item_rows_loaded, "item", &time_start);
            }

            rcint = bcp_done(i_hdbc1);
            if (rcint < 0)
                HandleErrorDBC(i_hdbc1);

            printf("Finished loading item table.\n");

            SQLFreeStmt(i_hstmt1, SQL_DROP);
            SQLDisconnect(i_hdbc1);
            SQLFreeConnect(i_hdbc1);

            // if build index after load
            if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
                BuildIndex("idxitmcl");
        }

//=====
// Function   : LoadWarehouse
//=====
void LoadWarehouse()
{
    short w_id;
    char  w_name[W_NAME_LEN+1];
    char  w_street_1[ADDRESS_LEN+1];
    char  w_street_2[ADDRESS_LEN+1];
    char  w_city[ADDRESS_LEN+1];
    char  w_state[STATE_LEN+1];
    char  w_zip[ZIP_LEN+1];
    double      w_tax;
    double      w_ytd;
}

```

```

char      name[20];
long     time_start;
RETCODE   rc;
DBINT    rcint;
char      bcphint[128];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city,
w_state, w_zip);

sprintf(name, "%s..%s", aptr->database,
"warehouse");

rc = bcp_init(w_hdbc1, name, NULL,
"logs\\whouse.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order
(w_id), ROWS_PER_BATCH = %d", aptr->num_warehouses);
    rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)

        HandleErrorDBC(w_hdbc1);
}

rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0,
W_NAME_LEN, NULL, 0, 0, 2);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1,
0, ADDRESS_LEN, NULL, 0, 0, 3);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2,
0, ADDRESS_LEN, NULL, 0, 0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0,
ADDRESS_LEN, NULL, 0, 0, 5);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0,
STATE_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0,
ZIP_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 8);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (short)aptr-
>starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaString(6,10, W_NAME_LEN,
w_name);

    MakeAddress(w_street_1,
w_street_2, w_city, w_state, w_zip);

    w_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

    w_ytd = 300000.00;

    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)

        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstml,
warehouse_rows_loaded, "warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse
table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 0))

```

```

BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();

}

//=====
// Function : District
//=====
void District()
{
    short d_id;
    short d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
    char d_state[STATE_LEN+1];
    char d_zip[ZIP_LEN+1];
    double    d_tax;
    double    d_ytd;
    char     name[20];
    long    d_next_o_id;
    long    time_start;
    int     w_id;
    RETCODE  rc;
    DBINT   rcint;
    char    bcphint[128];

    // Seed with unique number
    seed(4);

    printf("Loading district table...\n");

    // build index before load
    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        BuildIndex("idxdiscl");

    InitString(d_name, D_NAME_LEN+1);
    InitAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);
    sprintf(name, "%s..%s", aptr->database,
"district");

    rc = bcp_init(w_hdbc1, name, NULL,
"logs\\district.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    {

```

```

        sprintf(bcphint, "tablock, order
(d_w_id, d_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 10));
        rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)

        HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0,
D_NAME_LEN, NULL, 0, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1,
0, ADDRESS_LEN, NULL, 0, 0, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2,
0, ADDRESS_LEN, NULL, 0, 0, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0,
ADDRESS_LEN, NULL, 0, 0, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0,
STATE_LEN, NULL, 0, 0, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0,
ZIP_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = bcp_bind(w_hdbc1, (BYTE *)
&d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
11);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        d_ytd = 30000.0;

        d_next_o_id = orders_per_district+1;

        time_start = (TimeNow() / MILLI);

        for (w_id = aptr->starting_warehouse; w_id
<= aptr->num_warehouses; w_id++)
        {
            d_w_id = w_id;

            for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)
            {

                MakeAlphaString(6,10,D_NAME_LEN, d_name);

                MakeAddress(d_street_1,
d_street_2, d_city, d_state, d_zip);

                d_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

                rc =
bcp_sendrow(w_hdbc1);
                if (rc != SUCCEED)

                    HandleErrorDBC(w_hdbc1);

                district_rows_loaded++;
                CheckForCommit(w_hdbc1,
w_hstml1, district_rows_loaded, "district",
&time_start);
            }
        }

        rcint = bcp_done(w_hdbc1);
        if (rcint < 0)
            HandleErrorDBC(w_hdbc1);

        printf("Finished loading district
table.\n");

        // if build index after load...
        if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
            BuildIndex("idxdiscl");

        return;
    }

//=====
// Function : Stock
//=====

```

```

void Stock()
{
    long s_i_id;
    short s_w_id;
    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        BuildIndex("idxstkcl");

    sprintf(name, "%s..%s", aptr->database,
"stock");

    rc = bcp_init(w_hdbc1, name, NULL,
"logs\stock.err", DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    {
        sprintf(bcphint, "tablock, order
(s_i_id, s_w_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 10000));
        rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)

            HandleErrorDBC(w_hdbc1);
    }

    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *)
&s_quantity, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
3);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01,
0, S_DIST_LEN, NULL, 0, 4);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02,
0, S_DIST_LEN, NULL, 0, 5);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03,
0, S_DIST_LEN, NULL, 0, 6);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04,
0, S_DIST_LEN, NULL, 0, 7);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05,
0, S_DIST_LEN, NULL, 0, 8);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06,
0, S_DIST_LEN, NULL, 0, 9);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07,
0, S_DIST_LEN, NULL, 0, 10);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08,
0, S_DIST_LEN, NULL, 0, 11);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09,
0, S_DIST_LEN, NULL, 0, 12);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10,
0, S_DIST_LEN, NULL, 0, 13);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 14);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

```

```

        rc = bcp_bind(w_hdbc1, (BYTE *)
&s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
15);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *)
&s_remote_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
16);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0,
S_DATA_LEN, NULL, 0, 0, 17);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        s_ytd = s_order_cnt = s_remote_cnt = 0;

        time_start = (TimeNow() / MILLI);

        printf("...Loading stock table\n");

        for (s_i_id=1; s_i_id <= max_items;
s_i_id++)
{
    for (s_w_id = (short)aptr-
>starting_warehouse; s_w_id <= aptr->num_warehouses;
s_w_id++)
    {
        s_quantity =
(short)RandomNumber(10L,100L);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);
        len =
MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);
        rc =
bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)

```

```

            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;
        CheckForCommit(w_hdbc1,
w_hstml1, stock_rows_loaded, "stock", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading stock table.\n");

    SQLFreeStmt(w_hstml1, SQL_DROP);
    SQLDisconnect(w_hdbc1);
    SQLFreeConnect(w_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
        BuildIndex("idxstkcl");

    return;
}

//=====
// Function : LoadCustomer
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT
customer_time_start;
    LOADER_TIME_STRUCT history_time_start;
    short
        d_id;
    DWORD
dwThreadID[MAX_CUSTOMER_THREADS];
    HANDLE
hThread[MAX_CUSTOMER_THREADS];
    char
name[20];
    RETCODE
rc;
    DBINT
rcint;
    char
bcphint[128];
    char
cmd[256];
    // SQLRETURN
rc_1;
    // SQLSMALLINT
recnum, MsgLen;

```

```

// SQLCHAR
SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
// SQLINTEGER
NativeError;

// Seed with unique number
seed(5);

printf("Loading customer and history
tables...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    BuildIndex("idxcuscl");

// Initialize bulk copy
sprintf(name, "%s..%s", aptr->database,
"customer");

rc = bcp_init(c_hdbc1, name, NULL,
"logs\\customer.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
{
    sprintf(bcphint, "tablock, order
(c_w_id, c_d_id, c_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 30000));
    rc = bcp_control(c_hdbc1,
BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

sprintf(name, "%s..%s", aptr->database,
"history");
rc = bcp_init(c_hdbc2, name, NULL,
"logs\\history.err", DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*)
bcphint);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded = 0;
history_rows_loaded = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow()
/ MILLI);
history_time_start.time_start = (TimeNow()
/ MILLI);

for (w_id = (short)aptr-
>starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id,
w_id);
        // Start parallel
loading threads here...
        // Start customer table
thread
        printf("...Loading
customer table for: d_id = %d, w_id = %d\n", d_id,
w_id);
        hThread[0] =
CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadCustomerTable,
&customer_time_start,
0,
&dwThreadID[0]);
        if (hThread[0] == NULL)
{
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }
        // Start History table
thread
        printf("...Loading
history table for: d_id = %d, w_id = %d\n", d_id,
w_id);
        hThread[1] =
CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadHistoryTable,
&history_time_start,
0,
&dwThreadID[1]);
        if (hThread[1] == NULL)
{
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }
        WaitForSingleObject(
hThread[0], INFINITE );
        WaitForSingleObject(
hThread[1], INFINITE );
        if
(CloseHandle(hThread[0]) == FALSE)
{
            printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
}
        if
(CloseHandle(hThread[1]) == FALSE)
{
            printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
}
    }
}
// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer
table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
    BuildIndex("idxcuscl");

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

```

```

// Output the NURAND used for the loader
into C_FIRST for C_ID = 1,
    // C_W_ID = 1, and C_D_ID = 1
    sprintf(cmd, "isql -S% s -U% s -P% s -d% s -e -
Q\"update customer set c_first = 'C_LOAD = %d' where
c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
logs\nurand_load.log",
        aptr->server,
        aptr->user,
        aptr-
>password,
        aptr-
>database,
        aptr-
        LOADER_NURAND_C);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

=====
// Function : CustomerBufInit
// =====
void CustomerBufInit()
{
    int i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
    }
}

=====
// Function : CustomerBufLoad
// =====
// Fills shared buffer for HISTORY and CUSTOMER
// =====
void CustomerBufLoad(int d_id, int w_id)
{
    long CUSTOMER_SORT_STRUCT i;
    CUSTOMERS_PER_DISTRICT;

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i,
c[i].c_last);
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");
        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount =
(flot) 0;
        // fix to avoid ODBC float to
        // numeric conversion problem.
        // customer_buf[i].c_balance = 0;
        strcpy(customer_buf[i].c_balance,"");
        customer_buf[i].c_ytd_payment =
0;
        customer_buf[i].c_payment_cnt =
0;
        customer_buf[i].c_delivery_cnt =
0;

        strcpy(customer_buf[i].c_data,"");
        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }
}

=====
// Function : CustomerBufLoad
// =====
// Fills shared buffer for HISTORY and CUSTOMER
// =====
void CustomerBufLoad(int d_id, int w_id)
{
    long CUSTOMER_SORT_STRUCT i;
    CUSTOMERS_PER_DISTRICT;

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i,
c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaString(8,16,FIRST_NAME_LEN,
c[i].c_first);
        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for:
d_id = %d, w_id = %d\n",
d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment =
10.0;

        customer_buf[i].c_payment_cnt =
1;
        customer_buf[i].c_delivery_cnt =
0;

        // Generate CUSTOMER and HISTORY
        data
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first,
c[i].c_first);
        strcpy(customer_buf[i].c_last,
c[i].c_last);

        customer_buf[i].c_middle[0] =
'0';
        customer_buf[i].c_middle[1] =
'E';

        MakeAddress(customer_buf[i].c_street_1,
customer_buf[i].c_street_2,
customer_buf[i].c_city,
customer_buf[i].c_state,
customer_buf[i].c_zip);

        MakeNumberString(16, 16,
PHONE_LEN, customer_buf[i].c_phone);
        if (RandomNumber(1L, 100L) > 10)
    }
}

```

```

customer_buf[i].c_credit[0] = 'G';
else

customer_buf[i].c_credit[0] = 'B';
customer_buf[i].c_credit[1] =
'C';

customer_buf[i].c_credit_lim =
50000.0;
customer_buf[i].c_discount =
((float) RandomNumber(0L, 5000L)) / 10000.0;

// fix to avoid ODBC float to
numeric conversion problem.
// customer_buf[i].c_balance =
10.0;

strcpy(customer_buf[i].c_balance,"-10.0");

MakeAlphaString(300, 500,
C_DATA_LEN, customer_buf[i].c_data);

// Generate HISTORY data
MakeAlphaString(12, 24,
H_DATA_LEN, customer_buf[i].h_data);

}

=====

// Function : LoadCustomerTable
// =====

void LoadCustomerTable(LOADER_TIME_STRUCT
*customer_time_start)
{
    int           i;
    long          c_id;
    short         c_d_id;
    short         c_w_id;
    char          c_first[FIRST_NAME_LEN+1];
    char          c_middle[MIDDLE_NAME_LEN+1];
    char          c_last[LAST_NAME_LEN+1];
    char          c_street_1[ADDRESS_LEN+1];
    char          c_street_2[ADDRESS_LEN+1];
    char          c_city[ADDRESS_LEN+1];
    char          c_state[STATE_LEN+1];
    char          c_zip[ZIP_LEN+1];
    char          c_phone[PHONE_LEN+1];
    char          c_credit[CREDIT_LEN+1];
    double        c_credit_lim;
    double        c_discount;

    // fix to avoid ODBC float to numeric
conversion problem.
    // double           c_balance;
    char          c_balance[6];
}

```

```

double      c_ytd_payment;
short       c_payment_cnt;
short       c_delivery_cnt;
char        c_data[C_DATA_LEN+1];
char        c_since[C_SINCE_LEN+1];

RETCODE      rc;

rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_first, 0,
FIRST_NAME_LEN, NULL, 0, 0, 4);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_middle, 0,
MIDDLE_NAME_LEN, NULL, 0, 0, 5);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_last, 0,
LAST_NAME_LEN, NULL, 0, 0, 6);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0,
ADDRESS_LEN, NULL, 0, 0, 7);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0,
ADDRESS_LEN, NULL, 0, 0, 8);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0,
ADDRESS_LEN, NULL, 0, 0, 9);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_state, 0,
STATE_LEN, NULL, 0, 0, 10);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0,
ZIP_LEN, NULL, 0, 0, 11);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0,
PHONE_LEN, NULL, 0, 0, 12);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_since,
0, C_SINCE_LEN, NULL, 0, SQLCHARACTER, 13);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0,
CREDIT_LEN, NULL, 0, 0, 14);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 15);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 16);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

// fix to avoid ODBC float to numeric
conversion problem.
// rc = bcp_bind(c_hdbc1, (BYTE *) &c_balance,
0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 17);
// if (rc != SUCCEED)
//     HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5,
NULL, 0, SQLCHARACTER, 17);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment,
0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 18);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 19);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
20);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, 500,
NULL, 0, 0, 21);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
}

```

```

        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;

        strcpy(c_first,
customer_buf[i].c_first);
        strcpy(c_middle,
customer_buf[i].c_middle);
        strcpy(c_last,
customer_buf[i].c_last);
        strcpy(c_street_1,
customer_buf[i].c_street_1);
        strcpy(c_street_2,
customer_buf[i].c_street_2);
        strcpy(c_city,
customer_buf[i].c_city);
        strcpy(c_state,
customer_buf[i].c_state);
        strcpy(c_zip,
customer_buf[i].c_zip);
        strcpy(c_phone,
customer_buf[i].c_phone);
        strcpy(c_credit,
customer_buf[i].c_credit);

        FormatDate(&c_since);

        c_credit_lim =
customer_buf[i].c_credit_lim;
        c_discount =
customer_buf[i].c_discount;

        // fix to avoid ODBC float to
numeric conversion problem.
        // c_balance =
customer_buf[i].c_balance;
        strcpy(c_balance,
customer_buf[i].c_balance);

        c_ytd_payment =
customer_buf[i].c_ytd_payment;
        c_payment_cnt =
customer_buf[i].c_payment_cnt;
        c_delivery_cnt =
customer_buf[i].c_delivery_cnt;

        strcpy(c_data,
customer_buf[i].c_data);

        // Send data to server
        rc = bcp_sendrow(c_hdbc1);
        if (rc != SUCCEED)

        HandleErrorDBC(c_hdbc1);

        customer_rows_loaded++;
        CheckForCommit(c_hdbc1, c_hstmt1,
customer_rows_loaded, "customer",
&customer_time_start->time_start);
    }

}

```

```

//=====
// Function : LoadHistoryTable
// =====
void LoadHistoryTable(LOADER_TIME_STRUCT
*history_time_start)
{
    int i;
    long c_id;
    short c_d_id;
    short c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];

    RETCODE rc;

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0,
H_DATE_LEN, NULL, 0, SQLCHARACTER, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0,
H_DATA_LEN, NULL, 0, 0, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)

```

```

    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount =
customer_buf[i].h_amount;
        strcpy(h_data,
customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)

        HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2,
history_rows_loaded, "history", &history_time_start-
>time_start);
    }

//=====
// Function : LoadOrders
// =====
void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;
    LOADER_TIME_STRUCT order_line_time_start;
    short w_id;
    short d_id;
    DWORD dwThreadID[MAX_ORDER_THREADS];
    HANDLE hThread[MAX_ORDER_THREADS];
    char name[20];
    RETCODE rc;
    char bcphint[128];

    // seed with unique number
    seed(6);
    printf("Loading orders...\n");

    // if build index before load...
}

```

```

        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            BuildIndex("idxordcl");
            BuildIndex("idxnodcl");
            BuildIndex("idxodcl");
        }

        // initialize bulk copy
        sprintf(name, "%s..%s", aptr->database,
"orders");

        rc = bcp_init(o_hdbc1, name, NULL,
"logs\\orders.err", DB_IN);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            sprintf(bcphint, "tablock, order
(o_w_id, o_d_id, o_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 30000));
            rc = bcp_control(o_hdbc1,
BCPHINTS, (void*) bcphint);
            if (rc != SUCCEED)

                HandleErrorDBC(o_hdbc1);
            }

            sprintf(name, "%s..%s", aptr->database,
"new_order");

            rc = bcp_init(o_hdbc2, name, NULL,
"logs\\neword.err", DB_IN);
            if (rc != SUCCEED)
                HandleErrorDBC(o_hdbc2);

            if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
            {
                sprintf(bcphint, "tablock, order
(no_w_id, no_d_id, no_o_id), ROWS_PER_BATCH = %u",
(aptr->num_warehouses * 9000));
                rc = bcp_control(o_hdbc2,
BCPHINTS, (void*) bcphint);
                if (rc != SUCCEED)

                    HandleErrorDBC(o_hdbc2);
                }

                sprintf(name, "%s..%s", aptr->database,
"order_line");

                rc = bcp_init(o_hdbc3, name, NULL,
"logs\\ordline.err", DB_IN);
                if (rc != SUCCEED)
                    HandleErrorDBC(o_hdbc3);

                if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
                {

```

```

                    sprintf(bcphint, "tablock, order
(o_l_id, ol_d_id, ol_o_id, ol_number),
ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
                    rc = bcp_control(o_hdbc3,
BCPHINTS, (void*) bcphint);
                    if (rc != SUCCEED)

                        HandleErrorDBC(o_hdbc3);
                    }

                    orders_rows_loaded      = 0;
                    new_order_rows_loaded   = 0;
                    order_line_rows_loaded = 0;

                    OrdersBufInit();

                    orders_time_start.time_start = (TimeNow() / 
MILLI);
                    new_order_time_start.time_start =
(TimeNow() / MILLI);
                    order_line_time_start.time_start =
(TimeNow() / MILLI);

                    for (w_id = (short)aptr-
>starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)
    {
        OrdersBufLoad(d_id,
w_id);

        // start parallel
loading threads here...
    }
}

// start Orders table
thread

printf("...Loading
Order Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

hThread[0] =
CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,
&dwThreadID[0]);

if (hThread[0] == NULL)
{

```

```

    printf("Error, failed in creating creating
thread = 0.\n");
    exit(-1);
}

// start NewOrder table
thread

printf("...Loading New-
Order Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

hThread[1] =
CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
    exit(-1);
}

// start Order-Line
table thread

printf("...Loading
Order-Line Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

hThread[2] =
CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

if (hThread[2] == NULL)
{

```

```

        printf("Error, failed in creating creating
thread = 2.\n");
                                exit(-1);
    }

    WaitForSingleObject(
hThread[0], INFINITE );
    WaitForSingleObject(
hThread[1], INFINITE );
    WaitForSingleObject(
hThread[2], INFINITE );

    if
(CloseHandle(hThread[0]) == FALSE)
    {

        printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
    }

    if
(CloseHandle(hThread[1]) == FALSE)
    {

        printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
    }

    if
(CloseHandle(hThread[2]) == FALSE)
    {

        printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
    }
}

printf("Finished loading orders.\n");

return;
}

=====
// Function : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and
ORDERLINE
=====

void OrdersBufInit()
{
    int i;
    int j;
}

```

```

for (i=0;i<orders_per_district;i++)
{
    orders_buf[i].o_id = 0;
    orders_buf[i].o_d_id = 0;
    orders_buf[i].o_w_id = 0;
    orders_buf[i].o_c_id = 0;
    orders_buf[i].o_carrier_id = 0;
    orders_buf[i].o_ol_cnt = 0;
    orders_buf[i].o_all_local = 0;

    for (j=0;j<=14;j++)
    {

        orders_buf[i].o_ol[j].ol = 0;
        orders_buf[i].o_ol[j].ol_i_id = 0;
        orders_buf[i].o_ol[j].ol_supply_w_id = 0;
        orders_buf[i].o_ol[j].ol_quantity = 0;
        orders_buf[i].o_ol[j].ol_amount = 0;
        strcpy(orders_buf[i].o_ol[j].ol_dist_info,"");
    }
}

=====
// Function      : OrdersBufLoad
// Fills shared buffer for ORDERS, NEWORDER, and
ORDERLINE
=====

void OrdersBufLoad(int d_id, int w_id)
{
    int cust[ORDERS_PER_DISTRICT+1];
    long o_id;
    short ol;

    printf("...Loading Order Buffer for: d_id =
%d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for
(o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER
data

```

```

orders_buf[o_id].o_d_id = d_id;
orders_buf[o_id].o_w_id = w_id;
orders_buf[o_id].o_id = o_id+1;
orders_buf[o_id].o_c_id =
cust[o_id+1];
orders_buf[o_id].o_ol_cnt =
(short)RandomNumber(5L, 15L);

if (o_id < first_new_order)
{
    orders_buf[o_id].o_carrier_id =
(short)RandomNumber(1L, 10L);
}

orders_buf[o_id].o_all_local = 1;
}
else
{
    orders_buf[o_id].o_carrier_id = 0;
    orders_buf[o_id].o_all_local = 1;
}

for (ol=0;
ol<orders_buf[o_id].o_ol_cnt; ol++)
{

    orders_buf[o_id].o_ol[ol].ol = ol+1;
    orders_buf[o_id].o_ol[ol].ol_i_id =
RandomNumber(1L, max_items);
    orders_buf[o_id].o_ol[ol].ol_supply_w_id =
w_id;

    orders_buf[o_id].o_ol[ol].ol_quantity = 5;
    MakeAlphaString(24, 24,
OL_DIST_INFO_LEN,
&orders_buf[o_id].o_ol[ol].ol_dist_info);

    // Generate ORDER-LINE
data
    if (o_id <
first_new_order)
    {
        orders_buf[o_id].o_ol[ol].ol_amount = 0;
        // Added to
insure ol_delivery_d set properly during load

        FormatDate(&orders_buf[o_id].o_ol[ol].ol_de
livery_d);
    }
    else
    {
        orders_buf[o_id].o_ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
    }
}
}

```

```

        // Added to
ensure ol_delivery_d set properly during load

        // odbc
datetime format

    strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");

}

}

=====

// Function : LoadOrdersTable
// =====
=====

void LoadOrdersTable(LOADER_TIME_STRUCT
*orders_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    short o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o.ol_cnt;
    short o.all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;

    // bind ORDER data
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc1);

    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc1);

        // Added to
ensure ol_delivery_d set properly during load

        // odbc
datetime format

    strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");

}

}

=====

// Function : LoadNewOrderTable
// =====
=====

void LoadNewOrderTable(LOADER_TIME_STRUCT
*new_order_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    short o_w_id;
    RETCODE rc;
    DBINT rcint;

    // Bind NEW-ORDER data

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc2);

    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i < last_new_order; i++)
    {
        o_id      =
orders_buf[i].o_id;
        o_d_id    =
orders_buf[i].o_d_id;
        o_w_id    =
orders_buf[i].o_w_id;
        o_c_id    =
orders_buf[i].o_c_id;
        o_carrier_id =
orders_buf[i].o_carrier_id;
        o.ol_cnt   =
orders_buf[i].o.ol_cnt;
        o.all_local =
orders_buf[i].o.all_local;

        FormatDate(&o_entry_d);

        // send data to server
        rc = bcp_sendrow(o_hdbc1);
        if (rc != SUCCCEED)
            HandleErrorDBC(o_hdbc1);

        orders_rows_loaded++;

        CheckForCommit(o_hdbc1, o_hstmt1,
orders_rows_loaded, "orders", &orders_time_start-
>time_start);
    }

    // rcint = bcp_batch(o_hdbc1);
    // if (rcint < 0)
    //     HandleErrorDBC(o_hdbc1);

    if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc1);

        if (rcint < 0)
            HandleErrorDBC(o_hdbc1);

        SQLFreeStmt(o_hstmt1, SQL_DROP);
        SQLDisconnect(o_hdbc1);
        SQLFreeConnect(o_hdbc1);

        // if build index after load...
        if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
            BuildIndex("idxordcl");

        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxordnc");
    }
}

```

```

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)

HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;

        CheckForCommit(o_hdbc2, o_hstmt2,
new_order_rows_loaded, "new_order",
&new_order_time_start->time_start);
    }

// rcint = bcp_batch(o_hdbc2);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc2);

        if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);

        if (rcint < 0)

HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
SQLDisconnect(o_hdbc2);
SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
            BuildIndex("idxnodcl");
    }

}

//=====
// Function : LoadOrderLineTable
//=====

void LoadOrderLineTable(LOADER_TIME_STRUCT
*order_line_time_start)
{
    int i,j;
    long o_id;
    short o_d_id;
    short o_w_id;
    long ol;
    long ol_i_id;
    short ol_supply_w_id;
    short ol_quantity;
    double ol_amount;
    char ol_dist_info[DIST_INFO_LEN+1];
    char ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;

    // bind ORDER-LINE data
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 4);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, 5);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, 6);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0,
OL_DELIVERY_D_LEN, NULL, 0,
SQLCHARACTER, 7);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, 8);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, 9);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0,
DIST_INFO_LEN, NULL, 0, 10);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    for (i = 0; i < orders_per_district; i++)
    {
        o_id    = orders_buf[i].o_id;
        o_d_id  = orders_buf[i].o_d_id;
        o_w_id  = orders_buf[i].o_w_id;
        for (j=0; j < orders_buf[i].o.ol_cnt; j++)
        {
            ol          =
orders_buf[i].o.ol[j].ol;
            ol_i_id    =
orders_buf[i].o.ol[j].ol_i_id;
            ol_supply_w_id =
orders_buf[i].o.ol[j].ol_supply_w_id;
            ol_quantity =
orders_buf[i].o.ol[j].ol_quantity;
            ol_amount   =
orders_buf[i].o.ol[j].ol_amount;
            strcpy(ol_delivery_d,orders_buf[i].o.ol[j].
ol_delivery_d);

            strcpy(ol_dist_info,orders_buf[i].o.ol[j].o
l_dist_info);
        }
    }
    rc =
bcp_sendrow(o_hdbc3);
    if (rc != SUCCEED)

HandleErrorDBC(o_hdbc3);

    order_line_rows_loaded++;

    CheckForCommit(o_hdbc3,
o_hstmt3, order_line_rows_loaded, "order_line",
&order_line_time_start->time_start);
}

// rcint = bcp_batch(o_hdbc3);
// if (rcint < 0)
//     HandleErrorDBC(o_hdbc3);

        if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc3);

        if (rcint < 0)

HandleErrorDBC(o_hdbc3);

        SQLFreeStmt(o_hstmt3, SQL_DROP);
SQLDisconnect(o_hdbc3);
SQLFreeConnect(o_hdbc3);

        // if build index after load...
        if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
            BuildIndex("idxodlcl");
    }

}

```

```

}

=====
// Function : GetPermutation
//
=====

void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

=====

// Function : CheckForCommit
//
=====

void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    int rows_loaded,
                    char *table_name,
                    long *time_start)
{
    long time_end, time_diff;
    // DBINT rcint;

    if ( !(rows_loaded % aptr->batch) )
    {
        // rcint = bcp_batch(hdbc);
        // if (rcint < 0)
        //     HandleErrorDBC(hdbc);

        time_end = (TimeNow() / MILLI);
        time_diff = time_end -
*time_start;

```

```

        printf("-> Loaded %ld rows into
%s in %ld sec - Total = %d (%.2f rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr-
>batch / (time_diff ? time_diff : 1L));
        *time_start = time_end;
    }

    return;
}

=====

// Function : OpenConnections
//
=====

void OpenConnections()
{
    RETCODE rc;

    char szDriverString[300];
    char szDriverStringOut[1024];
    SQLSMALLINT cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV,
                   SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
                  (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );

```

```

    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP,
                      (void *)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connections to SQL Server

    // Connection 1

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (i_hdbc1,
SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    // Connection 2

    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

```

```

rc = SQLSetConnectOption ( w_hdbc1,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(w_hdbc1);

rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
HandleErrorDBC(w_hdbc1);

// Connection 3

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption ( c_hdbc1,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc1);

rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc1);

// Connection 5

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption ( o_hdbc1,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc1);

// Connection 4

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption ( c_hdbc2,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
HandleErrorDBC(c_hdbc2);

// Connection 6

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption ( o_hdbc2,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if (rc != SUCCEED)
HandleErrorDBC(o_hdbc2);

// Connection 7

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );
rc = SQLSetConnectOption ( o_hdbc3,
SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
NULL,

```

```

        (SQLCHAR*)&szDriverString[0] ,
        SQL_NTS,
        (SQLCHAR*)&szDriverStringOut[0],
        sizeof(szDriverStringOut),
        &cbDriverStringOut,
        SQL_DRIVER_NOPROMPT );
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

}

=====
// Function name: BuildIndex
// =====
void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation:\n",index_script);

    sprintf(cmd, "isql -S%s -U%s -P%s -e -
    i%s\\%s.sql > logs\\%s.log",
            aptr->server,
            aptr->user,
            aptr-
            >password,
            aptr-
            >index_script_path,
            index_script,
            index_script);
    system(cmd);

    printf("Finished index creation:\n",index_script);
}

void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR SqlState[6],
    Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLINTEGER NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char timebuf[128];
    char datebuf[128];
    FILE *fp1;
}

```

```

        i = 1;
        while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC
        , hdbc1, i, SqlState , &NativeError,
                                         Msg,
        sizeof(Msg) , &MsgLen ) ) != SQL_NO_DATA )
        {
            sprintf( szLastError , "%s" ,
        Msg );

            _strtime(timebuf);
            _strdate(datebuf);

            printf( "[%s : %s] %s\n" ,
        datebuf, timebuf, szLastError);

            fp1 =
        fopen("logs\\tpccldr.err","w");
            if (fp1 == NULL)
                printf("ERROR: Unable
        to open errorlog file.\n");
            else
            {
                fprintf(fp1, "[%s : %s]
    %s\n" , datebuf, timebuf, szLastError);
                fclose(fp1);
            }
            i++;
        }
    void HandleErrorSTMT (HSTMT hstmt1)
    {
        SQLCHAR SqlState[6],
        Msg[SQL_MAX_MESSAGE_LENGTH];
        SQLINTEGER NativeError;
        SQLSMALLINT i, MsgLen;
        SQLRETURN rc2;
        char timebuf[128];
        char datebuf[128];
        FILE *fp1;

        i = 1;
        while (( rc2 =
        SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
        &NativeError,
                                         Msg,
        sizeof(Msg) , &MsgLen ) ) != SQL_NO_DATA )
        {
            sprintf( szLastError , "%s" ,
        Msg );

            _strtime(timebuf);
            _strdate(datebuf);

            printf( "[%s : %s] %s\n" ,
        datebuf, timebuf, szLastError);

```

```

        fp1 =
        fopen("logs\\tpccldr.err","w");
        if (fp1 == NULL)
            printf("ERROR: Unable
        to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s]
    %s\n" , datebuf, timebuf, szLastError);
            fclose(fp1);
        }
        i++;

    }

void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d
    %H:%M:%S.000" , &when );

    return;
}

=====

// Function : CheckSQL
// =====
void CheckSQL()
{
    RETCODE rc;
    char szDriverString[300];
    char szDriverStringOut[1024];
    int SQLBuildFlag;
    char resp;
    SQLSMALLINT cbDriverStringOut;
    SQLCHAR SQLVersion[19];
}

```

```

SQLINTEGER
SQLVersionInd;

SQLAllocHandle(SQL_HANDLE_ENV,
SQL_NULL_HANDLE, &henv);

SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0 );

SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&v_hdbc);

SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP,
(void *)SQL_BCP_ON, SQL_IS_INTEGER );

// Open connection to SQL Server

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s" ,

aptr->server,
aptr->user,
aptr->password );

if ( SQLSetConnectAttr( v_hdbc,
SQL_ATTR_PACKET_SIZE, (SQLPOINTER)aptr->pack_size,
SQL_IS_UINTEGER ) != SQL_SUCCESS )
HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );

if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
HandleErrorDBC(v_hdbc);

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc
, &v_hstmt) != SQL_SUCCESS )
HandleErrorSTMT(v_hstmt);

rc = SQLBindCol(v_hstmt, 4, SQL_C_CHAR,
&SQLVersion, sizeof(SQLVersion), &SQLVersionInd);

// issue SQL Server extended stored
procedure (xp_msver) to determine installed version

```

```

rc = SQLExecDirect(v_hstmt, "EXECUTE
xp_msver ProductVersion", SQL_NTS);

if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
HandleErrorSTMT(v_hstmt);

rc = SQLFetch(v_hstmt);

if (rc != SQL_SUCCESS)
HandleErrorDBC(v_hdbc);

// Check build number to ensure 8.00.194 or
higher
SQLBuildFlag = 1;

// first check the Major version

if ( SQLVersion[0] == '8' )

{
    if (( SQLVersion[2] == '0' ) &
SQLVersion[3] == '0' )
    {
        if ( SQLVersion[5] ==
'1' )
        {
            if (
(SQLVersion[6] == '9') &
(SQLVersion[7] == '4' ) )
            {
                SQLBuildFlag = 0;
                printf("You are using SQL Server version =
%9s\n\n", SQLVersion);
            }
            else
            {
                SQLBuildFlag = 1;
            }
        }
        else
        {
            if (
SQLVersion[5] == '3' )
            {
                if (
( (SQLVersion[6] >= 53) & (SQLVersion[7] >= 48) )
                {
                    SQLBuildFlag = 0;
                    printf("You are using SQL Server version =
%9s\n\n", SQLVersion);
                }
                else
                {
                    SQLBuildFlag = 1;
                }
            }
        }
    }
}
else
{
    printf("NOTE: The SQL Server
version you are using is not supported\n");
    printf("for TPC-C benchmarking.
You currently have SQL Server version
%9s\n",SQLVersion);
    printf("installed. Please
upgrade to Microsoft SQL Server 2000 (8.00.0194) or
better.\n");
    printf("and re-run the SETUP
program.\n\n");
    printf("Do you wish to continue
with setup? (Y/N): ");
    resp = getchar();
    if ( ( resp == 'N' ) || (resp ==
'n') )
    {
        printf("\nSetup
Aborted!\n");
        exit(1);
    }
}

SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

return;
}

//=====
// Function : CheckDataBase
//=====
void CheckDataBase()
{
    RETCODE rc;
    char szDriverString[300];
    char szDriverStringOut[1024];
    char TablesBitMap[9] = {"000000000"};
}

```

```

int i,
ExitFlag;

SQLSMALLINT cbDriverStringOut;
SQLCHAR TabName[10];
SQLINTEGER TabNameInd,
TabCount, TabCountInd;

ExitFlag = 0;

SQLAllocHandle(SQL_HANDLE_ENV,
SQL_NULL_HANDLE, &henv);

SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
(void*)SQL_OV_ODBC3, 0 );

SQLAllocHandle(SQL_HANDLE_DBC, henv ,
&v_hdbc);

SQLSetConnectAttr(v_hdbc, SQL_COPT_SS_BCP,
(void *)SQL_BCP_ON, SQL_IS_INTEGER );

// Open connection to SQL Server

sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectAttr( v_hdbc,
SQL_ATTR_PACKET_SIZE, (SQLPOINTER)aptr->pack_size,
SQL_IS_UINTEGER );
if (rc != SQL_SUCCESS)
    HandleErrorDBC(v_hdbc);

rc = SQLDriverConnect ( v_hdbc,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cDriverStringOut,
SQL_DRIVER_NOPROMPT );

// if the rc is SQL_ERROR, the the TPCC
database probably does not exist
if (rc == SQL_ERROR)
{

    printf("The database TPCC does
not appear to exist!\n");
    printf("\nCheck LOGS\\ directory
for database creation errors.\n");

    // cleanup database connections
and handles
SQLFreeHandle(SQL_HANDLE_STMT,
v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC,
v_hdbc);

    // since there is not a database,
exit back to SETUP.CMD
exit(1);
}

if ( SQLAllocHandle(SQL_HANDLE_STMT, v_hdbc
, &v_hstmt) != SQL_SUCCESS )
    HandleErrorDBC(v_hdbc);

if ( SQLBindCol(v_hstmt, 1, SQL_C_ULONG,
&TabCount, 0, &TabCountInd) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

    // count the number of user tables from
sysobjects
rc = SQLExecDirect(v_hstmt, "select
count(*) from sysobjects where xtype = 'U',
SQL_NTS);
if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
    HandleErrorSTMT(v_hstmt);

if ( SQLFetch(v_hstmt) != SQL_SUCCESS )
    HandleErrorSTMT(v_hstmt);

// if the number of tables is less than 9,
select all the user tables in TPCC
if (TabCount != 9)
{
    SQLFreeHandle(SQL_HANDLE_STMT,
v_hstmt);
    SQLAllocHandle(SQL_HANDLE_STMT,
v_hdbc , &v_hstmt);

    if ( SQLBindCol(v_hstmt, 1,
SQL_C_CHAR, &TabName, sizeof(TabName), &TabNameInd)
!= SQL_SUCCESS )

        HandleErrorSTMT(v_hstmt);

        // select the list of user tables
into a result set
        rc = SQLExecDirect(v_hstmt,
"select * from sysobjects where xtype = 'U',
SQL_NTS);
        if ((rc != SQL_SUCCESS) && (rc !=
SQL_SUCCESS_WITH_INFO))
            HandleErrorSTMT(v_hstmt);

        // go through the result set and
set the bitmap for each found table
        // set the bitmap to '1' if the
table name is found

        while ((rc = SQLFetch(v_hstmt))
!= SQL_NO_DATA)
        {
            switch( TabName[0] )
            {
                case 'w':
                    TablesBitMap[0] = '1';
                    break;
                case 'd':
                    TablesBitMap[1] = '1';
                    break;
                case 'c':
                    TablesBitMap[2] = '1';
                    break;
                case 'h':
                    TablesBitMap[3] = '1';
                    break;
                case 'n':
                    TablesBitMap[4] = '1';
                    break;
                case 'o':
                    if
(TableName[5] = 's')
                        TablesBitMap[5] = '1';
                    if
(TableName[5] = '_')
                        TablesBitMap[6] = '1';
                    break;
                case 'i':
                    TablesBitMap[7] = '1';
                    break;
                case 's':
                    TablesBitMap[8] = '1';
                    break;
            }

            // a '0' ExitFlag means do NOT
exit the loader early, a '1' means exit the loader
early
            ExitFlag = 0;

            // iterate through the bitmap to
display which table(s) is actually missing
            for (i = 0; i <= 8; i++)
            {
                switch(i)
                {

```

```

        case 0:      if
(TablesBitMap[i] == '0')
{
    printf("The Warehouse table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 1:      if
(TablesBitMap[i] == '0')
{
    printf("The District table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 2:      if
(TablesBitMap[i] == '0')
{
    printf("The Customer table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 3:      if
(TablesBitMap[i] == '0')
{
    printf("The History table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 4:      if
(TablesBitMap[i] == '0')
{
    printf("The New_Order table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 5:      if
(TablesBitMap[i] == '0')
{
    printf("The Orders table is missing or
damaged.\n");
}

```

```

        ExitFlag = 1;
}
break;

case 6:      if
(TablesBitMap[i] == '0')
{
    printf("The Order_Line table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 7:      if
(TablesBitMap[i] == '0')
{
    printf("The Item table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

case 8:      if
(TablesBitMap[i] == '0')
{
    printf("The Stock table is missing or
damaged.\n");

    ExitFlag = 1;
}
break;

}

// if one or more tables are
missing, display message and exit the loader
if (ExitFlag = 1)
{
    Loader!\n");
    printf("\nCheck LOGS\\
directory for database\n");
    printf("or table
creation errors.\n");

    // cleanup database
connections and handles

    SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
    SQLDisconnect(v_hdbc);

    SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

    exit(1);
}

```

```

// cleanup database connections and handles
SQLFreeHandle(SQL_HANDLE_STMT, v_hstmt);
SQLDisconnect(v_hdbc);
SQLFreeHandle(SQL_HANDLE_DBC, v_hdbc);

return;
}

```

version.sql

```

-- File:      VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.22
-- Copyright Microsoft, 2001
-- Purpose:   Returns SQL Server version string

print " "
select convert(char(30), getdate(),9)
print " "
go

select @@version
go

```

Appendix C: Tunable Parameters

Microsoft SQL Server 2000 Startup Parameters

```
C:\Program Files\Microsoft SQL
Server\MSSQL\BINN\sqlservr.exe
-eC:\Program Files\Microsoft SQL
Server\MSSQL\LOG\ERRORLOG -x -c -t3502
-g100
```

Where:

- c Start SQL Server independently of the Windows NT Service Control Manager
- x Disables the keeping of CPU time and cache-hit ratio statistics
- t3502 Prints a message to the SQL Server log at the start and end of each checkpoint
- g64 Specify the amount of virtual address space in MB, SQL Server will leave available for memory allocations, excluding the buffer pool and threads stack, such as dynamically-loaded DLLs, extended procedure calls, etc. Incorrect use of this option can lead to conditions under which SQL Server may not start or may encounter runtime errors.

Boot.ini Parameters

```
[boot loader]
timeout=30
```

```
default=multi(0)disk(0)rdisk(0)partition(2)\WINNT
[operating systems]
multi(0)disk(0)rdisk(0)partition(2)\WINNT="Microsoft
Windows .NET Server" /pae /fastdetect
```

Microsoft SQL Server 2000 Configuration Parameters

name	maximum	config_value	minimum
		run_value	
affinity mask	2147483647	255	-2147483648
allow updates	1	15	0
awe enabled	1	0	0
c2 audit mode	1	1	0
cost threshold for parallelism	32767	5	0
cursor threshold	2147483647	-1	-1
default full-text language	2147483647	1033	0
default language	9999	1033	0
fill factor (%)	100	0	0
index create memory (KB)	2147483647	704	704
lightweight pooling	1	1	0
locks	2147483647	0	5000

max degree of parallelism	0
32	1
max server memory (MB)	4
2147483647	2147483647
2147483647	2147483647
max text repl size (B)	0
2147483647	65536
65536	65536
max worker threads	32
32767	360
360	360
media retention	0
365	0
0	0
min memory per query (KB)	512
2147483647	512
512	512
min server memory (MB)	0
2147483647	0
0	0
nested triggers	0
1	1
1	1
network packet size (B)	512
65536	512
512	512
open objects	0
2147483647	0
0	0
priority boost	0
1	1
1	1
query governor cost limit	0
2147483647	0
0	0
query wait (s)	-1
2147483647	-1
-1	-1
recovery interval (min)	0
32767	110
111	111
remote access	0
1	1
1	1
remote login timeout (s)	0
2147483647	20
20	20
remote proc trans	0
1	0
0	0
remote query timeout (s)	0
2147483647	600
600	600
scan for startup procs	0
1	0
0	0
set working set size	0
1	0
0	0
show advanced options	0
1	1
1	1

```

two digit year cutoff          1753
9999      2049
        2049
user connections             0
32767      0
        0
user options                 0
32767      0
        0

```

1> 2> 3>

Benchcraft Profile

Profile: quark-6200wh-5clients
File Path: C:\benchcraft\quark-6200wh-
5clients.pro
Version: 3

Number of Engines: 5

```

Name: CL02
Description:
Directory: c:\temp\pc1.log
Machine: r1
Parameter Set: 3.2
Index: 50000000
Seed: 18546
Configured Users: 12400
Pipe Name: DRIVER286005718
Connect Rate: 11
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 0

```

```

Name: CL03
Description:
Directory: d:\pc2.log
Machine: N16
Parameter Set: 3.2
Index: 100000000
Seed: 18546
Configured Users: 12400
Pipe Name: DRIVER486111687
Connect Rate: 11
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 1

```

```

Name: CL04
Description:
Directory: c:\pc3.log
Machine: N16
Parameter Set: 3.2
Index: 150000000

```

```

Seed: 18546
Configured Users: 12400
Pipe Name: DRIVER61351046
Connect Rate: 11
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 0

```

```

Name: CL05
Description:
Directory: c:\pc4.log
Machine: N18
Parameter Set: 3.2
Index: 200000000
Seed: 18546
Configured Users: 12400
Pipe Name: DRIVER51445656
Connect Rate: 11
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 1

```

```

Name: CL06
Description:
Directory: d:\pc6.log
Machine: r1
Parameter Set: 3.2
Index: 400000000
Seed: 18546
Configured Users: 12400
Pipe Name: DRIVER564360984
Connect Rate: 11
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 233
CPU: 0

```

Number of User groups: 5

```

Driver Engine: CL02
IIS Server: pc1c
SQL Server: quark
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 1240
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

```

Driver Engine: CL03
IIS Server: pc2c
SQL Server: quark
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 1240
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

```

Protocol: HTML
w_id Range: 1241 - 2480
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

```

Driver Engine: CL04
IIS Server: pc3c
SQL Server: quark
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2481 - 3720
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

```

Driver Engine: CL05
IIS Server: pc4c
SQL Server: quark
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 3721 - 4960
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

```

Driver Engine: CL06
IIS Server: pc6c
SQL Server: quark
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 4961 - 6200
w_id Min Warehouse: 1
w_id Max Warehouse: 6200
Scale: Normal
User Count: 12400
District id: 1
Scale Down: No

```

Number of Parameter Sets: 66

Default Parameter Set				Txn	Think
Key	RT	RT	Menu		
Time	Delay	Fence	Delay	Weight	Time
12.05	18.01	0.10	5.00	10.00	0.10

						Txn	Think			Order Status	4.05	
		Key	RT	RT	Menu			38.10	2.01	0.10	5.00	0.10
		Time	Delay	Fence	Delay	Weight	Time			3.6	3.6 tt	
12.05	3.01	Payment	0.10	5.00	10.00							
		Delivery	0.10	1.00								
5.05	2.01	0.10	5.00	0.10								
		Stock Level	0.10	1.00								
5.05	2.01	0.10	20.00	0.10								
		Order Status	0.10	1.00								
10.05	2.01	0.10	5.00	0.10								
		Tuned Distribution										
		Txn Think										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
12.05	18.01	0.10	5.00	0.10								
				Payment	43.10							
12.05	3.01	0.10	5.00	0.10								
				Delivery	4.05							
5.05	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
5.05	2.01	0.10	20.00	0.10								
				Order Status	4.05							
10.05	2.01	0.10	5.00	0.10								
		No Think										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	10.00							
0.00	0.00	0.00	5.00	0.00								
				Payment	10.00							
0.00	0.00	0.00	5.00	0.00								
				Delivery	1.00							
0.00	0.00	0.00	5.00	0.00								
				Stock Level	1.00							
0.00	0.00	0.00	20.00	0.00								
				Order Status	1.00							
0.00	0.00	0.00	5.00	0.00								
		95%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.00	2.01	0.10	5.00	0.10								
				Stock Level	4.05							
6.00	2.01	0.10	20.00	0.10								
				Order Status	4.05							
11.00	2.01	0.10	5.00	0.10								
		90%										
Key	RT	RT	Menu			Txn	Think					
Time	Delay	Fence	Delay			Weight	Time					
				New Order	44.75							
13.00	18.01	0.10	5.00	0.10								
				Payment	43.10							
13.00	3.01	0.10	5.00	0.10								
				Delivery	4.05							
6.0												

			Payment	43.10
	3.01		0.10	5.00
			Delivery	4.05
33.74		2.01	0.10	5.00
14.14			Stock Level	4.05
14.14		2.01	0.10	20.00
			Order Status	4.05
28.14		2.01	0.10	5.00
				0.10
			2.6	
			2.6 tt	
Key	RT	RT	Menu	Txn Think
Time	Delay	Fence	Delay	Weight Time
			New Order	44.75
31.30		18.01	0.10	5.00
			Payment	43.10
31.30		3.01	0.10	5.00
			Delivery	4.05
13.10		2.01	0.10	5.00
			Stock Level	4.05
13.10		2.01	0.10	20.00
			Order Status	4.05
26.10		2.01	0.10	5.00
				0.10
			2.4	
			2.4 tt	
Key	RT	RT	Menu	Txn Think
Time	Delay	Fence	Delay	Weight Time
			New Order	44.75
28.90		18.01	0.10	5.00
			Payment	43.10
28.90		3.01	0.10	5.00
			Delivery	4.05
12.10		2.01	0.10	5.00
			Stock Level	4.05
12.10		2.01	0.10	20.00
			Order Status	4.05
24.10		2.01	0.10	5.00
				0.10
			2.2	
			2.2 tt	
Key	RT	RT	Menu	Txn Think
Time	Delay	Fence	Delay	Weight Time
			New Order	44.75
28.90		18.01	0.10	5.00
			Payment	43.10
28.90		3.01	0.10	5.00
			Delivery	4.05
12.10		2.01	0.10	5.00
			Stock Level	4.05
12.10		2.01	0.10	20.00
			Order Status	4.05
24.12		2.01	0.10	5.00
				0.10
			2.0	
			2.0 tt	

Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.75		
24.10	18.01	0.10	5.00		0.10		
		Payment			43.10		
24.10	3.01	0.10	5.00		0.10		
		Delivery			4.05		
10.10	2.01	0.10	5.00		0.10		
		Stock Level			4.05		
10.10	2.01	0.10	20.00		0.10		
		Order Status			4.05		
20.10	2.01	0.10	5.00		0.10		
			5.0				
			5.0 tt				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.75		
60.25	18.01	0.10	5.00		0.10		
		Payment			43.10		
60.25	3.01	0.10	5.00		0.10		
		Delivery			4.05		
25.25	2.01	0.10	5.00		0.10		
		Stock Level			4.05		
25.25	2.01	0.10	20.00		0.10		
		Order Status			4.05		
50.25	2.01	0.10	5.00		0.10		
			4.5				
			4.5 tt				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.75		
54.20	18.01	0.10	5.00		0.10		
		Payment			43.10		
54.20	3.01	0.10	5.00		0.10		
		Delivery			4.05		
22.70	2.01	0.10	5.00		0.10		
		Stock Level			4.05		
22.70	2.01	0.10	20.00		0.10		
		Order Status			4.05		
45.20	2.01	0.10	5.00		0.10		
			3.5				
			3.5 tt				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.75		
42.10	18.01	0.10	5.00		0.10		
		Payment			43.10		
42.10	3.01	0.10	5.00		0.10		
		Delivery			4.05		
17.60	2.01	0.10	5.00		0.10		
		Stock Level			4.05		
17.60	2.01	0.10	20.00		0.10		

		Order Status		4.05	
35.10	2.01	0.10	5.00	0.10	
1.8 1.8 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
21.60	18.01	New Order	0.10	44.75	0.10
		Payment	0.10	43.10	
21.60	3.01	Delivery	0.10	5.00	0.10
9.09	2.01	Stock Level	0.10	5.00	0.10
9.09	2.01	Order Status	0.10	20.00	0.10
18.09	2.01		0.10	5.00	0.10
4.2 4.2 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
54.20	18.01	New Order	0.10	44.75	0.10
		Payment	0.10	43.10	
54.20	3.01	Delivery	0.10	5.00	0.10
22.70	2.01	Stock Level	0.10	5.00	0.10
22.70	2.01	Order Status	0.10	20.00	0.10
45.20	2.01		0.10	5.00	0.10
1.6 1.6 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
19.20	18.01	New Order	0.10	44.75	0.10
		Payment	0.10	43.10	
19.20	3.01	Delivery	0.10	5.00	0.10
8.08	2.01	Stock Level	0.10	5.00	0.10
8.08	2.01	Order Status	0.10	20.00	0.10
16.08	2.01		0.10	5.00	0.10
1.4 1.4 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
16.87	18.01	New Order	0.10	44.75	0.10

						Txn	Think			Order Status	4.04
		Key	RT	RT	Menu			10.85	2.01	0.10	5.00
		Time	Delay	Fence	Delay		Weight			1.07	
16.87	3.01	Payment	0.10	5.00	0.10	43.10				1.07 tt	
		Delivery	0.10	5.00	0.10	4.05					
7.07	2.01	Stock Level	0.10	5.00	0.10	4.05					
7.07	2.01	Order Status	0.10	20.00	0.10	4.05					
14.07	2.01		0.10	5.00	0.10						
			1.2								
			1.2 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
						New Order	44.83				
14.46	18.01		0.10	5.00	0.10						
						Payment	43.05				
14.46	3.01		0.10	5.00	0.10						
						Delivery	4.04				
6.06	2.01		0.10	5.00	0.10						
						Stock Level	4.04				
6.06	2.01		0.10	20.00	0.10						
						Order Status	4.04				
12.06	2.01		0.10	5.00	0.10						
			3.5								
			3.5 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
						New Order	44.83				
42.10	18.01		0.10	5.00	0.10						
						Payment	43.10				
42.10	3.01		0.10	5.00	0.10						
						Delivery	4.05				
17.60	2.01		0.10	5.00	0.10						
						Stock Level	4.05				
17.60	2.01		0.10	20.00	0.10						
						Order Status	4.05				
35.10	2.01		0.10	5.00	0.10						
			1.9								
			1.9 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
						New Order	44.75				
22.89	18.01		0.10	5.00	0.10						
						Payment	43.10				
22.89	3.01		0.10	5.00	0.10						
						Delivery	4.05				
9.59	2.01		0.10	5.00	0.10						
						Stock Level	4.05				
9.59	2.01		0.10	20.00	0.10						
						Order Status	4.05				
19.09	2.01		0.10	5.00	0.10						
			1.1								
			1.1 tt								
						Txn	Think				
		Key	RT	RT	Menu						
		Time	Delay	Fence	Delay		Weight				
						New Order	44.83				
						Payment	43.05				
						Delivery	4.04				
						Stock Level	4.04				
						Order Status	4.04				

			Payment	43.05		Txn	Think		Order Status	4.04
15.06	3.01		0.10	5.00	0.10	Key	RT	RT	Menu	
Delivery				4.04		Time	Delay	Fence	Delay	Weight Time
6.31	2.01		0.10	5.00	0.10				New Order	44.75
Stock Level				4.04		14.70	18.01	0.10	5.00	0.10
6.31	2.01		0.10	20.00	0.10				Payment	43.10
Order Status				4.04		14.70	3.01	0.10	5.00	0.10
12.56	2.01		0.10	5.00	0.10				Delivery	4.05
				1.3		6.16	2.01	0.10	5.00	0.10
				1.3 tt		6.16	2.01	0.10	20.00	0.10
					Txn Think					
Key	RT	RT	Menu		Weight Time					
Time	Delay	Fence	Delay		Weight Time					
15.66		18.01		New Order	44.83					
		0.10	5.00	0.10						
				Payment	43.05					
15.66	3.01		0.10	5.00	0.10					
Delivery				4.04						
6.56	2.01		0.10	5.00	0.10					
Stock Level				4.04						
6.56	2.01		0.10	20.00	0.10					
Order Status				4.04						
13.06	2.01		0.10	5.00	0.10					
				1.12		6.46	2.01	0.10	5.00	0.10
				1.12 tt		6.46	2.01	0.10	20.00	0.10
					Txn Think					
Key	RT	RT	Menu		Weight Time					
Time	Delay	Fence	Delay		Weight Time					
13.49		18.01		New Order	44.75					
		0.10	5.00	0.10						
				Payment	43.10					
13.49	3.01		0.10	5.00	0.10					
Delivery				4.05						
5.65	2.01		0.10	5.00	0.10					
Stock Level				4.05						
5.65	2.01		0.10	20.00	0.10					
Order Status				4.05						
11.25	2.01		0.10	5.00	0.10					
				1.18		5.25	2.01	0.10	5.00	0.10
				1.18 tt		5.25	2.01	0.10	20.00	0.10
					Txn Think					
Key	RT	RT	Menu		Weight Time					
Time	Delay	Fence	Delay		Weight Time					
14.21		18.01		New Order	44.75					
		0.10	5.00	0.10						
				Payment	43.10					
14.21	3.01		0.10	5.00	0.10					
Delivery				4.05						
5.95	2.01		0.10	5.00	0.10					
Stock Level				4.05						
5.95	2.01		0.10	20.00	0.10					
Order Status				4.05						
11.85	2.01		0.10	5.00	0.10					
				1.22		5.20	2.01	0.10	5.00	0.10
				1.22 tt		5.20	2.01	0.10	20.00	0.10
					Txn Think					
Key	RT	RT	Menu		Weight Time					
Time	Delay	Fence	Delay		Weight Time					
12.11		18.01		New Order	44.96					
		0.10	5.00	0.10						
				Payment	43.00					
12.11	3.01		0.10	5.00	0.10					
Delivery				4.00						
5.07	2.01		0.10	5.00	0.10					
Stock Level				4.03						
5.07	2.01		0.10	20.00	0.10					
Order Status				4.01						
10.10	2.01		0.10	5.00	0.10					
				1.001 best						
				1.001 tt best						
Key	RT	RT	Menu		Weight Time					
Time	Delay	Fence	Delay		Weight Time					
12.06		18.01		New Order	44.96					
		0.10	5.00	0.10						
				Payment	43.05					
12.06	3.01		0.10	5.00	0.10					
Delivery				4.04						
5.20	2.01		0.10	5.00	0.10					
Stock Level				4.04						
5.20	2.01		0.10	20.00	0.10					

			Payment	43.00
12.06		3.01	0.10	5.00 0.10
			Delivery	4.00
5.06		2.01	0.10	5.00 0.10
			Stock Level	4.03
5.06		2.01	0.10	20.00 0.10
			Order Status	4.01
10.06		2.01	0.10	5.00 0.10
				1.03 better
				1.03 tt more aggressive
				Txn Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.91
12.41		18.01	0.10	5.00 0.10
			Payment	43.03
12.41		3.01	0.10	5.00 0.10
			Delivery	4.02
5.20		2.01	0.10	5.00 0.10
			Stock Level	4.02
5.20		2.01	0.10	20.00 0.10
			Order Status	4.02
10.35		2.01	0.10	5.00 0.10
				1.005 better
				1.005 tt more aggressive
				Txn Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.91
12.11		18.01	0.10	5.00 0.10
			Payment	43.03
12.11		3.01	0.10	5.00 0.10
			Delivery	4.02
5.07		2.01	0.10	5.00 0.10
			Stock Level	4.02
5.07		2.01	0.10	20.00 0.10
			Order Status	4.02
10.10		2.01	0.10	5.00 0.10
				1.02 better
				1.02 tt more aggressive
				Txn Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.91
12.29		18.01	0.10	5.00 0.10
			Payment	43.03
12.29		3.01	0.10	5.00 0.10
			Delivery	4.02
5.15		2.01	0.10	5.00 0.10
			Stock Level	4.02
5.15		2.01	0.10	20.00 0.10
			Order Status	4.02
10.25		2.01	0.10	5.00 0.10
				1.01 best
				1.01 tt best

Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.96		
12.17	18.01		0.10		5.00	0.10	
			Payment		43.00		
12.17	3.01		0.10		5.00	0.10	
			Delivery		4.00		
5.10	2.01		0.10		5.00	0.10	
			Stock Level		4.03		
5.10	2.01		0.10		20.00	0.10	
			Order Status		4.01		
10.15	2.01		0.10		5.00	0.10	
			1.02 best				
			1.02 tt best				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.96		
12.29	18.01		0.10		5.00	0.10	
			Payment		43.00		
12.29	3.01		0.10		5.00	0.10	
			Delivery		4.00		
5.15	2.01		0.10		5.00	0.10	
			Stock Level		4.03		
5.15	2.01		0.10		20.00	0.10	
			Order Status		4.01		
10.25	2.01		0.10		5.00	0.10	
			1.03 best				
			1.03 tt best				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.96		
12.41	18.01		0.10		5.00	0.10	
			Payment		43.01		
12.41	3.01		0.10		5.00	0.10	
			Delivery		4.01		
5.20	2.01		0.10		5.00	0.10	
			Stock Level		4.01		
5.20	2.01		0.10		20.00	0.10	
			Order Status		4.01		
10.35	2.01		0.10		5.00	0.10	
			5.5				
			5.5 tt				
Key	RT	RT	Menu			Txn	Think
			Delay	Fence	Delay	Weight	Time
Time	Delay	Fence	New Order		44.83		
66.28	18.01		0.10		5.00	0.10	
			Payment		43.05		
66.28	3.01		0.10		5.00	0.10	
			Delivery		4.04		
27.77	2.01		0.10		5.00	0.10	
			Stock Level		4.04		
27.77	2.01		0.10		20.00	0.10	

		Order Status		4.04	
55.27	2.01	0.10	5.00	0.10	
6.0 6.0 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
72.30	18.01	New Order	0.10	44.83	0.10
		Payment	0.10	43.05	
72.30	3.01	Delivery	0.10	4.04	0.10
30.30	2.01	Stock Level	0.10	4.04	0.10
30.30	2.01	Order Status	0.10	4.04	0.10
60.30	2.01		0.10	5.00	0.10
6.5 6.5 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
79.53	18.01	New Order	0.10	44.83	0.10
		Payment	0.10	43.05	
79.53	3.01	Delivery	0.10	4.04	0.10
33.33	2.01	Stock Level	0.10	4.04	0.10
33.33	2.01	Order Status	0.10	4.04	0.10
66.33	2.01		0.10	5.00	0.10
7.0 7.0 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
84.35	18.01	New Order	0.10	44.83	0.10
		Payment	0.10	43.05	
84.35	3.01	Delivery	0.10	4.04	0.10
35.35	2.01	Stock Level	0.10	4.04	0.10
35.35	2.01	Order Status	0.10	4.04	0.10
70.35	2.01		0.10	5.00	0.10
7.5 7.5 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
90.38	18.01	New Order	0.10	44.83	0.10

			Payment	43.05
			0.10	5.00 0.10
90.38	3.01	Delivery	4.04	
		0.10	5.00	0.10
37.88	2.01	Stock Level	4.04	
		0.10	20.00	0.10
37.88	2.01	Order Status	4.04	
		0.10	5.00	0.10
75.38	2.01		8.0	
		8.0 tt		
			Txn	Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.83
96.40	18.01	0.10	5.00	0.10
			Payment	43.05
96.40	3.01	0.10	5.00	0.10
			Delivery	4.04
40.40	2.01	0.10	5.00	0.10
			Stock Level	4.04
40.40	2.01	0.10	20.00	0.10
			Order Status	4.04
80.40	2.01	0.10	5.00	0.10
			8.5	
		8.5 tt		
			Txn	Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.83
102.43	18.01	0.10	5.00	0.10
			Payment	43.05
192.43	3.01	0.10	5.00	0.10
			Delivery	4.04
42.92	2.01	0.10	5.00	0.10
			Stock Level	4.04
42.92	2.01	0.10	20.00	0.10
			Order Status	4.04
85.42	2.01	0.10	5.00	0.10
			9.0	
		9.0 tt		
			Txn	Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.83
108.45	18.01	0.10	5.00	0.10
			Payment	43.05
108.45	3.01	0.10	5.00	0.10
			Delivery	4.04
45.45	2.01	0.10	5.00	0.10
			Stock Level	4.04
45.45	2.01	0.10	20.00	0.10
			Order Status	4.04
90.45	2.01	0.10	5.00	0.10
			9.5	
		9.5 tt		
			Txn	Think
Key	RT	RT	Menu	
Time	Delay	Fence	Delay	Weight Time
			New Order	44.83
12.02	18.01	0.10	5.00	0.10
			Payment	43.02
12.02	3.01	0.10	5.00	0.10
			Delivery	4.01
5.02	2.01	0.10	5.00	0.10
			Stock Level	4.02
5.02	2.01	0.10	20.00	0.10
			Order Status	4.02
10.02	2.01	0.10	5.00	0.10

				Txn	Think
Key	RT	RT	Menu		
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
114.47	18.01	0.10	5.00	0.10	
			Payment	43.05	
114.47	3.01	0.10	5.00	0.10	
			Delivery	4.04	
47.98	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
47.98	2.01	0.10	20.00	0.10	
			Order Status	4.04	
95.47	2.01	0.10	5.00	0.10	
				10	
		10 tt			
			Txn	Think	
Key	RT	RT	Menu		
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
120.50	18.01	0.10	5.00	0.10	
			Payment	43.05	
120.50	3.01	0.10	5.00	0.10	
			Delivery	4.04	
50.50	2.01	0.10	5.00	0.10	
			Stock Level	4.04	
50.50	2.01	0.10	20.00	0.10	
			Order Status	4.04	
100.50	2.01	0.10	5.00	0.10	
				1.02 better	
				1.02 more aggressive	
			Txn	Think	
Key	RT	RT	Menu		
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.91	
12.06	18.01	0.10	5.00	0.10	
			Payment	43.03	
12.06	3.01	0.10	5.00	0.10	
			Delivery	4.02	
5.06	2.01	0.10	5.00	0.10	
			Stock Level	4.02	
5.06	2.01	0.10	20.00	0.10	
			Order Status	4.02	
10.06	2.01	0.10	5.00	0.10	
				1.0 tt better	
				1.0 tt more aggressive	
			Txn	Think	
Key	RT	RT	Menu		
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.93	
12.02	18.01	0.10	5.00	0.10	
			Payment	43.02	
12.02	3.01	0.10	5.00	0.10	
			Delivery	4.01	
5.02	2.01	0.10	5.00	0.10	
			Stock Level	4.02	
5.02	2.01	0.10	20.00	0.10	
			Order Status	4.02	
10.02	2.01	0.10	5.00	0.10	

Order Status 4.02
0.10 5.00 0.10
1.005 better
1.005 more aggressive

Txn Think
Key RT RT Menu
Time Delay Fence Delay Weight Time

New Order 44.91
0.10 5.00 0.10
Payment 43.03
0.10 5.00 0.10

Delivery 4.02
0.10 5.00 0.10
Stock Level 4.02
0.10 20.00 0.10

Order Status 4.02
0.10 5.00 0.10
1.001 better
1.001 more aggressive

Txn Think
Key RT RT Menu
Time Delay Fence Delay Weight Time

New Order 44.91
0.10 5.00 0.10
Payment 43.03
0.10 5.00 0.10

Delivery 4.02
0.10 5.00 0.10
Stock Level 4.02
0.10 20.00 0.10

Order Status 4.02
0.10 5.00 0.10
1.0 tt better
1.0 tt more aggressive

Txn Think
Key RT RT Menu
Time Delay Fence Delay Weight Time

New Order 44.93
0.10 5.00 0.10
Payment 43.02
0.10 5.00 0.10

Delivery 4.01
0.10 5.00 0.10
Stock Level 4.02
0.10 20.00 0.10

Order Status 4.02
0.10 5.00 0.10

Internet Information

Server Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]
[ HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]
"ListenBackLog"=dword:00002710
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,0
0,56,00,43,00,00,00,00
"PoolThreadLimit"=dword:00000258
"ThreadTimeout"=dword:00015180
"MaxConnections"=dword:00002af8

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance]
"Library"="infoctrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:00000842
"Last Help"=dword:00000843
"First Counter"=dword:00000802
"First Help"=dword:00000803
"Library Validation
Code"=hex:78,d4,04,90,33,e8,bf,01,10,25,00,00,00,00,0
0,00
"WbemAdapFileTime"=hex:00,33,eb,ce,35,f3,bf,01
"WbemAdapFileSize"=dword:00002510
"WbemAdapStatus"=dword:00000000
```

World Wide Web Service Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC]
>Type"=dword:00000020
"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,0
0,4e,00,54,00,5c,00,53,00,\

79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00
,6e,00,65,00,74,00,73,\
```

```
00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6
,00,66,00,6f,00,2e,00,\

65,00,78,00,65,00,00,00
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,0
0,4d,00,49,00,4e,00,00,00,\

00,00
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and
administration through the Internet Information
Services snap-in."
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP]
"NOTE"="This is for backward compatibility only."
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\ASP\Parameters]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\\WINNT\\System32\\inetsrv"
"CertMapList"="C:\\WINNT\\System32\\inetsrv\\iiscrmap
.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\\WINNT\\System32\\LogFiles"
"AcceptExOutstanding"=dword:00000028
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Script Map]
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\Virtual Roots]
"/"="c:\\inetpub\\wwwroot,,207"
"/Scripts"="c:\\inetpub\\scripts,,204"
"/IISHelp"="c:\\winnt\\help\\iishelp,,201"
"/IISAdmin"="C:\\WINNT\\System32\\inetsrv\\iisadmin,,201"
"/IISSamples"="c:\\inetpub\\iissamples,,201"
"/MSADC"="c:\\program files\\common
files\\system\\msadc,,205"
"/Printers"="C:\\WINNT\\web\\printers,,201"
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance]
"Library"="w3ctrsl.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
```

```
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation
Code"=hex:8c,fa,76,93,33,e8,bf,01,10,3d,00,00,00,00,0
0,00
"WbemAdapFileTime"=hex:00,4e,d8,65,ab,1e,c1,01
"WbemAdapFileSize"=dword:00001d10
"WbemAdapStatus"=dword:00000000

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security]
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14
,00,00,00,30,00,00,00,02,\

00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,00,01,00,00,\

00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00
,01,01,00,00,00,00,00,\

05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01
,02,00,00,00,00,05,\

20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01
,02,00,01,01,00,00,00,\

00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02
,00,01,02,00,00,00,00,\

00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00
,00,00,00,05,12,00,00,\

00,01,01,00,00,00,00,05,12,00,00,00

[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Enum]
"0"="Root\\LEGACY_W3SVC\\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001
```

Server Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Session Manager\I/O System]
"LargeIrpStackLocations"=dword:00000007
"CountOperations"=dword:00000000
```

TPCC Application

Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="c:\\inetpub\\wwwroot\\"
"NumberOfDeliveryThreads"=dword:00000008
"MaxConnections"=dword:00002710
"MaxPendingDeliveries"=dword:0000003e8
"DB_Protocol"="dblib"
"TxnMonitor"="COM"
"DbServer"="quark"
"DbName"="tpcc"
"DbUser"="sa"
"DbPassword"=""
"COM_SinglePool"="YES"
```

Server Bus Performance Driver Registry Parameters

```
Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb
Class Name: <NO CLASS>
Last Write Time: 11/2/2002 - 1:50 PM
Value 0
  Name: Type
  Type: REG_DWORD
  Data: 0x1

Value 1
  Name: Start
  Type: REG_DWORD
  Data: 0

Value 2
  Name: ErrorControl
  Type: REG_DWORD
  Data: 0x1

Value 3
  Name: Tag
  Type: REG_DWORD
  Data: 0x102

Value 4
  Name: ImagePath
  Type: REG_EXPAND_SZ
  Data: system32\DRIVERS\hpqcissb.sys
```

<p>Value 5 Name: DisplayName Type: REG_SZ Data: Smart Array Controllers Non-Miniport Bus Driver</p> <p>Value 6 Name: Group Type: REG_SZ Data: port</p> <p>Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Enum Class Name: <NO CLASS> Last Write Time: 11/2/2002 - 1:50 PM Value 0 Name: 0 Type: REG_SZ Data: PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&1070020&0&0&08</p> <p>Value 1 Name: Count Type: REG_DWORD Data: 0x5</p> <p>Value 2 Name: NextInstance Type: REG_DWORD Data: 0x5</p> <p>Value 3 Name: 1 Type: REG_SZ Data: PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&1070020&0&0&10</p> <p>Value 4 Name: 2 Type: REG_SZ Data: PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&29e81982&0&08</p> <p>Value 5 Name: 3 Type: REG_SZ Data: PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&29e81982&0&10</p> <p>Value 6 Name: 4 Type: REG_SZ Data: PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_02\3&172e68dd&0&10</p>	<p>00 00 00 05 12 00 00 00 - Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters Class Name: <NO CLASS> Last Write Time: 11/2/2002 - 10:48 AM Value 0 Name: CompletionMode Type: REG_DWORD Data: 0x2</p> <p>Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller0 Class Name: <NO CLASS> Last Write Time: 11/2/2002 - 4:20 PM Value 0 Name: CompletionMode Type: REG_DWORD Data: 0x1</p> <p>Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security Class Name: <NO CLASS> Last Write Time: 11/2/2002 - 4:02 PM Value 0 Name: Security Type: REG_BINARY Data: 00000000 01 00 14 80 90 00 00 00 - 9c 00 00 00 14 00 00 00 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 \$..... 00000030 02 00 60 00 04 00 00 00 - 00 00 14 00 fd 01 02 00 ..`.....\$... 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 \$..... 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 0b 00 00 00 - 00 00 18 00 fd 01 02 00\$... 00000080 01 02 00 00 00 00 00 05 - 20 00 00 00 23 02 00 00#... 00000090 01 01 00 00 00 00 00 05 - 12 00 00 00 01 01 00 00</p>
--	--

Server Disk Device

Performance Driver Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd
Class Name: <NO CLASS>
Last Write Time: 11/2/2002 - 1:50 PM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x1

Value 1
Name: Start
Type: REG_DWORD
Data: 0

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpqcissd.sys

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-Miniport Disk Driver

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Security
Class Name: <NO CLASS>
Last Write Time: 11/2/2002 - 4:09 PM
Value 0
Name: Security
Type: REG_BINARY
Data:
00000000 01 00 14 80 90 00 00 00 - 9c 00 00 00 14
00 00 00

<p>00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02 80 14 00 0..... 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00 00 00 00 \$..... 00000030 02 00 60 00 04 00 00 00 - 00 00 14 00 fd 01 02 00 ..`.....\$... 00000040 01 01 00 00 00 00 05 - 12 00 00 00 00 00 18 00 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20 00 00 00 \$..... 00000060 20 02 00 00 00 14 00 - 8d 01 02 00 01 01 00 00 00000070 00 00 00 05 0b 00 00 00 - 00 00 18 00 fd 01 02 00 ..`.....\$... 00000080 01 02 00 00 00 00 05 - 20 00 00 00 23 02 00 00#. ... 00000090 01 01 00 00 00 00 05 - 12 00 00 00 01 01 00 00 00 00 00 05 12 00 00 00 - Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Enum Class Name: <NO CLASS> Last Write Time: 11/2/2002 - 1:50 PM Value 0 Name: 0 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&33332ab 6&0&00000400000000 Value 1 Name: Count Type: REG_DWORD Data: 0xc Value 2 Name: NextInstance Type: REG_DWORD Data: 0xc Value 3 Name: 1 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636 0&0&00000400000000 Value 4 Name: 2 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636 0&0&01000400000000 Value 5 Name: 3 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&02000400000000 Value 6 Name: 4 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&01000400000000 Value 7 Name: 5 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&38eb484 0&0&01000400000000 Value 8 Name: 6 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&00000400000000 Value 9 Name: 7 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&01000400000000 Value 10 Name: 8 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&02000400000000 Value 11 Name: 9 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&00000400000000 Value 12 Name: 10 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&01000400000000 Value 13 Name: 11 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&02000400000000 </p>	<p>Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&16a1636 0&0&02000400000000 Value 6 Name: 4 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&38eb484 0&0&01000400000000 Value 7 Name: 5 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&38eb484 0&0&01000400000000 Value 8 Name: 6 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&00000400000000 Value 9 Name: 7 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&01000400000000 Value 10 Name: 8 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&1c5980e a&0&02000400000000 Value 11 Name: 9 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&00000400000000 Value 12 Name: 10 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&01000400000000 Value 13 Name: 11 Type: REG_SZ Data: HPQCIS\Disk&VEN_COMPAQ&PROD_LOGICAL_VOLUME\4&2e12b67 0&0&02000400000000 </p>
---	---

System Summary

System Information report written at: 11/15/02

10:50:54
System Name: QUARK
[System Summary]

Item Value
OS Name Microsoft® Windows® .NET Enterprise Server

Version 5.2.3663 Build 3663
OS Manufacturer Microsoft Corporation
Activation Status Activation Pending (53 days remaining)
System Name QUARK
System Manufacturer Compaq
System Model ProLiant DL580 G2
System Type X86-based PC
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
Processor x86 Family 15 Model 2 Stepping 2
GenuineIntel ~1999 Mhz
BIOS Version/Date Compaq P27, 10/11/2000
SMBIOS Version 2.3
Windows Directory C:\WINDOWS
System Directory C:\WINDOWS\system32
Boot Device \Device\HarddiskVolume15
Locale United States
Hardware Abstraction Layer Version = "5.2.3663.0
(main.020715-1506)"
User Name QUARK\Administrator
Time Zone Central Standard Time
Total Physical Memory 32,768.00 MB
Available Physical Memory 31.31 GB
Total Virtual Memory 65.15 GB
Available Virtual Memory 64.61 GB
Page File Space 33.40 GB
Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]
Resource Device
I/O Port 0x00000000-0x00000CF

I/O Port 0x00000000-0x00000CFF	PCI bus	0x000003C0-0x000003DF	RAGE XL PCI (Microsoft Corporation)	RAGE XL PCI (Microsoft Corporation)
I/O Port 0x00000000-0x00000CFF	Direct memory access controller	0x000001800-0x000018FF	Base System Device	OK
I/O Port 0x000003C0-0x000003DF	PCI bus	0x00002400-0x000024FF	Base System Device	OK
(Microsoft Corporation)	RAGE XL PCI	0x00002800-0x000028FF	RAGE XL PCI (Microsoft Corporation)	(Microsoft Corporation)
Memory Address 0xF7E00000-0xF7FFFFFF	PCI bus	0x0000A79-0x0000A79	ISAPNP Read Data Port	OK
Memory Address 0xF7E00000-0xF7FFFFFF	Smart Array 5300 Controller (Non-Miniport)	0x00000279-0x00000279	ISAPNP Read Data Port	OK
IRQ 10 Base System Device		0x00000274-0x00000277	ISAPNP Read Data Port	
IRQ 10 Compaq PCI Hotplug Controller		0x00000F50-0x00000F58	Motherboard resources	
I/O Port 0x00006000-0x000064FF	PCI bus	0x0000020-0x0000021	Programmable interrupt	
I/O Port 0x00006000-0x000064FF	QLogic QLA23xx PCI Fibre Channel Adapter	controller	OK	
I/O Port 0x00003000-0x000030FF	PCI bus	0x00000A0-0x00000A1	Programmable interrupt	
I/O Port 0x00003000-0x000030FF	Compaq Smart Array 5i Controller	controller	OK	
I/O Port 0x00005000-0x000054FF	PCI bus	0x00000C00-0x00000C01	Programmable interrupt	
I/O Port 0x00005000-0x000054FF	Smart Array 5300 Controller (Non-Miniport)	controller	OK	
Memory Address 0xA0000-0xBFFF	PCI bus	0x0000040-0x0000043	System timer	OK
Memory Address 0xA0000-0xBFFF	RAGE XL PCI (Microsoft Corporation)	0x00000080-0x0000008F	Direct memory access	
(Microsoft Corporation)		controller	OK	
I/O Port 0x000003B0-0x000003BB	PCI bus	0x00000C0-0x00000DF	Direct memory access	
I/O Port 0x000003B0-0x000003BB	RAGE XL PCI (Microsoft Corporation)	controller	OK	
I/O Port 0x00004000-0x000044FF	PCI bus	0x0000040B-0x0000040B	Direct memory access	
I/O Port 0x00004000-0x000044FF	Smart Array 5300 Controller (Non-Miniport)	controller	OK	
5300 Controller (Non-Miniport)		0x000004D6-0x000004D6	Direct memory access	
[DMA]		controller	OK	
Resource Device Status		0x0000061-0x0000061	System speaker	OK
Channel 7 Direct memory access controller	OK	0x0000060-0x0000060	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
Channel 2 Standard floppy disk controller	OK	0x0000064-0x0000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	OK
I/O Port 0x000002E-0x000002F		0x0000002E-0x0000002F	Extended IO Bus	OK
[Forced Hardware]		0x00000220-0x00000223	Extended IO Bus	OK
Device PNP Device ID		0x00000230-0x00000233	Extended IO Bus	OK
[I/O]		0x00000240-0x0000025F	Extended IO Bus	OK
Resource Device Status		0x00000260-0x00000267	Extended IO Bus	OK
0x00000000-0x00000CFF	PCI bus OK	0x000003F8-0x000003FF (COM1) OK	Communications Port	
0x00000000-0x00000CFF	PCI bus OK	0x000003F2-0x000003F5 controller	Standard floppy disk	
0x00000000-0x00000CFF	Direct memory access controller	OK		
0x000003B0-0x000003BB	PCI bus OK	0x000003F7-0x000003F7 controller	Standard floppy disk	
0x000003B0-0x000003BB	RAGE XL PCI (Microsoft Corporation) OK	0x00002000-0x0000200F PCI IDE Controller	Standard Dual Channel	
0x000003C0-0x000003DF	PCI bus OK	0x000001F0-0x000001F7	Primary IDE Channel	OK
		0x000003F6-0x000003F6	Primary IDE Channel	OK
		0x00000170-0x00000177	Secondary IDE Channel	

0x000000376-0x00000376	Secondary IDE Channel	
OK		
0x00003000-0x000030FF	PCI bus OK	
0x00003000-0x000030FF	Compaq Smart Array 5i	
Controller OK		
0x00004000-0x000044FF	PCI bus OK	
0x00004000-0x000044FF	Smart Array 5300	
Controller (Non-Miniport)	OK	
0x00004400-0x000044FF	Smart Array 5300	
Controller (Non-Miniport)	OK	
0x00005000-0x000054FF	PCI bus OK	
0x00005000-0x000054FF	Smart Array 5300	
Controller (Non-Miniport)	OK	
0x00005400-0x000054FF	Smart Array 5300	
Controller (Non-Miniport)	OK	
0x00006000-0x000064FF	PCI bus OK	
0x00006000-0x000064FF	QLogic QLA23xx PCI	
Fibre Channel Adapter	OK	
0x00006400-0x000064FF	Smart Array 5300	
Controller (Non-Miniport)	OK	
[IRQs]		
Resource Device Status		
IRQ 9 Microsoft ACPI-Compliant System	OK	
IRQ 3 Base System Device OK		
IRQ 10 Base System Device OK		
IRQ 10 Compaq PCI Hotplug Controller OK		
IRQ 0 System timer OK		
IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK		
IRQ 12 PS/2 Compatible Mouse OK		
IRQ 4 Communications Port (COM1) OK		
IRQ 6 Standard floppy disk controller OK		
IRQ 14 Primary IDE Channel OK		
IRQ 7 ServerWorks (RCC) PCI to USB Open Host Controller OK		
IRQ 31 Compaq Smart Array 5i Controller OK		
IRQ 18 Smart Array 5300 Controller (Non-Miniport) OK		
IRQ 16 Smart Array 5300 Controller (Non-Miniport) OK		
IRQ 11 Compaq PCI Hotplug Controller OK		
IRQ 22 Smart Array 5300 Controller (Non-Miniport) OK		
IRQ 20 Smart Array 5300 Controller (Non-Miniport) OK		
IRQ 26 QLogic QLA23xx PCI Fibre Channel Adapter OK		
IRQ 24 Smart Array 5300 Controller (Non-Miniport) OK		
[Memory]		
Resource Device Status		
0xA0000-0xBFFFF PCI bus OK		
0xA0000-0xBFFFF RAGE XL PCI (Microsoft Corporation) OK		
0xF5F00000-0xF71FFFF PCI bus OK		

0xF71F0000-0xF71F01FF	Base System Device OK	
0xF71E0000-0xF71E07FF	Base System Device OK	
0xF71D0000-0xF71D1FFF	Base System Device OK	
0xF7100000-0xF717FFFF	Base System Device OK	
0xF6000000-0xF6FFFFFF	RAGE XL PCI (Microsoft Corporation) OK	
0xF5F00000-0xF5F0FFF	RAGE XL PCI (Microsoft Corporation) OK	
0xF5FE0000-0xF5FE0FFF	ServerWorks (RCC) PCI to USB Open Host Controller OK	
0xF7200000-0xF73FFFFFF	PCI bus OK	
0xF73C0000-0xF73FFFFFF	Compaq Smart Array 5i Controller OK	
0xF72F0000-0xF72F3FFF	Compaq Smart Array 5i Controller OK	
0xF7400000-0xF78FFFFFF	PCI bus OK	
0xF78C0000-0xF78FFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7700000-0xF77FFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF76C0000-0xF76FFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7500000-0xF75FFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF74F0000-0xF74F0FFF	Compaq PCI Hotplug Controller OK	
0xF7900000-0xF7DFFFFF	PCI bus OK	
0xF7DC0000-0xF7DFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7C00000-0xF7CFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7BC0000-0xF7BFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7A00000-0xF7AFFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7A00000-0xF7AFFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF79F0000-0xF79F0FFF	Compaq PCI Hotplug Controller OK	
0xF7E00000-0xF7EFFFFFF	PCI bus OK	
0xF7E00000-0xF7EFFFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
0xF7FF0000-0xF7FFF0FFF	QLogic QLA23xx PCI Fibre Channel Adapter OK	
0xF7F80000-0xF7FBFFFF	Smart Array 5300 Controller (Non-Miniport) OK	
[Components]		
[Multimedia]		
[Audio Codecs]		
CODEC Manufacturer Description		
CODEC Status File Version Size		
CODEC Creation Date		
c:\windows\system32\msyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\MSYUV.DLL 5.2.3663.0 (main.020715-1506) 16.50 KB (16,896 bytes)		
11/16/2002 8:47 AM		
c:\windows\system32\msh263.drv Microsoft Corporation OK		
C:\WINDOWS\system32\MSH263.DRV 4.4.4000 280.00 KB (286,720 bytes)		
11/16/2002 8:46 AM		
[Video Codecs]		
CODEC Manufacturer Description		
CODEC Status File Version Size		
CODEC Creation Date		
c:\windows\system32\msg711.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSG711.ACML 5.2.3663.0 (main.020715-1506) 10.00 KB		
(10,240 bytes) 11/18/2002 7:00 AM		
[Video Codecs]		
CODEC Manufacturer Description		
CODEC Status File Version Size		
CODEC Creation Date		
c:\windows\system32\msyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\MSYUV.DLL 5.2.3663.0 (main.020715-1506) 16.50 KB (16,896 bytes)		
11/16/2002 8:47 AM		
c:\windows\system32\msh263.drv Microsoft Corporation OK		
C:\WINDOWS\system32\MSH263.DRV 4.4.4000 280.00 KB (286,720 bytes)		
11/16/2002 8:46 AM		

c:\windows\system32\msaud32.acm Microsoft Corporation Windows Media Audio Codec OK		
C:\WINDOWS\system32\MSAUD32.ACM 8.00.00.4477 288.00 KB (294,912 bytes)		
bytes) 11/18/2002 7:00 AM		
c:\windows\system32\l3codeca.acm Fraunhofer Institut Integrierte Schaltungen IIS Fraunhofer		
IIS MPEG Layer-3 Codec OK		
C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816 bytes)		
11/18/2002 7:00 AM		
c:\windows\system32\s1_anet.acm Sipro Lab Telecom Inc. Sipro Lab Telecom Audio Codec OK		
C:\WINDOWS\system32\S1_ANET.ACM 3.02 84.00 KB (86,016 bytes)		
11/18/2002 7:00 AM		
c:\windows\system32\msg723.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSG723.ACML 4.4.4000 116.00 KB (118,784 bytes)		
4.4.4000 116.00 KB (118,784 bytes)		
11/11/2002 3:03 PM		
c:\windows\system32\imaadp32.acm Microsoft Corporation OK		
C:\WINDOWS\system32\IMAADP32.ACML 5.2.3663.0 (main.020715-1506) 15.50 KB		
(15,872 bytes) 11/18/2002 7:00 AM		
c:\windows\system32\msadp32.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSADP32.ACML 5.2.3663.0 (main.020715-1506) 14.50 KB		
(14,848 bytes) 11/18/2002 7:00 AM		
c:\windows\system32\msgsm32.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSGSM32.ACML 5.2.3663.0 (main.020715-1506) 20.00 KB		
(20,480 bytes) 11/18/2002 7:00 AM		
c:\windows\system32\tssoft32.acm DSP GROUP, INC. OK		
C:\WINDOWS\system32\TSSOFT32.ACML 1.01 9.50 KB (9,728 bytes)		
11/18/2002 7:00 AM		
c:\windows\system32\msg711.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSG711.ACML 5.2.3663.0 (main.020715-1506) 10.00 KB		
(10,240 bytes) 11/18/2002 7:00 AM		
[Video Codecs]		
CODEC Manufacturer Description		
CODEC Status File Version Size		
CODEC Creation Date		
c:\windows\system32\msyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\MSYUV.DLL 5.2.3663.0 (main.020715-1506) 16.50 KB (16,896 bytes)		
11/16/2002 8:47 AM		
c:\windows\system32\msh263.drv Microsoft Corporation OK		
C:\WINDOWS\system32\MSH263.DRV 4.4.4000 280.00 KB (286,720 bytes)		
11/16/2002 8:46 AM		

```

c:\windows\system32\msvidc32.dll      Microsoft
Corporation   OK
    C:\WINDOWS\system32\MSVIDC32.DLL
        5.2.3663.0 (main.020715-1506) 26.50 KB
(27,136 bytes) 11/18/2002 7:00 AM
c:\windows\system32\msh261.drv      Microsoft
Corporation   OK
    C:\WINDOWS\system32\MSH261.DRV
        4.4.4000 180.00 KB (184,320 bytes)
11/11/2002 3:03 PM
c:\windows\system32\tsbyuv.dll      Microsoft
Corporation   OK
    C:\WINDOWS\system32\TSBYUV.DLL
        5.2.3663.0 (main.020715-1506) 8.00 KB
(8,192 bytes) 11/16/2002 8:48 AM
c:\windows\system32\msrle32.dll      Microsoft
Corporation   OK
    C:\WINDOWS\system32\MSRLE32.DLL
        5.2.3663.0 (main.020715-1506) 10.50 KB
(10,752 bytes) 11/18/2002 7:00 AM
c:\windows\system32\iccvid.dll      Radius Inc.
    OK
    C:\WINDOWS\system32\ICCVID.DLL
        1.10.0.6 108.00 KB (110,592 bytes)
11/18/2002 7:00 AM
c:\windows\system32\ir32_32.dll      Not Available
    OK
    C:\WINDOWS\system32\IR32_32.DLL
Available 194.50 KB (199,168 bytes) 11/18/2002
7:00 AM
c:\windows\system32\iyuv_32.dll      Microsoft
Corporation   OK
    C:\WINDOWS\system32\IYUV_32.DLL
        5.2.3663.0 (main.020715-1506) 45.00 KB
(46,080 bytes) 11/16/2002 8:47 AM

[CD-ROM]

Item      Value
Drive     D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name      COMPAQ CRN-8245B
Manufacturer (Standard CD-ROM drives)
Status    OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMCOMPAQ_CRN-
8245B_____2.18____\5&FB0C83D&0&0.0
.0
Driver    c:\windows\system32\drivers\cdrom.sys
(5.2.3663.0 (main.020715-1506), 47.75 KB (48,896
bytes), 11/18/2002 7:00 AM)

[Sound Device]

Item      Value
[Display]

Item      Value
Name      RAGE XL PCI (Microsoft Corporation)

```

```

PNP Device ID          PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
7\3&267A616A&0&18
Adapter Type          ATI RAGE XL PCI (B41), ATI
Technologies Inc. compatible
Adapter Description RAGE XL PCI (Microsoft
Corporation)
Adapter RAM           8.00 MB (8,388,608 bytes)
Installed Drivers     ati2drad.dll
Driver Version        5.10.2600.6009
INF File             ati2mpad.inf (ati2mpad section)
Color Planes          1
Color Table Entries  65536
Resolution            1024 x 768 x 60 hertz
Bits/Pixel            16
Memory Address        0xF6000000-0xF6FFFFFF
I/O Port              0x00002800-0x000028FF
Memory Address        0xF5FF0000-0xF5FF0FFF
I/O Port              0x000003B0-0x000003BB
I/O Port              0x000003C0-0x000003DF
Memory Address        0xA0000-0xBFFF
Driver               c:\windows\system32\drivers\ati2mpad.sys
(5.10.2600.6009 built by: jlu, 296.13 KB (303,232
bytes), 11/11/2002 8:58 AM)

[Infrared]

Item      Value
[Input]

Item      Value
[Keyboard]

Item      Value
Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name      Enhanced (101- or 102-key)
Layout    00000409
PNP Device ID ACPI\PNP0303\4&35118DFF&0
Number of Function Keys 12
I/O Port              0x00000060-0x00000060
I/O Port              0x00000064-0x00000064
IRQ Channel          IRQ 1
Driver               c:\windows\system32\drivers\i8042prt.sys
(5.2.3663.0 (main.020715-1506), 50.50 KB (51,712
bytes), 11/18/2002 7:00 AM)

[Pointing Device]

Item      Value
Hardware Type        PS/2 Compatible Mouse
Number of Buttons    3
Status    OK
PNP Device ID        ACPI\PNP0F13\4&35118DFF&0
Power Management Supported No
Double Click Threshold 6
Handedness            Right Handed Operation
IRQ Channel          IRQ 12
Driver               c:\windows\system32\drivers\i8042prt.sys
(5.2.3663.0 (main.020715-1506), 50.50 KB (51,712
bytes), 11/18/2002 7:00 AM)

```

[Modem]	
Item	Value
[Network]	
[Adapter]	
Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	11/15/2002 9:25 AM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	11/15/2002 9:25 AM
Index	2
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\rasl2tp.sys
Name	[00000003] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPTP)
Installed Yes	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	11/15/2002 9:25 AM
Index	3
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available

DHCP Lease Obtained Not Available
 MAC Address 50:50:54:50:30:30
 Driver c:\windows\system32\drivers\raspppt.sys (5.2.3663.0 (main.020715-1506), 56.00 KB (57,344 bytes), 11/18/2002 7:00 AM)

Name [00000004] WAN Miniport (PPPOE)
 Adapter Type Wide Area Network (WAN)
 Product Type WAN Miniport (PPPOE)
 Installed Yes
 PNP Device ID ROOT\MS_PPPOEMINIPORT\0000
 Last Reset 11/15/2002 9:25 AM
 Index 4
 Service Name RasPppoe
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 33:50:6F:45:30:30
 Driver c:\windows\system32\drivers\raspppoe.sys (5.2.3663.0 (main.020715-1506), 36.88 KB (37,760 bytes), 11/18/2002 7:00 AM)

Name [00000005] Direct Parallel
 Adapter Type Not Available
 Product Type Direct Parallel
 Installed Yes
 PNP Device ID ROOT\MS_PTIMINIPORT\0000
 Last Reset 11/15/2002 9:25 AM
 Index 5
 Service Name Raspti
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Driver c:\windows\system32\drivers\raspti.sys (5.2.3663.0 (main.020715-1506), 16.38 KB (16,768 bytes), 11/18/2002 7:00 AM)

Name [00000006] WAN Miniport (IP)
 Adapter Type Not Available
 Product Type WAN Miniport (IP)
 Installed Yes
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 11/15/2002 9:25 AM
 Index 6
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

Driver c:\windows\system32\drivers\ndiswan.sys (5.2.3663.0 (main.020715-1506), 87.13 KB (89,216 bytes), 11/18/2002 7:00 AM)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{F0C471E2-A8C4-4995-A516-6BE8597489FF}] SEQPACKET 1	
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{F0C471E2-A8C4-4995-A516-6BE8597489FF}] DATAGRAM 1	
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{5BB253B1-AB4C-4C0B-8FA6-F89FA33CD1B7}] SEQPACKET 2	

Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD NetBIOS
[\Device\NetBT_Tcpip_{5BB253B1-AB4C-4C0B-8FA6-F89FA33CD1B7}] DATAGRAM 2	
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)
Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
[WinSock]	
Item	Value
File	c:\windows\system32\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\windows\system32\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3663.0 (main.020715-1506)
[Ports]	
[Serial]	
Item	Value
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes

Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLS	Yes
Supports RLS	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXmit Threshold	512
XON Character	17
XOnXmit Threshold	2048
XOnXoff InFlow Control	0
XOnXoff OutFlow Control	0
IRQ Channel	IRQ 4
I/O Port	0x000003F8-0x000003FF
Driver	c:\windows\system32\drivers\serial.sys (5.2.3663.0 (main.020715-1506), 61.63 KB (63,104 bytes), 11/18/2002 7:00 AM)
[Parallel]	
Item	Value
[Storage]	
[Drives]	
Item	Value
Drive A:	Description 3 1/2 Inch Floppy Drive
Drive C:	Description Local Fixed Disk
Compressed	No
File System	NTFS
Size	16.91 GB (18,161,414,144 bytes)
Free Space	13.46 GB (14,456,324,096 bytes)
Volume Name	
Volume Serial Number	606DCD06

Drive D:	Description CD-ROM Disc
Drive E:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive F:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive G:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive H:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive I:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive J:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available
Drive K:	Description Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available

Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive L:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive M:
 Description Local Fixed Disk
 Compressed Not Available
 File System Not Available
 Size Not Available
 Free Space Not Available
 Volume Name Not Available
 Volume Serial Number Not Available

Drive W:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 396.69 GB (425,937,866,752 bytes)
 Free Space 234.67 GB (251,970,060,288 bytes)

Volume Name backup1
 Volume Serial Number 28A5D422

Drive X:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 396.69 GB (425,937,866,752 bytes)
 Free Space 237.05 GB (254,534,316,032 bytes)

Volume Name backup2
 Volume Serial Number EC3F9716

Drive Y:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 396.69 GB (425,937,866,752 bytes)
 Free Space 237.05 GB (254,534,316,032 bytes)

Volume Name backup3
 Volume Serial Number D009FE76

Drive Z:
 Description Local Fixed Disk
 Compressed No
 File System NTFS
 Size 396.69 GB (425,937,866,752 bytes)
 Free Space 396.61 GB (425,857,253,376 bytes)

Volume Name backup4
 Volume Serial Number 2067F956

[Disks]

Item Value
 Description \\.\PHYSICALDRIVE1
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 97.65 GB (104,855,869,440 bytes)
 Total Cylinders 12,748
 Total Sectors 204,796,620
 Total Tracks 3,250,740
 Tracks/Cylinder 255
 Partition Disk #1, Partition #0
 Partition Size 97.65 GB (104,855,837,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE2
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #2, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 396.69 GB (425,946,124,800 bytes)
 Total Cylinders 51,785
 Total Sectors 831,926,025
 Total Tracks 13,205,175
 Tracks/Cylinder 255

Partition Disk #3, Partition #0
 Partition Size 396.69 GB (425,937,867,264 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE7
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available

SCSI Port Not Available

SCSI Target ID Not Available

Sectors/Track 63
 Size 97.65 GB (104,855,869,440 bytes)

Total Cylinders 12,748

Total Sectors 204,796,620

Total Tracks 3,250,740

Tracks/Cylinder 255

Partition Disk #7, Partition #0

Partition Size 97.65 GB (104,855,837,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE8

Manufacturer Not Available

Model Not Available

Bytes/Sector 512

Media Loaded Yes

Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available

SCSI Logical Unit Not Available

SCSI Port Not Available

SCSI Target ID Not Available

Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)

Total Cylinders 7,649

Total Sectors 122,881,185

Total Tracks 1,950,495

Tracks/Cylinder 255

Partition Disk #8, Partition #0

Partition Size 58.59 GB (62,906,909,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE9

Manufacturer Not Available

Model Not Available

Bytes/Sector 512

Media Loaded Yes

Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available

SCSI Logical Unit Not Available

SCSI Port Not Available

SCSI Target ID Not Available

Sectors/Track 63
 Size 396.69 GB (425,946,124,800 bytes)

Total Cylinders 51,785

Total Sectors 831,926,025
 Total Tracks 13,205,175
 Tracks/Cylinder 255
 Partition Disk #9, Partition #0
 Partition Size 396.69 GB (425,937,867,264 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE10
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 97.65 GB (104,855,869,440 bytes)
 Total Cylinders 12,748
 Total Sectors 204,796,620
 Total Tracks 3,250,740
 Tracks/Cylinder 255
 Partition Disk #10, Partition #0
 Partition Size 97.65 GB (104,855,837,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE11
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #11, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE12
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available

Sectors/Track 63
 Size 396.69 GB (425,946,124,800 bytes)
 Total Cylinders 51,785
 Total Sectors 831,926,025
 Total Tracks 13,205,175
 Tracks/Cylinder 255
 Partition Disk #12, Partition #0
 Partition Size 396.69 GB (425,937,867,264 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 237.42 GB (254,926,103,040 bytes)
 Total Cylinders 30,993
 Total Sectors 497,902,545
 Total Tracks 7,903,215
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 237.42 GB (254,926,070,784 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE4
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 97.65 GB (104,855,869,440 bytes)
 Total Cylinders 12,748
 Total Sectors 204,796,620
 Total Tracks 3,250,740
 Tracks/Cylinder 255
 Partition Disk #4, Partition #0
 Partition Size 97.65 GB (104,855,837,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE5
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available

SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 58.59 GB (62,915,166,720 bytes)
 Total Cylinders 7,649
 Total Sectors 122,881,185
 Total Tracks 1,950,495
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 58.59 GB (62,906,909,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE6
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 396.69 GB (425,946,124,800 bytes)
 Total Cylinders 51,785
 Total Sectors 831,926,025
 Total Tracks 13,205,175
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 396.69 GB (425,937,867,264 bytes)
 Partition Starting Offset 32,256 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)
 Model COMPAQ LOGICAL VOLUME SCSI Disk Device
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 2
 SCSI Bus 4
 SCSI Logical Unit 0
 SCSI Port 3
 SCSI Target ID 0
 Sectors/Track 32
 Size 16.95 GB (18,203,197,440 bytes)
 Total Cylinders 4,357
 Total Sectors 35,553,120
 Total Tracks 1,111,035
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 35.84 MB (37,584,896 bytes)
 Partition Starting Offset 16,384 bytes
 Partition Disk #14, Partition #1
 Partition Size 16.91 GB (18,161,418,240 bytes)
 Partition Starting Offset 37,601,280 bytes
 Description Disk drive
 Manufacturer (Standard disk drives)

Model	QLOGIC PSEUDO LUN SCSI Disk Device
Bytes/Sector	512
Media Loaded	No
Media Type	Fixed hard disk
Partitions	Not Available
SCSI Bus	0
SCSI Logical Unit	0
SCSI Port	2
SCSI Target ID	127
Sectors/Track	0
Size	0 bytes
Total Cylinders	0
Total Sectors	0
Total Tracks	0
Tracks/Cylinder	0
[SCSI]	
Item	Value
Name	Compaq Smart Array 5i Controller
Manufacturer	Compaq
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&13C0B0C5&0&08	
Memory Address	0xF73C0000-0xF73FFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF72F0000-0xF72F3FFF
IRQ Channel	IRQ 31
Driver	c:\windows\system32\drivers\cpqcissm.sys (5.2.3631.0 (main.020508-2335), 11.50 KB (11,776 bytes), 11/18/2002 7:00 AM)
Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&08	
Memory Address	0xF78C0000-0xF78FFFFF
Memory Address	0xF7700000-0xF77FFFFF
I/O Port	0x00004000-0x000044FF
IRQ Channel	IRQ 18
Driver	c:\windows\system32\drivers\hpqcissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 11/11/2002 3:48 PM)
Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&1070020&0&10	
Memory Address	0xF76C0000-0xF76FFFFF
Memory Address	0xF7500000-0xF75FFFFF
I/O Port	0x00004400-0x000044FF
IRQ Channel	IRQ 16
Driver	c:\windows\system32\drivers\hpqcissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 11/11/2002 3:48 PM)

Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&08	
Memory Address	0xF7DC0000-0xF7DFFFFF
Memory Address	0xF7C00000-0xF7CFFFFF
I/O Port	0x00005000-0x000054FF
IRQ Channel	IRQ 22
Driver	c:\windows\system32\drivers\hpqcissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 11/11/2002 3:48 PM)
Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&10	
Memory Address	0xF7BC0000-0xF7BFFFFF
Memory Address	0xF7A00000-0xF7AFFFFF
I/O Port	0x00005400-0x000054FF
IRQ Channel	IRQ 20
Driver	c:\windows\system32\drivers\hpqcissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 11/11/2002 3:48 PM)
Name	QLogic QLA23xx PCI Fibre Channel Adapter
Manufacturer	QLogic
Status	OK
PNP Device ID	PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_0
2\3&172B68DD&0&08	
I/O Port	0x00006000-0x000064FF
Memory Address	0x7FF00000-0x7FF0FFFF
IRQ Channel	IRQ 26
Driver	c:\windows\system32\drivers\ql2300.sys (8.2.0 Beta 3 (W2K VI), 429.70 KB (440,012 bytes), 11/11/2002 3:20 PM)
Name	Smart Array 5300 Controller (Non-Miniport)
Manufacturer	HP
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&172B68DD&0&10	
Memory Address	0xF7F80000-0xF7FBFFFF
Memory Address	0xF7E00000-0xF7FFFFFF
I/O Port	0x00006400-0x000064FF
IRQ Channel	IRQ 24
Driver	c:\windows\system32\drivers\hpqcissb.sys (5.5.50.32 built by: WinDDK, 33.25 KB (34,048 bytes), 11/11/2002 3:48 PM)
[IDE]	
Item	Value

Name	Standard Dual Channel PCI IDE Controller	
Manufacturer	(Standard IDE ATA/ATAPI controllers)	
Status	OK	
PNP Device ID	PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9	
3\3&267A616A&0&79		
I/O Port	0x00002000-0x0000200F	
Driver	c:\windows\system32\drivers\pcide.sys (5.2.3663.0 (main.020715-1506), 3.50 KB (3,584 bytes), 11/18/2002 7:00 AM)	
Name	Primary IDE Channel	
Manufacturer	(Standard IDE ATA/ATAPI controllers)	
Status	OK	
PNP Device ID	PCIIDE\IDECHANNEL\4&1024D5C6&0&0	
I/O Port	0x000001F0-0x000001F7	
I/O Port	0x000003F6-0x000003F6	
IRQ Channel	IRQ 14	
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3663.0 (main.020715-1506), 90.38 KB (92,544 bytes), 11/18/2002 7:00 AM)	
Name	Secondary IDE Channel	
Manufacturer	(Standard IDE ATA/ATAPI controllers)	
Status	OK	
PNP Device ID	PCIIDE\IDECHANNEL\4&1024D5C6&0&1	
I/O Port	0x00000170-0x00000177	
I/O Port	0x00000376-0x00000376	
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3663.0 (main.020715-1506), 90.38 KB (92,544 bytes), 11/18/2002 7:00 AM)	
[Printing]		
Name	Driver	Port Name Server Name
[Problem Devices]		
Device	PNP Device ID	Error Code
Base System Device	PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0	
1\3&267A616A&0&10	The drivers for this device are not installed.	
Base System Device	PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0	
1\3&267A616A&0&12	The drivers for this device are not installed.	
[USB]		
Device	PNP Device ID	
ServerWorks (RCC) PCI to USB Open Host Controller	PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0	
5\3&267A616A&0&7A		
USB Root Hub	USB\ROOT_HUB\4&AF5358C&0	
[Software Environment]		

[System Drivers]						
Name	Description	File	Type	State	Start Mode	Control
abiosdsk	Abiosdsk	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	Boot	Accept Control
	Running	OK	Normal	No	Yes	Accept Pause
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No	Disabled	Accept Stop
	Stopped	OK	Normal	No	No	Ignore
adpu160m	adpu160m	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
adpu320	adpu320	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
afcnt	afcnt	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes	Auto	Accept Stop
	Running	OK	Normal	No	Yes	Ignore
ahal154x	Ahal154x	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
aic78u2	aic78u2	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
aic78xx	aic78xx	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
aliide	Aliide	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	Kernel Driver	No	Manual	Accept Stop
	Stopped	OK	Normal	No	No	Ignore
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel Driver	Yes	Boot	Accept Stop
	Running	OK	Normal	No	Yes	Ignore
atdisk	Atdisk	Not Available	Kernel Driver	OK	Disabled	Accept Stop
	No	Stopped	OK	Normal	Normal	Ignore
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys				

atmarpc	ATM ARP Client Protocol	Kernel Driver Running OK	Yes Ignore	Manual No	Yes		Kernel Driver Running OK	Yes Normal	Boot No	Yes	
	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver Stopped OK	No	Manual Normal	No		dac960nt	dac960nt	Not Available No	Kernel Driver Disabled Stopped OK	
audstub	Audio Stub Driver	Kernel Driver Running OK	Yes Normal	Manual No	Yes		dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys	File System Driver Running OK	Yes Normal	Boot No
	c:\windows\system32\drivers\audstub.sys	Kernel Driver Stopped OK	No	Manual Normal	No		disk	Disk Driver c:\windows\system32\drivers\disk.sys	Kernel Driver Running OK	Yes Normal	Boot No
beep	Beep	Kernel Driver Running OK	Yes Normal	System No	Yes		dmboot	dmboot c:\windows\system32\drivers\dmboot.sys	Kernel Driver Stopped OK	No Normal	Disabled No
	c:\windows\system32\drivers\beep.sys	Kernel Driver Stopped OK	No	System Normal	No		dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys	Kernel Driver Running OK	Yes Normal	Boot No
cbidf2k	cbidf2k	cbidf2k Kernel Driver Stopped OK	No	Disabled Normal	No		dmload	dmload c:\windows\system32\drivers\dmload.sys	Kernel Driver Running OK	Yes Normal	Boot No
	c:\windows\system32\drivers\cbidf2k.sys	Kernel Driver Stopped OK	No	Disabled Normal	No		dpti2o	dpti2o dpti2o	Not Available No	Kernel Driver Disabled Stopped OK	OK
cd20xrnt	cd20xrnt	cd20xrnt Kernel Driver Stopped OK	No	Available Normal	OK		fastfat	Fastfat c:\windows\system32\drivers\fastfat.sys	Kernel Driver Running OK	Yes Normal	Boot No
	Kernel Driver Normal No	File System Driver Running OK	Yes Normal	Disabled Normal	No		fdc	Floppy Disk Controller Driver c:\windows\system32\drivers\fdc.sys	Kernel Driver Running OK	Yes Normal	Manual No
cdfs	Cdfs	Cdfs c:\windows\system32\drivers\cdfs.sys	Kernel Driver Stopped OK	Available Normal	OK		fips	Fips c:\windows\system32\drivers\fips.sys	Kernel Driver Running OK	No Normal	Disabled No
	Kernel Driver Normal No	File System Driver Running OK	Yes Normal	Disabled Normal	No		flpydisk	Floppy Disk Driver c:\windows\system32\drivers\flpydisk.sys	Kernel Driver Running OK	Yes Normal	Manual No
cdrom	CD-ROM Driver	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys	Kernel Driver Running OK	Available Normal	System No		ftdisk	Volume Manager Driver c:\windows\system32\drivers\ftdisk.sys	Kernel Driver Running OK	Yes Normal	Boot No
	Kernel Driver Normal No	Kernel Driver Running OK	Yes Normal	System Normal	No		gpc	Generic Packet Classifier c:\windows\system32\drivers\msgpc.sys	Kernel Driver Running OK	Yes Normal	Manual No
changer	Changer	Changer Not Available	Kernel Driver No	Available System	OK						
	Kernel Driver Normal No	Kernel Driver Stopped OK	No	Normal Normal	No						
clusdisk	Cluster Disk Driver	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys	Kernel Driver Stopped OK	Available Normal	OK						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Disabled Normal	No						
cmdide	CmdIde	CmdIde Not Available	Kernel Driver No	Available Disabled	OK						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Normal Normal	No						
cpqarray	Cpqarray	Cpqarray Not Available	Kernel Driver No	Available Disabled	OK						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Normal Normal	No						
cpqarry2	cpqarry2	cpqarry2 Not Available	Kernel Driver No	Available Disabled	OK						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Normal Normal	No						
cpqcissm	cpqcissm	cpqcissm c:\windows\system32\drivers\cpqcissm.sys	Kernel Driver Running OK	Available Normal	Boot No						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Normal Normal	No						
cpqfcalm	cpqfcalm	cpqfcalm Not Available	Kernel Driver No	Available Disabled	OK						
	Kernel Driver Normal No	Kernel Driver Normal No	No	Normal Normal	No						
crcdisk	CRC Disk Filter Driver	CRC Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys									

		Running	OK	Normal	No	Yes		ipsraidsn	ipsraidsn	Not Available	Kernel Driver			Running	OK	Normal	No	Yes	
hpncissb	hpncissb	hpncissb	Not Available	Kernel Driver	No	Disabled	Stopped	OK	No	Disabled	Stopped	OK		ndis	NDIS System Driver	c:\windows\system32\drivers\ndis.sys			
Driver			Normal	No	No	Normal	Normal	Normal	Normal	No	No	Normal			Kernel Driver	Yes	Boot		
hpqci	hpqci	hpqci	Smart Array Controllers	Non-Miniport Bus	c:\windows\system32\drivers\hpqci.sys	Kernel Driver	Yes	Boot	Kernel Driver	Yes	Boot	Kernel Driver	Yes	ndistapi	Remote Access NDIS TAPI Driver	c:\windows\system32\drivers\ndistapi.sys			
Driver			Running	OK	Normal	No	Normal	Running	OK	Critical	No	Running	OK		Kernel Driver	Yes	Manual		
hpqci	hpqci	hpqci	Smart Array Controllers	Non-Miniport Disk	c:\windows\system32\drivers\hpqci.sys	Kernel Driver	Yes	Boot	Kernel Driver	Yes	System	Running	OK	ndisui0	NDIS Usermode I/O Protocol	c:\windows\system32\drivers\ndisui0.sys			
Driver			Running	OK	Normal	No	Normal	Running	OK	Normal	No	Normal	Normal		Kernel Driver	Yes	Manual		
hpt3xx	hpt3xx	hpt3xx	Not Available	Kernel Driver	No	Disabled	Stopped	OK	Kernel Driver	Yes	Boot	Running	OK	ndiswan	Remote Access NDIS WAN Driver	c:\windows\system32\drivers\ndiswan.sys			
			Normal	No	No	Normal	Normal	Running	OK	Normal	No	Normal	Normal		Kernel Driver	Yes	Manual		
http	http	HTTP	c:\windows\system32\drivers\http.sys	Kernel Driver	No	Normal	Normal	Normal	No	Disabled	Stopped	OK	Normal		ndproxy	NDIS Proxy	c:\windows\system32\drivers\ndproxy.sys		
			Stopped	OK	Normal	No	Normal	Running	OK	Ignore	No	Normal	Normal		Kernel Driver	Yes	Manual		
i2omgmt	i2omgmt	i2omgmt	Not Available	Kernel Driver	No	System	Stopped	OK	Kernel Driver	Yes	System	Running	OK	netbios	NetBIOS Interface	c:\windows\system32\drivers\netbios.sys			
			Normal	No	No	Normal	No	Running	OK	System	Normal	Normal	Normal		File System Driver	Yes	System		
i2omp	i2omp	i2omp	Not Available	Kernel Driver	No	Disabled	Stopped	OK	Kernel Driver	No	Manual	Stopped	OK	netbt	NetBios over Tcpip	c:\windows\system32\drivers\netbt.sys			
			Normal	No	No	Normal	Normal	Running	OK	Ignore	No	Normal	Normal		Kernel Driver	Yes	System		
i8042prt	i8042prt	i8042prt	Keyboard and PS/2 Mouse Port Driver	c:\windows\system32\drivers\i8042prt.sys	Kernel Driver	Yes	System	Running	OK	Normal	No	Normal	Normal	ndrd960	nfrd960	Not Available	Kernel Driver		
			Stopped	OK	Normal	No	Normal	Running	OK	Normal	No	Normal	Normal		No	Disabled	Stopped	OK	
imapi	imapi	CD-Burning Filter Driver	c:\windows\system32\drivers\imapi.sys	Kernel Driver	No	Normal	System	Stopped	OK	Normal	No	Normal	Normal	npfs	Npfs	c:\windows\system32\drivers\npfs.sys			
			Stopped	OK	Normal	No	Normal	Running	OK	Normal	No	Normal	Normal		File System Driver	Yes	System		
intelide	intelide	IntelIDE	Not Available	Kernel Driver	No	Disabled	Stopped	OK	Kernel Driver	Yes	Boot	Running	OK	ntfs	Ntfs	c:\windows\system32\drivers\ntfs.sys			
			Normal	No	No	Normal	No	Running	OK	Normal	No	Normal	Normal		File System Driver	Yes	Disabled		
ipfilterdriver	ipfilterdriver	IP Traffic Filter Driver	c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver	No	Normal	Normal	Stopped	OK	Normal	No	Normal	Normal	null	Null	c:\windows\system32\drivers\null.sys			
			Stopped	OK	Normal	No	Normal	Running	OK	Normal	No	Normal	Normal		Kernel Driver	Yes	System		
ipinip	ipinip	IP in IP Tunnel Driver	c:\windows\system32\drivers\ipinip.sys	Kernel Driver	No	Normal	Manual	Stopped	OK	Normal	No	Normal	Normal	parport	Parport	c:\windows\system32\drivers\parport.sys			
			Stopped	OK	Normal	No	No	Running	OK	Normal	No	Normal	Normal		Kernel Driver	No	Manual		
ipnat	ipnat	IP Network Address Translator	c:\windows\system32\drivers\ipnat.sys	Kernel Driver	No	Normal	Manual	Stopped	OK	Normal	No	Normal	Normal	partmgr	Partition Manager	c:\windows\system32\drivers\partmgr.sys			
			Stopped	OK	Normal	No	No	Running	OK	Normal	No	Normal	Normal		Kernel Driver	Yes	Boot		
ipsec	ipsec	IPSEC driver	c:\windows\system32\drivers\ipsec.sys	Kernel Driver	Yes	Normal	System	Running	OK	Normal	No	Normal	Normal						
			Stopped	OK	Normal	No	Yes	Running	OK	Normal	No	Normal	Normal	mup	Mup	c:\windows\system32\drivers\mup.sys			
			Running	OK	Normal	No	Yes	File System Driver	Yes	System	Normal	Normal	Normal		File System Driver	Yes	Boot		

		Running	OK	Normal	No	Yes		ql12160	ql12160	Not Available	Kernel Driver			Stopped	OK	Ignore	No	No	
parvdm	ParVdm	c:\windows\system32\drivers\parvdm.sys						ql1240	ql1240	Normal	Kernel Driver	redbook	Digital CD Audio Playback Filter Driver						
	Kernel Driver	Stopped	OK	No	Auto	No		ql1240	No	Disabled	Stopped	Kernel Driver	c:\windows\system32\drivers\redbook.sys						
	Ignore	No	No	No	No	No		ql1280	ql1280	Normal	Kernel Driver	Kernel Driver	Kernel Driver	Yes	System	Normal	No	Yes	
pci	PCI Bus Driver	c:\windows\system32\drivers\pci.sys						ql1280	No	Normal	Kernel Driver	secdrv	Secdrv	c:\windows\system32\drivers\secdrv.sys					
	Kernel Driver	Running	OK	Yes	Boot	Normal		ql1280	No	Disabled	Stopped	Kernel Driver	Kernel Driver	No	Manual	Normal	No	No	
	Critical	No	No	No	Yes	No		ql2100	ql2100	Normal	Kernel Driver	Stopped	Kernel Driver	Normal	Normal	No	No	No	
pcide	PCIIDE	c:\windows\system32\drivers\pcide.sys						ql2200	ql2200	No	Normal	serenum	Serenum Filter Driver	c:\windows\system32\drivers\serenum.sys					
	Kernel Driver	Running	OK	Yes	Boot	Normal		ql2200	No	Disabled	Stopped	Kernel Driver	Kernel Driver	Yes	Manual	Normal	No	Yes	
	Normal	No	No	No	Yes	No		ql2300	ql2300	Normal	Normal	Running	Serial port driver	c:\windows\system32\drivers\serial.sys					
pcmcia	Pcmcia	c:\windows\system32\drivers\pcmcia.sys						qlvika	qlvika	No	Normal	serial	Kernel Driver	Kernel Driver	Yes	System	Ignore	No	Yes
	Kernel Driver	Stopped	OK	No	Normal	Normal		qlvika	c:\windows\system32\drivers\qlvika.sys	Normal	Normal	Running	Simbad	Simbad	Not Available	Normal	Ignore	No	No
	Ignore	No	No	No	No	No		qlvika	No	Normal	Normal	Running	Kernel Driver	Kernel Driver	No	System	Normal	No	Yes
pdcomp	PDCOMP	Not Available						rasacd	rasacd	Kernel Driver	Auto	sfloppy	Sfloppy	c:\windows\system32\drivers\sfloppy.sys					
	No	Manual	Stopped	OK				rasacd	No	Normal	Normal	Stopped	Kernel Driver	Kernel Driver	No	System	Normal	No	No
	Ignore	No	No	No	No	No		rasl2tp	WAN Miniport (L2TP)	Kernel Driver	System	simbad	Simbad	Not Available	Normal	Normal	Ignore	No	No
pdframe	PDFRAME	Not Available						rasl2tp	c:\windows\system32\drivers\rasl2tp.sys	Normal	Normal	rasl2tp	Sparrow	Sparrow	Not Available	Normal	Normal	Normal	OK
	No	Manual	Stopped	OK				rasl2tp	No	Normal	Normal	Running	Kernel Driver	Kernel Driver	No	System	Normal	No	No
	Ignore	No	No	No	No	No		rasl2tp	No	Normal	Normal	Normal	Normal	Srv	Normal	Normal	Normal	Normal	OK
pdreli	PDRDLI	Not Available						rasppoe	Remote Access PPPOE Driver	Kernel Driver	System	srv	c:\windows\system32\drivers\srv.sys	File System Driver	Yes	Manual	Normal	No	Yes
	No	Manual	Stopped	OK				rasppoe	c:\windows\system32\drivers\rasppoe.sys	Normal	Normal	Running	Running	Normal	Normal	Normal	Normal	Normal	Yes
	Ignore	No	No	No	No	No		raspti	Remote Access Parallel	Kernel Driver	Manual	swenum	Software Bus Driver	c:\windows\system32\drivers\swenum.sys	Yes	Manual	Normal	No	Yes
pdrframe	PDRFRAME	Not Available						raspti	c:\windows\system32\drivers\raspti.sys	Normal	Normal	Running	Kernel Driver	Kernel Driver	Normal	Normal	Normal	No	Yes
	No	Manual	Stopped	OK				raspti	No	Normal	Normal	Normal	Normal	symc810	Not Available	Normal	Normal	Normal	OK
	Ignore	No	No	No	No	No		raspti	No	Normal	Normal	Normal	Normal	symc8xx	Normal	Normal	Normal	Normal	OK
perc2	perc2	Not Available						rdbs	Rdbss	Kernel Driver	System	symc8xx	Not Available	c:\windows\system32\drivers\rdbs.sys	Yes	Normal	Normal	Normal	OK
	No	Disabled	Stopped	OK				rdbs	c:\windows\system32\drivers\rdbs.sys	Normal	Normal	Running	File System Driver	File System Driver	Normal	Normal	Normal	Normal	OK
	Normal	No	No	No	No	No		rdbs	No	Normal	Normal	Normal	Normal	symmipi	Not Available	Normal	Normal	Normal	OK
perc2hib	perc2hib	Not Available						rdpcdd	RDPCCD	Kernel Driver	System	symmipi	Not Available	c:\windows\system32\drivers\rdpcdd.sys	Yes	Normal	Normal	Normal	OK
	No	Disabled	Stopped	OK				rdpcdd	c:\windows\system32\drivers\rdpcdd.sys	Normal	Normal	Running	Kernel Driver	Kernel Driver	Normal	Normal	Normal	Normal	OK
	Normal	No	No	No	No	No		rdpcdd	No	Normal	Normal	Normal	Normal	sym_hi	Not Available	Normal	Normal	Normal	OK
pptpminiport	PPTPMiniport	WAN Miniport (PPTP)						rdpdr	Terminal Server Device Redirector Driver	Kernel Driver	Manual	sym_hi	Not Available	c:\windows\system32\drivers\rdpdr.sys	Yes	Normal	Normal	Normal	OK
	c:\windows\system32\drivers\raspppt.sys							rdpdr	c:\windows\system32\drivers\rdpdr.sys	Normal	Normal	Running	Kernel Driver	Kernel Driver	Normal	Normal	Normal	Normal	OK
	Kernel Driver	Yes	Manual	Normal	No	No		rdpdr	No	Normal	Normal	Normal	Normal	sym_u3	Not Available	Normal	Normal	Normal	OK
processor	Processor Driver	c:\windows\system32\drivers\processr.sys						rdpwd	RDPWD	Kernel Driver	System	sym_u3	Not Available	c:\windows\system32\drivers\rdpwd.sys	Yes	Normal	Normal	Normal	OK
	Kernel Driver	Running	OK	Yes	Manual	Normal		rdpwd	c:\windows\system32\drivers\rdpwd.sys	Normal	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal
	Critical	No	No	No	No	No		rdpwd	No	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal	Normal
ptilink	Direct Parallel Link Driver	c:\windows\system32\drivers\ptilink.sys						rdpwd	c:\windows\system32\drivers\rdpwd.sys	Normal	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal
	Kernel Driver	Running	OK	Yes	Manual	Normal		rdpwd	No	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal	Normal
	Normal	No	No	No	No	No		rdpwd	No	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal	Normal
ql1080	ql1080	Not Available						rdpwd	RDPWD	Kernel Driver	System	tcpip	Normal	c:\windows\system32\drivers\tcpip.sys	Yes	Normal	Normal	Normal	Normal
	No	Disabled	Stopped	OK				rdpwd	c:\windows\system32\drivers\rdpwd.sys	Normal	Normal	Running	Kernel Driver	Kernel Driver	Normal	Normal	Normal	Normal	Normal
	Normal	No	No	No	No	No		rdpwd	No	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal	Normal
ql10wnt	Q100wnt	Not Available						rdpwd	RDPWD	Kernel Driver	Manual	tcpip	Normal	c:\windows\system32\drivers\tcpip.sys	Yes	Normal	Normal	Normal	Normal
	No	Disabled	Stopped	OK				rdpwd	c:\windows\system32\drivers\rdpwd.sys	Normal	Normal	Running	Kernel Driver	Kernel Driver	Normal	Normal	Normal	Normal	Normal
	Normal	No	No	No	No	No		rdpwd	No	Normal	Normal	Normal	Normal	tcpip	Normal	Normal	Normal	Normal	Normal

tdpipe	TDPIPE c:\windows\system32\drivers\tdpipe.sys	Kernel Driver Stopped OK	No Ignore	Manual No	No
tdtcp	TDTCP c:\windows\system32\drivers\tdtcp.sys	Kernel Driver Stopped OK	No Ignore	Manual No	No
termdd	Terminal Device Driver c:\windows\system32\drivers\termdd.sys	Kernel Driver Running OK	Yes Normal	System No	Yes
toside	TosIde Not Available Kernel Driver No Disabled Stopped OK				
udfs	Udfs c:\windows\system32\drivers\udfs.sys	File System Driver Stopped OK	No Normal	Disabled Normal	No
ultra	ultra Not Available Kernel Driver No Disabled Stopped OK				
update	Microcode Update Driver c:\windows\system32\drivers\update.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes
usbhub	USB2 Enabled Hub c:\windows\system32\drivers\usbhub.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes
usbohci	Microsoft USB Open Host Controller Miniport Driver c:\windows\system32\drivers\usbohci.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes
vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys	Kernel Driver Running OK	Yes Ignore	System No	Yes
viaide	ViaIde Not Available Kernel Driver No Disabled Stopped OK				
volsnap	VolSnap c:\windows\system32\drivers\volsnap.sys	Kernel Driver Running OK	Yes Normal	Boot No	Yes
wanarp	Remote Access IP ARP Driver c:\windows\system32\drivers\wanarp.sys	Kernel Driver Running OK	Yes Normal	Manual No	Yes
wdica	WDICA Not Available Kernel Driver No Manual Stopped OK				
wlbs	Network Load Balancing c:\windows\system32\drivers\wlbs.sys	Kernel Driver Stopped OK	No Normal	Manual No	No
	[Signed Drivers]				
	Device Name	Signed	Device Class		
	Driver Version	Driver Date			
	Manufacturer	INF Name	Driver Name		
	Device ID				
	Not Available	Not Available	Not Available		
	Not Available	Not Available	Not Available		
	Available	Not Available	Not Available		
	HTREE\ROOT\0				
	ACPI Multiprocessor PC 5.2.3663.0	Yes	COMPUTER (Standard computers)		
			hal.inf	Not	
	Available ROOT\ACPI_HAL\0000				
	Microsoft ACPI-Compliant System	Yes			
	SYSTEM 5.2.3663.0	11/15/2002			
	Microsoft acpi.inf	Not Available			
	ACPI_HAL\PNP0C08\0				
	Processor Yes 11/15/2002	PROCESSOR 5.2.3663.0 (Standard processor)			
	types) cpu.inf	Not Available			
	ACPI\GENUINEINTEL_ _X86_FAMILY_15_MODEL_2__0				
	Processor Yes 11/15/2002	PROCESSOR 5.2.3663.0 (Standard processor)			
	types) cpu.inf	Not Available			
	ACPI\GENUINEINTEL_ _X86_FAMILY_15_MODEL_2__1				
	Processor Yes 11/15/2002	PROCESSOR 5.2.3663.0 (Standard processor)			
	types) cpu.inf	Not Available			
	ACPI\GENUINEINTEL_ _X86_FAMILY_15_MODEL_2__2				
	Processor Yes 11/15/2002	PROCESSOR 5.2.3663.0 (Standard processor)			
	types) cpu.inf	Not Available			
	ACPI\GENUINEINTEL_ _X86_FAMILY_15_MODEL_2__3				
	PCI bus Yes 11/15/2002	SYSTEM 5.2.3663.0 (Standard system devices)			
	devices) machine.inf	Not Available			
	ACPI\PNP0A03\0				
	ServerWorks Grand Champion - NorthBridge High End Yes				
	SYSTEM 5.2.3663.0	11/15/2002			
	ServerWorks (RCC) machine.inf	Not Available			
	Available PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_2 2\3&267A616A&0&00				
	ServerWorks Grand Champion - NorthBridge High End Yes				
	SYSTEM 5.2.3663.0	11/15/2002			
	ServerWorks (RCC) machine.inf	Not Available			
	Available PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0 0\3&267A616A&0&01				
	ServerWorks Grand Champion - NorthBridge High End Yes				
	SYSTEM 5.2.3663.0	11/15/2002			
	ServerWorks (RCC) machine.inf	Not Available			
	Available PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0 0\3&267A616A&0&02				
	ServerWorks Grand Champion - NorthBridge High End Yes				
	SYSTEM 5.2.3663.0	11/15/2002			
	ServerWorks (RCC) machine.inf	Not Available			
	Available PCI\VEN_1166&DEV_0011&SUBSYS_00000000&REV_0 0\3&267A616A&0&03				
	Base System Device Not Available UNKNOWN				
	Available Not Available Not Available Not Available				
	PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0 1\3&267A616A&0&10				
	Base System Device Not Available UNKNOWN				
	Available Not Available Not Available Not Available				
	PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0 1\3&267A616A&0&12				
	RAGE XL PCI (Microsoft Corporation) Yes				
	DISPLAY 5.10.2600.6009	11/2/2001 ATI			
	Technologies Inc. atiixpad.inf Not Available				
	PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2 7\3&267A616A&0&18				
	Default Monitor Yes MONITOR 5.1.2001.0				
	6/6/2001 (Standard monitor types)				
	monitor.inf Not Available				
	DISPLAY\DEFAULT_MONITOR\4&89B5141&0&8000000 0&0&0&03				
	PCI standard ISA bridge Yes SYSTEM				
	5.2.3663.0 11/15/2002				
	(Standard system devices) machine.inf				
	Not Available				
	PCI\VEN_1166&DEV_0201&SUBSYS_00000000&REV_9 3\3&267A616A&0&78				
	ISAPNP Read Data Port Yes SYSTEM				
	5.2.3663.0 11/15/2002				
	(Standard system devices) machine.inf				
	Not Available ISAPNP\READDATAPORT\0				
	Motherboard resources Yes SYSTEM				
	5.2.3663.0 11/15/2002				
	(Standard system devices) machine.inf				
	Not Available ACPI\PNP0C02\0				
	Programmable interrupt controller Yes				
	SYSTEM 5.2.3663.0 11/15/2002				
	(Standard system devices) machine.inf				
	Not Available ACPI\PNP0000\4&35118DFF&0				
	System timer Yes SYSTEM 5.2.3663.0				
	11/15/2002 (Standard system				
	devices) machine.inf Not Available				
	ACPI\PNP0100\4&35118DFF&0				
	Direct memory access controller Yes				
	SYSTEM 5.2.3663.0 11/15/2002				
	(Standard system devices) machine.inf				
	Not Available ACPI\PNP0200\4&35118DFF&0				
	System speaker Yes SYSTEM 5.2.3663.0				
	11/15/2002 (Standard system				
	devices) machine.inf Not Available				
	ACPI\PNP0800\4&35118DFF&0				

Standard	101/102-Key or Microsoft Natural PS/2			
Keyboard	Yes	KEYBOARD	5.2.3663.0	
	11/15/2002	(Standard keyboards)		
	keyboard.inf	Not Available		
	ACPI\PNP0303\4&35118DFF&0			
PS/2 Compatible	Mouse	Yes	MOUSE	
	5.2.3663.0	11/15/2002		
	Microsoft msmouse.inf	Not Available		
	ACPI\PNP0F13\4&35118DFF&0			
Extended	IO Bus	Yes	SYSTEM	5.2.3663.0
devices)	11/15/2002	(Standard system		
	machine.inf	Not Available		
	ACPI\PNP0A06\4&35118DFF&0			
Communications	Port	Yes	PORTS	5.2.3663.0
	11/15/2002	(Standard port types)		
	msports.inf	Not Available		
	ACPI\PNP0501\0			
Standard	floppy disk controller	Yes	FDC	
	5.2.3663.0	11/15/2002		
	(Standard floppy disk controllers)			
	fdc.inf	Not Available		
	ACPI\PNP0700\5&13237358&0			
Floppy	disk drive	Yes	FLOPPYDISK	
	5.2.3663.0	11/15/2002		
	(Standard floppy disk drives)			
	flpydisk.inf			
	Not Available			
	FDC\GENERIC_FLOPPY_DRIVE\6&1C650E5D&0&0			
Standard	Dual Channel PCI IDE Controller	Yes		
	HDC	5.2.3663.0	11/15/2002	
	(Standard IDE ATA/ATAPI controllers)			
	mshdc.inf	Not Available		
	PCI\VEN_1166&DEV_0212&SUBSYS_02121166&REV_9			
3\3&267A616A&0&79				
Primary	IDE Channel	Yes	HDC	5.2.3663.0
	11/15/2002	(Standard IDE ATA/ATAPI		
controllers)	mshdc.inf	Not Available		
	PCIIDE\IDECHANNEL\4&1024D5C6&0&0			
CD-ROM	Drive	Yes	CDROM	5.2.3663.0
	11/15/2002	(Standard CD-ROM		
drives)	cdrom.inf	Not Available		
	IDE\CDROMCOMPAQ_CRN-			
8245B		2.18	\5&FB0C83D&0&0.0	
Secondary	IDE Channel	Yes	HDC	
	5.2.3663.0	11/15/2002		
	(Standard IDE ATA/ATAPI controllers)			
	mshdc.inf	Not Available		
	PCIIDE\IDECHANNEL\4&1024D5C6&0&1			
ServerWorks	(RCC) PCI to USB Open Host Controller	Yes		
	USB	5.2.3663.0	11/15/2002	
	ServerWorks (RCC)	usbport.inf	Not Available	
Available				
	PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0			
5\3&267A616A&0&7A				
USB Root	Hub	Yes	USB	5.2.3663.0
	11/15/2002	(Standard USB Host		
Controller)	usbport.inf	Not Available		
	USB\ROOT_HUB\4&AF5358C&0			
PCI standard	host CPU bridge	Yes	SYSTEM	
	5.2.3663.0	11/15/2002		
	(Standard system devices)			
	machine.inf			
	Not Available			

PCI\VEN_1166&DEV_0225&SUBSYS_00000000&REV_0	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
0\3&267A616A&0&7B	2\3&1070020&0&10
PCI standard host CPU bridge	Smart Array Logical Volume
5.2.3663.0	No DISKDRIVE
(Standard system devices)	5.5.50.32 6/111/2002 HP
machine.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0	\4&16A16360&0&0000040000000000
3\3&267A616A&0&80	Smart Array Logical Volume
PCI standard host CPU bridge	No DISKDRIVE
5.2.3663.0	5.5.50.32 6/111/2002 HP
(Standard system devices)	oem2.inf Not Available
machine.inf	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
Not Available	\4&16A16360&0&0100040000000000
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0	Smart Array Logical Volume
3\3&267A616A&0&82	No DISKDRIVE
PCI standard host CPU bridge	5.5.50.32 6/111/2002 HP
5.2.3663.0	(Standard system devices)
machine.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0	\4&16A16360&0&0200040000000000
3\3&267A616A&0&88	Smart Array Logical Volume
PCI standard host CPU bridge	No DISKDRIVE
5.2.3663.0	5.5.50.32 6/111/2002 HP
(Standard system devices)	oem2.inf Not Available
machine.inf	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
Not Available	\4&16A16360&0&0300040000000000
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0	Smart Array Logical Volume
3\3&267A616A&0&8A	No DISKDRIVE
PCI standard host CPU bridge	5.5.50.32 6/111/2002 HP
5.2.3663.0	(Standard system devices)
machine.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
PCI\VEN_1166&DEV_0010&SUBSYS_00000000&REV_0	\4&16A16360&0&0400040000000000
3\3&267A616A&0&8A	Smart Array 5300 Controller (Non-Miniport)
PCI bus	No
5.2.3663.0	SCSIADAPTER 5.5.50.32 6/111/2002
11/15/2002	Compaq pnpscsi.inf
devices)	Not Available
ACPI\PNP0A03\1	oem1.inf Not Available
Compaq Smart Array 5i Controller	PCI\VEN_0E11&DEV_B0F7&SUBSYS_A2FE0E11&REV_1
Yes	
SCSIADAPTER	5.2.3663.0
11/15/2002	Compaq scsiedev.inf
Not Available	oem2.inf Not Available
PCI\VEN_1166&DEV_B178&SUBSYS_40800E11&REV_0	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
1\3&3C0B0C5&0&08	\4&38EB4840&0&0000040000000000
Compaq Virtual LUN	Smart Array Logical Volume
Yes	No DISKDRIVE
SYSTEM	5.5.50.32 6/111/2002 HP
11/15/2002	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE	\4&38EB4840&0&0100040000000000
&REV_CISS\4&3349E2F1&0&000	Smart Array Logical Volume
Disk drive	No DISKDRIVE
Yes	5.5.50.32 6/111/2002 HP
DISKDRIVE	(Standard disk drives)
11/15/2002	disk.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME&RE
V_1.86\4&3349E2F1&0&400	\4&38EB4840&0&0200040000000000
PCI bus	Smart Array Logical Volume
Yes	No DISKDRIVE
SYSTEM	5.5.50.32 6/111/2002 HP
11/15/2002	oem2.inf Not Available
devices)	Not Available
ACPI\PNP0A03\2	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
Smart Array 5300 Controller (Non-Miniport)	\4&38EB4840&0&0300040000000000
No	Smart Array Logical Volume
SCSIADAPTER	No DISKDRIVE
5.5.50.32 6/111/2002	oem1.inf Not Available
HP	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
oem1.inf	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&10	2\3&29E81982&0&10
Smart Array Logical Volume	Smart Array Logical Volume
No	No DISKDRIVE
DISKDRIVE	5.5.50.32 6/111/2002 HP
oem2.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&38EB4840&0&0400040000000000
Smart Array 5300 Controller (Non-Miniport)	Smart Array Logical Volume
No	No DISKDRIVE
SCSIADAPTER	5.5.50.32 6/111/2002 HP
oem1.inf	oem1.inf Not Available
HP	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
oem2.inf	PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2\3&29E81982&0&10	2\3&29E81982&0&10
Smart Array Logical Volume	Smart Array Logical Volume
No	No DISKDRIVE
DISKDRIVE	5.5.50.32 6/111/2002 HP
oem2.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&1C5980EA&0&0000040000000000
Smart Array Logical Volume	Smart Array Logical Volume
No	No DISKDRIVE
DISKDRIVE	5.5.50.32 6/111/2002 HP
oem2.inf	oem2.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME	\4&1C5980EA&0&0100040000000000
Smart Array Logical Volume	Smart Array Logical Volume
No	No DISKDRIVE
DISKDRIVE	5.5.50.32 6/111/2002 HP
oem1.inf	oem1.inf Not Available
Not Available	HPQCISSV\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME

```

oem2.inf Not Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&1C5980EA&0x0200040000000000
Compaq PCI Hotplug Controller Yes SYSTEM
5.2.3663.0 11/15/2002
Compaq machine.inf Not Available
PCI\VEN_0E11&DEV_A0F7&SUBSYS_A2FE0E11&REV_1
4&329E81982&&F0
PCI bus Yes SYSTEM 5.2.3663.0
11/15/2002 (Standard system
devices) machine.inf Not Available
ACPI\PNP0A03\4
QLogic QLA23xx PCI Fibre Channel Adapter No
SCSIADAPTER 8.2.0.0 8/5/2002
QLogic oem0.inf Not Available
PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_0
2&3&172E68DD&0&08
Disk drive Yes DISKDRIVE 5.2.3663.0
11/15/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_QLOGIC&PROD_PSEUDO_LUN&REV_\4
&13981342&0&07F0
Smart Array 5300 Controller (Non-Miniport) No
SCSIADAPTER 5.5.50.32 6/11/2002
HP oem1.inf Not Available
PCI\VEN_0E11&DEV_B060&SUBSYS_40700E11&REV_0
2&3&172E68DD&0&10
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/11/2002 HP
oem2.inf Not Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0000040000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/11/2002 HP
oem2.inf Not Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0010004000000000
Smart Array Logical Volume No DISKDRIVE
5.5.50.32 6/11/2002 HP
oem2.inf Not Available
HPQCISS\DISK&VEN_COMPAQ&PROD_LOGICAL_VOLUME
\4&2E12B67&0&0200004000000000
ACPI Thermal Zone Yes SYSTEM 5.2.3663.0
11/15/2002 (Standard system
devices) machine.inf Not Available
ACPI\THERMALZONE\THMO
ACPI Fixed Feature Button Yes SYSTEM
5.2.3663.0 11/15/2002
(Standard system devices) machine.inf
Not Available
ACPI\FIXEDBUTTON\2&DABA3FF&0
Logical Disk Manager Yes SYSTEM
5.2.3663.0 11/15/2002
(Standard system devices) machine.inf
Not Available
ROOT\DMIO\0000
Volume Manager Yes SYSTEM 5.2.3663.0
11/15/2002 (Standard system
devices) machine.inf Not Available
ROOT\FTDISK\0000
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available

```

```

STORAGE\VOLUME\1&30A96598&0&SIGNATURE92CD9F
B2OFFSET7E00LENGTH3B5AC72400
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F6OFFSET7E00LENGTH1869E51A00
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F7OFFSET7E00LENGTHA58B4200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F4OFFSET7E00LENGTH632BE01200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F5OFFSET7E00LENGTH1869E51A00
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F2OFFSET7E00LENGTHA58B4200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F3OFFSET7E00LENGTH632BE01200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F0OFFSET7E00LENGTH1869E51A00
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
F1OFFSET7E00LENGTHA58B4200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
FEOOFFSET7E00LENGTH632BE01200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
FFOFFSET7E00LENGTH1869E51A00
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
FCOFFSET7E00LENGTHA58B4200
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATUREC00C89
FDOFFSET7E00LENGTH632BE01200

```

```

Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE111B9F
D1OFFSET4000LENGTH23D8000
Generic volume Yes VOLUME 5.2.3663.0
11/15/2002 Microsoft volume.inf
Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE111B9F
D1OFFSET23DC00LENGTH43A814000
AFD Networking Support Environment Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_AFD\0000
Beep Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_BEEP\0000
CRC Disk Filter Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_CRCDISK\0000
dmboot Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_DMBOOT\0000
dmload Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_DMLOAD\0000
Fips Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_FIPS\0000
Generic Packet Classifier Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_GPC\0000
IPSEC driver Not Available LEGACYDRIVER
Available Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_IPSEC\0000
ksecdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_KSECDD\0000
mmdd Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_MNMD\0000
mountmgr Not Available LEGACYDRIVER Not
Available Not Available Not Available Not
Available Not Available ROOT\LEGACY_MOUNTMGR\0000
NDIS System Driver Not Available LEGACYDRIVER
Not Available Not Available Not Available Not
Available Not Available Not Available
ROOT\LEGACY_NDIS\0000
Remote Access NDIS TAPI Driver Not Available
LEGACYDRIVER Not Available Not
Available Not Available Not Available Not
Available ROOT\LEGACY_NDISTAPI\0000

```

NDIS Usermode I/O Protocol	Not Available	
LEGACYDRIVER	Not Available	Not
Available Not Available	Not Available	Not
Available ROOT\LEGACY_NDISUIO\0000		
NDProxy	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_NDPROXY\0000	
NetBios over Tcpip	Not Available	LEGACYDRIVER
Not Available	Not Available	Not
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_NETBT\0000	
Null	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_NULL\0000	
Partition Manager	Not Available	LEGACYDRIVER
Not Available	Not Available	Not
Available Not Available	Not Available	
ROOT\LEGACY_PARTMGR\0000		
ParVdm	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_PARVDM\0000	
qlvika	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_QLVIKA\0000	
Remote Access Auto Connection	Driver	Not Available
LEGACYDRIVER	Not Available	Not
Available Not Available	Not Available	Not
Available ROOT\LEGACY_RASACD\0000		
RDPCCDD	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_RDPCCDD\0000	
TCP/IP Protocol Driver	Not Available	
LEGACYDRIVER	Not Available	Not
Available Not Available	Not Available	Not
Available ROOT\LEGACY_TCPIP\0000		
VGA Display Controller.	Not Available	
LEGACYDRIVER	Not Available	Not
Available Not Available	Not Available	Not
Available ROOT\LEGACY_VGASAVE\0000		
volsnap	Not Available	LEGACYDRIVER
Available Not Available	Not Available	Not
Available Not Available	ROOT\LEGACY_VOLSNAP\0000	
Remote Access IP ARP Driver	Not Available	
LEGACYDRIVER	Not Available	Not
Available Not Available	Not Available	Not
Available ROOT\LEGACY_WANARP\0000		
Audio Codecs	Yes	MEDIA 5.2.3663.0
devices)	wave.inf	Not Available
	11/15/2002	(Standard system
Root\Media\MS_MMACM		
Legacy Audio Drivers	Yes	MEDIA
5.2.3663.0	11/15/2002	
(Standard system devices)	wave.inf	Not
Available ROOT\MEDIA\MS_MMDRV		
Media Control Devices	Yes	MEDIA
5.2.3663.0	11/15/2002	

	(Standard system devices)	wave.inf	Not
Available	ROOT\MEDIA\MS_MMCI		
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3663.0	11/15/2002		
(Standard system devices)	wave.inf	Not	
Available	ROOT\MEDIA\MS_MMVD		
Video Codecs	Yes	MEDIA 5.2.3663.0	
11/15/2002	(Standard system		
devices)	wave.inf	Not Available	
Root\Media\MS_MMVID			
WAN Miniport (L2TP)	Yes	NET 5.2.3663.0	
11/15/2002	Microsoft netrasa.inf		
Not Available			
Root\MS_L2TPMINIPORT\0000			
WAN Miniport (IP)	Yes	NET 5.2.3663.0	
11/15/2002	Microsoft netrasa.inf		
Not Available			
Root\MS_NDISWANIP\0000			
WAN Miniport (PPPOE)	Yes	NET	
5.2.3663.0	11/15/2002		
Microsoft netrasa.inf	Not Available		
Root\MS_PPPOMINIPORT\0000			
WAN Miniport (PPTP)	Yes	NET 5.2.3663.0	
11/15/2002	Microsoft netrasa.inf		
Not Available			
Root\MS_PPTPMINIPORT\0000			
Direct Parallel	Yes	NET 5.2.3663.0	
11/15/2002	Microsoft netrasa.inf		
Not Available			
Root\MS_PTIMINIPORT\0000			
Terminal Server Device Redirector	Yes		
SYSTEM 5.2.3663.0	11/15/2002		
(Standard system devices)	machine.inf		
Not Available			
Root\RDPDR\0000			
Terminal Server Keyboard Driver	Yes		
SYSTEM 5.2.3663.0	11/15/2002		
(Standard system devices)	machine.inf		
Not Available			
Root\RDP_KBD\0000			
Terminal Server Mouse Driver	Yes	SYSTEM	
5.2.3663.0	11/15/2002		
(Standard system devices)	machine.inf		
Not Available			
Root\RDP_MOU\0000			
Plug and Play Software Device Enumerator	Yes		
SYSTEM 5.2.3663.0	11/15/2002		
(Standard system devices)	machine.inf		
Not Available			
Root\SYSTEM\0000			
Microcode Update Device	Yes	SYSTEM	
5.2.3663.0	11/15/2002		
(Standard system devices)	machine.inf		
Not Available			
Root\SYSTEM\0001			
[Environment Variables]			
Variable	Value	User Name	
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>	
Path			
	%SystemRoot%\system32;%SystemRoot%;	%SystemRoot%	
oot%\System32\Wbem;C:\Program Files\Microsoft SQL			
Server\80\Tools\BINN		<SYSTEM>	
windir	%SystemRoot%	<SYSTEM>	
OS	Windows_NT	<SYSTEM>	
PROCESSOR_ARCHITECTURE	x86	<SYSTEM>	
PROCESSOR_LEVEL	15	<SYSTEM>	

PROCESSOR_IDENTIFIER	x86 Family 15 Model 2			
Stepping 2, GenuineIntel	<SYSTEM>			
PROCESSOR_REVISION	0202 <SYSTEM>			
NUMBER_OF_PROCESSORS	8 <SYSTEM>			
ClusterLog	C:\WINDOWS\Cluster\cluster.log <SYSTEM>			
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF			
;%WSH%	<SYSTEM>			
TEMP	%SystemRoot%\TEMP <SYSTEM>			
TMP	%SystemRoot%\TEMP <SYSTEM>			
%USERPROFILE%\Local Settings\Temp	NT			
AUTHORITY\SYSTEM				
%USERPROFILE%\Local Settings\Temp	NT			
AUTHORITY\SYSTEM				
%USERPROFILE%\Local Settings\Temp	NT			
AUTHORITY\LOCAL SERVICE				
%USERPROFILE%\Local Settings\Temp	NT			
AUTHORITY\NETWORK SERVICE				
%USERPROFILE%\Local Settings\Temp	NT			
AUTHORITY\NETWORK SERVICE				
%USERPROFILE%\Local Settings\Temp	NT			
QUARK\Administrator				
%USERPROFILE%\Local Settings\Temp	NT			
QUARK\Administrator				
[Print Jobs]				
Document	Size	Owner	Notify	Status
	Time Submitted		Start Time	
	Until Time		Elapsed Time	
	Pages Printed		Job ID	Priority
	Parameters		Driver	Print
Processor	Host Print Queue		Data Type	Name
[Network Connections]				
Local Name		Remote Name		Type
	Status	User Name		
[Running Tasks]				
Name	Path	Process ID	Priority	Min
Working Set	Max Working Set		Start Time	
	Version	Size	File Date	
system idle process	Not Available	0	0	
	Not Available		Not Available	Not
Available	Not Available		Not Available	Not
Available				
system	Not Available	4	8	0
	1413120	Not Available		Not Available
	Not Available		Not Available	
smss.exe	c:\windows\system32\smss.exe	360	11	
	204800	1413120	11/15/2002 9:26 AM	
	5.2.3663.0 (main.020715-1506)	46.00	KB	
	(47,104 bytes)	11/18/2002 7:00 AM		
csrss.exe	Not Available	416	13	Not
Available	Not Available		11/15/2002 9:30 AM	Not
Available	Not Available		Not Available	
winlogon.exe	c:\windows\system32\winlogon.exe	440	13	
	204800	1413120		

```

11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 512.00 KB (524,288 bytes)
11/18/2002 7:00 AM
services.exe      c:\windows\system32\services.exe
    484          9        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 99.00 KB (101,376 bytes)
11/18/2002 7:00 AM
lsass.exe        c:\windows\system32\lsass.exe 496      9
    204800   1413120 11/15/2002 9:30 AM
5.2.3663.0 (main.020715-1506) 13.00 KB
(13,312 bytes) 11/18/2002 7:00 AM
svchost.exe      c:\windows\system32\svchost.exe
    648          8        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
11/18/2002 7:00 AM
svchost.exe      c:\windows\system32\svchost.exe
    688          8        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
11/18/2002 7:00 AM
svchost.exe      Not Available 824      8
    Not Available Not Available
11/15/2002 9:30 AM Not Available Not
Available Not Available
svchost.exe      Not Available 856      8
    Not Available Not Available
11/15/2002 9:30 AM Not Available Not
Available Not Available
svchost.exe      c:\windows\system32\svchost.exe
    868          8        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 12.00 KB (12,288 bytes)
11/18/2002 7:00 AM
spoolsv.exe     c:\windows\system32\spoolsv.exe
    984          8        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 51.00 KB (52,224 bytes)
11/18/2002 7:00 AM
msdtc.exe       Not Available 1020      8
    Not Available
Available Not Available 11/15/2002 9:30 AM Not
Available Not Available Not Available
llssrv.exe      Not Available 1228      8
    Not Available Not Available
11/15/2002 9:30 AM Not Available Not
Available Not Available
svchost.exe      Not Available 1292      8
    Not Available Not Available
11/15/2002 9:30 AM Not Available Not
Available Not Available
mssearch.exe    c:\program files\common
files\mssearch\bin\mssearch.exe 1332      8
    204800   1413120 11/15/2002 9:30 AM
9.107.8022.0  68.00 KB (69,632 bytes)
10/20/2002 3:05 PM
dfssvc.exe      c:\windows\system32\dfssvc.exe
    1496          8        204800   1413120
11/15/2002 9:30 AM 5.2.3663.0
(main.020715-1506) 120.00 KB (122,880 bytes)
11/18/2002 7:00 AM
explorer.exe   c:\windows\explorer.exe 324
    8        204800   1413120 11/15/2002

```

```

10:48 AM 6.00.3663.0 (main.020715-1506)
    989.50 KB (1,013,248 bytes) 11/18/2002
7:00 AM
sqlmangr.exe    c:\program files\microsoft sql
server\80\tools\binn\sqlmangr.exe 412      8
    204800   1413120 11/15/2002 10:48 AM
2000.080.0731.00 72.57 KB (74,308 bytes)
11/11/2002 4:10 PM
helpctr.exe    c:\windows\pchealth\helpctr\binaries\helpct
r.exe          1036      8        204800   1413120
11/15/2002 10:48 AM 5.2.3663.0
(main.020715-1506) 670.00 KB (686,080 bytes)
11/11/2002 3:03 PM
helpsvc.exe    c:\windows\pchealth\helpctr\binaries\helpsv
c.exe          1308      8        204800   1413120
11/15/2002 10:48 AM 5.2.3663.0
(main.020715-1506) 683.50 KB (699,904 bytes)
11/11/2002 3:03 PM
wmiprvse.exe   Not Available 792      8
    Not Available Not Available
11/15/2002 10:48 AM Not Available Not
Available Not Available
[Loaded Modules]
Name      Version  Size      File Date Manufacturer
Path
smss      5.2.3663.0 (main.020715-1506) 46.00 KB
(47,104 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\smss.exe
ntdll     5.2.3663.0 (main.020715-1506) 697.50 KB
(714,240 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ntdll.dll
winlogon   5.2.3663.0 (main.020715-1506) 512.00 KB
(524,288 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winlogon.exe
kernel32   5.2.3663.0 (main.020715-1506) 934.50 KB
(956,928 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\kernel32.dll
msvcrt    7.0.3663.0 (main.020715-1506) 319.50 KB
(327,168 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msvcrt.dll
advapi32   5.2.3663.0 (main.020715-1506) 526.00 KB
(538,624 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\advapi32.dll
rpcrt4    5.2.3663.0 (main.020715-1506) 544.50 KB
(557,568 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rpcrt4.dll
user32    5.2.3663.0 (main.020715-1506) 547.50 KB
(560,640 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\user32.dll
gdi32     5.2.3663.0 (main.020715-1506) 246.00 KB
(251,904 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\gdi32.dll

```

```

userenv    5.2.3663.0 (main.020715-1506) 710.00 KB
(727,040 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\userenv.dll
nddeapi    5.2.3663.0 (main.020715-1506) 15.00 KB
(15,360 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\nddeapi.dll
crypt32   5.131.3663.0 (main.020715-1506)
545.00 KB (558,080 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\crypt32.dll
msasn1    5.2.3663.0 (main.020715-1506) 51.00 KB
(52,224 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msasn1.dll
secur32   5.2.3663.0 (main.020715-1506) 57.00 KB
(58,368 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\secur32.dll
winsta    5.2.3663.0 (main.020715-1506) 48.00 KB
(49,152 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winsta.dll
netapi32   5.2.3663.0 (main.020715-1506) 309.50 KB
(316,928 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netapi32.dll
profmap   5.2.3663.0 (main.020715-1506) 21.00 KB
(21,504 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\profmap.dll
regapi    5.2.3663.0 (main.020715-1506) 47.00 KB
(48,128 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\regapi.dll
ws2_32    5.2.3663.0 (main.020715-1506) 77.00 KB
(78,848 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ws2_32.dll
ws2help   5.2.3663.0 (main.020715-1506) 19.00 KB
(19,456 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\ws2help.dll
authz     5.2.3663.0 (main.020715-1506) 56.50 KB
(57,856 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\authz.dll
psapi     5.2.3663.0 (main.020715-1506) 21.00 KB
(21,504 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\psapi.dll
version   5.2.3663.0 (main.020715-1506) 16.50 KB
(16,896 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\version.dll
setupapi  5.2.3663.0 (main.020715-1506) 917.50 KB
(939,520 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\setupapi.dll
msgina   5.2.3663.0 (main.020715-1506) 1.19 MB
(1,252,864 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\msgina.dll

```

```

shsvcs  6.00.3663.0 (main.020715-1506) 122.50 KB (125,440 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\shsvcs.dll
shlwapi  6.00.3663.0 (main.020715-1506) 269.00 KB (275,456 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\shlwapi.dll
sfc     5.2.3663.0 (main.020715-1506) 4.50 KB (4,608 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\sfc.dll
sfc_os  5.2.3663.0 (main.020715-1506) 130.00 KB (133,120 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\sfc_os.dll
wintrust 5.131.3663.0 (main.020715-1506) 155.00 KB (158,720 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\wintrust.dll
ole32   5.2.3663.0 (main.020715-1506) 1.08 MB (1,134,592 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\ole32.dll
imagehlp 5.2.3663.0 (main.020715-1506) 123.00 KB (125,952 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\imagehlp.dll
comctl32 6.0 (main.020715-1506) 905.00 KB (926,720 bytes) 11/11/2002 8:57 AM Microsoft Corporation c:\windows\winsxs\x86_microsoft.windows.com\mon-controls_6595b64144ccf1df_6.0.100.0_x-ww_8a69ba05\comctl32.dll
winscard 5.2.3663.0 (main.020715-1506) 93.50 KB (95,744 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\winscard.dll
wtsapi32 5.2.3663.0 (main.020715-1506) 17.00 KB (17,408 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\wtsapi32.dll
winmm   5.2.3663.0 (main.020715-1506) 163.00 KB (166,912 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\winmm.dll
sxs     5.2.3663.0 (main.020715-1506) 685.50 KB (701,952 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\sxs.dll
shell32  6.00.3663.0 (main.020715-1506) 7.69 MB (8,067,072 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\shell32.dll
wldap32 5.2.3663.0 (main.020715-1506) 167.00 KB (171,008 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\wldap32.dll
cscdll  5.2.3663.0 (main.020715-1506) 92.50 KB (94,720 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\cscdll.dll
rsaenh   5.2.3663.0 (main.020715-1506) 174.07 KB (178,248 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\rsaenh.dll

```

```

wlnotify  5.2.3663.0 (main.020715-1506) 84.50 KB (86,528 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\wlnotify.dll
winspool 5.2.3663.0 (main.020715-1506) 131.50 KB (134,656 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\winspool.drv
mpr     5.2.3663.0 (main.020715-1506) 55.00 KB (56,320 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\mpr.dll
comctl32 5.82 (main.020715-1506) 559.50 KB (572,928 bytes) 11/11/2002 8:57 AM Microsoft Corporation c:\windows\winsxs\x86_microsoft.windows.com\mon-controls_6595b64144ccf1df_5.82.0.0_x-ww_8a69ba05\comctl32.dll
uxtheme  6.00.3663.0 (main.020715-1506) 190.50 KB (195,072 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\uxtheme.dll
mprapi   5.2.3663.0 (main.020715-1506) 78.00 KB (79,872 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\mprapi.dll
activeds 5.2.3663.0 (main.020715-1506) 184.50 KB (188,928 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\activeds.dll
adsldpc  5.2.3663.0 (main.020715-1506) 139.50 KB (142,848 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\adsldpc.dll
credui   5.2.3663.0 (main.020715-1506) 161.00 KB (164,864 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\credui.dll
atl      3.05.2144 82.00 KB (83,968 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\atl.dll
oleaut32 5.2.3663.0 483.50 KB (495,104 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\oleaut32.dll
rtutils   5.2.3663.0 (main.020715-1506) 31.00 KB (31,744 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\rtutils.dll
samlib   5.2.3663.0 (main.020715-1506) 40.50 KB (41,472 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\samlib.dll
cscui    5.2.3663.0 (main.020715-1506) 299.00 KB (306,176 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\cscui.dll
clbcatq  2001.12.4593.0 (main.020715-1506) 465.50 KB (476,672 bytes) 11/11/2002
3:01 PM Microsoft Corporation c:\windows\system32\clbcatq.dll
comres   2001.12.4593.0 (main.020715-1506) 778.00 KB (796,672 bytes) 11/18/2002
7:00 AM Microsoft Corporation c:\windows\system32\comres.dll

```

```

ntmarta  5.2.3663.0 (main.020715-1506) 110.50 KB (113,152 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntmarta.dll
services 5.2.3663.0 (main.020715-1506) 99.00 KB (101,376 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\services.exe
scesrv   5.2.3663.0 (main.020715-1506) 301.00 KB (308,224 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\scesrv.dll
umpnpmgr 5.2.3663.0 (main.020715-1506) 115.00 KB (117,760 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\umpnpmgr.dll
ncobjapi 5.2.3663.0 (main.020715-1506) 33.00 KB (33,792 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\ncobjapi.dll
msvcp60  6.05.2144.0 388.00 KB (397,312 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\msvcp60.dll
eventlog 5.2.3663.0 (main.020715-1506) 58.50 KB (59,904 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\eventlog.dll
lsass    5.2.3663.0 (main.020715-1506) 13.00 KB (13,312 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\lsass.exe
lsasrv   5.2.3663.0 (main.020715-1506) 711.00 KB (728,064 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\lsasrv.dll
samsrv   5.2.3663.0 (main.020715-1506) 408.00 KB (417,792 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\samsrv.dll
cryptdll 5.2.3663.0 (main.020715-1506) 30.00 KB (30,720 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\cryptdll.dll
dnsapi   5.2.3663.0 (main.020715-1506) 141.50 KB (144,896 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\dnsapi.dll
ntdsapi  5.2.3663.0 (main.020715-1506) 67.00 KB (68,608 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\ntdsapi.dll
msprivs  5.2.3663.0 (main.020715-1506) 44.00 KB (45,056 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\msprivs.dll
kerberos 5.2.3663.0 (main.020715-1506) 299.00 KB (306,176 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\kerberos.dll
msv1_0   5.2.3663.0 (main.020715-1506) 114.50 KB (117,248 bytes) 11/18/2002 7:00 AM Microsoft Corporation c:\windows\system32\msv1_0.dll

```

netlogon 5.2.3663.0 (main.020715-1506) 401.50 KB
 (411,136 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\netlogon.dll

 w32time 5.2.3663.0 (main.020715-1506) 205.50 KB
 (210,432 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\w32time.dll

 iphlpapi 5.2.3663.0 (main.020715-1506) 80.50 KB
 (82,432 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\iphlpapi.dll

 schannel 5.2.3663.0 (main.020715-1506) 138.50 KB
 (141,824 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\schannel.dll

 wdigest 5.2.3663.0 (main.020715-1506) 59.50 KB
 (60,928 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wdigest.dll

 rassfm 5.2.3663.0 (main.020715-1506) 20.50 KB
 (20,992 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\rassfm.dll

 kdcsvc 5.2.3663.0 (main.020715-1506) 190.50 KB
 (195,072 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\kdcsvc.dll

 ntdsa 5.2.3663.0 (main.020715-1506) 1.40 MB
 (1,465,344 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\ntdsa.dll
 ntdsatq 5.2.3663.0 (main.020715-1506) 27.50 KB
 (28,160 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\ntdsatq.dll

 mswock 5.2.3663.0 (main.020715-1506) 243.50 KB
 (249,344 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\mswock.dll

 esent 5.2.3663.0 (main.020715-1506) 925.50 KB
 (947,712 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\esent.dll
 certcli 5.2.3663.0 (main.020715-1506) 215.00 KB
 (220,160 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\certcli.dll

 cryptui 5.131.3663.0 (main.020715-1506)
 463.50 KB (474,624 bytes) 11/18/2002
 7:00 AM Microsoft Corporation
 c:\windows\system32\cryptui.dll
 scecli 5.2.3663.0 (main.020715-1506) 174.00 KB
 (178,176 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\scecli.dll

 ipsecsvc 5.2.3663.0 (main.020715-1506) 158.00 KB
 (161,792 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\ipsecsvc.dll

 oakley 5.2.3663.0 (main.020715-1506) 251.00 KB
 (257,024 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\oakley.dll

winipsec 5.2.3663.0 (main.020715-1506) 29.00 KB
 (29,696 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\winipsec.dll

 pstorsvc 5.2.3663.0 (main.020715-1506) 24.00 KB
 (24,576 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\pstorsvc.dll

 psbase 5.2.3663.0 (main.020715-1506) 81.00 KB
 (82,944 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\psbase.dll

 wshtcpip 5.2.3663.0 (main.020715-1506) 17.00 KB
 (17,408 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wshtcpip.dll

 dsenhn 5.2.3663.0 (main.020715-1506) 129.07 KB
 (132,168 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\dsenhn.dll

 wlbsctrl 5.2.3663.0 (main.020715-1506) 75.50 KB
 (77,312 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wlbsctrl.dll

 svchost 5.2.3663.0 (main.020715-1506) 12.00 KB
 (12,288 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\svchost.exe

 rpcss 5.2.3663.0 (main.020715-1506) 266.00 KB
 (272,384 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\rpcss.dll
 termsrv 5.2.3663.0 (main.020715-1506) 215.00 KB
 (220,160 bytes) 11/11/2002 3:01 PM Microsoft
 Corporation c:\windows\system32\termsrv.dll

 icaapi 5.2.3663.0 (main.020715-1506) 10.00 KB
 (10,240 bytes) 11/11/2002 3:01 PM Microsoft
 Corporation c:\windows\system32\icaapi.dll

 mstlsapi 5.2.3663.0 (main.020715-1506) 103.00 KB
 (105,472 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\mstlsapi.dll

 wzcsvc 5.2.3663.0 (main.020715-1506) 271.00 KB
 (277,504 bytes) 11/16/2002 8:48 AM Microsoft
 Corporation c:\windows\system32\wzcsvc.dll

 wmi 5.2.3663.0 (main.020715-1506) 6.50 KB
 (6,656 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wmi.dll
 dhcpcsvc 5.2.3663.0 (main.020715-1506) 101.00 KB
 (103,424 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\dhcpcsvc.dll

 rastls 5.2.3663.0 (main.020715-1506) 147.50 KB
 (151,040 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\rastls.dll

 rasapi32 5.2.3663.0 (main.020715-1506) 217.00 KB
 (222,208 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\rasapi32.dll

rasman 5.2.3663.0 (main.020715-1506) 55.00 KB
 (56,320 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\rasman.dll

 tapi32 5.2.3663.0 (main.020715-1506) 169.50 KB
 (173,568 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\tapi32.dll

 raschap 5.2.3663.0 (main.020715-1506) 105.00 KB
 (107,520 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\raschap.dll

 schedsvc 5.2.3663.0 (main.020715-1506) 164.00 KB
 (167,936 bytes) 11/11/2002 3:03 PM Microsoft
 Corporation c:\windows\system32\schedsvc.dll

 msidle 6.00.3663.0 (main.020715-1506)
 5.50 KB (5,632 bytes) 11/18/2002
 7:00 AM Microsoft Corporation
 c:\windows\system32\msidle.dll
 wkssvc 5.2.3663.0 (main.020715-1506) 122.00 KB
 (124,928 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wkssvc.dll

 wiarpco 5.2.3663.0 (main.020715-1506) 29.50 KB
 (30,208 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\wiarpco.dll

 cryptsvc 5.2.3663.0 (main.020715-1506) 49.00 KB
 (50,176 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\cryptsvc.dll

 vssapi 5.2.3663.0 (main.020715-1506) 471.00 KB
 (482,304 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\vssapi.dll

 dmserver 5.2.3663.0 (main.020715-1506) 22.00 KB
 (22,528 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\dmserver.dll

 ersvc 5.2.3663.0 (main.020715-1506) 21.00 KB
 (21,504 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\ersvc.dll
 es 2001.12.4593.0 (main.020715-1506)
 218.00 KB (223,232 bytes) 11/18/2002
 7:00 AM Microsoft Corporation
 c:\windows\system32\es.dll
 pchssvc 5.2.3663.0 (main.020715-1506) 30.00 KB
 (30,720 bytes) 11/11/2002 3:03 PM Microsoft
 Corporation c:\windows\pchealth\helpctr\binaries\pchssvc
 .dll
 srvsvc 5.2.3663.0 (main.020715-1506) 87.50 KB
 (89,600 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\srvsvc.dll

 seclogon 5.2.3663.0 (main.020715-1506) 15.50 KB
 (15,872 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\seclogon.dll

 sens 5.2.3663.0 (main.020715-1506) 35.00 KB
 (35,840 bytes) 11/18/2002 7:00 AM Microsoft
 Corporation c:\windows\system32\sens.dll

```

trkwks 5.2.3663.0 (main.020715-1506) 80.50 KB
(82,432 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\trkwks.dll

wmisvc 5.2.3663.0 (main.020715-1506) 113.50 KB
(116,224 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wmisvc.dll

wbemcomm 5.2.3663.0 (main.020715-1506) 205.00 KB
(209,920 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wbemcomm.dll

wuauserv 5.4.3663.0 (main.020715-1506) 9.00 KB
(9,216 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wuauserv.dll

wuaueng 5.4.3663.0 (main.020715-1506) 183.00 KB
(187,392 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wuaueng.dll

advpack 6.00.3663.0 (main.020715-1506)
93.00 KB (95,232 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\advpack.dll

wininet 6.00.3663.0 (main.020715-1506)
581.00 KB (594,944 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\wininet.dll

browser 5.2.3663.0 (main.020715-1506) 49.50 KB
(50,688 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\browser.dll

wbemcore 5.2.3663.0 (main.020715-1506) 448.50 KB
(459,264 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wbemcore.dll

esscli 5.2.3663.0 (main.020715-1506) 232.00 KB
(237,568 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\esscli.dll

fastprox 5.2.3663.0 (main.020715-1506) 434.50 KB
(444,928 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\fastprox.dll

winhttp 5.2.3663.0 (main.020715-1506) 322.50 KB
(330,240 bytes) 11/11/2002 8:57 AM Microsoft
Corporation c:\windows\winsxs\x86_microsoft.windows.win
http_6595b64144ccf1df_5.1.0.0-x-
ww_e0651936\winhttp.dll

wmutils 5.2.3663.0 (main.020715-1506) 88.50 KB
(90,624 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wmutils.dll

repdrvfs 5.2.3663.0 (main.020715-1506) 140.00 KB
(143,360 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\repdrvfs.dll

wmiprvsd 5.2.3663.0 (main.020715-1506) 403.50 KB
(413,184 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wmiprvsd.dll

```

```

wbemess 5.2.3663.0 (main.020715-1506) 253.00 KB
(259,072 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wbemess.dll

ncprov 5.2.3663.0 (main.020715-1506) 42.50 KB
(43,520 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\ncprov.dll

sensapi 5.2.3663.0 (main.020715-1506) 6.00 KB
(6,144 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\sensapi.dll

wbemserv 5.2.3663.0 (main.020715-1506) 42.50 KB
(43,520 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbem\wbemserv.dll

actxprxy 6.00.3663.0 (main.020715-1506)
95.00 KB (97,280 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\actxprxy.dll

netman 5.2.3663.0 (main.020715-1506) 147.00 KB
(150,528 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netman.dll

wzcsapi 5.2.3663.0 (main.020715-1506) 24.00 KB
(24,576 bytes) 11/16/2002 8:48 AM Microsoft
Corporation c:\windows\system32\wzcsapi.dll

netshell 5.2.3663.0 (main.020715-1506) 1.57 MB
(1,648,128 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netshell.dll

clusapi 5.2.3663.0 (main.020715-1506) 54.50 KB
(55,808 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\clusapi.dll

wbemcons 5.2.3663.0 (main.020715-1506) 69.00 KB
(70,656 bytes) 11/11/2002 3:01 PM Microsoft
Corporation c:\windows\system32\wbemcons.dll

rasdlg 5.2.3663.0 (main.020715-1506) 637.00 KB
(652,288 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rasdlg.dll

rasadhlpl 5.2.3663.0 (main.020715-1506) 6.00 KB
(6,144 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\rasadhlpl.dll

spoolsv 5.2.3663.0 (main.020715-1506) 51.00 KB
(52,224 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\spoolsv.exe

spoolss 5.2.3663.0 (main.020715-1506) 75.50 KB
(77,312 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\spoolss.dll

localspl 5.2.3663.0 (main.020715-1506) 284.00 KB
(290,816 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\localspl.dll

cnbjmon 5.2.3631.0 (Lab03_dev\skatari).020509-1043)
45.50 KB (46,592 bytes) 11/16/2002

```

```

8:46 AM Microsoft Corporation
c:\windows\system32\cnbjmon.dll

pjlmmon 5.2.3663.0 (main.020715-1506) 14.00 KB
(14,336 bytes) 11/16/2002 8:47 AM Microsoft
Corporation c:\windows\system32\pjlmmon.dll

tcpmon 5.2.3663.0 (main.020715-1506) 41.50 KB
(42,496 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\tcpmon.dll

usbmon 5.2.3663.0 (main.020715-1506) 16.00 KB
(16,384 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\usbmon.dll

winrnrr 5.2.3663.0 (main.020715-1506) 14.50 KB
(14,848 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\winrnrr.dll

wshqos 5.2.3663.0 (main.020715-1506) 22.50 KB
(23,040 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\wshqos.dll

win32spl 5.2.3663.0 (main.020715-1506) 120.00 KB
(122,880 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\win32spl.dll

netrap 5.2.3663.0 (main.020715-1506) 11.50 KB
(11,776 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\netrap.dll

inetpp 5.2.3663.0 (main.020715-1506) 68.50 KB
(70,144 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\inetpp.dll

icmp 5.2.3663.0 (main.020715-1506) 4.00 KB
(4,096 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\icmp.dll

msssearch 9.107.8022.0 68.00 KB (69,632 bytes)
10/20/2002 3:05 PM Microsoft Corporation
c:\program files\common
files\mssearch\bin\mssearch.exe

mssws 9.107.8022.0 32.00 KB (32,768 bytes)
10/20/2002 3:06 PM Microsoft Corporation
c:\program files\common
files\mssearch\bin\mssws.dll

mssrch 9.107.8022.0 1.24 MB (1,302,528
bytes) 10/20/2002 3:06 PM Microsoft Corporation
c:\progra~1\common~1\mssearch\bin\ms
srch.dll

security 5.2.3663.0 (main.020715-1506) 5.00 KB
(5,120 bytes) 11/18/2002 7:00 AM Microsoft
Corporation c:\windows\system32\security.dll

tquery 9.107.8022.0 1.46 MB (1,536,000
bytes) 10/20/2002 3:06 PM Microsoft Corporation
c:\program files\common
files\mssearch\bin\tquery.dll

propdefds 9.107.8022.0 136.00 KB (139,264
bytes) 10/20/2002 3:06 PM Microsoft Corporation
c:\progra~1\common~1\mssearch\bin\pr
opdefds.dll

srchidx 9.107.8022.0 384.00 KB (393,216
bytes) 10/20/2002 3:06 PM Microsoft Corporation

```

```

c:\progra~1\common~1\system\mssearch\bin\sr
chidx.dll      5.2.3663.0 (main.020715-1506) 3.50 KB
iprop          5.2.3663.0 (main.020715-1506) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\iprop.dll
dfssvc          5.2.3663.0 (main.020715-1506) 120.00 KB
(122,880 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\dfssvc.exe

resutils        5.2.3663.0 (main.020715-1506) 56.00 KB
(57,344 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\resutils.dll

mfca2u          6.05.2178.0   960.00 KB (983,040
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\mfca2u.dll
wsock32          5.2.3663.0 (main.020715-1506) 22.00 KB
(22,528 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\wsock32.dll

explorer         6.00.3663.0 (main.020715-1506)
989.50 KB (1,013,248 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\explorer.exe
browseui         6.00.3663.0 (main.020715-1506)
999.50 KB (1,023,488 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\browseui.dll
shdocvw          6.00.3663.0 (main.020715-1506)
1.28 MB (1,341,952 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shdocvw.dll
apphelp          5.2.3663.0 (main.020715-1506) 117.00 KB
(119,808 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\apphelp.dll

themeui          6.00.3663.0 (main.020715-1506)
360.00 KB (368,640 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\themeui.dll
msimg32          5.2.3663.0 (main.020715-1506) 4.50 KB
(4,608 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\msimg32.dll

linkinfo          5.2.3663.0 (main.020715-1506) 15.50 KB
(15,872 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\linkinfo.dll

ntshrui          6.00.3663.0 (main.020715-1506)
134.50 KB (137,728 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\ntshrui.dll
urlmon           6.00.3663.0 (main.020715-1506)
442.00 KB (452,608 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\urlmon.dll
webcheck          6.00.3663.0 (main.020715-1506)
253.50 KB (259,584 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\webcheck.dll
stobject          5.2.3663.0 (main.020715-1506) 116.50 KB
(119,296 bytes) 11/18/2002 7:00 AM Microsoft

```

```

Corporation    c:\windows\system32\stobject.dll

batmeter         6.00.3663.0 (main.020715-1506)
28.00 KB (28,672 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\batmeter.dll
powrprof         6.00.3663.0 (main.020715-1506)
14.00 KB (14,336 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\powrprof.dll
shdoclc          6.00.3663.0 (main.020715-1506)
521.00 KB (533,504 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll
printui          5.2.3663.0 (main.020715-1506) 522.00 KB
(534,528 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\printui.dll

cfgmgr32         5.2.3663.0 (main.020715-1506) 17.00 KB
(17,408 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\cfgmgr32.dll

drprov           5.2.3663.0 (main.020715-1506) 12.00 KB
(12,288 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\drprov.dll

ntlanman         5.2.3663.0 (main.020715-1506) 39.50 KB
(40,448 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\ntlanman.dll

netui0            5.2.3663.0 (main.020715-1506) 73.00 KB
(74,752 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\netui0.dll

netutil          5.2.3663.0 (main.020715-1506) 176.50 KB
(180,736 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\netutil.dll

davclnt          5.2.3663.0 (main.020715-1506) 23.00 KB
(23,552 bytes) 11/18/2002 7:00 AM Microsoft
Corporation    c:\windows\system32\davclnt.dll

sqlmangr         2000.080.0731.00  72.57 KB (74,308 bytes)
11/11/2002 4:10 PM Microsoft Corporation
c:\program files\microsoft\sql
server\80\tools\binn\sqlmangr.exe
sqlunirl        2000.080.0728.00  176.56 KB (180,800
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\sqlunirl.dll
comdlg32          6.00.3663.0 (main.020715-1506)
255.00 KB (261,120 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
w95scm           2000.080.0731.00  48.56 KB (49,728 bytes)
11/11/2002 4:09 PM Microsoft Corporation
c:\program files\microsoft\sql
server\80\tools\binn\w95scm.dll
odbc32            3.520.8713.0   212.00 KB (217,088
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbc32.dll
sqlsvc            2000.080.0731.00  92.56 KB (94,784 bytes)
11/11/2002 4:09 PM Microsoft Corporation

```

```

c:\program files\microsoft\sql
server\80\tools\binn\sqlsvc.dll
odbc3cp          2000.081.9030.00  24.00 KB (24,576 bytes)
11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbc3cp.dll
sqlresld         2000.080.0382.00  28.56 KB (29,248 bytes)
11/11/2002 4:09 PM Microsoft Corporation
c:\program files\microsoft\sql
server\80\tools\binn\sqlresld.dll
odbcint          3.520.8713.0   92.00 KB (94,208 bytes)
11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\odbcint.dll
sqlsvc           2000.080.0194.00  24.00 KB (24,576 bytes)
11/11/2002 4:09 PM Microsoft Corporation
c:\program files\microsoft\sql
server\80\tools\binn\resources\1033\sqlsvc.rll
sqlmangr         2000.080.0194.00  96.00 KB (98,304 bytes)
11/11/2002 4:10 PM Microsoft Corporation
c:\program files\microsoft\sql
server\80\tools\binn\resources\1033\sqlmangr.rll
helpctr          5.2.3663.0 (main.020715-1506) 670.00 KB
(686,080 bytes) 11/11/2002 3:03 PM Microsoft
Corporation
c:\windows\pchealth\helpctr\binaries\helpct
r.exe
hcappres         5.2.3663.0 (main.020715-1506) 6.50 KB
(6,656 bytes) 11/11/2002 3:03 PM Microsoft
Corporation
c:\windows\pchealth\helpctr\binaries\hcapp
res.dll
itss             5.2.3663.0 (main.020715-1506) 118.50 KB
(121,344 bytes) 11/18/2002 7:00 AM Microsoft
Corporation
c:\windows\system32\itss.dll
msxml13          8.40.8806.0   1.06 MB (1,107,968
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msxml13.dll
pchshell         5.2.3663.0 (main.020715-1506) 94.00 KB
(96,256 bytes) 11/11/2002 3:03 PM Microsoft
Corporation
c:\windows\pchealth\helpctr\binaries\pchshe
ll.dll
mlang            6.00.3663.0 (main.020715-1506)
564.50 KB (578,048 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mlang.dll
mshtml           6.00.3663.0 (main.020715-1506)
2.57 MB (2,690,560 bytes) 11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mshtml.dll
msimtf           5.2.3663.0 (main.020715-1506) 141.00 KB
(144,384 bytes) 11/18/2002 7:00 AM Microsoft
Corporation
c:\windows\system32\msimtf.dll
msctf             5.2.3663.0 (main.020715-1506) 273.00 KB
(279,552 bytes) 11/18/2002 7:00 AM Microsoft
Corporation
c:\windows\system32\msctf.dll
jscript           5.6.0.7727   412.00 KB (421,888
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\jscript.dll
msls31            3.10.349.0   137.00 KB (140,288
bytes) 11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll

```

```

imm32      5.2.3663.0 (main.020715-1506) 104.00 KB
(106,496 bytes)   11/18/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\imm32.dll
mshtmled       6.00.3663.0 (main.020715-1506)
               424.00 KB (434,176 bytes)   11/18/2002
7:00 AM Microsoft Corporation
c:\windows\system32\mshtmled.dll
vbscript       5.6.0.7727    388.00 KB (397,312
bytes)   11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
mfc42          6.05.2178.0   960.00 KB (983,040
bytes)   11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\mfc42.dll
msinfo          5.2.3663.0 (main.020715-1506) 352.00 KB
(360,448 bytes) 11/11/2002 3:03 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\msinfo
.dll
riched32        5.2.3663.0 (main.020715-1506) 3.50 KB
(3,584 bytes)  11/18/2002 7:00 AM Microsoft
Corporation      c:\windows\system32\riched32.dll
riched20        5.31.23.1217   394.50 KB (403,968
bytes)   11/18/2002 7:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
wbemprox        5.2.3663.0 (main.020715-1506) 16.00 KB
(16,384 bytes) 11/11/2002 3:01 PM Microsoft
Corporation      c:\windows\wbem\wbemprox.dll
helpsvc         5.2.3663.0 (main.020715-1506) 683.50 KB
(699,904 bytes) 11/11/2002 3:03 PM Microsoft
Corporation      c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name     Name      State     Start Mode
Service Type     Path      Error Control
Start Name       Tag ID
Alerter          Alerter   Stopped   Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice     Normal    NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Audio     AudioSrv Stopped   Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser  Browser  Running   Auto
Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CiSvc Stopped Manual
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed File System Dfs Running
Auto Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client DHCP Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice    Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client        DnsCache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice    Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Event Log          EventLog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support  helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL          HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0

```

```

IMAPI CD-Burning COM Service ImaPIService
Stopped Disabled Own Process
"c:\windows\system32\imapi.exe"
Normal LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Running
Auto Own Process
c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Running
Auto Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvrc
Stopped Disabled Own Process
c:\windows\system32\mnmsrvrc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
Microsoft Search MSSEARCH Running Auto
Share Process "c:\program
files\common files\system\mssearch\bin\mssearch.exe"
Normal LocalSystem 0
MSSQLSERVER MSSQLSERVER Stopped
Manual Own Process
c:\sql2k\mssql\binn\sqlservr.exe
Normal LocalSystem 0
MSSQLServerADHelper MSSQLServerADHelper Stopped
Manual Own Process c:\program
files\microsoft\sql server\80\tools\binn\sqladhlp.exe
Normal LocalSystem 0
Network DDE NetDDE Stopped Disabled
Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsm Stopped
Disabled Share Process

```

```

c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
Running Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmssp
Running Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage Ntmsvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSSessMgr
Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Running
Auto Share Process
c:\windows\system32\svchost.exe -k regsvc
Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0

```

```

Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost -k rpcss
Normal LocalSystem 0
Resultant Set of Policy Provider RSOPProv
Stopped Manual Share Process
c:\windows\system32\rspoprov.exe
Normal LocalSystem 0
Special Administration Console Helper sasvr
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSrv Stopped Manual
Share Process
c:\windows\system32\scardsrv.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Internet Connection Firewall (ICF) / Internet
Connection Sharing (ICS) SharedAccess
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
SQLSERVERAGENT SQLSERVERAGENT Stopped
Manual Own Process
c:\sql2k\mssql\bin\sqlagent.exe
Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
Stopped Manual Own Process
c:\windows\system32\svchost.exe -k swprv
Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\windows\system32\smlogsvc.exe
Normal NT Authority\NetworkService 0

```

```

Telephony Tapisrv Stopped Manual Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Manual Share Process
c:\windows\system32\svchost.exe -k termsvc
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet Tlntsvr Stopped Disabled Own Process
c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LOCAL SERVICE 0
Distributed Link Tracking Server TrkSrv
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Upload Manager uploadmgr Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vvssvc.exe Normal
LocalSystem 0
Windows Time W32Time Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number WmdmPmSp Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Windows Management Instrumentation Driver Extensions
    Wmi      Stopped  Manual  Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal  LocalSystem  0
WMI Performance Adapter   WmiApSrv  Stopped
    Manual  Own Process
        c:\windows\system32\wbem\wmiapsrv.exe
    Normal  LocalSystem  0
Automatic Updates   wuauserv  Running  Auto
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal  LocalSystem  0
Wireless Configuration   WZCSVc  Running
    Auto  Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal  LocalSystem  0

[Program Groups]

Group Name      Name      User Name
Accessories     Default User:Accessories
    Default User
Accessories\Accessibility  Default
User:Accessories\Accessibility  Default User
Accessories\Entertainment  Default
User:Accessories\Entertainment  Default User
Startup  Default User:Startup  Default User
Accessories     All Users:Accessories  All
Users
Accessories\Accessibility  All
Users:Accessories\Accessibility  All Users
Accessories\Communications  All
Users:Accessories\Communications  All Users
Accessories\Entertainment  All
Users:Accessories\Entertainment  All Users
Accessories\System Tools  All
Users:Accessories\System Tools  All Users
Administrative Tools  All
Users:Administrative Tools  All Users
Microsoft SQL Server  All Users:Microsoft SQL
Server  All Users
Startup  All Users:Startup  All Users
Accessories     NT AUTHORITY\SYSTEM:Accessories
    NT AUTHORITY\SYSTEM
Accessories\Accessibility  NT
AUTHORITY\SYSTEM:Accessories\Accessibility  NT
AUTHORITY\SYSTEM
Accessories\Entertainment  NT
AUTHORITY\SYSTEM:Accessories\Entertainment  NT
AUTHORITY\SYSTEM
Startup  NT AUTHORITY\SYSTEM:Startup  NT
AUTHORITY\SYSTEM
Accessories     QUARK\Administrator:Accessories
    QUARK\Administrator
Accessories\Accessibility  QUARK\Administrator:Accessories\Accessibili
ty  QUARK\Administrator
Accessories\Entertainment  QUARK\Administrator:Accessories\Entertainme
nt  QUARK\Administrator

```

```

Administrative Tools
    QUARK\Administrator:Administrative Tools
    QUARK\Administrator
SANblade Control VIX
    QUARK\Administrator:SANblade Control VIX
    QUARK\Administrator
Startup  QUARK\Administrator:Startup
    QUARK\Administrator

[Startup Programs]

Program  Command  User Name Location
desktop  desktop.ini  NT AUTHORITY\SYSTEM
Startup
desktop  desktop.ini  QUARK\Administrator
Startup
desktop  desktop.ini  .DEFAULT Startup
desktop  desktop.ini  All Users Common
Startup
Service Manager
    c:\program~1\micros~1\80\tools\binn\sqlmangr
.exe /n All Users Common Startup

[OLE Registration]

Object  Local Server
Sound (OLE2)  sndrec32.exe
Media Clip  mplay32.exe
Video Clip  mplay32.exe /avi
MIDI Sequence  mplay32.exe /mid
Sound  Not Available
Media Clip  Not Available
Windows Media Player 7  Not Available
WordPad Document  "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object  Not
Available
Bitmap Image  mspaint.exe

[Windows Error Reporting]

Time      Type      Details

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]

[Summary]

Item      Value
Version  6.0.3663.0
Build    63663
Application Path  C:\Program Files\Internet
Explorer
Language  English (United States)
Active Printer  Not Available
Cipher Strength  128-bit
Content Advisor  Disabled

```

IEAK Install	No			
[File Versions]				
File	Version	Size	Date	Path
actxprxy.dll	6.0.3663.0	95 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3663.0	93 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3663.0	89 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browselc.dll	6.0.3663.0	62 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3663.0	1,000 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3663.0	141 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3663.0	560 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3663.0	188 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3663.0	332 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3663.0	292 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
ipeers.dll	6.0.3663.0	229 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3663.0	59 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf	Not Available	19 KB	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Not Available

iexplore.exe	6.0.3663.0	90 KB
	11/18/2002 6:00:00 AM	C:\Program
Files\Internet Explorer		Microsoft Corporation
imgutil.dll	6.0.3663.0	30 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcp1.cpl	6.0.3663.0	296 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcpcl.dll	6.0.3663.0	108 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3663.0	71 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mlang.dll	6.0.3663.0	565 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	2000.7.25.0	92 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Not Available
mshta.exe	6.0.3663.0	27 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3663.0	2,628 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tb	6.0.3663.0	1,319 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtimed.dll	6.0.3663.0	424 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmller.dll	6.0.3663.0	55 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3663.0	47 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msidnt1d.dll	6.0.3663.0	15 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msieftp.dll	6.0.3663.0	232 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3663.0	132 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3663.0	490 KB
	11/18/2002 6:00:00 AM	

occache.dll	6.0.3663.0	88 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
procexe.ocx	6.3.3663.0	78 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Intel Corporation
sendmail.dll	6.0.3663.0	54 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll	6.0.3663.0	521 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll	6.0.3663.0	1,311 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll	6.0.3663.0	23 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll	6.0.3663.0	269 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx	1.3.0.3130	57 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
url.dll	6.0.3663.0	40 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
urlmon.dll	6.0.3663.0	442 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll	6.0.3663.0	254 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
wininet.dll	6.0.3663.0	581 KB
	11/18/2002 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item	Value
Connection Preference	Never dial

LAN Settings

AutoConfigProxy	Not Available
AutoProxyDetectMode	Disabled
AutoConfigURL	
Proxy	Disabled
ProxyServer	
ProxyOverride	

[Cache]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Page Refresh Type	Automatic
Temporary Internet Files Folder	C:\Documents and Settings\NetworkService.NT AUTHORITY\Local Settings\Temporary Internet Files
Total Disk Space	Not Available
Available Disk Space	Not Available
Maximum Cache Size	Not Available
Available Cache Size	Not Available

[List of Objects]

Program File	Status	CodeBase
No cached object information available		

[Content]

[Following are sub-categories of this main category]
[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Medium-low
Trusted sites	Low
Internet	Medium
Restricted sites	High

Client System Configuration

System Information report written at: 11/14/2002
05:12:33 PM
[System Information]

[Following are sub-categories of this main category]

[System Summary]

Item	Value
OS Name	Microsoft Windows 2000 Server
Version	5.0.2195 Service Pack 2 Build 2195
OS Manufacturer	Microsoft Corporation
System Name	PCI
System Manufacturer	Compaq
System Model	ProLiant DL360 G2
System Type	X86-based PC
Processor x86 Family 6 Model 11 Stepping 1	GenuineIntel ~1396 Mhz
Processor x86 Family 6 Model 11 Stepping 1	GenuineIntel ~1396 Mhz
BIOS Version	03/19/02
Windows Directory	C:\WINNT
System Directory	C:\WINNT\System32
Boot Device	\Device\Harddisk0\Partition1
Locale	United States
User Name	PCI\Administrator
Time Zone	Central Standard Time
Total Physical Memory	523,800 KB
Available Physical Memory	265,408 KB
Total Virtual Memory	1,801,808 KB
Available Virtual Memory	1,293,332 KB
Page File Space	1,278,008 KB
Page File C:\pagefile.sys	

[Hardware Resources]

[Following are sub-categories of this main category]

[Conflicts/Sharing]

Resource	Device
IRQ 7	Standard OpenHCD USB Host Controller
IRQ 7	PCI standard host CPU bridge

[DMA]

Channel	Device	Status
7	Direct memory access controller	OK
2	Standard floppy disk controller	OK

[Forced Hardware]

Device	PNP Device ID
No Forced Hardware	

[I/O]

Address Range	Device	Status
0x0000-0x0CFF	PCI bus	OK
0x0000-0x0CFF	PCI bus	OK

0x00000-0x0CFF	Direct memory access controller
OK	
0x03B0-0x03DF	PCI bus
OK	OK
0x03B0-0x03DF	ATI Technologies Inc. RAGE XL PCI
OK	
0x2400-0x24FF	ATI Technologies Inc. RAGE XL PCI
OK	
0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI
OK	
0x1800-0x18FF	Base System Device
OK	OK
0x2800-0x28FF	Base System Device
OK	OK
0xA79-0x0A79	ISAPNP Read Data Port
OK	OK
0x0279-0x0279	ISAPNP Read Data Port
OK	OK
0x02F4-0x02F7	ISAPNP Read Data Port
OK	OK
0xF50-0x0F58	Motherboard resources
OK	OK
0x0020-0x0021	Programmable interrupt controller
OK	
0x00A0-0x00A1	Programmable interrupt controller
OK	
0x0C00-0x0C01	Programmable interrupt controller
OK	
0x0040-0x0043	System timer
OK	OK
0x0080-0x008F	Direct memory access controller
OK	
0x0C00-0x0CDF	Direct memory access controller
OK	
0x040B-0x040B	Direct memory access controller
OK	
0x04D6-0x04D6	Direct memory access controller
OK	
0x0061-0x0061	System speaker
OK	OK
0x0060-0x0060	Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard	OK
0x0064-0x0064	Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard	OK
0x002E-0x002F	Extended IO Bus
OK	OK
0x0220-0x0223	Extended IO Bus
OK	OK
0x0230-0x0231	Extended IO Bus
OK	OK
0x0240-0x025F	Extended IO Bus
OK	OK
0x03F8-0x03FF	Communications Port (COM1)
OK	OK
0x03F2-0x03F5	Standard floppy disk controller
OK	
0x03F7-0x03F7	Standard floppy disk controller
OK	
0x2000-0x200F	Standard Dual Channel PCI IDE
Controller	OK
0x27FC-0x27FF	Standard Dual Channel PCI IDE
Controller	OK
0x01F0-0x01F7	Primary IDE Channel
OK	OK
0x03F6-0x03F6	Primary IDE Channel
OK	OK
0x0170-0x0177	Secondary IDE Channel
OK	OK
0x0376-0x0376	Secondary IDE Channel
OK	OK
0x3000-0x30FF	PCI bus
OK	OK
0x3000-0x30FF	Compaq Smart Array 5i
OK	OK
0x4000-0x40FF	PCI bus
OK	OK
0x4000-0x40FF	QLogic QLA23xx PCI Fibre Channel
Adapter	OK

[IRQs]

IRQ Number	Device
9	Microsoft ACPI-Compliant System
24	ATI Technologies Inc. RAGE XL PCI

3	Base System Device
15	Base System Device
1	Standard 101/102-Key or Microsoft
PS/2 Keyboard	
12	PS/2 Compatible Mouse
4	Communications Port (COM1)
6	Standard floppy disk controller
14	Primary IDE Channel
7	Standard OpenHCD USB Host Controller
7	PCI standard host CPU bridge
31	Compaq Smart Array 5i
30	Compaq NC7780 Gigabit Server Adapter
29	Compaq NC7780 Gigabit Server Adapter #2
28	QLogic QLA23xx PCI Fibre Channel Adapter

[Memory]

Range	Device	Status
0xA0000-0xBFFF	PCI bus	OK
0xA0000-0xBFFF	ATI Technologies Inc. RAGE XL PCI	OK
0xF5E00000-0xF6FFFFFF	PCI bus	OK
0xF600000-0xF6FFFFFF	ATI Technologies Inc.	
RAGE XL PCI	OK	
0xF5F00000-0xF5FF0FFF	ATI Technologies Inc.	
RAGE XL PCI	OK	
0xF5FE0000-0xF5FE01FF	Base System Device	OK
0xF5FD0000-0xF5FD07FF	Base System Device	OK
0xF5FC0000-0xF5FC1FFF	Base System Device	OK
0xF5F00000-0xF5F7FFFF	Base System Device	OK
0xF5EF0000-0xF5EF0FFF	Standard OpenHCD USB	
Host Controller	OK	
0x7D0000-0x7EFFFFFF	PCI bus	OK
0x7EC0000-0x7EFFFFFF	Compaq Smart Array 5i	
OK		
0x7DF0000-0x7DF3FFF	Compaq Smart Array 5i	
OK		
0x7EB0000-0x7EBFFFFF	Compaq NC7780 Gigabit	
Server Adapter	OK	
0x7EA0000-0x7EAFFFFF	Compaq NC7780 Gigabit	
Server Adapter #2	OK	
0x7FF0000-0x7FFF0FFF	PCI bus	OK
0x7FF0000-0x7FFF0FFF	QLogic QLA23xx PCI	
OK		

[Components]

[Following are sub-categories of this main category]

[Multimedia]

[Following are sub-categories of this main category]

[Audio Codecs]

Codec	Manufacturer	Description
	Status	File
	Creation Date	Version
c:\winnt\system32\imaadp32.acm	Microsoft	
Corporation	OK	
		C:\WINNT\System32\IMAADP32.ACML

```

5.00.2134.1      16.27 KB (16,656 bytes)
12/11/1999 6:00:00 AM
c:\winnt\system32\msg723.acm Microsoft Corporation
OK
C:\WINNT\System32\MSG723.ACM 4.4.3385
106.77 KB (109,328 bytes) 4/3/2002
11:41:40 AM
c:\winnt\system32\tssoft32.acm      DSP GROUP,
INC.
OK
C:\WINNT\System32\TSSOFT32.ACM
1.01      9.27 KB (9,488 bytes)
12/11/1999 6:00:00 AM
c:\winnt\system32\msgsm32.acm Microsoft Corporation
OK
C:\WINNT\System32\MSGSM32.ACM 5.00.2134.1
22.27 KB (22,800 bytes) 12/11/1999
6:00:00 AM
c:\winnt\system32\iac25_32.ax Intel Corporation
Indeo® audio software OK
C:\WINNT\System32\IAC25_32.AX 2.05.53
195.00 KB (199,680 bytes) 12/11/1999
6:00:00 AM
c:\winnt\system32\msg711.acm Microsoft Corporation
OK
C:\WINNT\System32\MSG711.ACM 5.00.2134.1
10.27 KB (10,512 bytes) 12/11/1999
6:00:00 AM
c:\winnt\system32\lhacm.acm Microsoft Corporation
OK
C:\WINNT\System32\LHACM.ACM 4.4.3385
33.27 KB (34,064 bytes) 4/3/2002
11:41:41 AM
c:\winnt\system32\msadp32.acm Microsoft Corporation
OK
C:\WINNT\System32\MSADP32.ACM 5.00.2134.1
14.77 KB (15,120 bytes) 12/11/1999
6:00:00 AM

[Video Codecs]

Codec   Manufacturer   Description
Status   File        Version   Size
Creation Date

c:\winnt\system32\ir50_32.dll Intel Corporation
Indeo® video 5.10 OK
C:\WINNT\System32\IR50_32.DLL
R.5.10.15.2.55 737.50 KB (755,200
bytes) 12/11/1999 6:00:00 AM
c:\winnt\system32\msh263.drv Microsoft Corporation
OK
C:\WINNT\System32\MSH263.DRV 4.4.3385
252.27 KB (258,320 bytes) 4/3/2002
11:41:14 AM
c:\winnt\system32\msh261.drv Microsoft Corporation
OK
C:\WINNT\System32\MSH261.DRV 4.4.3385
163.77 KB (167,696 bytes) 4/3/2002
11:41:40 AM
c:\winnt\system32\msvidc32.dll Microsoft
Corporation
OK
C:\WINNT\System32\MSVIDC32.DLL
5.00.2134.1 27.27 KB (27,920 bytes)
12/11/1999 6:00:00 AM

```

```

c:\winnt\system32\msrle32.dll Microsoft Corporation
OK
C:\WINNT\System32\MSRLE32.DLL 5.00.2134.1
10.77 KB (11,024 bytes) 12/11/1999
6:00:00 AM
c:\winnt\system32\ir32_32.dll Intel(R) Corporation
OK
C:\WINNT\System32\IR32_32.DLL Not Available
194.50 KB (199,168 bytes) 12/11/1999
6:00:00 AM
c:\winnt\system32\iccvid.dll Radius Inc.
OK
C:\WINNT\System32\ICCVID.DLL
1.10.0.6 108.00 KB (110,592 bytes)
12/11/1999 6:00:00 AM

[CD-ROM]

Item   Value
Drive  D:
Description CD-ROM Drive
Media Loaded False
Media Type CD-ROM
Name    COMPAQ CD-224E
Manufacturer (Standard CD-ROM drives)
Status   OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMCOMPAQ_CD-
224E_A.8D\5&23A72C42&0&0
.0.0

[Sound Device]

Item   Value
No sound devices

[Display]

Item   Value
Name   ATI Technologies Inc. RAGE XL PCI
PNP Device ID
PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
7\3&267A616A&0&18
Adapter Type ATI RAGE XL PCI, ATI Technologies
Inc. compatible
Adapter Description ATI Technologies Inc. RAGE XL PCI
Adapter RAM 8.00 MB (8,388,608 bytes)
Installed Drivers atidrab.dll
Driver Version 5.00.2179.1
INF File display.inf (atirage3 section)
Color Planes 1
Color Table Entries 65536
Resolution 640 x 480 x 60 hertz
Bits/Pixel 16

[Infrared]

Item   Value
No infrared devices

[Input]

```

[Following are sub-categories of this main category]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&32BA4B66&0
NumberOfFunctionKeys	12

[Pointing Device]

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	3
Status	OK
PNP Device ID	ACPI\PNP0F13\4&32BA4B66&0
Power Management Supported	False
Double Click Threshold	6
Handedness	Right Handed Operation

[Modem]

Item	Value
No modems	

[Network]

[Following are sub-categories of this main category]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Name	RAS Async Adapter
Installed True	
PNP Device ID	Not Available
Last Reset	11/14/2002 7:27:55 AM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Not Available

Item	Value
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Name	WAN Miniport (L2TP)
Installed True	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000

Last Reset 11/14/2002 7:27:55 AM
Index 2
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name Rasl2tp
Driver c:\winnt\system32\drivers\rasl2tp.sys
(50800, 5.00.2195.2779.1)

Name [00000003] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Name WAN Miniport (PPTP)
Installed True
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset 11/14/2002 7:27:55 AM
Index 3
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Service Name PptpMiniport
Driver c:\winnt\system32\drivers\raspppt.sys
(47856, 5.00.2160.1)

Name [00000004] Direct Parallel
Adapter Type Not Available
Product Name Direct Parallel
Installed True
PNP Device ID ROOT\MS_PTMINIPORT\0000
Last Reset 11/14/2002 7:27:55 AM
Index 4
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name Raspti
Driver c:\winnt\system32\drivers\raspti.sys
(16880, 5.00.2146.1)

Name [00000005] WAN Miniport (IP)
Adapter Type Not Available
Product Name WAN Miniport (IP)
Installed True
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 11/14/2002 7:27:55 AM
Index 5
Service Name NdisWan

IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name NdisWan
Driver c:\winnt\system32\drivers\ndiswan.sys
(90096, 5.00.2195.2779)

Name [00000006] Compaq NC7780 Gigabit Server Adapter
Adapter Type Ethernet 802.3
Product Name Compaq NC7780 Gigabit Server Adapter
Installed True
PNP Device ID PCI\VEN_14E4&DEV_1645&SUBSYS_00850E11&REV_1
5\3&13C0B0C5&0&28
Last Reset 11/14/2002 7:27:55 AM
Index 6
Service Name q57w2k
IP Address 130.168.11.1
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:50:8B:EB:ED:A4
Service Name q57w2k
IRQ Number 30
Driver c:\winnt\system32\drivers\q57w2k.sys
(77438, 2.67.0.0)

Name [00000007] Compaq NC7780 Gigabit Server Adapter
Adapter Type Ethernet 802.3
Product Name Compaq NC7780 Gigabit Server Adapter
Installed True
PNP Device ID PCI\VEN_14E4&DEV_1645&SUBSYS_00850E11&REV_1
5\3&13C0B0C5&0&30
Last Reset 11/14/2002 7:27:55 AM
Index 7
Service Name q57w2k
IP Address 130.172.11.1
IP Subnet 255.255.255.0
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:50:8B:EB:ED:A5
Service Name q57w2k
IRQ Number 29
Driver c:\winnt\system32\drivers\q57w2k.sys
(77438, 2.67.0.0)

[Protocol]
Item Value
Name MSAFD Tcpip [TCP/IP]
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 16 bytes
MaximumMessageSize 0 bytes
MessageOriented False
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData True
SupportsGracefulClosing True
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD Tcpip [UDP/IP]
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 16 bytes
MaximumMessageSize 65467 bytes
MessageOriented True
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting True

Name RSVP UDP Service Provider
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 16 bytes
MaximumMessageSize 65467 bytes
MessageOriented True
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption True
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting True

Name RSVP TCP Service Provider
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 16 bytes
MaximumMessageSize 0 bytes

MessageOriented False
MinimumAddressSize 16 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption True
SupportsExpeditedData True
SupportsGracefulClosing True
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{855DD36B-8E49-4C0B-9116-AF1F650426AF}] SEQPACKET 4
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumaddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{855DD36B-8E49-4C0B-9116-AF1F650426AF}] DATAGRAM 4
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\Device\NetBT_Tcpip_{52416FB6-7BA3-4670-B0F2-6EC471BB2D79}] SEQPACKET 3
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False

SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[Device\NetBT_Tcpip_{52416FB6-7BA3-4670-B0F2-6EC471BE2D79}]	DATAGRAM 3
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFD NetBIOS
[Device\NetBT_Tcpip_{062B0E39-EFD3-4340-A9B7-13171B5F2386}]	SEQPACKET 1
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	False
SupportsConnectData	False
SupportsDisconnectData	False
SupportsEncryption	False
SupportsExpeditedData	False
SupportsGracefulClosing	False
SupportsGuaranteedBandwidth	False
SupportsMulticasting	False
Name	MSAFI NetBIOS
[Device\NetBT_Tcpip_{062B0E39-EFD3-4340-A9B7-13171B5F2386}]	DATAGRAM 1
ConnectionlessService	True
GuaranteesDelivery	False
GuaranteesSequencing	False
MaximumAddressSize	20 bytes
MaximumMessageSize	64000 bytes
MessageOriented	True
MinimumAddressSize	20 bytes
PseudoStreamOriented	False
SupportsBroadcasting	True
SupportsConnectData	False
SupportsDisconnectData	False

```
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{7EF367B1-3400-4351-A2E1-
FD2322FBD119}] SEQPACKET 2
ConnectionlessService False
GuaranteesDelivery True
GuaranteesSequencing True
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting False
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False

Name MSAFD NetBIOS
[\\Device\\NetBT_Tcpip_{7EF367B1-3400-4351-A2E1-
FD2322FBD119}] DATAGRAM 2
ConnectionlessService True
GuaranteesDelivery False
GuaranteesSequencing False
MaximumAddressSize 20 bytes
MaximumMessageSize 64000 bytes
MessageOriented True
MinimumAddressSize 20 bytes
PseudoStreamOriented False
SupportsBroadcasting True
SupportsConnectData False
SupportsDisconnectData False
SupportsEncryption False
SupportsExpeditedData False
SupportsGracefulClosing False
SupportsGuaranteedBandwidth False
SupportsMulticasting False
```

[WinSock

Item	Value
File	c:\winnt\system32\winsock.dll
Version	3.10
Size	2.80 KB (2,864 bytes)
File	c:\winnt\system32\wsock32.dll
Version	5.00.2195.2871
Size	21.27 KB (21,776 bytes)

[Ports

[Following are sub-categories of this main category]

[Serial]

Item	Value
Name	COM1
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	False
Settable Baud Rate	True
Settable Data Bits	True
Settable Flow Control	True
Settable Parity	True
Settable Parity Check	True
Settable Stop Bits	True
Settable RLSD	True
Supports RLSD	True
Supports 16 Bit Mode	False
Supports Special Characters	False
Baud Rate 9600	
Bits/Byte 8	
Stop Bits 1	
Parity None	
Busy 0	
Abort Read/Write on Error	0
Binary Mode Enabled -1	
Continue XMit on XOff	0
CTS Outflow Control 0	
Discard NULL Bytes 0	
DSR Outflow Control 0	
DSR Sensitivity 0	
DTR Flow Control Type	Enable
EOF Character 0	
Error Replace Character 0	
Error Replacement Enabled 0	
Event Character 0	
Parity Check Enabled 0	
RTS Flow Control Type	Enable
XOff Character 19	
XOffXMit Threshold 512	
XOn Character 17	
XOnXmit Threshold 2048	
XOnXoff InFlow Control 0	
XOnXoff OutFlow Control 0	
IRQ Number 4	
I/O Port 0x03F8-0x03FF	
Driver c:\winnt\system32\drivers\serial.sys (62416, 5.00.2195.2780)	

[Parallel]

Item	Value
No parallel port information	

[Storage]

[Following are sub-categories of this main category]

[Drives]

Item	Value
------	-------

Drive A:
Description 3 1/2 Inch Floppy Drive

Drive C:
Description Local Fixed Disk
Compressed False
File System NTFS
Size 8.46 GB (9,086,955,520 bytes)
Free Space 5.55 GB (5,958,184,960 bytes)
Volume Name
Volume Serial Number F408F5A4
Partition Disk #0, Partition #0
Partition Size 8.46 GB (9,086,959,616 bytes)
Starting Offset 16384 bytes
Drive Description Disk drive
Drive Manufacturer (Standard disk drives)
Drive Model COMPAQ LOGICAL VOLUME SCSI Disk
Device
Drive BytesPerSector 512
Drive MediaLoaded True
Drive MediaType Fixed hard disk media
Drive Partitions 1
Drive SCSIBus 0
Drive SCSILogicalUnit 0
Drive SCSPORT 2
Drive SCSITargetId 4
Drive SectorsPerTrack 32
Drive Size 9091153920 bytes
Drive TotalCylinders 2176
Drive TotalSectors 17756160
Drive TotalTracks 554880
Drive TracksPerCylinder 255

[SCSI]

Item	Value
Name	Compaq Smart Array 5i
Caption	Compaq Smart Array 5i
Driver	cpqcissm
Status	OK
PNP Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
Device ID	PCI\VEN_0E11&DEV_B178&SUBSYS_40800E11&REV_0
1\3&13C0B0C5&0&20	
Device Map	Not Available
Index	Not Available
Max Number Controlled	Not Available
IRQ Number	31
I/O Port	0x3000-0x0FFF
Driver	c:\winnt\system32\drivers\cpqcissm.sys (14032, 5.16.0.0)
Name	QLogic QLA23xx PCI Fibre Channel Adapter
Caption	QLogic QLA23xx PCI Fibre Channel Adapter
Driver	ql2300
Status	OK
PNP Device ID	PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_0
2\3&1070020&0&28	

Device ID PCI\VEN_1077&DEV_2312&SUBSYS_010C1077&REV_0
2\3&1070020&0&28
Device Map Not Available
Index Not Available
Max Number Controlled Not Available
IRQ Number 28
I/O Port 0x4000-0x40FF
Driver c:\winnt\system32\drivers\ql2300.sys
(440012, 8.2.0 Beta 3 (W2K VI))

[Printing]

Name	Port Name	Server Name
No printing information		

[Problem Devices]

Device	PNP Device ID	Error Code
Monitor	DISPLAY\DEFAULT_MONITOR\4&89B5141&0&8000000	
1&00&03	28	
Base System Device	PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0	
1\3&267A616A&0&28	28	
Base System Device	PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0	
1\3&267A616A&0&2A	28	

[USB]

Device	PNP Device ID	Standard	OpenHCD USB Host Controller
		PCI\VEN_1166&DEV_0220&SUBSYS_02201166&REV_0	
5\3&267A616A&0&7A		PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0	
USB Root Hub		USB\ROOT_HUB\4&AF5358C&0	

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type
Started	Start Mode		State
Status	Error Control		Accept Pause
Accept Stop			
abiosdsk	Abiosdsk	Not Available	Kernel Driver
		False	Disabled Stopped OK
		Ignore	False False
abp480n5	abp480n5	Not Available	Kernel Driver
		False	Disabled Stopped OK
		Normal	False False
acpi	Microsoft ACPI Driver		
	c:\winnt\system32\drivers\acpi.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal False
	True		
acpic	ACPIEC		
	c:\winnt\system32\drivers\acpic.sys		
	Kernel Driver	False	Disabled

adpu160m	Stopped	OK	Normal	False		Running	OK	Normal	False		disk	Disk Driver c:\winnt\system32\drivers\disk.sys
	False				beep	True				Kernel Driver	True	Boot
adpu160m	Not Available		Kernel Driver			Beep	c:\winnt\system32\drivers\beep.sys			Running	OK	Normal
	False	Disabled	Stopped	OK		Kernel Driver	True	System		Stopped	OK	Normal
afd	Normal	False	False			Running	OK	Normal	False		True	
	AFD Networking Support Environment				buslogic	True				diskperf	Diskperf c:\winnt\system32\drivers\diskperf.sys	
	c:\winnt\system32\drivers\afd.sys					BusLogic	Not Available			Kernel Driver	False	Disabled
	Kernel Driver	True	Auto			False	Disabled	Stopped	OK	Stopped	OK	Normal
	Running	OK	Normal	False		Normal	False	False			False	
	True				cd20xrnt	True				dmboot	dmboot c:\winnt\system32\drivers\dmboot.sys	
aha154x	Aha154x	Not Available	Kernel Driver			cd20xrnt	Not Available			Kernel Driver	False	Disabled
	False	Disabled	Stopped	OK		False	Disabled	Stopped	OK	Stopped	OK	Normal
aic116x	Normal	False	False			Normal	False	False			False	
	aic116x	Not Available	Kernel Driver		cdaudio	True				dmio	Logical Disk Manager Driver c:\winnt\system32\drivers\dmio.sys	
	False	Disabled	Stopped	OK		Cdaudio	c:\winnt\system32\drivers\cdaudio.sys			Kernel Driver	True	Boot
	Normal	False	False			Kernel Driver	False	System		Running	OK	Normal
aic78u2	aic78u2	Not Available	Kernel Driver			Stopped	OK	Ignore	False		True	
	False	Disabled	Stopped	OK	cdfs	True				dmload	dmload c:\winnt\system32\drivers\dmload.sys	
	Normal	False	False			Cdfs	c:\winnt\system32\drivers\cdfs.sys			Kernel Driver	True	Boot
aic78xx	aic78xx	Not Available	Kernel Driver			File System Driver	True	Disabled		Running	OK	Normal
	False	Disabled	Stopped	OK		Running	OK	Normal	False		True	
ami0nt	ami0nt	Not Available	Kernel Driver		cdrom	True				efs	EFS c:\winnt\system32\drivers\efs.sys	
	False	Disabled	Stopped	OK		CD-ROM Driver	c:\winnt\system32\drivers\cdrom.sys			File System Driver	True	Disabled
	Normal	False	False			Kernel Driver	True	System		Running	OK	Normal
amsint	amsint	Not Available	Kernel Driver			Running	OK	Normal	False		Running	OK
	False	Disabled	Stopped	OK	cdrom	True				fastfat	Fastfat c:\winnt\system32\drivers\fastfat.sys	
	Normal	False	False			CD-ROM Driver	c:\winnt\system32\drivers\cdrom.sys			File System Driver	True	Disabled
asc	asc	Not Available	Kernel Driver			Kernel Driver	False	System		Running	OK	Normal
	False	Disabled	Stopped	OK	changer	True				fd16_700	Fd16_700 Not Available Kernel Driver	
	Normal	False	False			Changer	Not Available			False	Disabled	Stopped
asc3350p	asc3350p	Not Available	Kernel Driver			Kernel Driver	False	Stopped	OK	Normal	False	OK
	False	Disabled	Stopped	OK	cpqarray	True				fd16_700	Normal False False	
	Normal	False	False			Ignore	False	False		flashpnt	flashpnt Not Available Kernel Driver	
asc3550	asc3550	Not Available	Kernel Driver			Kernel Driver	False	Disabled		False	Disabled	Stopped
	False	Disabled	Stopped	OK	cpqarry2	True				fd16_700	Normal False False	
	Normal	False	False			Not Available				fd16_700	Normal False False	
asyncmac	RAS Asynchronous Media Driver				cpqcissm	True				fd16_700	Normal False False	
	c:\winnt\system32\drivers\asyncmac.sys					Cpqcissm	c:\winnt\system32\drivers\cpqcissm.sys			fd16_700	Normal False False	
	Kernel Driver	False	Manual			Kernel Driver	True	Boot		fd16_700	Normal False False	
	Stopped	OK	Normal	False		Running	OK	Normal	False	fd16_700	Normal False False	
	False				cpqfcalm	True				fips	Fips c:\winnt\system32\drivers\fips.sys	
atapi	Standard IDE/ESDI Hard Disk Controller					Cpqfcalm	Not Available			Kernel Driver	True	Auto
	c:\winnt\system32\drivers\atapi.sys					Kernel Driver	False	Disabled	OK	fips	Kernel Driver True Auto	
	Kernel Driver	True	Boot			Running	OK	Normal	False	Kernel Driver	True	Auto
	Running	OK	Normal	False		Normal	False	False		fireport	fireport Not Available Kernel Driver	
	True				cpqfws2e	True				fireport	False Disabled Stopped OK	
atdisk	Atdisk	Not Available	Kernel Driver			Not Available				Normal	False	False
	False	Disabled	Stopped	OK		Kernel Driver	False	Disabled		Normal	False	False
	Ignore	False	False			Normal	False	False		Normal	False	False
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys			cpqteam	True				Normal	False	False
	Kernel Driver	True	Manual			Compaq Network Teaming and Configuration	c:\winnt\system32\drivers\cpqteam.sys			Normal	False	False
	Running	OK	Ignore	False		Kernel Driver	False	Manual		Normal	False	False
	True					Stopped	OK	Normal	False	Normal	False	False
atmarpc	ATM ARP Client Protocol				dac960nt	True				Normal	False	False
	c:\winnt\system32\drivers\atmarpc.sys					Cdac960nt	Not Available			Normal	False	False
	Kernel Driver	False	Manual			Kernel Driver	False	Disabled	OK	Normal	False	False
	Stopped	OK	Normal	False		Normal	False	False		Normal	False	False
	False				deckzpsx	True				Normal	False	False
audstub	Audio Stub Driver					Not Available				Normal	False	False
	c:\winnt\system32\drivers\audstub.sys					Kernel Driver	False	Disabled		Normal	False	False
	Kernel Driver	True	Manual			Normal	False	False		Normal	False	False

gpc	Generic Packet Classifier c:\winnt\system32\drivers\msgpc.sys	Kernel Driver	True	Manual
	Running OK	Normal	False	
	True			
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\winnt\system32\drivers\i8042prt.sys	Kernel Driver	True	System
	Running OK	Normal	False	
	True			
ini910u	ini910u Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver	Not Available	Kernel Driver
	Normal False False	Kernel Driver	Disabled	Kernel Driver
intelide	IntelIDE Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver	Not Available	Kernel Driver
	Normal False False	Kernel Driver	Disabled	Kernel Driver
ipfilterdriver	IP Traffic Filter Driver c:\winnt\system32\drivers\ipfltdrv.sys	Kernel Driver	False	Manual
	Stopped OK	Normal	False	
	False			
ipinip	IP in IP Tunnel Driver c:\winnt\system32\drivers\ipinip.sys	Kernel Driver	False	Manual
	Stopped OK	Normal	False	
	False			
ipnat	IP Network Address Translator c:\winnt\system32\drivers\ipnat.sys	Kernel Driver	False	Manual
	Stopped OK	Normal	False	
	False			
ipsec	IPSEC driver c:\winnt\system32\drivers\ipsec.sys	Kernel Driver	False	Manual
	Stopped OK	Normal	False	
	False			
ipsraiden	ipsraiden Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver	Not Available	Kernel Driver
	Normal False False	Kernel Driver	Disabled	Kernel Driver
isapnp	PnP ISA/EISA Bus Driver c:\winnt\system32\drivers\isapnp.sys	Kernel Driver	True	Boot
	Running OK	Critical	False	
	True			
kbdclass	Keyboard Class Driver c:\winnt\system32\drivers\kbdclass.sys	Kernel Driver	True	System
	Running OK	Normal	False	
	True			
ksecdd	KSecDD c:\winnt\system32\drivers\ksecdd.sys	Kernel Driver	True	Boot
	Running OK	Normal	False	
	True			
lbrtfdc	lbrtfdc Not Available Kernel Driver False System Stopped OK	Kernel Driver	Not Available	Kernel Driver
	Ignore False False	Kernel Driver	System	Kernel Driver
lp6nds35	lp6nds35 Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver	Not Available	Kernel Driver
	Normal False False	Kernel Driver	Disabled	Kernel Driver
mnmdd	mnmdd c:\winnt\system32\drivers\mnmdd.sys	Kernel Driver	True	System

modem	Running OK Ignore False	True Modem	c:\winnt\system32\drivers\modem.sys
	Kernel Driver False Manual	Stopped OK Ignore False	c:\winnt\system32\drivers\modem.sys
mouclass	Mouse Class Driver c:\winnt\system32\drivers\mouclass.sys	Kernel Driver True System	Kernel Driver False Manual
	Running OK Normal False	True	Stopped OK Ignore False
mountmgr	MountMgr c:\winnt\system32\drivers\mountmgr.sys	Kernel Driver True Boot	c:\winnt\system32\drivers\mountmgr.sys
	Running OK Normal False	True	Stopped OK Ignore False
mraid35x	mraid35x Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver False Manual	c:\winnt\system32\drivers\mraid35x.sys
	Normal False False	Running OK Normal False	Kernel Driver True Manual
mrxsmb	MRXSMB c:\winnt\system32\drivers\mrxsmb.sys	File System Driver True System	c:\winnt\system32\drivers\mrxsmb.sys
	Running OK Normal False	True	Stopped OK Normal False
msfs	Msfs c:\winnt\system32\drivers\msfs.sys	File System Driver True System	c:\winnt\system32\drivers\msfs.sys
	Running OK Normal False	True	Stopped OK Normal False
mskssrv	Microsoft Streaming Service Proxy c:\winnt\system32\drivers\mskssrv.sys	Kernel Driver False Manual	c:\winnt\system32\drivers\mskssrv.sys
	Stopped OK Normal False	False	Kernel Driver True Manual
mspclock	Microsoft Streaming Clock Proxy c:\winnt\system32\drivers\mspclock.sys	Kernel Driver False Manual	c:\winnt\system32\drivers\mspclock.sys
	Stopped OK Normal False	False	Kernel Driver True Manual
mspqlm	Microsoft Streaming Quality Manager Proxy c:\winnt\system32\drivers\mspqlm.sys	Kernel Driver False Manual	c:\winnt\system32\drivers\mspqlm.sys
	Stopped OK Normal False	False	Kernel Driver True Manual
mup	Mup c:\winnt\system32\drivers\mup.sys	File System Driver True Boot	c:\winnt\system32\drivers\mup.sys
	Running OK Normal False	True	Stopped OK Normal False
n100	Compaq Ethernet or Fast Ethernet NIC NT Driver c:\winnt\system32\drivers\n100nt5.sys	Kernel Driver False Manual	c:\winnt\system32\drivers\n100nt5.sys
	Stopped OK Normal False	False	Kernel Driver True Manual
ncrc710	Ncrc710 Not Available Kernel Driver False Disabled Stopped OK	Kernel Driver False False	c:\winnt\system32\drivers\ncrc710.sys
	Normal False False	Running OK Normal False	Kernel Driver True Manual
ndis	NDIS System Driver c:\winnt\system32\drivers\ndis.sys	Kernel Driver True Boot	c:\winnt\system32\drivers\ndis.sys
	Running OK Normal False	True	Stopped OK Normal False

ndistapi	Remote Access NDIS TAPI Driver c:\winnt\system32\drivers\ndistapi.sys	Kernel Driver True Manual	c:\winnt\system32\drivers\ndistapi.sys
	Running OK Normal False	True	Kernel Driver True Manual
ndiswan	Remote Access NDIS WAN Driver c:\winnt\system32\drivers\ndiswan.sys	Running OK Normal False	c:\winnt\system32\drivers\ndiswan.sys
	True	Kernel Driver True Manual	Kernel Driver True Manual
ndproxy	NDIS Proxy c:\winnt\system32\drivers\ndproxy.sys	Running OK Normal False	c:\winnt\system32\drivers\ndproxy.sys
	True	Kernel Driver True Manual	Kernel Driver True Manual
netbios	NetBIOS Interface c:\winnt\system32\drivers\netbios.sys	File System Driver True System	c:\winnt\system32\drivers\netbios.sys
	Running OK Normal False	True	Kernel Driver True System
netbt	NetBios over Tcpip c:\winnt\system32\drivers\netbt.sys	Running OK Normal False	c:\winnt\system32\drivers\netbt.sys
	True	Kernel Driver True System	Kernel Driver True System
netdetect	NetDetect c:\winnt\system32\drivers\netdect.sys	Stopped OK Normal False	c:\winnt\system32\drivers\netdect.sys
	False	Kernel Driver False Manual	Kernel Driver False Manual
npfs	Npfs c:\winnt\system32\drivers\npfs.sys	Running OK Normal False	c:\winnt\system32\drivers\npfs.sys
	True	Kernel Driver True System	File System Driver True System
ntfs	Ntfs c:\winnt\system32\drivers\ntfs.sys	Running OK Normal False	c:\winnt\system32\drivers\ntfs.sys
	True	Kernel Driver True System	File System Driver True Disabled
null	Null c:\winnt\system32\drivers\null.sys	Running OK Normal False	c:\winnt\system32\drivers\null.sys
	True	Kernel Driver True System	Kernel Driver True System
nwlknkflt	IPX Traffic Filter Driver c:\winnt\system32\drivers\nwlnkflt.sys	Stopped OK Normal False	c:\winnt\system32\drivers\nwlnkflt.sys
	False	Kernel Driver False Manual	Kernel Driver False Manual
nwlknkfwd	IPX Traffic Forwarder Driver c:\winnt\system32\drivers\nwlnkfwd.sys	Stopped OK Normal False	c:\winnt\system32\drivers\nwlnkfwd.sys
	False	Kernel Driver False Manual	Kernel Driver False Manual
openhci	Microsoft USB Open Host Controller Driver c:\winnt\system32\drivers\openhci.sys	Stopped OK Normal False	c:\winnt\system32\drivers\openhci.sys
	False	Kernel Driver True Manual	Kernel Driver True Manual
parallel	Parallel c:\winnt\system32\drivers\parallel.sys	Running OK Normal False	c:\winnt\system32\drivers\parallel.sys
	True	Kernel Driver False Auto	Kernel Driver False Auto

parport	Stopped	OK	Ignore	False	ql1080	ql1080	Not Available	Kernel Driver	serenum	Serenum Filter Driver
	False					False	Disabled Stopped	OK	c:\winnt\system32\drivers\serenum.sys	
	Parport				q110wnt	Q110wnt	Normal False	Kernel Driver	Kernel Driver	Kernel Driver True Manual
	c:\winnt\system32\drivers\parport.sys					False	Disabled Stopped	OK	Running OK Normal False	
partmgr	Kernel Driver		Auto		q11240	q11240	Normal False	Kernel Driver	True	Running OK Normal False
	Stopped	OK	Ignore	False		False	Disabled Stopped	OK	Serial port driver	
	False				q12100	q12100	Normal False	Kernel Driver	c:\winnt\system32\drivers\serial.sys	
parvdm	PartMgr					False	Disabled Stopped	OK	Kernel Driver True System	
	c:\winnt\system32\drivers\partmgr.sys				q12300	q12300	Normal False	Kernel Driver	Running OK Ignore False	
	Kernel Driver	True	Boot			c:\winnt\system32\drivers\q12300.sys			SFloppy	
	Running	OK	Normal	False		Kernel Driver	True	Kernel Driver False System	c:\winnt\system32\drivers\sfloppy.sys	
	True					Running	OK	Normal False	Stopped OK Ignore False	
pci	ParVdm				q12x00ip	q12x00ip	Normal False	Kernel Driver	False	False
	c:\winnt\system32\drivers\parvdm.sys					QLogic QLA2X00 IP Network Driver			Kernel Driver OK	
	Kernel Driver		Auto			c:\winnt\system32\drivers\q12x00ip.sys			Normal False False	
	Stopped	OK	Ignore	False		Kernel Driver	False	Kernel Driver	Simbad Not Available	
	False					Stopped	OK	Kernel Driver	Running OK Disabled Stopped	
pcidump	PCI Bus Driver				qlvika	qlvika	Normal False	Kernel Driver	OK	
	c:\winnt\system32\drivers\pci.sys					c:\winnt\system32\drivers\qlvika.sys			Normal False False	
	Kernel Driver	True	Boot			Kernel Driver	True	Kernel Driver	Simbad Not Available	
	Running	OK	Critical	False		Running	OK	Kernel Driver	Running OK Disabled Stopped	
	True					Normal False	False	Kernel Driver	OK	
pcide	PCIDump	Not Available				False		Kernel Driver	Special Purpose Utility Driver	
	False	System	Stopped	OK				Kernel Driver	c:\winnt\system32\drivers\spud.sys	
	Ignore	False	False			q1vika			Kernel Driver True Manual	
pcmcia	PCIIDE							Running	OK Normal False	
	c:\winnt\system32\drivers\pcide.sys				rasacd	Remote Access Auto Connection Driver		Kernel Driver	Running OK Normal False	
	Kernel Driver	True	Boot			c:\winnt\system32\drivers\rasacd.sys			Normal False False	
	Running	OK	Normal	False		Kernel Driver	True	Kernel Driver	True	
	True					System		Kernel Driver	Running OK Disabled Stopped	
pdcomp	Pcmcia					Running	OK	Kernel Driver	OK	
	c:\winnt\system32\drivers\pcmcia.sys				rasl2tp	WAN Miniport (L2TP)		Normal False False	Special Purpose Utility Driver	
	Kernel Driver		Disabled			c:\winnt\system32\drivers\rasl2tp.sys			c:\winnt\system32\drivers\spud.sys	
	Stopped	OK	Normal	False		Kernel Driver	True	Kernel Driver	Kernel Driver True Manual	
	False					Running	OK	Kernel Driver	Running OK Normal False	
pdframe	PDCOMP	Not Available				True		Kernel Driver	True	
	False	Manual	Stopped	OK	raspti	Direct Parallel		Normal False False	Running OK Normal False	
	Ignore	False	False			c:\winnt\system32\drivers\raspti.sys			Normal False False	
pdreli	PDFRAME	Not Available				Kernel Driver	True	Kernel Driver	True	
	False	Manual	Stopped	OK		Running	OK	Kernel Driver	Running OK Normal False	
	Ignore	False	False			Normal False		Kernel Driver	Normal False False	
pdrframe	PDRELI	Not Available			rca	Microsoft Streaming Network Raw Channel		Normal False False	Normal False False	
	False	Manual	Stopped	OK	Access	c:\winnt\system32\drivers\rca.sys		Normal False False	Normal False False	
	Ignore	False	False			Kernel Driver	False	Kernel Driver	Normal False False	
pptpminiport	PDRFRAME	Not Available				Manual		Normal False False	Normal False False	
	False	Manual	Stopped	OK		Stopped	OK	Kernel Driver	Normal False False	
	Ignore	False	False		rdbs	Rdbss		Normal False False	Normal False False	
	WAN Miniport (PPTP)					c:\winnt\system32\drivers\rdbs.sys		Normal False False	Normal False False	
	c:\winnt\system32\drivers\raspptp.sys					File System Driver	True	Kernel Driver	Normal False False	
	Kernel Driver	True	Manual			System		Kernel Driver	Normal False False	
	Running	OK	Normal	False		Running	OK	Kernel Driver	Normal False False	
	True					Normal False		Kernel Driver	Normal False False	
ptilink	Direct Parallel Link Driver				rdpwd	RDPWD		Normal False False	Normal False False	
	c:\winnt\system32\drivers\ptilink.sys					c:\winnt\system32\drivers\rdpwd.sys		Normal False False	Normal False False	
	Kernel Driver	True	Manual			Kernel Driver	False	Kernel Driver	Normal False False	
	Running	OK	Normal	False		Manual		Kernel Driver	Normal False False	
	True					Stopped	OK	Kernel Driver	Normal False False	
q57w2k	Direct Parallel Link					Ignore		Kernel Driver	Normal False False	
	c:\winnt\system32\drivers\q57w2k.sys					False		Kernel Driver	Normal False False	
	Kernel Driver	True	Manual		redbook	Digital CD Audio Playback Filter Driver		Kernel Driver	Normal False False	
	Running	OK	Normal	False		c:\winnt\system32\drivers\redbook.sys		Kernel Driver	Normal False False	
	True					False		Kernel Driver	Normal False False	
	Compaq NC7780 Gigabit Server Adapter					Stopped	OK	Kernel Driver	Normal False False	
	c:\winnt\system32\drivers\q57w2k.sys					Normal False		Kernel Driver	Normal False False	
	Kernel Driver	True	Manual			False		Kernel Driver	Normal False False	
	Running	OK	Normal	False		False		Kernel Driver	Normal False False	
	True							Kernel Driver	Normal False False	

tdnetb	TDNETB c:\winnt\system32\drivers\tdnetb.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Ignore	False
		False		
tdpipe	TDPipe c:\winnt\system32\drivers\tdpipe.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Ignore	False
		False		
tdspx	TDSPX c:\winnt\system32\drivers\tdspx.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Ignore	False
		False		
tdtcp	TDTCP c:\winnt\system32\drivers\tdtcp.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Ignore	False
		False		
termdd	Terminal Device Driver c:\winnt\system32\drivers\termdd.sys			
	Kernel Driver	False	Disabled	
	Stopped	OK	Normal	False
		False		
tga	tga Not Available Kernel Driver			
	False System Stopped OK			
	Ignore False False			
udfs	Udfs c:\winnt\system32\drivers\udfs.sys			
	File System Driver	False	Disabled	
	Stopped	OK	Normal	False
		False		
ultra66	ultra66 Not Available Kernel Driver			
	False Disabled Stopped OK			
	Normal False False			
update	Microcode Update Driver c:\winnt\system32\drivers\update.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
		True		
usbhub	Microsoft USB Standard Hub Driver c:\winnt\system32\drivers\usbhub.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
		True		
vgasave	VgaSave c:\winnt\system32\drivers\vga.sys			
	Kernel Driver	True	System	
	Running	OK	Ignore	False
		True		
wanarp	Remote Access IP ARP Driver c:\winnt\system32\drivers\wanarp.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
		True		
wdica	WDICA Not Available Kernel Driver			
	False Manual Stopped OK			
	Ignore False False			
[Environment Variables]				
Variable	Value	User Name		
ComSpec	%SystemRoot%\system32\cmd.exe	<SYSTEM>		

Os2LibPath	%SystemRoot%\system32\os2\dll; <SYSTEM>
Path	\$SystemRoot%\system32;%SystemRoot%\$SystemRoot%\System32\Wbem:C:\Program Files\Microsoft SQL Server\80\Tools\BINN <SYSTEM>
windir	\$SystemRoot% <SYSTEM>
OS	Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE	x86 <SYSTEM>
PROCESSOR_LEVEL	6 <SYSTEM>
PROCESSOR_IDENTIFIER	x86 Family 6 Model 11 <SYSTEM>
Stepping	1, GenuineIntel <SYSTEM>
PROCESSOR_REVISION	0b01 <SYSTEM>
NUMBER_OF_PROCESSORS	2 <SYSTEM>
PATHEXT	.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF .WSH <SYSTEM>
TEMP	\$SystemRoot%\TEMP <SYSTEM>
TMP	\$SystemRoot%\TEMP <SYSTEM>
	\$USERPROFILE%\Local Settings\Temp PC1\Administrator
TMP	\$USERPROFILE%\Local Settings\Temp PC1\Administrator
[Jobs]	
[Following are sub-categories of this main category]	
[Print]	
Document	Size Owner Notify Status
	Time Submitted Start Time
	Until Time Elapsed Time
	Pages Printed Job ID Priority
	Parameters Driver Name
	Print Processor Host Print Queue
Unknown	Unknown Unknown Unknown Unknown
	Unknown
[Network Connections]	
Local Name	Remote Name Type
	Status User Name
No network connections information	
[Running Tasks]	
Name	Path Process ID Priority Min
Working Set	Max Working Set Start Time
	Version Size File Date
system idle process	Not Available 0 0
	Not Available Not Available Not
Available	Unknown Unknown Unknown
system	Not Available 8 8 0
	1413120 Not Available Unknown
	Unknown Unknown

smss.exe	c:\winnt\system32\smss.exe 168 11 204800 1413120 11/14/2002 1:28:11 PM 5.00.2195.2901 44.27 KB (45,328 bytes)
	12/11/1999 6:00:00 AM
csrss.exe	Not Available 192 13 Not Available Unknown Unknown Unknown
winlogon.exe	c:\winnt\system32\winlogon.exe 188 13 204800 1413120 11/14/2002 1:28:16 PM 5.00.2195.2953 173.77 KB (177,936 bytes)
bytes)	12/11/1999 6:00:00 AM
services.exe	c:\winnt\system32\services.exe 240 9 204800 1413120 11/14/2002 1:28:17 PM 5.00.2195.2780 86.77 KB (88,848 bytes)
	12/11/1999 6:00:00 AM
lsass.exe	c:\winnt\system32\lsass.exe 252 9 204800 1413120 11/14/2002 1:28:17 PM 5.00.2195.2964 32.77 KB (33,552 bytes)
	12/11/1999 6:00:00 AM
svchost.exe	c:\winnt\system32\svchost.exe 428 8 204800 1413120 11/14/2002 1:28:21 PM 5.00.2134.1 7.77 KB (7,952 bytes) 12/11/1999 6:00:00 AM
svchost.exe	c:\winnt\system32\svchost.exe 480 8 204800 1413120 11/14/2002 1:28:22 PM 5.00.2134.1 7.77 KB (7,952 bytes) 12/11/1999 6:00:00 AM
winmgmt.exe	c:\winnt\system32\wbem\winmgmt.exe 500 8 204800 1413120 11/14/2002 1:28:22 PM 1.50.1085.0029 192.08 KB (196,685 bytes) 4/3/2002 1:45:21 PM
inetinfo.exe	c:\winnt\system32\inetsrv\inetinfo.exe 540 8 204800 1413120 11/14/2002 1:28:23 PM 5.00.0984 14.27 KB (14,608 bytes) 4/3/2002 1:46:24 PM
explorer.exe	c:\winnt\explorer.exe 740 8 204800 1413120 11/14/2002 1:28:57 PM 5.00.3315.2846 237.27 KB (242,960 bytes) 4/3/2002 1:45:14 PM
cpqteam.exe	c:\winnt\system32\cpqteam.exe 684 8 204800 1413120 11/14/2002 1:28:58 PM 7.0.700.29 52.00 KB (53,248 bytes) 11/13/2001 5:53:20 AM
dllhost.exe	Not Available Not Available 656 8 Not Available Not Available 11/14/2002 1:35:27 PM Unknown
mmc.exe	Unknown Unknown c:\winnt\system32\mmc.exe 376 8 204800 1413120 11/14/2002 5:05:57 PM 5.00.2195.2301 589.27 KB (603,408 bytes)
bytes)	4/3/2002 1:44:49 PM
cmd.exe	c:\winnt\system32\cmd.exe 3744 8 204800 1413120 11/14/2002 5:11:37 PM 5.00.2195.2104 230.77 KB (236,304 bytes)
bytes)	12/11/1999 6:00:00 AM
mmc.exe	c:\winnt\system32\mmc.exe 3740 8 204800 1413120 11/14/2002 5:11:42 PM 5.00.2195.2301 589.27 KB (603,408 bytes)
bytes)	4/3/2002 1:44:49 PM

```

rsvp.exe c:\winnt\system32\rsvp.exe 3860 8
204800 1413120 11/14/2002 5:12:21 PM
5.00.2167.1 172.77 KB (176,912
bytes) 12/11/1999 6:00:00 AM

[Loaded Modules]

Name Version Size File Date Manufacturer
Path
traffic.dll 5.00.2139.1 30.77 KB
(31,504 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\traffic.dll
rsvp.exe 5.00.2167.1 172.77 KB (176,912
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\rsvp.exe
cmd.exe 5.00.2195.2104 230.77 KB (236,304
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\cmd.exe
faxshell.dll 5.00.2134.1 8.27 KB
(8,464 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\faxshell.dll
msacm32.dll 5.00.2134.1 65.27 KB
(66,832 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msacm32.dll
avifil32.dll 5.00.2134.1 76.27 KB
(78,096 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\avifil32.dll
msvfw32.dll 5.00.2134.1 113.77 KB
(116,496 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msvfw32.dll
docprop2.dll 5.00.2178.1 297.77 KB
(304,912 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\docprop2.dll
wbemprox.dll 1.50.1085.0045 40.08 KB
(41,040 bytes) 4/3/2002 1:45:21 PM Microsoft
Corporation
c:\winnt\system32\wbem\wbemprox.dll
mlang.dll 5.00.3103.1000 510.77 KB (523,024
bytes) 4/3/2002 1:44:49 PM Microsoft Corporation
c:\winnt\system32\mlang.dll
rassapi.dll 5.00.2188.1 14.27 KB
(14,608 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\rassapi.dll
adsnt.dll 5.00.2195.2778 195.27 KB (199,952
bytes) 4/3/2002 1:44:33 PM Microsoft Corporation
c:\winnt\system32\adsnt.dll
dbghelp.dll 5.00.2195.2104 159.27 KB
(163,088 bytes) 5/4/2001 1:05:02 PM Microsoft
Corporation c:\winnt\system32\dbghelp.dll
localsec.dll 5.00.2195.2130 230.27 KB
(235,792 bytes) 4/3/2002 1:44:48 PM Microsoft
Corporation c:\winnt\system32\localsec.dll
devmgr.dll 5.00.2166.1 215.77 KB
(220,944 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\devmgr.dll

```

```

filemgmt.dll 5.00.2195.2165 287.27 KB
(294,160 bytes) 4/3/2002 1:44:43 PM Microsoft
Corporation c:\winnt\system32\filemgmt.dll
pdh.dll 5.00.2195.2739 147.77 KB (151,312
bytes) 4/3/2002 1:45:05 PM Microsoft Corporation
c:\winnt\system32\pdh.dll
smlogcfg.dll 5.00.2195.2485 273.27 KB
(279,824 bytes) 4/3/2002 1:45:09 PM Microsoft
Corporation c:\winnt\system32\smlogcfg.dll
cabinet.dll 5.00.2147.1 54.77 KB
(56,080 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\cabinet.dll
msinfo32.dll 5.00.2177.1 312.27 KB
(319,760 bytes) 4/3/2002 11:41:37 AM
Microsoft Corporation c:\program
files\common\files\microsoft
shared\msinfo\msinfo32.dll
riched20.dll 5.30.23.1205 421.27 KB
(431,376 bytes) 4/3/2002 1:45:06 PM Microsoft
Corporation c:\winnt\system32\riched20.dll
riched32.dll 5.00.2134.1 3.77 KB
(3,856 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\riched32.dll
els.dll 5.00.2175.1 151.27 KB (154,896
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\els.dll
ntmsmgr.dll 1.0.0.1 427.77 KB (438,032
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation and HighGround Systems, Inc.
c:\winnt\system32\ntmsmgr.dll
mmfutil.dll 1.50.1085.0000 32.06 KB
(32,829 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mmfutil.dll
logdrive.dll 1.50.1085.0000 200.06 KB
(204,863 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\logdrive.dll
dfrgres.dll 5.00.2150.1 27.50 KB
(28,160 bytes) 12/11/1999 6:00:00 AM
Executive Software International, Inc.
c:\winnt\system32\dfrgres.dll
dfrgsnap.dll 5.00.2195.2104 41.77 KB
(42,768 bytes) 4/3/2002 1:44:39 PM Executive
Software International, Inc.
c:\winnt\system32\dfrgsnap.dll
dmdskres.dll 2195.2104.297.3 119.50 KB
(122,368 bytes) 4/3/2002 1:44:40 PM Microsoft
Corp., VERITAS Software
c:\winnt\system32\dmdskres.dll
dmutil.dll 2195.2104.297.3 42.27 KB
(43,280 bytes) 4/3/2002 1:44:40 PM VERITAS
Software Corp.
c:\winnt\system32\dmutil.dll
ntmsapi.dll 5.00.1948.1 51.77 KB
(53,008 bytes) 4/3/2002 1:45:01 PM Microsoft
Corporation c:\winnt\system32\ntmsapi.dll
dmdskmgr.dll 2215.2215.297.3 160.27 KB
(164,112 bytes) 4/3/2002 1:44:40 PM Microsoft
Corp., VERITAS Software
c:\winnt\system32\dmdskmgr.dll

```

```

mycomput.dll 5.00.2134.1 107.77 KB
(110,352 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mycomput.dll
mmcndmgr.dll 5.00.2178.1 815.27 KB
(834,832 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mmcndmgr.dll
msvcpc50.dll 5.00.7051 552.50 KB (565,760
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\msvcpc50.dll
mf42u.dll 6.00.8665.0 972.05 KB
(995,384 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mf42u.dll
mmc.exe 5.00.2195.2301 589.27 KB (603,408
bytes) 4/3/2002 1:44:49 PM Microsoft Corporation
c:\winnt\system32\mmc.exe
cpqteam.exe 7.0.700.29 52.00 KB
(53,248 bytes) 11/13/2001 5:53:20 AM
Compaq Computer Corporation
c:\winnt\system32\cpqteam.exe
query.dll 5.00.2195.2495 1.35 MB (1,416,464
bytes) 4/3/2002 1:45:05 PM Microsoft Corporation
c:\winnt\system32\query.dll
mstask.dll 4.71.2137.1 213.27 KB
(218,384 bytes) 4/3/2002 11:41:30 AM
Microsoft Corporation
c:\winnt\system32\mstask.dll
msxml.dll 8.0.5718.1 493.27 KB (505,104
bytes) 4/3/2002 1:44:58 PM Microsoft Corporation
c:\winnt\system32\msxml.dll
urlmon.dll 5.00.3315.1000 441.27 KB
(451,856 bytes) 4/3/2002 1:45:12 PM Microsoft
Corporation
c:\winnt\system32\urlmon.dll
browselc.dll 5.00.3315.2846 34.50 KB
(35,328 bytes) 4/3/2002 1:44:35 PM Microsoft
Corporation
c:\winnt\system32\browselc.dll
dsuient.dll 5.00.2195.2779 107.77 KB
(110,352 bytes) 4/3/2002 1:44:41 PM Microsoft
Corporation
c:\winnt\system32\dsuient.dll
dsquery.dll 5.00.2195.2854 153.27 KB
(156,944 bytes) 4/3/2002 1:44:41 PM Microsoft
Corporation
c:\winnt\system32\dsquery.dll
shdoclc.dll 5.00.3315.2879 324.50 KB
(332,288 bytes) 4/3/2002 1:45:08 PM Microsoft
Corporation
c:\winnt\system32\shdoclc.dll
wininet.dll 5.00.3315.1000 456.77 KB
(467,728 bytes) 4/3/2002 1:45:13 PM Microsoft
Corporation
c:\winnt\system32\wininet.dll
linkinfo.dll 5.00.2134.1 15.77 KB
(16,144 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\linkinfo.dll
powrprof.dll 5.00.3103.1000 13.27 KB
(13,584 bytes) 4/3/2002 1:45:05 PM Microsoft
Corporation
c:\winnt\system32\powrprof.dll
batmeter.dll 5.00.3103.1000 20.27 KB
(20,752 bytes) 4/3/2002 1:44:35 PM Microsoft
Corporation
c:\winnt\system32\batmeter.dll
stobject.dll 5.00.2195.2780 79.27 KB
(81,168 bytes) 4/3/2002 1:45:10 PM Microsoft
Corporation
c:\winnt\system32\stobject.dll

```

webcheck.dll	5.00.3315.1000	251.77 KB
(257,808 bytes)	4/3/2002 1:45:13 PM	Microsoft Corporation
	c:\winnt\system32\webcheck.dll	
msi.dll	1.11.2405.0	1.69 MB (1,767,184 bytes)
	4/3/2002 1:44:53 PM	Microsoft Corporation
	c:\winnt\system32\msi.dll	
ntshrui.dll	5.00.2134.1	46.77 KB (47,888 bytes)
	12/11/1999 6:00:00 AM	Microsoft Corporation
	c:\winnt\system32\ntshrui.dll	
mydocs.dll	5.00.2920.0000	55.77 KB (57,104 bytes)
	12/11/1999 6:00:00 AM	Microsoft Corporation
	c:\winnt\system32\mydocs.dll	
browsoui.dll	5.00.3315.2846	788.77 KB (807,696 bytes)
	4/3/2002 1:44:35 PM	Microsoft Corporation
	c:\winnt\system32\browsoui.dll	
shdocvw.dll	5.00.3315.2879	1.05 MB (1,104,144 bytes)
	4/3/2002 1:45:08 PM	Microsoft Corporation
	c:\winnt\system32\shdocvw.dll	
explorer.exe	5.00.3315.2846	237.27 KB (242,960 bytes)
	4/3/2002 1:45:14 PM	Microsoft Corporation
	c:\winnt\explorer.exe	
tpcc_com_all.dll	1, 0, 0, 1	80.00 KB (81,920 bytes)
	4/26/2002 2:18:22 PM	
	c:\inetpub\wwwroot\tpcc_c-2.dll	
qlvip1.dll	Not Available	92.05 KB (94,262 bytes)
	9/24/2002 5:13:16 PM	
	Not Available c:\winnt\system32\qlvip1.dll	
dbmsgnet.dll	2000.080.0384.00	32.09 KB (32,859 bytes)
	9/24/2002 11:57:38 AM	
	Microsoft Corporation	
	c:\winnt\system32\dbmsgnet.dll	
dbnetlib.dll	2000.080.0528.00	84.08 KB (86,097 bytes)
	4/3/2002 3:15:53 PM	Microsoft Corporation
	c:\winnt\system32\dbnetlib.dll	
ntwdplib.dll	2000.080.0194.00	268.06 KB (274,489 bytes)
	4/3/2002 1:58:12 PM	Microsoft Corporation
	c:\winnt\system32\ntwdplib.dll	
tpcc_dblib.dll	Not Available	28.00 KB (28,672 bytes)
	4/26/2002 2:18:21 PM	
	Not Available c:\inetpub\wwwroot\tpcc_dblib.dll	
tpcc_com.dll	Not Available	24.00 KB (24,576 bytes)
	4/26/2002 2:18:22 PM	
	Not Available c:\inetpub\wwwroot\tpcc_com.dll	
tpcc.dll	0, 4, 0, 0	92.00 KB (94,208 bytes)
	4/26/2002 2:18:20 PM	Microsoft
	c:\inetpub\wwwroot\tpcc.dll	
mfc42.dll	6.00.8665.0	972.05 KB (995,383 bytes)
	12/11/1999 6:00:00 AM	Microsoft Corporation
	c:\winnt\system32\mfc42.dll	
wam.dll	5.00.0984	70.77 KB (72,464 bytes)
	4/3/2002 1:46:26 PM	Microsoft Corporation
	c:\winnt\system32\wam.dll	
odbcint.dll	3.520.7926.0	88.00 KB (90,112 bytes)
	4/3/2002 3:15:46 PM	Microsoft Corporation
	c:\winnt\system32\odbcint.dll	
comdlg32.dll	5.00.3103.1000	236.77 KB (242,448 bytes)
	12/11/1999 6:00:00 AM	Microsoft Corporation
	c:\winnt\system32\comdlg32.dll	

odbc32.dll	3.520.7926.0	216.27 KB (221,456 bytes)
	4/3/2002 3:15:46 PM	Microsoft Corporation
	c:\winnt\system32\odbc32.dll	
mtxoci.dll	2000.2.3471.1	101.77 KB (104,208 bytes)
	4/3/2002 1:44:59 PM	Microsoft Corporation
	c:\winnt\system32\mtxoci.dll	
resutils.dll	5.00.2195.2787	39.77 KB (40,720 bytes)
	4/3/2002 1:45:06 PM	Microsoft Corporation
	c:\winnt\system32\resutils.dll	
clusapi.dll	5.00.2195.2104	54.27 KB (55,568 bytes)
	4/3/2002 1:44:37 PM	Microsoft Corporation
	c:\winnt\system32\clusapi.dll	
mtxclu.dll	2000.2.3471.1	51.27 KB (52,496 bytes)
	4/3/2002 1:44:59 PM	Microsoft Corporation
	c:\winnt\system32\mtxclu.dll	
msdtcprx.dll	2000.2.3471.1	665.77 KB (681,744 bytes)
	4/3/2002 1:44:50 PM	Microsoft Corporation
	c:\winnt\system32\msdtcprx.dll	
comsvcs.dll	2000.2.3471.1	1.35 MB (1,417,488 bytes)
	4/3/2002 1:44:37 PM	Microsoft Corporation
	c:\winnt\system32\comsvcs.dll	
ntlsapi.dll	5.00.2134.1	6.77 KB (6,928 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\ntlsapi.dll	
httpext.dll	0.9.3940.21	435.27 KB (445,712 bytes)
	4/3/2002 1:46:23 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\httpext.dll	
md5filt.dll	5.00.0984	32.77 KB (33,552 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\md5filt.dll	
gzip.dll	5.00.0984	30.27 KB (30,992 bytes)
	4/3/2002 1:46:23 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\gzip.dll	
compfilt.dll	5.00.0984	22.77 KB (23,312 bytes)
	4/3/2002 1:46:23 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\compfilt.dll	
sspifilt.dll	5.00.0984	43.27 KB (44,304 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\sspifilt.dll	
iscomlog.dll	5.00.0984	24.77 KB (25,360 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\iscomlog.dll	
lonsint.dll	5.00.0984	11.77 KB (12,048 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\lonsint.dll	
inetsloc.dll	5.00.0984	20.27 KB (20,752 bytes)
	4/3/2002 1:44:45 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\inetsloc.dll	
iisfecnv.dll	5.00.0984	7.27 KB (7,440 bytes)
	3/18/2002 7:37:59 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\iisfecnv.dll	
isatq.dll	5.00.0984	60.27 KB (61,712 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\isatq.dll	
infocomm.dll	5.00.0984	238.27 KB (243,984 bytes)
	4/3/2002 1:46:24 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\infocomm.dll	
w3svc.dll	5.00.0984	343.27 KB (351,504 bytes)
	4/3/2002 1:46:26 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\w3svc.dll	

security.dll	5.00.2154.1	5.77 KB (5,904 bytes)
	12/11/1999 6:00:00 AM	Microsoft Corporation
	c:\winnt\system32\security.dll	
svcext.dll	5.00.0984	39.77 KB (40,720 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\svcext.dll	
admexs.dll	5.00.0984	27.77 KB (28,432 bytes)
	4/3/2002 1:46:22 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\admexs.dll	
wamreg.dll	5.00.0984	45.77 KB (46,864 bytes)
	4/3/2002 1:46:26 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\wamreg.dll	
metadata.dll	5.00.0984	68.77 KB (70,416 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\metadata.dll	
iismap.dll	5.00.0984	55.77 KB (57,104 bytes)
	4/3/2002 1:44:45 PM	Microsoft Corporation
	c:\winnt\system32\iismap.dll	
nsepm.dll	5.00.0984	43.27 KB (44,304 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\nsepm.dll	
admwpprox.dll	5.00.0984	31.77 KB (32,528 bytes)
	3/18/2002 7:38:00 PM	Microsoft Corporation
	c:\winnt\system32\admwpprox.dll	
coadmin.dll	5.00.0984	39.27 KB (40,208 bytes)
	4/3/2002 1:46:23 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\coadmin.dll	
iisadmin.dll	5.00.0984	15.27 KB (15,632 bytes)
	4/3/2002 1:46:24 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\iisadmin.dll	
rpcref.dll	5.00.0984	4.27 KB (4,368 bytes)
	4/3/2002 1:46:25 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\rpcref.dll	
iisrtl.dll	5.00.0984	119.77 KB (122,640 bytes)
	4/3/2002 1:44:45 PM	Microsoft Corporation
	c:\winnt\system32\iisrtl.dll	
inetinfo.exe	5.00.0984	14.27 KB (14,608 bytes)
	4/3/2002 1:46:24 PM	Microsoft Corporation
	c:\winnt\system32\inetsrv\inetinfo.exe	
netui0.dll	5.00.2134.1	210.27 KB (215,312 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\netui0.dll	
netui0.dll	5.00.2134.1	70.27 KB (71,952 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\netui0.dll	
ntlanman.dll	5.00.2157.1	35.27 KB (36,112 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\ntlanman.dll	
wshnetbs.dll	5.00.2134.1	7.77 KB (7,952 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\wshnetbs.dll	
ntmarta.dll	5.00.2195.2862	98.77 KB (101,136 bytes)
	4/3/2002 1:45:01 PM	Microsoft Corporation
	c:\winnt\system32\ntmarta.dll	
perfos.dll	5.00.2155.1	21.27 KB (21,776 bytes)
	12/11/1999 6:00:00 AM	
	Microsoft Corporation	
	c:\winnt\system32\perfos.dll	

cfgmgr32.dll	5.00.2134.1	16.77 KB
(17,168 bytes)	12/11/1999 6:00:00 AM	
Microsoft Corporation		
c:\winnt\system32\cfgmgr32.dll		
psapi.dll	5.00.2134.1	28.27 KB (28,944 bytes)
Corporation	c:\winnt\system32\psapi.dll	
provthrd.dll	1.50.1085.0000	68.07 KB
(69,708 bytes)	4/3/2002 11:41:29 AM	
Microsoft Corporation		
c:\winnt\system32\provthrd.dll		
ntevt.dll	1.50.1085.0000	192.06 KB (196,669 bytes)
Corporation	c:\winnt\system32\wbem\ntevt.dll	
framedyn.dll	1.50.1085.0000	164.05 KB (167,992 bytes)
Microsoft Corporation	c:\winnt\system32\wbem\framedyn.dll	
cimwin32.dll	1.50.1085.0038	1.02 MB (1,073,232 bytes)
Corporation	c:\winnt\system32\wbem\cimwin32.dll	
wbemsvc.dll	1.50.1085.0007	40.07 KB (41,036 bytes)
Corporation	c:\winnt\system32\wbem\wbemsvc.dll	
wbemess.dll	1.50.1085.0039	364.07 KB (372,804 bytes)
Corporation	c:\winnt\system32\wbem\wbemess.dll	
fastprox.dll	1.50.1085.0037	144.08 KB (147,536 bytes)
Corporation	c:\winnt\system32\wbem\fastprox.dll	
wbemcore.dll	1.50.1085.0036	628.07 KB (643,140 bytes)
Corporation	c:\winnt\system32\wbem\wbemcore.dll	
wbemcomm.dll	1.50.1085.0021	692.07 KB (708,675 bytes)
Corporation	c:\winnt\system32\wbem\wbemcomm.dll	
winmgmt.exe	1.50.1085.0029	192.08 KB (196,685 bytes)
Corporation	c:\winnt\system32\wbem\winmgmt.exe	
wmi.dll	5.00.2191.1	6.27 KB (6,416 bytes)
Corporation	c:\winnt\system32\wmi.dll	
netshell.dll	5.00.2195.2779	457.27 KB (468,240 bytes)
Corporation	c:\winnt\system32\netshell.dll	
netman.dll	5.00.2195.2779	89.27 KB (91,408 bytes)
Corporation	c:\winnt\system32\netman.dll	
sens.dll	5.00.2163.1	36.77 KB (37,648 bytes)
Corporation	c:\winnt\system32\sens.dll	
txfaux.dll	2000.2.3471.1	374.27 KB (383,248 bytes)
Corporation	c:\winnt\system32\txfaux.dll	

es.dll	2000.2.3471.1	222.27 KB (227,600 bytes)
Corporation	c:\winnt\system32\es.dll	
rasadhlp.dll	5.00.2168.1	7.27 KB (7,440 bytes)
Corporation	c:\winnt\system32\rasadhlp.dll	
winrnr.dll	5.00.2160.1	18.77 KB (19,216 bytes)
Corporation	c:\winnt\system32\winrnr.dll	
dhcpcsvc.dll	5.00.2195.2778	88.77 KB (90,896 bytes)
Corporation	c:\winnt\system32\dhcpcsvc.dll	
tapi32.dll	5.00.2182.1	123.27 KB (126,224 bytes)
Corporation	c:\winnt\system32\tapi32.dll	
rasman.dll	5.00.2195.2780	54.77 KB (56,080 bytes)
Corporation	c:\winnt\system32\rasman.dll	
rasapi32.dll	5.00.2195.2671	189.77 KB (194,320 bytes)
Corporation	c:\winnt\system32\rasapi32.dll	
iphlpapi.dll	5.00.2173.2	67.77 KB (69,392 bytes)
Corporation	c:\winnt\system32\iphlpapi.dll	
rnr20.dll	5.00.2195.2871	35.77 KB (36,624 bytes)
Corporation	c:\winnt\system32\rnr20.dll	
wshtcpip.dll	5.00.2195.2104	17.27 KB (17,680 bytes)
Corporation	c:\winnt\system32\wshtcpip.dll	
msafd.dll	5.00.2195.2779	106.77 KB (109,328 bytes)
Corporation	c:\winnt\system32\msafd.dll	
rpcss.dll	5.00.2195.2815	231.27 KB (236,816 bytes)
Corporation	c:\winnt\system32\rpcss.dll	
svchost.exe	5.00.2134.1	7.77 KB (7,952 bytes)
Corporation	c:\winnt\system32\svchost.exe	
iissuba.dll	5.00.0984.9.77 KB (10,000 bytes)	
Corporation	c:\winnt\system32\iissuba.dll	
scecli.dll	5.00.2195.2780	105.27 KB (107,792 bytes)
Corporation	c:\winnt\system32\scecli.dll	
atl.dll	3.00.8449.57.56 KB (58,938 bytes)	
Corporation	c:\winnt\system32\atl.dll	
certcli.dll	5.00.2195.2778	130.77 KB (133,904 bytes)
Corporation	c:\winnt\system32\certcli.dll	
esent.dll	6.0.3940.13	1.08 MB (1,135,376 bytes)
Corporation	c:\winnt\system32\esent.dll	

mswsock.dll	5.00.2195.2871	62.77 KB (64,272 bytes)
Corporation	c:\winnt\system32\mswsock.dll	
ntdsatq.dll	5.00.2195.2878	31.27 KB (32,016 bytes)
Corporation	c:\winnt\system32\ntdsatq.dll	
ntdsa.dll	5.00.2195.2899	990.77 KB (1,014,544 bytes)
Corporation	c:\winnt\system32\ntdsa.dll	
kdcsvc.dll	5.00.2195.2878	137.77 KB (141,072 bytes)
Corporation	c:\winnt\system32\kdcsvc.dll	
sfmapi.dll	5.00.2134.1	38.77 KB (39,696 bytes)
Corporation	c:\winnt\system32\sfmapi.dll	
rtutil.dll	5.00.2168.1	43.77 KB (44,816 bytes)
Corporation	c:\winnt\system32\rtutil.dll	
adsldpc.dll	5.00.2195.2842	127.27 KB (130,320 bytes)
Corporation	c:\winnt\system32\adsldpc.dll	
activeds.dll	5.00.2195.2778	174.77 KB (178,960 bytes)
Corporation	c:\winnt\system32\activeds.dll	
mprapi.dll	5.00.2181.1	79.27 KB (81,168 bytes)
Corporation	c:\winnt\system32\mprapi.dll	
rassfm.dll	5.00.2195.2671	21.27 KB (21,776 bytes)
Corporation	c:\winnt\system32\rassfm.dll	
mpr.dll	5.00.2195.2779	53.27 KB (54,544 bytes)
Corporation	c:\winnt\system32\mpr.dll	
rsabase.dll	5.00.2195.2228	128.27 KB (131,344 bytes)
Corporation	c:\winnt\system32\rsabase.dll	
schannel.dll	5.00.2195.2922	138.27 KB (141,584 bytes)
Corporation	c:\winnt\system32\schannel.dll	
netlogon.dll	5.00.2195.2865	357.77 KB (366,352 bytes)
Corporation	c:\winnt\system32\netlogon.dll	
msv1_0.dll	5.00.2195.2900	111.77 KB (114,448 bytes)
Corporation	c:\winnt\system32\msv1_0.dll	
kerberos.dll	5.00.2195.2913	198.77 KB (203,536 bytes)
Corporation	c:\winnt\system32\kerberos.dll	
msprivs.dll	5.00.2154.1	41.50 KB (42,496 bytes)
Corporation	c:\winnt\system32\msprivs.dll	
samsrv.dll	5.00.2195.2918	369.77 KB (378,640 bytes)
Corporation	c:\winnt\system32\samsrv.dll	
lsasrv.dll	5.00.2195.2964	492.77 KB (504,592 bytes)
Corporation	c:\winnt\system32\lsasrv.dll	

Microsoft Corporation
c:\winnt\system32\lsasrv.dll
lsass.exe 5.00.2195.2964 32.77 KB (33,552 bytes)
12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\lsass.exe
psbase.dll 5.00.2195.2779 111.77 KB
(114,448 bytes) 4/3/2002 1:45:05 PM Microsoft
Corporation c:\winnt\system32\psbase.dll
cryptsvc.dll 5.00.2181.1 61.77 KB
(63,248 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\cryptsvc.dll
wmicore.dll 5.00.2195.2842 72.27 KB
(74,000 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\wmicore.dll
cryptdll.dll 5.00.2135.1 41.27 KB
(42,256 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\cryptdll.dll
wkssvc.dll 5.00.2195.2780 95.27 KB
(97,552 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\wkssvc.dll
srsvc.dll 5.00.2195.2904 79.27 KB
(81,168 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\srsvc.dll
winsta.dll 5.00.2195.2386 36.77 KB
(37,648 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\winsta.dll
icmp.dll 5.00.2134.1 7.27 KB (7,440 bytes)
12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\icmp.dll
lmhsvc.dll 5.00.2195.2778 9.77 KB
(10,000 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\lmhsvc.dll
eventlog.dll 5.00.2178.1 43.77 KB
(44,816 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\eventlog.dll
ntdsapi.dll 5.00.2195.2661 55.77 KB
(57,104 bytes) 4/3/2002 1:45:00 PM Microsoft
Corporation c:\winnt\system32\ntdsapi.dll
scsdrv.dll 5.00.2195.2780 226.27 KB
(231,696 bytes) 4/3/2002 1:45:07 PM Microsoft
Corporation c:\winnt\system32\scsdrv.dll
umpnmpmgr.dll 5.00.2182.1 86.27 KB
(88,336 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\umpnmpmgr.dll
services.exe 5.00.2195.2780 86.77 KB
(88,848 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\services.exe
clbcatq.dll 2000.2.3471.1 496.77 KB
(508,688 bytes) 4/3/2002 1:44:36 PM Microsoft
Corporation c:\winnt\system32\clbcatq.dll
oleaut32.dll 2.40.4517 612.27 KB (626,960
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\oleaut32.dll

cscui.dll 5.00.2195.2959 228.27 KB (233,744
bytes) 4/3/2002 1:44:38 PM Microsoft Corporation
c:\winnt\system32\cscui.dll
winspool.drv 5.00.2195.2780 109.77 KB
(112,400 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\winspool.drv
winscard.dll 5.00.2134.1 77.27 KB
(79,120 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\winscard.dll
wlnotify.dll 5.00.2195.2780 53.77 KB
(55,056 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\wlnotify.dll
cscd11.dll 5.00.2195.2401 98.27 KB
(100,624 bytes) 4/3/2002 1:44:38 PM Microsoft
Corporation c:\winnt\system32\cscd11.dll
lz32.dll 5.00.2134.1 9.77 KB (10,000 bytes)
12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\lz32.dll
version.dll 5.00.2134.1 15.77 KB
(16,144 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\version.dll
rsaenh.dll 5.00.2195.2228 130.77 KB
(133,904 bytes) 4/3/2002 1:46:17 PM Microsoft
Corporation c:\winnt\system32\rsaenh.dll
mscat32.dll 5.131.2134.1 7.77 KB
(7,952 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\mscat32.dll
ole32.dll 5.00.2195.2887 969.77 KB (993,040
bytes) 4/3/2002 1:45:04 PM Microsoft Corporation
c:\winnt\system32\ole32.dll
imagehlp.dll 5.00.2195.2778 125.77 KB
(128,784 bytes) 5/4/2001 1:05:02 PM Microsoft
Corporation c:\winnt\system32\imagehlp.dll
msasn1.dll 5.00.2134.1 51.27 KB
(52,496 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msasn1.dll
crypt32.dll 5.131.2195.2833 451.27 KB
(462,096 bytes) 4/3/2002 1:44:38 PM Microsoft
Corporation c:\winnt\system32\crypt32.dll
wintrust.dll 5.131.2195.2779 162.27 KB
(166,160 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\wintrust.dll
setupapi.dll 5.00.2195.2663 555.77 KB
(569,104 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\setupapi.dll
winmm.dll 5.00.2161.1 184.77 KB (189,200
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\winmm.dll
comct132.dll 5.81 537.77 KB (550,672
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\comct132.dll
shlwapi.dll 5.00.3315.1000 282.77 KB
(289,552 bytes) 4/3/2002 1:45:09 PM Microsoft
Corporation c:\winnt\system32\shlwapi.dll
shell32.dll 5.00.3315.2902 2.25 MB
(2,359,056 bytes) 4/3/2002 1:45:09 PM Microsoft
Corporation c:\winnt\system32\shell32.dll

msgina.dll 5.00.2195.2779 324.27 KB
(332,048 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\msgina.dll
wsock32.dll 5.00.2195.2871 21.27 KB
(21,776 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\wsock32.dll
dnsapi.dll 5.00.2195.2785 130.77 KB
(133,904 bytes) 4/3/2002 1:44:40 PM Microsoft
Corporation c:\winnt\system32\dnsapi.dll
ldap32.dll 5.00.2195.2797 125.27 KB
(128,272 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\ldap32.dll
ws2help.dll 5.00.2134.1 17.77 KB
(18,192 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\ws2help.dll
ws2_32.dll 5.00.2195.2780 67.77 KB
(69,392 bytes) 4/3/2002 1:45:14 PM Microsoft
Corporation c:\winnt\system32\ws2_32.dll
samlib.dll 5.00.2195.2780 49.77 KB
(50,960 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\samlib.dll
netrap.dll 5.00.2134.1 11.27 KB
(11,536 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\netrap.dll
netapi32.dll 5.00.2195.2808 303.77 KB
(311,056 bytes) 4/3/2002 1:44:59 PM Microsoft
Corporation c:\winnt\system32\netapi32.dll
profmap.dll 5.00.2181.1 29.27 KB
(29,968 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\profmap.dll
secur32.dll 5.00.2195.2862 46.77 KB
(47,888 bytes) 4/3/2002 1:45:08 PM Microsoft
Corporation c:\winnt\system32\secur32.dll
sfc.dll 5.00.2195.2896 92.11 KB (94,320 bytes)
4/3/2002 1:45:08 PM Microsoft Corporation
c:\winnt\system32\sfc.dll
nddeapi.dll 5.00.2137.1 15.27 KB
(15,632 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\nddeapi.dll
userenv.dll 5.00.2195.2780 361.77 KB
(370,448 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\userenv.dll
user32.dll 5.00.2195.2821 392.77 KB
(402,192 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\user32.dll
gdi32.dll 5.00.2195.2778 228.77 KB (234,256
bytes) 12/11/1999 6:00:00 AM Microsoft
Corporation c:\winnt\system32\gdi32.dll
rpcrt4.dll 5.00.2195.2832 437.27 KB
(447,760 bytes) 4/3/2002 1:45:07 PM Microsoft
Corporation c:\winnt\system32\rpcrt4.dll
advapi32.dll 5.00.2195.2867 351.77 KB
(360,208 bytes) 12/11/1999 6:00:00 AM
Microsoft Corporation
c:\winnt\system32\advapi32.dll

```

kernel32.dll      5.00.2195.2778    714.77 KB
(731,920 bytes)   12/11/1999 6:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\kernel32.dll
msvcrt.dll        6.10.8924.0     284.05 KB
(290,869 bytes)   5/4/2001 1:05:02 PM Microsoft
Corporation
c:\winnt\system32\msvcrt.dll
winlogon.exe       5.00.2195.2953    173.77 KB
(177,936 bytes)   12/11/1999 6:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\winlogon.exe
sfcfiles.dll       5.00.2195.2967    948.27 KB
(971,024 bytes)   4/3/2002 1:45:08 PM Microsoft
Corporation
c:\winnt\system32\sfcfiles.dll
ntdll.dll         5.00.2195.2779    478.77 KB (490,256
bytes)          5/4/2001 1:05:02 PM Microsoft Corporation
c:\winnt\system32\ntdll.dll
smss.exe          5.00.2195.2901    44.27 KB (45,328 bytes)
12/11/1999 6:00:00 AM
  Microsoft Corporation
    c:\winnt\system32\smss.exe

[Services]

Display Name      Name      State      Start Mode
  Service Type    Path      Error Control
Start Name        Tag ID

Alerter           Alerter   Stopped   Manual   Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0

Application Management AppMgmt Stopped
Manual           Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Computer          Browser   Stopped   Auto
Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Indexing          Service   cisvc    Stopped   Manual
Share Process
c:\winnt\system32\cisvc.exe Normal
LocalSystem 0
ClipBook          ClipSrv  Stopped   Manual   Own Process
c:\winnt\system32\clipsrv.exe Normal
LocalSystem 0
Distributed File System Dfs    Stopped
Manual           Own Process
c:\winnt\system32\dfssvc.exe Normal
LocalSystem 0
DHCP Client       Dhcp    Stopped   Disabled
Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Logical Disk Manager Administrative Service
dmadmin          Stopped   Manual   Share Process
c:\winnt\system32\dmadmin.exe /com
Normal           LocalSystem 0
Logical Disk Manager dmserver Stopped
Manual           Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
DNS Client        Dnscache Stopped   Manual
Share Process

```

```

c:\winnt\system32\services.exe
Normal           LocalSystem 0
Event Log        Eventlog  Running  Auto   Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
COM+             Event System EventsSystem Running
Manual           Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
Fax Service      Fax     Stopped   Manual   Own
Process          c:\winnt\system32\faxsvc.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running  Auto
Share Process
c:\winnt\system32\inetsrv\inetinfo.exe
Normal           LocalSystem 0
Intersite        Messaging IisMsrV Stopped   Disabled Own
Process          c:\winnt\system32\ismserv.exe Normal
LocalSystem 0
Kerberos         Key Distribution Center kdc
Stopped          Disabled Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Server           lanmanserver Running  Auto
Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Workstation       lanmanworkstation Running
Auto             Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
License Logging Service LicenseService
Stopped          Manual   Own Process
c:\winnt\system32\llssrv.exe Normal
LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Running
Auto             Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Messenger         Messenger Stopped   Manual   Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
NetMeeting        Remote Desktop Sharing mnmsrvrc
Stopped          Manual   Own Process
c:\winnt\system32\mnmsrvrc.exe Normal
LocalSystem 0
Distributed Transaction Coordinator MSDTC
Stopped          Manual   Own Process
c:\winnt\system32\msdtc.exe Normal
LocalSystem 0
Windows Installer MSI Server Stopped   Manual
Share Process
c:\winnt\system32\msiexec.exe /v
Normal           LocalSystem 0
Network DDE      NetDDE   Stopped   Manual
Share Process
c:\winnt\system32\netdde.exe Normal
LocalSystem 0
Network DDE DSDM NetDDEdsm Stopped
Manual           Share Process
c:\winnt\system32\netdde.exe Normal
LocalSystem 0

```

```

Net Logon Netlogon Stopped   Manual   Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running  Manual
Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
File Replication NtFrs   Stopped   Manual   Own
Process          c:\winnt\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSp
Stopped          Manual   Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped   Disabled
Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
Plug and Play PlugPlay Running  Auto
Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
IPSEC Policy Agent PolicyAgent Stopped
Manual           Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto             Share Process
c:\winnt\system32\services.exe
Normal           LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped          Manual   Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
Remote Access Connection Manager RasMan
Stopped          Manual   Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped          Disabled Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal           LocalSystem 0
Remote Registry Service RemoteRegistry
Stopped          Manual   Own Process
c:\winnt\system32\regsvc.exe Normal
LocalSystem 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped          Manual   Own Process
c:\winnt\system32\locator.exe Normal
LocalSystem 0
Remote Procedure Call (RPC) RpcSs   Running
Auto             Share Process
c:\winnt\system32\svchost -k rpcss
Normal           LocalSystem 0
QoS RSVP        RSVP    Running  Manual   Own Process
c:\winnt\system32\rsvp.exe -s Normal
LocalSystem 0
Security Accounts Manager SamSs   Stopped
Manual           Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Smart Card Helper SCardDrv Stopped   Manual
Share Process

```

```

c:\winnt\system32\scardsvr.exe
Ignore LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\winnt\system32\scardsvr.exe
Ignore LocalSystem 0
Task Scheduler Schedule Stopped Manual
Share Process
c:\winnt\system32\mstask.exe Normal
LocalSystem 0
RunAs Service seclogon Stopped Manual
Share Process
c:\winnt\system32\services.exe
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Internet Connection Sharing SharedAccess
Stopped Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Print Spooler Spooler Stopped Manual Own
Process c:\winnt\system32\spoolsv.exe Normal
LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\winnt\system32\smlogsvc.exe
Normal LocalSystem 0
Telephony TapiSrv Stopped Auto Share Process
c:\winnt\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Stopped
Disabled Own Process
c:\winnt\system32\termsrv.exe Normal
LocalSystem 0
Telnet TlnTSvr Stopped Manual Own Process
c:\winnt\system32\tlntsvr.exe Normal
LocalSystem 0
Distributed Link Tracking Server TrkSvr
Stopped Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Stopped Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\winnt\system32\ups.exe Normal
LocalSystem 0
Utility Manager UtilMan Stopped Manual Own
Process c:\winnt\system32\utilman.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Manual
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
World Wide Web Publishing Service W3SVC
Running Auto Share Process
c:\winnt\system32\inetsrv\inetinfo.exe
Normal LocalSystem 0

```

```

Windows Management Instrumentation WinMgmt
Running Auto Own Process
c:\winnt\system32\wbem\winmgmt.exe
Ignore LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Running Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
[Program Groups]
Group Name Name User Name
Accessories Default User:Accessories
Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Accessories\System Tools Default
User:Accessories\System Tools Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
Microsoft SQL Server All Users:Microsoft SQL
Server All Users
Startup All Users:Startup All Users
Tardis All Users:Tardis All Users
Accessories PC1\Administrator:Accessories
PC1\Administrator
Accessories\Accessibility
PC1\Administrator:Accessories\Accessibility
PC1\Administrator
Accessories\Entertainment
PC1\Administrator:Accessories\Entertainment
PC1\Administrator
Accessories\System Tools
PC1\Administrator:Accessories\System Tools
PC1\Administrator
Administrative Tools
PC1\Administrator:Administrative Tools
PC1\Administrator
SANblade Control VIX
PC1\Administrator:SANblade Control VIX
PC1\Administrator
Startup PC1\Administrator:Startup
PC1\Administrator
[Startup Programs]
Program Command User Name Location
CPQTEAM cpqteam.exe All Users
HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run
[OLE Registration]

```

```

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
Image Document "C:\Program Files\Windows
NT\Accessories\ImageVue\KodakImg.exe"
WordPad Document "%ProgramFiles%\Windows
NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object Not
Available
Bitmap Image mspaint.exe
[Internet Explorer 5]
[ Following are sub-categories of this main category
]
[Summary]
Item Value
Version 5.0.0.3315.1000
Build 53315.1000
Product ID 51876-OEM-0000007-00000
Application Path C:\Program Files\Internet
Explorer
Language English (United States)
Active Printer Not Available
Cipher Strength 168-bit
Content Advisor Disabled
IEAK Install No
[File Versions]
File Version Size Date Path
Company
advapi32.dll 5.0.2195.2867 352 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation
advpack.dll 5.0.3103.1000 87 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation
browselc.dll 5.0.3315.2846 35 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation
browseui.dll 5.0.3315.2846 789 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation
ckcnv.exe 5.0.2189.1 9 KB 12/11/1999
6:00:00 AM C:\WINNT\system32 Microsoft
Corporation
comctl32.dll 5.81.3103.1000 538 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation
crypt32.dll 5.131.2195.2833 451 KB
5/4/2001 12:05:02 PM
C:\WINNT\system32 Microsoft Corporation

```

```

enhsig.dll      <File Missing>    Not Available
                Not Available    Not Available    Not
Available
iemigrat.dll   <File Missing>    Not Available
                Not Available    Not Available    Not
Available
isetup.dll     5.0.3103.1000    57 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
iexplore.exe    5.0.2920.0     59 KB
                12/11/1999 6:00:00 AM
                C:\Program
Files\Internet Explorer Microsoft Corporation
imagehelp.dll   5.0.2195.2778    126 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
imghelp.dll    <File Missing>    Not Available
                Not Available    Not Available    Not
Available
inseng.dll     5.0.3103.1000    72 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
jobexec.dll    5.0.0.1       47 KB
                12/11/1999
6:00:00 AM
                C:\WINNT\system32 Microsoft
Corporation
jscript.dll    5.1.0.5907     476 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
jsproxy.dll    5.0.2920.0     13 KB
                12/11/1999 6:00:00 AM
                C:\WINNT\system32 Microsoft Corporation
msaahtml.dll   <File Missing>    Not Available
                Not Available    Not Available    Not
Available
mshtml.dll    5.0.3315.2870    2290 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
msjava.dll    5.0.3802.0     923 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
msoss.dll     <File Missing>    Not Available    Not
Available
Not Available
Not Available
msxml.dll     8.0.5718.1     493 KB
                5/4/2001
12:05:02 PM
                C:\WINNT\system32 Microsoft
Corporation
occache.dll   5.0.3103.1000    86 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
ole32.dll     5.0.2195.2887    970 KB
                5/4/2001
12:05:02 PM
                C:\WINNT\system32 Microsoft
Corporation
oleaut32.dll  2.40.4517.0    612 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
olepro32.dll  5.0.4517.0     160 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
rsabase.dll   5.0.2195.2228    128 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
rsaenh.dll    5.0.2195.2228    131 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation

```

```

rsapi32.dll   <File Missing>    Not Available
                Not Available    Not Available    Not
Available
rsasig.dll   <File Missing>    Not Available
                Not Available    Not Available    Not
Available
schannel.dll  5.1.2195.0     138 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
shdoc401.dll <File Missing>    Not Available
                Not Available    Not Available    Not
Available
shdocvw.dll  5.0.3315.2879    1078 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
shell32.dll   5.0.3315.2902    2304 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
shlwapi.dll   5.0.3315.1000    283 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
url.dll       5.0.2920.0     82 KB
                12/11/1999
6:00:00 AM
                C:\WINNT\system32 Microsoft
Corporation
urlmon.dll   5.0.3315.1000    441 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
vbscript.dll  5.1.0.5907     428 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
webcheck.dll  5.0.3315.1000    252 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
win.com       5.0.2134.1     24 KB
                12/11/1999
6:00:00 AM
                C:\WINNT\system32 Microsoft
Corporation
wininet.dll   5.0.3315.1000    457 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
winsock.dll   3.10.0.103     3 KB
                12/11/1999 6:00:00 AM
                C:\WINNT\system32 Microsoft Corporation
wintrust.dll  5.131.2195.2779    162 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
wsock.vxd    <File Missing>    Not Available    Not
Available
Not Available
Not Available
wsock32.dll  5.0.2195.2871    21 KB
                5/4/2001 12:05:02 PM
                C:\WINNT\system32 Microsoft Corporation
wsock32n.dll <File Missing>    Not Available    Not
Available
Not Available
Not Available
Available
[Connectivity]
Item        Value
Connection Preference Never dial
EnableHttp1.1 1
ProxyHttp1.1 0
LAN Settings

```

```

AutoConfigProxy  wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy Disabled
ProxyServer
ProxyOverride
[Cache]
[ Following are sub-categories of this main category
]
[Summary]
Item        Value
Page Refresh Type Automatic
Temporary Internet Files Folder C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space 8665 MB
Available Disk Space 5682 MB
Maximum Cache Size 270 MB
Available Cache Size 271 MB
[List of Objects]
Program File Status CodeBase
No cached object information available
[Content]
[ Following are sub-categories of this main category
]
[Summary]
Item        Value
Content Advisor Disabled
[Personal Certificates]
Issued To Issued By Validity Signature Algorithm
Administrator Administrator 4/3/2002 to
3/10/2102 sha1RSA
Administrator Administrator 4/11/2002 to
3/18/2102 sha1RSA
[Other People Certificates]
Issued To Issued By Validity Signature Algorithm
No other people certificate information available
[Publishers]
Name
No publisher information available
[Security]
Zone        Security Level
Local intranet Medium-low
Trusted sites Low

```

Internet Medium
Restricted sites High

Microsoft SQL Server 2000 Installation Procedures

Microsoft SQL Server 2000 Installation Procedures
Type of installation: custom
During the custom installation, use the default settings for all except the following two areas:
Services accounts:
SQL Server - local system account
SQL Server Agent - local system account
Set the sort order/collation as binary sort order/Latin_1_General

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2000 was used to change the queue settings for the TPCC COM+ single queue component. The single queue component was set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The min and max pool size for the single queue component on each client was 65. Delivery threads were set under the TPCC key in the registry. The construction string was Dummy String

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	65,000	Rows	Data KB	Index KB	Extra 5% KB	TpmC
Warehouse	1,500		695	40	37	
District	65,000		7,224	56	364	773
Customer	195,000,000	141,818,184	8,456,544	7,513,736	2,094,059	157,788,464
History	195,000,000	10,833,344	160			108,335,04
NewOrder	68,500,000	924,904	2,136	46,352		97,392
Orders	195,000,000	5,977,016	2,717,924		6,935,764	156,807,00
OrderLine	1,949,995,927	121,874,624	257,950		25,249,506	147,320,90
Item	100,000	9,528	56	479		10,063
Stock	650,000,000	208,000,008	388,816	10,419,441		21,880,8265
Total		489,445,528	11,823,688	17,980,410	34,279,329	519,249,626
MB						
Dynamic Space	135,435	Sum of Data for Order, Orderline and History				
Static Space	371,645	Sum of Data+Index+5% Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	25,972	(Dynamic Space/(W*62..5)) * tpmc				
Daily Spread	-	(Free Space - 1.5% Daily Growth) Zero Assumed				

Misc_fg	CS_fg
773	773
7644	7644
0	0
12927563	12927563
973392	973392
15680700	15680700
14732090	14732090
10063	10063
0	0
21,880,8265	21,880,8265
176,932,225	176,932,225
376,596,730	376,596,730

files= 4
size= 4
8K blocks OK

MB

Dynamic Space 135,435 Sum of Data for Order, Orderline and History

Static Space 371,645 Sum of Data+Index+5% Dynamic Space

Free Space na Total Allocated Spac - (Dynamic + Static Space)

Daily Growth 25,972 (Dynamic Space/(W*62..5)) * tpmc

Daily Spread - (Free Space - 1.5% Daily Growth) Zero Assumed

Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size
60 Day Space DB	1,884.72	224	3785.60	18GB	16,900
			0.00	9GB	8,473
			0.00	4GB	3,999
Total DB		224.00	3785.60	9GB	
8-hr log + mirror	333.4839	14	492.19	36GB	35,156
OS, Swap	3	1	8.473	9GB	
Total Storage	2,221.21	GB	4,286.26	GB	

Appendix E: *Third Party Letters*

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



November 18, 2002

Hewlett-Packard
Company
Paul Cao
MS150402
20555 SH 249
Houston, TX 77070

Mr. Cao:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-00846	SQL Server 2000 Enterprise Edition <i>Per processor licensing</i> <i>Discount Schedule: Open Program Level C</i> <i>Unit Price reflects a 17% discount from the retail unit price of \$19,999.</i>	\$16,541	4	\$66,164
C11-00821	Windows 2000 Server <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	5	\$3,690
N/A	.Net Enterprise Server 2003 <i>Server license only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 18% discount from the retail unit price of \$3,299.</i>	\$2,699	1	\$2,699
048-00317	Visual C++ Professional 6.0 Win32 <i>No discounts applied</i>	\$549	1	\$549
PRO-PRORS-16U-01	Database Server Support Package <i>1 Year Term</i>	\$1,950	3	\$5,850

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by December 31, 2002.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.



QLogic Corporation • 26600 Laguna Hills Drive • Aliso Viejo • CA 92656 • Ph: (949) 389-6000

To:	Brean Campbell	Fax:	281-514-8375
From:	Joann Laforge	Date:	November 1, 2002
Re:	MSRP for Qlogic HBA and Switch	Pages incl cover:	1
cc:			

Brean:

Qlogic is please to provide you the following MSRP for your TCP Benchmark publication.

<u>Product</u>	<u>Distributor</u>	<u>Price</u>
QLA2350	Unique	\$2,095
QLA2352	Unique	\$3,595
Sanbox2/16 port switch	Unique Bell, Tech Data, Arrow	\$17,995

If you have any questions or need anything else, please let me know.

Thank you for your interest in Qlogic.

Joann Laforge
OEM Account Executive
Qlogic Corporation
Office: 281-378-1565
Cell: 281-513-9281
Fax: 281-378-1567
joann.laforge@qlogic.com

FORM: AP279 Rev. B (11/01)