



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant ML370 G5 SAS 3.0 GHz Dual Core
using
Microsoft SQL Server 2005 Enterprise x64 Edition SP1
and
Windows Server 2003 Enterprise x64 Edition SP1

**First Edition
Submitted for Review
May 22, 2006**

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2006 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2006

HP, NonStop, ProLiant ML370 G5, ProLiant DL360 G4p and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2000, Windows Server 2003, Enterprise x64 Edition and SQL Server 2005 Enterprise x64 Edition are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	3
PREFACE	5
TPC BENCHMARK C OVERVIEW	5
ABSTRACT	6
OVERVIEW.....	6
TPC BENCHMARK C METRICS.....	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	6
AUDITOR	6
GENERAL ITEMS.....	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	15
INSERT AND DELETE OPERATIONS.....	15
PARTITIONING	15
REPLICATION, DUPLICATION OR ADDITIONS	15
CLAUSE 2 RELATED ITEMS	16
RANDOM NUMBER GENERATION.....	16
INPUT/OUTPUT SCREEN LAYOUT.....	16
PRICED TERMINAL FEATURE VERIFICATION.....	16
PRESENTATION MANAGER OR INTELLIGENT TERMINAL.....	16
TRANSACTION STATISTICS	17
QUEUEING MECHANISM	17
CLAUSE 3 RELATED ITEMS	18
TRANSACTION SYSTEM PROPERTIES (ACID)	18
ATOMICITY.....	18
<i>Completed Transactions</i>	18
<i>Aborted Transactions</i>	18
CONSISTENCY.....	18
ISOLATION.....	18
DURABILITY	19
<i>Durable Media Failure</i>	19
<i>Instantaneous Interruption and Loss of Memory</i>	20
CLAUSE 4 RELATED ITEMS	21
INITIAL CARDINALITY OF TABLES	21

DATABASE LAYOUT	21
TYPE OF DATABASE.....	22
DATABASE MAPPING.....	22
60 DAY SPACE.....	22
CLAUSE 5 RELATED ITEMS	23
THROUGHPUT	23
KEYING AND THINK TIMES.....	23
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	24
STEADY STATE DETERMINATION	29
WORK PERFORMED DURING STEADY STATE.....	29
MEASUREMENT PERIOD DURATION.....	29
REGULATION OF TRANSACTION MIX.....	30
TRANSACTION STATISTICS	30
CHECKPOINT COUNT AND LOCATION	31
CHECKPOINT DURATION.....	31
CLAUSE 6 RELATED ITEMS	32
RTE DESCRIPTIONS	32
EMULATED COMPONENTS	32
FUNCTIONAL DIAGRAMS	32
NETWORKS	32
OPERATOR INTERVENTION	32
CLAUSE 7 RELATED ITEMS	33
SYSTEM PRICING	33
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE.....	33
ORDERABILITY DATE	33
COUNTRY SPECIFIC PRICING	33
USAGE PRICING	33
CLAUSE 9 RELATED ITEMS	35
AUDITOR'S REPORT.....	35
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	35
APPENDIX A: SOURCE CODE	A-1 - A-135
APPENDIX B: DATABASE DESIGN	B-1 – B-43
APPENDIX C: TUNABLE PARAMETERS	C-1 - C-71
APPENDIX D: 60-DAY SPACE	D-1 - D-3
APPENDIX E: THIRD PARTY QUOTES	E-1 - E-3
APPENDIX F: PRICE VERIFICATION	F-1

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.7.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant ML370 G5 SAS. The operating system used for the benchmark was Windows Server 2003, Enterprise x64 Edition SP1. The DBMS used was Microsoft SQL Server 2005 Enterprise x64 Edition SP1.

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

169,360 tpmC
USD \$2.93 per tpmC

The availability date is November 22, 2006.

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.


Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company	HP ProLiant ML370 G5 SAS 3.0 GHz/4MB Dual Core	TPC-C Rev. 5.7
	C/S with 8 HP ProLiant DL360 G4p	Report Date: May 22, 2006

Total System Cost	TPC-C Throughput	Price/Performance	Availability Date
USD \$496,122	169,360	USD \$2.93	Nov. 22, 2006

Database Server Processors /Cores/Threads	Database Manager	Operating System	Other Software	Number of Users
2/4/4 Intel 5160 3.0 GHz DC	Microsoft SQL Server 2005 Enterprise x64 Edition SP1	Windows Server 2003 Enterprise x64 Edition SP1	Microsoft Visual C++ Microsoft COM+	134,560

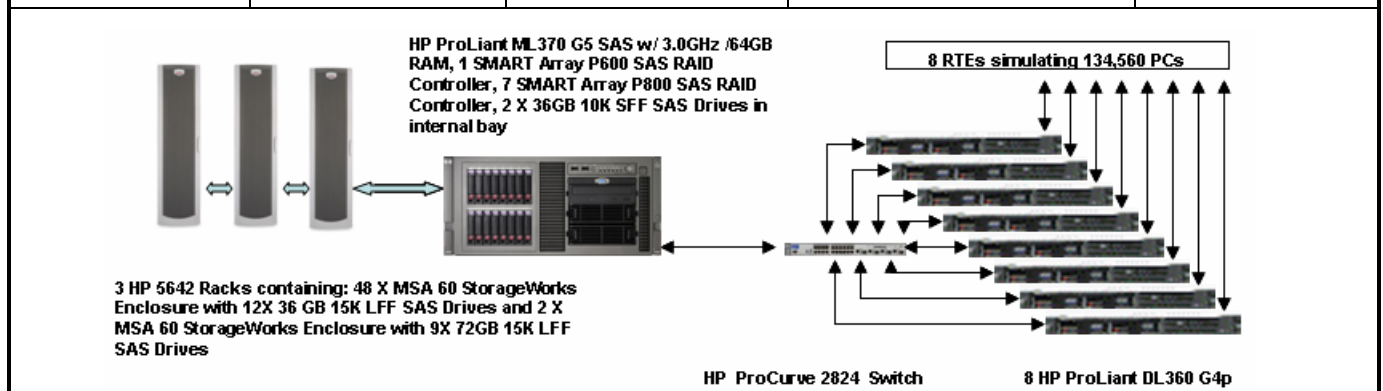

System Components	Server		Each Client	
	Quantity	Description	Quantity	Description
Processors/Cores/Threads	2/4/4	3.0 GHz DC Intel 5160 w/ 4M Cache	2/2/2	3.6 GHz Intel Xeon w/ 2MB cache
Memory	8	8 GB DDR (2 X 4 GB)	1	1024 MB
Disk Controllers	1 7	Smart P600 Controller Smart P800 Controller	1	Integrated Smart Array 6i Controller
Disk Drives	18 576 2	72GB 15K LFF SAS Drives (log) 36 GB 15K LFF SAS Drives (data) 36 GB 10K SFF SAS Drives (internal, os)	2	36 GB SCSI Drive
Total Storage		22,104 GB		72 GB

Hewlett-Packard		HP ProLiant ML370 G5 SAS			TPC-C Rev. 5.7		
Company		3.0GHz/4MB DC Client/Server			Report Date		22-May-06
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price	
		Brand	Pricing				
Server Hardware							
HP ML370 G5 Rack SAS MOD-FX Svr	400606-B21		1*	1,450	1	1,450	
HP X5160 ML370G5 Kit (3.0GHz/4MB dual-core processor option kit)	416198-B21		1*	1,349	2	2,698	
8GB FBD PC2-5300 2 x 4GB Kit	397415-B21		1*	10,499	8	83,992	
HP ML370 G5 Mem. Board Kit	403766-B21		1*	249	1	249	
HP Smart Array P800/512MB SAS Controller	381513-B21		1*	1,299	7	9,093	
HP SMART Array P600 3G SAS/SATA RAID Controller	337972-B21		1	799	1	799	
HP s7540 17in. CRT Monitor	PF997AA#ABA		1	139	1	139	
HP PS/2 Scroll Mouse carbonite	DG169AV		1	5	1	5	
HP Enhanced Keyboard	DG170AV#ABA		1	10	1	10	
HP 5642 Pallet Unassembled Rack	358254-B21		1	689	3	2,067	
UPS R1500 XR Low Voltage US	204404-001		1	866	1	866	
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive	375868-B21		1	299	576	172,224	
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375868-B21		1	299	58		17,342
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive	375870-B21		1	459	18	8,262	
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375870-B21		1	459	2		918
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21		1	299	2	598	
HP StorageWorks MSA-60 Storage	418408-B21		1*	3,250	50	162,500	
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21		1*	3,250	5		16,250
HP CPe 3Y 4H 24x7 HW ProLiant ML370	U4529E		1	949	1		949
						Subtotal	444,952
							35,459
Server Software							
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03150	Microsoft	2	23,911	2	47,822	Incl Below
Microsoft Visual C++ Standard	254-00170	Microsoft	2	109	1	109	Incl Below
Microsoft Windows 2003 Server, Enterprise Edition X64	P72-00274	Microsoft	2	2,334	1	2,334	Incl Below
Microsoft Problem Resolution Services		Microsoft	2	245	1		245
						Subtotal	50,265
							245
Client Hardware							
HP DL360G4p X3.6GHz/2MB/1GB SCSI US Svr	376236-001		1	2,799	8	22,392	
Dual Integrated Gigabit NIC, Integrated Smart Array Controller 6i							
Intel Xeon 3.6GHz 2MB DL360G4 Processor	376242-B21		1	999	8	7,992	
36GB 15K U320 Pluggable Hard Drive	286776-B22		1	269	16	4,304	
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	162675-002		1	599	8		4,792
						Subtotal	34,688
							4,792
Client Software							
Windows Server 2000, Standard Edition	C11-00821	Microsoft	2	738	8	5,904	Incl. Above
						Subtotal	5,904
							0
User Connectivity							
HP ProCurve Switch 2824	J4903A#ABA		1	2499	1	2,499	
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E		1	1000	1		1,000
10 foot Cat5E Non Booted Network Patch Cables	cb1c5ENB10		3	3	18	54	
10 foot Cat5E Non Booted Network Patch Cables (plus 10% spares)	cb1c5ENB10		3	3	2		6
						Subtotal	2,553
							1,006
Large Purchase and Net 30 discount (See Note 1)	16.0%		1			(\$77,142)	(\$6,600)
						Total	\$461,220
							\$34,902
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.						Three-Year Cost of Ownership: USD	\$496,122
						tpmC Rating:	169,360
						\$ / tpmC: USD	\$2.93
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= LanAdapters.com							
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1							
* = These components are not immediately orderable. See the FDR for more information.							
Note 2 = The benchmark results were audited by Lorna Livingtree of Performance Metrics							

Numerical Quantities Summary

MQTH, Computed Maximum Qualified Throughput

169,360 tpmC

Response Times (in seconds)	Average	90%	Maximum
New-Order	0.28	0.44	4.48
Payment	0.26	0.43	3.87
Order-Status	0.27	0.44	4.45
Delivery (interactive portion)	0.10	0.11	0.16
Delivery (deferred portion)	0.13	0.18	0.80
Stock-Level	0.27	0.43	4.18
Menu	0.10	0.11	0.45

Transaction Mix, in percent of total transaction

New-Order	44.93%
Payment	43.02%
Order-Status	4.03%
Delivery	4.01%
Stock-Level	4.01%

Emulation Delay (in seconds)

Resp.Time Menu

New-Order	0.10	0.10
Payment	0.10	0.10
Order-Status	0.10	0.10
Delivery (interactive)	0.10	0.10
Stock-Level	0.10	0.10

Keying/Think Times (in seconds)

Min. Average Max.

New-Order	18.02/0.00	18.03/12.04	18.19/120.33
Payment	3.02/0.00	3.03/12.04	3.19/120.33
Order-Status	2.02/0.00	2.03/10.04	2.15/100.35
Delivery (interactive)	2.02/0.00	2.03/5.05	2.19/50.33
Stock-Level	2.02/0.00	2.03/5.05	2.17/50.33

Test Duration

Ramp-up time	52 minutes
Measurement interval	120 minutes
Transactions (all types) completed during measurement interval	46,838,873
Ramp down time	32 minutes

Checkpointing

Number of checkpoints	4
Checkpoint interval	30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are included on the following page.

Figure 1. Benchmarked Configuration


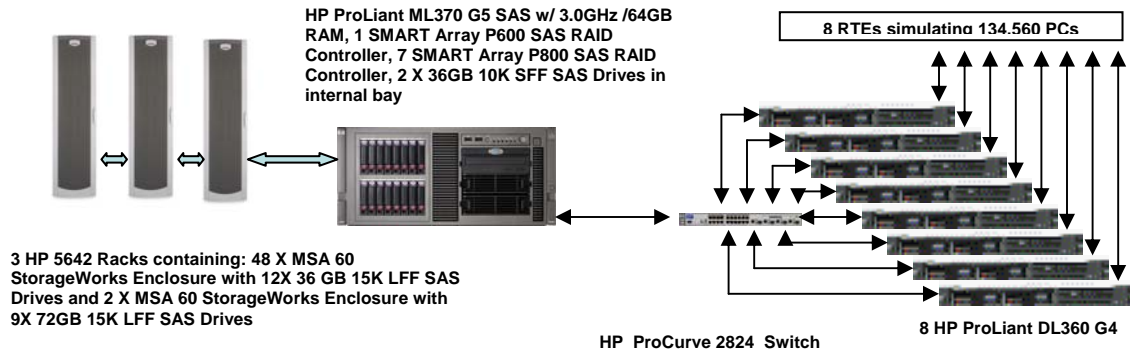


Figure 2. Priced Configuration

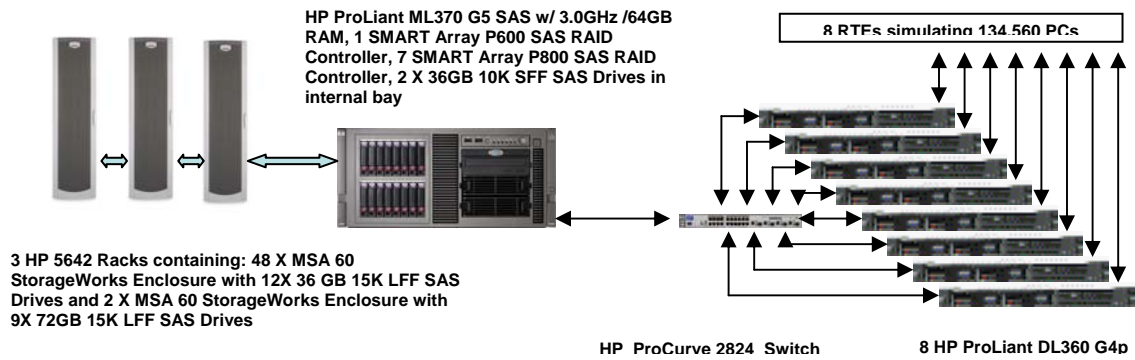

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 576 drives at 36GB for database data, two 36GB drives for the operating system, and 18 drives at 72GB for database log. There were 48 MSA60 enclosures that were connected in groups of 4 to one of the two channels of the P800 Smart Array Controller. Each MSA60 enclosure contained 12 36GB LFF SAS disk drives each that was used for database data. There were 2 MSA60 enclosures with 9 72GB LFF SAS disk drives each that was used for the database log and was also connected to a P800 Smart Array Controller. The 2 36GB SFF SAS disk drives for the operating system were in the internal drive cage of the ML370 G5 SAS, which was connected to a P600 Smart Array Controller.

Benchmarked Configuration:

ML370 G5 SAS, Slot 3, P600 SAS Smart Array Controller, Array A

LOGICAL DRIVE C: Total Capacity = 33.88 GB RAID 0+1
Microsoft Windows Server 2003, Enterprise x64 Edition SP1

ML370 G5 SAS, Slot 4, P800 SAS Smart Array Controller, Port 1, Array A

LOGICAL DRIVE C:\cs\cs1: Total Capacity = 74.22 GB RAID 0
MSSQL_cs1
LOGICAL DRIVE C:\misc\misc1: Total Capacity = 48.83 GB RAID 0
MSSQL_misc1
LOGICAL DRIVE C:\backup\backup1 Total Capacity = 123.04 GB RAID 0+1
LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1
LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1
LOGICAL DRIVE C:\backup2\backup1 Total Capacity = 195.31 GB RAID 0+1
tpccback2_1

ML370 G5 SAS, Slot 4, P800 SAS Smart Array Controller, Port 2, Array B

LOGICAL DRIVE C:\cs\cs2: Total Capacity = 74.22 GB RAID 0
MSSQL_cs2
LOGICAL DRIVE C:\misc\misc2: Total Capacity = 48.83 GB RAID 0
MSSQL_misc2
LOGICAL DRIVE C:\backup\backup2 Total Capacity = 123.04 GB RAID 0+1
LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1
LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1
LOGICAL DRIVE C:\backup2\backup2 Total Capacity = 195.31 GB RAID 0+1
tpccback2_2

ML370 G5 SAS, Slot 5, P800 SAS Smart Array Controller, Port 1, Array A

<u>LOGICAL DRIVE C:\cs\cs5:</u>	<u>Total Capacity = 74.22 GB</u>	<u>RAID 0</u>
MSSQL_cs5		
<u>LOGICAL DRIVE C:\misc\misc5:</u>	<u>Total Capacity = 48.83 GB</u>	<u>RAID 0</u>
MSSQL_misc5		
<u>LOGICAL DRIVE C:\backup\backup5</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE C:\backup2\backup5</u>	<u>Total Capacity = 195.31 GB</u>	<u>RAID 0+1</u>
tpccback2_5		

ML370 G5 SAS, Slot 5, P800 SAS Smart Array Controller, Port 2, Array B

<u>LOGICAL DRIVE C:\cs\cs6:</u>	<u>Total Capacity = 74.22 GB</u>	<u>RAID 0</u>
MSSQL_cs6		
<u>LOGICAL DRIVE C:\misc\misc6:</u>	<u>Total Capacity = 48.83 GB</u>	<u>RAID 0</u>
MSSQL_misc6		
<u>LOGICAL DRIVE C:\backup\backup6</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE C:\backup2\backup6</u>	<u>Total Capacity = 195.31 GB</u>	<u>RAID 0+1</u>
tpccback2_6		

ML370 G5 SAS, Slot 6, P800 SAS Smart Array Controller, Port 1, Array A

<u>LOGICAL DRIVE C:\cs\cs11:</u>	<u>Total Capacity = 74.22 GB</u>	<u>RAID 0</u>
MSSQL_cs11		
<u>LOGICAL DRIVE C:\misc\misc11:</u>	<u>Total Capacity = 48.83 GB</u>	<u>RAID 0</u>
MSSQL_misc11		
<u>LOGICAL DRIVE C:\backup\backup11</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE C:\backup2\backup11</u>	<u>Total Capacity = 195.31 GB</u>	<u>RAID 0+1</u>
tpccback2_11		

ML370 G5 SAS, Slot 6, P800 SAS Smart Array Controller, Port 2, Array B

<u>LOGICAL DRIVE C:\cs\cs12:</u>	<u>Total Capacity = 74.22 GB</u>	<u>RAID 0</u>
MSSQL_cs12		
<u>LOGICAL DRIVE C:\misc\misc12:</u>	<u>Total Capacity = 48.83 GB</u>	<u>RAID 0</u>
MSSQL_misc12		
<u>LOGICAL DRIVE C:\backup\backup12</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE C:\backup2\backup12</u>	<u>Total Capacity = 195.31 GB</u>	<u>RAID 0+1</u>
tpccback2_12		

ML370 G5 SAS, Slot 7, P800 SAS Smart Array Controller, Port 1, Array A

<u>LOGICAL DRIVE C:\cs\cs9:</u>	<u>Total Capacity = 74.22 GB</u>	<u>RAID 0</u>
MSSQL_cs9		
<u>LOGICAL DRIVE C:\misc\misc9:</u>	<u>Total Capacity = 48.83 GB</u>	<u>RAID 0</u>
MSSQL_misc9		
<u>LOGICAL DRIVE C:\backup\backup9</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>

LOGICAL DRIVE C:\backup2\backup9 Total Capacity = 195.31 GB RAID 0+1
tpccback2_9

ML370 G5 SAS, Slot 7, P800 SAS Smart Array Controller, Port 2, Array B

LOGICAL DRIVE C:\cs\cs10: Total Capacity = 74.22 GB RAID 0
MSSQL_cs10

LOGICAL DRIVE C:\misc\misc10: Total Capacity = 48.83 GB RAID 0
MSSQL_misc10

LOGICAL DRIVE C:\backup\backup10 Total Capacity = 123.04 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1

LOGICAL DRIVE C:\backup2\backup10 Total Capacity = 195.31 GB RAID 0+1
tpccback2_10

ML370 G5 SAS, Slot 8, P800 SAS Smart Array Controller, Port 1, Array A

LOGICAL DRIVE C:\cs\cs7: Total Capacity = 74.22 GB RAID 0
MSSQL_cs7

LOGICAL DRIVE C:\misc\misc7: Total Capacity = 48.83 GB RAID 0
MSSQL_misc7

LOGICAL DRIVE C:\backup\backup7 Total Capacity = 123.04 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1

LOGICAL DRIVE C:\backup2\backup7 Total Capacity = 195.31 GB RAID 0+1
tpccback2_7

ML370 G5 SAS, Slot 8, P800 SAS Smart Array Controller, Port 2, Array B

LOGICAL DRIVE C:\cs\cs8: Total Capacity = 74.22 GB RAID 0
MSSQL_cs8

LOGICAL DRIVE C:\misc\misc8: Total Capacity = 48.83 GB RAID 0
MSSQL_misc8

LOGICAL DRIVE C:\backup\backup8 Total Capacity = 123.04 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1

LOGICAL DRIVE C:\backup2\backup8 Total Capacity = 195.31 GB RAID 0+1
tpccback2_8

ML370 G5 SAS, Slot 9, P800 SAS Smart Array Controller, Port 1, Array A

LOGICAL DRIVE C:\cs\cs3: Total Capacity = 74.22 GB RAID 0
MSSQL_cs3

LOGICAL DRIVE C:\misc\misc3: Total Capacity = 48.83 GB RAID 0
MSSQL_misc3

LOGICAL DRIVE C:\backup\backup3 Total Capacity = 123.04 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 75.19 GB RAID 0+1

LOGICAL DRIVE (not mounted) Total Capacity = 49.80 GB RAID 0+1

LOGICAL DRIVE C:\backup2\backup3 Total Capacity = 195.31 GB RAID 0+1
tpccback2_3

ML370 G5 SAS, Slot 9, P800 SAS Smart Array Controller, Port 2, Array B

LOGICAL DRIVE C:\cs\cs4: Total Capacity = 74.22 GB RAID 0
MSSQL_cs4

LOGICAL DRIVE C:\misc\misc4: Total Capacity = 48.83 GB RAID 0
MSSQL_misc4

<u>LOGICAL DRIVE C:\backup\backup4</u>	<u>Total Capacity = 123.04 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 75.19 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE (not mounted)</u>	<u>Total Capacity = 49.80 GB</u>	<u>RAID 0+1</u>
<u>LOGICAL DRIVE C:\backup2\backup4</u> tpccback2_4	<u>Total Capacity = 195.31 GB</u>	<u>RAID 0+1</u>

ML370 G5 SAS, Slot 1, P800 SAS Smart Array Controller, Port 1 & Port 2, Array A		
<u>LOGICAL DRIVE E:</u>	<u>Total Capacity = 615.01 GB</u>	<u>RAID 0+1</u>
MSSQL_tpcc_log		

Priced Configuration vs. Measured Configuration:

None

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.93%
	Payment	43.02%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.01%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included a checkpoint.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 1456 warehouses under a load of 14560 users.

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started.
- The test was allowed to run for a minimum of 10 minutes.
- One log disk was removed from the MSA60 enclosure housing the log drives.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one MSA60 drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- After the RAID recovery process finished Microsoft SQL Server was started, and a dump of the transaction log was taken.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 13456 warehouses under a full load of 134560 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 134560 users.
- The test was allowed to run for a minimum of 10 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	13,600
District	136,000
Customer	408,000,000
History	408,000,000
Orders	408,000,000
New Order	122,400,000
Order Line	4,079,995,554
Stock	1,360,000,000
Item	100,000
Deleted Warehouses	0

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 6 P800 Smart Array Controllers for database data storage, 1 P800 Smart Array Controller for database log storage and 1 P600 Smart Array Controller for the OS and binaries. Each of the 2 ports of the P800 controller used for data was connected directly to a HP StorageWorks MSA60, which in-turn was connected to 3 additional MSA60s. There were a total of 12 sets of 4 MSA60 enclosures, for a total of 48 MSA60 enclosures that contained 12 36GB LFF SAS disk drives each. Each MSA60 set had all 48 disk drives configured into a single array with at 6 logical disk drives. The first 2 logical disk drives was used for database storage and configured as RAID 0. The remaining 4 logical disk drives on all of the sets were configured as RAID 0+1. The last logical disk drives were used for database backups during the benchmark. The 7th P800 Smart Array Controller was connected to 2 MSA60 enclosures with 9 72GB LFF SAS drives each were used for the log with a RAID 0+1 volume striped across all 18 disk drives. The internal drive cage of the ML370 G5 SAS contained 2 36GB SFF SAS disk drives that were connected to the P600 Smart array controller were configured as RAID 0+1 for

the operating system and binaries. The Array Accelerators on P800 controllers were configured as 100% write cache and were enabled for all RAID 0 volumes, except for the log P800 controller whose cache was disabled. The Array Accelerator on P600 controller was configured as 100% write cache and were enabled for all RAID volumes.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise x64 Edition SP1 is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the sum(d_next_o_id) taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 169,360 tpmC
Price per tpmC USD \$2.93

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.28	0.44	4.48
Payment	0.26	0.43	3.87
Order-Status	0.27	0.44	4.45
Interactive Delivery	0.10	0.11	0.16
Deferred Delivery	0.13	0.18	0.80
Stock-Level	0.27	0.43	4.18
Menu	0.10	0.11	0.45

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.19
Payment	3.02	3.03	3.19
Order-Status	2.02	2.03	2.15
Interactive Delivery	2.02	2.03	2.19
Stock-Level	2.02	2.03	2.17

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.04	120.33
Payment	0.00	12.04	120.33
Order-Status	0.00	10.04	100.35
Interactive Delivery	0.00	5.05	50.33
Stock-Level	0.00	5.05	50.33

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

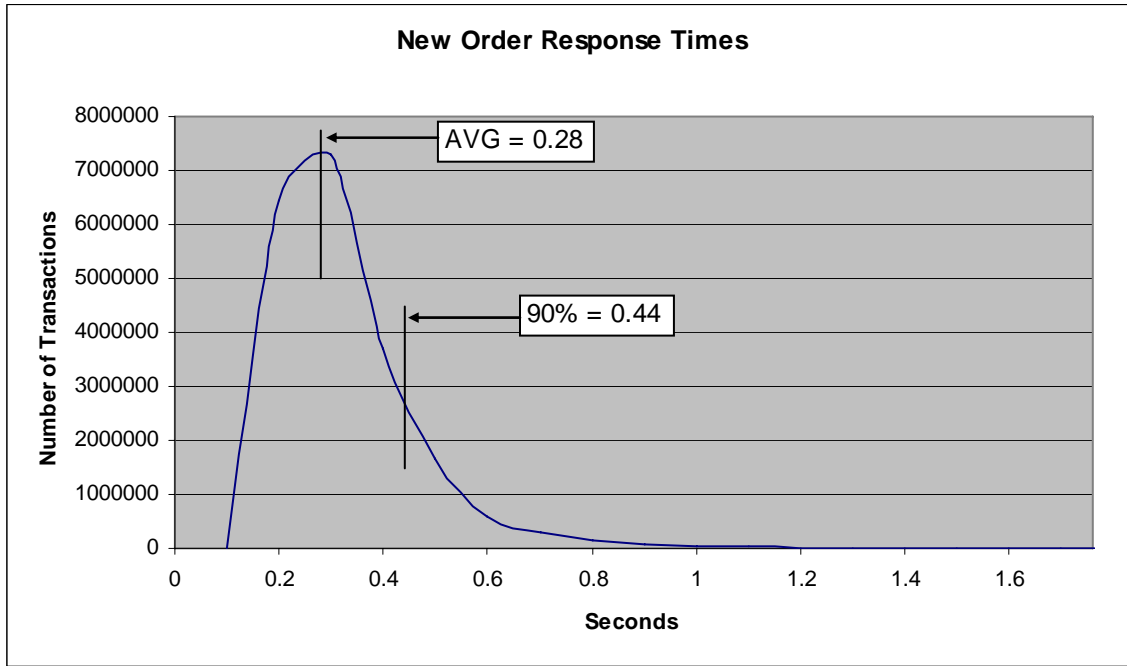


Figure 4. Payment Response Time Distribution

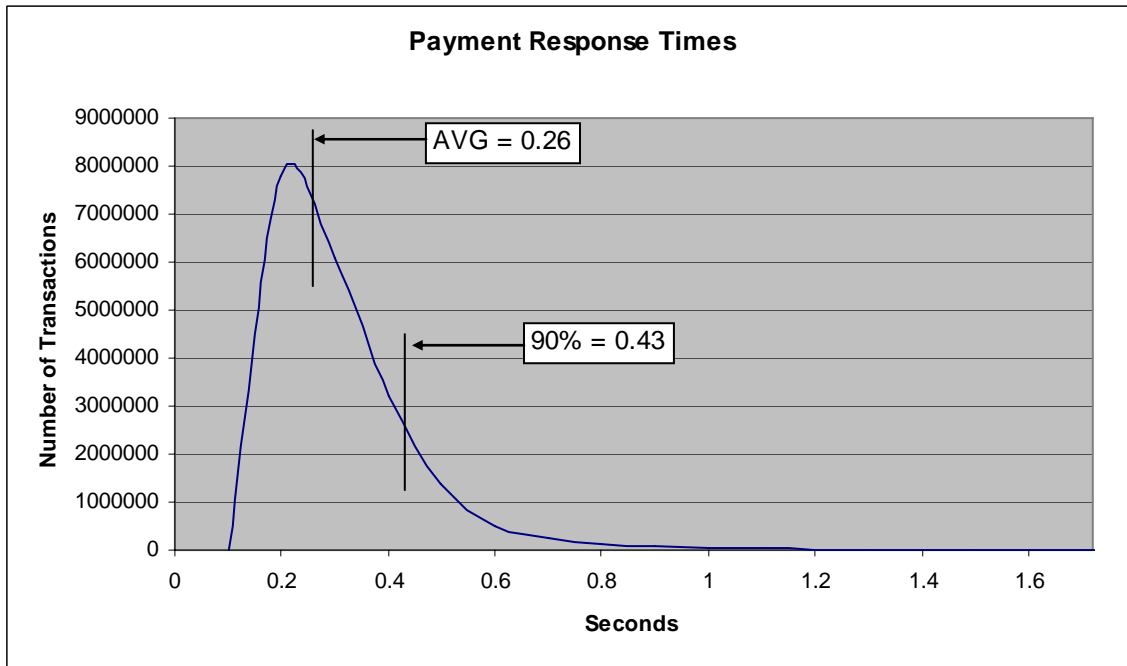


Figure 5. Order Status Response Time Distribution

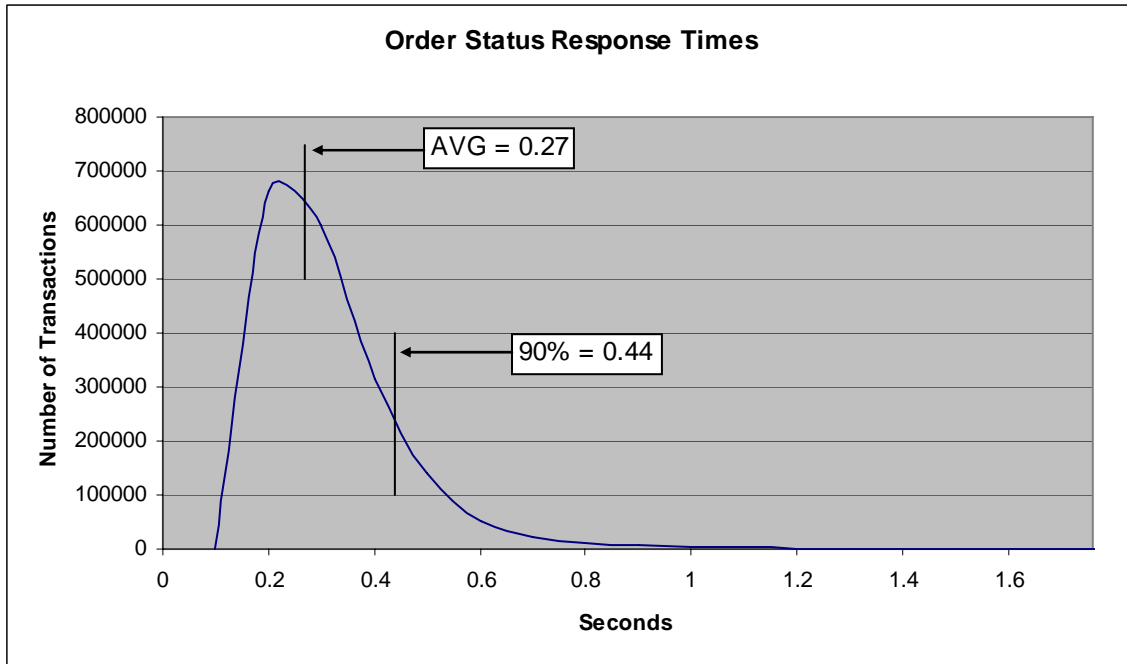


Figure 6. Delivery Response Time Distribution

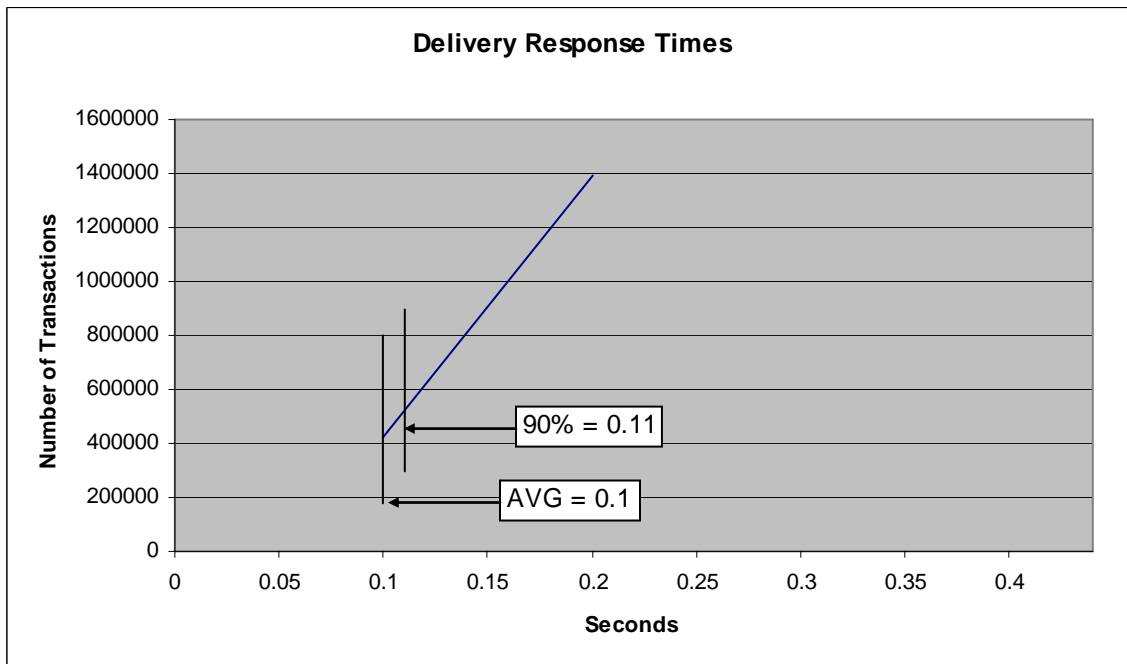


Figure 7. Stock Level Response Time Distribution

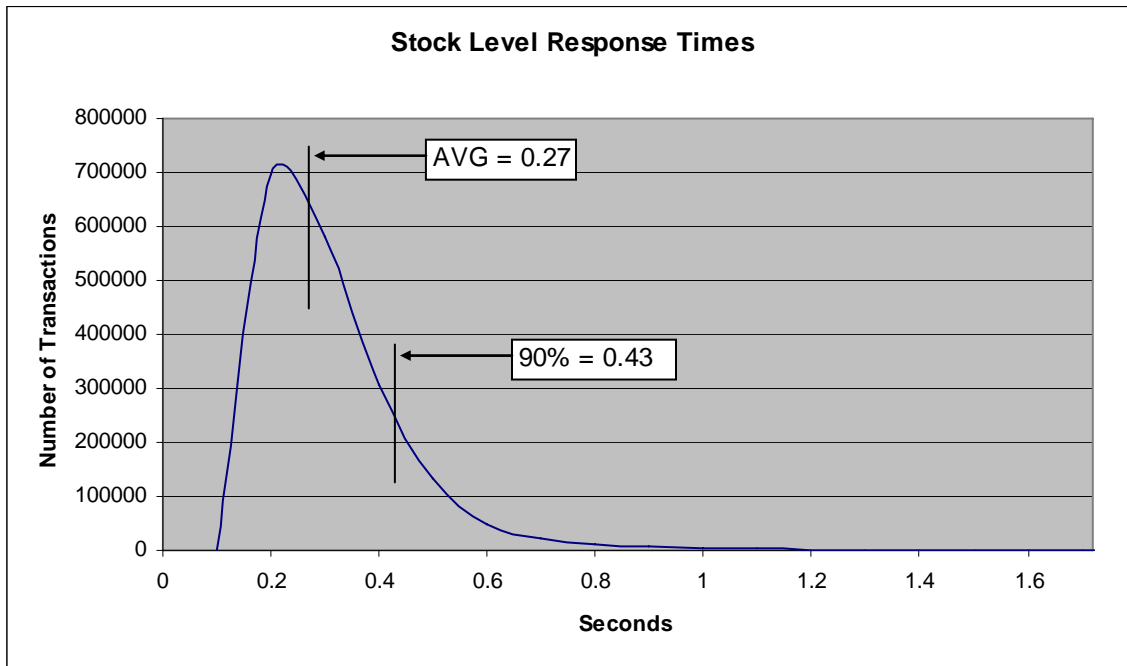


Figure 8. Response Time vs. Throughput

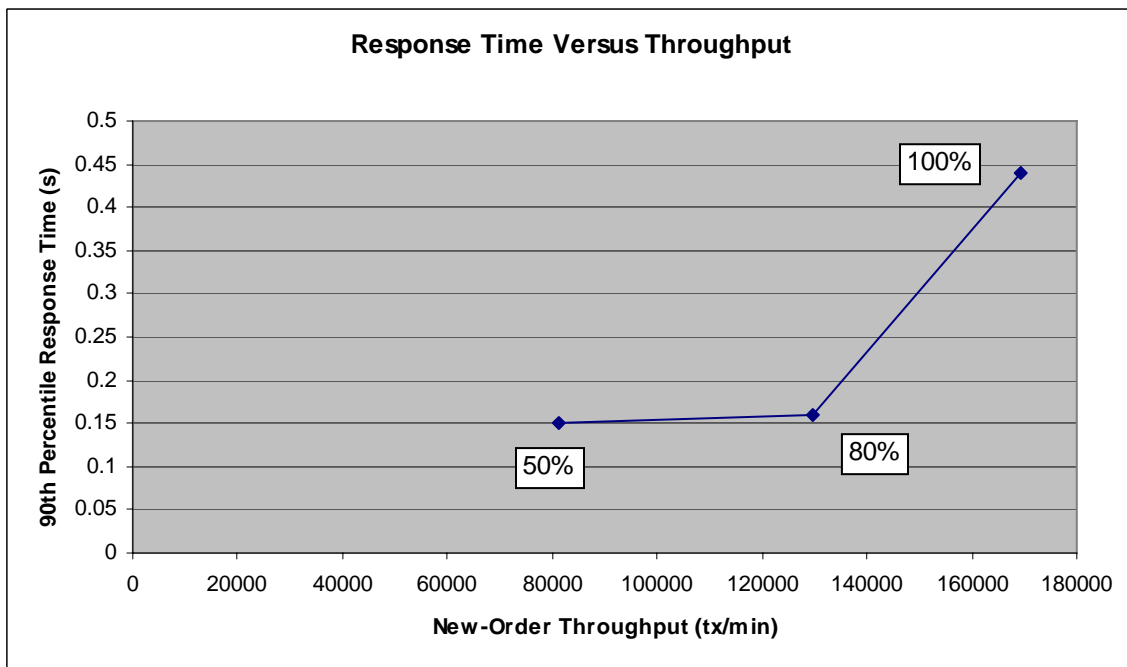


Figure 9. New Order Think Time Distribution


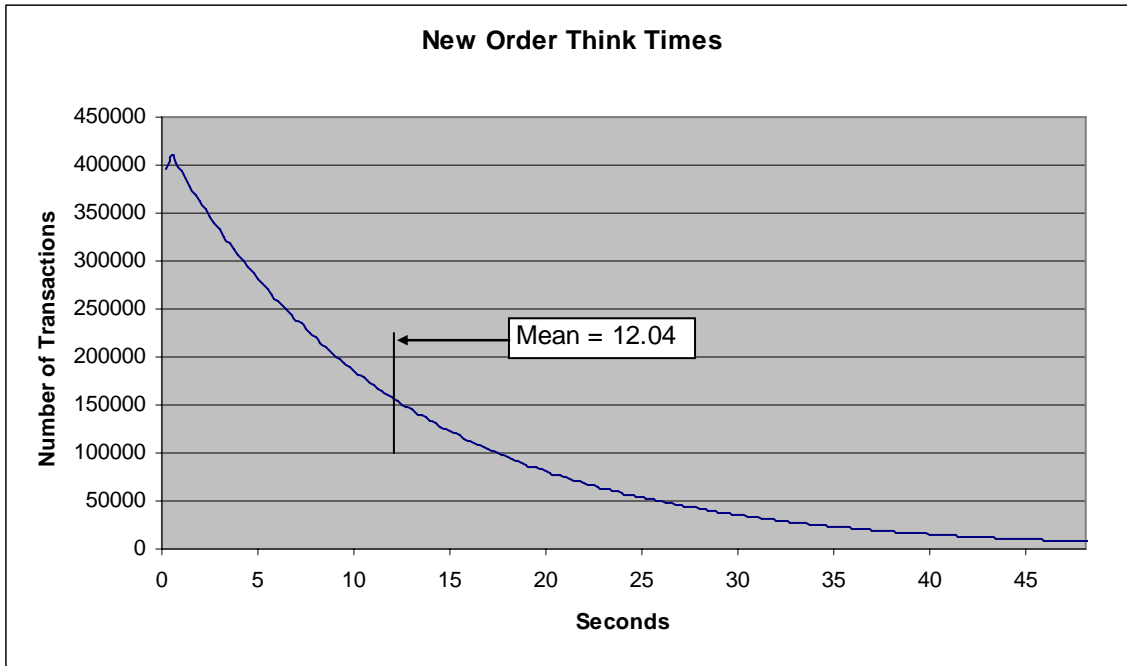


Figure 10. Throughput vs. Time Distribution

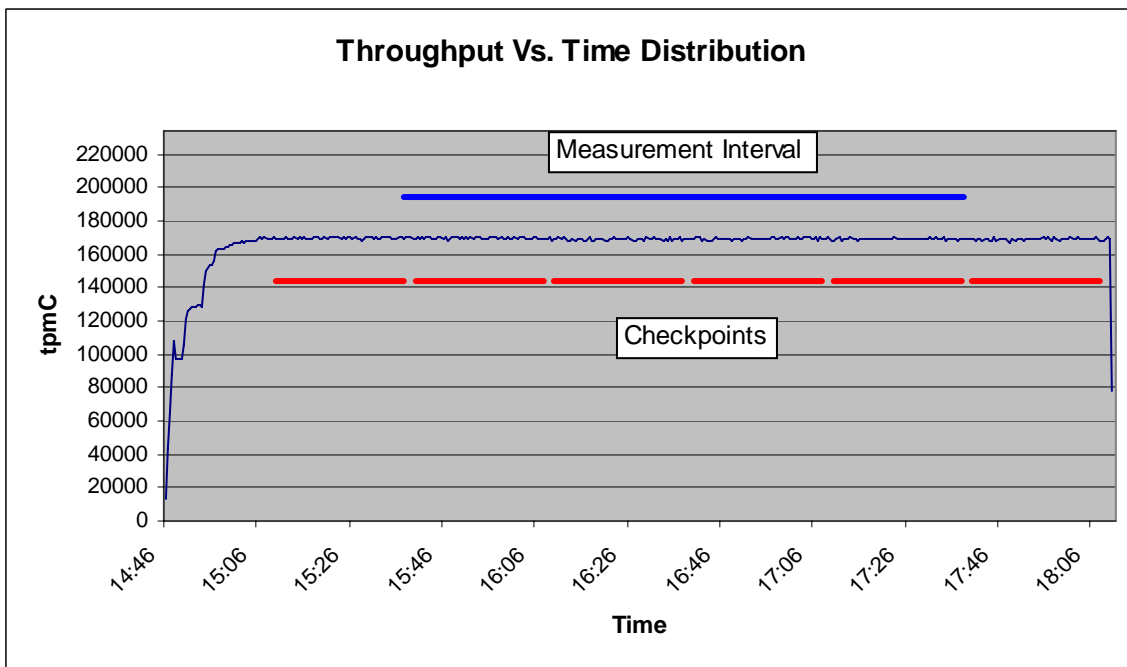

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using DBLIB and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32768 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.05%
Transaction Mix	New Order	44.93%
	Payment	43.02%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.01%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 33 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 27 minutes and 30 seconds. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
15:40:46.21	27 minutes, 30.18 seconds
16:10:43.25	27 minutes, 30.20 seconds
16:40:40.23	27 minutes, 30.15 seconds
17:10:37.18	27 minutes, 30.14 seconds

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 8 HP ProLiant servers. These driver machines emulated the users' web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 8 driver (RTE) machines were connected through a gigabit Ethernet switch to the 8 client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through the second gigabit Ethernet switch.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- **Maximum Qualified Throughput** **169,360 tpmC**
- **Price per tpmC** **USD \$2.93 per tpmC**
- **Availability** **November 22, 2006**

Orderability Date

For each of the components that are not orderable on the report date of the FDR, the following information must be included in the FDR:

- Name and part number of the item that is not orderable
- The date when the component can be ordered (on or before the Availability Date)
- The method to be used to order the component (at or below the quoted price) when that date arrives
- The method for verifying the price

Some line item components used in this benchmark are not orderable at the time of this publication. These items will be orderable on or before the system Availability Date indicated as part of this submission. For specific information on these items regarding orderable dates and pricing verification, please see table in Appendix F.

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 8 Microsoft Windows Server 2000 Standard Edition
- 1 Microsoft Windows Server 2003, Enterprise x64 Edition SP1
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition SP1 (per processor)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
PO Box 984
Klamath CA 95548
(phone) 707-482-0523
(fax) 707-482-0575
e-mail: lornaL@perfmetrics.com

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC
Presidio of San Francisco
Building 572B Ruger St. (surface)
P.O. Box 29920 (mail)
San Francisco, CA 94129-0920

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



May 18, 2006

Mr. Mike Nikolaiev
 Manager, ISS Performance Engineering
 Hewlett-Packard Company
 20555 SH 249
 Houston, TX 77070

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant ML370G5 SAS
 Database Manager: Microsoft SQL Server 2005 Enterprise x64 Edition SP1
 Operating System: Microsoft Windows Server 2003 Enterprise Edition x64 SP1
 Transaction Monitor: Microsoft COM+

System Under Test:				
CPU's	Memory	Disks (total)	90% Response	TpmC
2 Intel X5160 @ 3.0 GHz	Main: 64 GB	578 @ 36 GB 18 @ 72 GB	0.44	169,360
8 Clients: ProLiant DL360 G4				
2 Intel Xeon @ 3.6 GHz	Main: 1 GB	2 @ 36 GB	NA	NA

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 13,600 warehouses, 13,456 of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The steady state portion of the test was 120 minutes.
- There was one complete checkpoint in steady state before the measured interval.
- There were 4 checkpoints started and completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.

Auditor Notes:

The clients in the tested configuration are obsolete and no longer orderable. The clients priced meet the substitution requirements of the specification.

Sincerely,

A handwritten signature in cursive script that reads "Lorna Livingtree".

Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

delivery.h

```
/* Generated by IDL compiler version DEC DCE V2.0.0-6
*/
#ifndef _delivery_v1_0_included
#define _delivery_v1_0_included
#ifdef IDLBASE_H
#include <dce\idlbase.h>
#endif
#include <dce\rpc.h>
#include "trpc\trpc.h"

#ifdef __cplusplus
extern "C" {
#endif

#ifndef nbase_v0_0_included
#include "dce\nbase.h"
#endif
#ifndef trpcImports_v0_0_included
#include "trpc\trpcImports.h"
#endif
#ifndef mon_handle_v1_0_included
#include "tpm\mon\mon_handle.h"
#endif
#ifndef tpcc_types_v1_0_included
#include "tpcc_type.h"
#endif
#include <dce\rpcexc.h>
extern EXCEPTION encina_x_transaction_aborted;
extern EXCEPTION encina_x_server_shutdown;
extern EXCEPTION encina_x_permission_denied;
extern EXCEPTION encina_x_object_not_found;
extern EXCEPTION encina_x_empty_slot1;
extern EXCEPTION encina_x_empty_slot2;
extern EXCEPTION encina_x_empty_slot3;
extern EXCEPTION encina_x_empty_slot4;
extern EXCEPTION encina_x_empty_slot5;
extern EXCEPTION encina_x_undefined_exception;
extern void IDL_STD_STDCALL _delivery_GetAppId(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t handle,
/* [out] */ trpc_byteData_t applString,
/* [out] */ idl_ulong_int *applStringLength,
/* [out] */ trpc_byteData_t address,
/* [out] */ idl_ulong_int *addressLength,
/* [out] */ error_status_t *c_status,
/* [out] */ error_status_t *f_status
#endif
);
#endif
#endif
```

```
/* [out] */ error_status_t *c_status,
/* [out] */ error_status_t *f_status
#endif
);
extern void IDL_STD_STDCALL _impTPCCDelivery(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t trpc_h,
/* [in] */ idl_long_int length,
/* [in, out] */ idl_char *dataP,
/* [in, out] */ data_header *headerP,
/* [in] */ trpc_byteData_t applAndAddress,
/* [in] */ idl_ulong_int applAndAddressLength,
/* [in] */ trpc_callbackData_t inCallbackData,
/* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
globalref mon_handle_t handle;
#ifdef __cplusplus
extern "C" {
#endif
#pragma extern_model __save
#pragma extern_model __common_block __shr
#endif
typedef struct _delivery_v1_0_epv_t {
void ( IDL_STD_STDCALL * _delivery_GetAppId)(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t handle,
/* [out] */ trpc_byteData_t applString,
/* [out] */ idl_ulong_int *applStringLength,
/* [out] */ trpc_byteData_t address,
/* [out] */ idl_ulong_int *addressLength,
/* [out] */ error_status_t *c_status,
/* [out] */ error_status_t *f_status
#endif
);
void ( IDL_STD_STDCALL * _impTPCCDelivery)(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t trpc_h,
/* [in] */ idl_long_int length,
/* [in, out] */ idl_char *dataP,
/* [in, out] */ data_header *headerP,
/* [in] */ trpc_byteData_t applAndAddress,
/* [in] */ idl_ulong_int applAndAddressLength,
/* [in] */ trpc_callbackData_t inCallbackData,
/* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
} _delivery_v1_0_epv_t;
extern rpc_if_handle_t _delivery_v1_0_c_ifspec;
extern rpc_if_handle_t _delivery_v1_0_s_ifspec;
#ifdef __cplusplus
#pragma extern_model __restore
#endif
#ifdef __cplusplus
}
#endif
#endif
```

neworder.h

```
/* Generated by IDL compiler version DEC DCE V2.0.0-6
*/
#ifndef _neworder_v1_0_included
#define _neworder_v1_0_included
#ifdef IDLBASE_H
#include <dce\idlbase.h>
#endif
#include <dce\rpc.h>
#include "trpc\trpc.h"

#ifdef __cplusplus
extern "C" {
#endif

#ifndef nbase_v0_0_included
#include "dce\nbase.h"
#endif
#ifndef trpcImports_v0_0_included
#include "trpc\trpcImports.h"
#endif
#ifndef mon_handle_v1_0_included
#include "tpm\mon\mon_handle.h"
#endif
#ifndef tpcc_types_v1_0_included
#include "tpcc_type.h"
#endif
#include <dce\rpcexc.h>
extern EXCEPTION encina_x_transaction_aborted;
extern EXCEPTION encina_x_server_shutdown;
extern EXCEPTION encina_x_permission_denied;
extern EXCEPTION encina_x_object_not_found;
extern EXCEPTION encina_x_empty_slot1;
extern EXCEPTION encina_x_empty_slot2;
extern EXCEPTION encina_x_empty_slot3;
extern EXCEPTION encina_x_empty_slot4;
extern EXCEPTION encina_x_empty_slot5;
extern EXCEPTION encina_x_undefined_exception;
extern void IDL_STD_STDCALL _neworder_GetAppId(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t handle,
/* [out] */ trpc_byteData_t applString,
/* [out] */ idl_ulong_int *applStringLength,
/* [out] */ trpc_byteData_t address,
/* [out] */ idl_ulong_int *addressLength,
/* [out] */ error_status_t *c_status,
/* [out] */ error_status_t *f_status
#endif
);
extern void IDL_STD_STDCALL _impTPCCNewOrder(
#ifdef IDL_PROTOTYPES
/* [in] */ handle_t trpc_h,
/* [in] */ idl_long_int length,
/* [in, out] */ idl_char *dataP,
/* [in, out] */ data_header *headerP,
/* [in] */ trpc_byteData_t applAndAddress,
/* [in] */ idl_ulong_int applAndAddressLength,
/* [in] */ trpc_callbackData_t inCallbackData,
/* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
#endif
```

```

#endif
);
extern void IDL_STD_STDCALL _impTPCCNOInfo(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [out] */ dbInfo_data_t *dataP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
globalref mon_handle_t handle;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __save
#pragma extern_model __common_block __shr
#endif
typedef struct _neworder_v1_0_epv_t {
void ( IDL_STD_STDCALL *neworder_GetAppId)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
void ( IDL_STD_STDCALL *impTPCCNewOrder)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,
    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
void ( IDL_STD_STDCALL *impTPCCNOInfo)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [out] */ dbInfo_data_t *dataP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
} _neworder_v1_0_epv_t;
extern rpc_if_handle_t _neworder_v1_0_c_ifspec;
extern rpc_if_handle_t _neworder_v1_0_s_ifspec;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __restore
#endif
#endif
#endif

```

```

}
#else
#endif
#endif

```

orderstatus.h

```

/* Generated by IDL compiler version DEC DCE V2.0.0-6
*/
#ifdef _orderstatus_v1_0_included
#define _orderstatus_v1_0_included
#ifdef IDLBASE_H
#include <dce\idlbase.h>
#endif
#include <dce\rpc.h>
#include "trpc/trpc.h"

#ifdef __cplusplus
extern "C" {
#endif

#ifdef nbase_v0_0_included
#include "dce\nbase.h"
#endif

#ifdef trpcImports_v0_0_included
#include "trpc\trpcImports.h"
#endif

#ifdef mon_handle_v1_0_included
#include "tpm\mon\mon_handle.h"
#endif

#ifdef tpcc_types_v1_0_included
#include "tpcc_type.h"
#endif

#include <dce\rpcexc.h>
extern EXCEPTION encina_x_transaction_aborted;
extern EXCEPTION encina_x_server_shutdown;
extern EXCEPTION encina_x_permission_denied;
extern EXCEPTION encina_x_object_not_found;
extern EXCEPTION encina_x_empty_slot1;
extern EXCEPTION encina_x_empty_slot2;
extern EXCEPTION encina_x_empty_slot3;
extern EXCEPTION encina_x_empty_slot4;
extern EXCEPTION encina_x_empty_slot5;
extern EXCEPTION encina_x_undefined_exception;
extern void IDL_STD_STDCALL _orderstatus_GetAppId(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
#endif
);
extern void IDL_STD_STDCALL _impTPCCOrderStatus(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,

```

```

    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
globalref mon_handle_t handle;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __save
#pragma extern_model __common_block __shr
#endif
typedef struct _orderstatus_v1_0_epv_t {
void ( IDL_STD_STDCALL *orderstatus_GetAppId)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
void ( IDL_STD_STDCALL *impTPCCOrderStatus)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,
    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
} _orderstatus_v1_0_epv_t;
extern rpc_if_handle_t _orderstatus_v1_0_c_ifspec;
extern rpc_if_handle_t _orderstatus_v1_0_s_ifspec;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __restore
#endif
#endif
#endif

#ifdef __cplusplus
}
#endif

#else
#endif
#endif

```

payment.h

```

/* Generated by IDL compiler version DEC DCE V2.0.0-6
*/
#ifdef _payment_v1_0_included
#define _payment_v1_0_included
#ifdef IDLBASE_H

```

```

#include <dce\idlbase.h>
#endif
#include <dce\rpc.h>
#include "trpc/trpc.h"

#ifdef __cplusplus
extern "C" {
#endif

#ifndef nbase_v0_0_included
#include "dce\nbase.h"
#endif
#ifndef trpcImports_v0_0_included
#include "trpc\trpcImports.h"
#endif
#ifndef mon_handle_v1_0_included
#include "tpm\mon\mon_handle.h"
#endif
#ifndef tpcc_types_v1_0_included
#include "tpcc_type.h"
#endif
#include <dce\rpcexc.h>
extern EXCEPTION encina_x_transaction_aborted;
extern EXCEPTION encina_x_server_shutdown;
extern EXCEPTION encina_x_permission_denied;
extern EXCEPTION encina_x_object_not_found;
extern EXCEPTION encina_x_empty_slot1;
extern EXCEPTION encina_x_empty_slot2;
extern EXCEPTION encina_x_empty_slot3;
extern EXCEPTION encina_x_empty_slot4;
extern EXCEPTION encina_x_empty_slot5;
extern EXCEPTION encina_x_undefined_exception;
extern void IDL_STD_STDCALL _payment_GetApplId(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
extern void IDL_STD_STDCALL _impTPCCPayment(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,
    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
globalref mon_handle_t handle;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __save
#pragma extern_model __common_block __shr
#endif

```

```

typedef struct _payment_v1_0_epv_t {
void ( IDL_STD_STDCALL * _payment_GetApplId)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
void ( IDL_STD_STDCALL * _impTPCCPayment)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,
    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
};
extern rpc_if_handle_t _payment_v1_0_c_ifspec;
extern rpc_if_handle_t _payment_v1_0_s_ifspec;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __restore
#endif

#ifdef __cplusplus
}
#else
#endif
#endif

__stocklevel.h
/* Generated by IDL compiler version DEC DCE V2.0.0-6
*/
#ifndef _stocklevel_v1_0_included
#define _stocklevel_v1_0_included
#endif
#include <dce\idlbase.h>
#include <dce\rpc.h>
#include "trpc/trpc.h"

#ifdef __cplusplus
extern "C" {
#endif

#ifndef nbase_v0_0_included
#include "dce\nbase.h"
#endif
#ifndef trpcImports_v0_0_included
#include "trpc\trpcImports.h"

```

```

#endif
#ifndef mon_handle_v1_0_included
#include "tpm\mon\mon_handle.h"
#endif
#ifndef tpcc_types_v1_0_included
#include "tpcc_type.h"
#endif
#include <dce\rpcexc.h>
extern EXCEPTION encina_x_transaction_aborted;
extern EXCEPTION encina_x_server_shutdown;
extern EXCEPTION encina_x_permission_denied;
extern EXCEPTION encina_x_object_not_found;
extern EXCEPTION encina_x_empty_slot1;
extern EXCEPTION encina_x_empty_slot2;
extern EXCEPTION encina_x_empty_slot3;
extern EXCEPTION encina_x_empty_slot4;
extern EXCEPTION encina_x_empty_slot5;
extern EXCEPTION encina_x_undefined_exception;
extern void IDL_STD_STDCALL _stocklevel_GetApplId(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
extern void IDL_STD_STDCALL _impTPCCStockLevel(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t trpc_h,
    /* [in] */ idl_long_int length,
    /* [in, out] */ idl_char *dataP,
    /* [in, out] */ data_header *headerP,
    /* [in] */ trpc_byteData_t applAndAddress,
    /* [in] */ idl_ulong_int applAndAddressLength,
    /* [in] */ trpc_callbackData_t inCallbackData,
    /* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
globalref mon_handle_t handle;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __save
#pragma extern_model __common_block __shr
#endif
typedef struct _stocklevel_v1_0_epv_t {
void ( IDL_STD_STDCALL * _stocklevel_GetApplId)(
#ifdef IDL_PROTOTYPES
    /* [in] */ handle_t handle,
    /* [out] */ trpc_byteData_t applString,
    /* [out] */ idl_ulong_int *applStringLength,
    /* [out] */ trpc_byteData_t address,
    /* [out] */ idl_ulong_int *addressLength,
    /* [out] */ error_status_t *c_status,
    /* [out] */ error_status_t *f_status
#endif
);
void ( IDL_STD_STDCALL * _impTPCCStockLevel)(
#ifdef IDL_PROTOTYPES

```



```

/* [in] */ handle_t trpc_h,
/* [in] */ idl_long_int length,
/* [in, out] */ idl_char *dataP,
/* [in, out] */ data_header *headerP,
/* [in] */ trpc_byteData_t applAndAddress,
/* [in] */ idl_ulong_int applAndAddressLength,
/* [in] */ trpc_callbackData_t inCallbackData,
/* [in] */ idl_ulong_int numOfInCallbackData
#endif
);
} _stocklevel_v1_0_epv_t;
extern rpc_if_handle_t _stocklevel_v1_0_c_ifspec;
extern rpc_if_handle_t _stocklevel_v1_0_s_ifspec;
#if defined(__VMS) && (defined(__DECC) ||
defined(__cplusplus))
#pragma extern_model __restore
#endif
#ifdef __cplusplus
}
#else
#endif
#endif

```

client_utils.c

```

/* client_utils.c
*/

#include <stdio.h>
#include <time.h>
#include <windows.h>
#include <winperf.h>
#include <winsock.h>
#include "client_utils.h"

#define Li2Double(x) ((double)((x).HighPart) *
4.294967296E9 + (double)((x).LowPart))

static LARGE_INTEGER pFreq;
static double sFreq;
static int print_thread_id = 1;
static int user_id = 0;
static char *user_code = "C";

/*
 * get_thread_id
 * A function that returns the thread ID of the
current thread
*/
static int get_thread_id()
{
return(GetCurrentThreadId());
}

/*
 * get_prefix
 * Format the output prefix for printing:

```

```

* It contains the user_id, 'C' or 'T'
depending on whether it
* is a terminal or a client and optional a
thread identifier
* The prefix is written in the buffer passed
in by the caller.
*/
static void get_prefix(char *buffer)
{
if (print_thread_id) {
int thread_id = get_thread_id();
sprintf(buffer, "%s%d-%s-
%d)%s",
user_id < 10 ? " " : user_id <
100 ? " " : "",
user_id,
user_code,
thread_id,
thread_id < 10 ? " " : "");
} else {
sprintf(buffer, "%s(%2d-%s)",
user_id < 10 ? " " : "", user_id,
user_code);
}
}

/*
 * err_printf
 * A var-arg function that appends the current
time and
* other data to the print request and sends it
to stderr
* if it is not a web client, to a file if it is
*/
void err_printf(char *format, ...)
{
time_t cur_time;
char time_str[30];
char line_prefix[50];
va_list ap;

va_start(ap, format);

cur_time = time(&cur_time);
strftime(time_str, 29, "%X",
localtime(&cur_time));

get_prefix(line_prefix);

fprintf(ERROROUT, "%s %s - ", line_prefix,
time_str);
vfprintf(ERROROUT, format, ap);
fflush(ERROROUT);

va_end(ap);
}

/*
 * encina_error_message
*/

```

```

* Report an encina error message by interpreting it
and writing
* it to both the logfile (if any) and to standard
error
*/
void encina_error_message(char *msg, unsigned long n)
{
char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
encina_StatusToString(n,
ENCINA_MAX_STATUS_STRING_SIZE, errorMsg);
err_printf("ERROR: %s. Error code = %s (%d 0x%x)
\n", msg, errorMsg, n, n);
}

int get_time_init()
{
QueryPerformanceFrequency(&pFreq);
sFreq=Li2Double(pFreq);
return 0;
}

int get_local_time(time_type *timeP)
{
double cur_t;
LARGE_INTEGER counter;

QueryPerformanceCounter(&counter);
cur_t = Li2Double(counter) / sFreq;
timeP->sec = (long)cur_t;
/* timeP->usec = ((long)cur_t - timeP->sec) *
1000000;*/
timeP->usec = (long)((cur_t - timeP->sec) *
1000000);
return 0;
}

/*
 * time_diff_ms
 * Return the difference in milliseconds between
two times
*/
int time_diff_ms(struct timeval *t2, struct timeval
*t1)
{
int t_diff;

t_diff = (t2->tv_usec + 1000000 - t1->tv_usec +
500) / 1000 +
(t2->tv_sec - t1->tv_sec - 1) * 1000;

return(t_diff);
}

/*
 * perfClntDataInit:
 * Initialization for the shared file mapping.
 *
 * return: pointer to the shared memory space
 *
 * This routine creates a named mapped memory section
that is used

```

```

* to communicate the TPCC performance data to the
extensible
* counter DLL for NT perfmon.
*/
total_tran_count_t *perfClntDataInit()
{
    HANDLE hMappedObject;
    total_tran_count_t *pClntInfo = NULL;
    TCHAR szMappedObjectName[] =
TEXT("TPCC_CLNT_COUNTER_BLOCK");

    /* create named section for the performance
data */
    hMappedObject =
CreateFileMapping((HANDLE)0xFFFFFFFF,
    NULL,
    PAGE_READWRITE,
    0,
    sizeof(total_tran_count_t),
    szMappedObjectName);
    if (hMappedObject == NULL) {
        err_printf("perfClntDataInit:
CreateFileMapping failed %x\n",
            GetLastError());
    } else {
        pClntInfo = NULL;
        /* map the section and assign the counter
block pointer
* to this section of memory
*/
        pClntInfo = (total_tran_count_t *)
MapViewOfFile(hMappedObject,
            FILE_MAP_ALL_ACCESS,
            0,
            0,
            0);
        if (pClntInfo == NULL) {
            err_printf("perfClntDataInit:
MapViewOfFile failed %x\n",
                GetLastError());
        } else {
            err_printf("perfClntDataInit:
MapViewOfFile success %n");
        }
    }

    return(pClntInfo);
}

```

client_utils.h

```

#ifndef TPCC_CLIENT_UTILS_H
#define TPCC_CLIENT_UTILS_H

#include <stdio.h>
#include <time.h>
#include <dce/rpc.h>
#include <dce/dce_error.h>
#include <encina/encina.h>

```

```

#include <stdlib.h>
#include <utils/trace.h>
#include <winsock.h>
#include "mon_client.h"
#include "../include/tpcc_type.h"

extern FILE * errtpcc;
extern FILE * logtpcc;
extern int debug;
extern char log_file_name[];
extern void logprintf( char *format, ...);
extern void err_printf( char *format, ...);
extern void encina_error_message(char *msg, unsigned
long n);
extern int time_diff_ms(struct timeval *t2, struct
timeval *t1);

typedef struct {
    int num;
    int errs;
    double RTtotal[2]; // 1 for server RT and 0 for
client RT
    int RTcount;
} tran_info_t;

/*
* total_tran_count_t
*
* structure that holds the total count of
transaction of each type
* as well as the reposne times.
*/
typedef struct {
    tran_info_t tran[MAX_TRAN_TYPE + 1];
    int errors;
    double time;
} total_tran_count_t;

/* enc_status_t
* structure that holds error information
*/
typedef struct {
    int status;
    int line;
    char file[268];
    unsigned long encinaError;
    char errorMsg[ENCINA_MAX_STATUS_STRING_SIZE];
} enc_status_t;

#define FALSE 0
#define TRUE 1

#define DPRINT(args) if (0) err_printf args

#define CHECK_ENVIRON(str,var) if (str == NULL) {
fprintf(ERROROUT, \
        "%s environment variable is
not defined.\n",var); }

```

```

#define CHK_STATUS(st, val, _errMsg)
\
    if(st) {
\
        enc_status.status=val;
\
        strcpy(enc_status.file, __FILE__);
\
        enc_status.line= __LINE__;
\
        enc_status.encinaError = st;
\
        if(_errMsg)strcpy(enc_status.errorMsg,
_errMsg);
\
        if(st!=1) return;
\
    }

#define UTIL_IDENT(a)          a

#if ENCINA_C_ANSI_STRING_TOKEN_SUPPORT
#define UTIL_STRING(a)        # a
#define UTIL_CONCAT(a, b)    a ## b
#else /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */
#define UTIL_STRING(a)        "a"
#define UTIL_CONCAT(a, b)    UTIL_IDENT(a)b
#endif /* ENCINA_C_ANSI_STRING_TOKEN_SUPPORT */

/* ENCINA_CALL: Make fail-fast calls on the various
services. */
#define ENCINA_CALL(proc_name,call) \
{ \
    unsigned long _status; \
    ENCINA_CALL_RC(proc_name,call,_status); \
    if (_status) exit_program(_status); \
}

#define ENCINA_CALL_RC(proc_name,call,rc) \
{ \
    char _errorMsg[ENCINA_MAX_STATUS_STRING_SIZE]; \
    DPRINT(("ENCINA_CALL_RC: before call %s\n", \
proc_name)); \
    rc = (call); \
    DPRINT(("ENCINA_CALL_RC: after call %s\n", \
proc_name)); \
    if (rc) { \
        encina_StatusToString(rc, \
ENCINA_MAX_STATUS_STRING_SIZE, \
            _errorMsg); \
        err_printf( "%x \n", rc); \
        err_printf( "%s \n", _errorMsg); \
    } \
}

```

```

err_printf( "%s \n", proc_name);
\
}
\
}

void err_printf(char *format, ...);
void encina_error_message(char *msg, unsigned long
n);
int get_time_init();
int get_local_time(time_type *timeP);
int time_diff_ms(struct timeval *t2, struct timeval
*t1);

#endif /* TPCC_CLIENT_UTILS_H */

```

databuf.h

```

/*
 * databuf.h
 *
 * $Revision: 1.1 $
 * $Date: 1998/11/06 21:10:11 $
 * $Log: databuf.h,v $
 * Revision 4.2 95/05/16 10:55:31 10:55:31 tpcc
(TPCC Benchmark)
 * Added necessary RCS ident strings
 *
 * Revision 4.1 95/05/09 15:21:02 15:21:02 strue
(Scott Truesdale)
 * New code from Transarc - initial version
 *
 * Revision 3.2 95/04/03 17:43:09 17:43:09 strue
(Scott Truesdale)
 * Changes from Transarc - added sql error handling
in client; cleaned up debug handling with macros;
added check on db paramters via call to server.
 *
 * Revision 3.1 95/04/03 15:10:30 15:10:30 strue
(Scott Truesdale)
 * Base of rev 3 - shipped to transarc
 *
 *
 *
 * $TALog: databuf.h,v $
 * Revision 1.1 1998/11/06 21:10:11 dongfeng
 * - Move all files common to client and server to
tpcc/common
 * directory
 * [added by delta dongfeng-23677-TPCC-new-directory-
structures, r1.1]
 *
 * Revision 1.3 1998/10/22 15:33:04 wenjian
 * Make changes to Encina server code to connect with
SQL server and add
 * callsql.c and sql directory.
 *
 * Add ERR_BAD_ITEM_ID, which is returned by SLQnew
and same as INVALID_NEWO

```

```

* [from r1.2 by delta wenjian-23529-TPCC-integrate-
with-SQL-server, r1.1]
 *
 * Revision 1.2 1998/01/23 15:07:47 oz
 * - Updated the SP TPCC directory to the latest
files used
 * during the SP tpcc audit.
 * [from r1.1 by delta oz-20774-TPCC-update-to-
latest-SP-version-11-27, r1.1]
 *
 * Revision 1.1 1997/04/20 11:57:57 oz
 * - This is the code base modified at IBM
Poughkeepsie
 * by Ofer Zajicek and Radha Sivaramakrishnan for
the
 * SP scaling test for TPCC.
 * [added by delta oz-19782-TPCC-add-ibm-sp-code,
r1.1]
 *
 * Revision 1.31 1995/10/30 19:10:54 oz
 * [merge of changes from 1.29 to 1.30 into 1.27]
 *
 * Revision 1.30 1995/10/27 15:41:30 oz
 * - Modified the tpc-c code to work with the new
informix
 * sql code that is in ex_trans.ec
 * [from r1.29 by delta oz-16761-TPCC-modify-code-to-
work-with-oracle, r1.1]
 *
 * Revision 1.27 1995/10/20 18:44:30 ctipper
 * [merge of changes from 1.17 to 1.25 into 1.22]
 *
 * Revision 1.25 1995/10/20 18:15:34 ctipper
 * Incorporate changes per code review.
 *
 * - add DISTRIBUTED_TRAN_FAILED,
TPCC_DB_INFO_PARTIAL, and
 * TPCC_DB_INFO_FAILED error codes to tpcc_rc_t
 * - got rid of MAX_NUM_SERVERS variables
 * [from r1.23 by delta ctipper-16547-TPCC-more-
distributed-trans, r1.2]
 *
 * Revision 1.23 1995/10/13 17:00:26 ctipper
 * This delta encompasses all changes necessary to do
distributed, XA
 * transactions with the TPCC benchmark. This
includes the changes
 * necessary to build with Informix version 6.
 *
 * Each client still talks to only one server,
however, if a distributed
 * transaction is necessary, the client sends the
request to a different
 * interface of that server which then forwards all
or part of the
 * request on to the appropriate remote server.
 *
 * - added new error codes to the tpcc_rc_t
enumeration.
 * - defined MAX_NUM_SERVERS to be 10

```

```

* [from r1.19 by delta ctipper-16547-TPCC-more-
distributed-trans, r1.1]
 *
 * Revision 1.19 1995/09/20 21:02:39 oz
 * -Corrected code for the payment transaction
 * - The distributed case now no longer uses
 * stored procedures
 * [from r1.18 by delta oz-16547-TPCC-add-
distributed-transactions, r1.2]
 *
 * Revision 1.18 1995/09/20 17:51:10 oz
 * - Added distributed transactions for the new order
and
 * payment transaction
 *
 * - Added new error codes
 * [from r1.17 by delta oz-16547-TPCC-add-
distributed-transactions, r1.1]
 *
 * Revision 1.22 1995/10/02 20:31:07 oz
 * - Corrected definition of ERROR()
 * [from r1.21 by delta oz-16638-tpcc-modify-
terminal-for-RTE, r1.3]
 *
 * Revision 1.21 1995/10/02 18:51:45 oz
 * - Added definitions needed for utils.c and
liberty.c
 * [from r1.20 by delta oz-16638-tpcc-modify-
terminal-for-RTE, r1.2]
 *
 * Revision 1.20 1995/10/02 15:52:35 oz
 * - Modified the TPC-C benchmark to be compatible
with the RTE.
 * - There are now 3 terminal processes:
 * emulator: the old terminal process with a
built in
 * simple emulator
 * curses: An interactive terminal process using
curses
 * liberty: An interactive terminal process to be
used with
 * the RTE compatible with the liberty
freedom terminal.
 *
 * - Define TRUE and FALSE only if they are not
already defined.
 * (curses.h defines TRUE)
 * - Removed READ_TO_DATE and YEAR_TO_SECOND
 * - Added term_type_t
 * - Added
 * GOOD_INPUT (0)
 * WRONG_INPUT (10)
 * [from r1.17 by delta oz-16638-tpcc-modify-
terminal-for-RTE, r1.1]
 *
 * Revision 1.17 1995/07/28 15:28:23 oz
 * - Added a -null and -no_marshallling option to TPCC
 *
 * - Added INVALID_TRAN_TYPE return code
 * [from r1.16 by delta oz-16070-TPCC-add-null-and-
marshalling-test, r1.1]

```

```

*
* Revision 1.16 1995/07/18 17:02:38 oz
* - Added a DCE_ERROR error code
* [from r1.15 by delta oz-15938-TPCC-add-dce-only-
client, r1.1]
*
* Revision 1.15 1995/05/22 19:50:48 shl
* [merge of changes from 1.12 to 1.13 into 1.14]
*
* Revision 1.13 1995/05/18 15:11:27 oz
* [from r1.12 by delta oz-15290-TPCC-incorporate-hp-
drop-of-05-16-95, r1.1]
*
* Revision 1.14 1995/05/22 17:26:35 ctipper
* [merge of changes from 1.5 to 1.9 into 1.11]
*
* [*** log entries omitted ***]
*
*/

#ifndef __TPCC_DATABUF_H__
#define __TPCC_DATABUF_H__

#define I_NAME_LEN      24
#define I_DATA          50
#define W_NAME_LEN      10
#define ADDR_LEN        20
#define STATE_LEN       2
#define ZIP_LEN          9
#define DIST_INFO_LEN   24
#define S_DATA_LEN      50
#define D_NAME_LEN      10
#define H_DATA_LEN      24
#define CARRIER_LEN    2
#define C_LAST_LEN      17
#define C_MID_LEN        2
#define PHONE_LEN       16
#define CREDIT_LEN       2
#define C_DATA_LEN      500
#define BC_DTA_LEN      23

#define YEAR_TO_DATE    1
#define YEAR_TO_SECOND  2

#define ERROR(x) fprintf(stderr,"Error:
%s\n",#x),exit(11)

#define MAX_STR_LEN     255
#define MAX_OL          15

#ifndef TRUE
#define TRUE 1
#endif
#ifndef FALSE
#define FALSE 0
#endif

#define CANCEL          -1

#define DATETIME_LEN    19

```

```

#define D_PER_W        10

#define COLLECTOR      1 /* ctipper
5/3/95 */

#define ERR_BAD_ITEM_ID 1 /* copied from sql/tpcc.h
*/
#define RPC_ERROR      -2
#define SUCCESS_CODE    0

#define CHAR_NULL      '\0' /* strue
1/23/95 */

typedef enum {
liberty_term,
curses_term,
emulator_term
} term_type_t;

typedef enum {
GOOD_INPUT = 0,

SQL_ERROR = 2,
DCE_ERROR = 4,
NO_SUCH_LAST_NAME = 5,
INVALID_TRAN_TYPE = 6,
INVALID_HANDLE = 7,

WRONG_INPUT = 10,

DISTRIBUTED_TRAN_FAILED = 15,

TPCC_DB_INFO_PARTIAL = 20,
TPCC_DB_INFO_FAILED,

TPCC_ERROR_BEGIN_NEWO = 110,

TPCC_ERROR_DECL_NEWO_SEL_ITEM,
TPCC_ERROR_OPEN_NEWO_SEL_ITEM,
TPCC_ERROR_OPEN_DIST_NEWO_SEL_ITEM,
TPCC_ERROR_FETCH_NEWO_SEL_ITEM,
TPCC_ERROR_FETCH_DIST_NEWO_SEL_ITEM,
TPCC_ERROR_PREP_NEWO_SEL_STCK,
TPCC_ERROR_DECL_NEWO_SEL_STCK,
TPCC_ERROR_OPEN_NEWO_SEL_STCK,
TPCC_ERROR_OPEN_DIST_NEWO_SEL_STCK,
TPCC_ERROR_FETCH_NEWO_SEL_STCK,
TPCC_ERROR_FETCH_DIST_NEWO_SEL_STCK,
TPCC_ERROR_NEWO_SELECT,
TPCC_ERROR_NEWO_UPD_STCK,
TPCC_ERROR_DIST_NEWO_UPD_STCK,
TPCC_ERROR_NEWO_SELECT_2,
TPCC_ERROR_DECL_NEWO_SEL_CUST,
TPCC_ERROR_OPEN_NEWO_SEL_CUST,
TPCC_ERROR_OPEN_DIST_NEWO_SEL_CUST,
TPCC_ERROR_FETCH_NEWO_SEL_CUST,
TPCC_ERROR_FETCH_DIST_NEWO_SEL_CUST,
TPCC_ERROR_DECL_NEWO_SEL_DIST,
TPCC_ERROR_OPEN_NEWO_SEL_DIST,
TPCC_ERROR_OPEN_DIST_NEWO_SEL_DIST,
TPCC_ERROR_FETCH_NEWO_SEL_DIST,

```

```

TPCC_ERROR_FETCH_DIST_NEWO_SEL_DIST,
TPCC_ERROR_PREP_NEWO_INS_OL,
TPCC_ERROR_DECL_NEWO_INS_OL,
TPCC_ERROR_OPEN_NEWO_INS_OL,
TPCC_ERROR_OPEN_DIST_NEWO_INS_OL,
TPCC_ERROR_PUT_NEWO_INS_OL,
TPCC_ERROR_PUT_DIST_NEWO_INS_OL,
TPCC_ERROR_DECL_NEWO_SEL_WARE,
TPCC_ERROR_OPEN_NEWO_SEL_WARE,
TPCC_ERROR_OPEN_DIST_NEWO_SEL_WARE,
TPCC_ERROR_FETCH_NEWO_SEL_WARE,
TPCC_ERROR_FETCH_DIST_NEWO_SEL_WARE,
TPCC_ERROR_EXECUTE_NEWO_UPD_INS,
TPCC_ERROR_UPDATE_NEWO_NEXT_OID,
TPCC_ERROR_PREP_NEWO_INS,
TPCC_ERROR_EXECUTE_DIST_NEWO_INS,
TPCC_ERROR_EXECUTE_NEWO_COMMIT,
TPCC_ERROR_ROLLBACK_NEWO,
TPCC_ERROR_REMOTE_OL_SELECT,
TPCC_ERROR_REMOTE_OL_UPDATE,

TPCC_ERROR_OPEN_ORDS_CNT_CID = 200,
TPCC_ERROR_FETCH_ORDS_CNT_CID,
TPCC_ERROR_OPEN_ORDS_SEL_CLAST,
TPCC_ERROR_FETCH_ORDS_SEL_CLAST,
TPCC_ERROR_OPEN_ORDS_SEL_CID,
TPCC_ERROR_FETCH_ORDS_SEL_CID,
TPCC_ERROR_OPEN_ORDS_SEL_OLDORD,
TPCC_ERROR_FETCH_ORDS_OLDORD,
TPCC_ERROR_OPEN_ORDS_SEL_OL,
TPCC_ERROR_FETCH_ORDS_SEL_OL,
TPCC_ERROR_EXECUTE_ORDS_COMMIT,

TPCC_ERROR_OPEN_DELIVERY_OLDEST_OID = 300,
TPCC_ERROR_FETCH_DELIVERY_OLDEST_OID,
TPCC_ERROR_EXECUTE_DELIVERY_COMMIT,
TPCC_ERROR_OPEN_DELIVERY_SEL_ORD,
TPCC_ERROR_FETCH_DELIVERY_SEL_ORD,
TPCC_ERROR_OPEN_DELIVERY_SEL_SUM_OL,
TPCC_ERROR_FETCH_DELIVERY_SEL_SUM_OL,
TPCC_ERROR_EXECUTE_DELIVERY_EXEC_DVRY,
TPCC_ERROR_SELECT_DELIVERY_ORDER_ID,
TPCC_ERROR_SELECT_DELIVERY_CARRIER_ID,
TPCC_ERROR_SELECT_DELIVERY_BALANCE,

TPCC_ERROR_OPEN_STOCKLEVEL_SEL_OID = 400,
TPCC_ERROR_FETCH_STOCKLEVEL_SEL_OID,
TPCC_ERROR_OPEN_STOCKLEVEL_CNT_SID,
TPCC_ERROR_FETCH_STOCKLEVEL_CNT_SID,
TPCC_ERROR_OPEN_STOCKLEVEL_FIND,
TPCC_ERROR_FETCH_STOCKLEVEL_FIND,
TPCC_ERROR_EXECUTE_STOCKLEVEL_COMMIT,

TPCC_ERROR_OPEN_PAYMENT_CNT_CID = 500,
TPCC_ERROR_FETCH_PAYMENT_CNT_CID,
TPCC_ERROR_OPEN_PAYMENT_SEL_CLAST,
TPCC_ERROR_FETCH_PAYMENT_SEL_CLAST,
TPCC_ERROR_OPEN_PAYMENT_SEL_CID,
TPCC_ERROR_FETCH_PAYMENT_SEL_CID,
TPCC_ERROR_DECL_PAYMENT_SEL_DIST,
TPCC_ERROR_OPEN_PAYMENT_SEL_DIST,

```

```

TPCC_ERROR_OPEN_DIST_PAYMENT_SEL_DIST,
TPCC_ERROR_FETCH_PAYMENT_SEL_DIST,
TPCC_ERROR_FETCH_DIST_PAYMENT_SEL_DIST,
TPCC_ERROR_DECL_PAYMENT_SEL_WARE,
TPCC_ERROR_OPEN_PAYMENT_SEL_WARE,
TPCC_ERROR_OPEN_DIST_PAYMENT_SEL_WARE,
TPCC_ERROR_FETCH_PAYMENT_SEL_WARE,
TPCC_ERROR_FETCH_DIST_PAYMENT_SEL_WARE,
TPCC_ERROR_EXECUTE_PAYMENT_UPD_CUST_LAST,
TPCC_ERROR_EXECUTE_PAYMENT_UPD_CUST_ID,
TPCC_ERROR_COMMIT_PAYMENT_UPD_CUST,
TPCC_ERROR_SELECT_PAYMENT_W_YTD,
TPCC_ERROR_SELECT_PAYMENT_D_YTD,
TPCC_ERROR_BEGIN_PAYMENT,
TPCC_ERROR_EXECUTE_PAYMENT_COMMIT,
TPCC_ERROR_PAYMENT_UPD_CUST_BY_NAME,
TPCC_ERROR_PAYMENT_UPD_CUST_BY_ID,
TPCC_ERROR_PAYMENT_UPDATE_DIST,
TPCC_ERROR_PAYMENT_UPDATE_WH,
TPCC_ERROR_PAYMENT_INSERT_HISTORY,
TPCC_ERROR_EXECUTE_PAYMENT_WH_DIST
} tpcc_rc_t;

typedef enum {
    TPCC_DEADLOCK_MSG = 10,
    TPCC_RETRY_MSG
} tpcc_msg_t;

#endif /* __TPCC_DATABUF_H__ */

```

delivery.h

```

#ifdef TRANSARC_delivery_h
#define TRANSARC_delivery_h

#include <trpc/trpc.h>
#include "_delivery.h"

#include <encina/c_prologue.h>

#if defined(BUILDDLL)
#define DLLEXPORT __declspec( dllexport )
#else
#define DLLEXPORT extern
#endif

#ifdef ENCINA_STUB_CALLING
#define ENCINA_STUB_CALLING ENCINA_RPC_CALLING
#endif

#define delivery_v1_0_c_ifspec
    _delivery_v1_0_c_ifspec
#define delivery_v1_0_s_ifspec
    _delivery_v1_0_s_ifspec

typedef struct delivery_v1_0_epv {
void (ENCINA_STUB_CALLING *impTPCCDelivery) (
#ifdef IDL_PROTOTYPES

```

```

    idl_long_int length,
    idl_char *dataP,
    data_header *headerP,
    trpc_status_t *trpcStatus

#endif
);

} delivery_v1_0_epv_t;

DLLEXPORT void ENCINA_STUB_CALLING impTPCCDelivery (
#ifdef IDL_PROTOTYPES

    idl_long_int length,
    idl_char *dataP,
    data_header *headerP,
    trpc_status_t *trpcStatus

#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t          handle,
    trpc_tranInfo_t      *tranInfoP,
    trpc_ifSpec_t        *ifSpecP
#endif

#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t          handle,
    trpc_handle_t        trpcHandle,
    trpc_tranInfo_t      *tranInfoP,
    trpc_ifSpec_t        *ifSpecP
#endif

#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t          handle,
    trpc_tranInfo_t      *tranInfoP,
    trpc_ifSpec_t        *ifSpecP
#endif

#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t          handle,
    trpc_handle_t        trpcHandle,
    trpc_tranInfo_t      *tranInfoP,
    trpc_ifSpec_t        *ifSpecP
#endif

#endif
);

extern delivery_v1_0_epv_t
    delivery_v1_0_client_epv;
extern _delivery_v1_0_epv_t
    delivery_v1_0_manager_epv;
extern rpc_mgr_epv_t
    delivery_v1_0_mgr_epv;

```

```

#include <encina/c_epilogue.h>
#endif /* TRANSARC_delivery_h */

```

dlldata.c

```

/*****
****
DllData file -- generated by MIDL compiler

DO NOT ALTER THIS FILE

This file is regenerated by MIDL on every IDL file
compile.

To completely reconstruct this file, delete it and
rerun MIDL
on all the IDL files in this DLL, specifying this
file for the
/dlldata command line option

****/

#include <rpcproxy.h>

#ifdef __cplusplus
extern "C" {
#endif

EXTERN_PROXY_FILE( tpcc_com_ps )

PROXYFILE_LIST_START
/* Start of list */
REFERENCE_PROXY_FILE( tpcc_com_ps ),
/* End of list */
PROXYFILE_LIST_END

DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )

#ifdef __cplusplus
} /*extern "C" */
#endif

/* end of generated dlldata file */

```

install.c

```

/* FILE:          INSTALL.C
*
* TPC-C Kit Ver. 4.51.000
*
* Microsoft, 2003
* All Rights Reserved
*
* not audited

```

```

*
* PURPOSE: Automated installation
application for TPC-C Web Kit
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - added COM installation
steps
* 4.50.000 - added IIS6 configuration options
* 4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
* to
SystemRoot\System32
*/

#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <stdio.h>
#include <commctrl.h>
#include "..\..\common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT WM_USER+100

HICON hIcon;
HINSTANCE hInst;

DWORD versionExeMS;
DWORD versionExeLS;
DWORD versionExeMM;
DWORD versionDllMS;
DWORD versionDllLS;

// TPC-C registry settings
TPCCRISTRYDATA Reg;

static int iPoolThreadLimit;
static int iMaxPoolThreads;
static int iThreadTimeout;
static int iListenBackLog;
static int iAcceptExOutstanding;
static int iUriEnableCache;
static int iUriScavengerPeriod;
static int iMaxConnections;

static int iIISMajorVersion;
static int iNumberOfProcessors;

static int iMaxPhysicalMemory;
//max physical memory in MB
static char szLastFileName[64]; //
last file we worked on (for error reporting)

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);

```

```

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT
uMsg, WPARAM wParam, LPARAM lParam);
BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam);
static void ProcessOK(HWND hwnd,
char *szDllPath, char *szWindowsPath);
static void ReadRegistrySettings(void);
static void WriteRegistrySettings(char *szDllPath);
static BOOL RegisterDLL(char
*szFileName);
static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath);
static BOOL GetInstallPath(char
*szDllPath);
static BOOL GetWindowsInstallPath(char *szWindowsPath);
static void GetVersionInfo(char
*szDLLPath, char *szExePath);
static BOOL CheckWWWWebService(void);
static BOOL StartWWWWebService(void);
static BOOL StopWWWWebService(void);
static void UpdateDialog(HWND
hDlg);
static void ConfigureIIS6(HWND
hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL install_com(char *szDllPath);

#include "..\..\common\src\ReadRegistry.cpp"

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE
hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;

    InitCommonControls();

    hIcon = LoadIcon(hInstance,
MAKEINTRESOURCE(IDI_ICON1));

    iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(),
LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance,
MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(),
MainDlgProc);
        if ( iRc )
        {

```

```

        DialogBoxParam(hInstance,
MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(),
UpdatedDlgProc, (LPARAM)iRc);
    }
}

DestroyIcon(hIcon);
return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    HGLOBAL hRes;
    HRSRC hResInfo;
    BYTE *pSrc, *pDst;
    DWORD dwSize;
    static HFONT hFont;

    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12,
0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT,
(WPARAM)hFont, MAKELPARAM(0, 0) );
            PostMessage(hwnd,
WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1),
"LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo );
            pSrc = (BYTE
*)LockResource(hRes);
            pDst = (unsigned char
*)malloc(dwSize+1);
            if ( pDst )
            {
                memcpy(pDst,
pSrc, dwSize);
                pDst[dwSize]
= 0;

                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pDst);
                free(pDst);
            }
            else
            {
                SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
                return TRUE;
            }
        case WM_DESTROY:
            DeleteObject(hFont);
    }
}

```

```

        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
        if ( wParam == IDCANCEL
)
            EndDialog(hwnd, FALSE);
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:

                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");

                    break;
            }
            return TRUE;
        case WM_COMMAND:
            if ( wParam == IDOK )

                EndDialog(hwnd, TRUE);
            break;
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    char szTmp[256];
    static char szDllPath[256];
    static char szWindowsPath[256];
    static char szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:

```

```

        GlobalMemoryStatus(&memoryStatus);
        iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);

        if (
GetWindowsInstallPath(szWindowsPath) )
        {
            MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);

            EndDialog(hwnd, FALSE);
            return TRUE;
        }
        if (
GetInstallPath(szDllPath) )
        {
            MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP |
MB_OK);

            EndDialog(hwnd, FALSE);
            return TRUE;
        }
        // set default values
        ZeroMemory( &Reg,
sizeof(Reg) );

        Reg.dwNumberOfDeliveryThreads = 4;
        Reg.dwMaxConnections =
100;

        Reg.dwMaxPendingDeliveries = 100;
        Reg.eDB_Protocol =
DBLIB;

        Reg.eTxnMon = None;
        strcpy(Reg.szDbServer,
"");
        strcpy(Reg.szDbName,
"tpcc");
        strcpy(Reg.szDbUser,
"sa");
        strcpy(Reg.szDbPassword,
"");

        iPoolThreadLimit =
iMaxPhysicalMemory * 2;
        iThreadTimeout = 86400;
        iListenBackLog = 15;
        iAcceptExOutstanding =
40;

        ReadTPCCRegistrySettings( &Reg );
        ReadRegistrySettings();

```

```

        // copy the hardware
information to the SYSTEM_INFO structure
        GetSystemInfo(&siSysInfo);
        // store the number of
processors on this system
        iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

        GetModuleFileName(hInst, szExePath,
sizeof(szExePath));

        GetVersionInfo(szDllPath, szExePath);

        wsprintf(szTmp,
"Version %d.%2d.%3d", versionExeMS, versionExeMM,
versionExeLS);
        SetDlgItemText(hwnd,
IDC_VERSION, szTmp);

        SetDlgItemText(hwnd,
IDC_PATH, szDllPath);

        SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
        SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
        SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
        SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);

        SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
        SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
        SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
        SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
        SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
        SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
        SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

        CheckDlgButton(hwnd,
IDC_DBLIB, 0);
        CheckDlgButton(hwnd,
IDC_ODBC, 0);

        if ( Reg.eDB_Protocol
== DBLIB )

            CheckDlgButton(hwnd, IDC_DBLIB, 1);
        else

            CheckDlgButton(hwnd, IDC_ODBC, 1);

```

```

// check OS version
level for COM. Must be at least Windows 2000
VI.dwOSVersionInfoSize
= sizeof(VI);
GetVersionEx( &VI );
if (VI.dwMajorVersion <
5)
{
HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
EnableWindow(
hDlg, 0 ); // disable COM option
if
(Reg.eTxnMon == COM)
Reg.eTxnMon = None;
}
CheckDlgButton(hwnd,
IDC_TM_NONE, 0);
CheckDlgButton(hwnd,
IDC_TM_TUXEDO, 0);
CheckDlgButton(hwnd,
IDC_TM_MTS, 0);
CheckDlgButton(hwnd,
IDC_TM_ENCINA, 0);
switch (Reg.eTxnMon)
{
case None:
CheckDlgButton(hwnd, IDC_TM_NONE, 1);
break;
case TUXEDO:
CheckDlgButton(hwnd, IDC_TM_TUXEDO, 1);
break;
case ENCINA:
CheckDlgButton(hwnd, IDC_TM_ENCINA, 1);
break;
case COM:
CheckDlgButton(hwnd, IDC_TM_MTS, 1);
break;
}
return TRUE;
case WM_PAINT:
if ( IsIconic(hwnd) )
{
BeginPaint(hwnd, &ps);
DrawIcon(ps.hdc, 0, 0, hIcon);
EndPaint(hwnd, &ps);
}
break;
case WM_COMMAND:

```

```

if ( HIWORD(wParam) ==
BN_CLICKED )
{
switch(
LOWORD(wParam) )
{
case IDC_DBLIB:
return TRUE;
case IDC_ODBC:
return TRUE;
case IDOK:
ProcessOK(hwnd, szDllPath, szWindowsPath);
return TRUE;
case IDCANCEL:
EndDialog(hwnd, FALSE);
return TRUE;
default:
return FALSE;
}
}
break;
default:
break;
}
return FALSE;
}
static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
int d;
HWND hDlg;
int rc;
BOOL bSvcRunning;
char szFullName[256];
char szErrMsg[128];
// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);
GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));

```

```

GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));
if ( IsDlgButtonChecked(hwnd, IDC_DBLIB) )
{
Reg.eDB_Protocol = DBLIB;
rc = 1;
}
else if ( IsDlgButtonChecked(hwnd,
IDC_ODBC) )
{
Reg.eDB_Protocol = ODBC;
rc = 2;
}
if ( IsDlgButtonChecked(hwnd, IDC_TM_NONE) )
Reg.eTxnMon = None;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_TUXEDO) )
Reg.eTxnMon = TUXEDO;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_MTS) )
Reg.eTxnMon = COM;
else if ( IsDlgButtonChecked(hwnd,
IDC_TM_ENCINA) )
Reg.eTxnMon = ENCINA;
iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);
ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);
// check to see if the web services are
running
bSvcRunning = CheckWWWWebService();
if ( bSvcRunning )
{
SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
StopWWWWebService();
}

```



```

        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);
    }

    // write binaries to inetpub\wwwroot
    rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
    if ( !rc )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "Error(s)
occured when creating " );
        strcat( szErrTxt, szLastFileName
);
    }
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// while we have the web services shutdown,
check to see if this
// is IIS6. If it is, then call
ConfigureIIS6
if ( iIISMajorVersion == 6 )
{
    ConfigureIIS6(hwnd, hDlg);
}

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    StartWWWebService();
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occured
when registering " );
    strcat( szErrTxt, szFullName );
}

```

```

        MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }

    // if using COM
    if (Reg.eTxnMon == COM)
    {
        SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
        SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
        UpdateDialog(hDlg);

        if (install_com(szDllPath))
        {
            ShowWindow(hwnd,
SW_SHOWNA);
            DestroyWindow(hDlg);
            strcpy( szErrTxt,
"Error occured when configuring COM settings." );
            MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
            EndDialog(hwnd, 0);
            return;
        }

        Sleep(100);

        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        EndDialog(hwnd, rc);
        return;
    }

static void ReadRegistrySettings(void)
{
    HKEY    hKey;
    DWORD   size;
    DWORD   type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion

                iIISMajorVersion = 5;
            }

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Param
eters", 0, KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

        {
            if ( iIISMajorVersion == 6 )
            {
                // since IIS6 handles
the pool thread parameters differently, we need to
fill in the dialog
                // with the
MaxPoolThreads rather than PoolThreadLimit
                // for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
                size = sizeof(iPoolThreadLimit);
                if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                    if ( !iPoolThreadLimit

                        iPoolThreadLimit = iMaxPhysicalMemory * 2;
                    }
                    else
                    {
                        size =
sizeof(iPoolThreadLimit);
                        if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
                            if ( !iPoolThreadLimit

                                iPoolThreadLimit = iMaxPhysicalMemory * 2;
                            }

                            size = sizeof(iThreadTimeout);
                            if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
                                if ( !iThreadTimeout )

                                    iThreadTimeout = 86400;

                                size = sizeof(iListenBackLog);
                                if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
                                    if ( !iListenBackLog )

                                        iListenBackLog = 15;

                                RegCloseKey(hKey);
                            }

                            if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramete
rs", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
                                {
                                    size =
sizeof(iAcceptExOutstanding);
                                    if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char
*)&iAcceptExOutstanding, &size) == ERROR_SUCCESS )

```

```

        if (
!iAcceptExOutstanding )

            iAcceptExOutstanding = 40;

            RegCloseKey(hKey);
        }
        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\HTTP\\Parameter
s", 0, KEY_READ, &hKey) == ERROR_SUCCESS )
        {
            size = sizeof(iUriEnableCache);
            if ( RegQueryValueEx(hKey,
"UriEnableCache", 0, &type, (char *)&iUriEnableCache,
&size) == ERROR_SUCCESS )
                if ( !iUriEnableCache )

                    iUriEnableCache = 0;

            size =
sizeof(iUriScavengerPeriod);
            if ( RegQueryValueEx(hKey,
"UriScavengerPeriod", 0, &type, (char
*)&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
                if (
!iUriScavengerPeriod )

                    iUriScavengerPeriod = 10800;

            size = sizeof(iMaxConnections);
            if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (char *)&iMaxConnections,
&size) == ERROR_SUCCESS )
                if ( !iMaxConnections )

                    iMaxConnections = 100000;

            RegCloseKey(hKey);
        }
    }

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY    hKey;
    DWORD   dwDisposition;
    char    szTmp[256];
    char    *ptr;
    int     iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, NULL,
REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
&dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;
    }
}

```

```

            RegSetValueEx(hKey, "Path", 0,
REG_SZ, szTmp, strlen(szTmp)+1);

            RegSetValueEx(hKey,
"NumberOfDeliveryThreads", 0, REG_DWORD, (char
*)&Reg.dwNumberOfDeliveryThreads,
sizeof(Reg.dwNumberOfDeliveryThreads));
            RegSetValueEx(hKey,
"MaxConnections", 0, REG_DWORD, (char
*)&Reg.dwMaxConnections,
sizeof(Reg.dwMaxConnections));
            RegSetValueEx(hKey,
"MaxPendingDeliveries", 0, REG_DWORD, (char
*)&Reg.dwMaxPendingDeliveries,
sizeof(Reg.dwMaxPendingDeliveries));

            RegSetValueEx(hKey,
"DB_Protocol", 0, REG_SZ,
szDBNames[Reg.eDB_Protocol],
strlen(szDBNames[Reg.eDB_Protocol])+1);
            RegSetValueEx(hKey, "TxnMonitor",
0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
strlen(szTxnMonNames[Reg.eTxnMon])+1);

            RegSetValueEx(hKey, "DbServer",
0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
            RegSetValueEx(hKey, "DbName", 0,
REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
            RegSetValueEx(hKey, "DbUser", 0,
REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
            RegSetValueEx(hKey, "DbPassword",
0, REG_SZ, Reg.szDbPassword,
strlen(Reg.szDbPassword)+1);

            strcpy(szTmp, "YES");
            RegSetValueEx(hKey,
"COM_SinglePool", 0, REG_SZ, szTmp, strlen(szTmp)+1);

            RegFlushKey(hKey);
            RegCloseKey(hKey);
        }

        if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\inetinfo\\Param
eters", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
        {
            // if this is IIS6, then we need
to treat the PoolThreadLimit differently
            // if IIS6, then PoolThreadLimit
is the maximum number of threads for the entire
system.

            // IIS6 added MaxPoolThreads
which controls the number of threads per processor.
For IIS6

            // we will set MaxPoolThreads to
the value the user provided in the dialog and then
set

```

```

            // PoolThreadLimit to
MaxPoolThreads * number of processors on this system
            if ( iiISMajorVersion == 6 )
            {
                iMaxPoolThreads =

iPoolThreadLimit;

                iPoolThreadLimit =
iMaxPoolThreads * iNumberOfProcessors;
                RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
                RegSetValueEx(hKey,
"MaxPoolThreads", 0, REG_DWORD, (char
*)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
            }
            else
            {
                RegSetValueEx(hKey,
"PoolThreadLimit", 0, REG_DWORD, (char
*)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
            }

            RegSetValueEx(hKey,
"ThreadTimeout", 0, REG_DWORD, (char
*)&iThreadTimeout, sizeof(iThreadTimeout));
            RegSetValueEx(hKey,
"ListenBackLog", 0, REG_DWORD, (char
*)&iListenBackLog, sizeof(iListenBackLog));

            RegFlushKey(hKey);
            RegCloseKey(hKey);
        }

        if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Paramet
ers", 0, NULL, REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
        {
            RegSetValueEx(hKey,
"AcceptExOutstanding", 0, REG_DWORD, (char
*)&iAcceptExOutstanding,
sizeof(iAcceptExOutstanding));

            RegFlushKey(hKey);
            RegCloseKey(hKey);
        }

        return;
    }

    BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
    {
        if ( uMsg == WM_INITDIALOG )
        {
            SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 16));
            SendDlgItemMessage(hwnd,
IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);

```

```

        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC    lpDllEntryPoint;

    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
"DllRegisterServer");
    if (lpDllEntryPoint != NULL)
    {
        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE;    //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL          hDLL;
    HRSRC            hResInfo;
    HANDLE           hFile;
    DWORD            dwSize;
    BYTE             *pSrc;
    DWORD            d;
    char             szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( !(hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);

```

```

    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files...");
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install TPCC.DLL
    strcpy( szLastFileName, "tpcc.dll" );
    if (!FileFromResource( "TPCCDLL",
IDR_TPCCDLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install MSVCR70.DLL
    strcpy( szLastFileName, "msvcr70.dll" );
    if (!FileFromResource( "MSVCRT70",
IDR_MSVCRT701, szWindowsPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_dblib.dll
    strcpy( szLastFileName, "tpcc_dblib.dll" );
    if (!FileFromResource( "DBLIB_DLL",
IDR_DBLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tuxapp.exe
    strcpy( szLastFileName, "tuxapp.exe" );
    if (!FileFromResource( "TUXEDO_APP",
IDR_TUXEDO_APP, szDllPath, szLastFileName ))
        return 0;
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    //UpdateDialog(hDlg);

    // install tpcc_tuxedo.dll

```

```

    strcpy( szLastFileName, "tpcc_tuxedo.dll"
);
    if (!FileFromResource( "TUXEDO_DLL",
IDR_TUXEDO_DLL, szDllPath, szLastFileName ))
        return 0;
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    //UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.tlb
    strcpy( szLastFileName, "tpcc_com_all.tlb"
);
    if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_ps.dll
    strcpy( szLastFileName, "tpcc_com_ps.dll"
);
    if (!FileFromResource( "COM_PS_DLL",
IDR_COMPS_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.dll
    strcpy( szLastFileName, "tpcc_com_all.dll"
);
    if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY    hKey;
    BYTE    szData[256];
    DWORD   sv;
    BOOL    bRc;

```

```

int len;
int iRc;

// Registry key
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
// IIS default web site directory and
determine that IIS is installed.

szDllPath[0] = 0;
bRc = TRUE;
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szDllPath,
szData);
        len =
strlen(szDllPath);
        if ( szDllPath[len-1]
!= '\\' )
        {
            szDllPath[len] = '\\';
            szDllPath[len+1] = 0;
        }
        RegCloseKey(hKey);
    }
    return bRc;
}

static BOOL GetWindowsInstallPath(char
*szWindowsPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

// Registry key
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
NT\CurrentVersion\SystemRoot is used to find the
// system root to install the VC70 DLL.

szWindowsPath[0] = 0;
bRc = TRUE;

```

```

if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szWindowsPath,
szData);
        len =
strlen(szWindowsPath);
        if ( szWindowsPath[len-
1] != '\\' )
        {
            szWindowsPath[len] = '\\';
            szWindowsPath[len+1] = 0;
            // now append the path
            strcat(szWindowsPath,
"SYSTEM32\");
        }
        RegCloseKey(hKey);
    }
    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD d;
    DWORD
    DWORD dwSize;
    DWORD
    dwBytes;
    char
    *ptr;
    VS_FIXEDFILEINFO *vs;

    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char
*)malloc(dwSize);
            GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
            VerQueryValue(ptr,
"\",&vs, &dwBytes);

```

```

        versionDllMS = vs-
>dwProductVersionMS;
        versionDllLS = vs-
>dwProductVersionLS;
    }
    }
    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\",&vs,
&dwBytes);
        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}

static BOOL CheckWWWWebService(void)
{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;

    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
until the service is running.
    if (! QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;

    CloseServiceHandle(schService);
    return TRUE;
}

ServiceNotRunning:

```

```

        CloseServiceHandle(schService);
        return FALSE;
    }

static BOOL StartWWWebService(void)
{
    SC_HANDLE      schSCManager;
    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;
    DWORD          dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
    SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! StartService(schService, 0, NULL) )
        goto StartWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StartWWWebErr;
    while( ssStatus.dwCurrentState !=
    SERVICE_RUNNING)
    {
        dwOldCheckPoint =
        ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
        ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StartWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StartWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWebService(void)
{

```

```

    SC_HANDLE      schSCManager;
    SC_HANDLE      schService;
    SERVICE_STATUS ssStatus;
    DWORD          dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
    SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWebErr;
    //start Service pending, Check the status
    until the service is running.
    if (! QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWebErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {
        dwOldCheckPoint =
        ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
        ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWebErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWebErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{

```

```

    MSG msg;

    UpdateWindow(hDlg);
    while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
    {
        TranslateMessage(&msg);
        DispatchMessage(&msg);
    }
    Sleep(250);
    return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int      irc;
    char     szErrTxt[128];
    FILE     *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6...");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
    configuration error." );
        strcat( szErrTxt, "Check
    iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

install.h


---


//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1          101
#define IDI_ICON1           102
#define IDR_TPCCDLL         103
#define IDD_DIALOG2        105
#define IDI_ICON2           106

```

```

#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

#define BN_LOG
1001
#define ED_KEEP
1002
#define ED_THREADS
1003
#define ED_THREADS2
1004
#define IDC_PATH
1007
#define IDC_VERSION
1009
#define IDC_RESULTS
1010
#define IDC_PROGRESS1
1011
#define IDC_STATUS
1012
#define IDC_BUTTON1
1013
#define ED_MAXCONNECTION
1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT
1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE
1017
#define ED_IIS_THREAD_TIMEOUT
1018
#define ED_IIS_LISTEN_BACKLOG
1019
#define IDC_DBLIB
1021
#define IDC_ODBC
1022
#define IDC_CONNECT_POOL
1023
#define ED_USER_CONNECT_DELAY_TIME
1024

// Next default values for new objects
//

```

install.rc

```

// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

////////////////////////////////////
////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////
////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////////////////////////////////
////////////////////////////////////
//
// Dialog
//

IDD_DIALOG1 DIALOGEX 0, 0, 219, 351
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT        ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING

    EDITTEXT        ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING

    EDITTEXT        ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING

    CONTROL
    "None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP, 43, 100, 33, 10

    CONTROL
    "COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP, 43, 113, 32, 10

    CONTROL
    "TUXEDO", IDC_TM_TUXEDO, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP, 106, 100, 46, 10

    CONTROL
    "ENCINA", IDC_TM_ENCINA, "Button", BS_AUTORADIOBUTTON |
    WS_DISABLED |
    WS_TABSTOP, 106, 113, 43, 10

    EDITTEXT        ED_DB_SERVER, 131, 152, 67, 12, ES_AUTOHSCROLL
    EDITTEXT        ED_DB_USER_ID, 131, 165, 67, 12, ES_AUTOHSCROLL
    EDITTEXT        ED_DB_PASSWORD, 131, 178, 67, 12, ES_AUTOHSCROLL
    EDITTEXT        ED_DB_NAME, 131, 191, 67, 12, ES_AUTOHSCROLL

```

```

    CONTROL
    "DBLIB", IDC_DBLIB, "Button", BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP, 45, 219, 39, 12

    CONTROL
    "ODBC", IDC_ODBC, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP,
    91, 219, 39, 12

    EDITTEXT        ED_IIS_MAX_THREAD_POOL_LIMIT, 164, 263, 34, 12, ES_RIGHT |
    ES_NUMBER, WS_EX_RTLREADING

    EDITTEXT        ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, 164, 277, 34, 12, ES_RI
    GHT |
    ES_NUMBER, WS_EX_RTLREADING

    EDITTEXT        ED_IIS_THREAD_TIMEOUT, 164, 291, 34, 12, ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING

    EDITTEXT        ED_IIS_LISTEN_BACKLOG, 164, 305, 34, 12, ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING

    DEFPUSHBUTTON   "OK", IDOK, 53, 331, 50, 14
    PUSHBUTTON      "Cancel", IDCANCEL, 119, 331, 50, 14
    EDITTEXT        IDC_PATH, 106, 26, 91, 13, ES_AUTOHSCROLL | ES_READONLY
    LTEXT           "Number of Delivery
    Threads:", IDC_STATIC, 35, 45, 115, 12
    LTEXT           "Max Number of
    Connections:", IDC_STATIC, 35, 73, 115, 12
    RTEXT           "Version
    4.11", IDC_VERSION, 120, 4, 89, 9
    LTEXT           "IIS Max Thread Pool
    Limit:", IDC_STATIC, 36, 263, 115, 12
    LTEXT           "Web Service Backlog Queue
    Size:", IDC_STATIC, 36, 277, 115,
    12
    LTEXT           "IIS Thread Timeout
    (seconds):", IDC_STATIC, 36, 291, 115, 12
    LTEXT           "IIS Listen
    Backlog:", IDC_STATIC, 36, 307, 115, 10
    GROUPBOX       "Database
    Interface", IDC_STATIC, 35, 208, 163, 27, WS_GROUP
    LTEXT           "Installation
    directory:", IDC_STATIC, 35, 29, 71, 10
    GROUPBOX       "Transaction
    Monitor", IDC_STATIC, 33, 90, 165, 37
    LTEXT           "Server
    Name:", IDC_STATIC, 35, 155, 56, 8
    LTEXT           "User ID:", IDC_STATIC, 35, 168, 60, 8
    LTEXT           "User
    Password:", IDC_STATIC, 35, 181, 83, 8
    LTEXT           "Database
    Name:", IDC_STATIC, 35, 194, 54, 8
    GROUPBOX       "SQL Server Connection
    Properties", IDC_STATIC, 22, 139, 187,
    102
    GROUPBOX       "Web Client
    Properties", IDC_STATIC, 22, 15, 187, 118

```

```

GROUPBOX "IIS
Settings", IDC_STATIC, 22, 247, 187, 79
LTEXT "Max Pending
Deliveries:", IDC_STATIC, 35, 59, 115, 12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETFOREGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
DEFPUSHBUTTON "OK", IDOK, 33, 45, 50, 9
CTEXT "HTML TPC-C Installation
Successful", IDC_RESULTS, 7, 22,
102, 18, 0, WS_EX_CLIENTEDGE
ICON
IDI_ICON2, IDC_STATIC, 50, 7, 18, 20, SS_REALSIZEIMAGE,
WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
CONTROL
"Progress1", IDC_PROGRESS1, "msctls_progress32", WS_BORD
ER,
7, 20, 77, 13
CTEXT
"Static", IDC_STATUS, 7, 7, 77, 12, SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
EDITTEXT
IDC_LICENSE, 7, 7, 271, 167, ES_MULTILINE | ES_AUTOVSCROLL
|
ES_AUTOHSCROLL | ES_READONLY |
WS_VSCROLL | WS_HSCROLL
DEFPUSHBUTTON "I &Agree", IDOK, 87, 181, 50, 14
PUSHBUTTON "&Cancel", IDCANCEL, 153, 181, 50, 14
END

#####
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED

```

```

GUIDELINES DESIGNINFO
BEGIN
IDD_DIALOG1, DIALOG
BEGIN
LEFTMARGIN, 22
RIGHTMARGIN, 209
VERTGUIDE, 35
VERTGUIDE, 198
TOPMARGIN, 4
BOTTOMMARGIN, 345
END

IDD_DIALOG2, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 109
TOPMARGIN, 7
BOTTOMMARGIN, 54
END

IDD_DIALOG3, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 84
TOPMARGIN, 7
BOTTOMMARGIN, 33
END

IDD_DIALOG4, DIALOG
BEGIN
LEFTMARGIN, 7
RIGHTMARGIN, 278
TOPMARGIN, 7
BOTTOMMARGIN, 195
END
END
#endif // APSTUDIO_INVOKED

#ifdef APSTUDIO_INVOKED
#####
//
// TEXTINCLUDE
//
1 TEXTINCLUDE
BEGIN
"resource.h\0"
END

2 TEXTINCLUDE
BEGIN
"#include \"afxres.h\"\r\n"
"\0"
END

3 TEXTINCLUDE
BEGIN
"\r\n"
"\0"
END

```

```

END
#endif // APSTUDIO_INVOKED

#####
//
// Icon
//
// Icon with lowest ID value placed first to ensure
application icon
// remains consistent on all systems.
IDI_ICON1 ICON
"icon1.ico"
IDI_ICON2 ICON
"icon2.ico"

#####
//
// TPCDDL
//
IDR_TPCDDL TPCDDL
"..\\..\\sapi_dll\\bin\\tpcc.dll"

#####
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,50,0
PRODUCTVERSION 0,4,50,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x1L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C Web Client
Installer"
VALUE "CompanyName", "Microsoft"
VALUE "FileDescription", "install"
VALUE "FileVersion", "0,4,20,0"
VALUE "InternalName", "install"
VALUE "LegalCopyright", "Copyright ©
1999"
VALUE "OriginalFilename", "install.exe"
VALUE "ProductName", "Microsoft install"

```

```

        VALUE "ProductVersion", "0, 4, 20, 0"
    END
END
BLOCK "VarFileInfo"
BEGIN
    VALUE "Translation", 0x409, 1200
END
END

////////////////////////////////////
//
// LICENSE
//

IDR_LICENSE1          LICENSE
"license.txt"

////////////////////////////////////
//
// DBLIB_DLL
//

IDR_DBLIB_DLL         DBLIB_DLL
"..\\..\\db_dblib_dll\\bin\\Release\\tpcc_dblib.dll"

////////////////////////////////////
//
// ODBC_DLL
//

IDR_ODBC_DLL          ODBC_DLL
"..\\..\\db_odbc_dll\\bin\\Release\\tpcc_odbc.dll"

////////////////////////////////////
//
// TUXEDO_APP
//

IDR_TUXEDO_APP        TUXEDO_APP
"..\\..\\tuxapp\\bin\\tuxapp.exe"

////////////////////////////////////
//
// TUXEDO_DLL
//

IDR_TUXEDO_DLL        TUXEDO_DLL
"..\\..\\tm_tuxedo_dll\\bin\\tpcc_tuxedo.dll"

////////////////////////////////////
//
// COM_DLL
//

```

```

IDR_COM_DLL           COM_DLL
"..\\..\\tm_com_dll\\bin\\tpcc_com.dll"

////////////////////////////////////
//
// COM_PS_DLL
//

IDR_COMPS_DLL         COM_PS_DLL
"..\\..\\tpcc_com_ps\\bin\\tpcc_com_ps.dll"

////////////////////////////////////
//
// COM_ALL_DLL
//

IDR_COMALL_DLL        COM_ALL_DLL
"..\\..\\tpcc_com_all\\bin\\tpcc_com_all.dll"

////////////////////////////////////
//
// COM_TYPLIB
//

IDR_COMTYPLIB_DLL     COM_TYPLIB
"..\\..\\tpcc_com_all\\src\\tpcc_com_all.tlb"

////////////////////////////////////
//
// MSVCRT70
//

IDR_MSVCRT70          MSVCRT70
"C:\\WINDOWS\\system32\\msvcr70.dll"
#endif // English (U.S.) resources
////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////
#endif // not APSTUDIO_INVOKED

////////////////////////////////////
//
//
//

```

install_com.cpp

```

/* FILE: INSTALL_COM.CPP

```

```

*
* Microsoft
* TPC-C Kit Ver. 4.51.000
* Copyright
* Microsoft, 1999
* All Rights Reserved
*
* not audited
*
* PURPOSE: installation code for COM
* application for TPC-C Web Kit
* Contact: Charles Levine
* (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/

#define WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection*
pCatalogCollectionMethod = NULL;

    ICatalogObject*
pCatalogObjectApp = NULL;
    ICatalogObject*
pCatalogObjectCo = NULL;
    ICatalogObject*
pCatalogObjectItf = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bTmp;

```



```

CoInitializeEx(NULL, COINIT_MULTITHREADED);

HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
                NULL,
                CLSCTX_INPROC_SERVER,
                IID_ICOMAdminCatalog,
                (void**)
                &pCOMAdminCat);

if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Applications";

// Attempt to connect to "Applications" in
the Catalog
hr = pCOMAdminCat->GetCollection(bstrTemp,
                                (IDispatch**)
                                &pCatalogCollectionApp);
if (!SUCCEEDED(hr)) goto Error;

// Attempt to load the "Applications"
collection
hr = pCatalogCollectionApp->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionApp-
>get_Count(&lCount);
if (!SUCCEEDED(hr)) goto Error;

// iterate through applications to delete
existing "TPC-C" application (if any)
while (lCount > 0)
{
    hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**)
    &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogObjectApp-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    if (wcsncmp(vTmp.bstrVal, L"TPC-
C"))
    {
        lCount--;
        continue;
    }
    else
    {

```

```

        hr =
pCatalogCollectionApp->Remove(lCount - 1);
        if (!SUCCEEDED(hr))
        goto Error;
    }
}

hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp-
>Add((IDispatch**) &pCatalogObjectApp);
if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process)
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp =
COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components
collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component
installation will work
hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
// app name
bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL

```

```

        bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
        bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll"; // proxy/stub dll

        hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
                bstrTemp2,
                bstrTemp3,
                bstrTemp4);
        if (!SUCCEEDED(hr)) goto Error;

        bstrTemp = "Components";
        hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)
        &pCatalogCollectionCo);
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo->Populate();
        if (!SUCCEEDED(hr)) goto Error;

        hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
        if (!SUCCEEDED(hr)) goto Error;

        // iterate through components in
application and set the properties
        while (lCountCo > 0)
        {
            hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)
            &pCatalogObjectCo);
            if (!SUCCEEDED(hr)) goto Error;

            // used for debugging (view the
name)
            hr = pCatalogObjectCo-
>get_Name(&vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructionEnabled";
            bTmp = TRUE;
            vTmp = bTmp;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

            bstrTemp = "ConstructorString";
            bstrTemp2 = "dummy string (do not
remove)";
            vTmp = bstrTemp2;
            hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
            if (!SUCCEEDED(hr)) goto Error;

```

<pre> bstrTemp = "JustInTimeActivation"; bTmp = TRUE; vTmp = bTmp; hr = pCatalogObjectCo- >put_Value(bstrTemp, vTmp); if (!SUCCEEDED(hr)) goto Error; bstrTemp = "MaxPoolSize"; vTmp.Clear(); // clear variant so it isn't stored as a bool (_variant_t feature) vTmp = (long)30; hr = pCatalogObjectCo- >put_Value(bstrTemp, vTmp); if (!SUCCEEDED(hr)) goto Error; bstrTemp = "ObjectPoolingEnabled"; bTmp = TRUE; vTmp = bTmp; hr = pCatalogObjectCo- >put_Value(bstrTemp, vTmp); if (!SUCCEEDED(hr)) goto Error; // save key to get the InterfacesForComponent collection hr = pCatalogObjectCo- >get_Key(&vKey); if (!SUCCEEDED(hr)) goto Error; bstrTemp = "InterfacesForComponent"; hr = pCatalogCollectionCo- >GetCollection(bstrTemp, vKey, (IDispatch**) &pCatalogCollectionItf); if (!SUCCEEDED(hr)) goto Error; hr = pCatalogCollectionItf- >Populate(); if (!SUCCEEDED(hr)) goto Error; hr = pCatalogCollectionItf- >get_Count(&lCountItf); if (!SUCCEEDED(hr)) goto Error; // iterate through interfaces in component while (lCountItf > 0) { hr = pCatalogCollectionItf->get_Item(lCountItf - 1, (IDispatch**) &pCatalogObjectItf); if (!SUCCEEDED(hr)) goto Error; // save key to get the MethodsForInterface collection </pre>	<pre> >get_Key(&vKey); goto Error; "MethodsForInterface"; bstrTemp = hr = pCatalogCollectionItf->GetCollection(bstrTemp, vKey, (IDispatch**) &pCatalogCollectionMethod); if (!SUCCEEDED(hr)) goto Error; hr = pCatalogCollectionMethod->Populate(); if (!SUCCEEDED(hr)) goto Error; hr = pCatalogCollectionMethod->get_Count(&lCountMethod); if (!SUCCEEDED(hr)) goto Error; // iterate through methods of interface while (lCountMethod > 0) { hr = pCatalogCollectionMethod->get_Item(lCountMethod - 1, (IDispatch**) &pCatalogObjectMethod); if (!SUCCEEDED(hr)) goto Error; bstrTemp = "AutoComplete"; bTmp = TRUE; vTmp = bTmp; hr = pCatalogObjectMethod->put_Value(bstrTemp, vTmp); if (!SUCCEEDED(hr)) goto Error; pCatalogObjectMethod->Release(); pCatalogObjectMethod = NULL; lCountMethod- -; } // save changes hr = pCatalogCollectionMethod->SaveChanges(&lActProp); if (!SUCCEEDED(hr)) goto Error; pCatalogObjectItf- >Release(); </pre>	<pre> pCatalogObjectItf = NULL; lCountItf--; } pCatalogObjectCo->Release(); pCatalogObjectCo = NULL; lCountCo--; } // save changes hr = pCatalogCollectionCo- >SaveChanges(&lActProp); if (!SUCCEEDED(hr)) goto Error; pCatalogCollectionApp->Release(); pCatalogCollectionApp = NULL; pCatalogCollectionCo->Release(); pCatalogCollectionCo = NULL; pCatalogCollectionItf->Release(); pCatalogCollectionItf = NULL; pCatalogCollectionMethod->Release(); pCatalogCollectionMethod = NULL; Error: CoUninitialize(); if (!SUCCEEDED(hr)) { LPTSTR lpBuf; DWORD dwRes = FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER FORMAT_MESSAGE_FROM_SYSTEM, NULL, hr, MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT), (LPTSTR) &lpBuf, 0, NULL); // _tprintf(_T("Error adding components. HRESULT: 0x%x\n%s"), hr, lpBuf); return TRUE; } else </pre>
--	---	---

```
}  
    return FALSE;  
}
```

license.txt

END-USER LICENSE AGREEMENT FOR
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.

--You may not distribute copies of the SOFTWARE PRODUCT to third parties.

--You may not rent, lease or lend the SOFTWARE PRODUCT.

--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.

-- You may not disclose the results of any benchmark tests

using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.

-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS

This EULA is governed by the laws of the State of Washington, U.S.A.

Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write: Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis @ comme tels sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchande ou un usage particulier. Le risque total d'écoulement de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS. Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de bénéfices commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte pécuniaire) résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a, à l'avance, avisé de l'existence de tels dommages. Certains États/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer dans votre pays. La présente Convention est régie par les lois de la province d'Ontario, Canada. Chacune des parties reconnaît irrévocablement la

compétence des tribunaux de la province d'Ontario et consent à instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez vous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou écrire à: Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052 6399.

Methods.h

```

/*      FILE:          METHODS.H
 *
 *      TPC-C Kit Ver. 4.20.000
 *
 *      Microsoft
 *
 *      Copyright
 *      Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *
 *      not yet
 *
 *      audited
 *
 *      PURPOSE:  Header file for COM components.
 *
 *      Change history:
 *      4.20.000 - first version
 */

enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR
Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };
};

```

```

        CCOMPONENT_ERR(COMPONENT_ERROR
Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
        m_SystemErr =
dwSystemErr;
        m_szErrorText = NULL;
    };
~CCOMPONENT_ERR()
{
    if (m_szTextDetail !=
NULL)
        delete []
m_szTextDetail;
    if (m_szErrorText !=
NULL)
        delete []
m_szErrorText;
};

        COMPONENT_ERROR  m_Error;
        char
        *m_szTextDetail;
        char
        *m_szErrorText;
        DWORD
        m_SystemErr;

    int ErrorType() {return
ERR_TYPE_COMPONENT};
    char *ErrorTypeStr() { return
"COMPONENT"; }
    int ErrorNum() {return m_Error};
    char *ErrorText();

static void WriteMessageToEventLog(LPTSTR lpszMsg);

////////////////////////////////////
////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
    public ITPCC,
    public IObjectControl,
    public IObjectConstruct,
    public
CComObjectRootEx<CComSingleThreadModel>
{
public:
    BEGIN_COM_MAP(CTPCC_Common)
        COM_INTERFACE_ENTRY(ITPCC)
        COM_INTERFACE_ENTRY(IObjectControl)
        COM_INTERFACE_ENTRY(IObjectConstruct)
    END_COM_MAP()
};

```

```

CTPCC_Common();
~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IObjectControl
    STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; }
    // we don't support COM Services
    transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /*
nothing to do */ }

// IObjectConstruct
    STDMETHODIMP Construct(IDispatch * pUnk);

private:
    // helper methods
    BOOL m_bCanBePooled;
    CTPCC_BASE *m_pTxn;

    struct COM_DATA
    {
        int retval;
        int error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    };

};

////////////////////////////////////
// CTPCC

```

```

class CTPCC :
    public CTPCC_Common,
    public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
    DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

    BEGIN_COM_MAP(CTPCC)
        //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
    END_COM_MAP()
};

////////////////////////////////////
// CNewOrder
class CNewOrder :
    public CTPCC_Common,
    public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
    DECLARE_REGISTRY_RESOURCEID(IDR_NEWORDER)

    BEGIN_COM_MAP(CNewOrder)
        // COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
    END_COM_MAP()

// ITPCC
public:
    // HRESULT __stdcall NewOrder(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
// COrderStatus
class COrderStatus :
    public CTPCC_Common,
    public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
    DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

```

```

    BEGIN_COM_MAP(COrderStatus)
        // COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
    END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    // HRESULT __stdcall OrderStatus(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
// CPayment
class CPayment :
    public CTPCC_Common,
    public CComCoClass<CPayment,
&CLSID_Payment>
{
public:
    DECLARE_REGISTRY_RESOURCEID(IDR_PAYMENT)

    BEGIN_COM_MAP(CPayment)
        // COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
        COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
        COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
    END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    // HRESULT __stdcall Payment(
    VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

////////////////////////////////////
// CStockLevel

```

```

class CStockLevel :
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
//      COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
      COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
      COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
      HRESULT __stdcall NewOrder(
      VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
      HRESULT __stdcall Payment(
      VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
//      HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
      HRESULT __stdcall OrderStatus(
      VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

mon_client.c

```

/*
 *      mon_client.c
 *
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <stdarg.h>
#include <time.h>
#include <pthread.h>
#include <tpm/mon/mon.h>
#include <utils/trace.h>
#include "../include/delivery.h"
#include "../include/neworder.h"
#include "../include/payment.h"
#include "../include/stocklevel.h"
#include "../include/orderstatus.h"
#include "../include/tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

extern total_tran_count_t *perfClntDataInit();
static void read_mon_environment(void);

static char *cellName;
static int envRetrieval = 0;
static int useSecurity = FALSE;

```

```

static CRITICAL_SECTION  init_lock;
static total_tran_count_t *pClientInfo=NULL; /*
keep stats for the client process */
static num_active_threads = 0;
static int iStatsFrequency = 1;
FILE      *errtpcc;
char      *errFile = "C:/temp/tpcc_encina.out";
enc_status_t enc_status;

#define NewOrder_code      NEWO_TRANS
#define Payment_code      PAYMENT_TRANS
#define OrderStatus_code  ORDER_STAT_TRANS
#define Delivery_code      DELIVERY_TRANS
#define StockLevel_code   STOCK_TRANS

#define INT_ENV_VALUE(var, default) \
      (var = getenv(#var) ? atoi(getenv(#var)) : default)

#define PRE_RPC_WORK(headerP, tran, sub_tran) \
      if (iStatsFrequency > 0) \
          pre_rpc(headerP, tran, sub_tran);
\
      else
          \
              (headerP->stats = 0;
#define POST_RPC_WORK(headerP, tran) \
      if (iStatsFrequency > 0) \
          post_rpc(headerP, tran)

/* CALTPCC
 * Macro to sends 1 RPC and then handles any errors.
 *
 * The macro takes the name of the RPC (e.g.,
NewOrder)
 * and makes the RPC by calling the appropriate
function
 * (e.g., impTPCCNewOrder).
 */
#define
CALLTPCC(name,length,dataP,header,trpcStatusP)
\
{
\
UTIL_CONCAT(impTPCC,name)(length,dataP,&header,trpcSt
atusP);
\
      if (*(trpcStatusP)) {
\
          char msg[100];
\
          sprintf(msg, "TRPC error during impTPCC%s",
UTIL_STRING(name)); \
          header.returncode = TRPC_ERROR;
\
          encina_error_message(msg, *(trpcStatusP));
\
      } else if ((header.returncode != TPCC_SUCCESS) &&
\
          (header.returncode != INVALID_NEWO)) {
\

```

```

      char msg[100];
\
      sprintf(msg, "App error during impTPCC%s: ",
UTIL_STRING(name)); \
          encina_error_message(msg, header.returncode);
\
      }
\
}
\
}

/*
 * pre_rpc -- For debug purposes
 *
 * Called before an RPC is made.
 * Set the state of the thread and keep track of the
time the RPC is sent.
 * This is used by the Background thread to report
the state of the client.
 */
static void pre_rpc(data_header *headerP,
      int tran_type,
      int sub_tran_type)
{
      if (iStatsFrequency < 1) {
          headerP->stats = 0;
      } else {
          int num;
          num = ++ (pClientInfo->tran[tran_type].num);
          headerP->stats = (num % iStatsFrequency==0) ?
1 : 0;
          if (headerP->stats)
              { /* measure the time for RT */
                  get_local_time(&headerP->clnt_start);
                  headerP->srv_start.sec = 0; /*
initialize the server time */
                  headerP->srv_start.usec = 0;
                  headerP->srv_end.sec = 0;
                  headerP->srv_end.usec = 0;
              }
      }
}

/*
 * post_rpc
 *
 * Called when the RPC returns from the server
 *
 * Keeps track of the client response time and the
server response time
 * as well as the state of the thread. This is used
by the background
 * debug thread to report the state of the client
 */
static void post_rpc(data_header *headerP,
      int tran_type)
{
      double time_diff;
      int tran_failed;
      struct timeval start_time, end_time;

```

```

    if (headerP->stats)
        get_local_time(&headerP-
>clnt_end);
    else
        return;

    /* Store the info for each client.
    * Note: Since we don't use mutex for performance
    reason, pClientInfo
    * may not be accurate if more than one
    thread work on the same
    * data at a same time. But this should
    give us reasonable info.
    */
    if ((headerP->returncode == TPCC_SUCCESS) ||
        (headerP->returncode == INVALID_NEWO)) {
        tran_failed = 0;
    } else {
        pClientInfo->tran[tran_type].errs ++;
        pClientInfo->errors ++;
        tran_failed = 1;
    }
    if (headerP->stats && tran_type <= MAX_TRAN_TYPE
    && tran_type > 0
        && !tran_failed) {
        /* update total server round trip response
    time */
        start_time.tv_sec = headerP-
>srv_start.sec;
        start_time.tv_usec = headerP-
>srv_start.usec;
        end_time.tv_sec = headerP->srv_end.sec;
        end_time.tv_usec = headerP->srv_end.usec;
        time_diff = time_diff_ms(&end_time,
    &start_time);
        pClientInfo->tran[tran_type].RTtotal[1] +=
    time_diff;
        DPRINT(("srv start_time %d.%d, end_time
    %d.%d, time_diff %f\n",
        start_time.tv_sec,
        start_time.tv_usec,
        end_time.tv_sec,
        end_time.tv_usec,
        time_diff));

        /* update total client round trip response
    time */
        start_time.tv_sec = headerP-
>clnt_start.sec;
        start_time.tv_usec = headerP-
>clnt_start.usec;
        end_time.tv_sec = headerP->clnt_end.sec;
        end_time.tv_usec = headerP-
>clnt_end.usec;
        time_diff = time_diff_ms(&end_time,
    &start_time);
        pClientInfo->tran[tran_type].RTtotal[0] +=
    time_diff;
        DPRINT(("clnt start_time %d.%d, end_time
    %d.%d, time_diff %f\n",

```

```

        start_time.tv_sec,
        start_time.tv_usec,
        end_time.tv_sec,
        end_time.tv_usec,
        time_diff));

        /* update num for the number of trans
    which have RT measured */
        pClientInfo->tran[tran_type].RTcount ++;
    }
}

/*
* The following send_*** functions are called from
CTPCC_ENCINA class.
*/

/*
* send_new_order
* Send a new order request to the server
*/
int send_new_order(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, NEWO_TRANS, 0);

    CALLTPCC(NewOrder,length,dataP,header,&trpcStatus)
    POST_RPC_WORK(&header, NEWO_TRANS);
    if (header.returncode == INVALID_NEWO)
        return TPCC_SUCCESS;
    else
        return header.returncode;
}

/*
* send_payment
* Send a payment request to the server
*/
int send_payment(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, PAYMENT_TRANS, 0);

    CALLTPCC(Payment,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, PAYMENT_TRANS);
    return header.returncode;
}

/*
* send_order_status
* Send a order status request to the server
*/
int send_order_status(long length, unsigned char
*dataP)
{

```

```

    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, ORDER_STAT_TRANS, 0);

    CALLTPCC(OrderStatus,length,dataP,header,&trpcStatus)
    ;
    POST_RPC_WORK(&header, ORDER_STAT_TRANS);
    return header.returncode;
}

/*
* send_delivery
* Send a delivery request to the server
*/
int send_delivery(long length, unsigned char *dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, DELIVERY_TRANS, 0);

    CALLTPCC(Delivery,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, DELIVERY_TRANS);
    return header.returncode;
}

/*
* send_stock_level
* Send a stock level request to the server
*/
int send_stock_level(long length, unsigned char
*dataP)
{
    trpc_status_t trpcStatus;
    data_header header;

    PRE_RPC_WORK(&header, STOCK_TRANS, 0);

    CALLTPCC(StockLevel,length,dataP,header,&trpcStatus);
    POST_RPC_WORK(&header, STOCK_TRANS);
    return header.returncode;
}

/*
* Enroll the client:
* get the necessary handles.
* This function should be called only once. Use
static var client_enrolled to control it.
*/
void enroll_client()
{
    static char *clientName="tpcc_client";
    unsigned long status ;
    static int client_enrolled = 0;
    unsigned32 client_authnLevel;
    unsigned32 client_authzSvc;
    time_type a_time;
    char err_msg[100];

```

```

MUTEX_INIT(&init_lock);
get_local_time(&a_time);
srand(a_time.sec ^ a_time.usec);

MUTEX_LOCK(&init_lock);
if (client_enrolled) {
    MUTEX_UNLOCK(&init_lock);
    return;
}

/* open output file for tracing */
errtpcc = fopen(errFile, "w");
if (!errtpcc)
{
    sprintf(err_msg, "Cannot open
file %s", errFile);
    CHK_STATUS(1,
    ERRROUT_FILE_NOT_FOUND, err_msg);
}

get_time_init();
// initialize the space for perfmon
pClientInfo = perfClntDataInit();
if (pClientInfo == NULL) // in case something
wrong
    pClientInfo =
    malloc(sizeof(total_tran_count_t));
memset(pClientInfo, 0,
sizeof(total_tran_count_t));

read_mon_environment();

if (!cellName)
    CHK_STATUS(30, CELL_NAME_UNAVAILABLE,
    "ENCINA_TPM_CELL is not set!");

if (useSecurity) {
    client_authnLevel =
rpc_c_protect_level_connect;
    client_authzSvc =
rpc_c_authz_dce;
} else {
    client_authnLevel =
rpc_c_protect_level_none;
    client_authzSvc =
rpc_c_authz_none;
}

if (envRetrieval == 0) {
ENCINA_CALL_RC("mon_RetrieveEnable", mon_RetrieveEnabl
e(FALSE), status);
    CHK_STATUS(status, MON_RETRIEVEENABLE_FAILED,
    "mon_RetrieveEnable failed");
}

err_printf("enroll_client: calling mon_InitClient
\n");

```

```

ENCINA_CALL_RC("mon_InitClient", mon_InitClient(client
Name, cellName), status);
    CHK_STATUS(status, MON_INITCLIENT_FAILED,
    "mon_InitClient failed");

DPRINT(("mon_SecuritySetDefaults-> authn %d,
authz %d\n",
    client_authnLevel, client_authzSvc));
ENCINA_CALL_RC("mon_SecuritySetDefaults",
    mon_SecuritySetDefaults(client_authnLevel, c
lient_authzSvc),
    status);
    CHK_STATUS(status, MON_SECURITYSET_FAILED,
    "mon_SecuritySetDefaults failed");

ENCINA_CALL_RC("mon_SetHandleCacheRefreshInterval",
    mon_SetHandleCacheRefreshInterval(300),
status);
    CHK_STATUS(status, MON_SETREFRESHINTERVAL_FAILED,
    "mon_SetHandleCacheRefreshInterval
failed");

{
    dbInfo_data_t data;
    trpc_status_t trpcStatus;
    /* Get DB Info -- currently id does not do
anything
but it will tell us if there is a server
out there.
Better to know instead of when all the
terminals
are up and ready
*/
    impTPCCNOInfo(&data, &trpcStatus);
    if (trpcStatus) {
        char msg[100];
        sprintf(msg, "TRPC error during db info
at init.");
        encina_error_message(msg, trpcStatus);
        CHK_STATUS(33, NOINFO_TRPC_ERROR,
        "TRPC error during db info at
init");
    }
}

client_enrolled = 1;
MUTEX_UNLOCK(&init_lock);
err_printf("end of enroll_client\n");
}

/*-----*/
/* Read environment paramaters and registry
entries */
/*-----*/

```

```

static void read_mon_environment()
{
    char *env_str;
    char *registryKey =
"SOFTWARE\\TransarcCorporation\\TxTpc";
    HKEY hKey;
    DWORD size;
    DWORD type;
    char szTmp[256];

    cellName = getenv("ENCINA_TPM_CELL");
    CHECK_ENVIRON(cellName, "ENCINA_TPM_CELL");

    if (env_str = getenv("TPCC_ENV_RETRIEVE")) {
        envRetrieval = atoi(env_str);
    }

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
registryKey, 0, KEY_READ, &hKey) != ERROR_SUCCESS )
        return;

    size = sizeof(szTmp);
    if ( RegQueryValueEx(hKey, "StatsFrequency", 0,
&type, szTmp, &size) == ERROR_SUCCESS)
        iStatsFrequency = atoi(szTmp);

    RegCloseKey(hKey);
}

```

mon_client.h

```

/*
 * mon_client.h
 */

#ifndef MON_CLIENT_H
#define MON_CLIENT_H

#define MUTEX_T CRITICAL_SECTION
#define MUTEX_LOCK(a) EnterCriticalSection(a)
#define MUTEX_UNLOCK(a) LeaveCriticalSection(a)
#define MUTEX_INIT(mut)
InitializeCriticalSection(mut)
#define MUTEX_DESTROY(mut) DeleteCriticalSection(mut)
#define ERRROUT errtpcc

/*initialization status */
#define INIT_SUCCESS 0
#define INIT_FAILED 1
#define CELL_NAME_UNAVAILABLE 2
#define MON_RETRIEVEENABLE_FAILED 3
#define MON_INITCLIENT_FAILED 4
#define MON_SECURITYSET_FAILED 5
#define MON_SETREFRESHINTERVAL_FAILED 6
#define NOINFO_TRPC_ERROR 7
#define ENROLL_CLIENT_EXCEPTION 8
#define ERRROUT_FILE_NOT_FOUND 9
#define LOG_FILE_NOT_FOUND 10
#define TPCC_KEY_NOT_FOUND 11

```



```

#define TERM_ALLOC_FAILED 12

/*
 * Routines and declarations that are common to all
 * clients
 */
#if defined(__cplusplus)
extern "C" {
#endif
int send_new_order(long, unsigned char *);
int send_payment(long, unsigned char *);
int send_order_status(long, unsigned char *);
int send_delivery(long, unsigned char *);
int send_stock_level(long, unsigned char *);
void enroll_client();
#if defined(__cplusplus)
}
#endif
#endif /* MON_CLIENT_H */

```

neworder.h

```

#ifndef TRANSARC_neworder_h
#define TRANSARC_neworder_h

#include <trpc/trpc.h>
#include "neworder.h"

#include <encina/c_prologue.h>

#if defined(BUILDDLL)
#define DLLEXPORT __declspec( dlllexport )
#else
#define DLLEXPORT extern
#endif

#ifndef ENCINA_STUB_CALLING
#define ENCINA_STUB_CALLING ENCINA_RPC_CALLING
#endif

#define neworder_v1_0_c_ifspec
  _neworder_v1_0_c_ifspec
#define neworder_v1_0_s_ifspec
  _neworder_v1_0_s_ifspec

typedef struct neworder_v1_0_epv {
void (ENCINA_STUB_CALLING *impTPCCNewOrder) (
#ifdef IDL_PROTOTYPES

        idl_long_int length,
        idl_char *dataP,
        data_header *headerP,
        trpc_status_t *trpcStatus
#endif
);

void (ENCINA_STUB_CALLING *impTPCCNOInfo) (
#ifdef IDL_PROTOTYPES

```

```

        dbInfo_data_t *dataP,
        trpc_status_t *trpcStatus
#endif
);
} neworder_v1_0_epv_t;

DLLEXPORT void ENCINA_STUB_CALLING impTPCCNewOrder (
#ifdef IDL_PROTOTYPES

        idl_long_int length,
        idl_char *dataP,
        data_header *headerP,
        trpc_status_t *trpcStatus
#endif
);

DLLEXPORT void ENCINA_STUB_CALLING impTPCCNOInfo (
#ifdef IDL_PROTOTYPES

        dbInfo_data_t *dataP,
        trpc_status_t *trpcStatus
#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
        mon_handle_t          handle,
        trpc_tranInfo_t      *tranInfoP,
        trpc_ifSpec_t        *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
        mon_handle_t          handle,
        trpc_handle_t        trpcHandle,
        trpc_tranInfo_t      *tranInfoP,
        trpc_ifSpec_t        *ifSpecP
#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
        mon_handle_t          handle,
        trpc_tranInfo_t      *tranInfoP,
        trpc_ifSpec_t        *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
        mon_handle_t          handle,
        trpc_handle_t        trpcHandle,
        trpc_tranInfo_t      *tranInfoP,
        trpc_ifSpec_t        *ifSpecP
#endif
);

```

```

extern neworder_v1_0_epv_t
  neworder_v1_0_client_epv;
extern _neworder_v1_0_epv_t
  neworder_v1_0_manager_epv;
extern rpc_mgr_epv_t
  neworder_v1_0_mgr_epv;

#include <encina/c_epilogue.h>
#endif /* TRANSARC_neworder_h */

```

orderstatus.h

```

#ifndef TRANSARC_orderstatus_h
#define TRANSARC_orderstatus_h

#include <trpc/trpc.h>
#include "orderstatus.h"

#include <encina/c_prologue.h>

#if defined(BUILDDLL)
#define DLLEXPORT __declspec( dlllexport )
#else
#define DLLEXPORT extern
#endif

#ifndef ENCINA_STUB_CALLING
#define ENCINA_STUB_CALLING ENCINA_RPC_CALLING
#endif

#define orderstatus_v1_0_c_ifspec
  _orderstatus_v1_0_c_ifspec
#define orderstatus_v1_0_s_ifspec
  _orderstatus_v1_0_s_ifspec

typedef struct orderstatus_v1_0_epv {
void (ENCINA_STUB_CALLING *impTPCCOrderStatus) (
#ifdef IDL_PROTOTYPES

        idl_long_int length,
        idl_char *dataP,
        data_header *headerP,
        trpc_status_t *trpcStatus
#endif
);
} orderstatus_v1_0_epv_t;

DLLEXPORT void ENCINA_STUB_CALLING impTPCCOrderStatus (
#ifdef IDL_PROTOTYPES

        idl_long_int length,
        idl_char *dataP,
        data_header *headerP,
        trpc_status_t *trpcStatus
#endif
);

```

```

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_handle_t     trpcHandle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_handle_t     trpcHandle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

extern orderstatus_v1_0_epv_t
orderstatus_v1_0_client_epv;
extern _orderstatus_v1_0_epv_t
orderstatus_v1_0_manager_epv;
extern rpc_mgr_epv_t
orderstatus_v1_0_mgr_epv;

#include <encina/c_epilogue.h>
#endif /* TRANSARC_orderstatus_h */

```

payment.h

```

#ifdef TRANSARC_payment_h
#define TRANSARC_payment_h

#include <trpc/trpc.h>
#include "payment.h"

#include <encina/c_prologue.h>

#if defined(BUILDDLL)
#define DLLEXPORT __declspec( dllexport )
#else
#define DLLEXPORT extern

```

```

#endif

#ifdef ENCINA_STUB_CALLING
#define ENCINA_STUB_CALLING ENCINA_RPC_CALLING
#endif

#define payment_v1_0_c_ifspec _payment_v1_0_c_ifspec
#define payment_v1_0_s_ifspec _payment_v1_0_s_ifspec

typedef struct payment_v1_0_epv {
void (ENCINA_STUB_CALLING *impTPCCPayment) (
#ifdef IDL_PROTOTYPES
    idl_long_int length,
    idl_char *dataP,
    data_header *headerP,
    trpc_status_t *trpcStatus
#endif
);
} payment_v1_0_epv_t;

DLLEXPORT void ENCINA_STUB_CALLING impTPCCPayment (
#ifdef IDL_PROTOTYPES
    idl_long_int length,
    idl_char *dataP,
    data_header *headerP,
    trpc_status_t *trpcStatus
#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_handle_t     trpcHandle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

trpc_handle_t          ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
    mon_handle_t      handle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

void          ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES

```

```

    mon_handle_t      handle,
    trpc_handle_t     trpcHandle,
    trpc_tranInfo_t   *tranInfoP,
    trpc_ifSpec_t     *ifSpecP
#endif
);

extern payment_v1_0_epv_t
payment_v1_0_client_epv;
extern _payment_v1_0_epv_t
payment_v1_0_manager_epv;
extern rpc_mgr_epv_t
payment_v1_0_mgr_epv;

#include <encina/c_epilogue.h>
#endif /* TRANSARC_payment_h */

```

ReadRegistry.cpp

```

/* FILE: READREGISTRY.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * not yet
 * audited
 * PURPOSE: Implementation for TPC-C Tuxedo
 * class. Contact: Charles Levine
 * (clevine@microsoft.com)
 * Change history:
 * 4.20.000 - first version
 */

/* FUNCTION: ReadTPCCRegistrySettings
 *
 * PURPOSE: This function reads the NT
 * registry for startup parameters. There parameters are
 * under the TPCC key.
 *
 * RETURNS FALSE = no errors
 * TRUE = error reading
 * registry
 */
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

```

```

        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\\Microsoft\\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
            return TRUE;

        // determine database protocol to use; may
be either ODBC or DBLIB
        pReg->eDB_Protocol = Unspecified;
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp,
szDBNames[ODBC]) )
                pReg->eDB_Protocol =
ODBC;
            else if ( !strcmp(szTmp,
szDBNames[DBLIB]) )
                pReg->eDB_Protocol =
DBLIB;
        }

        pReg->eTxnMon = None;
        // determine txn monitor to use; may be
either TUXEDO, or blank
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp,
szTxnMonNames[TUXEDO]) )
                pReg->eTxnMon = TUXEDO;
            else if ( !strcmp(szTmp,
szTxnMonNames[ENCINA]) )
                pReg->eTxnMon = ENCINA;
            else if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
                pReg->eTxnMon = COM;
        }

        pReg->bCOM_SinglePool = FALSE;
        size = sizeof(szTmp);
        if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
        {
            if ( !strcmp(szTmp, "YES") )
                pReg->bCOM_SinglePool =
TRUE;
        }

        pReg->dwMaxConnections = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxConnections = dwTmp;

        pReg->dwMaxPendingDeliveries = 0;
        size = sizeof(dwTmp);

```

```

        if ( ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwMaxPendingDeliveries =
dwTmp;

        pReg->dwNumberOfDeliveryThreads = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"NumberOfDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwNumberOfDeliveryThreads =
dwTmp;

        size = sizeof( pReg->szPath );
        if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
            pReg->szPath[0] = 0;

        size = sizeof( pReg->szDbServer );
        if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )
            pReg->szDbServer[0] = 0;

        size = sizeof( pReg->szDbName );
        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) !=
ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) !=
ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) !=
ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueEx(hKey, "SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) !=
ERROR_SUCCESS )
            pReg->szSPPrefix[0] = L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;

```

```

        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->bCallNoDuplicatesNewOrder =
dwTmp;

        RegCloseKey(hKey);

        return FALSE;
}

```

ReadRegistry.h

```

/* FILE: ReadRegistry.h
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 * not audited
 * PURPOSE: Header for registry related code.
 * Change history:
 * 4.20.000 - first version
 */

enum DBPROTOCOL { Unspecified, ODBC, DBLIB };
const char *szDBNames[] = { "Unspecified", "ODBC",
"DBLIB" };

enum TXNMON { None, TUXEDO, ENCINA, COM };
const char *szTxnMonNames[] = { "NONE", "TUXEDO",
"ENCINA", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbServer[32];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odbc.dll stored procedures prefix
    DWORD dwConnectDelay; // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder; //
whether to check for non-duplicate item ids and call
a different New Order SP

```

```

} TPCCREGISTRYDATA, *PTPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TPCCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108
#define IDR_LICENSE1 112
#define IDD_DIALOG4 113
#define IDR_TPCCOBJ1 117
#define IDR_TPCCSTUB1 118
#define IDR_DBLIB_DLL 122
#define IDR_ODBC_DLL 123
#define IDR_TUXEDO_APP 124
#define IDR_TUXEDO_DLL 125
#define IDR_COM_DLL 126
#define IDR_COMPS_DLL 127
#define IDR_COMALL_DLL 128
#define IDR_COMTYPLIB_DLL 129
#define IDR_MSVCRT701 130
#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_MAXDELIVERIES 1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_DBLIB 1021
#define IDC_LICENSE 1022
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_DB_SERVER 1023
#define ED_USER_CONNECT_DELAY_TIME 1024
#define ED_DB_USER_ID 1024
#define IDC_MTS 1025
#define IDC_TM_MTS 1025
#define IDC_TM_TUXEDO 1026
#define IDC_TM_NONE 1027
#define ED_DB_PASSWORD 1028
#define ED_DB_NAME 1029

```

```

#define IDC_TM_ENCINA 1030

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 131
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1031
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

stocklevel.h

```

#ifndef TRANSARC_stocklevel_h
#define TRANSARC_stocklevel_h

#include <trpc/trpc.h>
#include "_stocklevel.h"

#include <encina/c_prologue.h>

#if defined(BUILDDLL)
#define DLLEXPORT __declspec( dlllexport )
#else
#define DLLEXPORT extern
#endif

#ifndef ENCINA_STUB_CALLING
#define ENCINA_STUB_CALLING ENCINA_RPC_CALLING
#endif

#define stocklevel_v1_0_c_ifspec
#define stocklevel_v1_0_s_ifspec
#define stocklevel_v1_0_c_ifspec
#define stocklevel_v1_0_s_ifspec

typedef struct stocklevel_v1_0_epv {
void (ENCINA_STUB_CALLING *impTPCCstockLevel) (
#ifdef IDL_PROTOTYPES

idl_long_int length,
idl_char *dataP,
data_header *headerP,
trpc_status_t *trpcStatus

#endif
);
} stocklevel_v1_0_epv_t;

DLLEXPORT void ENCINA_STUB_CALLING impTPCCstockLevel
(
#ifdef IDL_PROTOTYPES

idl_long_int length,
idl_char *dataP,
data_header *headerP,
trpc_status_t *trpcStatus

#endif
);

```

```

);

trpc_handle_t ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
mon_handle_t handle,
trpc_tranInfo_t *tranInfoP,
trpc_ifSpec_t *ifSpecP
#endif
);

void ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
mon_handle_t handle,
trpc_handle_t trpcHandle,
trpc_tranInfo_t *tranInfoP,
trpc_ifSpec_t *ifSpecP
#endif
);

trpc_handle_t ENCINA_CALLING
mon_handle_t_tranBind(
#ifdef IDL_PROTOTYPES
mon_handle_t handle,
trpc_tranInfo_t *tranInfoP,
trpc_ifSpec_t *ifSpecP
#endif
);

void ENCINA_CALLING mon_handle_t_tranUnBind(
#ifdef IDL_PROTOTYPES
mon_handle_t handle,
trpc_handle_t trpcHandle,
trpc_tranInfo_t *tranInfoP,
trpc_ifSpec_t *ifSpecP
#endif
);

extern stocklevel_v1_0_epv_t
stocklevel_v1_0_client_epv;
extern _stocklevel_v1_0_epv_t
stocklevel_v1_0_manager_epv;
extern rpc_mgr_epv_t
stocklevel_v1_0_mgr_epv;

#include <encina/c_epilogue.h>
#endif /* TRANSARC_stocklevel_h */

```

tpcc.cpp

```

/* FILE: TPCC.C
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

*
* PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - reworked error
handling; added options for COM and Encina txn
monitors
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"

#include "..\..\common\txnlog\include\rtetime.h"
#include "..\..\common\txnlog\include\spinlock.h"
#include "..\..\common\txnlog\include\txnlog.h"

// Database layer includes
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"
// DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "..\..\tm_com_dll\src\tpcc_com.h"
// COM Services implementation on
TPC-C txns
#include "..\..\tm_tuxedo_dll\src\tpcc_tux.h"
// interface to Tuxedo libraries
#include "..\..\tm_encina_dll\src\tpcc_enc.h"
// interface to Encina libraries

#include "httpext.h"
//ISAPI DLL information header

```

```

#include "tpcc.h"
//this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING 256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM 0
#define INPUT_FORM 1

char
szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

//Terminal client id structure
TERM Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.
// The RTE must be synchronized with the interface
level on login, otherwise the login
// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static CRITICAL_SECTION
TermCriticalSection;

static HINSTANCE hLibInstanceTm = NULL;
static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;
TYPE_CTPCC_TUXEDO *pCTPCC_TUXEDO_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_new;
TYPE_CTPCC_ENCINA *pCTPCC_ENCINA_post_init;
TYPE_CTPCC_COM *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
*txnDelilog = NULL;
//used to log delivery transaction
information

HANDLE hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE hDoneEvent =
INVALID_HANDLE_VALUE;
HANDLE *pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

```

```

DWORD
dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
//critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;

DWORD
dwDelBuffSize = 100;
// size of circular buffer for delivery

txns
DWORD
dwDelBuffFreeCount;
// number of buffers free

DWORD
dwDelBuffBusyIndex = 0;
// index position of entry waiting to be delivered
DWORD
dwDelBuffFreeIndex = 0;
// index position of unused entry

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: DllMain
*
* PURPOSE: This function is the entry point
for the DLL. This implementation is based on the
* fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS: HANDLE hModule
module handle
DWORD
ul_reason_for_call reason for call
LPCVOID
lpReserved
reserved for future use
*
* RETURNS: BOOL FALSE
errors occurred in
initialization
*
TRUE DLL
successfully initialized
*/

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPCVOID lpReserved)
{
DWORD i;
char szEvent[LEN_ERR_STRING] = "\0";
char szLogFile[128];
char szDllName[128];

// debugging...

```

```

// DebugBreak();
try
{
    switch( ul_reason_for_call )
    {
        case
            DLL_PROCESS_ATTACH:
                {
                    DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
                    GetComputerName(szMyComputerName, &dwSize);
                    szMyComputerName[dwSize] = 0;
                }

                DisableThreadLibraryCalls((HMODULE)hModule);

                InitializeCriticalSection(&TermCriticalSection);

                if (
                    ReadTPCCRegistrySettings( &Reg ) )
                    throw new CWBCLNT_ERR(
                        ERR_MISSING_REGISTRY_ENTRIES );

                dwDelBuffSize
                = min( Reg.dwMaxPendingDeliveries, 10000 ); // min
                with 10000 as a sanity constraint

                dwNumDeliveryThreads = min(
                    Reg.dwNumberOfDeliveryThreads, 100 ); // min with
                100 as a sanity constraint

                TermInit();

                // load DLL
                for txn monitor
                if
                (Reg.eTxnMon == TUXEDO)
                {
                    strcpy( szDllName, Reg.szPath );
                    strcat( szDllName, "tpcc_tuxedo.dll");
                    hLibInstanceTm = LoadLibrary( szDllName );
                    if
                    (hLibInstanceTm == NULL)
                    throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
                        szDllName, GetLastError() );

                    //
                    get function pointer to wrapper for class constructor
                }
    }
}

```

```

        pCTPCC_TUXEDO_new = (TYPE_CTPCC_TUXEDO*)
        GetProcAddress(hLibInstanceTm,"CTPCC_TUXEDO_new");
        if
        (pCTPCC_TUXEDO_new == NULL)
            throw new CWBCLNT_ERR(
                ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
            else if
            (Reg.eTxnMon == ENCINA)
                {
                    strcpy( szDllName, Reg.szPath );
                    strcat( szDllName, "tpcc_encina.dll");
                    hLibInstanceTm = LoadLibrary( szDllName );
                    if
                    (hLibInstanceTm == NULL)
                        throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
                            szDllName, GetLastError() );

                        //
                        get function pointer to wrapper for class constructor

                        pCTPCC_ENCINA_new = (TYPE_CTPCC_ENCINA*)
                        GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_new");

                        pCTPCC_ENCINA_post_init =
                        (TYPE_CTPCC_ENCINA*)
                        GetProcAddress(hLibInstanceTm,"CTPCC_ENCINA_post_init
                        ");
                        if
                        (pCTPCC_ENCINA_new == NULL)
                            throw new CWBCLNT_ERR(
                                ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                                else if
                                (Reg.eTxnMon == COM)
                                    {
                                        strcpy( szDllName, Reg.szPath );
                                        strcat( szDllName, "tpcc_com.dll");
                                        hLibInstanceTm = LoadLibrary( szDllName );
                                        if
                                        (hLibInstanceTm == NULL)
                                            throw new CWBCLNT_ERR( ERR_LOADDLL_FAILED,
                                                szDllName, GetLastError() );

                                                //
                                                get function pointer to wrapper for class constructor

                                                pCTPCC_COM_new = (TYPE_CTPCC_COM*)
                                                GetProcAddress(hLibInstanceTm,"CTPCC_COM_new");
                                                if
                                                (pCTPCC_COM_new == NULL)

```

```

            throw new CWBCLNT_ERR(
                ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                }
                // load DLL
                for database connection
                if
                ((Reg.eTxnMon == None) || (dwNumDeliveryThreads > 0))
                    {
                        if
                        (Reg.eDB_Protocol == DBLIB)
                            {
                                strcpy( szDllName, Reg.szPath );
                                strcat( szDllName, "tpcc_dblib.dll");
                                hLibInstanceDb = LoadLibrary( szDllName );
                                if (hLibInstanceDb == NULL)
                                    throw new CWBCLNT_ERR(
                                        ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                                        // get function pointer to wrapper for
                                        class constructor

                                        pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
                                        GetProcAddress(hLibInstanceDb,"CTPCC_DBLIB_new");

                                        if (pCTPCC_DBLIB_new == NULL)
                                            throw new CWBCLNT_ERR(
                                                ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
                                                }
                                                else if (Reg.eDB_Protocol == ODBC)
                                                    {
                                                        strcpy( szDllName, Reg.szPath );
                                                        strcat( szDllName, "tpcc_odbc.dll");
                                                        hLibInstanceDb = LoadLibrary( szDllName );
                                                        if (hLibInstanceDb == NULL)
                                                            throw new CWBCLNT_ERR(
                                                                ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                                                                // get function pointer to wrapper for
                                                                class constructor

                                                                pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
                                                                GetProcAddress(hLibInstanceDb,"CTPCC_ODBC_new");
                                                                if (pCTPCC_ODBC_new == NULL)

```

```

        throw new CWBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
    }
}
    if
(dwNumDeliveryThreads)
    {
        Initialize delivery delay critical section //
        //
        InitializeCriticalSection(&hConnectCritical
Section);
        //
for deferred delivery txns:
        hDoneEvent = CreateEvent( NULL, TRUE /*
manual reset */, FALSE /* initially not signalled */,
NULL );
        InitializeCriticalSection(&DelBuffCriticalS
ection);
        hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
        dwDelBuffFreeCount = dwDelBuffSize;
        InitJulianTime(NULL);
        //
create unique log file name based on delilog-yyymmdd-
hhmm.log
        SYSTEMTIME Time;
        GetLocalTime( &Time );
        wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d%2.2d-%2.2d%2.2d-%2.2ds%2.2dms.log",
Reg.szPath, Time.wYear % 100, Time.wMonth,
Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
Time.wMilliseconds );
        txnDelilog = new CTxnLog(szLogFile,
TXN_LOG_WRITE);
        //write event into txn log for START
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName));

```

```

//
allocate structures for delivery buffers and thread
mgmt
        pDeliHandles = new
HANDLE[dwNumDeliveryThreads];
        pDelBuff = new
DELIVERY_TRANSACTION(dwDelBuffSize);
        //
launch DeliveryWorkerThread to perform actual
delivery txns
        for(i=0; i<dwNumDeliveryThreads; i++)
        {
            pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );
            if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
                throw new CWBCLNT_ERR(
ERR_DELIVERY_THREAD_FAILED );
        }
        break;
        case
DLL_PROCESS_DETACH:
            if
(dwNumDeliveryThreads)
            {
                if
(txnDelilog != NULL)
                {
                    //write event into txn log for STOP
                    txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));
                    // This will do a clean shutdown of the
delivery log file
                    CTxnLog *txnDelilogLocal = txnDelilog;
                    txnDelilog= NULL;
                    delete txnDelilogLocal;
                }
            }
            delete [] pDeliHandles;
            delete [] pDelBuff;

```

```

        CloseHandle( hWorkerSemaphore );
        CloseHandle( hDoneEvent );
        DeleteCriticalSection(&DelBuffCriticalSecti
on);
        //
Delete delivery delay critical section //
        //
        DeleteCriticalSection(&hConnectCriticalSect
ion);
        //
        DeleteCriticalSection(&TermCriticalSection)
;
        if
(hLibInstanceTm != NULL)
            FreeLibrary( hLibInstanceTm );
            hLibInstanceTm = NULL;
        if
(hLibInstanceDb != NULL)
            FreeLibrary( hLibInstanceDb );
            hLibInstanceDb = NULL;
            Sleep(500);
            break;
        default:
            /* nothing
*/;
    }
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _sntprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load.));
    TerminateExtension(0);

```

```

        return FALSE;
    }
    return TRUE;
}

/* FUNCTION: GetExtensionVersion
 *
 * PURPOSE: This function is called by the
inet service when the DLL is first loaded.
 *
 * ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
 *
 * RETURNS: TRUE inet service
expected return value.
 */

BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
    pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpyn(pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN);

    // TODO: why do we need this here instead
of in the DLL attach?
    if (Reg.eTxnMon == ENCINA)
        pCTPCC_ENCINA_post_init();

    return TRUE;
}

/* FUNCTION: TerminateExtension
 *
 * PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.
 *
 * Release all resources
in anticipation of being unloaded.
 *
 * RETURNS: TRUE inet service
expected return value.
 */

BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

```

```

/* FUNCTION: HttpExtensionProc
 *
 * PURPOSE: This function is the main entry
point for the TPCC DLL. The internet service
 *
 * calls this function
passing in the http string.
 *
 * ARGUMENTS: EXTENSION_CONTROL_BLOCK
*pECB structure pointer to passed in
internet
 *
 * service information.
 *
 * RETURNS: DWORD
HSE_STATUS_SUCCESS
connection can be dropped if
error
 *
 * HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
 *
 * COMMENTS: None
 */

DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int iCmd, FormId,
TermId, iSyncId;
    char szBuffer[4096];

    int lpbSize;
    static char szHeader[] = "200 Ok";
    DWORD dwSize = 6;
    // initial value is strlen(szHeader)
    char szHeader1[4096];

#ifdef ICECAP
    StartCAP();
#endif

    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if ( TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )
            {
                //
                debugging...
            }
        }
    }
}

```

```

char
szTmp[128];
    wsprintf(
szTmp, "Invalid term ID; TermId = %d", TermId );
    WriteMessageToEventLog( szTmp );

    throw new
CWEBCLNT_ERR( ERR_INVALID_TERMID );
    //must have a valid
syncid here since termid is valid
    if (iSyncId !=
Term.pClientData[TermId].iSyncId)
        throw new
CWEBCLNT_ERR( ERR_INVALID_SYNC_CONNECTION );
    //set use time
    Term.pClientData[TermId].iTickCount =
GetTickCount();
}

switch(iCmd)
{
    case 0:
        WelcomeForm(pECB,
szBuffer);
        break;
    case 1:
        switch( FormId )
        {
            case
WELCOME_FORM:
            case
MAIN_MENU_FORM:
                break;
            case
NEW_ORDER_FORM:
                ProcessNewOrderForm(pECB, TermId,
szBuffer);
                break;
            case
PAYMENT_FORM:
                ProcessPaymentForm(pECB, TermId, szBuffer);
                break;
            case
DELIVERY_FORM:
                ProcessDeliveryForm(pECB, TermId,
szBuffer);
                break;
        }
}

```



```

                                case
ORDER_STATUS_FORM:
    ProcessOrderStatusForm(pECB, TermId,
szBuffer);
    break;
                                case
STOCK_LEVEL_FORM:
    ProcessStockLevelForm(pECB, TermId,
szBuffer);
    break;
                                }
                                break;
                                case 2:
// new-order selected
from menu; display new-order input form
    MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
                                case 3:
// payment selected
from menu; display payment input form
    MakePaymentForm(TermId,
NULL, INPUT_FORM, szBuffer);
    break;
                                case 4:
// delivery selected
from menu; display delivery input form
    MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
                                case 5:
// order-status
selected from menu; display order-status input form
    MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
                                case 6:
// stock-level selected
from menu; display stock-level input form
    MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
                                case 7:
// ExitCmd
TermDelete(TermId);
WelcomeForm(pECB,
szBuffer);
    break;
                                case 8:
SubmitCmd(pECB,
szBuffer);
    break;
                                case 9:

```

```

// menu
    MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
    break;
                                case 10:
// CMD=Clear
// resets all
connections: should only be used when no other
connections are active
    TermDeleteAll();
TermInit();
WelcomeForm(pECB,
szBuffer);
    break;
                                case 11:
// CMD=Stats
StatsCmd(pECB,
szBuffer);
    break;
                                }
                                catch (CBaseErr *e)
                                {
ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
    delete e;
                                }
                                catch (...)
                                {
ErrorForm( pECB, ERR_TYPE_WEBDLL,
0, TermId, iSyncId, "Error: Unhandled exception in
Web Client.", szBuffer );
                                }
#ifdef ICECAP
    StopCAP();
#endif
    lpbSize = strlen(szBuffer);
    wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
    strcat( szHeader1, szBuffer );
    (*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);
//finish up and keep connection
pECB->dwHttpStatusCode = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}
void WriteMessageToEventLog(LPTSTR lpszMsg)

```

```

{
TCHAR szMsg[256];
HANDLE hEventSource;
LPTSTR lpszStrings[2];
// Use event logging to log the error.
//
hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));
    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
lpszStrings[0] = szMsg;
lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
ReportEvent(hEventSource, // handle of event
source
EVENTLOG_ERROR_TYPE, // event type
0, // event category
0, // event ID
NULL, // current user's
SID
2, // strings in
lpszStrings
0, // no bytes of raw
data
(LPCTSTR *)lpszStrings, // array of
error strings
NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred
delivery txns. There are typically several
threads running this
routine. The number of threads is determined by an
entry
* read from the registry.
The thread waits for work by waiting on semaphore.
* When a delivery txn is
posted, the semaphore is released. After processing
the delivery txn,
information is logged to record the txn status and
execution
* time.
*/
/*static*/ void DeliveryWorkerThread(void *ptr)
{
CTPCC_BASE *pTxn = NULL;
DELIVERY_TRANSACTION
delivery;
PDELIVERY_DATA
pDeliveryData;

```

```

TXN_RECORD_TPCC_DELIV_DEF    txnDeliRec;

DWORD
index;
HANDLE
handles[2];

SYSTEMTIME                    trans_end;
//delivery transaction finished
time
SYSTEMTIME                    trans_start;
//delivery transaction start time

assert(txnDeliLog != NULL);

try
{
    if (Reg.eDB_Protocol == ODBC)
    {
        if (Reg.dwConnectDelay
        > 0)
        {
            Synchronize connect (for VIA)
            //
            //
            EnterCriticalSection(&hConnectCriticalSection);

            Sleep(Reg.dwConnectDelay);

            pTxn =
            pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
            Reg.szDbPassword,

            szMyComputerName, Reg.szDbName,

            Reg.szSPPrefix,
            Reg.bCallNoDuplicatesNewOrder );

            LeaveCriticalSection(&hConnectCriticalSection);
        }
        else
        {
            if (Reg.eDB_Protocol ==
            DBLIB)
            pTxn =
            pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
            Reg.szDbPassword, szMyComputerName, Reg.szDbName );
            pDeliveryData = pTxn-
            >BuffAddr_Delivery();
        }
        catch (CBaseErr *e)
        {

```

```

char szTmp[1024];
wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
"%s.
Server=%s, User=%s, Password=%s, Database=%s",
e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
WriteMessageToEventLog( szTmp );
delete e;
goto ErrorExit;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
    goto ErrorExit;
}
while (TRUE)
{
    try
    {
        //while delivery thread
        running, i.e. user has not requested termination
        while (TRUE)
        {
            // need to
            wait for multiple objects: program exit or worker
            semaphore;
            handles[0] =
            hDoneEvent;
            handles[1] =
            hWorkerSemaphore;
            index =
            WaitForMultipleObjects( 2, &handles[0], FALSE,
            INFINITE );
            if (index ==
            WAIT_OBJECT_0)
            goto ErrorExit;

            ZeroMemory(&txnDeliRec,
            sizeof(txnDeliRec));

            txnDeliRec.TxnType =
            TXN_REC_TYPE_TPCC_DELIV_DEF;

            // make a
            local copy of current entry from delivery buffer and
            increment buffer index

            EnterCriticalSection(&DelBuffCriticalSection);
            delivery =
            *(pDelBuff+dwDelBuffBusyIndex);
            dwDelBuffFreeCount++;

```

```

dwDelBuffBusyIndex++;
if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer
dwDelBuffBusyIndex = 0;

LeaveCriticalSection(&DelBuffCriticalSection);
n);

pDeliveryData->w_id = delivery.w_id;
pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

txnDeliRec.w_id = pDeliveryData->w_id;
txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;

txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);

GetLocalTime(
pTxn-
>Delivery();
GetLocalTime(
&trans_end );
//log txn

txnDeliRec.TxnStatus = ERR_SUCCESS;
for (int i=0;
i<10; i++)
txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];

txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);

txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));

if
(txnDeliLog != NULL)
txnDeliLog->WriteToLog(&txnDeliRec);
}
catch (CBaseErr *e)
{
    char szTmp[1024];

```

```

        wsprintf( szTmp, "%s
Error (code %d) in Delivery Txn thread. %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
        WriteMessageToEventLog(
szTmp );

        // log the error txn
        txnDeliRec.TxnStatus =
e->ErrorType();
        if (txnDeliLog != NULL)
            txnDeliLog-
>WriteToLog(&txnDeliRec);

        delete e;
    }
    catch (...)
    {
        // unhandled exception;
shouldn't happen; not much we can do...

        WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread.));
    }
}

ErrorExit:
if (Reg.dwConnectDelay > 0)
{
    // Synchronize disconnect (for
VIA)
    //
    EnterCriticalSection(&hConnectCriticalSecti
on);

    Sleep(Reg.dwConnectDelay);

    delete pTxn;

    LeaveCriticalSection(&hConnectCriticalSecti
on);
}

_endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE: This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS: BOOL FALSE
            delivery information posted successfully
            TRUE error cannot post delivery info
*/
BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{

```

```

        BOOL bError;

        EnterCriticalSection(&DelBuffCriticalSectio
n);
        if (dwDelBuffFreeCount > 0)
        {
            bError = FALSE;
            (pDelBuff+dwDelBuffFreeIndex)-
            = w_id;
            >w_id
            (pDelBuff+dwDelBuffFreeIndex)-
            = o_carrier_id;
            >o_carrier_id

            GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);

            dwDelBuffFreeCount--;
            dwDelBuffFreeIndex++;
            if (dwDelBuffFreeIndex ==
dwDelBuffSize)
                dwDelBuffFreeIndex = 0;
            // wrap-around if at end of
buffer
        }
        else
            // No free buffers. Return an
error, which indicates that the delivery buffer is
full.
            // Most likely, the number of
delivery worker threads needs to be increased to keep
up
            // with the txn rate.
            bError = TRUE;

        LeaveCriticalSection(&DelBuffCriticalSectio
n);

        if (!bError)
            // increment worker semaphore to
wake up a worker thread
            ReleaseSemaphore(
hWorkerSemaphore, 1, NULL );

        return bError;
    }

/* FUNCTION: ProcessQueryString
*
* PURPOSE: This function extracts the
relevant information out of the http command passed
in from
the browser.
*
* COMMENTS: If this is the initial connection
i.e. client is at welcome screen then
there will
not be a terminal id or current form id. If this is
the case
then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..",
        "..Payment..", "..Delivery..", "..Order-Status..",
        "..Stock-Level..",
        "..Exit..", "Submit", "Menu",
        "Clear", "Stats", ""
    };

    *pCmd = 0; // default is
the login screen
    *pTermId = 0;

    // if no params (i.e., empty query string),
then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
    *pTermId = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; i++)
    {
        if (szCmds[i][0] == 0)
            // no more; no match;
return error
            throw new CWEBCLNT_ERR(
ERR_COMMAND_UNDEFINED );
        if ( !strcmp(szCmds[i], szBuffer)
)
        {
            *pCmd = i+1;
            break;
        }
    }
}

/* FUNCTION: void WelcomeForm
*
*/

```

```

void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szBuffer,
" <HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

" <B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>"

" <font face=\\"Courier New\\"><PRE>"

"Compiled: " __DATE__ ", " __TIME__ " <BR>"

"Source: " __FILE__ " (" __TIMESTAMP__ ")
<BR>"

" </PRE></font>"

" <FORM ACTION=\\"tpcc.dll\\" METHOD=\\"GET\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"STATUSID\\"
VALUE=\\"0\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"ERROR\\"
VALUE=\\"0\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"FORMID\\"
VALUE=\\"1\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"TERMINID\\"
VALUE=\\"0\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"SYNCID\\"
VALUE=\\"0\\">"

" <INPUT TYPE=\\"hidden\\" NAME=\\"VERSION\\"
VALUE=\\" " WEBCLIENT_VERSION " \\">"
);

    sprintf( szTmp,
"Configuration
Settings: <BR><font face=\\"Courier New\\"
color=\\"blue\\"><PRE>"

"Txn Monitor          = <B>%s</B><BR>"

"Database protocol    = <B>%s</B><BR>"

"Max Connections      = <B>%d</B><BR>" "#
of Delivery Threads  = <B>%d</B><BR>"

"Max Pending Deliveries = <B>%d</B><BR>"

szTxnMonNames[Reg.eTxnMon],
szDBNames[Reg.eDB_Protocol],

```

```

Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
    strcat( szBuffer, szTmp);

    if (Reg.eTxnMon == COM)
    {
        sprintf( szTmp,
"COM Single
Pool          = <B>%s</B><BR>",
Reg.bCOM_SinglePool ?
"YES" : "NO" );
        strcat( szBuffer, szTmp);
        strcat( szBuffer, " </PRE></font>");

        if (Reg.eTxnMon == None)
            // connection options may be
specified when not using a txn monitor
            sprintf( szTmp,
"Please enter
your database options for this connection:<BR>"

" <font face=\\"Courier New\\"
color=\\"blue\\"><PRE>"

"DB Server      = <INPUT NAME=\\"db_server\\"
SIZE=20 VALUE=\\"%s\\"><BR>"

"DB User ID     = <INPUT NAME=\\"db_user\\"
SIZE=20 VALUE=\\"%s\\"><BR>"

"DB Password    = <INPUT NAME=\\"db_passwd\\"
SIZE=20 VALUE=\\"%s\\"><BR>"

"DB Name        = <INPUT NAME=\\"db_name\\"
SIZE=20 VALUE=\\"%s\\"><BR>"

" </PRE></font>"

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
        else
            // if using a txn monitor,
connection options are determined from registry;
can't
            // set per user. show options
fyi
            sprintf( szTmp,
"Database
options which will be used by the transaction
monitor:<BR>"

" <font face=\\"Courier New\\"
color=\\"blue\\"><PRE>"

"DB Server      = <B>%s</B><BR>"

"DB User ID     = <B>%s</B><BR>"

"DB Password    = <B>%s</B><BR>"

"DB Name        = <B>%s</B><BR>"

" </PRE></font>"

```

```

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
        strcat( szBuffer, szTmp);

        sprintf( szTmp,
"Please enter your
Warehouse and District for this session:<BR>"

" <font face=\\"Courier New\\"
color=\\"blue\\"><PRE>" );
        strcat( szBuffer, szTmp);
        strcat( szBuffer,
"Warehouse ID = <INPUT
NAME=\\"w_id\\" SIZE=6><BR>"

"District ID = <INPUT NAME=\\"d_id\\"
SIZE=2><BR>"

" </PRE></font><HR>"

" <INPUT TYPE=\\"submit\\" NAME=\\"CMD\\"
VALUE=\\"Submit\\">"

" </FORM></BODY></HTML>");
    }

/* FUNCTION: SubmitCmd
 *
 * PURPOSE: This function allocated a new
terminal id in the Term structure array.
 *
 */

void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int          iNewTerm;
    char         *ptr = pECB->lpszQueryString;

    char         szVersion[32]   = { 0 };
    char         szServer[32]    = { 0 };
    char         szUser[32]      =
    "sa";

    char         szPassword[32]  = { 0 };
    char         szDatabase[32]  = "tpcc";

    // validate version field; the version
field ensures that the RTE is synchronized with the
web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if ( strcmp( szVersion, WEBCLIENT_VERSION )
)
        throw new CWBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTxnMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name

```

```

        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);
    }

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

    iNewTerm = TermAdd();
    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == TUXEDO)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_TUXEDO_new();
        else if (Reg.eTxnMon == ENCINA)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_ENCINA_new();
        else if (Reg.eTxnMon == COM)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
        else if (Reg.eDB_Protocol ==
ODBC)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

szDatabase, Reg.szSPPrefix,

Reg.bCallNoDuplicatesNewOrder );
        else if (Reg.eDB_Protocol ==
DBLIB)

```

```

        Term.pClientData[iNewTerm].pTxn =
pCTPCC_DBLIB_new( szServer, szUser, szPassword,
szMyComputerName, szDatabase );
    }
    catch (...)
    {
        TermDelete(iNewTerm);
        throw; // pass
exception upward
    }

    MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
}

/* FUNCTION: StatsCmd
 *
 * PURPOSE: This function returns to the
browser the total number of active terminal ids.
 * This routine is for
development/debugging purposes.
 */

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotals;

    EnterCriticalSection(&TermCriticalSection);

    iTotals = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)

            iTotals++;

        LeaveCriticalSection(&TermCriticalSection);

        wsprintf( szBuffer,

" <HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>"

" <BODY><B><BIG> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>"
, iTotals );
    }

    char *CWEBCLNT_ERR::ErrorText()
    {
        static SERRORMSG errorMsgs[] =
        {
            { ERR_COMMAND_UNDEFINED,
"Command undefined."
},

```

```

            { ERR_D_ID_INVALID,
"Invalid District ID Must be 1 to 10."
},
        },
        ERR_DELIVERY_CARRIER_ID_RANGE,
"Delivery Carrier ID out of range
must be 1 - 10."
    },
    {
        ERR_DELIVERY_CARRIER_INVALID,
"Delivery Carrier ID invalid must be
numeric 1 - 10."
    },
    {
        ERR_DELIVERY_MISSING_OCD_KEY,
"Delivery missing Carrier ID key \"OCD*\"."
    },
    {
        ERR_DELIVERY_THREAD_FAILED,
"Could not start delivery worker
thread."
    },
    {
        ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
    },
    {
        ERR_HTML_ILL_FORMED,
"Required key field is missing from HTML
string."
    },
    {
        ERR_INVALID_SYNC_CONNECTION,
"Invalid Terminal Sync ID."
    },
    {
        ERR_INVALID_TERMID,
"Invalid Terminal ID."
    },
    {
        ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
    },
    {
        ERR_MAX_CONNECTIONS_EXCEEDED,
"No connections available. Max Connections
is probably too low."
    },
    {
        ERR_MISSING_REGISTRY_ENTRIES,
"Required registry entries are missing.
Rerun INSTALL to correct."
    },
    {
        ERR_NEWORDER_CUSTOMER_INVALID,
"New Order customer id invalid
data type, range = 1 to 3000."
    },
    {
        ERR_NEWORDER_CUSTOMER_KEY,

```

```

        "New Order missing Customer key
\CID*\."
    },
    {
        ERR_NEWORDER_DISTRICT_INVALID,
        "New Order District ID Invalid
range 1 - 10."
    },
    {
        ERR_NEWORDER_FORM_MISSING_DID,
        "New Order missing District key
\DID*\."
    },
    {
        ERR_NEWORDER_ITEMID_INVALID,
        "New Order Item Id is wrong data type, must
be numeric."
    },
    {
        ERR_NEWORDER_ITEMID_RANGE,
        "New Order Item Id is out of
range. Range = 1 to 999999."
    },
    {
        ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
        "New Order Item Id field entered without a
corresponding Supp_W."
    },
    {
        ERR_NEWORDER_MISSING_IID_KEY,
        "New Order missing Item Id key \IID*\."
    },
    {
        ERR_NEWORDER_MISSING_QTY_KEY,
        "New Order Missing Qty key \Qty##*\."
    },
    {
        ERR_NEWORDER_MISSING_SUPPW_KEY,
        "New Order missing Supp_W key
\SP##*\."
    },
    {
        ERR_NEWORDER_NOITEMS_ENTERED,
        "New Order No order lines entered."
    },
    {
        ERR_NEWORDER_QTY_INVALID,
        "New Order Qty invalid must be
numeric range 1 - 99."
    },
    {
        ERR_NEWORDER_QTY_RANGE,
        "New Order Qty is out of range. Range = 1
to 99."
    },
    {
        ERR_NEWORDER_QTY_WITHOUT_SUPPW,
        "New Order Qty field entered
without a corresponding Supp_W."
    },
    {
        ERR_NEWORDER_SUPPW_INVALID,
        "New Order Supp_W invalid data

```

```

type must be numeric."
    },
    {
        ERR_NO_SERVER_SPECIFIED,
        "No Server name specified."
    },
    {
        ERR_ORDERSTATUS_CID_AND_CLT,
        "Order Status Only Customer ID or Last Name
may be entered, not both."
    },
    {
        ERR_ORDERSTATUS_CID_INVALID,
        "Order Status Customer ID invalid, range
must be numeric 1 - 3000."
    },
    {
        ERR_ORDERSTATUS_CLT_RANGE,
        "Order Status Customer last name
longer than 16 characters."
    },
    {
        ERR_ORDERSTATUS_DID_INVALID,
        "Order Status District invalid, value must
be numeric 1 - 10."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_CLT,
        "Order Status Either Customer ID or Last
Name must be entered."
    },
    {
        ERR_ORDERSTATUS_MISSING_CID_KEY,
        "Order Status missing Customer key
\CID*\."
    },
    {
        ERR_ORDERSTATUS_MISSING_CLT_KEY,
        "Order Status missing Customer Last Name
key \CLT*\."
    },
    {
        ERR_ORDERSTATUS_MISSING_DID_KEY,
        "Order Status missing District key
\DID*\."
    },
    {
        ERR_PAYMENT_CDI_INVALID,
        "Payment Customer district
invalid must be numeric."
    },
    {
        ERR_PAYMENT_CID_AND_CLT,
        "Payment Only Customer ID or Last
Name may be entered, not both."
    },
    {
        ERR_PAYMENT_CUSTOMER_INVALID,
        "Payment Customer data type invalid, must
be numeric."
    },
    {
        ERR_PAYMENT_CWI_INVALID,
        "Payment Customer Warehouse
invalid, must be numeric."
    },
    {
        ERR_PAYMENT_DISTRICT_INVALID,

```

```

        "Payment District ID is invalid, must be 1
- 10."
    },
    {
        ERR_PAYMENT_HAM_INVALID,
        "Payment Amount invalid data type
must be numeric."
    },
    {
        ERR_PAYMENT_HAM_RANGE,
        "Payment Amount out of range, 0 - 9999.99."
    },
    {
        ERR_PAYMENT_LAST_NAME_TO_LONG,
        "Payment Customer last name
longer than 16 characters."
    },
    {
        ERR_PAYMENT_MISSING_CDI_KEY,
        "Payment missing Customer district key
\CDI*\."
    },
    {
        ERR_PAYMENT_MISSING_CID_CLT,
        "Payment Either Customer ID or Last Name
must be entered."
    },
    {
        ERR_PAYMENT_MISSING_CID_KEY,
        "Payment missing Customer Key \CID*\."
    },
    {
        ERR_PAYMENT_MISSING_CLT_KEY,
        "Payment missing Customer Last Name key
\CLT*\."
    },
    {
        ERR_PAYMENT_MISSING_CWI_KEY,
        "Payment missing Customer Warehouse key
\CWI*\."
    },
    {
        ERR_PAYMENT_MISSING_DID_KEY,
        "Payment missing District Key \DID*\."
    },
    {
        ERR_PAYMENT_MISSING_HAM_KEY,
        "Payment missing Amount key \HAM*\."
    },
    {
        ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
        "Stock Level; missing Threshold key
\TT*\."
    },
    {
        ERR_STOCKLEVEL_THRESHOLD_INVALID,
        "Stock Level; Threshold value must be in
the range = 1 - 99."
    },

```

```

        {
            ERR_STOCKLEVEL_THRESHOLD_RANGE,
            "Stock Level Threshold out of
range, range must be 1 - 99." },
        {
            ERR_VERSION_MISMATCH,
            "Invalid version field. RTE and Web Client
are probably out of sync." },
        {
            ERR_W_ID_INVALID,
            "Invalid Warehouse ID."
        }
    },
    {
        0,
        ""
    }
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

/* FUNCTION: GetKeyValue
*
* PURPOSE: This function parses a http
formatted string for specific key values.
*
* ARGUMENTS: char
*pQueryString http string from client
browser

```

```

*
* char
* key
value to look for *pKey
*
* char
* *pValue
character array into which to place key's
value
*
* int
* iMax
maximum length of key value array.
*
* WEBERROR
* err
error value to throw
*
* RETURNS: nothing.
*
* ERROR: if (the pKey value is not found)
then
*
* if
(err == 0)
*
* return (empty string)
*
* else
*
* throw CWEBCLNT_ERR(err)
*
* COMMENTS: http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*
* TPC-C input
fields in such a manner that the keys can be
extracted in the
*
* above manner.
*/

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;

    iMax--; // one position is for terminating
null
while( *ptr && *ptr != '&' && iMax)
{
    *pValue++ = *ptr++;
    iMax--;
}
*pValue = 0; // terminating null

*pQueryString = ptr;
return;

ErrorExit:
if (err != NO_ERR)

```

```

throw new CWEBCLNT_ERR( err );
*pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE: This function parses a http
formatted string for a specific key value.
*
* ARGUMENTS: char
*pQueryString http string from client
browser
*
* char
* key
value to look for *pKey
*
* WEBERROR
* NoKeyErr error value to throw if
key not found
*
* WEBERROR
* NotIntErr error value to throw if
value not numeric
*
* RETURNS: integer
*
* ERROR: if (the pKey value is not found)
then
*
* if
(NoKeyErr != NO_ERR)
*
* throw CWEBCLNT_ERR(err)
*
* else
*
* return 0
*
* else if (non-
numeric char found) then
*
* if
(NotIntErr != NO_ERR) then
*
* throw CWEBCLNT_ERR(err)
*
* else
*
* return 0
*
* COMMENTS: http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*
* TPC-C input
fields in such a manner that the keys can be
extracted in the
*
* above manner.
*/

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;

```

```

ptr += strlen(pKey);
if ( *ptr != '=' )
    goto ErrorNoKey;
ptr++;

ptr0 = ptr;           // remember
starting point
// scan string until a terminator (null or
&) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr)
)
    ptr++;

// make sure we stopped scanning for the
right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWBCLNT_ERR(
NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
if (NoKeyErr != NO_ERR)
    throw new CWBCLNT_ERR( NoKeyErr
);
return 0;
}

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL
*
*               is first loaded by the
inet service.
*
*/

void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {
        LeaveCriticalSection(&TermCriticalSection);
        throw new CWBCLNT_ERR(
ERR_MEM_ALLOC_FAILED );
    }
}

```

```

}

ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

Term.iFreeList =
Term.iNumEntries-1;
// build free list
// note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
// This is intentional, as the zero
entry is used as an anchor and never
// allocated as an actual
terminal.
for(int i=0; i<Term.iNumEntries; i++)
    Term.pClientData[i].iNextFree =
i-1;

LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE:      This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS:    none
*
* RETURNS:      None
*
* COMMENTS:     This function is called only when
the inet service unloads the TPCC.DLL
*
*/

void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;

        Term.iFreeList = 0;
        Term.iNumEntries = 0;
        if ( Term.pClientData )
            free(Term.pClientData);
        Term.pClientData = NULL;

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermAdd
*
* PURPOSE:      This function assigns a terminal
id which is used to identify a client browser.
*

```

```

* RETURNS:      int
                assigned terminal id
*/

int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTickCount=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTickCount >
Term.pClientData[i].iTickCount)
            {
                iTickCount =
Term.pClientData[i].iTickCount;
                iNewTerm = i;
            }
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requestor.
        if ((GetTickCount() - iTickCount)
< 60000)
        {
            LeaveCriticalSection(&TermCriticalSection);
            throw new CWBCLNT_ERR(
ERR_MAX_CONNECTIONS_EXCEEDED );
        }

        Term.pClientData[iNewTerm].iTickCount =
GetTickCount();
        Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
        Term.pClientData[iNewTerm].pTxn = NULL;
    }
}

```



```

        LeaveCriticalSection(&TermCriticalSection);
        return iNewTerm;
    }

/* FUNCTION: TermDelete
 *
 * PURPOSE:      This function makes a terminal
entry in the Term array available for reuse.
 *
 * ARGUMENTS:   int          id
                Terminal id of client exiting
 *
 */

void TermDelete(int id)
{
    if ( id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;

        // put onto free list

        EnterCriticalSection(&TermCriticalSection);

        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: MakeErrorForm
 */

void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{
    sprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"*%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
        "<BOLD>An Error
Occurred</BOLD><BR><BR>"
        "%s"

```

```

        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></BODY></HTML>"
        , iType, iErrorNum,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
    }

/* FUNCTION: MakeMainMenuForm
 */

void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
        "Select Desired
Transaction.<BR><HR>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></BODY></HTML>"
        , MAIN_MENU_FORM, iTermId,

iSyncId);
    }

/* FUNCTION: MakeStockLevelForm
 *

```

```

 * PURPOSE:      This function constructs the
Stock Level HTML page.
 *
 * COMMENTS:     The internal client buffer is
created when the terminal id is assigned and should
not
                be freed
                except when the client terminal id is no longer
needed.
 */

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm)
{
    int          c;

    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C Stock
Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"%0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"TERMIN\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
Stock-Level<BR>"
        "Warehouse: %6.6d District:
%2.2d<BR> <BR>,"
        STOCK_LEVEL_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id,
Term.pClientData[iTermId].d_id);

    if ( bInput )
    {
        strcpy(szForm+c,
            "Stock Level Threshold:
<INPUT NAME=\"TT*\" SIZE=2><BR> <BR>"
            "low stock:
</font><BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
            "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
            "</FORM></HTML>" );
    }
    else
    {
        sprintf(szForm+c,
            "Stock Level Threshold:
%2.2d<BR> <BR>"

```

```

        "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"
        " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</FORM></HTML>"
        pStockLevelData-
>threshold, pStockLevelData->low_stock);
    }
}

/* FUNCTION: MakeNewOrderForm
 *
 * COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
 *                be freed
except when the client terminal id is no longer
needed.
 */

void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int i, c;
    BOOL bValid;
    static char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";

    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );

    bValid = (bInput || (pNewOrderData-
>exec_status_code == eOK));

    c = sprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"

```

```

        "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
        "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
        "<PRE><font face=\"Courier\">
New Order<BR>"
        ", bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( bInput )
        {
            c += sprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

            strcpy( szForm+c,
                "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>"
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %Disc:<BR>"
                "Order Number:
Number of Lines:      W_tax:      D_tax:<BR>
<BR>"
                " Supp_W Item_Id Item
Name      Qty Stock B/G Price
Amount<BR>"
                "<INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\"
SIZE=6> <INPUT
NAME=\"Qty00*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\"
SIZE=6> <INPUT
NAME=\"Qty01*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\"
SIZE=6> <INPUT
NAME=\"Qty02*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\"
SIZE=6> <INPUT
NAME=\"Qty03*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\"
SIZE=6> <INPUT
NAME=\"Qty04*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\"
SIZE=6> <INPUT
NAME=\"Qty05*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\"
SIZE=6> <INPUT
NAME=\"Qty06*\" SIZE=1><BR>"
                "<INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\"
SIZE=6> <INPUT
NAME=\"Qty07*\" SIZE=1><BR>"

```

```

        "<INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\"
SIZE=6> <INPUT
NAME=\"Qty08*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\"
SIZE=6> <INPUT
NAME=\"Qty09*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\"
SIZE=6> <INPUT
NAME=\"Qty10*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\"
SIZE=6> <INPUT
NAME=\"Qty11*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\"
SIZE=6> <INPUT
NAME=\"Qty12*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\"
SIZE=6> <INPUT
NAME=\"Qty13*\" SIZE=1><BR>"
        "<INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\"
SIZE=6> <INPUT
NAME=\"Qty14*\" SIZE=1><BR>"
        "Execution Status:
Total:<BR>"
        "</font></PRE><HR>"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
        "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
        "</FORM></HTML>"
    );
}
else
{
    c += sprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ",
                pNewOrderData->w_id,
                pNewOrderData->d_id);

    if ( bValid )
    {
        c += sprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
                pNewOrderData->o_entry_d.day,
                pNewOrderData->o_entry_d.month,
                pNewOrderData->o_entry_d.year,
                pNewOrderData->o_entry_d.hour,
                pNewOrderData->o_entry_d.minute,

```

```

    pNewOrderData->o_entry_d.second);
    }

    c += wsprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s",
    pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

    if ( bValid )
    {
        c += sprintf(szForm+c,

"%Disc: %5.2f <BR>"

"Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>"

" Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",

100.0*pNewOrderData->c_discount,

pNewOrderData->o_id,

pNewOrderData->o_ol_cnt,

100.0 *
pNewOrderData->w_tax,
100.0 *
pNewOrderData->d_tax);

        for(i=0;
i<pNewOrderData->o_ol_cnt; i++)
        {
            c +=
sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
%3.3d %1.1s %6.2f %7.2f <BR>",

pNewOrderData->OL[i].ol_supply_w_id,
pNewOrderData->OL[i].ol_i_id,
pNewOrderData->OL[i].ol_i_name,
pNewOrderData->OL[i].ol_quantity,
pNewOrderData->OL[i].ol_stock,
pNewOrderData->OL[i].ol_brand_generic,
pNewOrderData->OL[i].ol_i_price,
pNewOrderData->OL[i].ol_amount );
        }
    }
    else
    {
        c += wsprintf(szForm+c,
"%Disc:<BR>"

```

```

"Order
Number: %8.8d Number of Lines: W_tax:
D_tax:<BR> <BR>"

" Supp_W
Item_Id Item Name Qty Stock B/G
Price Amount<BR>"

pNewOrderData->o_id);

        i = 0;
        strcpy( szForm+c, (15-i)*5
);
        c += (15-i)*5;
        if ( bValid )
            c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: %8.2f ",

pNewOrderData->total_amount);
        else
            c += wsprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");

        strcpy(szForm+c,

<BR></font></PRE><HR>"

" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
" <INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
" </FORM></HTML>"

);
    }

/* FUNCTION: MakePaymentForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

```

```

        c = wsprintf(szForm,
"HTML:<HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>"
" <FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
" <INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"0\">"
" <INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"
" <INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"\">"
" <INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"\">"
" <INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"\">"
" <PRE><font face=\"Courier\">
Payment<BR>"
"Date: "
, PAYMENT_FORM, iTermId,
Term.pClientData[iTermId].iSyncId);

        if ( !bInput )
        {
            c += wsprintf(szForm+c, "%2.2d-
%2.2d-%4.4d %2.2d:%2.2d:%2.2d",

pPaymentData-
>h_date.day,
pPaymentData-
>h_date.month,
pPaymentData-
>h_date.year,
pPaymentData-
>h_date.hour,
pPaymentData-
>h_date.minute,
pPaymentData-
>h_date.second);
        }
        if ( bInput )
        {
            c += wsprintf(szForm+c,
"%6.6d"
" <BR> <BR>Warehouse:
"
District: <INPUT NAME=\"DID*\" SIZE=1><BR> <BR> <BR>
<BR> <BR>"
"Customer: <INPUT
NAME=\"CID*\" SIZE=4>"
"Cust-Warehouse: <INPUT
NAME=\"CWI*\" SIZE=4> "
"Cust-District: <INPUT
NAME=\"CDI*\" SIZE=1><BR>"
"Name:
<INPUT NAME=\"CLT*\" SIZE=16>
Since:<BR>"
"
Credit:<BR>"
"
Disc:<BR>"

```

```

Phone:<BR> <BR>"
"
"Amount Paid:
$<INPUT NAME="HAM*" SIZE=7> New Cust-
Balance:<BR>"
"Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR></font></PRE><HR>"
" <INPUT TYPE="submit"
NAME="CMD" VALUE="Process" ><INPUT TYPE="submit"
NAME="CMD" VALUE="Menu" >"
" </BODY></FORM></HTML>"
Term.pClientData[iTermId].w_id);
}
else
{
c += sprintf(szForm+c,
" <BR> <BR>Warehouse:
%6.6d District: %2.2d<BR>"
"%-20s
"%-20s
"%-20s
"%-20s %-2s %5.5s-%4.4s<BR> <BR>"
"Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>"
"Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>"
"%-20s
" "%-20s
Credit: %-2s<BR>"
Term.pClientData[iTermId].w_id, pPaymentData->d_id
, pPaymentData-
>w_street_1, pPaymentData->d_street_1
, pPaymentData-
>w_street_2, pPaymentData->d_street_2
, pPaymentData->w_city,
pPaymentData->w_state, pPaymentData->w_zip,
pPaymentData->w_zip+5
, pPaymentData->d_city,
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+5
, pPaymentData->c_id,
pPaymentData->c_w_id,
pPaymentData->c_d_id
, pPaymentData-
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
, pPaymentData-
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
, pPaymentData-
>c_street_1, pPaymentData->c_credit
);
c += sprintf(szForm+c,
"%-20s
%%Disc: %5.2f<BR>",

```

```

pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);
c += sprintf(szForm+c,
"%-20s %-2s
%5.5s-%4.4s Phone: %6.6s-%3.3s-%3.3s-%4.4s<BR>
<BR>",
pPaymentData->c_city,
pPaymentData->c_state, pPaymentData->c_zip,
pPaymentData->c_zip+5,
pPaymentData->c_phone,
pPaymentData->c_phone+6, pPaymentData->c_phone+9,
pPaymentData->c_phone+12 );
c += sprintf(szForm+c,
"Amount Paid:
$%7.2f New Cust-Balance: $%14.2f<BR>"
"Credit Limit:
$%13.2f<BR> <BR>"
, pPaymentData-
>h_amount, pPaymentData->c_balance
, pPaymentData-
>c_credit_lim
);
if ( pPaymentData->c_credit[0] ==
'B' && pPaymentData->c_credit[1] == 'C' )
c += sprintf(szForm+c,
"%-50.50s<BR> %-
50.50s<BR> %-50.50s<BR>
pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
else
strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR> <BR>");
strcat(szForm,
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..NewOrder.." >"
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..Payment.." >"
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..Delivery.." >"
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..Order-Status.." >"
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..Stock-Level.." >"
" <INPUT TYPE="submit" NAME="CMD"
VALUE="..Exit.." >"

```

```

" </BODY></FORM></HTML>");
}
}
/* FUNCTION: MakeOrderStatusForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
int i, c;
static char szBR[] = " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>";
c = sprintf(szForm,
"<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
"<FORM ACTION="tpcc.dll"
METHOD="GET" >"
" <INPUT TYPE="hidden"
NAME="STATUSID" VALUE="0" >"
" <INPUT TYPE="hidden"
NAME="ERROR" VALUE="0" >"
" <INPUT TYPE="hidden"
NAME="FORMID" VALUE="%"d" >"
" <INPUT TYPE="hidden"
NAME="TERMINID" VALUE="%"d" >"
" <INPUT TYPE="hidden"
NAME="SYNCID" VALUE="%"d" >"
"<PRE><font face="Courier" >"
Order-Status<BR>"
" Warehouse: %6.6d ",
ORDER_STATUS_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);
if ( bInput )
{
strcpy(szForm+c,
"District: <INPUT
NAME="DID*" SIZE=1><BR>"
"Customer: <INPUT
NAME="CID*" SIZE=4> Name:
<INPUT NAME="CLT*" SIZE=23><BR>"
" Cust-Balance: <BR>
<BR>"
"Order-Number:
Entry-Date: Carrier-
Number: <BR>"

```

```

                "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR> <BR> <BR> <BR>
<BR>"
                " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR></font></PRE>"
                "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Process\"><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Menu\">"
                "</BODY></FORM></HTML>"
);
        }
        else
        {
                c += sprintf(szForm+c,
                "District: %2.2d<BR>"
                "Customer: %4.4d
Name: %-16s %-2s %-16s<BR>",
                pOrderStatusData->d_id,
                pOrderStatusData->c_id,
                pOrderStatusData->c_first, pOrderStatusData->c_middle,
                pOrderStatusData->c_last);
                c += sprintf(szForm+c, "Cust-
Balance: %9.2f<BR> <BR>",
                pOrderStatusData->c_balance);
                c += sprintf(szForm+c,
                "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d
Carrier-Number: %2.2d<BR>"
                "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR>",
                pOrderStatusData->o_id,
                pOrderStatusData->o_entry_d.day,
                pOrderStatusData->o_entry_d.month,
                pOrderStatusData->o_entry_d.year,
                pOrderStatusData->o_entry_d.hour,
                pOrderStatusData->o_entry_d.minute,
                pOrderStatusData->o_entry_d.second,
                pOrderStatusData->o_carrier_id);
                for(i=0; i< pOrderStatusData->o_ol_cnt; i++)
                {
                        c += sprintf(szForm+c,
                " %6.6d %6.6d %2.2d %8.2f %2.2d-
%2.2d-%4.4d<BR>",
                pOrderStatusData->OL[i].ol_supply_w_id,
                pOrderStatusData->OL[i].ol_i_id,

```

```

                pOrderStatusData->OL[i].ol_quantity,
                pOrderStatusData->OL[i].ol_amount,
                pOrderStatusData->OL[i].ol_delivery_d.day,
                pOrderStatusData->OL[i].ol_delivery_d.month,
                pOrderStatusData->OL[i].ol_delivery_d.year);
                }
                strncpy( szForm+c, szBR, (15-i)*5
                );
                c += (15-i)*5;
                strcpy(szForm+c,
                "</font></PRE><HR><INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
                "</BODY></FORM></HTML>"
                );
        }
        /* FUNCTION: MakeDeliveryForm
        *
        * COMMENTS:      The internal client buffer is
        created when the terminal id is assigned and should
        not
        *                  be freed
        except when the client terminal id is no longer
        needed.
        */
        void MakeDeliveryForm(int iTermId, DELIVERY_DATA
        *pDeliveryData, BOOL bInput, char *szForm)
        {
                int c;
                c = sprintf(szForm,
                "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>"
                "<FORM ACTION=\"tpcc.dll\"
METHOD=\"GET\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"STATUSID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"ERROR\" VALUE=\"0\">"

```

```

                "<INPUT TYPE=\"hidden\"
NAME=\"FORMID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"TERMINID\" VALUE=\"%d\">"
                "<INPUT TYPE=\"hidden\"
NAME=\"SYNCID\" VALUE=\"%d\">"
                "<PRE><font face=\"Courier\">
Delivery<BR>"
                "Warehouse: %6.6d<BR> <BR>",
                (!bInput && (pDeliveryData->exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
                0,
                DELIVERY_FORM, iTermId,
                Term.pClientData[iTermId].iSyncId,
                Term.pClientData[iTermId].w_id);
                if ( bInput )
                {
                        strcpy( szForm+c,
                                "Carrier Number: <INPUT
NAME=\"OCD\" SIZE=1<BR> <BR>"
                                "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR> <BR>
" <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE><HR>"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Process\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"Menu\">"
                                "</BODY></FORM></HTML>"
                );
                }
                else
                {
                        sprintf( szForm+c,
                                "Carrier Number:
%2.2d<BR> <BR>"
                                "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR>
" <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> </font></PRE>"
                                "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Payment..\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Delivery..\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
                                "<INPUT TYPE=\"submit\"
NAME=\"CMD\" VALUE=\"..Exit..\">"
                                "</BODY></FORM></HTML>"
                                , pDeliveryData->o_carrier_id,
                                (pDeliveryData->exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed "
                );

```

```

    }
}

/* FUNCTION: ProcessNewOrderForm
 * PURPOSE:      This function gets and validates
the input data from the new order form
 *              filling in the required
input variables. it then calls the SQLNewOrder
 *              transaction, constructs
the output form and writes it back to client
 *              browser.
 */

void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
 *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA      pNewOrder;

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();

    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
 * PURPOSE:      This function gets and validates
the input data from the payment form
 *              filling in the required
input variables. It then calls the SQLPayment
 *              transaction, constructs
the output form and writes it back to client
 *              browser.
 * ARGUMENTS:   EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
 *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA      pPayment;

```

```

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);

    Term.pClientData[iTermId].pTxn->Payment();

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
 * PURPOSE:      This function gets and validates
the input data from the Order Status
 *              form filling in the
required input variables. It then calls the
 *              SQLOrderStatus
transaction, constructs the output form and writes it
 *              back to client browser.
 * ARGUMENTS:   EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
 *pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm

```

```

 *
 * PURPOSE:      This function gets and validates
the input data from the delivery form
 *              filling in the required
input variables. It then calls the PostDeliveryInfo
 *              Api, The client is then
informed that the transaction has been posted.
 *
 * ARGUMENTS:   EXTENSION_CONTROL_BLOCK
 *pECB          passed in structure pointer from
inetsrv.
 *              int
 *              iTermId  client browser terminal id
 */

void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
 *pECB, int iTermId, char *szBuffer)
{
    char      *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA      pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id      =
GetIntKeyValue(&ptr, "OCD*");
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_CARRIER_INVALID);
    if ( pDelivery->o_carrier_id > 10 ||
pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
        Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

```

```

/* FUNCTION: ProcessStockLevelForm
 *
 * PURPOSE: This function gets and validates
the input data from the Stock Level
 * form filling in the
required input variables. It then calls the
 * SQLStockLevel
transaction, constructs the output form and writes it
 * back to client browser.
 *
 * ARGUMENTS: EXTENSION_CONTROL_BLOCK
 *pECB passed in structure pointer from
inetsrv.
 * int
 * iTermId client browser terminal id
 */
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
 *pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;
    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );
    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;
    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT*",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID);
    if ( pStockLevel->threshold >= 100 ||
pStockLevel->threshold < 0 )
        throw new CWBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );
    Term.pClientData[iTermId].pTxn-
>StockLevel();
    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}
/* FUNCTION: GetNewOrderData
 *

```

```

 * PURPOSE: This function extracts and
validates the new order form data from an http
command string.
 *
 * ARGUMENTS: LPSTR client
lpszQueryString browser http command string
 *
NEW_ORDER_DATA *pNewOrderData
pointer to new order data structure
 */
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char szTmp[26];
    int i;
    short items;
    int ol_i_id, ol_quantity;
    char *ptr = lpszQueryString;
    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
=
"SP03*", "SP04*", {"SP00*", "SP01*", "SP02*",
"SP03*", "SP04*", "SP05*", "SP06*", "SP07*",
"SP08*", "SP09*", "SP10*", "SP11*", "SP12*",
"SP13*", "SP14*"};
    static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
"IID03*", "IID04*", {"IID00*", "IID01*", "IID02*",
"IID03*", "IID04*", "IID05*", "IID06*", "IID07*",
"IID08*", "IID09*", "IID10*", "IID11*", "IID12*",
"IID13*", "IID14*"};
    static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
"Qty03*", "Qty04*", {"Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*", "Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*", "Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*"};
    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_CUSTOMER_INVALID);
    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEWORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {

```

```

            if ( !IsNumeric(szTmp)
)
                throw new
CWBCLNT_ERR( ERR_NEWORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);
            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_ITEMID_RANGE );
            ol_quantity =
pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_QTY_INVALID);
            if ( ol_quantity > 99
|| ol_quantity < 1 )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_QTY_RANGE );
            items++;
        }
        else
        {
            // nothing entered for
supply warehouse, so item id and qty must also be
blank
            GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_IID_KEY);
            if ( szTmp[0] )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_ITEMID_WITHOUT_SUPPW );
            GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEWORDER_MISSING_QTY_KEY);
            if ( szTmp[0] )
                throw new
CWBCLNT_ERR( ERR_NEWORDER_QTY_WITHOUT_SUPPW );
        }
        if ( items == 0 )
            throw new CWBCLNT_ERR(
ERR_NEWORDER_NOITEMS_ENTERED );
        pNewOrderData->o_ol_cnt = items;
    }
}
/* FUNCTION: GetPaymentData
 *

```

```

* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS:   LPSTR          client
                lpszQueryString
browser http command string
*
                PAYMENT_DATA
                pointer to
                *pPaymentData
payment data structure
*/

void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    BOOL        bCustIdBlank;
    int         iLen;

    pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )
    {
        bCustIdBlank = TRUE;
        pPaymentData->c_id = 0;
    }
    else
    {
        // parse customer id and verify
        that last name was NOT entered
        bCustIdBlank = FALSE;
        if ( !IsNumeric(szTmp) )
            throw new CWBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
        pPaymentData->c_id = atoi(szTmp);
    }

    pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
    pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

    if ( bCustIdBlank )
    {
        // customer id is blank, so last
        name must be entered
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )

```

```

                throw new CWBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );

        strcpy(pPaymentData->c_last,
szTmp);
        // pad with spaces so that the
        client layer doesn't have to do it
        // before passing parameters to
        stored procedure
        iLen = strlen(pPaymentData-
>c_last);
        memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
        pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
        that last name was NOT entered
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWBCLNT_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if ( !IsDecimal(szTmp) )
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if ( pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWBCLNT_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE:      This function extracts and
validates the payment form data from an http command
string.
*
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char        szTmp[26];
    char        *ptr = lpszQueryString;
    int         iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID*",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if ( szTmp[0] == 0 )

```

```

    {
        // customer id is blank, so last
        name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] == 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
        client layer doesn't have to do it
        // before passing parameters to
        stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
        pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
        that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if ( szTmp[0] != 0 )
            throw new CWBCLNT_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }
}

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE:      This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
*
* ARGUMENTS:   char
                *ptr          pointer to string to check.
*
* RETURNS:     BOOL          FALSE    if
string is not all numeric
                TRUE         if string contains only numeric
characters i.e. '0' - '9'
*/

```



```

BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !*ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
 *
 * PURPOSE: This function determines if a
string is a non-negative decimal value.
 * It fails if any characters other than a
series of numbers followed by
 * a decimal point,
another series of numbers, and a null terminator are
present.
 * ARGUMENTS: char
 *ptr pointer to string to check.
 *
 * RETURNS: BOOL FALSE if
string is not a valid non-negative decimal value
 * TRUE if string is OK
 */
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if (*(dotptr+1) == 0)
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if (*(dotptr+1) != 0)
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point

```

```

        return bValid;
    }

tpcc.h


---


/* FILE: TPCC.H Microsoft
 *
TPC-C Kit Ver. 4.20.000 Copyright
 *
Microsoft, 1999 Copyright
 *
All Rights Reserved
 *
Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
PURPOSE: Header file for ISAPI TPCC.DLL,
defines structures and functions used in the isapi
tpcc.dll.
 */

//VERSION RESOURCE DEFINES
#define _APS_NEXT_RESOURCE_VALUE
101
#define _APS_NEXT_COMMAND_VALUE
40001
#define _APS_NEXT_CONTROL_VALUE
1000
#define _APS_NEXT_SYMED_VALUE
101

#define TP_MAX_RETRIES
50

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM
1
//beginning form no term id assigned, form
id
#define MAIN_MENU_FORM
2
//term id assigned main menu form id
#define NEW_ORDER_FORM
3
//new order form id
#define PAYMENT_FORM
4
//payment form id
#define DELIVERY_FORM
5
//delivery form id
#define ORDER_STATUS_FORM
6 //order
status id

```

```

#define STOCK_LEVEL_FORM
7 //stock level
form id

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree; //index of
next free element or -1 if this entry in use.
    int w_id; //warehouse
id assigned at welcome form
    int d_id; //district id
assigned at welcome form

    int iSyncId; //synchronization id
    int iTickCount; //time of
last access;

    CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;
//total allocated terminal array entries
    int iFreeList;
//next available terminal array element or
-1 if none
    int iMasterSyncId; //synchronization id
    CLIENTDATA *pClientData; //pointer to
allocated client data
} TERM;

typedef TERM *PTERM; //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,

```

```

ERR_COMMAND_UNDEFINED,
ERR_D_ID_INVALID,
ERR_DELIVERY_CARRIER_ID_RANGE,
ERR_DELIVERY_CARRIER_INVALID,
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_THREAD_FAILED,
ERR_GETPROCADDR_FAILED,
ERR_HTML_ILL_FORMED,
ERR_INVALID_SYNC_CONNECTION,
ERR_INVALID_TERMID,
ERR_LOADDLL_FAILED,
ERR_MAX_CONNECTIONS_EXCEEDED,
ERR_MEM_ALLOC_FAILED,
ERR_MISSING_REGISTRY_ENTRIES,
ERR_NEWORDER_CUSTOMER_INVALID,
ERR_NEWORDER_CUSTOMER_KEY,
ERR_NEWORDER_DISTRICT_INVALID,
ERR_NEWORDER_FORM_MISSING_DID,
ERR_NEWORDER_ITEMID_INVALID,
ERR_NEWORDER_ITEMID_RANGE,

ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
ERR_NEWORDER_MISSING_IID_KEY,
ERR_NEWORDER_MISSING_QTY_KEY,
ERR_NEWORDER_MISSING_SUPPW_KEY,
ERR_NEWORDER_NOITEMS_ENTERED,
ERR_NEWORDER_QTY_INVALID,
ERR_NEWORDER_QTY_RANGE,
ERR_NEWORDER_QTY_WITHOUT_SUPPW,
ERR_NEWORDER_SUPPW_INVALID,
ERR_NO_SERVER_SPECIFIED,
ERR_ORDERSTATUS_CID_AND_CLT,
ERR_ORDERSTATUS_CID_INVALID,
ERR_ORDERSTATUS_CLT_RANGE,
ERR_ORDERSTATUS_DID_INVALID,
ERR_ORDERSTATUS_MISSING_CID_CLT,
ERR_ORDERSTATUS_MISSING_CID_KEY,
ERR_ORDERSTATUS_MISSING_CLT_KEY,
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_PAYMENT_CDI_INVALID,
ERR_PAYMENT_CDI_AND_CLT,
ERR_PAYMENT_CUSTOMER_INVALID,
ERR_PAYMENT_CWI_INVALID,
ERR_PAYMENT_DISTRICT_INVALID,
ERR_PAYMENT_HAM_INVALID,
ERR_PAYMENT_HAM_RANGE,
ERR_PAYMENT_LAST_NAME_TOO_LONG,
ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_MISSING_CID_CLT,
ERR_PAYMENT_MISSING_CID_KEY,
ERR_PAYMENT_MISSING_CLT,
ERR_PAYMENT_MISSING_CLT_KEY,
ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_MISSING_HAM_KEY,

ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALID,
ERR_STOCKLEVEL_THRESHOLD_RANGE,
ERR_VERSION_MISMATCH,
ERR_W_ID_INVALID

```

```

};

class CWEBCLNT_ERR : public CBaseErr
{
public:
    CWEBCLNT_ERR(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    };

    CWEBCLNT_ERR(WEBERROR Err, char
    *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
        char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
        szTextDetail );
        m_SystemErr =
        dwSystemErr;
        m_szErrorText = NULL;
    };

    ~CWEBCLNT_ERR()
    {
        if (m_szTextDetail !=
        NULL)
            delete []
            m_szTextDetail;
        if (m_szErrorText !=
        NULL)
            delete []
            m_szErrorText;
    };

    WEBERROR m_Error;
    char
    *m_szTextDetail; //
    char
    *m_szErrorText;
    DWORD m_SystemErr;

    int ErrorType() {return
    ERR_TYPE_WEBDDL;};
    char *ErrorTypeStr() { return
    "WEBCLIENT"; }
    int ErrorNum() {return m_Error;};
    char *ErrorText();

};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4

```

```

#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncId);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);
int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);

```

```

void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
#undef APSTUDIO_READONLY_SYMBOLS

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifdef _MAC
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// Version
//
VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"

```

```

        BEGIN
            VALUE "Comments", "TPC-C HTML DLL Server
(DBLIB)\0"
            VALUE "CompanyName", "Microsoft\0"
            VALUE "FileDescription", "TPC-C HTML DLL
Server (DBLIB)\0"
            VALUE "FileVersion", "0, 4, 0, 0\0"
            VALUE "InternalName", "tpcc\0"
            VALUE "LegalCopyright", "Copyright ©
1997\0"
            VALUE "OriginalFilename", "tpcc.dll\0"
            VALUE "ProductName", "Microsoft tpcc\0"
            VALUE "ProductVersion", "0, 4, 0, 0\0"
        END
    END
    BLOCK "VarFileInfo"
    BEGIN
        VALUE "Translation", 0x409, 1200
    END
END

#endif // !_MAC

#ifdef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// TEXTINCLUDE
//
1 TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END
2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include \"afxres.h\"\r\n"
    "\0"
END
3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END
#endif // APSTUDIO_INVOKED

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// Dialog
//
IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"

```

```

FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON "OK",IDOK,129,7,50,14
    PUSHBUTTON "Cancel",IDCANCEL,129,24,50,14
END

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// DESIGNINFO
//
#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEPTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
END
#endif // APSTUDIO_INVOKED

#ifdef English (U.S.) resources
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
#endif

#ifdef APSTUDIO_INVOKED
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//

////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
#endif // not APSTUDIO_INVOKED

```

tpcc_com.cpp

```

/* FILE: TPCC_COM.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000 Copyright
 *
 * All Rights Reserved
 * not yet
 *
 * audited
 *
 * PURPOSE: Source file for TPC-C COM+ class
implementation.

```

```

*       Contact: Charles Levine
(clevine@microsoft.com)
*
*   Change history:
*       4.20.000 - first version
*/

// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_com.h"

#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\tpcc_com_all\src\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)
{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::~CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn          = NULL;
    m_pNewOrder     = NULL;
    m_pPayment      = NULL;
    m_pStockLevel   = NULL;
    m_pOrderStatus  = NULL;

    m_bSinglePool   = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData,0,ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);

```

```

    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for
each txn
        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }

    // call setcomplete to release each
component back into pool
    hr = m_pNewOrder->CallSetComplete();
    if (FAILED(hr))
        throw new CCOMERR(hr);

    if (!m_bSinglePool)
    {
        hr = m_pPayment-
>CallSetComplete();
        if (FAILED(hr))

```

```

            throw new CCOMERR(hr);

        hr = m_pStockLevel-
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);

        hr = m_pOrderStatus-
>CallSetComplete();
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

CTPCC_COM::~~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

```

```

}

void CTPCC_COM::StockLevel()
{
    VARIANT    vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT    vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);
    if (FAILED(hr))
        throw new CCOMERR( hr );
    memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData, vTxn_out.parray->rgsabound[0].cElements);
    SafeArrayDestroy(vTxn_out.parray);

    if ( m_pTxn->ErrorType != ERR_SUCCESS )
        throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

```

tpcc_com.h

```

/* FILE: TPCC_COM.H Microsoft
 * TPC-C Kit Ver. 4.20.000 Copyright
 * Microsoft, 1999 Copyright
 * All Rights Reserved
 * not yet
 audited
 * PURPOSE: Header file for TPC-C COM+ class
 implementation.
 * Change history:
 * 4.20.000 - first version
 */

#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

```

```

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CCOMERR : public CBaseErr
{
private:
    char m_szErrorText[64];

public:
    // use this interface for genuine
COM errors
    CCOMERR( HRESULT hr )
    {
        m_hr = hr;
        m_iErrorType = 0;
        m_iError = 0;
    }

    // use this interface to
impersonate a non-COM error type
    CCOMERR( int iErrorType, int
iError )
    {
        m_iErrorType =
iErrorType;
        m_iError = iError;
        m_hr = S_OK;
    }

    int m_hr;
    int m_iErrorType;
    int m_iError;

    // A CCOMERR class can
impersonate another class, which happens if the error
// was not actually a COM
Services error, but was simply transmitted back via
COM.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
ERR_TYPER_COM;
        else
            return
m_iErrorType;
    }

    char *ErrorTypeStr() { return
"COM"; }

    int ErrorNum() {return m_hr;}

    char *ErrorText()
    {
        if (m_hr == S_OK)

```

```

        sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
        else
            sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
        return m_szErrorText;
    }
};

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;

    // COM Interface pointers
    ITPCC*
m_pNewOrder;
    ITPCC*
m_pPayment;
    ITPCC*
m_pStockLevel;
    ITPCC*
m_pOrderStatus;

    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA NewOrder;
            PAYMENT_DATA Payment;
            DELIVERY_DATA Delivery;
            STOCK_LEVEL_DATA StockLevel;
            ORDER_STATUS_DATA OrderStatus;
        } u;
    } *m_pTxn;

public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; };

```

```

        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; };

        void NewOrder          ();
        void Payment           ();
        void StockLevel        ();
        void OrderStatus       ();
        void Delivery          ();
{ throw new CCOMERR(E_NOTIMPL); } // not supported
};

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);

```

tpcc_com_all.cpp

```

/*      FILE:          TPCC_COM_ALL.CPP
 *      Microsoft
 *
 *      TPC-C Kit Ver. 4.20.000
 *      Copyright
 *      Microsoft, 1999
 *      All Rights Reserved
 *
 *      Version
 *      4.10.000 audited by Richard Gimarc, Performance
 *      Metrics, 3/17/99
 *
 *      PURPOSE:      Implementation for TPC-C Tuxedo
 *      class.
 *      Contact:      Charles Levine
 *      (clevine@microsoft.com)
 *
 *      Change history:
 *      4.20.000 - updated rev number to
 *      match kit
 */

#define STRICT
#define WIN32_WINNT 0x0400
#define ATL_APARTMENT_THREADED

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override

```

```

//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>
//#include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"
//tpckit transaction
header contains definations of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"
// DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
OBJECT_ENTRY(CLSID_TPCC, CTPCC)
OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
OBJECT_ENTRY(CLSID_Payment, CPayment)
OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

static HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_DBLIB *pCTPCC_DBLIB_new;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
//
CRITICAL_SECTION hConnectCriticalSection;

```

```

////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD
dwReason, LPVOID /*lpReserved*/)
{
    char szDllName[128];

    try
    {
        if (dwReason ==
DLL_PROCESS_ATTACH)
        {
            _Module.Init(ObjectMap,
hInstance);

            DisableThreadLibraryCalls(hInstance);

            DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

            GetComputerName(szMyComputerName, &dwSize);

            szMyComputerName[dwSize] = 0;

            if (
ReadTPCCRegistrySettings( &Reg ))
            throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );

            if (Reg.eDB_Protocol ==
DBLIB)
            {
                strcpy(
szDllName, Reg.szPath );

                strcat(
szDllName, "tpcc_dblib.dll");

                hLibInstanceDb = LoadLibrary( szDllName );

                if
(hLibInstanceDb == NULL)

                throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDllName, GetLastError() );

                // get
function pointer to wrapper for class constructor

                pCTPCC_DBLIB_new = (TYPE_CTPCC_DBLIB*)
GetProcAddress(hLibInstanceDb, "CTPCC_DBLIB_new");

                if
(pCTPCC_DBLIB_new == NULL)

                throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );

                else if
(Reg.eDB_Protocol == ODBC)

```

```

        {
szDllName, Reg.szPath );          strcpy(
szDllName, "tpcc_odbc.dll");      strcat(
                                  }
                                  return TRUE;    // OK
                                  }
////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
    S_FALSE;
}
////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}
////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}
////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}
static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));
    _stprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
EVENTLOG_ERROR_TYPE, // event type
0, // event category
0, // event ID
NULL, // current user's
SID
2, // strings in
lpszStrings
0, // no bytes of raw
data
(LPCTSTR *)lpszStrings, // array of
error strings
NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}
/* FUNCTION: CCOMPONENT_ERR::ErrorText
*
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
    },
    { 0, ""
}
}

```

```

        {
szDllName, Reg.szPath );          strcpy(
szDllName, "tpcc_odbc.dll");      strcat(
                                  }
                                  return TRUE;    // OK
                                  }
////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
    S_FALSE;
}
////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}
////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}
////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}
static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));
    _stprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
EVENTLOG_ERROR_TYPE, // event type
0, // event category
0, // event ID
NULL, // current user's
SID
2, // strings in
lpszStrings
0, // no bytes of raw
data
(LPCTSTR *)lpszStrings, // array of
error strings
NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}
/* FUNCTION: CCOMPONENT_ERR::ErrorText
*
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
    },
    { 0, ""
}
}

```

```

        {
szDllName, Reg.szPath );          strcpy(
szDllName, "tpcc_odbc.dll");      strcat(
                                  }
                                  return TRUE;    // OK
                                  }
////////////////////////////////////
////////////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
    S_FALSE;
}
////////////////////////////////////
////////////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}
////////////////////////////////////
////////////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}
////////////////////////////////////
////////////////////////////////////
// DllUnregisterServer - Removes entries from the
system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}
static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];
    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("tpcc_com_all.dll"));
    _stprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;
    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
EVENTLOG_ERROR_TYPE, // event type
0, // event category
0, // event ID
NULL, // current user's
SID
2, // strings in
lpszStrings
0, // no bytes of raw
data
(LPCTSTR *)lpszStrings, // array of
error strings
NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}
inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}
/* FUNCTION: CCOMPONENT_ERR::ErrorText
*
*/
char* CCOMPONENT_ERR::ErrorText(void)
{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_LOADDLL_FAILED,
"Load of DLL failed. DLL="
},
        { ERR_GETPROCADDR_FAILED,
"Could not map proc in DLL. GetProcAddr
error. DLL="
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
    },
    { 0, ""
}
}

```

```

    };
};

char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {
        strcpy( szTmp,
errorMsgs[i].szMsg );
        break;
    }
    i++;
}

if (m_szTextDetail)
    strcat( szTmp, m_szTextDetail );
if (m_SystemErr)
    wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

m_szErrorText = new char[strlen(szTmp)+1];
strcpy( m_szErrorText, szTmp );
return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{
    // Pace connection close for VIA.
    //
    if (Reg.dwConnectDelay > 0)
    {
        EnterCriticalSection(&hConnectCriticalSection);

        Sleep(Reg.dwConnectDelay);
    }

    if (m_pTxn)
    {
        delete m_pTxn;
    }
}

```

```

    if (Reg.dwConnectDelay > 0)
    {
        LeaveCriticalSection(&hConnectCriticalSection);
    }
}

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;

    // get our object context
    HRESULT hr = CoGetObjectContext(
IID_IObjectContext, (void **)&pObjectContext );
pObjectContext->SetComplete();
ReleaseInterface(pObjectContext);
return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *
pUnk)
{
    // Code to access construction string, if
needed later...
    // if (!pUnk)
    // return E_UNEXPECTED;
    // IObjectConstructString * pString
= NULL;
    // HRESULT hr = pUnk-
>QueryInterface(IID_IObjectConstructString, (void
**)&pString);
    // pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        //
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSection);

            Sleep(Reg.dwConnectDelay);
        }

        if (Reg.eDB_Protocol == ODBC)
            m_pTxn =
pCTPCC_ODBC_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword,

szMyComputerName, Reg.szDbName,

```

```

Reg.szSPPrefix,
Reg.bCallNoDuplicatesNewOrder );
else if (Reg.eDB_Protocol ==
DBLIB)
    m_pTxn =
pCTPCC_DBLIB_new( Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, szMyComputerName, Reg.szDbName );

    if (Reg.dwConnectDelay > 0)
    {
        LeaveCriticalSection(&hConnectCriticalSection);
    }
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];

    _sntprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
e-
>ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    return E_FAIL;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object :Construct"));
    return E_FAIL;
}

return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA pNewOrder;
    COM_DATA *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();
        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));
        m_pTxn->NewOrder(); //
do the actual txn

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector(VT_UI1,

```



```

        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*) txn_out-
>parray->pvData;
        memcpy( &pData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005) ||
((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA    pPayment;
    COM_DATA          *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        m_pTxn->Payment();    //
do the actual txn

```

```

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*) txn_out-
>parray->pvData;
        memcpy( &pData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005) ||
((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::StockLevel(VARIANT txn_in,
VARIANT* txn_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA          *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

```

```

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();
        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
        txn_in.parray->rgsabound-
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*)txn_out-
>parray->pvData;
        memcpy( &pData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));
        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005) ||
((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txn_in,
VARIANT* txn_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA          *pData;
    try
    {
        pData = (COM_DATA*)txn_in.parray-
>pvData;

```

```

        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));

        m_pTxn->OrderStatus();

        VariantInit(txn_out);
        txn_out->vt = VT_SAFEARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
>cElements,
        txn_in.parray->rgsabound-
>cElements);
        txn_in.parray->rgsabound-
>cElements);
        pData = (COM_DATA*)txn_out-
>parray->pvData;

        memcpy( &pData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));

        pData->retval = ERR_SUCCESS;
        pData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_DBLIB) && (e->ErrorNum() == 10005)) ||
            ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        delete e;
        return E_FAIL;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));

        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        m_bCanBePooled = FALSE;
        return E_FAIL;
    }
}

```

tpcc_com_all.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

```

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:53 2005
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADERING( )

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__

#ifdef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__

#ifdef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

```

```

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

#ifdef __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */

#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__

#ifdef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */

#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__

#ifdef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */

#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

```

```

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#ifdef __TPCCLib_LIBRARY_DEFINED__
#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring][version][uuid] */

EXTERN_C const IID LIBID_TPCCLib;

EXTERN_C const CLSID CLSID_TPCC;

#ifdef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifdef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifdef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifdef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifdef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-00C04FBFE08B")
StockLevel;
#endif
#endif /* __TPCCLib_LIBRARY_DEFINED__ */

```

```

/* Additional Prototypes for ALL interfaces */
/* end of Additional Prototypes */

```

```

#ifdef __cplusplus
}
#endif

#endif

```

tpcc_com_all.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

```

```

#define APSTUDIO_READONLY_SYMBOLS
//
// Generated from the TEXTINCLUDE 2 resource.
//
#include "winres.h"

```

```

//
// English (U.S.) resources
//
#ifdef __cplusplus
extern "C"
#endif

```

```

#ifdef _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

```

```

#ifdef APSTUDIO_INVOKED
//
// TEXTINCLUDE
//

```

```

1 TEXTINCLUDE DISCARDABLE
BEGIN
"resource.h\0"
END

```

```

2 TEXTINCLUDE DISCARDABLE
BEGIN
#include "winres.h"\r\n"
"\0"
END

```

```

3 TEXTINCLUDE DISCARDABLE
BEGIN
"1 TYPELIB "tpcc_com_all.tlb"\r\n"
"\0"
END
#endif // APSTUDIO_INVOKED

```

```

#ifdef _MAC
//
// Version
//

```

```

VS_VERSION_INFO VERSIONINFO
FILEVERSION 1,0,0,1
PRODUCTVERSION 1,0,0,1
FILEFLAGSMASK 0x3fL
#ifdef _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x4L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN

```

```

BLOCK "StringFileInfo"
BEGIN
BLOCK "040904B0"
BEGIN
VALUE "CompanyName", "\0"
VALUE "FileDescription", "tpcc_com_all

```

```

Module\0"
VALUE "FileVersion", "1, 0, 0, 1\0"
VALUE "InternalName", "TPCCNEWORDER\0"
VALUE "LegalCopyright", "Copyright

```

```

1997\0"
VALUE "OriginalFilename",
"tpcc_com_all.DLL\0"
VALUE "ProductName", "tpcc_com_all

```

```

Module\0"
VALUE "ProductVersion", "1, 0, 0, 1\0"
VALUE "OLESelfRegister", "\0"

```

```

END
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200

```

```

END
#endif // !_MAC

```

```

//
// REGISTRY

```

```
//
IDR_TPCC          REGISTRY DISCARDABLE
"tpcc_com_all.rgs"
IDR_NEWORDER     REGISTRY DISCARDABLE
"tpcc_com_no.rgs"
IDR_ORDERSTATUS  REGISTRY DISCARDABLE
"tpcc_com_os.rgs"
IDR_PAYMENT      REGISTRY DISCARDABLE
"tpcc_com_pay.rgs"
IDR_STOCKLEVEL   REGISTRY DISCARDABLE
"tpcc_com_sl.rgs"

////////////////////////////////////
////////////////////////////////////
//
// String Table
//

STRINGTABLE DISCARDABLE
BEGIN
    IDS_PROJNAME        "tpcc_com_all"
END

#ifdef // English (U.S.) resources
////////////////////////////////////
////////////////////////////////////

#ifndef APSTUDIO_INVOKED
////////////////////////////////////
////////////////////////////////////
//
// Generated from the TEXTINCLUDE 3 resource.
//
1 TYPELIB "tpcc_com_all.tlb"

////////////////////////////////////
////////////////////////////////////
#endif // not APSTUDIO_INVOKED
```

tpcc_com_all.rgs

```
HKCR
{
    TPCC.AllTxns.1 = s 'All Txns Class'
    {
        CLSID = s '{122A3128-2520-11D3-
BA71-00C04FBFE08B}'
    }
    TPCC.AllTxns = s 'TPCC Class'
    {
        CurVer = s 'TPCC.AllTxns.1'
    }
    NoRemove CLSID
    {
        ForceRemove {122A3128-2520-11D3-
BA71-00C04FBFE08B} = s 'TPCC Class'
```

```
{
    ProgID = s
'TPCC.AllTxns.1'

    VersionIndependentProgID = s 'TPCC.AllTxns'
    InprocServer32 = s
'%MODULE%'
    {
        val
ThreadingModel = s 'Both'
    }
}
}
```

tpcc_com_all.i.c

```
#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:53 2005
*/
/*
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
```

```
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifdef !_MIDL_USE_GUIDDEF_

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

#ifdef !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00,
0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);
```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel, 0x2668369E, 0xA50D, 0x11D2, 0xBA, 0x4E, 0
x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:53 2005
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oicf, Wl, Zp8, env=Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#ifdef _M_IA64 || defined(_M_AMD64)

#ifdef __cplusplus
extern "C"{
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifdef _MIDL_USE_GUIDDEF_

#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif


```

```

#endif

#define
MIDL_DEFINE_GUID(type, name, l, w1, w2, b1, b2, b3, b4, b5, b6,
b7, b8) \

DEFINE_GUID(name, l, w1, w2, b1, b2, b3, b4, b5, b6, b7, b8)

#else // !_MIDL_USE_GUIDDEF_

#ifdef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifdef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type, name, l, w1, w2, b1, b2, b3, b4, b5, b6,
b7, b8) \
    const type name =
{ l, w1, w2, { b1, b2, b3, b4, b5, b6, b7, b8 } }

#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib, 0x122A3117, 0x2520, 0x11D3, 0xBA, 0x71, 0x00,
0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCCLib, 0x122A3128, 0x2520, 0x11D3, 0xBA, 0x71, 0x00, 0x
C0, 0x4F, 0xBF, 0xE0, 0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder, 0x975BAABF, 0x84A7, 0x11D2, 0xBA, 0x47, 0x0
0, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus, 0x266836AD, 0xA50D, 0x11D2, 0xBA, 0x4E,
0x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment, 0xCD02F7EF, 0xA4FA, 0x11D2, 0xBA, 0x4E, 0x00
, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

```

```

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel, 0x2668369E, 0xA50D, 0x11D2, 0xBA, 0x4E, 0
x00, 0xC0, 0x4F, 0xBF, 0xE0, 0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

```

tpcc_com_no.rgs

```

HKCR
{
    TPCC.NewOrder.1 = s 'NewOrder Class'
    {
        CLSID = s '{975BAABF-84A7-11D2-
BA47-00C04FBFE08B}'
    }
    TPCC.NewOrder = s 'NewOrder Class'
    {
        CurVer = s 'TPCC.NewOrder.1'
        NoRemove CLSID
        {
            ForceRemove {975BAABF-84A7-11D2-
BA47-00C04FBFE08B} = s 'NewOrder Class'
            {
                ProgID = s
                'TPCC.NewOrder.1'
                VersionIndependentProgID = s
                'TPCC.NewOrder'
                InprocServer32 = s
                '%MODULE%'
                {
                    val
                    ThreadingModel = s 'Both'
                }
            }
        }
    }
}

```

tpcc_com_os.rgs

```

HKCR
{
    TPCC.OrderStatus.1 = s 'OrderStatus Class'
    {
        CLSID = s '{266836AD-A50D-11D2-
BA4E-00C04FBFE08B}'
    }
    TPCC.OrderStatus = s 'OrderStatus Class'
    {

```

```

        CurVer = s 'TPCC.OrderStatus.1'
    }
    NoRemove CLSID
    {
        ForceRemove {266836AD-A50D-11D2-
BA4E-00C04FBFE08B} = s 'OrderStatus Class'
        {
            ProgID = s
'TPCC.OrderStatus.1'

            VersionIndependentProgID = s
'TPCC.OrderStatus'
            InprocServer32 = s
'%MODULE%'
        {
            val
ThreadingModel = s 'Both'
        }
    }
}

```

tpcc_com_pay.rgs

```

HKCR
{
    TPCC.Payment.1 = s 'Payment Class'
    {
        CLSID = s '{CD02F7EF-A4FA-11D2-
BA4E-00C04FBFE08B}'
    }
    TPCC.Payment = s 'Payment Class'
    {
        CurVer = s 'TPCC.Payment.1'
        NoRemove CLSID
        {
            ForceRemove {CD02F7EF-A4FA-11D2-
BA4E-00C04FBFE08B} = s 'Payment Class'
            {
                ProgID = s
'TPCC.Payment.1'

                VersionIndependentProgID = s 'TPCC.Payment'
                InprocServer32 = s
'%MODULE%'
            {
                val
ThreadingModel = s 'Both'
            }
        }
    }
}

```

tpcc_com_ps.h

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

```

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

```

```

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:43 2005
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

```

```

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifdef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

```

```

#include "rpc.h"
#include "rpcndr.h"

```

```

#ifdef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

```

```

#ifdef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

```

```

#ifdef __tpcc_com_ps_h_
#define __tpcc_com_ps_h_

```

```

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

```

```

/* Forward Declarations */

```

```

#ifdef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

```

```

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

```

```

#ifdef __cplusplus

```

```

extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

```

```

/* interface __MIDL_itf_tpcc_com_ps_0000 */
/* [local] */

```

```

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

```

```

#ifdef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object]
*/

```

```

EXTERN_C const IID IID_ITPCC;

```

```

#if defined(__cplusplus) && !defined(CINTERFACE)

```

```

MIDL_INTERFACE("FEE6AA2-84B1-11d2-BA47-
00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;

    virtual HRESULT __stdcall CallSetComplete(
        void) = 0;
};

```

```

#else /* C style interface */

```

```

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE *QueryInterface
)(
        ITPCC * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void **ppvObject);

    ULONG ( STDMETHODCALLTYPE *AddRef )(
        ITPCC * This);

    ULONG ( STDMETHODCALLTYPE *Release )(
        ITPCC * This);

    HRESULT ( STDMETHODCALLTYPE *NewOrder )(
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Payment )(
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Delivery )(
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *StockLevel )(
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *OrderStatus )(
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *CallSetComplete )(
        ITPCC * This);

    END_INTERFACE
} ITPCCVtbl;

interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl *lpVtbl;
};

#ifdef COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
(This)->lpVtbl->QueryInterface(This,riid,ppvObject)

```

```

#define ITPCC_AddRef(This) \
(This)->lpVtbl->AddRef(This)

#define ITPCC_Release(This) \
(This)->lpVtbl->Release(This)

#define ITPCC_NewOrder(This,txn_in,txn_out) \
(This)->lpVtbl->NewOrder(This,txn_in,txn_out)

#define ITPCC_Payment(This,txn_in,txn_out) \
(This)->lpVtbl->Payment(This,txn_in,txn_out)

#define ITPCC_Delivery(This,txn_in,txn_out) \
(This)->lpVtbl->Delivery(This,txn_in,txn_out)

#define ITPCC_StockLevel(This,txn_in,txn_out) \
(This)->lpVtbl->StockLevel(This,txn_in,txn_out)

#define ITPCC_OrderStatus(This,txn_in,txn_out) \
(This)->lpVtbl->OrderStatus(This,txn_in,txn_out)

#define ITPCC_CallSetComplete(This) \
(This)->lpVtbl->CallSetComplete(This)

#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT STDMETHODCALLTYPE ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_Delivery_Proxy(
    ITPCC * This,

```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_StockLevel_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_OrderStatus_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT STDMETHODCALLTYPE ITPCC_CallSetComplete_Proxy(
    ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */
unsigned long             __RPC_USER
VARIANT_UserSize(        unsigned long *, unsigned long
, VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
unsigned long *, unsigned char *, VARIANT * );

```

```

unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char
*, VARIANT * );
void
__RPC_USER
VARIANT_UserFree( unsigned long *, VARIANT * );

/* end of Additional Prototypes */

```

```

#ifdef __cplusplus
}
#endif

#endif

```

tpcc_com_ps_i.c

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

```

```

/* link this file in with the server and any clients
*/

```

```

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:43 2005
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

```

```

#ifdef __cplusplus
extern "C"{
#endif

```

```

#include <rpc.h>
#include <rpcndr.h>

```

```

#ifdef _MIDL_USE_GUIDDEF_

```

```

#ifdef INITGUID
#define INITGUID
#include <guiddef.h>

```

```

#undef INITGUID
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

```

```

#else // !_MIDL_USE_GUIDDEF_

```

```

#ifdef __IID_DEFINED__
#define __IID_DEFINED__

```

```

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

```

```

#endif // __IID_DEFINED__

```

```

#ifdef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

```

```

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
{1,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}

```

```

#endif !_MIDL_USE_GUIDDEF_

```

```

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0C
0,0x4F,0xBF,0xE0,0x8B);

```

```

#undef MIDL_DEFINE_GUID

```

```

#ifdef __cplusplus
}
#endif

```

```

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

```

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

```

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

```

```

/* link this file in with the server and any clients
*/

```

```

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:43 2005
*/

```

```

/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

```

```

#if defined(_M_IA64) || defined(_M_AMD64)

```

```

#ifdef __cplusplus
extern "C"{
#endif

```

```

#include <rpc.h>
#include <rpcndr.h>

```

```

#ifdef _MIDL_USE_GUIDDEF_

```

```

#ifdef INITGUID
#define INITGUID
#include <guiddef.h>
#undef INITGUID
#else
#include <guiddef.h>
#endif

```

```

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \

```

```

DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

```

```

#else // !_MIDL_USE_GUIDDEF_

```

```

#ifdef __IID_DEFINED__
#define __IID_DEFINED__

```

```

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

```

```

#endif // __IID_DEFINED__

```



```

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name =
    {l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0x0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64)*/

```

tpcc_com_ps_p.c

```

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:43 2005
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, Wl, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#ifdef _M_IA64
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/

```

```

#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifdef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#ifdef _RPC_WIN32__
#error Invalid build platform for this stub.
#endif

#ifdef TARGET_IS_NT40_OR_LATER
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:

```

```

#error -Oif or -Oicf, [wire_marshall] or
[user_marshall] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */

        FC_AUTO_HANDLE /*
                                0x33,
                                */
        Old Flags: object, OI2 /*
                                0x6c,
                                */
        /* 2 */ NdrFcLong( 0x0 ), /* 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* 3 */
        /* 8 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
        /* 10 */ NdrFcShort( 0x0 ), /* 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* 8 */
        /* 14 */ 0x7, /* OI2 Flags: srv must
size, clt must size, has return, */
                                0x3,
                                */
        /* Parameter txn_in */

        /* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
        /* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
        /* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

        /* Parameter txn_out */

        /* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
        /* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
        /* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

        /* Return value */

        /* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
        /* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
        /* 32 */ 0x8, /* FC_LONG */
                                0x0,
                                */
        0 /*

```

```

/* Procedure Payment */
/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */

/* Parameter txn_in */

/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
0x0, /*
0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */

```

```

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
0x0, /*
0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */

```

```

/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
0x0, /*
0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /*
3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
0x0, /*
0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /*
Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
/* 178 */ NdrFcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /*
1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
0x0, /*
0 */

0x0

};

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /*
0 */
/* 2 */
0x12, 0x0, /*
FC_UP */
/* 4 */ NdrFcShort( 0x3ca ), /* Offset=
970 (974) */
/* 6 */
0x2b, /*
FC_NON_ENCAPSULATED_UNION */
0x9, /*
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ), /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ), /* 16 */
/* 16 */ NdrFcShort( 0x2f ), /* 47 */
/* 18 */ NdrFcLong( 0x14 ), /* 20 */
/* 22 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ), /* 3 */
/* 28 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ), /* 17 */
/* 34 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */

```

```

/* 36 */ NdrFcLong( 0x2 ), /* 2 */
/* 40 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ), /* 4 */
/* 46 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ), /* 5 */
/* 52 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ), /* 11 */
/* 58 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ), /* 10 */
/* 64 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ), /* 6 */
/* 70 */ NdrFcShort( 0xe8 ), /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ), /* 7 */
/* 76 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ), /* 8 */
/* 82 */ NdrFcShort( 0xe2 ), /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ), /* 13 */
/* 88 */ NdrFcShort( 0xf4 ), /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ), /* 9 */
/* 94 */ NdrFcShort( 0x100 ), /* Offset=
256 (350) */
/* 96 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 100 */ NdrFcShort( 0x10c ), /* Offset=
268 (368) */
/* 102 */ NdrFcLong( 0x24 ), /* 36 */
/* 106 */ NdrFcShort( 0x31a ), /* Offset=
794 (900) */
/* 108 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 112 */ NdrFcShort( 0x314 ), /* Offset=
788 (900) */
/* 114 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 118 */ NdrFcShort( 0x312 ), /* Offset=
786 (904) */
/* 120 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 124 */ NdrFcShort( 0x310 ), /* Offset=
784 (908) */
/* 126 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 130 */ NdrFcShort( 0x30e ), /* Offset=
782 (912) */
/* 132 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 136 */ NdrFcShort( 0x30c ), /* Offset=
780 (916) */
/* 138 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 142 */ NdrFcShort( 0x30a ), /* Offset=
778 (920) */
/* 144 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 148 */ NdrFcShort( 0x308 ), /* Offset=
776 (924) */
/* 150 */ NdrFcLong( 0x400b ), /* 16395 */
/* 154 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (908) */
/* 156 */ NdrFcLong( 0x400a ), /* 16394 */
/* 160 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (912) */
/* 162 */ NdrFcLong( 0x4006 ), /* 16390 */

```

```

/* 166 */ NdrFcShort( 0x2fa ), /* Offset=
762 (928) */
/* 168 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 172 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (924) */
/* 174 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 178 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (932) */
/* 180 */ NdrFcLong( 0x400d ), /* 16397 */
/* 184 */ NdrFcShort( 0x2f0 ), /* Offset=
752 (936) */
/* 186 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 190 */ NdrFcShort( 0x2ee ), /* Offset=
750 (940) */
/* 192 */ NdrFcLong( 0x6000 ), /* 24576 */
/* 196 */ NdrFcShort( 0x2ec ), /* Offset=
748 (944) */
/* 198 */ NdrFcLong( 0x400c ), /* 16396 */
/* 202 */ NdrFcShort( 0x2ea ), /* Offset=
746 (948) */
/* 204 */ NdrFcLong( 0x10 ), /* 16 */
/* 208 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 210 */ NdrFcLong( 0x12 ), /* 18 */
/* 214 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 216 */ NdrFcLong( 0x13 ), /* 19 */
/* 220 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 222 */ NdrFcLong( 0x15 ), /* 21 */
/* 226 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 228 */ NdrFcLong( 0x16 ), /* 22 */
/* 232 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 234 */ NdrFcLong( 0x17 ), /* 23 */
/* 238 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 240 */ NdrFcLong( 0xe ), /* 14 */
/* 244 */ NdrFcShort( 0x2c8 ), /* Offset=
712 (956) */
/* 246 */ NdrFcLong( 0x400e ), /* 16398 */
/* 250 */ NdrFcShort( 0x2cc ), /* Offset=
716 (966) */
/* 252 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 256 */ NdrFcShort( 0x2ca ), /* Offset=
714 (970) */
/* 258 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 262 */ NdrFcShort( 0x286 ), /* Offset=
646 (908) */
/* 264 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 268 */ NdrFcShort( 0x284 ), /* Offset=
644 (912) */
/* 270 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 274 */ NdrFcShort( 0x282 ), /* Offset=
642 (916) */
/* 276 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 280 */ NdrFcShort( 0x278 ), /* Offset=
632 (912) */
/* 282 */ NdrFcLong( 0x4017 ), /* 16407 */

```

```

/* 286 */ NdrFcShort( 0x272 ), /* Offset=
626 (912) */
/* 288 */ NdrFcLong( 0x0 ), /* 0 */
/* 292 */ NdrFcShort( 0x0 ), /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ), /* 1 */
/* 298 */ NdrFcShort( 0x0 ), /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(299) */
/* 302 */
0x15, /*
FC_STRUCT */
0x7, /*
7 */
/* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 308 */
0x12, 0x0, /*
FC_UP */
/* 310 */ NdrFcShort( 0xc ), /* Offset= 12 (322) */
/* 312 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 314 */ NdrFcShort( 0x2 ), /* 2 */
/* 316 */ 0x9, /* Corr desc: FC_ULONG
*/
0x0, /*
*/
/* 318 */ NdrFcShort( 0xfffc ), /* -4 */
/* 320 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 322 */
0x17, /*
FC_CSTRUCT */
0x3, /*
3 */
/* 324 */ NdrFcShort( 0x8 ), /* 8 */
/* 326 */ NdrFcShort( 0xffffffff2 ), /* Offset= -
14 (312) */
/* 328 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 330 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 332 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */
/* 342 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 344 */ 0x0, /* 0 */

```

```

0x0, /*
0 */
/* 346 */ 0x0, /* 0 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x46, /*
70 */
/* 350 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 352 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */
/* 360 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 362 */ 0x0, /* 0 */
0x0, /*
0 */
/* 364 */ 0x0, /* 0 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x46, /*
70 */
/* 368 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */
0x12, 0x0, /*
FC_UP */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset=
508 (882) */
/* 376 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x49, /*
73 */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */
/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset=
276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset=
304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset=
328 (750) */

```

```

/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset=
352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset=
376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset=
400 (840) */
/* 442 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(441) */
/* 444 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 454 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xffffffff6e ), /* Offset= -
146 (322) */
/* 470 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 472 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 474 */
0x16, /*
FC_PSTRUCT */
0x3, /*
3 */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 480 */

```

```

0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD */
/* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xfffffd4 ), /* Offset= -
44 (444) */
/* 490 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 492 */ 0x8, /* FC_LONG */
0x5b, /*
FC_END */
/* 494 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 508 */ NdrFcShort( 0xfffff50 ), /* Offset= -
176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 512 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */
/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 522 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 524 */
0x11, 0x0, /*
FC_RP */
/* 526 */ NdrFcShort( 0xfffffe0 ), /* Offset= -
32 (494) */
/* 528 */
0x21, /*
FC_BOGUS_ARRAY */

```

```

0x3, /*
3 */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xfffff40 ), /* Offset= -
192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 556 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xfffffe0 ), /* Offset= -
32 (528) */
/* 562 */
0x1b, /*
FC_CARRAY */
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */
0x4b, /*
FC_PP */
0x5c, /*
FC_PAD */
/* 572 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */

```

```

/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset=
388 (974) */
/* 588 */
0x5b, /*
FC_END */
0x8, /*
FC_LONG */
/* 590 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 592 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER */
/* 602 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 604 */
0x11, 0x0, /*
FC_RP */
/* 606 */ NdrFcShort( 0xfffffd4 ), /* Offset= -
44 (562) */
/* 608 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 620 */ 0x0, /* 0 */
0x0, /*
0 */
/* 622 */ 0x0, /* 0 */
0x0, /*
0 */
/* 624 */ 0x0, /* 0 */
0x46, /*
70 */
/* 626 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */

```

```

0x0, /*
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYTE */
FC_END /*
/* 636 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
FC_LONG /*
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /*
0 */
/* 648 */ NdrFcShort( 0xfffffd8 ), /* Offset= -
40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
FC_END /*
/* 652 */
0x12, 0x0, /*
FC_UP /*
/* 654 */ NdrFcShort( 0xfffffe4 ), /* Offset= -
28 (626) */
/* 656 */
0x1b, /*
FC_CARRAY /*
0x3, /*
3 */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
0x4b, /*
FC_PP /*
0x5c, /*
FC_PAD /*
/* 666 */
0x48, /*
FC_VARIABLE_REPEAT */
0x49, /*
FC_FIXED_OFFSET */
/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xfffffd4 ), /* Offset= -
44 (636) */
/* 682 */

```

```

FC_END /*
0x5b, /*
FC_LONG /*
/* 684 */ 0x5c, /* FC_PAD */
FC_END /*
/* 686 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 688 */ NdrFcShort( 0x8 ), /* 8 */
/* 690 */ NdrFcShort( 0x0 ), /* 0 */
/* 692 */ NdrFcShort( 0x6 ), /* Offset= 6 (698) */
/* 694 */ 0x8, /* FC_LONG */
FC_POINTER /*
/* 696 */ 0x5c, /* FC_PAD */
FC_END /*
/* 698 */
0x11, 0x0, /*
FC_RP /*
/* 700 */ NdrFcShort( 0xfffffd4 ), /* Offset= -
44 (656) */
/* 702 */
0x1d, /*
FC_SMPARRAY /*
0x0, /*
0 */
/* 704 */ NdrFcShort( 0x8 ), /* 8 */
/* 706 */ 0x1, /* FC_BYTE */
FC_END /*
/* 708 */
0x15, /*
FC_STRUCT */
0x3, /*
3 */
/* 710 */ NdrFcShort( 0x10 ), /* 16 */
/* 712 */ 0x8, /* FC_LONG */
FC_SHORT /*
/* 714 */ 0x6, /* FC_SHORT */
FC_EMBEDDED_COMPLEX /*
/* 716 */ 0x0, /* 0 */
NdrFcShort( 0xfffffff1
), /* Offset= -15 (702) */
FC_END /*
/* 720 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */

```

```

/* 728 */ 0x8, /* FC_LONG */
0x36, /*
FC_POINTER /*
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /*
0 */
/* 732 */ NdrFcShort( 0xffffffe8 ), /* Offset= -
24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
FC_END /*
/* 736 */
0x11, 0x0, /*
FC_RP /*
/* 738 */ NdrFcShort( 0xfffff0c ), /* Offset= -
244 (494) */
/* 740 */
0x1b, /*
FC_CARRAY /*
0x0, /*
0 */
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
FC_END /*
/* 750 */
0x16, /*
FC_PSTRUCT /*
0x3, /*
3 */
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */
0x4b, /*
FC_PP /*
0x5c, /*
FC_PAD /*
/* 756 */
0x46, /*
FC_NO_REPEAT */
0x5c, /*
FC_PAD /*
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffffffe8 ), /* Offset= -
24 (740) */
/* 766 */
0x5b, /*
FC_END /*
0x8, /*
FC_LONG /*
/* 768 */ 0x8, /* FC_LONG */
FC_END /*
0x5b, /*

```

<pre> /* 770 */ FC_CARRAY */ 1 */ /* 772 */ NdrFcShort(0x2), /* 2 */ /* 774 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, */ /* 776 */ NdrFcShort(0x0), /* 0 */ /* 778 */ 0x6, /* FC_SHORT */ 0x5b, FC_END */ /* 780 */ FC_PSTRUCT */ 0x16, 3 */ /* 782 */ NdrFcShort(0x8), /* 8 */ /* 784 */ 0x4b, FC_PP */ 0x5c, FC_PAD */ /* 786 */ 0x46, FC_NO_REPEAT */ 0x5c, FC_PAD */ /* 788 */ NdrFcShort(0x4), /* 4 */ /* 790 */ NdrFcShort(0x4), /* 4 */ /* 792 */ 0x12, 0x0, /* FC_UP */ /* 794 */ NdrFcShort(0xffffffff), /* Offset= - 24 (770) */ /* 796 */ 0x5b, FC_END */ 0x8, FC_LONG */ /* 798 */ 0x8, /* FC_LONG */ 0x5b, FC_END */ /* 800 */ 0x1b, FC_CARRAY */ 0x3, 3 */ /* 802 */ NdrFcShort(0x4), /* 4 */ /* 804 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, */ /* 806 */ NdrFcShort(0x0), /* 0 */ /* 808 */ 0x8, /* FC_LONG */ 0x5b, FC_END */ /* 810 */ 0x16, FC_PSTRUCT */ </pre>	<pre> 3 */ /* 812 */ NdrFcShort(0x8), /* 8 */ /* 814 */ FC_PP */ 0x4b, FC_PAD */ /* 816 */ 0x5c, FC_NO_REPEAT */ 0x5c, FC_PAD */ /* 818 */ NdrFcShort(0x4), /* 4 */ /* 820 */ NdrFcShort(0x4), /* 4 */ /* 822 */ 0x12, 0x0, /* FC_UP */ /* 824 */ NdrFcShort(0xffffffff), /* Offset= - 24 (800) */ /* 826 */ 0x5b, FC_END */ 0x8, FC_LONG */ /* 828 */ 0x8, /* FC_LONG */ 0x5b, FC_END */ /* 830 */ 0x1b, FC_CARRAY */ 0x7, 7 */ /* 832 */ NdrFcShort(0x8), /* 8 */ /* 834 */ 0x19, /* Corr desc: field pointer, FC_ULONG */ 0x0, */ /* 836 */ NdrFcShort(0x0), /* 0 */ /* 838 */ 0xb, /* FC_HYPER */ 0x5b, FC_END */ /* 840 */ 0x16, FC_PSTRUCT */ 0x3, 3 */ /* 842 */ NdrFcShort(0x8), /* 8 */ /* 844 */ 0x4b, FC_PP */ 0x5c, FC_PAD */ /* 846 */ 0x46, FC_NO_REPEAT */ 0x5c, FC_PAD */ /* 848 */ NdrFcShort(0x4), /* 4 */ /* 850 */ NdrFcShort(0x4), /* 4 */ /* 852 */ 0x12, 0x0, /* FC_UP */ </pre>	<pre> /* 854 */ NdrFcShort(0xffffffff), /* Offset= - 24 (830) */ /* 856 */ 0x5b, FC_END */ 0x8, FC_LONG */ /* 858 */ 0x8, /* FC_LONG */ 0x5b, FC_END */ /* 860 */ 0x15, FC_STRUCT */ 0x3, 3 */ /* 862 */ NdrFcShort(0x8), /* 8 */ /* 864 */ 0x8, /* FC_LONG */ 0x8, FC_LONG */ /* 866 */ 0x5c, /* FC_PAD */ 0x5b, FC_END */ /* 868 */ 0x1b, FC_CARRAY */ 0x3, 3 */ /* 870 */ NdrFcShort(0x8), /* 8 */ /* 872 */ 0x7, /* Corr desc: FC_USHORT */ 0x0, */ /* 874 */ NdrFcShort(0xffd8), /* -40 */ /* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ 0x0, 0 */ /* 878 */ NdrFcShort(0xffffffff), /* Offset= - 18 (860) */ /* 880 */ 0x5c, /* FC_PAD */ 0x5b, FC_END */ /* 882 */ 0x1a, FC_BOGUS_STRUCT */ 0x3, 3 */ /* 884 */ NdrFcShort(0x28), /* 40 */ /* 886 */ NdrFcShort(0xffffffff), /* Offset= - 18 (868) */ /* 888 */ NdrFcShort(0x0), /* Offset= 0 (888) */ /* 890 */ 0x6, /* FC_SHORT */ 0x6, FC_SHORT */ /* 892 */ 0x8, /* FC_LONG */ 0x8, FC_LONG */ /* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ </pre>
--	---	--

```

0x0, /*
/* 896 */ NdrFcShort( 0xfffffd8 ), /* Offset= -
520 (376) */
/* 898 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 900 */
0x12, 0x0, /*
FC_UP */
/* 902 */ NdrFcShort( 0xfffffef6 ), /* Offset= -
266 (636) */
/* 904 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 906 */ 0x1, /* FC_BYTE */
0x5c, /*
FC_PAD */
/* 908 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 910 */ 0x6, /* FC_SHORT */
0x5c, /*
FC_PAD */
/* 912 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 914 */ 0x8, /* FC_LONG */
0x5c, /*
FC_PAD */
/* 916 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 918 */ 0xb, /* FC_HYPER */
0x5c, /*
FC_PAD */
/* 920 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 922 */ 0xa, /* FC_FLOAT */
0x5c, /*
FC_PAD */
/* 924 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 926 */ 0xc, /* FC_DOUBLE */
0x5c, /*
FC_PAD */
/* 928 */
0x12, 0x0, /*
FC_UP */
/* 930 */ NdrFcShort( 0xfffffd8c ), /* Offset= -
628 (302) */
/* 932 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 934 */ NdrFcShort( 0xfffffd8e ), /* Offset= -
626 (308) */
/* 936 */
0x12, 0x10, /*
FC_UP [pointer_deref] */

```

```

/* 938 */ NdrFcShort( 0xffffda2 ), /* Offset= -
606 (332) */
/* 940 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xffffdb0 ), /* Offset= -
592 (350) */
/* 944 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xffffdbe ), /* Offset= -
578 (368) */
/* 948 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ), /* Offset= 2 (952) */
/* 952 */
0x12, 0x0, /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ), /* Offset= 20 (974) */
/* 956 */
0x15, /*
FC_STRUCT */
0x7, /*
7 */
/* 958 */ NdrFcShort( 0x10 ), /* 16 */
/* 960 */ 0x6, /* FC_SHORT */
0x1, /*
FC_BYTE */
/* 962 */ 0x1, /* FC_BYTE */
0x8, /*
FC_LONG */
/* 964 */ 0xb, /* FC_HYPER */
0x5b, /*
FC_END */
/* 966 */
0x12, 0x0, /*
FC_UP */
/* 968 */ NdrFcShort( 0xfffffff4 ), /* Offset= -
12 (956) */
/* 970 */
0x12, 0x8, /*
FC_UP [simple_pointer] */
/* 972 */ 0x2, /* FC_CHAR */
0x5c, /*
FC_PAD */
/* 974 */
0x1a, /*
FC_BOGUS_STRUCT */
0x7, /*
7 */
/* 976 */ NdrFcShort( 0x20 ), /* 32 */
/* 978 */ NdrFcShort( 0x0 ), /* 0 */
/* 980 */ NdrFcShort( 0x0 ), /* Offset= 0 (980) */
/* 982 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 984 */ 0x6, /* FC_SHORT */
0x6, /*
FC_SHORT */
/* 986 */ 0x6, /* FC_SHORT */

```

```

0x6, /*
FC_SHORT */
/* 988 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 990 */ NdrFcShort( 0xfffffc28 ), /* Offset= -
984 (6) */
/* 992 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 994 */ 0xb4, /* FC_USER_MARSHAL */
0x83, /*
131 */
/* 996 */ NdrFcShort( 0x0 ), /* 0 */
/* 998 */ NdrFcShort( 0x10 ), /* 16 */
/* 1000 */ NdrFcShort( 0x0 ), /* 0 */
/* 1002 */ NdrFcShort( 0xfffffc18 ), /*
Offset= -1000 (2) */
/* 1004 */
0x11, 0x4, /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ), /* Offset= 6
(1012) */
/* 1008 */
0x13, 0x0, /*
FC_OP */
/* 1010 */ NdrFcShort( 0xfffffcdc ), /*
Offset= -36 (974) */
/* 1012 */ 0xb4, /*
FC_USER_MARSHAL */
0x83, /*
131 */
/* 1014 */ NdrFcShort( 0x0 ), /* 0 */
/* 1016 */ NdrFcShort( 0x10 ), /* 16 */
/* 1018 */ NdrFcShort( 0x0 ), /* 0 */
/* 1020 */ NdrFcShort( 0xfffffff4 ), /*
Offset= -12 (1008) */
0x0
};
static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};
/* Standard interface: __MIDL_itf_tpc_c_com_ps_0000,
ver. 0.0,

```



```

GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,

GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,

GUID={0xFEEB6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0;
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0;
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,

```

```

    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x20000, /* Ndr library version */
    0,
    0x600015b, /* MIDL Version 6.0.0347 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* cs routines */
    0, /* proxy/server info */
    0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpsc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpsc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpsc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

```

```

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpsc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpsc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpsc_com_ps_StubVtblList,
    (const PCInterfaceName *) &
_tpsc_com_ps_InterfaceNamesList,
    0, /* no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#endif /* !defined(_M_IA64) && !defined(_M_AMD64)*/

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0347
*/
/* at Fri Apr 15 14:48:43 2005
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run,appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/

```

```

@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDQ_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}}, {2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

#if !defined(__RPC_WIN64__)
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,

    /* Procedure NewOrder */

    FC_AUTO_HANDLE /*
                                     0x33,
                                     */
    /*
                                     0x6c,
                                     */
    Old Flags: object, Oi2 /*
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
3 /*
/* 16 */ 0xa, /* 10 */
0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 18 */ NdrFcShort( 0x20 ), /* 32 */
/* 20 */ NdrFcShort( 0x20 ), /* 32 */
/* 22 */ NdrFcShort( 0x0 ), /* 0 */
/* 24 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

    /* 26 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 28 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 30 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

    /* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 34 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 36 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

    /* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 40 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */

```

```

/* 42 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure Payment */

    /* 44 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
0x3, /*
3 */
/* 60 */ 0xa, /* 10 */
0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

    /* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

    /* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

    /* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8, /* FC_LONG */
0x0, /*
0 */

    /* Procedure Delivery */

    /* 88 */ 0x33, /* FC_AUTO_HANDLE */

```

```

                                0x6c,          /*
Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
/* 104 */ 0xa, /* 10 */
/* 106 */ 0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8, /* FC_LONG */
/* 132 */ 0x0, /*
0 */

/* Procedure StockLevel */

/* 132 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 146 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
/* 148 */ 0xa, /* 10 */
/* 150 */ 0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8, /* FC_LONG */
/* 176 */ 0x0, /*
0 */

/* Procedure OrderStatus */

/* 176 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47, /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
/* 192 */ 0xa, /* 10 */
/* 194 */ 0x7, /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

/* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

/* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

/* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8, /* FC_LONG */
/* 220 */ 0x0, /*
0 */

/* Procedure CallSetComplete */

/* 220 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /*
Old Flags: object, Oi2 */
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44, /* Oi2 Flags: has
return, has ext, */
/* 236 */ 0xa, /* 10 */
/* 238 */ 0x1, /*
1 */
/* 236 */ 0xa, /* 10 */
/* 238 */ 0x1, /*
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

/* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */

```

```

/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8, /* FC_LONG */
0x0, /*
0 */
}
};
static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
0,
{
0 */
/* 2 */
FC_UP */
/* 4 */ NdrFcShort( 0x3b6 ), /* Offset=
950 (954) */
/* 6 */
FC_NON_ENCAPSULATED_UNION */
FC_ULONG */
/* 8 */ 0x7, /* Corr desc: FC_USHORT
*/
0x0, /*
*/
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 14 */ NdrFcShort( 0x2 ), /* Offset= 2 (16) */
/* 16 */ NdrFcShort( 0x10 ), /* 16 */
/* 18 */ NdrFcShort( 0x2f ), /* 47 */
/* 20 */ NdrFcLong( 0x14 ), /* 20 */
/* 24 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 26 */ NdrFcLong( 0x3 ), /* 3 */
/* 30 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 32 */ NdrFcLong( 0x11 ), /* 17 */
/* 36 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 38 */ NdrFcLong( 0x2 ), /* 2 */
/* 42 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 44 */ NdrFcLong( 0x4 ), /* 4 */
/* 48 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 50 */ NdrFcLong( 0x5 ), /* 5 */
/* 54 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 56 */ NdrFcLong( 0xb ), /* 11 */
/* 60 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 62 */ NdrFcLong( 0xa ), /* 10 */
/* 66 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */

```

```

/* 68 */ NdrFcLong( 0x6 ), /* 6 */
/* 72 */ NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
/* 74 */ NdrFcLong( 0x7 ), /* 7 */
/* 78 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 80 */ NdrFcLong( 0x8 ), /* 8 */
/* 84 */ NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
/* 86 */ NdrFcLong( 0xd ), /* 13 */
/* 90 */ NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
/* 92 */ NdrFcLong( 0x9 ), /* 9 */
/* 96 */ NdrFcShort( 0x102 ), /* Offset=
258 (354) */
/* 98 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 102 */ NdrFcShort( 0x10e ), /* Offset=
270 (372) */
/* 104 */ NdrFcLong( 0x24 ), /* 36 */
/* 108 */ NdrFcShort( 0x304 ), /* Offset=
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ), /* Offset=
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ), /* Offset=
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ), /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ), /* Offset=
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ), /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ), /* Offset=
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ), /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ), /* Offset=
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ), /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ), /* Offset=
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ), /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ), /* Offset=
754 (904) */
/* 152 */ NdrFcLong( 0x400b ), /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ), /* Offset=
732 (888) */
/* 158 */ NdrFcLong( 0x400a ), /* 16394 */
/* 162 */ NdrFcShort( 0x2da ), /* Offset=
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ), /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ), /* Offset=
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ), /* 16391 */
/* 174 */ NdrFcShort( 0x2da ), /* Offset=
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ), /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ), /* Offset=
732 (912) */
/* 182 */ NdrFcLong( 0x400d ), /* 16397 */
/* 186 */ NdrFcShort( 0x2da ), /* Offset=
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ), /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ), /* Offset=
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ), /* 24576 */

```

```

/* 198 */ NdrFcShort( 0x2d6 ), /* Offset=
726 (924) */
/* 200 */ NdrFcLong( 0x400c ), /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ), /* Offset=
724 (928) */
/* 206 */ NdrFcLong( 0x10 ), /* 16 */
/* 210 */ NdrFcShort( 0x8002 ), /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ), /* 18 */
/* 216 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ), /* 19 */
/* 222 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 224 */ NdrFcLong( 0x15 ), /* 21 */
/* 228 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ), /* 22 */
/* 234 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ), /* 23 */
/* 240 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ), /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ), /* Offset=
690 (936) */
/* 248 */ NdrFcLong( 0x400e ), /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ), /* Offset=
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ), /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ), /* Offset=
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ), /* 16402 */
/* 264 */ NdrFcShort( 0x270 ), /* Offset=
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ), /* 16403 */
/* 270 */ NdrFcShort( 0x26e ), /* Offset=
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ), /* 16405 */
/* 276 */ NdrFcShort( 0x26c ), /* Offset=
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ), /* 16406 */
/* 282 */ NdrFcShort( 0x262 ), /* Offset=
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ), /* 16407 */
/* 288 */ NdrFcShort( 0x25c ), /* Offset=
604 (892) */
/* 290 */ NdrFcLong( 0x0 ), /* 0 */
/* 294 */ NdrFcShort( 0x0 ), /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ), /* 1 */
/* 300 */ NdrFcShort( 0x0 ), /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xfffffff ), /* Offset= -1
(301) */
/* 304 */
FC_STRUCT */
0x15, /*
7 */
/* 306 */ NdrFcShort( 0x8 ), /* 8 */
/* 308 */ 0xb, /* FC_HYPER */

```

```

0x5b, /*
FC_END */
/* 310 */
0x12, 0x0, /*
FC_UP */
/* 312 */ NdrFcShort( 0xe ), /* Offset= 14 (326) */
/* 314 */
0x1b, /*
FC_CARRAY */
0x1, /*
1 */
/* 316 */ NdrFcShort( 0x2 ), /* 2 */
/* 318 */ 0x9, /* Corr desc: FC_ULONG */
0x0, /*
*/
/* 320 */ NdrFcShort( 0xfffc ), /* -4 */
/* 322 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 324 */ 0x6, /* FC_SHORT */
0x5b, /*
FC_END */
/* 326 */
0x17, /*
FC_CSTRUCT */
0x3, /*
3 */
/* 328 */ NdrFcShort( 0x8 ), /* 8 */
/* 330 */ NdrFcShort( 0xffffffff0 ), /* Offset= -
16 (314) */
/* 332 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 334 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 336 */
0x2E, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 338 */ NdrFcLong( 0x0 ), /* 0 */
/* 342 */ NdrFcShort( 0x0 ), /* 0 */
/* 344 */ NdrFcShort( 0x0 ), /* 0 */
/* 346 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 348 */ 0x0, /* 0 */
0x0, /*
0 */
/* 350 */ 0x0, /* 0 */
0x0, /*
0 */
/* 352 */ 0x0, /* 0 */
0x46, /*
70 */
/* 354 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */

```

```

/* 356 */ NdrFcLong( 0x20400 ), /* 132096 */
/* 360 */ NdrFcShort( 0x0 ), /* 0 */
/* 362 */ NdrFcShort( 0x0 ), /* 0 */
/* 364 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 366 */ 0x0, /* 0 */
0x0, /*
0 */
/* 368 */ 0x0, /* 0 */
0x0, /*
0 */
/* 370 */ 0x0, /* 0 */
0x46, /*
70 */
/* 372 */
0x12, 0x10, /*
FC_UP [pointer_deref] */
/* 374 */ NdrFcShort( 0x2 ), /* Offset= 2 (376) */
/* 376 */
0x12, 0x0, /*
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ), /* Offset=
484 (862) */
/* 380 */
0x2a, /*
FC_ENCAPSULATED_UNION */
0x89, /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffffffff ), /* Offset= -1
(445) */
/* 448 */

```

```

0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
0x12, 0x0, /*
FC_UP */
/* 466 */ NdrFcShort( 0xffffffff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 470 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 480 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 482 */
0x11, 0x0, /*
FC_RP */
/* 484 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (448) */
/* 486 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early, */
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
0x0, /*
0 */

```

```

/* 504 */ NdrFcShort( 0xffffffff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 508 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 518 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 520 */
0x11, 0x0, /*
FC_RP */
/* 522 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (486) */
/* 524 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 526 */ NdrFcShort( 0x0 ), /* 0 */
/* 528 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 534 */ NdrFcLong( 0xffffffffff ), /* -1 */
/* 538 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 542 */ NdrFcShort( 0xffffffff44 ), /* Offset= -
188 (354) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 546 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 556 */ 0x36, /* FC_POINTER */

```

```

0x5b, /*
FC_END */
/* 558 */
0x11, 0x0, /*
FC_RP */
/* 560 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (524) */
/* 562 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/* 570 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 572 */ NdrFcLong( 0xffffffffff ), /* -1 */
/* 576 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 578 */
0x12, 0x0, /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c, /* FC_PAD */
0x5b, /*
FC_END */
/* 584 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 586 */ NdrFcShort( 0x10 ), /* 16 */
/* 588 */ NdrFcShort( 0x0 ), /* 0 */
/* 590 */ NdrFcShort( 0x6 ), /* Offset= 6 (596) */
/* 592 */ 0x8, /* FC_LONG */
0x40, /*
FC_STRUCTPAD4 */
/* 594 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 596 */
0x11, 0x0, /*
FC_RP */
/* 598 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (562) */
/* 600 */
0x2f, /*
FC_IP */
0x5a, /*
FC_CONSTANT_IID */
/* 602 */ NdrFcLong( 0x2f ), /* 47 */
/* 606 */ NdrFcShort( 0x0 ), /* 0 */
/* 608 */ NdrFcShort( 0x0 ), /* 0 */
/* 610 */ 0xc0, /* 192 */
0x0, /*
0 */
/* 612 */ 0x0, /* 0 */

```

```

0x0, /*
0 */
/* 614 */ 0x0, /* 0 */
0x0, /*
0 */
/* 616 */ 0x0, /* 0 */
0x46, /*
70 */
/* 618 */
0x1b, /*
FC_CARRAY */
0x0, /*
0 */
/* 620 */ NdrFcShort( 0x1 ), /* 1 */
/* 622 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 624 */ NdrFcShort( 0x4 ), /* 4 */
/* 626 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 628 */ 0x1, /* FC_BYTE */
0x5b, /*
FC_END */
/* 630 */
0x1a, /*
FC_BOGUS_STRUCT */
0x3, /*
3 */
/* 632 */ NdrFcShort( 0x18 ), /* 24 */
/* 634 */ NdrFcShort( 0x0 ), /* 0 */
/* 636 */ NdrFcShort( 0xa ), /* Offset= 10 (646) */
/* 638 */ 0x8, /* FC_LONG */
0x8, /*
FC_LONG */
/* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
0x0, /*
0 */
/* 642 */ NdrFcShort( 0xffffffffd6 ), /* Offset= -
42 (600) */
/* 644 */ 0x36, /* FC_POINTER */
0x5b, /*
FC_END */
/* 646 */
0x12, 0x0, /*
FC_UP */
/* 648 */ NdrFcShort( 0xfffffffffe2 ), /* Offset= -
30 (618) */
/* 650 */
0x21, /*
FC_BOGUS_ARRAY */
0x3, /*
3 */
/* 652 */ NdrFcShort( 0x0 ), /* 0 */
/* 654 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
0x0, /*
*/
/* 656 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 658 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 660 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 664 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 666 */
                                0x12, 0x0, /*
FC_UP */
/* 668 */ NdrFcShort( 0xffffffffda ), /* Offset= -
38 (630) */
/* 670 */ 0x5c, /* FC_PAD */
                                0x5b, /*
FC_END */
/* 672 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 674 */ NdrFcShort( 0x10 ), /* 16 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ NdrFcShort( 0x6 ), /* Offset= 6 (684) */
/* 680 */ 0x8, /* FC_LONG */
                                0x40, /*
FC_STRUCTPAD4 */
/* 682 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 684 */
                                0x11, 0x0, /*
FC_RP */
/* 686 */ NdrFcShort( 0xffffffffdc ), /* Offset= -
36 (650) */
/* 688 */
                                0x1d, /*
FC_SMFARRAY */
                                0x0, /*
0 */
/* 690 */ NdrFcShort( 0x8 ), /* 8 */
/* 692 */ 0x1, /* FC_BYTE */
                                0x5b, /*
FC_END */
/* 694 */
                                0x15, /*
FC_STRUCT */
                                0x3, /*
3 */
/* 696 */ NdrFcShort( 0x10 ), /* 16 */
/* 698 */ 0x8, /* FC_LONG */
                                0x6, /*
FC_SHORT */
/* 700 */ 0x6, /* FC_SHORT */
                                0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 702 */ 0x0, /* 0 */
                                NdrFcShort( 0xfffffffff1
), /* Offset= -15 (688) */
                                0x5b, /*
FC_END */
/* 706 */
                                0x1a, /*
FC_BOGUS_STRUCT */

```

```

                                0x3, /*
3 */
/* 708 */ NdrFcShort( 0x20 ), /* 32 */
/* 710 */ NdrFcShort( 0x0 ), /* 0 */
/* 712 */ NdrFcShort( 0xa ), /* Offset= 10 (722) */
/* 714 */ 0x8, /* FC_LONG */
                                0x40, /*
FC_STRUCTPAD4 */
/* 716 */ 0x36, /* FC_POINTER */
                                0x4c, /*
FC_EMBEDDED_COMPLEX */
/* 718 */ 0x0, /* 0 */
                                NdrFcShort( 0xffffffffe7
), /* Offset= -25 (694) */
                                0x5b, /*
FC_END */
/* 722 */
                                0x11, 0x0, /*
FC_RP */
/* 724 */ NdrFcShort( 0xffffffff12 ), /* Offset= -
238 (486) */
/* 726 */
                                0x1b, /*
FC_CARRAY */
                                0x0, /*
0 */
/* 728 */ NdrFcShort( 0x1 ), /* 1 */
/* 730 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 732 */ NdrFcShort( 0x0 ), /* 0 */
/* 734 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 736 */ 0x1, /* FC_BYTE */
                                0x5b, /*
FC_END */
/* 738 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 740 */ NdrFcShort( 0x10 ), /* 16 */
/* 742 */ NdrFcShort( 0x0 ), /* 0 */
/* 744 */ NdrFcShort( 0x6 ), /* Offset= 6 (750) */
/* 746 */ 0x8, /* FC_LONG */
                                0x40, /*
FC_STRUCTPAD4 */
/* 748 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 750 */
                                0x12, 0x0, /*
FC_UP */
/* 752 */ NdrFcShort( 0xffffffffe6 ), /* Offset= -
26 (726) */
/* 754 */
                                0x1b, /*
FC_CARRAY */
                                0x1, /*
1 */

```

```

/* 756 */ NdrFcShort( 0x2 ), /* 2 */
/* 758 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 760 */ NdrFcShort( 0x0 ), /* 0 */
/* 762 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 764 */ 0x6, /* FC_SHORT */
                                0x5b, /*
FC_END */
/* 766 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 768 */ NdrFcShort( 0x10 ), /* 16 */
/* 770 */ NdrFcShort( 0x0 ), /* 0 */
/* 772 */ NdrFcShort( 0x6 ), /* Offset= 6 (778) */
/* 774 */ 0x8, /* FC_LONG */
                                0x40, /*
FC_STRUCTPAD4 */
/* 776 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 778 */
                                0x12, 0x0, /*
FC_UP */
/* 780 */ NdrFcShort( 0xffffffffe6 ), /* Offset= -
26 (754) */
/* 782 */
                                0x1b, /*
FC_CARRAY */
                                0x3, /*
3 */
/* 784 */ NdrFcShort( 0x4 ), /* 4 */
/* 786 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0, /*
*/
/* 788 */ NdrFcShort( 0x0 ), /* 0 */
/* 790 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 792 */ 0x8, /* FC_LONG */
                                0x5b, /*
FC_END */
/* 794 */
                                0x1a, /*
FC_BOGUS_STRUCT */
                                0x3, /*
3 */
/* 796 */ NdrFcShort( 0x10 ), /* 16 */
/* 798 */ NdrFcShort( 0x0 ), /* 0 */
/* 800 */ NdrFcShort( 0x6 ), /* Offset= 6 (806) */
/* 802 */ 0x8, /* FC_LONG */
                                0x40, /*
FC_STRUCTPAD4 */
/* 804 */ 0x36, /* FC_POINTER */
                                0x5b, /*
FC_END */
/* 806 */

```

```

                                0x12, 0x0,      /*
FC_UP */
/* 808 */ NdrFcShort( 0xffffffe6 ), /* Offset= -
26 (782) */
/* 810 */
                                0x1b,        /*
FC_CARRAY */
                                0x7,         /*
7 */
/* 812 */ NdrFcShort( 0x8 ), /* 8 */
/* 814 */ 0x19, /* Corr desc: field
pointer, FC_ULONG */
                                0x0,        /*
*/
/* 816 */ NdrFcShort( 0x0 ), /* 0 */
/* 818 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 820 */ 0xb, /* FC_HYPER */
                                0x5b,      /*
FC_END */
/* 822 */
                                0x1a,        /*
FC_BOGUS_STRUCT */
                                0x3,         /*
3 */
/* 824 */ NdrFcShort( 0x10 ), /* 16 */
/* 826 */ NdrFcShort( 0x0 ), /* 0 */
/* 828 */ NdrFcShort( 0x6 ), /* Offset= 6 (834) */
/* 830 */ 0x8, /* FC_LONG */
                                0x40,      /*
FC_STRUCTPAD4 */
/* 832 */ 0x36, /* FC_POINTER */
                                0x5b,      /*
FC_END */
/* 834 */
                                0x12, 0x0,   /*
FC_UP */
/* 836 */ NdrFcShort( 0xffffffe6 ), /* Offset= -
26 (810) */
/* 838 */
                                0x15,        /*
FC_STRUCT */
                                0x3,         /*
3 */
/* 840 */ NdrFcShort( 0x8 ), /* 8 */
/* 842 */ 0x8, /* FC_LONG */
                                0x8,        /*
FC_LONG */
/* 844 */ 0x5c, /* FC_PAD */
                                0x5b,      /*
FC_END */
/* 846 */
                                0x1b,        /*
FC_CARRAY */
                                0x3,         /*
3 */
/* 848 */ NdrFcShort( 0x8 ), /* 8 */
/* 850 */ 0x7, /* Corr desc: FC_USHORT
*/
                                0x0,        /*
*/

```

```

/* 852 */ NdrFcShort( 0xffc8 ), /* -56 */
/* 854 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 856 */ 0x4c, /* FC_EMBEDDED_COMPLEX
*/
                                0x0,        /*
0 */
/* 858 */ NdrFcShort( 0xfffffec ), /* Offset= -
20 (838) */
/* 860 */ 0x5c, /* FC_PAD */
                                0x5b,      /*
FC_END */
/* 862 */
                                0x1a,        /*
FC_BOGUS_STRUCT */
                                0x3,         /*
3 */
/* 864 */ NdrFcShort( 0x38 ), /* 56 */
/* 866 */ NdrFcShort( 0xfffffec ), /* Offset= -
20 (846) */
/* 868 */ NdrFcShort( 0x0 ), /* Offset= 0 (868) */
/* 870 */ 0x6, /* FC_SHORT */
                                0x6,        /*
FC_SHORT */
/* 872 */ 0x8, /* FC_LONG */
                                0x8,        /*
FC_LONG */
/* 874 */ 0x40, /* FC_STRUCTPAD4 */
                                0x4c,      /*
FC_EMBEDDED_COMPLEX */
/* 876 */ 0x0, /* 0 */
                                NdrFcShort( 0xffffe0f
), /* Offset= -497 (380) */
                                0x5b,      /*
FC_END */
/* 880 */
                                0x12, 0x0,   /*
FC_UP */
/* 882 */ NdrFcShort( 0xfffff04 ), /* Offset= -
252 (630) */
/* 884 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */
/* 886 */ 0x1, /* FC_BYTE */
                                0x5c,      /*
FC_PAD */
/* 888 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */
/* 890 */ 0x6, /* FC_SHORT */
                                0x5c,      /*
FC_PAD */
/* 892 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */
/* 894 */ 0x8, /* FC_LONG */
                                0x5c,      /*
FC_PAD */
/* 896 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */

```

```

/* 898 */ 0xb, /* FC_HYPER */
                                0x5c,      /*
FC_PAD */
/* 900 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */
/* 902 */ 0xa, /* FC_FLOAT */
                                0x5c,      /*
FC_PAD */
/* 904 */
                                0x12, 0x8,   /*
FC_UP [simple_pointer] */
/* 906 */ 0xc, /* FC_DOUBLE */
                                0x5c,      /*
FC_PAD */
/* 908 */
                                0x12, 0x0,   /*
FC_UP */
/* 910 */ NdrFcShort( 0xffffda2 ), /* Offset= -
606 (304) */
/* 912 */
                                0x12, 0x10,  /*
FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xffffda4 ), /* Offset= -
604 (310) */
/* 916 */
                                0x12, 0x10,  /*
FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xffffdba ), /* Offset= -
582 (336) */
/* 920 */
                                0x12, 0x10,  /*
FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0xffffdc8 ), /* Offset= -
568 (354) */
/* 924 */
                                0x12, 0x10,  /*
FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xffffdd6 ), /* Offset= -
554 (372) */
/* 928 */
                                0x12, 0x10,  /*
FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ), /* Offset= 2 (932) */
/* 932 */
                                0x12, 0x0,   /*
FC_UP */
/* 934 */ NdrFcShort( 0x14 ), /* Offset= 20 (954) */
/* 936 */
                                0x15,        /*
FC_STRUCT */
                                0x7,         /*
7 */
/* 938 */ NdrFcShort( 0x10 ), /* 16 */
/* 940 */ 0x6, /* FC_SHORT */
                                0x1,        /*
FC_BYTE */
/* 942 */ 0x1, /* FC_BYTE */
                                0x8,        /*
FC_LONG */
/* 944 */ 0xb, /* FC_HYPER */

```



```

                                0x5b,          /*
FC_END */
/* 946 */
                                0x12, 0x0,      /*
FC_UP */
/* 948 */ NdrFcShort( 0xffffffff4 ), /* Offset= -
12 (936) */
/* 950 */
                                0x12, 0x8,      /*
FC_UP [simple_pointer] */
/* 952 */ 0x2,          /* FC_CHAR */
                                0x5c,          /*
FC_PAD */
/* 954 */
                                0x1a,          /*
FC_BOGUS_STRUCT */
                                0x7,          /*
7 */
/* 956 */ NdrFcShort( 0x20 ), /* 32 */
/* 958 */ NdrFcShort( 0x0 ), /* 0 */
/* 960 */ NdrFcShort( 0x0 ), /* Offset= 0 (960) */
/* 962 */ 0x8,          /* FC_LONG */
                                0x8,          /*
FC_LONG */
/* 964 */ 0x6,          /* FC_SHORT */
                                0x6,          /*
FC_SHORT */
/* 966 */ 0x6,          /* FC_SHORT */
                                0x6,          /*
FC_SHORT */
/* 968 */ 0x4c,        /* FC_EMBEDDED_COMPLEX
*/
                                0x0,          /*
0 */
/* 970 */ NdrFcShort( 0xfffffc3c ), /* Offset= -
964 (6) */
/* 972 */ 0x5c,          /* FC_PAD */
                                0x5b,          /*
FC_END */
/* 974 */ 0xb4,        /* FC_USER_MARSHAL */
                                0x83,          /*
131 */
/* 976 */ NdrFcShort( 0x0 ), /* 0 */
/* 978 */ NdrFcShort( 0x18 ), /* 24 */
/* 980 */ NdrFcShort( 0x0 ), /* 0 */
/* 982 */ NdrFcShort( 0xfffffc2c ), /* Offset= -
980 (2) */
/* 984 */
                                0x11, 0x4,      /*
FC_RP [allocated_on_stack] */
/* 986 */ NdrFcShort( 0x6 ), /* Offset= 6 (992) */
/* 988 */
                                0x13, 0x0,      /*
FC_OP */
/* 990 */ NdrFcShort( 0xfffffcdc ), /* Offset= -
36 (954) */
/* 992 */ 0xb4,        /* FC_USER_MARSHAL */
                                0x83,          /*
131 */
/* 994 */ NdrFcShort( 0x0 ), /* 0 */
/* 996 */ NdrFcShort( 0x18 ), /* 24 */

```

```

/* 998 */ NdrFcShort( 0x0 ), /* 0 */
/* 1000 */ NdrFcShort( 0xffffffff4 ), /*
Offset= -12 (988) */
                                }
                                };
                                0x0
                                }
static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize
        ,VARIANT_UserMarshal
        ,VARIANT_UserUnmarshal
        ,VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0
x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xc0,0x00,0x00,0x00,0
x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEEE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0
x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    44,
    88,
    132,
    176,
    220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
    &Object_StubDesc,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,

```

```

0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    &Object_StubDesc,
    0,
    __MIDL_ProcFormatString.Format,
    &ITPCC_FormatStringOffsetTable[-3],
    0,
    0,
    0,
    0;
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy ,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete
*/
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
    0,
    NdrOleAllocate,
    NdrOleFree,
    0,
    0,
    0,
    0,
    0,
    0,
    __MIDL_TypeFormatString.Format,
    1, /* -error bounds_check flag */
    0x50002, /* Ndr library version */
    0,
    0x600015b, /* MIDL Version 6.0.347 */
    0,
    UserMarshalRoutines,
    0, /* notify & notify_flag routine table */
    0x1, /* MIDL flag */
    0, /* cs routines */
    0, /* proxy/server info */
    0 /* Reserved5 */

```

```

};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    ( CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    ( CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName *) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

```

```

#endif /* defined(_M_IA64) || defined(_M_AMD64) */



---


tpcc_com_sl.rgs


---


HKCR
{
    TPCC.StockLevel.1 = s 'StockLevel Class'
    {
        CLSID = s '{2668369E-A50D-11D2-
BA4E-00C04FBFE08B}'
    }
    TPCC.StockLevel = s 'StockLevel Class'
    {
        CurVer = s 'TPCC.StockLevel.1'
    }
    NoRemove CLSID
    {
        ForceRemove {2668369E-A50D-11D2-
BA4E-00C04FBFE08B} = s 'StockLevel Class'
    {
        ProgID = s
'TPCC.StockLevel.1'
        VersionIndependentProgID = s
'TPCC.StockLevel'
        InprocServer32 = s
'&MODULE%'
        {
            val
ThreadingModel = s 'Both'
        }
    }
}

```

tpcc_dblib.cpp

```

/* FILE: TPCC_DBLIB.CPP
 * Microsoft
 * TPC-C Kit Ver. 4.42.000
 * Copyright
 * Microsoft, 2002
 * All Rights Reserved
 *
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 *
 * PURPOSE: Implements dblib calls for TPC-C
 * txns.
 * Contact: Charles Levine
 * (clevine@microsoft.com)
 *
 * Change history:
 * 4.42.000 - changed w_id fields
 * from short to long to support >32K warehouses
 * 4.20.000 - updated rev number to
 * match kit

```

```

 * 4.10.001 - not deleting error
 * class in catch handler on deadlock retry;
 * not a
 * functional bug, but a memory leak
 * - had to
 * tweak some declarations to compile with latest SDK;
 * no functional change
 */

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL WINAPIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); //
            initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit(); //
            close all dblib structures/connections
            break;
    }
}

```

```

        default:
        } /* nothing */;
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
    return INT_CANCEL;
}

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE:      This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS:    DBPROCESS      *dbproc
DBPROCESS id pointer DBINT
*
*               msgno
message number
*
*               msgstate
message state
*
*               severity
message severity
*
*               *msgtext
char
printable
message description
*
* RETURNS:      int
INT_CONTINUE      continue if
error is SLETIME else INT_CANCEL action
*
*               INT_CANCEL
cancel operation
*
* COMMENTS:     This function also sets the dead
lock dbproc variable if necessary.
*
*/

// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

```

```

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }

    return 0;
}

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE:      This function copies n characters
from string pSrc to pDest and places a
*               null character at the
end of the destination string.
*
* ARGUMENTS:    char
*pDest      destination string pointer
char
*pSrc       source string pointer
int
n
number of characters to copy
*
* RETURNS:      None
*
* COMMENTS:     Unlike strncpy this function
ensures that the result string is
always null
terminated.
*/

inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*
*/

```

```

char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    }

}

};

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
workstation name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
LPCSTR szDatabase ) // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (

```

```

        LPCSTR szServer,          // name of
SQL server
        LPCSTR szUser,           //
user name for login
        LPCSTR szPassword,      // password
for login
        LPCSTR szHost,          //
workstation name: shows up in sp_who: max 30 chars,
only first 10 kept by SQL Server
        LPCSTR szDatabase )     // name of
database to use
{
    LOGINREC *login;
    const BYTE *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;          // how many
retries on deadlock

    // increase max number of connections if
getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5)
)
    {
        if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )

            ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler
functions
        if (dbprocerrhandle(login, err_handler) ==
NULL)

            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsghandle(login, msg_handler) ==
NULL)

            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETUSER(login, szUser);
        DBSETPWD(login, szPassword);
        DBSETHOST(login, szHost);
        DBSETLPACKET(login, (unsigned
short)DEFCLPCKSIZE);
        DBSETLVERSION(login, DBVER60);
        // use dblib ver 6.0 client behavior

```

```

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);

        // deallocate login structure before
checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that
the message and error handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        dbcmd(m_dbproc, "set nocount on ");
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON");
        // rollback transaction on abort

        if (dbsqlxec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);
        DiscardNextResults(2);

        // verify that version of stored procs on
server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);
        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        char szSrvVersion[16];
        pData=dbdata(m_dbproc, 1);
        if (pData)
            UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
        else
            szSrvVersion[0]=0;
        if (strcmp(szSrvVersion,sVersion)

```

```

            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

        DiscardNextRows(0);
        DiscardNextResults(0);
    }

    CTPCC_DBLIB::~CTPCC_DBLIB( void )
    {
        // close db connection and deallocate
resources
        dbclose(m_dbproc);
        InterlockedDecrement( &iConnectionCount );
        if (m_DbLibErr != NULL)
            delete m_DbLibErr;
        if (m_SqlErr != NULL)
            delete m_SqlErr;
    }

    void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
    {
        delete m_DbLibErr;
        m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

        if (dberrstr != NULL)
        {
            m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
            strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
        }

        if (oserrstr != NULL)
        {
            m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
            strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
        }
    }

    void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
    {
        if (m_SqlErr == NULL)
            m_SqlErr = new CSQLERR();

        m_SqlErr->m_msgno = msgno;
        m_SqlErr->m_msgstate = msgstate;
        m_SqlErr->m_severity = severity;

        delete [] m_SqlErr->m_msgtext;
        if (msgtext != NULL)
        {

```

```

        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION
eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DLib error.
    if (m_SqlErr != NULL)
    {
        CSQLErr      *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
    // this case isn't expected to
happen, since it means that an error was returned
not called.
    // but the error handlers were
        pDbLibErr = new
CDBLIBERR(eAction);
    else
    {
        pDbLibErr = m_DbLibErr;
        pDbLibErr->m_eAction = eAction;
        m_DbLibErr = NULL; //
clear our pointer to instance; catch handler will
delete
    }

    throw pDbLibErr;
}

// Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int          iRowsRead = 0;
    RETCODE     rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)

```

```

                break;
            if (rc == FAIL)
            {
                if (iExpectedCount >=
0)
                    ThrowError(CDBLIBERR::eDbNextRow);
                else
                    break;
            }
            iRowsRead++;
        }
        if ((iExpectedCount >= 0) &&
(iExpectedCount != iRowsRead))
            ThrowError(CDBLIBERR::eWrongRowCount);
    }

    // Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int
iExpectedCount)
{
    int          iResultsRead = 0;
    RETCODE     rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }
    if ((iExpectedCount >= 0) &&
(iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int          iTryCount =

```

```

        const BYTE      *pData;

        ResetError();

        while (TRUE)
        {
            try
            {
                dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);

                dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
                tinyint
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshold
                smallint

                if (dbrpcexec(m_dbproc)
== FAIL)
                    ThrowError(CDBLIBERR::eDbRpcExec);

                if (dbresults(m_dbproc)
!= SUCCEEDED)
                    ThrowError(CDBLIBERR::eDbResults);

                if (dbnextrow(m_dbproc)
!= REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if
(pData=dbdata(m_dbproc, 1))
                    m_txn.StockLevel.low_stock = *((long *)
pData);

                DiscardNextRows(0);
                DiscardNextResults(0);

                m_txn.StockLevel.exec_status_code = eOK;
                return;
            }
            catch (CSQLErr *e)
            {
                if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&
                (++iTryCount
<= iMaxRetries))

```

```

        {
            // hit
            deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)
    //if (iTryCount)
    //    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                i;
    DBINT              commit_flag;
    DBDATETIME         datetime;
    DBDATEREC          daterec;

    int                iTryCount =
0;
    const BYTE         *pData;

    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_ol_cnt);

            // check whether any
order lines are for a remote warehouse

            m_txn.NewOrder.o_all_local = 1;
            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {

```

```

                if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
                {
                    m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse

                    break;
                }
            }
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);

            for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; i++)
            {
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);

                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
            }

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);

            // Get order line
            results

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
            {
                if
(dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);

                if
(dbnumcols(m_dbproc) != 5)
                    ThrowError(CDBLIBERR::eWrongNumCols);

                if
(dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if(pData=dbdata(m_dbproc, 1))

```

```

                UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));

                if(pData=dbdata(m_dbproc, 2))

                    m_txn.NewOrder.OL[i].ol_stock =
(*(DBSMALLINT *) pData);

                if(pData=dbdata(m_dbproc, 3))

                    UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge
neric, pData, dbdatlen(m_dbproc, 3));

                if(pData=dbdata(m_dbproc, 4))

                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);

                if(pData=dbdata(m_dbproc, 5))

                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amount, 8);

                m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amount;

                DiscardNextRows(0);
            }

            // get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);

            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

            if (dbnumcols(m_dbproc)
!= 8)
                ThrowError(CDBLIBERR::eWrongNumCols);

```

```

    if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
    if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
    if
(pData=dbdata(m_dbproc, 3))
        m_txn.NewOrder.o_id = (*(DBINT *) pData);
    if
(pData=dbdata(m_dbproc, 4))
        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
    if
(pData=dbdata(m_dbproc, 5))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
    if
(pData=dbdata(m_dbproc, 6))
        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
    if
(pData=dbdata(m_dbproc, 7))
    {
        datetime =
*(DBDATETIME *) pData);
        dbdatecrack(m_dbproc, &daterec, &datetime);
        m_txn.NewOrder.o_entry_d.year =
daterec.year;
        m_txn.NewOrder.o_entry_d.month =
daterec.month;
        m_txn.NewOrder.o_entry_d.day =
daterec.day;
        m_txn.NewOrder.o_entry_d.hour =
daterec.hour;
        m_txn.NewOrder.o_entry_d.minute =
daterec.minute;
        m_txn.NewOrder.o_entry_d.second =
daterec.second;

```

```

    }
    if
(pData=dbdata(m_dbproc, 8))
        commit_flag =
(*(DBTINYINT *) pData);
        DiscardNextRows(0);
        DiscardNextResults(0);
    if (commit_flag == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));
        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
        m_txn.NewOrder.exec_status_code =
eInvalidItem;
        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL)) &&
(++iTryCount
<= iMaxRetries))
    {
        // hit
        deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
    }
    // while (TRUE)
    // if (iTryCount)
    // throw new
    CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME datetime;
    DBDATEREC daterec;

```

```

    int iTryCount =
0;
    const BYTE *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_payment", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);
            // if customer id is
            zero, then payment is by name
            if (m_txn.Payment.c_id
== 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)&m_txn.Payment.c_last);
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc)
!= SUCCEEDED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);
            if (dbnumcols(m_dbproc)
!= 27)
                ThrowError(CDBLIBERR::eWrongNumCols);

```

```

        if
(pData=dbdata(m_dbproc, 1))
            m_txn.Payment.c_id = *((DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 2))
            UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if
(pData=dbdata(m_dbproc, 3))
        {
            datetime =
*((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.Payment.h_date.year = daterec.year;
            m_txn.Payment.h_date.month =
daterec.month;
            m_txn.Payment.h_date.day = daterec.day;
            m_txn.Payment.h_date.hour = daterec.hour;
            m_txn.Payment.h_date.minute =
daterec.minute;
            m_txn.Payment.h_date.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 4))
            UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))
            UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if
(pData=dbdata(m_dbproc, 6))
            UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
            UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));
        if
(pData=dbdata(m_dbproc, 8))
            UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if
(pData=dbdata(m_dbproc, 9))

```

```

            UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if
(pData=dbdata(m_dbproc, 10))
            UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if
(pData=dbdata(m_dbproc, 11))
            UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if
(pData=dbdata(m_dbproc, 12))
            UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if
(pData=dbdata(m_dbproc, 13))
            UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if
(pData=dbdata(m_dbproc, 14))
            UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
        if
(pData=dbdata(m_dbproc, 15))
            UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if
(pData=dbdata(m_dbproc, 16))
            UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if
(pData=dbdata(m_dbproc, 17))
            UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if
(pData=dbdata(m_dbproc, 18))
            UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if
(pData=dbdata(m_dbproc, 19))
            UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if
(pData=dbdata(m_dbproc, 20))
            UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if
(pData=dbdata(m_dbproc, 21))

```

```

            UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if
(pData=dbdata(m_dbproc, 22))
        {
            datetime =
*((DBDATETIME *) pData);
            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.Payment.c_since.year =
daterec.year;
            m_txn.Payment.c_since.month =
daterec.month;
            m_txn.Payment.c_since.day = daterec.day;
            m_txn.Payment.c_since.hour =
daterec.hour;
            m_txn.Payment.c_since.minute =
daterec.minute;
            m_txn.Payment.c_since.second =
daterec.second;
        }
        if(pData=dbdata(m_dbproc, 23))
            UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
        if(pData=dbdata(m_dbproc, 24))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,24), SQLFLT8, (BYTE
*)&m_txn.Payment.c_credit_lim, 8);
        if(pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,25), SQLFLT8, (BYTE
*)&m_txn.Payment.c_discount, 8);
        if(pData=dbdata(m_dbproc, 26))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,26), SQLFLT8, (BYTE
*)&m_txn.Payment.c_balance, 8);
        if(pData=dbdata(m_dbproc, 27))
            UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
            DiscardNextRows(0);
            DiscardNextResults(0);

```



```

        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;
                return;
            }
        catch (CSQLERR *e)
        {
            if ((e->msgno == 1205
||
            (e->msgno
== iErrOleDbProvider &&
>m_msgtext, sErrTimeoutExpired) != NULL) &&
            (++iTryCount
<= iMaxRetries))
                {
                    // hit
                    deadlock; backoff for increasingly longer period
                    delete e;
                    Sleep(10 *
iTryCount);
                }
            else
                throw;
        }
        // while (TRUE)
        //
        // if (iTryCount)
        //     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
    }

void CTPCC_DBLIB::OrderStatus()
{
    int
    DBDATETIME
    DBDATEREC daterec;
    int
    RETCODE
    const BYTE
    *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);

```

```

            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);
            // if customer id is
            // zero, then order status is by name
            if
            (m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            // Get order lines
            if (dbresults(m_dbproc)
!= SUCCEED)
                {
                    if
                    ((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER );
                    else
                        ThrowError(CDBLIBERR::eDbResults);
                }
            if (dbnumcols(m_dbproc)
!= 5)
                ThrowError(CDBLIBERR::eWrongNumCols);
            i = 0;
            while (TRUE)
            {
                rc =
                dbnextrow(m_dbproc);
                if (rc ==
NO_MORE_ROWS)
                    break;
                if (rc !=
REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);
                if (pData=dbdata(m_dbproc, 1))

```

```

                m_txn.OrderStatus.OL[i].ol_supply_w_id =
                (*(DBSMALLINT *) pData);
                if (pData=dbdata(m_dbproc, 2))
                    m_txn.OrderStatus.OL[i].ol_i_id = (*(DBINT
                *) pData);
                if (pData=dbdata(m_dbproc, 3))
                    m_txn.OrderStatus.OL[i].ol_quantity =
                (*(DBSMALLINT *) pData);
                if (pData=dbdata(m_dbproc, 4))
                    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,4),
                SQLFLT8, (BYTE
                *)&m_txn.OrderStatus.OL[i].ol_amount, 8);
                if (pData=dbdata(m_dbproc, 5))
                {
                    datetime = (*(DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.OrderStatus.OL[i].ol_delivery_d.year
                    = daterec.year;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.month
                    = daterec.month;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.day
                    = daterec.day;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.hour
                    = daterec.hour;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.minut
                    e = daterec.minute;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.secon
                    d = daterec.second;
                }
                i++;
                m_txn.OrderStatus.o_ol_cnt = i;
            }
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)

```

```

ThrowError(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 8)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if(pData=dbdata(m_dbproc, 1))
        m_txn.OrderStatus.c_id = (*(DBINT *)
pData);

        if(pData=dbdata(m_dbproc, 2))

        UtilStrCpy(m_txn.OrderStatus.c_last, pData,
dbdatlen(m_dbproc,2));

        if(pData=dbdata(m_dbproc, 3))

        UtilStrCpy(m_txn.OrderStatus.c_first,
pData, dbdatlen(m_dbproc,3));

        if(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.OrderStatus.c_middle,
pData, dbdatlen(m_dbproc, 4));

        if(pData=dbdata(m_dbproc, 5))
        {
                datetime =
*((DBDATETIME *) pData);
                dbdatecrack(m_dbproc, &daterec, &datetime);

                m_txn.OrderStatus.o_entry_d.year =
daterec.year;

                m_txn.OrderStatus.o_entry_d.month =
daterec.month;

                m_txn.OrderStatus.o_entry_d.day =
daterec.day;

                m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;

                m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;

                m_txn.OrderStatus.o_entry_d.second =
daterec.second;
        }

        if(pData=dbdata(m_dbproc, 6))
        m_txn.OrderStatus.o_carrier_id =
(*(DBSMALLINT *) pData);

        if(pData=dbdata(m_dbproc, 7))

```

```

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,7),

        SQLFLT8, (BYTE
*)&m_txn.OrderStatus.c_balance, 8);

        if(pData=dbdata(m_dbproc, 8))

        m_txn.OrderStatus.o_id = (*(DBINT *)
pData);

        DiscardNextRows(0);
        DiscardNextResults(0);

        if
(m_txn.OrderStatus.o_ol_cnt == 0)
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);
        else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
                throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else

        m_txn.OrderStatus.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||
== iErrOleDbProvider &&
(e->m_msgno
>m_msgtext, sErrTimeoutExpired) != NULL) &&
(++iTryCount
<= iMaxRetries))
        {
                // hit
                deadlock; backoff for increasingly longer period
                delete e;
                Sleep(10 *
iTryCount);
        }
        else
                throw;
    }
    // while (TRUE)
}

// if (iTryCount)
// throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

```

```

void CTPCC_DBLIB::Delivery()
{
        int
        int
        i;
        iTryCount =
0;

        const BYTE
        *pData;

        ResetError();

        while (TRUE)
        {
                try
                {
                        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);

                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
                        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);

                        if (dbrpcexec(m_dbproc)
== FAIL)
                                ThrowError(CDBLIBERR::eDbRpcExec);

                        if (dbresults(m_dbproc)
!= SUCCEEDED)
                                ThrowError(CDBLIBERR::eDbResults);

                        if (dbnextrow(m_dbproc)
!= REG_ROW)
                                ThrowError(CDBLIBERR::eDbNextRow);

                        if (dbnumcols(m_dbproc)
!= 10)
                                ThrowError(CDBLIBERR::eWrongNumCols);

                        for (i=0; i<10; i++)
                        {
                                if (pData =
dbdata(m_dbproc, i+1))

                                m_txn.Delivery.o_id[i] = (*(DBINT *)pData);
                        }

                        DiscardNextRows(0);
                        DiscardNextResults(0);

                        m_txn.Delivery.exec_status_code = eOK;
                        return;
                }
                catch (CSQLERR *e)
                {

```

```

                                if ((e->m_msgno == 1205
||
                                (e->m_msgno
== iErrOleDbProvider &&
                                strstr(e-
>m_msgtext, sErrTimeoutExpired) != NULL)) &&
                                (++iTryCount
<= iMaxRetries))
                                {
                                // hit
                                deadlock; backoff for increasingly longer period
                                delete e;
                                Sleep(10 *
iTryCount);
                                }
                                else
                                throw;
                                }
                                // while (TRUE)
                                }
                                // if (iTryCount)
                                // throw new
                                CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRIED_TRANS,
iTryCount);
                                }

void CTPCC_DBLIB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }

    return;
}

```

tpcc_dblib.h

```

/* FILE: TPC_C_DBLIB.H
 * Microsoft
 * TPC-C Kit Ver. 4.20.000
 * Copyright
 * Microsoft, 1999
 * All Rights Reserved
 * Version
 * 4.10.000 audited by Richard Gimarc, Performance
 * Metrics, 3/17/99
 * PURPOSE: Header file for TPC-C txn class
 * implementation.
 * Change history:

```

```

 * 4.20.000 - updated rev number to
match kit
 */
#pragma once

#ifndef PDBPROCESS
#define DBPROCESS void // dbprocess structure type
typedef DBPROCESS * PDBPROCESS;
#endif

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CSQLERR : public CBaseErr
{
public:
    CSQLERR(void)
    {
        m_msgno = 0;
        m_msgstate = 0;
        m_severity = 0;
        m_msgtext = NULL;
    };

    ~CSQLERR()
    {
        delete [] m_msgtext;
    };

    int m_msgno;
    int m_msgstate;
    int m_severity;
    char *m_msgtext;

    int ErrorType()
    {return ERR_TYPE_SQL;};
    char* ErrorTypeStr() { return
"SQL"; }
    int ErrorNum()
    {return m_msgno;};
    char* ErrorText() {return
m_msgtext;};
};

class CDBLIBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eLogin,
        // error from dblogin
        eDbOpen,
        // error from dbopen
    };
};

```

```

    eDbUse,
    // error from dbuse
    eDbSqlExec,
    // error from dbsqlxec
    eDbSet,
    // error from one of the dbset*
};

routines
    eDbNextRow,
    // error from dbnextrow
    eWrongRowCount,
    // more or less rows returned than expected
    eWrongNumCols,
    // more or less columns returned than
expected
    eDbResults,
    // error from dbresults
    eDbRpcExec,
    // error from dbrpcxec
    eDbSetMaxProcs,
    // error from dbsetmaxprocs
    eDbProcHandler,
    // error from either dbprocerrhandle or
dbprocmsghandle
};

CDBLIBERR(ACTION eAction, int
severity = 0, int dberror = 0, int oserr = 0)
{
    m_eAction = eAction;
    m_severity = severity;
    m_dberror = dberror;
    m_oserr = oserr;

    m_dberrstr = NULL;
    m_oserrstr = NULL;
};

~CDBLIBERR()
{
    delete [] m_dberrstr;
    delete [] m_oserrstr;
};

ACTION m_eAction;
int m_severity;
int m_dberror;
int m_oserr;
char *m_dberrstr;
char *m_oserrstr;

int ErrorType()
{return ERR_TYPE_DBLIB;};
char* ErrorTypeStr() { return
"DBLIB"; }
int ErrorNum()
{return m_dberror;};
char* ErrorText() {return
m_dberrstr;};
int ErrorAction()
{ return (int)m_eAction; }
};

```

```

};

class CTPCC_DBLIB_ERR : public CBaseErr
{
public:
    enum CTPCC_DBLIB_ERRS
    {
        ERR_WRONG_SF_VERSION =
1, // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
// "Invalid Customer id,name."
        ERR_NO_SUCH_ORDER,
// "No orders found for
customer."
        ERR_RETRIED_TRANS,
// "Retries before transaction
succeeded."
    };

    CTPCC_DBLIB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

    CTPCC_DBLIB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

    int m_errno;
    int m_iTryCount;

    int ErrorType()
{return ERR_TYPE_TPCC_DBLIB;};
    char* ErrorTypeStr() { return
"TPCC DBLIB"; }
    int ErrorNum()
{return m_errno;};

    char* ErrorText();
};

class DllDecl CTPCC_DBLIB : public CTPCC_BASE
{
private:
// declare variables and private
functions here...
    PDBPROCESS m_dbproc;
    CDBLIBERR *m_DbLibErr;
// not allocated until needed (maybe never)
    CSQLErr *m_SqlErr;
// not allocated until
needed (maybe never)
    int m_MaxRetries; // retry
count on deadlock

    void DiscardNextRows(int
iExpectedCount);
    void DiscardNextResults(int
iExpectedCount);
    void ThrowError(
CDBLIBERR::ACTION eAction );

```

```

void ResetError();

union
{
    NewOrder;          NEW_ORDER_DATA
    Payment;           PAYMENT_DATA
    Delivery;          DELIVERY_DATA
    StockLevel;        STOCK_LEVEL_DATA
    OrderStatus;       ORDER_STATUS_DATA
};

m_txn;

public:
    CTPCC_DBLIB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase );
    ~CTPCC_DBLIB(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder        ();
    void Payment         ();
    void Delivery        ();
    void StockLevel     ();
    void OrderStatus    ();

// these are public because they
must be called from the dblib err_handler and
msg_hangler

// outside of the class
void SetDbLibError(int severity,
int dberr, int oserr, LPCSTR dberrstr, LPCSTR
oserrstr);
void SetSqlError( int msgno, int
msgstate, int severity, LPCSTR msgtext );
};

extern "C" DllDecl CTPCC_DBLIB* CTPCC_DBLIB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase );

```

```

typedef CTPCC_DBLIB* (TYPE_CTPCC_DBLIB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR);

```

tpcc_enc.cpp

```

// tpcc_enc.cpp: implementation of the CTPCC_ENCINA
class.
//
////////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////////

#include <windows.h>
#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains definitions of
structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_enc.h"
#include "..\include\tpcc_type.h"
#include "mon_client.h"
#include "client_utils.h"

static CRITICAL_SECTION TpCriticalSection;
extern "C" char *errFile;

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:

DisableThreadLibraryCalls(hModule);
InitializeCriticalSection(&TpCriticalSection);
break;

        case DLL_PROCESS_DETACH:
DeleteCriticalSection(&TpCriticalSection);

```

```

                break;
            default:
                /* nothing */;
        }
        return TRUE;
    }

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_new()
{
    return new CTPCC_ENCINA();
}

// wrapper routine for enroll_client
__declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_post_init()
{
    enroll_client();
    return NULL;
}

// constructor and destructor
CTPCC_ENCINA::CTPCC_ENCINA()
{
    //      Add initialization of ENCINA
    Structures if any
        m_txn = (ENC_DATA
* )malloc(sizeof(ENC_DATA));
        if (m_txn == NULL)
            throw new
CENCERR(ERR_TYPE_MEMORY, ERR_FATAL_LEVEL);
}

CTPCC_ENCINA::~CTPCC_ENCINA()
{
    // free the data structure allocated with
    tpalloc
        free((char *)m_txn);
}

void CTPCC_ENCINA::NewOrder()
{
    // question: if we need to prepare the
    data?
    if (send_new_order(sizeof(ENC_DATA), (unsigned
char *)m_txn) == TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn-
>ErrorType, m_txn->error );
}

void CTPCC_ENCINA::Payment()
{
    if (send_payment(sizeof(ENC_DATA), (unsigned char
*)m_txn) == TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);
}

```

```

        if ( m_txn->ErrorType != ERR_SUCCESS )
            throw new CENCERR( m_txn-
>ErrorType, m_txn->error );
    }

void CTPCC_ENCINA::Delivery()
{
    // Note: Delivery txn code in the tuxedo
server does not implement logging of the delivery
txn results, so cannot be used as
is to run an auditable TPC-C result. For that
reason, delivery txns should not
be done via Tuxedo.
    //      The code is included for
    completeness.
    //m_txn->u.Delivery.exec_status_code =
eDeliveryFailed;
    //return;

    // Note: If we use the delivery thread in
tpcc.dll, it is not possible to get to this
point for delivery txns. But if we
use Encina delivery server, the code is
needed. It is suggested using the
delivery thread in tpcc.dll since it is
convenient and provides best
performance.
    GetLocalTime(&m_txn-
>u.Delivery.queue_time);

    if (send_delivery(sizeof(ENC_DATA), (unsigned
char *)m_txn) == TRPC_ERROR)
        m_txn-
>u.Delivery.exec_status_code = eDeliveryFailed;
    else
        m_txn-
>u.Delivery.exec_status_code = eOK;
}

void CTPCC_ENCINA::StockLevel()
{
    if (send_stock_level(sizeof(ENC_DATA), (unsigned
char *)m_txn) == TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )
        throw new CENCERR( m_txn-
>ErrorType, m_txn->error );
}

void CTPCC_ENCINA::OrderStatus()
{
    if (send_order_status(sizeof(ENC_DATA), (unsigned
char *)m_txn) == TRPC_ERROR)
        throw new CENCERR(TRPC_ERROR);

    if ( m_txn->ErrorType != ERR_SUCCESS )

```

```

        throw new CENCERR( m_txn-
>ErrorType, m_txn->error );
    }

char *CENCERR::ErrorText()
{
    if (m_iErrorType == TRPC_ERROR)
    {
        sprintf( m_szErrorText, "Error:
ENCINA TRPC error (see log file %s for details)",
errFile);
    }
    else
        sprintf( m_szErrorText, "Error:
Class %d, error # %d", m_iErrorType, m_iError );
    return m_szErrorText;
};

```

tpcc_enc.h

```

/*      FILE:          TPCC_ENCINA.H
*
*      Microsoft
TPC-C Kit Ver. 4.10.000
*
*      not yet
audited
*
*      PURPOSE:  Header file for TPC-C Encina
class implementation.
*
*      Copyright
Microsoft, 1999
*
*      All Rights Reserved
*/

#ifndef _TPCC_ENCINA_H_
#define _TPCC_ENCINA_H_

#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class CTPCC_ENCINA : public CTPCC_BASE
{
private:
    struct ENC_DATA
    {
        int
        ErrorType;
        int
        error;
        union
    {

```

```

NEW_ORDER_DATA      NewOrder;
                    PAYMENT_DATA
                    Payment;
                    DELIVERY_DATA
                    Delivery;

STOCK_LEVEL_DATA    StockLevel;

ORDER_STATUS_DATA   OrderStatus;
                    } *m_txn;

public:

    CTPCC_ENCINA();
    virtual ~CTPCC_ENCINA();

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn->u.StockLevel; };
    inline PORORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();
    void OrderStatus   ();
};

class CENCERR : public CBaseErr
{
private:
    char    m_szErrorText[64];
public:
    int     m_errno;
    int     m_iErrorType;
// match ErrorType in CTPCC_ENCINA
    int     m_iError;
// machine error in CTPCC_ENCINA

// use this interface for genuine
Encina errors
    CENCERR( int iErr )
    {
        m_errno = iErr; //
ENCINA error

```

```

ERR_TYPE_ENCINA;
                    m_iErrorType =
                    m_iError = 0; //
only meaningful if m_errno == TPEOS
                    };
// use this interface to
impersonate a non-Encina error type
                    CENCERR( int iErrorType, int
iError )
                    {
                    m_iErrorType =
iErrorType;
                    m_iError = iError;
                    m_errno = iError; //
???)
                    }
// A CENCERR class can
impersonate another class, which happens if the error
// was not actually a Tuxedo
error, but was simply transmitted back via Tuxedo.
                    int ErrorType()
                    {
                        return m_iErrorType;
                    }
                    int ErrorNum() {return m_errno;};
                    char *ErrorText();
};

// wrapper routine for class constructor:
extern "C" __declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_new();
extern "C" __declspec(dllexport) CTPCC_ENCINA*
CTPCC_ENCINA_post_init();

typedef CTPCC_ENCINA* (TYPE_CTPCC_ENCINA)();

#endif // !defined(_TPCC_ENCINA_H_)

tpcc_odbc.cpp
/* FILE: TPCC_ODBC.CPP
* Microsoft
TPC-C Kit Ver. 4.42.000
* Copyright
Microsoft, 2002
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implements ODBC calls for TPC-C
txns.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:

```

```

* 4.42.000 - changed w_id fields
from short to long to support >32K warehouses
* 4.20.000 - updated rev number to
match kit
* 4.10.001 - not deleting error
class in catch handler on deadlock retry;
* not a
functional bug, but a memory leak
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

// #define COMPILE_FOR_SNAC // define that to
compile for SQL Native Client; comment out to use
MDAC

#ifdef COMPILE_FOR_SNAC
#include <odbcss.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV;
// ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:

```

```

        DisableThreadLibraryCalls(hModule);
        if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
            return FALSE;
        break;
        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
            break;
        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 *
 */

char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else

```

```

        return errorMsgs[i].szMsg;
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, //
user name for login
LPCSTR szPassword, // password
for login
LPCSTR szHost, //
not used
LPCSTR szDatabase, // name of
database to use
LPCWSTR szSPPrefix, // prefix to
append to the stored procedure names
BOOL bCallNoDuplicatesNewOrder ) // whether
to check for non-duplicate items in NewOrder and call
a new SP
    {
        return new CTPCC_ODBC( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix,
bCallNoDuplicatesNewOrder );
    }

CTPCC_ODBC::CTPCC_ODBC (
LPCSTR szServer,
// name of SQL server
LPCSTR szUser,
// user name for login
LPCSTR szPassword,
// password for login
LPCSTR szHost,
// not used
LPCSTR szDatabase,
// name of database to use
LPCWSTR szSPPrefix,
// prefix to append to the stored procedure
names
BOOL bCallNoDuplicatesNewOrder //
whether to check for non-duplicate items in NewOrder
and call a new SP
)
:
m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder)
{
    RETCODE rc;

    // initialization
    m_hdbc = SQL_NULL_HDBC;
    m_hstmt = SQL_NULL_HSTMT;

    m_hstmtNewOrder = SQL_NULL_HSTMT;
    m_hstmtPayment = SQL_NULL_HSTMT;
    m_hstmtDelivery = SQL_NULL_HSTMT;
    m_hstmtOrderStatus = SQL_NULL_HSTMT;
    m_hstmtStockLevel = SQL_NULL_HSTMT;

```

```

    m_descNewOrderCols1 = SQL_NULL_HDESC;
    m_descNewOrderCols2 = SQL_NULL_HDESC;
    m_descOrderStatusCols1 = SQL_NULL_HDESC;
    m_descOrderStatusCols2 = SQL_NULL_HDESC;

    wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

    if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,
&m_hdbc) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    if ( SQLSetConnectOption(m_hdbc,
SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )
        ThrowError(CODBCERR::eConnOption);

    {
        char
szConnectStr[256];
        char
szOutStr[1024];
        SQLSMALLINT
iOutStrLen;

#ifdef COMPILE_FOR_SNAC
        sprintf( szConnectStr,
"DRIVER=SQL
Server:SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#else
        // Compile for SNAC
        sprintf( szConnectStr,
"DRIVER=SQL Native
Client:SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",
szServer, szUser,
szPassword, szDatabase );
#endif
        rc = SQLDriverConnect(m_hdbc,
NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),
(SQLCHAR*)szOutStr,
sizeof(szOutStr), &iOutStrLen,
SQL_DRIVER_NOPROMPT );

        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eConnect);
    }

    if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmt) != SQL_SUCCESS)
        ThrowError(CODBCERR::eAllocHandle);

    {
        char
        buffer[128];

```

```

        // set some options affecting
connection behavior
        strcpy(buffer, "set nocount on
set XACT_ABORT ON");
        rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);

        // verify that version of stored
procs on server is correct
        char db_sp_version[10];
        strcpy(buffer, "{call
tpcc_version}");
        rc = SQLExecDirect(m_hstmt,
(unsigned char *)buffer, SQL_NTS);
        if (rc != SQL_SUCCESS && rc !=
SQL_SUCCESS_WITH_INFO)

            ThrowError(CODBCERR::eExecDirect);
        if ( SQLBindCol(m_hstmt, 1,
SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),
NULL) != SQL_SUCCESS )

            ThrowError(CODBCERR::eBindCol);
        if ( SQLFetch(m_hstmt) ==
SQL_ERROR )

            ThrowError(CODBCERR::eFetch);
        if
        (strcmp(db_sp_version,sVersion))
            throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION
);

        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmt);
    }

    // Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_ODBC::~CTPCC_ODBC( void )
{
    // note: descriptors are automatically
released when the connection is dropped
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtNewOrder);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtPayment);
    SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtDelivery);

```

```

        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtOrderStatus);
        SQLFreeHandle(SQL_HANDLE_STMT,
m_hstmtStockLevel);

        SQLDisconnect(m_hdbc);
        SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);
    }

void CTPCC_ODBC::ThrowError( CODBCERR::ACTION eAction
)
{
    RETCODE         rc;
    SDWORD          lNativeError;
    char            szState[6];
    char            szMsg[SQL_MAX_MESSAGE_LENGTH];
    char            szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    CODBCERR        *pODBCErr;
    // not allocated until needed (maybe never)

    pODBCErr = new CODBCERR();

    pODBCErr->m_NativeError = 0;
    pODBCErr->m_eAction = eAction;
    pODBCErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;
    while (TRUE)
    {
        rc = SQLError(henv, m_hdbc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
        if (rc == SQL_NO_DATA)
            break;

        // check for deadlock
        if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &&
strstr(szMsg,
sErrTimeoutExpired) != NULL))
            pODBCErr->m_bDeadLock =
TRUE;

        error        // capture the (first) database
                    if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
                    pODBCErr->m_NativeError
= lNativeError;

        // quit if there isn't enough
room to concatenate error text
        if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
            break;

        // include line break after first
error msg

```

```

        if (szTmp[0] != 0)
            strcat( szTmp, "\n");
        strcat( szTmp, szMsg );
    }

    if (pODBCErr->m_odbcerrstr != NULL)
    {
        delete [] pODBCErr->m_odbcerrstr;
        pODBCErr->m_odbcerrstr = NULL;
    }

    if (strlen(szTmp) > 0)
    {
        pODBCErr->m_odbcerrstr = new
char[ strlen(szTmp)+1 ];
        strcpy( pODBCErr->m_odbcerrstr,
szTmp );
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtStockLevel) != SQL_SUCCESS )

        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindCol);

    //Compose Stock Level statement
    _snprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCo
mmand[0]),
        L"{call %stpc_stocklevel
(?,?,?)}", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE         rc;

```



```

0;          int          iTryCount =

m_hstmt = m_hstmtStockLevel;

while (TRUE)
{
    try
    {
        rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
        if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
            ThrowError(CODBCERR::eExecDirect);

        if ( SQLFetch(m_hstmt)
== SQL_ERROR )
            ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        m_txn.StockLevel.exec_status_code = eOK;
        break;
    }
    catch (CODBCERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        sleep(10 * iTryCount);
    }
}

//          if (iTryCount)
//              throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtNewOrder) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderCols2) != SQL_SUCCESS

```

```

||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtNewOrder;

if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

int i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
)
        ThrowError(CODBCERR::eBindParam);
}

// set the bind offset pointer

```

```

if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindCol);

// associate the column bindings for the
second result set
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
)

```

```

        ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snwprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderComman
d[0]),
                // 0      1      2
                //
012345678901234567890123456789
                L" {call
%stpc_neworder(?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,"
                L"?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,?,
,?,?,?,?,?)", m_szSPPrefix);

        m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix); // fixed part + prefix
part

        //////////////////////////////////////
        //////////////////////////////////////
        //
        //      Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
        //      and returns one result set for
lineitem details.
        //
        //
        m_hstmt = m_hstmtNewOrderNoDuplicates;

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_ol_cnt, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX_OL_NEW_ORDER_ITEMS;
j++)
        {

```

```

                if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
                ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
                ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
                )

        ThrowError(CODBCERR::eBindParam);
        }

        // set row-wise binding
        if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_UINTEGER) != SQL_SUCCESS
        || SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        // associate the column bindings for the
second result set
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

        i = 0;

```

```

        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
        )

        ThrowError(CODBCERR::eBindCol);

        //Compose the New Order statement
        _snwprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNe
wOrderNoDuplicatesCommand[0]),
                L" {call
%stpc_neworder_new(?,?,?,?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,"
                L"?,?,?,?,?,?,?,?,?,?,?,?,?,
,?,?,?,?,?)", m_szSPPrefix);

        m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
        }

        //
        //      Returns true if there are duplicate
(warehouse_id, item_id)
        //      lineitem pairs in New Order input
parameters.
        //
bool CTPCC_ODBC::DuplicatesInNewOrder()
{
        int i, j;

        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
++i)
        {
                for (j = i+1; j<
m_txn.NewOrder.o_ol_cnt; ++j)
                {

```

```

        if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
        {
                return true;
        }
    }
    return false;
}

void CTPCC_ODBC::NewOrder()
{
    if (m_bCallNoDuplicatesNewOrder)
    {
        if (DuplicatesInNewOrder())
        {
            NewOrderDuplicates();
        }
        else
        {
            NewOrderNoDuplicates();
        }
    }
    else
    {
        NewOrderDuplicates();
    }
}

void CTPCC_ODBC::NewOrderDuplicates()
{
    int
    i;
    RETCODE          rc;
    int
    iTryCount = 0;

    0          1          2          //
    012345678901234567890123456789          //
    wchar_t
    szSqlTemplate[iMAX_SP_NAME_LEN];

    tpcc_neworder(?,?,?,?,"          // L"{call
    L"?,?,?,?,?,?,?,?,?,?,?,?,?",          //
    L"?,?,?,?,?,?,?,?,?,?,?,?,?",          //
    L"?,?,?,?,?,?,?,?,?,?,?,?,?)"          //
    m_hstmt = m_hstmtNewOrder;

```

```

        // associate the parameter and column
bindings for this transaction
        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        // clip statement buffer based on number of
parameters
        // fixed part is 29 chars and variable part
is 6 chars per line item
        wcsncpy(szSqlTemplate, m_szNewOrderCommand);
        i = m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
        wcsncpy( &szSqlTemplate[i], L" )" );

        // check whether any order lines are for a
remote warehouse
        m_txn.NewOrder.o_all_local = 1;
        for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
        {
            if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
            {
                m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                break;
            }
        }
        while (TRUE)
        {
            try
            {
                m_BindOffset = 0;
                rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
                if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

                // Get order line
                results
                m_txn.NewOrder.total_amount = 0;
                for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
                {
                    // set the
bind offset value...
                    m_BindOffset
                    = i * sizeof(m_txn.NewOrder.OL[0]);

                    if (
SQLFetch(m_hstmt) == SQL_ERROR)

```

```

                ThrowError(CODBCERR::eFetch);

                // move to
the next resultset
                if (
SQLMoreResults(m_hstmt) == SQL_ERROR )
                    ThrowError(CODBCERR::eMoreResults);

                m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            }
            // associate the column
bindings for the second result set
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_no_commit_flag ==
1)
            {
                m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

                m_txn.NewOrder.exec_status_code = eOK;
            }
            else
                m_txn.NewOrder.exec_status_code =
eInvalidItem;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }
}

```

```

//      if (iTryCount)
//          throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

//
//      No lineitem duplicates optimized version.
//
void CTPCC_ODBC::NewOrderNoDuplicates()
{
    int
    i;
    RETCODE          rc;
    int
    iTryCount = 0;

0      1      2      3          //
//
0123456789012345678901234567890123
wchar_t
szSqlTemplate[iMAX_SP_NAME_LEN];

tpcc_neworder_new(?,?,?,?,"          // L"call
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?"          //
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?"          //
//
L"?,?,?,?,?,?,?,?,?,?,?,?,?)"          //
//
    m_hstmt = m_hstmtNewOrderNoDuplicates;

    // associate the parameter and column
bindings for this transaction
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    // clip statement buffer based on number of
parameters
    // fixed part is 33 chars and variable part
is 6 chars per line item
    wcsncpy(szSqlTemplate,
m_szNewOrderNoDuplicatesCommand);
    i =
m_iBeginNewOrderNoDuplicatesVariablePart +
m_txn.NewOrder.o_ol_cnt*6;
    wcsncpy( &szSqlTemplate[i], L" )" );

    // check whether any order lines are for a
remote warehouse

```

```

m_txn.NewOrder.o_all_local = 1;
for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
{
    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
    {
        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
        break;
    }
}

while (TRUE)
{
    try
    {
        // configure block
        cursor
        if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS

            ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

            // configure block
            cursor
            if
(SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OL_NEW_ORDER_ITEMS, 0) !=
SQL_SUCCESS)

                ThrowError(CODBCERR::eSetStmtAttr);

            // Get order line

            results
            if ( SQLFetch(m_hstmt)
== SQL_ERROR)

                ThrowError(CODBCERR::eFetch);

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i < m_txn.NewOrder.o_ol_cnt; i++)
            {

                m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            }

```

```

// associate the column
bindings for the second result set
    if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=
SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    // move to the next
resultset
    if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

        ThrowError(CODBCERR::eMoreResults);

    if ( SQLFetch(m_hstmt)
== SQL_ERROR)

        ThrowError(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

            break;
        }
        catch (CODBCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))

                throw;

            // hit deadlock;
backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    //      if (iTryCount)
    //          throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

```

```

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )
        ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) !=
SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,
sizeof(m_txn.Payment.d_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose Payment statement
    _snwprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[
0]),
        L"{call %stpcc_payment
(?,?,?,?,?,?)}" , m_szSPPrefix);

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;
    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            if (m_txn.Payment.c_id
== 0)

```

```

        throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
        else
            m_txn.Payment.exec_status_code = eOK;

            break;
        }
        catch (COBDCERR *e)
        {
            if (!(e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;

            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    // if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
||
SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
)
        ThrowError(COBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(COBCERR::eSetStmtAttr);

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,

```

```

sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
        )
            ThrowError(COBCERR::eBindParam);

    // configure block cursor
    if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) !=
SQL_SUCCESS
|| SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) !=
SQL_SUCCESS
        )
            ThrowError(COBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(COBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(COBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,

```

```

sizeof(m_txn.OrderStatus.c_middle), NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) !=
SQL_SUCCESS
        )
            ThrowError(COBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatus
Command[0]),
        L"call %stpcc_orderstatus
(?,?,?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int iTryCount = 0;
    RETCODE rc;

    m_hstmt = m_hstmtOrderStatus;

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(COBCERR::eSetStmtAttr);

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // configure block
            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )
                    ThrowError(COBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
            if ( ((rc ==
SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0)) ||
(rc == SQL_ERROR) )

```

```

        ThrowError(CODBCERR::eExecDirect);

        // configure block
        cursor
            if (
                SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
                    (SQLPOINTER)MAX_OL_ORDER_STATUS_ITEMS, 0) !=
                SQL_SUCCESS )
            ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll(
                m_hstmt, SQL_FETCH_NEXT, 0 );
            if ((rc ==
                SQL_SUCCESS_WITH_INFO) && (m_RowsFetched != 0) ||
                (rc == SQL_ERROR) )
            ThrowError(CODBCERR::eFetchScroll);

            m_txn.OrderStatus.o_ol_cnt =
                (short)m_RowsFetched;

            if
                (m_txn.OrderStatus.o_ol_cnt != 0)
            {
                if (
                    SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
                        m_descOrderStatusCols2, SQL_IS_POINTER ) !=
                        SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

                    if (
                        SQLMoreResults(m_hstmt) == SQL_ERROR )
                        ThrowError(CODBCERR::eMoreResults);

                    if ( (rc =
                        SQLFetch(m_hstmt)) == SQL_ERROR)
                        ThrowError(CODBCERR::eFetch);
                }
                SQLFreeStmt(m_hstmt,
                    SQL_CLOSE);

                if
                    (m_txn.OrderStatus.o_ol_cnt == 0)
                    throw new
                    CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO_SUCH_ORDER );
                else if
                    (m_txn.OrderStatus.c_id == 0 &&
                    m_txn.OrderStatus.c_last[0] == 0)
                    throw new
                    CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
                else
                    m_txn.OrderStatus.exec_status_code = eOK;

```

```

                break;
            }
            catch (CODBCERR *e)
            {
                if (!e->m_bDeadLock)
                    throw;

                // hit deadlock;
                backoff for increasingly longer period
                delete e;
                Sleep(10 * iTryCount);
            }
        }

        // if (iTryCount)
        // throw new
        CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
            iTryCount);
    }

    void CTPCC_ODBC::InitDeliveryParams()
    {
        if ( SQLAllocHandle(SQL_HANDLE_STMT,
            m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )
            ThrowError(CODBCERR::eAllocHandle);

            m_hstmt = m_hstmtDelivery;

            int i = 0;
            if ( SQLBindParameter(m_hstmt, ++i,
                SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
                &m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
                || SQLBindParameter(m_hstmt, ++i,
                SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
                &m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
                )
                ThrowError(CODBCERR::eBindParam);

            for (i=0;i<10;i++)
            {
                if ( SQLBindCol(m_hstmt,
                    (UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
                    0, NULL) != SQL_SUCCESS )

                    ThrowError(CODBCERR::eBindCol);
            }

            //Compose Delivery statement
            _snwprintf(m_szDeliveryCommand,
                sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryComman
                d[0]),
                L"{call %stpc_delivery (?,?)}",
                m_szSPPrefix);
        }

        void CTPCC_ODBC::Delivery()
        {
            RETCODE          rc;

```

```

        int          iTryCount =
        0;

        m_hstmt = m_hstmtDelivery;

        while (TRUE)
        {
            try
            {
                rc =
                SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
                SQL_NTS);
                if (rc != SQL_SUCCESS
                && rc != SQL_SUCCESS_WITH_INFO)

                    ThrowError(CODBCERR::eExecDirect);

                    if ( SQLFetch(m_hstmt)
                    == SQL_ERROR )

                        ThrowError(CODBCERR::eFetch);

                        SQLFreeStmt(m_hstmt,
                            SQL_CLOSE);

                            m_txn.Delivery.exec_status_code = eOK;
                            break;
                        }
                        catch (CODBCERR *e)
                        {
                            if (!e->m_bDeadLock)
                                throw;

                            // hit deadlock;
                            backoff for increasingly longer period
                            delete e;
                            Sleep(10 * iTryCount);
                        }
                    }

                    // if (iTryCount)
                    // throw new
                    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
                    iTryCount);
                }

                tpcc_odbc.h
                /* FILE: TPCC_ODBC.H
                * Microsoft
                TPC-C Kit Ver. 4.20.000
                * Copyright
                Microsoft, 1999
                * All Rights Reserved
                *
                * Version
                4.10.000 audited by Richard Gimarc, Performance
                Metrics, 3/17/99
                *

```

```

*      PURPOSE: Header file for TPC-C txn class
implementation.
*
*      Change history:
*      4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
        eConnOption,
        // error from SQLSetConnectOption
        eConnect,
        // error from SQLConnect
        eAllocStmt,
        // error from SQLAllocStmt
        eExecDirect,
        // error from SQLExecDirect
        eBindParam,
        // error from SQLBindParameter
        eBindCol,
        // error from SQLBindCol
        eFetch,
        // error from SQLFetch
        eFetchScroll,
        // error from SQLFetchScroll
        eMoreResults,
        // error from SQLMoreResults
        ePrepare,
        // error from SQLPrepare
        eExecute,
        // error from SQLExecute
        eSetEnvAttr,
        // error from SQLSetEnvAttr
        eSetStmtAttr,
        // error from SQLSetStmtAttr
    };

    CODBCERR(void)
    {
        m_eAction = eNone;

```

```

        m_NativeError = 0;
        m_bDeadLock = FALSE;
        m_odbcerrstr = NULL;
    };

    ~CODBCERR()
    {
        if (m_odbcerrstr !=
NULL)
            delete []
m_odbcerrstr;
    };

    ACTION    m_eAction;
    int       m_iTryCount;
    m_NativeError;
    BOOL      m_bDeadLock;
    char      *m_odbcerrstr;

    int       ErrorType()
    {return ERR_TYPE_ODBC;};
    char*     ErrorTypeStr() { return
"ODBC"; };
    int       ErrorNum()
    {return m_NativeError;};
    char*     ErrorText() {return
m_odbcerrstr;};
    int       ErrorAction()
    { return (int)m_eAction; };

    class CTPCC_ODBC_ERR : public CBaseErr
    {
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO_SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRIED_TRANS,
            // "Retries before transaction
succeeded."
        };

        CTPCC_ODBC_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int       m_errno;
        int       m_iTryCount;

        int       ErrorType()
    {return ERR_TYPE_TPCC_ODBC;};

```

```

        char*     ErrorTypeStr() { return
"TPCC ODBC"; };
        int       ErrorNum()
    {return m_errno;};
        char*     ErrorText();
    };

    class DllDecl CTPCC_ODBC : public CTPCC_BASE
    {
    private:
        // declare variables and private
functions here...
        BOOL      m_bDeadlock;
        // transaction was selected as
deadlock victim
        int       m_MaxRetries; // retry
count on deadlock
        SQLHENV   m_henv;
        // ODBC environment
        handle
        SQLHDBC   m_hdbc;
        SQLHSTMT m_hstmt;
        // the current hstmt
        SQLHSTMT m_hstmtNewOrder;
        SQLHSTMT
m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details
        SQLHSTMT m_hstmtPayment;
        SQLHSTMT m_hstmtDelivery;
        SQLHSTMT m_hstmtOrderStatus;
        SQLHSTMT m_hstmtStockLevel;
        SQLHDESC m_descNewOrderCols1;
        SQLHDESC m_descNewOrderCols2;
        SQLHDESC
m_descNewOrderNoDuplicatesCols1; //
NewOrder with one result set for lineitem details
        SQLHDESC
m_descNewOrderNoDuplicatesCols2; //
NewOrder with one result set for lineitem details
        SQLHDESC m_descOrderStatusCols1;
        SQLHDESC m_descOrderStatusCols2;
        wchar_t
m_szSPPrefix[32]; // stored procedures
        prefix
        wchar_t
m_szNewOrderCommand[iMAX_SP_NAME_LEN];
        wchar_t
m_szNewOrderNoDuplicatesCommand[iMAX_SP_NAM
E_LEN];
        int
m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
        int
m_iBeginNewOrderNoDuplicatesVariablePart;

```



```

// begining of the variable part in
NewOrder statement
    wchar_t
    m_szPaymentCommand[IMAX_SP_NAME_LEN];
    wchar_t
    m_szDeliveryCommand[IMAX_SP_NAME_LEN];
    wchar_t
    m_szOrderStatusCommand[IMAX_SP_NAME_LEN];
    wchar_t
    m_szStockLevelCommand[IMAX_SP_NAME_LEN];

    // new-order specific fields
    SQLINTEGER      m_BindOffset;
    m_RowsFetched;
    int
    m_no_commit_flag;

    // tpcc_neworder_new flag
    BOOL
    m_bCallNoDuplicatesNewOrder;

    void ThrowError( CODBCERR::ACTION

eAction );

    void InitNewOrderParams();
    void InitPaymentParams();
    void InitDeliveryParams();
    void InitStockLevelParams();
    void InitOrderStatusParams();

    union
    {
        NEW_ORDER_DATA
        NewOrder;
        PAYMENT_DATA
        Payment;
        DELIVERY_DATA
        Delivery;
        STOCK_LEVEL_DATA
        StockLevel;
        ORDER_STATUS_DATA
        OrderStatus;
    }
    m_txn;

    bool DuplicatesInNewOrder();
    void NewOrderDuplicates();
    void NewOrderNoDuplicates();

public:
    CTPCC_ODBC(          LPCSTR
szServer, LPCSTR szUser, LPCSTR szPassword,

    LPCSTR szHost, LPCSTR szDatabase,

    LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder);
    ~CTPCC_ODBC(void);

```

```

        inline PNEW_ORDER_DATA
        BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
        inline PPAYMENT_DATA
        BuffAddr_Payment() { return
&m_txn.Payment; };
        inline PDELIVERY_DATA
        BuffAddr_Delivery() { return
&m_txn.Delivery; };
        inline PSTOCK_LEVEL_DATA
        BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();
    void OrderStatus   ();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
(
    LPCSTR szServer, LPCSTR szUser,
    LPCSTR szPassword,
    LPCSTR szHost, LPCSTR szDatabase,
    LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR, BOOL);

tpcc_tux.cpp

/* FILE: TPCC_TUX.CPP
* Microsoft
* TPC-C Kit Ver. 4.20.000
* Copyright
* Microsoft, 1999
* All Rights Reserved
*
* Version
* 4.10.000 audited by Richard Gimarc, Performance
* Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C Tuxedo
* class.
* Contact: Charles Levine
* (clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
* match kit
*/

#include <windows.h>

```

```

#include <process.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <tmenv.h>
#include <xa.h>
#include <atmi.h>

#ifdef ICECAP
// for IceCAP profiling
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_tux.h" // interface to Tuxedo libraries

static TPINIT
*tpinf;
static DWORD
TLISIsTpInitedKey;
static CRITICAL_SECTION
TpCriticalSection;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:

            DisableThreadLibraryCalls(hModule);

            // create thread local
            storage to determine Tuxedo initialization per
            thread. // it really should be
            possible to do this in the DLL_THREAD_ATTACH call,
            but // Ed says he could not
            get it to work. // assumption: value
            init'd to 0 TLISIsTpInitedKey =
            TlsAlloc();
    }
}

```

```

        if ((tpinf = (TPINIT
*)tpalloc("TPINIT", NULL, sizeof(TPINIT))) == NULL)
        {
            // int TpRc =
tperrno;
            return FALSE;
        }
        tpinf->flags |=
TPMULTICONTEXTS;

        InitializeCriticalSection(&TpCriticalSection);
        break;
        case DLL_PROCESS_DETACH:
            TlsFree(TLSIsTpInitedKey);
            DeleteCriticalSection(&TpCriticalSection);
            break;
        default:
            /* nothing */;
    }
    return TRUE;
}

static void ThrTpInit()
{
    static int num_tpinit=0;
    int iRc, TpRc;

    // has this thread been initialized? check
    thread local storage
    if(!TlsGetValue(TLSIsTpInitedKey))
    {
        EnterCriticalSection(&TpCriticalSection);
        itoa(++num_tpinit, tpinf-
>cltname, 10);

        iRc = tpinit(tpinf);
        TpRc = tperrno;

        LeaveCriticalSection(&TpCriticalSection);

        if (iRc < 0)
            throw new CTUXERR(
tperrno );

        int value = 1;

        TlsSetValue(TLSIsTpInitedKey, &value);
    }

    // wrapper routine for class constructor
    __declspec(dllexport) CTPCC_TUXEDO*
    CTPCC_TUXEDO_new()
    {

```

```

        return new CTPCC_TUXEDO();
    }

    CTPCC_TUXEDO::CTPCC_TUXEDO()
    {
        // Add initialization of Tuxedo
        Structures
        m_txn = (TUX_DATA *)tpalloc("CARRAY", NULL,
sizeof(TUX_DATA));
        if (m_txn == NULL)
            throw new CTUXERR( tperrno );
    }

    CTPCC_TUXEDO::~CTPCC_TUXEDO()
    {
        // free the data structure allocated with
        tpalloc
        tpfree((char *)m_txn);
    }

    void CTPCC_TUXEDO::NewOrder()
    {
        long ilen, *olen;

        ThrTpInit();

        ilen = sizeof(TUX_DATA);
        olen = &ilen;

        if (tpcall("NEWORDER", (char *)m_txn, ilen,
(char **)&m_txn, (long *)olen, TPSIGRSTRT) == -1)
            throw new CTUXERR( tperrno );

        if ( m_txn->ErrorType != ERR_SUCCESS )
            throw new CTUXERR( m_txn-
>ErrorType, m_txn->error );
    }

    void CTPCC_TUXEDO::Payment()
    {
        long ilen, *olen;

        ThrTpInit();

        ilen = sizeof(TUX_DATA);
        olen = &ilen;

        if (tpcall("PAYMENT", (char *)m_txn, ilen,
(char **)&m_txn, (long *)olen, TPSIGRSTRT) == -1)
            throw new CTUXERR( tperrno );

        if ( m_txn->ErrorType != ERR_SUCCESS )
            throw new CTUXERR( m_txn-
>ErrorType, m_txn->error );
    }

    void CTPCC_TUXEDO::Delivery()
    {
        int iRc;
        long ilen, *olen;

```

```

        // Note: Delivery txn code in the tuxedo
server does not implement logging of the delivery
txn results, so cannot be used as
is to run an auditable TPC-C result. For that
reason, delivery txns should not
be done via tuxedo.
        // The code is included for
completeness.
        m_txn->u.Delivery.exec_status_code =
eDeliveryFailed;
        return;

        // normal path...
        ThrTpInit();

        GetLocalTime(&m_txn-
>u.Delivery.queue_time);

        ilen = sizeof(TUX_DATA);
        olen = &ilen;

        if ((iRc = tpcall("DELIVERY", (char
*)m_txn, ilen, TPNOREPLY)) == -1)
        {
            int TpRc = tperrno;
            m_txn-
>u.Delivery.exec_status_code = eDeliveryFailed;
        }
        else
            m_txn-
>u.Delivery.exec_status_code = eOK;
    }

    void CTPCC_TUXEDO::StockLevel()
    {
        long ilen, *olen;

        ThrTpInit();

        ilen = sizeof(TUX_DATA);
        olen = &ilen;

        if (tpcall("STOCKLEVEL", (char *)m_txn,
ilen, (char **)&m_txn, (long *)olen, TPSIGRSTRT) == -
1)
            throw new CTUXERR( tperrno );

        if ( m_txn->ErrorType != ERR_SUCCESS )
            throw new CTUXERR( m_txn-
>ErrorType, m_txn->error );
    }

    void CTPCC_TUXEDO::OrderStatus()
    {
        long ilen, *olen;

        ThrTpInit();

        ilen = sizeof(TUX_DATA);

```

```

        olen = &ilen;

        if (tpcall("ORDERSTATUS", (char *)m_txn,
ilen, (char **)&m_txn, (long *)olen, TPSIGRSTRT) == -
1)
            throw new CTUXERR( tperno );

        if ( m_txn->ErrorType != ERR_SUCCESS )
            throw new CTUXERR( m_txn-
>ErrorType, m_txn->error );
    }

char *CTUXERR::ErrorText()
{
    if (m_iErrorType == 0)
    {
        if (m_errno == TPEOS)
            sprintf( m_szErrorText,
"Error: TUXEDO error # %d, OS error # %d", m_errno,
m_iError );
        else
            sprintf( m_szErrorText,
"Error: TUXEDO error # %d", m_errno );
    }
    else
        sprintf( m_szErrorText, "Error:
Class %d, error # %d", m_iErrorType, m_iError );
    return m_szErrorText;
};

```

tpcc_tux.h

```

/*      FILE:          TPCC_TUX.H
 *
 *      TPC-C Kit Ver. 4.20.000
 *
 *      Microsoft
 *
 *      Copyright
 *
 *      Microsoft, 1999
 *
 *      All Rights Reserved
 *
 *      Version
 *
 *      4.10.000 audited by Richard Gimarc, Performance
 *      Metrics, 3/17/99
 *
 *      PURPOSE:  Header file for TPC-C Tuxedo
 *      class implementation.
 *
 *      Change history:
 *
 *      4.20.000 - updated rev number to
 *      match kit
 */

#pragma once

// need to declare functions for import, unless
// define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

```

```

class DllDecl CTUPCC_TUXEDO : public CTUPCC_BASE
{
private:
    struct TUX_DATA
    {
        int
        ErrorType;
        int
        error;

        union
        {
            NEW_ORDER_DATA      NewOrder;
            PAYMENT_DATA        Payment;
            DELIVERY_DATA       Delivery;
            STOCK_LEVEL_DATA    StockLevel;
            ORDER_STATUS_DATA   OrderStatus;
        } u;
    };

public:
    CTUPCC_TUXEDO();
    ~CTUPCC_TUXEDO(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn->u.NewOrder; };
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn->u.Payment; };
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn->u.Delivery; };
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn->u.StockLevel; };
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn->u.OrderStatus; };

    void NewOrder      ();
    void Payment       ();
    void Delivery      ();
    void StockLevel    ();
    void OrderStatus   ();
};

class CTUXERR : public CBaseErr
{
private:
    // TODO: should use the sz_Msg
    // field of the base class instead
    char m_szErrorText[64];
};

```

```

public:
    // use this interface for genuine
    Tuxedo errors
    CTUXERR( int iErr )
    {
        m_errno = iErr;
        m_iErrorType = 0;
        m_iError =
    };

    GetLastError(); // only meaningful if m_errno ==
    TPEOS

    // use this interface to
    impersonate a non-Tuxedo error type
    CTUXERR( int iErrorType, int
iError )
    {
        m_iErrorType =
iErrorType;
        m_iError = iError;
        m_errno = 0;
    };

    int m_errno;
    int m_iErrorType;
    int m_iError;

    // A CTUXERR class can
    impersonate another
    class, which happens if the error
    // was not actually a Tuxedo
    error, but was simply transmitted back via Tuxedo.
    int ErrorType()
    {
        if (m_iErrorType == 0)
            return
ERR_TYPE_TUXEDO;
        else
            return
m_iErrorType;
    };

    int ErrorNum() {return m_errno;};
    char *ErrorText();

};

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTUPCC_TUXEDO*
CTUPCC_TUXEDO_new();

typedef CTUPCC_TUXEDO* (TYPE_CTUPCC_TUXEDO)();

```

tpcc_type.h

```

/* Generated by IDL compiler version DEC DCE V2.0.0-6
 */
#ifdef tpcc_types_v1_0_included
#define tpcc_types_v1_0_included
#endif
#include <dce/idlbase.h>
#endif

```

```

#ifndef __cplusplus
extern "C" {
#endif

#ifndef nbase_v0_0_included
#include "dce\nbase.h"
#endif
#define NAME_LENGTH (32)
#define NEWO_INTERFACE (1)
#define PAYMENT_INTERFACE (2)
#define ORDER_STAT_INTERFACE (4)
#define DELIVERY_INTERFACE (8)
#define STOCK_INTERFACE (16)
#define ONLINE_INTERFACES (23)
#define ALL_INTERFACE (65535)
#define NEWO_TRANS (1)
#define PAYMENT_TRANS (2)
#define ORDER_STAT_TRANS (3)
#define DELIVERY_TRANS (4)
#define STOCK_TRANS (5)
#define MAX_TRAN_TYPE (5)
#define TPCC_SUCCESS (0)
#define TRPC_ERROR (1)
#define INVALID_NEWO (100)
typedef struct {
    idl_long_int sec;
    idl_long_int usec;
} time_type;
typedef struct {
    idl_short_int returncode;
    idl_short_int stats;
    time_type srv_start;
    time_type srv_end;
    time_type clnt_start;
    time_type clnt_end;
} data_header;
typedef struct {
    idl_long_int first_wh;
    idl_long_int last_wh;
    idl_long_int server_id;
} dbInfo_data_t;

#ifdef __cplusplus
}
#endif
#endif

```

trans.h

```

/* FILE: TRANS.H Microsoft
 * Copyright
 * TPC-C Kit Ver. 4.42.000
 * Microsoft, 2002
 * All Rights Reserved
 */

```

```

* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Header file for TPC-C structure
templates.
*
* Change history:
* 4.42.000 - changed w_id fields
from short to long to support >32K warehouses
* 4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define T_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define DATETIME_LEN 30
#define CREDIT_LEN 2
#define C_DATA_LEN 250
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqltypes.h, but is not available
// when compiling with dblink, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqltypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
typedef struct
{
    short
    /* SQLSMALLINT */
    unsigned short /*
SQLSMALLINT */ month;
    unsigned short /*
SQLSMALLINT */ day;

```

```

    unsigned short /*
SQLSMALLINT */ hour;
    unsigned short /*
SQLSMALLINT */ minute;
    unsigned short /*
SQLSMALLINT */ second;
    unsigned long /*
SQLINTEGER */ fraction;
} TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK, // 0
    "Transaction committed."
    eInvalidItem, // 1 "Item number
is not valid."
    eDeliveryFailed // 2 "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;
    short
    ol_quantity;

    // output params
    char
    ol_i_name[I_NAME_LEN+1];
    char
    ol_brand_generic[BRAND_LEN+1];
    double
    ol_i_price;
    double
    ol_amount;
    short
    ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long w_id;
    short d_id;
    long c_id;
    short o_ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char
    c_credit[CREDIT_LEN+1];

```

```

double      c_discount;
double      w_tax;
double      d_tax;
long        o_id;
short
o_commit_flag;
TIMESTAMP_STRUCT  o_entry_d;
short      o_all_local;
double     total_amount;
OL_NEW_ORDER_DATA
OL[MAX_OL_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long
w_id;
short
d_id;
long
c_id;
short
c_d_id;
long
c_w_id;
double
h_amount;
char
c_last[LAST_NAME_LEN+1];

    // output params
EXEC_STATUS
exec_status_code;
TIMESTAMP_STRUCT  h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN + 1];
char
c_street_1[ADDRESS_LEN+1];

```

```

char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT  c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long
ol_i_id;
long
ol_supply_w_id;
short
ol_quantity;
double
ol_amount;
TIMESTAMP_STRUCT  ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    long
w_id;
short
d_id;
long
c_id;
char
c_last[LAST_NAME_LEN+1];

    // output params
EXEC_STATUS
exec_status_code;
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN+1];
double
c_balance;
long
o_id;
TIMESTAMP_STRUCT  o_entry_d;
short
o_carrier_id;
OL_ORDER_STATUS_DATA
OL[MAX_OL_ORDER_STATUS_ITEMS];
short
o_ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

```

```

typedef struct
{
    // input params
    long
short
w_id;
o_carrier_id;

    // output params
EXEC_STATUS
exec_status_code;
SYSTEMTIME
queue_time;
long
o_id[10];
// id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME
queue;
//time delivery transaction queued
long
w_id;
//delivery warehouse
short
o_carrier_id;
//carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long
w_id;
short
d_id;
short
threshold;

    // output params
EXEC_STATUS
exec_status_code;
long
low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

tuxapp.cpp

```

/* FILE: TUXAPP.CPP
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C Tuxedo
server.
* Contact: Charles Levine
(clevine@microsoft.com)

```

```

*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

#include <windows.h>
#include <process.h>
#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <iostream.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <io.h>
#include <assert.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include <tmenv.h>
#include <xa.h>
#include <atmi.h>

#include "..\..\common\src\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "..\..\common\src\error.h"
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\db_dblib_dll\src\tpcc_dblib.h"
// DBLIB implementation of TPC-C txns
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns
#include "tuxapp.h"

char
    szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

// configuration settings from registry
TPCCREGISTRYDATA    Reg;

CTPCC_BASE          *pTxn = NULL;

#include "..\..\common\src\ReadRegistry.cpp"

/* FUNCTION: tpsvrinit ( int argc, char *argv[] )
*
* PURPOSE:          Initialize the Server to Database
connection.
*
* RETURNS:          int          0
                    Success
*
                    Failure          -1
*/

```

```

*/
int tpsvrinit ( int argc, char *argv[] )
{
    try
    {
        DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;
        GetComputerName(szMyComputerName,
&dwSize);
        szMyComputerName[dwSize] = 0;

        if ( ReadTPCCRegistrySettings(
&Reg ) )
            throw new CTUXAPP_ERR(
ERR_MISSING_REGISTRY_ENTRIES );

        GetParameters(argc, argv);

        switch (Reg.eDB_Protocol)
        {
            case ODBC:
                pTxn = new CTPCC_ODBC(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
szMyComputerName, Reg.szDbName );
                break;
            case DBLIB:
                pTxn = new CTPCC_DBLIB(
Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
szMyComputerName, Reg.szDbName );
                break;
        }
    }
    catch (CBaseErr *e)
    {
        WriteMessageToEventLog(e-
>ErrorText());
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
    }
    return 0;
}

/* FUNCTION: tpsvrdone ( void )
*
*/
void tpsvrdone ( void )
{
    delete pTxn;
    pTxn = NULL;
}

/* FUNCTION: BOOL GetParameters(int argc, char
*argv[] )

```

```

*
* PURPOSE:          This function parses the command
line passed in to the delivery executable,
initializing
*
*                   and filling in global
variable parameters.
*
* ARGUMENTS:       int          argc
                    number of command line arguments passed to
delivery
*
                    char
*argv[]          array of command line argument
pointers
*
*/

static void GetParameters(int argc, char *argv[] )
{
    // advance through args until "--" is found
    for(int j=0; j<argc; j++)
    {
        if (strcmp(argv[j],"--") == 0)
            break;
    }

    for(int i=j+1; i<argc; i++)
    {
        if ( argv[i][0] == '-' ||
argv[i][0] == '/' )
        {
            switch(argv[i][1])
            {
                case 'S':
                    strcpy(Reg.szDbServer, argv[i]+2);
                    break;
                case 'D':
                    strcpy(Reg.szDbName, argv[i]+2);
                    break;
                case 'P':
                    strcpy(Reg.szDbPassword, argv[i]+2);
                    break;
                case 'U':
                    strcpy(Reg.szDbUser, argv[i]+2);
                    break;
                default:
                    cout << "Microsoft TPC-C Kit" << endl;
                    cout << "Tuxedo Server" << endl << endl;
                    cout << "Usage:" << endl;
                    cout << "    tuxapp [<tuxedo-args>] -- -

```

```

S<sql-server> [-D<database>] [-U<user>] [-
P<password>]" << endl << endl;

        cout << "All parameters default to values
in registry." << endl;

        throw new CTUXAPP_ERR( ERR_BAD_SYNTAX );
    }
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR    szMsg[256];
    HANDLE   hEventSource;
    LPTSTR   lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TUXAPP.EXE"));

    _stprintf(szMsg, TEXT("Error in TUXAPP.EXE: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
SID
            2, // strings in
lpszStrings
            0, // no bytes of raw
data
            (LPCTSTR *)lpszStrings, // array of
error strings
            NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

void NEWORDER( TPSVCINFO *rqst )
{
    PNEW_ORDER_DATA    pNewOrder;
    TUX_DATA            *pData;
    const int           iSize = sizeof(pData-
>u.NewOrder);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

```

```

        pNewOrder = pTxn-
>BuffAddr_NewOrder();
        assert( rqst->len ==
sizeof(TUX_DATA) );
        memcpy(pNewOrder, &pData-
>u.NewOrder, iSize );

        pTxn->NewOrder();
        memcpy( &pData->u.NewOrder,
pNewOrder, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.NewOrder,
pNewOrder, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.NewOrder,
pNewOrder, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
}

void PAYMENT( TPSVCINFO *rqst )
{
    PPAYMENT_DATA    pPayment;
    TUX_DATA          *pData;
    const int         iSize = sizeof(pData-
>u.Payment);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pPayment = pTxn-
>BuffAddr_Payment();
        assert( rqst->len ==
sizeof(TUX_DATA) );
        memcpy(pPayment, &pData-
>u.Payment, iSize );

        pTxn->Payment();
        memcpy( &pData->u.Payment,
pPayment, iSize );

```

```

        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Payment,
pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Payment,
pPayment, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
}

// Note: Delivery txn code below does not implement
logging of the delivery
// txn results, so cannot be used as is to run
an auditable TPC-C result.
// The code is included for completeness.
void DELIVERY( TPSVCINFO *rqst )
{
    PDELIVERY_DATA    pDelivery;
    TUX_DATA          *pData;
    const int         iSize = sizeof(pData-
>u.Delivery);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pDelivery = pTxn-
>BuffAddr_Delivery();
        assert( rqst->len ==
sizeof(TUX_DATA) );
        memcpy(pDelivery, &pData-
>u.Delivery, iSize );

        pTxn->Delivery();

        memcpy( &pData->u.Delivery,
pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {

```

```

        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.Delivery,
pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.Delivery,
pDelivery, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
}

void STOCKLEVEL( TPSVCINFO *rqst )
{
    PSTOCK_LEVEL_DATA  pStockLevel;
    TUX_DATA            *pData;
    const int           iSize =
sizeof(pData->u.StockLevel);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pStockLevel = pTxn-
>BuffAddr_StockLevel();
        assert( rqst->len ==
sizeof(TUX_DATA) );
        memcpy(pStockLevel, &pData-
>u.StockLevel, iSize );

        pTxn->StockLevel();
        memcpy( &pData->u.StockLevel,
pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.StockLevel,
pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {

```

```

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.StockLevel,
pStockLevel, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
}

void ORDERSTATUS( TPSVCINFO *rqst )
{
    PORDER_STATUS_DATA pOrderStatus;
    TUX_DATA            *pData;
    const int iSize = sizeof(pData-
>u.OrderStatus);

    try
    {
        pData = (TUX_DATA*)rqst->data;
        pData->retval = ERR_SUCCESS;
        pData->error = 0;

        pOrderStatus = pTxn-
>BuffAddr_OrderStatus();
        assert( rqst->len ==
sizeof(TUX_DATA) );
        memcpy(pOrderStatus, &pData-
>u.OrderStatus, iSize );

        pTxn->OrderStatus();
        memcpy( &pData->u.OrderStatus,
pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
    catch (CBaseErr *e)
    {
        pData->retval = e->ErrorType();
        pData->error = e->ErrorNum();
        memcpy( &pData->u.OrderStatus,
pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
        delete e;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception."));
        pData->retval = ERR_TYPE_LOGIC;
        pData->error = 0;
        memcpy( &pData->u.OrderStatus,
pOrderStatus, iSize );
        tpreturn( TPSUCCESS, 0, rqst-
>data, sizeof(TUX_DATA), 0);
    }
}

```

```

/* FUNCTION: CTUXAPP_ERR::ErrorText
 *
 */
char* CTUXAPP_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
"Required entries missing from registry."
},
        { ERR_BAD_SYNTAX,
"Syntax error in input
parameters."
},
        { ERR_UNKNOWN_DB_PROTOCOL,
"Unknown database protocol specified in
registry."
},
        { 0, ""
}
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_Error ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

```

tuxapp.h

```

/* FILE: TUXAPP.H
 *
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Header file for TPC-C Tuxedo
server.

```



```

*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

enum TUXERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_BAD_SYNTAX,
    ERR_UNKNOWN_DB_PROTOCOL
};

class CTUXAPP_ERR : public CBaseErr
{
public:
    TUXERROR m_Error;

    CTUXAPP_ERR(TUXERROR Err) {
m_Error = Err; };
    ~CTUXAPP_ERR() {};

    int ErrorType() {return
ERR_TYPE_TUXEDO;};
    int ErrorNum() {return m_Error;};
    char *ErrorText();
};

struct TUX_DATA
{
    int
    retval;
    int
    error;

    union
    {
        NEW_ORDER_DATA
    NewOrder;
        PAYMENT_DATA
    Payment;
        DELIVERY_DATA
    Delivery;
        STOCK_LEVEL_DATA    StockLevel;
        ORDER_STATUS_DATA   OrderStatus;
    } u;
};

static void GetParameters(int argc, char *argv[]);
static void WriteMessageToEventLog(LPTSTR lpszMsg);

#if defined(__cplusplus)
extern "C" {
#endif

void NEWORDER( TPSVCINFO *rqst );
void PAYMENT( TPSVCINFO *rqst );
void DELIVERY( TPSVCINFO *rqst );
void STOCKLEVEL( TPSVCINFO *rqst );
void ORDERSTATUS( TPSVCINFO *rqst );

```

```

#if defined(__cplusplus)
}
#endif

tuxmain.c


---


/* FILE: TUXMAIN.C
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implementation for TPC-C Tuxedo
server.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - updated rev number to
match kit
*/

#include <stdio.h>
#include <xa.h>
#include <atmi.h>

#if defined(__cplusplus)
extern "C" {
#endif
extern int _tmrunserver _((int));
extern void DELIVERY _((TPSVCINFO *));
extern void NEWORDER _((TPSVCINFO *));
extern void ORDERSTATUS _((TPSVCINFO *));
extern void PAYMENT _((TPSVCINFO *));
extern void STOCKLEVEL _((TPSVCINFO *));
#if defined(__cplusplus)
}
#endif

static struct tmdsptchtbl_t _tmdsptchtbl[] = {
    { "DELIVERY", "DELIVERY", (void (*)
_((TPSVCINFO *)) DELIVERY, 0, 0 },
    { "NEWORDER", "NEWORDER", (void (*)
_((TPSVCINFO *)) NEWORDER, 1, 0 },
    { "ORDERSTATUS", "ORDERSTATUS", (void (*)
_((TPSVCINFO *)) ORDERSTATUS, 2, 0 },
    { "PAYMENT", "PAYMENT", (void (*)
_((TPSVCINFO *)) PAYMENT, 3, 0 },
    { "STOCKLEVEL", "STOCKLEVEL", (void (*)
_((TPSVCINFO *)) STOCKLEVEL, 4, 0 },
    { NULL, NULL, NULL, 0, 0 }
};

```

```

#ifndef _TMDLLIMPORT
#define _TMDLLIMPORT
#endif

_TMDLLIMPORT extern struct xa_switch_t tnull_switch;

struct tmsvargs_t tmsvargs = {
    NULL,
    &_tmdsptchtbl[0],
    0,
    tpsvrinit,
    tpsvrdone,
    _tmrunserver, /* PRIVATE */
    NULL, /* RESERVED
*/
    NULL, /* RESERVED
*/
    NULL, /* RESERVED
*/
    NULL /* RESERVED
*/
};

struct tmsvargs_t *
#ifdef _TMPROTOTYPES
_tmgetsvargs(void)
#else
_tmgetsvargs()
#endif
{
    tmsvargs.xa_switch = &tnull_switch;
    return(&tmsvargs);
}

int
#ifdef _TMPROTOTYPES
main(int argc, char **argv)
#else
main(argc,argv)
int argc;
char **argv;
#endif
{
#ifdef TMMAINEXIT
#include "mainexit.h"
#endif

    return( _tmstartserver( argc, argv,
_tmgetsvargs()));
}

txn_base.h


---


/* FILE: TXN_BASE.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved

```

```

*
*                               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*   PURPOSE: Header file for TPC-C txn class
implementation.
*
*   Change history:
*   4.20.000 - updated rev number to
match kit
*/

#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllimport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
() = 0;
    virtual void Payment
() = 0;
    virtual void Delivery
() = 0;
    virtual void StockLevel
() = 0;
    virtual void OrderStatus
() = 0;
};

```

tpcc_oledb.cpp

```

/*   FILE:           TPCC_OLEDB.CPP
*                               Microsoft
TPC-C Kit Ver. 4.42.000
*                               Copyright
Microsoft, 2004
*                               Written by
Sergey Vasilevskiy

```

```

*                               All Rights Reserved
*
*
*   PURPOSE: Implements OLEDB calls for TPC-C
txns.
*   Contact: Charles Levine
(clevine@microsoft.com)
*
*/

#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
#include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifdef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:

```

```

        DisableThreadLibraryCalls(hModule);

        break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */;
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
*
*/
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
"Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
"Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
"No orders found for customer." },
        { ERR_RETRIED_TRANS,
"Retries before transaction succeeded." },
        { 0, "" }
    };

}

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(

```

```

        LPCSTR szServer,          // name of
SQL server
        LPCSTR szUser,          //
user name for login
        LPCSTR szPassword,     // password
for login
        LPCSTR szHost,        //
not used
        LPCSTR szDatabase,     // name of
database to use
        LPCWSTR szSPPrefix )   //
prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
    LPCSTR szServer,
    // name of SQL server
    LPCSTR szUser,
    // user name for login
    LPCSTR szPassword,
    // password for login
    LPCSTR szHost,
    // not used
    LPCSTR szDatabase,
    // name of database to use
    LPCWSTR szSPPrefix
    // prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int
    iRc;
    int
    i;
    HRESULT hr;

    IDBInitialize*
    pIDBInitialize = NULL; //
data source interface
    IDBProperties*
    pIDBProperties = NULL;
    ICommandText*
    pICommandText;
    // SQL command without parameters
    wchar_t
    szwServer[iMaxNameLen]; //
Unicode string used to convert to BSTR
    wchar_t
    szwDatabase[iMaxNameLen]; // Unicode
string used to convert to BSTR
    wchar_t
    szwUser[iMaxNameLen]; //
Unicode string used to convert to BSTR
    wchar_t
    szwPassword[iMaxNameLen]; // Unicode
string used to convert to BSTR

```

```

    // Copy stored procedures prefix
    wcsncpy(m_szwSPPrefix, szSPPrefix,
sizeof(m_szwSPPrefix)/sizeof(m_szwSPPrefix[0]));

    // Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
    iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
    iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
    iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
    iRc = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

    // Initialize COM library to be able to use
OLE-DB interfaces
    CoInitialize(NULL);

    // Initialization - create SQLOLEDB
component
    //hr = CoCreateInstance(CLSID_SQLOLEDB, //
GUID of SQLOLEDB component
    // Compile for SNAC
    hr = CoCreateInstance(CLSID_SQLNCLI, //
GUID of SQLNCLI component
        NULL,
        // not defining an aggregate
component, so NULL
        CLSCTX_INPROC_SERVER, //
run the component in our process
        IID_IDBInitialize,
        (void **) &pIDBInitialize);

    /*
    Initialize the property values needed
    to establish the connection.
    */
    for(i = 0; i < 4; i++)
        VariantInit(&m_InitProperties[i].vValue);
    //Server name.
    m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
    m_InitProperties[0].vValue.vt = VT_BSTR;
    m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
    m_InitProperties[0].dwOptions =
DBPROPOPTIONS_REQUIRED;
    m_InitProperties[0].colid = DB_NULLID;
    //Database.
    m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
    m_InitProperties[1].vValue.vt = VT_BSTR;
    m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
    m_InitProperties[1].dwOptions =
DBPROPOPTIONS_REQUIRED;

```

```

    m_InitProperties[1].colid = DB_NULLID;
    //Username (login).
    m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
    m_InitProperties[2].vValue.vt = VT_BSTR;
    m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
    m_InitProperties[2].dwOptions =
DBPROPOPTIONS_REQUIRED;
    m_InitProperties[2].colid = DB_NULLID;
    //Password.
    m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
    m_InitProperties[3].vValue.vt = VT_BSTR;
    m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
    m_InitProperties[3].dwOptions =
DBPROPOPTIONS_REQUIRED;
    m_InitProperties[3].colid = DB_NULLID;
    /*
    Construct the DBPROPSET
    structure(m_rgInitPropSet). The
    DBPROPSET structure is used to pass an array of
    DBPROP
    structures (m_InitProperties) to the
    SetProperties method.
    */
    m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
    m_rgInitPropSet.cProperties = 4;
    m_rgInitPropSet.rgProperties =
m_InitProperties;
    //Set initialization properties.
    if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
        (void **)&pIDBProperties)))
    {
        ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
    }

    hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);

    pIDBProperties->Release();
    //Now establish the connection to the data
source.
    hr = pIDBInitialize->Initialize();

    // Free BSTR property strings
    for(i = 0; i < 4; i++)
    {
        SysFreeString(m_InitProperties[i].vValue.bstrVal);
    }

```

```

        hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

        // Releasing this has no effect on the SQL
Server connection
        // of the data source object because of the
reference maintained by
        // m_pIDBCreateSession.
        pIDBInitialize->Release();
        pIDBInitialize = NULL;

        hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
        }

        hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID ICommandText, (IUnknown
**) &pICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
        }

        hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
        }

        hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
        }

        pICommandText->Release();

        // verify that version of stored procs on
server is correct
        CheckSPVersion();

        // Get IMalloc interface
        hr = CoGetMalloc(1, (LPMAALLOC
*) &m_pIMalloc);

        // Bind parameters for each of the
transactions
        InitNewOrderParams();
        InitPaymentParams();

```

```

        InitOrderStatusParams();
        InitDeliveryParams();
        InitStockLevelParams();
    }

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
library
}

/*
* Check stored procedures version on the
server.
*/
void CTPCC_OLEDB::CheckSPVersion()
{
    HRESULT hr;
    char
db_sp_version[10];
    ICommandText* pICommandText;
    IAccessor* pIAccessor;
    IRowset* pRowset;
    const ULONG nOutputParams
= 1;
    // output 1st result set columns
    HACCESSOR
hTpccVersionOutputAccessor;
    // Structure to bind in accessor
    DBBINDING
acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG
cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow =
&rghRow;

    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID ICommandText, (IUnknown
**) &pICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
    }

    hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"{call tpcc_version}");

```

```

        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
        }

        hr = pICommandText-
>QueryInterface(IID_IAccessor, (void **) &pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
        }

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset
        SetBinding(&acOutputDBBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

        hr = pIAccessor->CreateAccessor(
DBACCESSOR_ROWDATA,
nOutputParams,
acOutputDBBinding,
sizeof(db_sp_version),
&hTpccVersionOutputAccessor,
acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
        }

        hr = pICommandText->Execute(NULL,
IID_IRowset, NULL, NULL, (IUnknown **) &pRowset);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
        }

        // Fetch the result row handle(s)
        hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
0, cRows, &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
        }

        // Fetch the actual row data by handle
        hr = pRowset->GetData(rghRow,
hTpccVersionOutputAccessor, &db_sp_version);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
        }

```

```

    }

    // Release row(s)
    hr = pRowset->Release();

    pICommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT
    hr;
    //char
    szState[6];
    char
    szMsg[SQL_MAX_MESSAGE_LENGTH];
    char
    szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr;
not allocated until needed (maybe never)
    int
        iLen;
    // Interfaces
    IErrorInfo*          pIErrorInfoAll
= NULL;
    IErrorInfo*          pIErrorInfoRecord
= NULL;
    IErrorRecords*       pIErrorRecords
= NULL;
    ISupportErrorInfo*   pISupportErrorInfo
= NULL;
    ISQLServerErrorInfo*
    pISQLServerErrorInfo = NULL;
    ISQLErrorInfo*
    pISQLErrorInfo = NULL;

    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG
    nRecs;
    ULONG
    nRec;

    // SQL Server error information from
ISQLServerErrorInfo.
    SSERRORINFO*
    pSSErrorInfo =
NULL;
    OLECHAR*
    pSSErrorStrings =
NULL;

```

```

    assert(pObjectWithError != NULL);
    pOLEDBErr = new COLEDBERR(szLocation);

    pOLEDBErr->m_NativeError = 0;
    pOLEDBErr->m_eAction = eAction;
    pOLEDBErr->m_bDeadLock = FALSE;

    szTmp[0] = 0;

    // Only ask for error information if the
interface supports it.
    // Note: SQLOLEDB provider supports error
interface, so this check is
    // for good style only.
    hr = pObjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)
&pISupportErrorInfo);
    if (FAILED(hr))
    {
        _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
        strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
        throw pOLEDBErr;
    }
    /*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError))
    {
        _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError
interface not supported");
        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
        strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
        return;
    }*/

    // Do not test the return of GetErrorInfo.
It can succeed and return
    // a NULL pointer in pIErrorInfoAll. Simply
test the pointer.
    GetErrorInfo(0, &pIErrorInfoAll);

    if (pIErrorInfoAll != NULL)
    {
        // Test to see if it's a valid
OLE DB IErrorInfo interface
        // exposing a list of records.
        if (SUCCEEDED(pIErrorInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)
&pIErrorRecords)))
        {
            pIErrorRecords-
>GetRecordCount(&nRecs);

```

```

// Within each record,
retrieve information from each
// of the defined
interfaces.
        for (nRec = 0; nRec <
nRecs; nRec++)
        {
            // Request
the generic SQL error interface.
            pIErrorRecords->GetCustomErrorObject(nRec,

IID_ISQLErrorInfo, // generic SQL error
interface
            (IUnknown**) &pISQLErrorInfo);

            if
(pISQLErrorInfo != NULL)
            {
                //
Request SQL Server-specific error interface, not the
generic SQL error interface.
                pISQLErrorInfo->QueryInterface(

IID_ISQLServerErrorInfo, // SQL Server
error interface
                (void**) &pISQLServerErrorInfo);
            }

            // Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
            if
(pISQLServerErrorInfo != NULL)
            {
                pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);

                //
ISQLServerErrorInfo::GetErrorInfo succeeds
//
even when it has nothing to return. Test the
//
pointers before using.
                if
(pSSErrorInfo)
                {
                    // First, add the error message.

                    // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,

```

```

        pSSErrorInfo->pwszMessage, -1,
        szMsg, sizeof(szMsg),
        NULL, NULL);

    // quit if there isn't enough room to
    concatenate error text
    if ( ( strlen(szMsg) + 2) > ( sizeof(szTmp) -
    strlen(szTmp)) )
        break;

    // include line break after first error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\r\n");

    // concatenate the error record to the
    overall error message
    strcat( szTmp, szMsg );

    // Second, add the stored procedure name
    and line number, if available.

    if (wcslen(pSSErrorInfo->pwszProcedure)>0)
    {
        // Prefix with a line break
        iLen = sprintf(szMsg,
        "\r\nProcedure: ");

        // Convert Unicode error string
        to ANSI.

        WideCharToMultiByte(CP_THREAD_ACP, 0,
        pSSErrorInfo->pwszProcedure, -1,
        sizeof(szMsg) - iLen,
        &szMsg[iLen],
        NULL, NULL);

        // Check if have space to add the
        line number.

```

```

        // Assume the line number takes
        no more than 3 digits.
        if ((strlen(szMsg) + 4)<
        sizeof(szMsg))
        {
            _snprintf(&szMsg[strlen(szMsg)],
            sizeof(szMsg),
            "%d",
            pSSErrorInfo->wLineNumber);
        }

        // quit if there isn't enough
        room to concatenate error text
        if ( ( strlen(szMsg) + 2) >
        (sizeof(szTmp) - strlen(szTmp)) )
            break;

        // concatenate the error record
        to the overall error message
        strcat( szTmp, szMsg );

        // copy the overall error string
        to the exception
        pOLEDBErr->m_OLEDBErrStr = new
        char[strlen(szTmp)+1];
        strcpy(pOLEDBErr->m_OLEDBErrStr,
        szTmp);
    }

    // Third, capture the (first) database
    error
    if (pOLEDBErr->m_NativeError == 0 &&
    pSSErrorInfo->lNative != 0)
    {
        pOLEDBErr->m_NativeError =
        pSSErrorInfo->lNative;

        // Check for deadlock error code
        and set the deadlock flag

```

```

        if (pSSErrorInfo->lNative ==
        1205)
        {
            pOLEDBErr->m_bDeadLock
            = TRUE;
        }

        // IMalloc::Free needed to release
        references
        // on returned values.
        if (m_pIMalloc != NULL)
        {
            m_pIMalloc->Free(pSSErrorStrings);
            m_pIMalloc->Free(pSSErrorInfo);
        }

        pISQLServerErrorInfo->Release();
    }
    else
    {
        //
        Custom error object is not supported.
        Use general OLE-DB error interface.
        //
        //
        Get the numeric error code
        pIErrorRecords->GetBasicErrorInfo(nRec,
        &BasicErrorInfo);
        if
        (pOLEDBErr->m_NativeError == 0)
        {
            // Get the failed call HRESULT code, which
            is not really the native error
            pOLEDBErr->m_NativeError =
            BasicErrorInfo.hrError;
        }
        //
        //
        Try to get the string description of the error.

```

```

        pIErrorRecords->GetErrorInfo(nRec,
        LOCALE_USER_DEFAULT,
        (IErrorInfo**) &pIErrorInfoRecord);

        if
        (pIErrorInfoRecord)
        {
            pIErrorInfoRecord-
            >GetDescription(&bstrDescription);

            // Convert Unicode error string to ANSI.
            WideCharToMultiByte(CP_THREAD_ACP, 0,
            bstrDescription, -1,
            szMsg, sizeof(szMsg),
            NULL, NULL);

            pOLEDBErr->m_OLEDBErrStr = new
            char[strlen(szMsg)+1];
            strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);
        }
        // for()
        // if
        (SUCCEEDED(pIErrorInfoAll-
        >QueryInterface(IID_IErrorRecords, (void**)
        &pIErrorRecords)))
        else
        { // No IErrorRecords
        interface supported. Use default IErrorInfo.
        // Note: SQLLEDB
        supports IErrorRecords, so this check is for good
        style only.
            _snprintf(szMsg,
            sizeof(szMsg), "IErrorRecords interface not
            supported");
            pOLEDBErr-
            >m_OLEDBErrStr = new char[strlen(szMsg)+1];
            strcpy(pOLEDBErr-
            >m_OLEDBErrStr, szMsg);
        }

        pIErrorInfoAll->Release();
        // if (pIErrorInfoAll != NULL)
        else
        { // No IErrorInfo interface
        supported.
        // Note: SQLLEDB supports
        IErrorInfo, so this check is for good style only.

```

```

            _snprintf(szMsg, sizeof(szMsg),
            "IErrorInfo interface not supported");
            pOLEDBErr->m_OLEDBErrStr = new
            char[strlen(szMsg)+1];
            strcpy(pOLEDBErr->m_OLEDBErrStr,
            szMsg);
        }
        throw pOLEDBErr;
    }
    /*
    *
    * Create a new command object from the SQL
    text passed in.
    */
    void CTPCC_OLEDB::CreateCommand(wchar_t*
    szSQLCommand, // I: SQL
    query for the command
    ICommandText**
    ppICommandText // O: returned command object
    )
    {
        HRESULT hr;
        // Create a new command object
        hr = m_pIDBCreateCommand-
        >CreateCommand(NULL, IID ICommandText, (IUnknown
        **)ppICommandText);
        if (FAILED(hr))
        {
            ThrowError(m_pIDBCreateCommand,
            COLEDBERR::eCreateCommand,
            "CTPCC_OLEDB::CreateCommand");
        }
        // Set command text
        hr = (*ppICommandText)-
        >SetCommandText(DBGUID_SQL, szSQLCommand);
        if (FAILED(hr))
        {
            ThrowError(*ppICommandText,
            COLEDBERR::eSetCommandText,
            "CTPCC_OLEDB::CreateCommand");
        }
        // Prepare the command
        PrepareCommand(*ppICommandText);
    }
    /*
    *
    * QueryInterface and Prepare in one function
    for simplicity.
    * DEFERRED PREPARE property is set to off to
    prepare immediately.
    */
    void CTPCC_OLEDB::PrepareCommand(ICommandText*
    pICommandText)

```

```

    {
        HRESULT hr;
        ICommandPrepare* pICommandPrepare;
        ICommandProperties* pICommandProperties;
        DBPROPSET
        rowSetPropSet;
        DBPROP
        rowSetProp;

        // Set the deferred prepare property to
        false.
        rowSetProp.dwPropertyID =
        SSPROP_DEFERPREPARE;
        memset(&rowSetProp.vValue, 0,
        sizeof(rowSetProp.vValue));
        rowSetProp.dwOptions =
        DBPROPOPTIONS_REQUIRED;
        rowSetProp.colid = DB_NULLID;

        rowSetPropSet.cProperties = 1;
        rowSetPropSet.guidPropertySet =
        DBPROPSET_SQLSERVERROWSET;
        rowSetPropSet.rgProperties = &rowSetProp;

        // Query interface for setting properties
        hr = pICommandText-
        >QueryInterface(IID ICommandProperties, (void
        **) &pICommandProperties);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
            COLEDBERR::eQueryInterface,
            "CTPCC_OLEDB::PrepareCommand");
        }
        // Set the property set
        hr = pICommandProperties->SetProperties(1,
        &rowSetPropSet);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
            COLEDBERR::eQueryInterface,
            "CTPCC_OLEDB::PrepareCommand");
        }
        // Get interface for preparing commands
        hr = pICommandText-
        >QueryInterface(IID ICommandPrepare, (void
        **) &pICommandPrepare);
        if (FAILED(hr))
        {
            ThrowError(pICommandText,
            COLEDBERR::eQueryInterface,
            "CTPCC_OLEDB::PrepareCommand");
        }
        // Prepare Payment command
        hr = pICommandPrepare->Prepare(0xFFFFFFFF);
        if (FAILED(hr))
        {

```

```

        ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
    }
}

/*
 * Initialize fields of an array of bindings
 * structures.
 * Needs to be called before setting
 * individual parameter/column bindings.
 */
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings, // IO: array of bindings

    int iCount, // I: number of
elements in the array

    eBindingType BindingType) //
I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false); //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;

```

```

        pDBBindings[i].bScale = 0;
    }
}

/*
 * Perform binding for one parameter or output
 * column.
 */
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure

    size_t obValue, // I: parameter (column) offset in the user
buffer

    size_t cbMaxLen, //
I: parameter (column) length

    DBTYPE wType // I: parameter (column) type
)
{
    pDBBinding->obValue = (ULONG)obValue;
    pDBBinding->cbMaxLen = (ULONG)cbMaxLen;
    pDBBinding->wType = wType;
}

void CTPCC_OLEDB::InitStockLevelParams()
{
    int i;

    HRESULT hr;
    wchar_t
szName[IMAX_SP_NAME_LEN];
    IAccessor*
pIAccessor;

    const ULONG
nInputParams = 3; // input parameters
const ULONG
nOutputParams = 1; // output 1st result

    set columns
    // Structure to bind in accessor
    DBBINDING
acInputDBBinding[nInputParams];
    DBBINDSTATUS
acInputDBBindStatus[nInputParams];
    DBBINDING
acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call
%stpcck_stocklevel (?,?,?)}", m_szSPPrefix);

```

```

    // Create and Prepare a new command object
    for StockLevel.
    CreateCommand(szName,
&m_pIStockLevelCommand);

    // Describe the consumer buffer by filling
    in the array
    // of DBBINDING structures. Each binding
    associates
    // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // StockLevel parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, w_id),
sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

    // StockLevel parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, d_id),
sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

    // StockLevel parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, threshold),
sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

    hr = m_pIStockLevelCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIStockLevelCommand,
COLEDBERR::eQueryInterface,
"InitStockLevelParams()");
    }

    hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelInputAccessor,
acInputDBBindStatus);

    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
    }

    m_StockLevelExecuteParams.cParamSets = 1;
    m_StockLevelExecuteParams.hAccessor =
m_hStockLevelInputAccessor;
    m_StockLevelExecuteParams.pData =
&m_txn.StockLevel;

    // Now fill the binding information for
    result set 1 output columns

```



```

        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
more than one row.
        i = 0;
        // StockLevel output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(STOCK_LEVEL_DATA, low_stock),
sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

        hr = piAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,
        nOutputParams,
acOutputDBBinding,
sizeof(STOCK_LEVEL_DATA),

&m_hStockLevelOutputAccessor,
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(piAccessor,
COLEDBERR::eCreateAccessor,
"InitStockLevelParams()");
        }
    }

void CTPCC_OLEDB::StockLevel()
{
    HRESULT                hr;
    int                    iTryCount = 0;
    IRowset*               pRowset;
    LONG                   cRows = 1;
    // number of rows returned in the rowset
    ULONG
cRowsObtained;
    HROW                   rgRow;
    //returned row handles
    HROW*                  prghRow =
&rgRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            hr =
m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
&m_StockLevelExecuteParams, NULL,

(IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
COLEDBERR::eExecute, "StockLevel()");
            }
        }
    }
}

```

```

        // Fetch the result row
handle(s)
        hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetNextRows, "StockLevel()");
        }

        // Fetch the actual row
data by handle
        hr = pRowset-
>GetData(rgRow, m_hStockLevelOutputAccessor,
&m_txn.StockLevel);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
COLEDBERR::eGetData, "StockLevel()");
        }

        // Release row(s)
        hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
        // Release rowset
        hr = pRowset-
>Release();

        m_txn.StockLevel.exec_status_code = eOK;
        break;
    }
    catch (COLEDBERR *e)
    {
        if (!e->m_bDeadLock)
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int                i, j, iOlCount;
}

```

```

HRESULT
hr;
wchar_t
szName[IMAX_SP_NAME_LEN];
IAccessor*
piAccessor;

const ULONG
nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
const ULONG
nOutputParams = 5; // output 1st result
set columns
const ULONG
nOutputParams2 = 8; // output 2nd result
set columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
DBBINDING
acOutputDBBinding2[nOutputParams2];
DBBINDSTATUS
acOutputDBBindStatus2[nOutputParams2];

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

i = 0;
// NewOrder parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, w_id),
sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

// NewOrder parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, d_id),
sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

// NewOrder parameter 3
SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, c_id),
sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

// NewOrder parameter 4
SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_ol_cnt),
sizeof(m_txn.NewOrder.o_ol_cnt), DBTYPE_UI1);

// NewOrder parameter 5

```

```

        SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, o_all_local),
sizeof(m_txn.NewOrder.o_all_local), DBTYPE_UI1);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);
        }

        // Now fill the binding information for
result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

        // Binding for the order line rowsets (each
consist of one row).
        // Bind to offsets of the OL_NEW_ORDER_DATA
structure
instead of NEW_ORDER_DATA.
        // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_name),
sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_stock),
sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
DBTYPE_STR);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_i_price),
sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

        // NewOrder output column 5
        SetBinding(&acOutputDBBinding[i++],
offsetof(OL_NEW_ORDER_DATA, ol_amount),

```

```

sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

        // Now fill the binding information for
result set 2 output columns
        InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, w_tax),
sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, d_tax),
sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_id),
sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_last),
sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

        // NewOrder output column 5
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_discount),
sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, c_credit),
sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_entry_d),
sizeof(m_txn.NewOrder.o_entry_d),
DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
offsetof(NEW_ORDER_DATA, o_commit_flag),
sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first

            // Print the fixed first portion
of parameters
            i = _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),

```

```

        L"call %stppc_neworder (?,?,?,?,"
m_szSPPrefix);

        // Now print the variable portion
depending on the number of order line parameters
        for (iOlCount = 0; iOlCount <= j;
++iOlCount)
        {
            i +=
            _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",?,?,?");
        }

        // Print the fixed end
        if (j != MAX_OL_NEW_ORDER_ITEMS -
1)
        {
            // append 'default' for
the parameters that are not used
            i +=
            _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L",default}");
        }
        else // using all 15 order
line parameters
        {
            i +=
            _snprintf(&szName[i],
sizeof(szName)/sizeof(szName[0]) - i, L"}");
        }

        // Create and Prepare a new
command object for NewOrder.
        CreateCommand(szName,
&m_pINewOrderCommand[j]);

        // Now create the input accessor
for this prepared command
        hr = m_pINewOrderCommand[j]-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[j],
COLEDBERR::eQueryInterface, "InitNewOrderParams()");
        }

        hr = pIAccessor->CreateAccessor(

            DBACCESSOR_PARAMETERDATA,

            5 +
            3 * (j + 1),

            acInputDBBinding,

```

```

sizeof(NEW_ORDER_DATA),

&m_hNewOrderInputAccessor[j],

acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
}

m_NewOrderExecuteParams[j].cParamSets = 1;
//
m_NewOrderExecuteParams.hAccessor is set dynamically
at run-time
// based on the number of new
order items for the particular transaction call.
m_NewOrderExecuteParams[j].hAccessor =
m_hNewOrderInputAccessor[j];
m_NewOrderExecuteParams[j].pData
= &m_txn.NewOrder;

// Create accessor for the first
rowset
hr = pIAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(OL_NEW_ORDER_DATA),
&m_hNewOrderOutputAccessor[j],
acOutputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
}

// Create accessor for the second
rowset
hr = pIAccessor->CreateAccessor(
DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
nOutputParams2,
acOutputDBBinding2,
sizeof(NEW_ORDER_DATA),
&m_hNewOrderOutputAccessor2[j],
acOutputDBBindStatus2);
if (FAILED(hr))
{

```

```

        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
    }
}
pIAccessor->Release();
}

void CTPCC_OLEDB::NewOrder()
{
    HRESULT                hr;
    int                    iTryCount = 0;
    IMultipleResults*      pMultipleResults;
    IRowset*                pRowset;
    IRowset*                pRowset2;
    LONG                    cRows = 1; // number of rows
    returned in the 1st rowset
    ULONG                    cRowsObtained;
    HROW                    rghRows; //returned row handles
    for the 1st result set
    HROW*                    prghRows = &rghRows;
    LONG                    cRows2 = 1; // number of rows
    returned in the 2nd rowset
    ULONG                    cRowsObtained2;
    HROW                    rghRows2; //returned row handle
    for the 2nd result set
    HROW*                    prghRows2 = &rghRows2;
    int                    i;
    long                    lRowsAffected; // the number of
    affected rows for a rowset
    int                    iHandleIndex; // index into the
    handle arrays based on the orders count

    // check whether any order lines are for a
    remote warehouse
    m_txn.NewOrder.o_all_local = 1;
    for (i = 0; i < m_txn.NewOrder.o_ol_cnt;
i++)
    {
        if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
        {
            m_txn.NewOrder.o_all_local = 0; // at
            least one remote warehouse
            break;
        }
    }
}

```

```

iHandleIndex = m_txn.NewOrder.o_ol_cnt - 1;
// for convenience

while (TRUE)
{
    try
    {
        // Execute the prepared
        command (according to the number of new orders)
        // Ask for
        IMultipleResults because it returns 2 rowsets.
        hr =
m_pINewOrderCommand[iHandleIndex]->Execute(
        NULL, IID_IMultipleResults,
        &m_NewOrderExecuteParams[iHandleIndex],
        NULL,
        (IUnknown **)&pMultipleResults);
        if (FAILED(hr))
        {
            ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eExecute, "NewOrder()");
        }

        //////////////////////////////////////
        // Get order line

        results

        //////////////////////////////////////

        m_txn.NewOrder.total_amount = 0;
        for (i = 0; i <
m_txn.NewOrder.o_ol_cnt; ++i)
        {
            // Get the
            first rowset object
            hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset);
            if
(FAILED(hr))
            {
                char szTmp[256];

                _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);
            }
        }
    }
}

```

```

        ThrowError(m_pINewOrderCommand[m_txn.NewOrder.o_ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the
    result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
    if
    (FAILED(hr))
    {
        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the
    actual row data by handle
    hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
    if
    (FAILED(hr))
    {
        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;

    // Release
    row(s)
    hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
    // Release
    rowset
    hr = pRowset-
>Release();
}

////////////////////////////////////
// Get the second
rowset object

////////////////////////////////////
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset2);
    if (FAILED(hr))
    {
        char
szTmp[256];

```

```

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the result row
    handle(s)
    hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
    if (FAILED(hr))
    {
        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the actual row
    data by handle
    hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
    if (FAILED(hr))
    {
        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    // Release row(s)
    hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset2-
>Release();

    // Release the common
    MultipleResults interface
    hr = pMultipleResults-
>Release();

    if
    (m_txn.NewOrder.o_all_local == 1)
    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
    {

```

```

        m_txn.NewOrder.exec_status_code =
eInvalidItem;
    }
    break;
}
catch (COLEDBERR *e)
{
    if (!e->m_bDeadLock)
    || (++iTryCount > iMaxRetries)
        throw;

    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
i;
    HRESULT
hr;
    wchar_t
szName[IMAX_SP_NAME_LEN];
    IAccessor*
pIAccessor;
    const ULONG
nInputParams = 7; // input parameters
const ULONG
nOutputParams = 27; // output result set
columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"call
%stpc_payment(?,?,?,?,?,?)", m_szSPPrefix);

    // Create and Prepare a new command object
    for Payment.
    CreateCommand(szName, &m_pIPaymentCommand);
}

```

```

        // Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

i = 0;
// Payment parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

// Payment parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

// Payment parameter 3
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

// Payment parameter 4
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

// Payment parameter 5
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

// Payment parameter 6
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

// Payment parameter 7
SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
}

hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

if (FAILED(hr))

```

```

{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

m_PaymentExecuteParams.cParamSets = 1;
m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
m_PaymentExecuteParams.pData =
&m_txn.Payment;

// Now fill the binding information for
output columns
InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

i = 0;
// Payment output column 1
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

// Payment output column 2
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

// Payment output column 3
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

// Payment output column 4
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

// Payment output column 5
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

// Payment output column 6
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

// Payment output column 7
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

// Payment output column 8
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

// Payment output column 9
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

```

```

// Payment output column 10
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 11
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 12
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 13
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 14
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

// Payment output column 15
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

// Payment output column 16
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 17
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 18
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 19
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 20
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 21
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

```

```

        // Payment output column 22
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

        // Payment output column 23
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

        // Payment output column 24
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

        // Payment output column 25
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

        // Payment output column 26
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

        // Payment output column 27
        SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

        hr = pIAccessor->CreateAccessor(
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(PAYMENT_DATA),
&m_hPaymentOutputAccessor,
        acOutputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
        }

void CTPCC_OLEDB::Payment()
{
    HRESULT          hr;
    int              i;
    iTryCount = 0;
    IRowset*        pRowset;
    LONG            cRows = 1;
    // number of rows returned in the rowset
    ULONG          cRowsObtained;
    HROW           rghRow;
    //returned row handles
    HROW*          prghRow =
&rghRow;

```

```

        if (m_txn.Payment.c_id != 0)
            m_txn.Payment.c_last[0] = 0;

        while (TRUE)
        {
            try
            {
                // Execute the prepared
                command
                hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,

                (IUnknown **)&pRowset);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
COLEDBERR::eExecute, "Payment()");
                }

                // Fetch the result row
                handle(s)
                hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetNextRows, "Payment()");
                }

                // Fetch the actual row
                data by handle
                hr = pRowset-
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
                if (FAILED(hr))
                {
                    ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetData, "Payment()");
                }

                // Release row(s)
                hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
                // Release rowset
                hr = pRowset-
>Release();

                if (m_txn.Payment.c_id
== 0)
                    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
                else

```

```

        m_txn.Payment.exec_status_code = eOK;

                break;
            }
            catch (COLEDBERR *e)
            {
                if (!e->m_bDeadLock)
                {
                    if (++iTryCount > iMaxRetries)
                        throw;

                    // hit deadlock;
                    backoff for increasingly longer period
                    delete e;
                    Sleep(10 * iTryCount);
                }
            }

            // if (iTryCount)
            //     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
        }

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int              i;
    HRESULT          hr;
    wchar_t         szName[IMAX_SP_NAME_LEN];
    IAccessor*      pIAccessor;
    const ULONG     nInputParams = 4; // input parameters
    const ULONG     nOutputParams = 5; // output 1st result
set columns
    const ULONG     nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBinding[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBinding[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    DBBINDING
    acOutputDBBinding2[nOutputParams2];
    DBBINDSTATUS
    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call
%stpcc_orderstatus (?,?,?)}", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for OrderStatus.
    CreateCommand(szName,
&m_pIOrderStatusCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
// OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, w_id),
sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

// OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, d_id),
sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

// OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

// OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOrderStatusCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eQueryInterface,
"InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
&m_hOrderStatusInputAccessor,
        acInputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }

```

```

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
m_hOrderStatusInputAccessor;
    m_OrderStatusExecuteParams.pData =
&m_txn.OrderStatus;

// Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
// Bind to offsets of the
OL_ORDER_STATUS_DATA structure instead of
ORDER_STATUS_DATA.
// IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
// from the row set.

    i = 0;
// OrderStatus output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
DBTYPE_I4);

// OrderStatus output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
sizeof(m_txn.OrderStatus.OL[0].ol_i_id),
DBTYPE_I4);

// OrderStatus output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
DBTYPE_I2);

// OrderStatus output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_amount),
sizeof(m_txn.OrderStatus.OL[0].ol_amount),
DBTYPE_R8);

// OrderStatus output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
DBTYPE_DBTIMESTAMP);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(OL_ORDER_STATUS_DATA),
&m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))

```

```

{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
}

// Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
// OrderStatus output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

// OrderStatus output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

// OrderStatus output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

// OrderStatus output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

// OrderStatus output column 5
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

// OrderStatus output column 7
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

// OrderStatus output column 8
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance),
DBTYPE_R8);

// OrderStatus output column 9
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA, //
cannot be optimized too because #1 accessor is
        nOutputParams2,
        acOutputDBBinding2,
        sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,

```

```

        acOutputDBBindStatus2);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }
}

void CTPCC_OLEDB::OrderStatus()
{
    HRESULT                                hr;
    int
    iTryCount = 0;
    IMultipleResults*  pMultipleResults;
    IRowset*           pRowset;
    IRowset*           pRowset2;
    LONG
    cRows = MAX_OL_ORDER_STATUS_ITEMS; //
number of rows returned in the 1st rowset
    ULONG
    cRowsObtained;
    HROW
    rghRows[MAX_OL_ORDER_STATUS_ITEMS];
//returned row handles for the 1st result
set
    HROW*
    prghRows = &rghRows[0];
    LONG
    cRows2 = 1; // number of rows
returned in the 2nd rowset
    ULONG
    cRowsObtained2;
    HROW
    rghRows2; //returned row handle
for the 2nd result set
    HROW*
    prghRows2 = &rghRows2;
    int
    i;
    long
    lRowsAffected; // the number of
affected rows for a rowset

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
command
            // Ask for
IMultipleResults because it returns 2 rowsets.
            hr =
m_pIOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,

```

```

(IUnknown **)&MultipleResults);
        if (FAILED(hr))
        {
            ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
        }

        // Get order line
results
        // Get the first rowset
object
        hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
        if (FAILED(hr))
        {
            ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
        }

        // Fetch the result row
handle(s)
        hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
        if (FAILED(hr))
        {
            ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
        }

        m_txn.OrderStatus.o_ol_cnt =
(short)cRowsObtained;

        // Get the data from
multiple rows in this rowset
        for (i = 0; i <
m_txn.OrderStatus.o_ol_cnt; ++i)
        {
            // Fetch the
actual row data by handle
            hr = pRowset-
>GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
            if
(FAILED(hr))
            {

```

```

        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
    }
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();

// Get the second
rowset object
if
(m_txn.OrderStatus.o_ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
    if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
    }

    // Fetch the
result row handle(s)
    hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
    if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
    }

    // Fetch the
actual row data by handle
    hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
    if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
    }
}

```



```

// Release
row(s)
hr =
pRowset2->Release();
}
// Release the common
MultipleResults interface
hr = pMultipleResults-
>Release();
if
(m_txn.OrderStatus.o_ol_cnt == 0)
throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else
m_txn.OrderStatus.exec_status_code = eOK;
break;
}
catch (COLEDBERR *e)
{
if (!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
throw;
// hit deadlock;
backoff for increasingly longer period
delete e;
Sleep(10 * iTryCount);
}
}
// if (iTryCount)
// throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}
void CTPCC_OLEDB::InitDeliveryParams()
{
int i;
HRESULT hr;
wchar_t
szName[IMAX_SP_NAME_LEN];
IAccessor*
pIAccessor;
const ULONG
nInputParams = 2; // input parameters

```

```

const ULONG
nOutputParams = 10; // output 1st result
set columns
// Structure to bind in accessor
DBBINDING
acInputDBBinding[nInputParams];
DBBINDSTATUS
acInputDBBindStatus[nInputParams];
DBBINDING
acOutputDBBinding[nOutputParams];
DBBINDSTATUS
acOutputDBBindStatus[nOutputParams];
// Set command text
_snwprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpc_delivery
(?,?)", m_szSPPrefix);
// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);
// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);
i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);
// Delivery parameter 2
SetBinding(&acInputDBBinding[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);
hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}
hr = pIAccessor->CreateAccessor(
DBACCESSOR_PARAMETERDATA,
nInputParams,
acInputDBBinding,
sizeof(DELIVERY_DATA),
&m_hDeliveryInputAccessor,
acInputDBBindStatus);
if (FAILED(hr))
{

```

```

ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}
m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;
// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);
// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
// Delivery output column 1
SetBinding(&acOutputDBBinding[i],
offsetof(DELIVERY_DATA, o_id[i]),
sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
}
hr = pIAccessor->CreateAccessor(
DBACCESSOR_ROWDATA |
DBACCESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(DELIVERY_DATA),
&m_hDeliveryOutputAccessor,
acOutputDBBindStatus);
if (FAILED(hr))
{
ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}
}
void CTPCC_OLEDB::Delivery()
{
HRESULT hr;
int iTryCount = 0;
IRowset* pRowset;
LONG cRows = 1;
// number of rows returned in the rowset
ULONG
cRowsObtained;
HROW rghRow;
//returned row handles
HROW* prghRow =
&rghRow;
while (TRUE)
{
try
{

```

```

command // Execute the prepared
hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,

(IUnknown **)&pRowset);
if (FAILED(hr))
{

ThrowError(m_pIDeliveryCommand,
COLEDBERR::eExecute, "Delivery()");
}

// Fetch the result row
handle(s)
hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
if (FAILED(hr))
{

ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetNextRows, "Delivery()");
}

// Fetch the actual row
data by handle
hr = pRowset-
>GetData(rghRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
if (FAILED(hr))
{

ThrowError(m_pIDeliveryCommand,
COLEDBERR::eGetData, "Delivery()");
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);

// Release rowset
hr = pRowset-
>Release();

m_txn.Delivery.exec_status_code = eOK;

break;
}
catch (COLEDBERR *e)
{
if (!(e->m_bDeadLock))
throw;

// hit deadlock;
backoff for increasingly longer period
delete e;

```

```

Sleep(10 * iTryCount);
}
}
if (iTryCount)
throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

```

tpcc_oledb.h

```

/* FILE: TPCC_OLEDB.H
* Microsoft
* TPC-C Kit Ver. 4.20.000
* Copyright
* Microsoft, 1999-2004
* Written by
* Sergey Vasilevskiy
* All Rights Reserved
*
* PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
*
*
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifdef DllDecl
#define DllDecl __declspec( dllimport )
#endif

#define IMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
eInputParameter,
eOutputParameter,
eInputOutputParameter,
eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
enum ACTION
{
eNone,
eUnknown,
eQueryInterface,
eQueryInterface,
eCreateSession,
eCreateCommand,

```

```

eSetCommandText,
eExecute,

// = 6
eCreateAccessor,
ePrepare,
eGetNextRows,
eGetData,
eGetData,

// = 11
};

COLEDBERR(LPCTSTR szLoc)
: CBaseErr(szLoc)
{
m_eAction = eNone;
m_NativeError = 0;
m_bDeadLock = FALSE;
m_OLEDBErrStr = NULL;
};

~COLEDBERR()
{
if (m_OLEDBErrStr !=
NULL) delete []
m_OLEDBErrStr;
};

ACTION m_eAction;
int
m_NativeError;
BOOL m_bDeadLock;
char *m_OLEDBErrStr;

int ErrorType()
{return ERR_TYPE_OLEDB;};
char* ErrorTypeStr() { return
"OLEDB"; }
int ErrorNum()
{return m_NativeError;};
char* ErrorText() {return
m_OLEDBErrStr;};
int ErrorAction()
{ return (int)m_eAction; }
};

class TPCCC_OLEDB_ERR : public CBaseErr
{
public:
enum TPCC_OLEDB_ERRS
{
ERR_WRONG_SP_VERSION =
1, // "Wrong version of stored procs on
database server"
ERR_INVALID_CUST, // "Invalid Customer id,name."
ERR_NO_SUCH_ORDER, // "No orders found for
customer."

```

```

        ERR_RETRIED_TRANS,
// "Retries before transaction
succeeded."
    };
    CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; };
    CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };
        int                m_errno;
        int                m_iTryCount;
    ErrorType()
{return ERR_TYPE_TPCC_OLEDB;};
    char*    ErrorTypeStr() { return
"TPCC OLEDB"; }
        int                ErrorNum()
{return m_errno;};
    char*    ErrorText();
};
class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
    private:
// declare variables and private
functions here...
        BOOL
m_bDeadlock;                //
transaction was selected as deadlock victim
        int
m_MaxRetries;                //
// retry count on deadlock
        DBPROPSET
m_rgInitPropSet;            //
initialization property set used to establish a
connection
        DBPROP
m_InitProperties[4];        //
individual initialization properties
        IDBCreateSession*
m_pIDBCreateSession;        // session
(connection) interface
        IDBCreateCommand*
m_pIDBCreateCommand;        // SQL
command creation interface
        IMalloc*
m_pIMalloc;
// Needed to release error strings.
        // StockLevel
        ICommandText*
m_pIStockLevelCommand;

```

```

        HACCESSOR
m_hStockLevelInputAccessor; // accessor
to bind input parameters
        HACCESSOR
m_hStockLevelOutputAccessor; // accessor
to bind output columns
        DBPARAMS
m_StockLevelExecuteParams; //
parameter structure for Execute
        // NewOrder
        // One prepared command for each
possible number of new order line items
        ICommandText*
m_pINewOrderCommand[MAX_OL_NEW_ORDER_ITEMS]
;
        // accessors to bind input
parameters
        // one for each possible number
of new order line items
        HACCESSOR
m_hNewOrderInputAccessor[MAX_OL_NEW_ORDER_I
TEMS];
        // accessor to bind output
columns of the first rowset
        HACCESSOR
m_hNewOrderOutputAccessor[MAX_OL_NEW_ORDER_
ITEMS];
        // accessor to bind output
columns of the second rowset
        HACCESSOR
m_hNewOrderOutputAccessor2[MAX_OL_NEW_ORDER
_ITEMS];
        // parameter structure for
Execute
        DBPARAMS
m_NewOrderExecuteParams[MAX_OL_NEW_ORDER_IT
EMS];
        // Payment
        ICommandText*
m_pIPaymentCommand;
        HACCESSOR
m_hPaymentInputAccessor; // accessor
to bind input parameters
        HACCESSOR
m_hPaymentOutputAccessor; // accessor
to bind output columns
        DBPARAMS
m_PaymentExecuteParams; //
parameter structure for Execute
        // OrderStatus
        ICommandText*
m_pIOrderStatusCommand;
        HACCESSOR
m_hOrderStatusInputAccessor; // accessor
to bind input parameters
        HACCESSOR
m_hOrderStatusOutputAccessor; // accessor
to bind output columns

```

```

        HACCESSOR
m_hOrderStatusOutputAccessor2; //
accessor to bind output columns
        DBPARAMS
m_OrderStatusExecuteParams; //
parameter structure for Execute
        // Delivery
        ICommandText*
m_pIDeliveryCommand;
        HACCESSOR
m_hDeliveryInputAccessor; // accessor
to bind input parameters
        HACCESSOR
m_hDeliveryOutputAccessor; // accessor
to bind output columns
        DBPARAMS
m_DeliveryExecuteParams; // parameter
structure for Execute
        wchar_t
m_szSPPrefix[32]; // stored
procedures prefix
        // new-order specific fields
        int
m_no_commit_flag;
        void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );
        void CheckSPVersion();
        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();
        // Helper function to create and
prepare a command
        void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppICommandText);
        // Helper function to prepare a
command
        void PrepareCommand(ICommandText*
pICommand);
        // Helper function to fill one
binding
        // Used for both input parameter
and output column bindings
        void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);
        // Helper function to initialize
an array of bindings

```

```

        void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

        union
        {
                NEW_ORDER_DATA
NewOrder;
                PAYMENT_DATA
Payment;
                DELIVERY_DATA
Delivery;
                STOCK_LEVEL_DATA
StockLevel;
                ORDER_STATUS_DATA
OrderStatus;
        }
m_txn;

public:
        CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
        ~CTPCC_OLEDB(void);

        inline PNEW_ORDER_DATA
BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
        inline PPAYMENT_DATA
BuffAddr_Payment() { return
&m_txn.Payment; };
        inline PDELIVERY_DATA
BuffAddr_Delivery() { return
&m_txn.Delivery; };
        inline PSTOCK_LEVEL_DATA
BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder        ();
        void Payment        ();
        void Delivery        ();
        void StockLevel      ();
        void OrderStatus     ();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

tpcc_com_all

resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc_com_all.rc
//
#define IDS_PROJNAME            100
#define IDR_TPCC                101
#define IDR_NEWORDER           102
#define IDR_ORDERSTATUS        103
#define IDR_PAYMENT            104
#define IDR_STOCKLEVEL         105

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE        202
#define _APS_NEXT_COMMAND_VALUE        32768
#define _APS_NEXT_CONTROL_VALUE        201
#define _APS_NEXT_SYMED_VALUE         106
#endif
#endif

```

isapi_dll

resource.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1            101

// Next default values for new objects
//
#ifdef APSTUDIO_INVOKED
#ifdef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE        102
#define _APS_NEXT_COMMAND_VALUE        40001
#define _APS_NEXT_CONTROL_VALUE        1000
#define _APS_NEXT_SYMED_VALUE         101
#endif
#endif

```

Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

backup.sql

```
-----
--
-- File:    BACKUP.SQL
--
--          Microsoft TPC-C Benchmark Kit Ver. 4.61
--
--          Copyright Microsoft, 2005
--
-----
DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT  @startdate = GETDATE()
SELECT  'Start date:',
        CONVERT(VARCHAR(30),@startdate,
21)

DUMP DATABASE tpcc TO tpccback2_1, tpccback2_2,
tpccback2_3, tpccback2_4, tpccback2_5, tpccback2_6,
tpccback2_7, tpccback2_8, tpccback2_9, tpccback2_10,
tpccback2_11, tpccback2_12 WITH init, stats = 1

SELECT  @enddate = GETDATE()
SELECT  'End date: ',
        CONVERT(VARCHAR(30),@enddate, 21)
SELECT  'Elapsed time (in seconds): ',
        DATEDIFF(second, @startdate,
@enddate)
GO
```

backupdev.sql

```
--
--
-- File:    BACKUPDEV.SQL
--
--          Microsoft TPC-C Benchmark Kit Ver. 4.61
--
--          Copyright Microsoft, 2005
--
-----
-----
USE master
GO

-----
-- create backup devices
-----
EXEC sp_addumpdevice
'disk','tpccback2_1','c:\backup2\backup1\tpccback2_1.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_2','c:\backup2\backup2\tpccback2_2.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_3','c:\backup2\backup3\tpccback2_3.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_4','c:\backup2\backup4\tpccback2_4.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_5','c:\backup2\backup5\tpccback2_5.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_6','c:\backup2\backup6\tpccback2_6.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_7','c:\backup2\backup7\tpccback2_7.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_8','c:\backup2\backup8\tpccback2_8.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_9','c:\backup2\backup9\tpccback2_9.
dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_10','c:\backup2\backup10\tpccback2_
10.dmp'
GO
EXEC sp_addumpdevice
'disk','tpccback2_11','c:\backup2\backup11\tpccback2_
11.dmp'
GO
```

```
EXEC sp_addumpdevice
'disk','tpccback2_12','c:\backup2\backup12\tpccback2_
12.dmp'
GO
```

config.sql

```
-- File:    CONFIG.SQL
--
--          Microsoft TPC-C Benchmark Kit Ver. 4.00
--
--          Copyright Microsoft, 1996
--
-- Purpose:  Collects SQL Server configuration
parameters

print " "
select convert(char(30), getdate(),9)
print " "
go

sp_configure "show advanced",1
go
reconfigure with override
go
exec sp_configure "affinity mask", 15
exec sp_configure "cost threshold for parallelism",
5
exec sp_configure "index create memory", 704
exec sp_configure "lightweight pooling", 1
exec sp_configure "awe enabled", 0
exec sp_configure "c2 audit mode", 0
exec sp_configure "locks", 0
exec sp_configure "max degree of parallelism", 1
exec sp_configure "max server memory", 62000
exec sp_configure "max worker threads", 575
exec sp_configure "min memory per query", 512
exec sp_configure "min server memory", 0
exec sp_configure "nested triggers", 1
exec sp_configure "network packet size", 2048
exec sp_configure "open objects", 0
exec sp_configure "priority boost", 0
exec sp_configure "recovery interval", 32767
exec sp_configure "set working set size", 0
exec sp_configure "user connections", 0
exec sp_configure "default trace", 0

go

reconfigure with override
go
sp_configure
go
```

createdb.sql

```

--
-- File:   CREATEDB.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.61
--
-- Copyright Microsoft, 2005
-----
SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

-----
-- Create temporary table for timing
-----
IF EXISTS( SELECT name FROM sysobjects WHERE name =
'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date CHAR(30),
    end_date CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-----
-- Store starting time
-----
UPDATE tpcc_timer
SET start_date = (SELECT CONVERT(CHAR(30),
GETDATE(), 21))
GO

-----
-- create main database files
-----
CREATE DATABASE tpcc
ON PRIMARY
    ( NAME = MSSQL_tpcc_root,
    FILENAME = 'c:\MSSQL_tpcc_root.mdf',
    SIZE = 8MB,
    FILEGROWTH = 0),

FILEGROUP MSSQL_cs_fg
    ( NAME = MSSQL_cs1,
    FILENAME = 'c:\cs\cs1\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs2,
    FILENAME = 'c:\cs\cs2\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs3,

```

```

    FILENAME = 'c:\cs\cs3\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs4,
    FILENAME = 'c:\cs\cs4\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs5,
    FILENAME = 'c:\cs\cs5\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs6,
    FILENAME = 'c:\cs\cs6\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs7,
    FILENAME = 'c:\cs\cs7\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs8,
    FILENAME = 'c:\cs\cs8\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs9,
    FILENAME = 'c:\cs\cs9\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs10,
    FILENAME = 'c:\cs\cs10\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs11,
    FILENAME = 'c:\cs\cs11\',
    SIZE = 75900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_cs12,
    FILENAME = 'c:\cs\cs12\',
    SIZE = 75900MB,
    FILEGROWTH = 0),

FILEGROUP MSSQL_misc_fg
    ( NAME = MSSQL_misc1,
    FILENAME = 'c:\misc\misc1\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc2,
    FILENAME = 'c:\misc\misc2\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc3,
    FILENAME = 'c:\misc\misc3\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc4,
    FILENAME = 'c:\misc\misc4\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc5,
    FILENAME = 'c:\misc\misc5\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc6,

```

```

    FILENAME = 'c:\misc\misc6\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc7,
    FILENAME = 'c:\misc\misc7\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc8,
    FILENAME = 'c:\misc\misc8\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc9,
    FILENAME = 'c:\misc\misc9\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc10,
    FILENAME = 'c:\misc\misc10\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc11,
    FILENAME = 'c:\misc\misc11\',
    SIZE = 49900MB,
    FILEGROWTH = 0),
    ( NAME = MSSQL_misc12,
    FILENAME = 'c:\misc\misc12\',
    SIZE = 49900MB,
    FILEGROWTH = 0)

LOG ON
    ( NAME = MSSQL_tpcc_log,
    FILENAME = 'E:',
    SIZE = 629000MB,
    FILEGROWTH = 0)

COLLATE Latin1_General_BIN
GO

-----
-- Store ending time
-----
UPDATE tpcc_timer
SET end_date = (SELECT CONVERT(CHAR(30),
GETDATE(), 21))
GO

SELECT DATEDIFF(second,(SELECT start_date FROM
tpcc_timer),(SELECT end_date FROM tpcc_timer))
GO

-----
-- remove temporary table
-----
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

```

dbopt1.sql

```
-----
--
-- File:      DBOPT1.SQL
--
--           Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--           Copyright Microsoft, 2005
--
--
--           Sets database options for load
--
-----
USE master
GO

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED
GO

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE
GO

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF
GO

ALTER DATABASE tpcc SET PAGE_VERIFY NONE
GO

USE tpcc
GO

CHECKPOINT
GO
```

dbopt2.sql

```
-----
--
-- File:      DBOPT2.SQL
--
--           Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--           Copyright Microsoft, 2005
--
--
--           Sets database options after load
--
-----
```

```
-----
ALTER DATABASE tpcc SET RECOVERY FULL
GO

USE tpcc
GO

CHECKPOINT
GO

sp_configure 'allow updates',1
GO

RECONFIGURE WITH OVERRIDE
GO

DECLARE @msg          varchar(50)

-----
--           OPTIONS FOR SQL SERVER 2000
-- Set option values for user-defined indexes
-----

SET @msg = ' '
PRINT @msg
SET @msg = 'Setting SQL Server indexoptions'
PRINT @msg
SET @msg = ' '
PRINT @msg

EXEC sp_indexoption 'customer',
'DisAllowPageLocks', TRUE
EXEC sp_indexoption 'district',
'DisAllowPageLocks', TRUE
EXEC sp_indexoption 'warehouse',
'DisAllowPageLocks', TRUE
EXEC sp_indexoption 'stock',
'DisAllowPageLocks', TRUE
EXEC sp_indexoption 'order_line',
'DisAllowPageLocks', TRUE
EXEC sp_indexoption 'orders',
'DisAllowRowLocks', TRUE
EXEC sp_indexoption 'new_order',
'DisAllowRowLocks', TRUE
EXEC sp_indexoption 'item',
'DisAllowRowLocks', TRUE
EXEC sp_indexoption 'item',
'DisAllowPageLocks', FALSE
GO

Print ' '
Print '*****'
Print 'Pre-specified Locking Hierarchy:'
Print ' Lockflag = 0 ==> No pre-specified
hierarchy'
Print ' Lockflag = 1 ==> Lock at Page-level then
Table-level'
Print ' Lockflag = 2 ==> Lock at Row-level then
Table-level'
Print ' Lockflag = 3 ==> Lock at Table-level'
Print ' '

```

```
SELECT name,
lockflags
FROM sysindexes
WHERE object_id('warehouse') = id OR
object_id('district') = id OR
object_id('customer') = id OR
object_id('stock') = id OR
object_id('orders') = id OR
object_id('order_line') = id OR
object_id('history') = id OR
object_id('new_order') = id OR
object_id('item') = id
ORDER BY lockflags asc
GO

sp_configure 'allow updates',0
GO

RECONFIGURE WITH OVERRIDE
GO

EXEC sp_dboption tpcc, 'auto update
statistics', FALSE
EXEC sp_dboption tpcc, 'auto create
statistics', FALSE
GO

DECLARE @db_id int,
@tbl_id int

SET @db_id = DB_ID('tpcc')
SET @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO
```

delivery.sql

```
-----
--
-- File:      DELIVERY.SQL
--
--           Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--           Copyright Microsoft, 2005
--
--
--           Creates delivery stored procedure
--
-----
```

```

--
--
--      Interface Level:      4.20.000
--
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id          int,
    @o_carrier_id  smallint
AS

DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int

SELECT @d_id = 0

BEGIN TRANSACTION d
    WHILE (@d_id < 10)
        BEGIN
            SELECT @d_id = @d_id + 1,
                   @total = 0,
                   @o_id = 0

            SELECT TOP 1
                @o_id = no_o_id
            FROM    new_order WITH (serializable
updlock)
            WHERE  no_w_id = @w_id AND
                   no_d_id = @d_id
            ORDER  BY no_o_id ASC

            IF (@@rowcount <> 0)
                BEGIN

```

```

-- claim the order for this district
DELETE new_order
WHERE  no_w_id = @w_id AND
       no_d_id = @d_id AND
       no_o_id = @o_id

-- set carrier_id on this order (and get
customer id)
UPDATE orders
SET    o_carrier_id = @o_carrier_id,
       @c_id        = o_c_id
WHERE  o_w_id = @w_id AND
       o_d_id = @d_id AND
       o_id      = @o_id

-- set date in all lineitems for this
order (and sum amounts)
UPDATE order_line
SET    ol_delivery_d = GETDATE(),
       @total       = @total +

ol_amount
WHERE  ol_w_id = @w_id AND
       ol_d_id = @d_id AND
       ol_o_id = @o_id

-- accumulate lineitem amounts for this
order into customer
UPDATE customer
SET    c_balance = c_balance +
@total,
       c_delivery_cnt = c_delivery_cnt
+ 1
WHERE  c_w_id = @w_id AND
       c_d_id = @d_id AND
       c_id   = @c_id

END

SELECT @oid1 = CASE @d_id WHEN 1 THEN
@o_id ELSE @oid1 END,
       @oid2 = CASE @d_id WHEN 2 THEN
@o_id ELSE @oid2 END,
       @oid3 = CASE @d_id WHEN 3 THEN
@o_id ELSE @oid3 END,
       @oid4 = CASE @d_id WHEN 4 THEN
@o_id ELSE @oid4 END,
       @oid5 = CASE @d_id WHEN 5 THEN
@o_id ELSE @oid5 END,
       @oid6 = CASE @d_id WHEN 6 THEN
@o_id ELSE @oid6 END,
       @oid7 = CASE @d_id WHEN 7 THEN
@o_id ELSE @oid7 END,
       @oid8 = CASE @d_id WHEN 8 THEN
@o_id ELSE @oid8 END,
       @oid9 = CASE @d_id WHEN 9 THEN
@o_id ELSE @oid9 END,
       @oid10 = CASE @d_id WHEN 10 THEN
@o_id ELSE @oid10 END
END

COMMIT TRANSACTION d

-- return delivery data to client

```

```

SELECT @oid1,
       @oid2,
       @oid3,
       @oid4,
       @oid5,
       @oid6,
       @oid7,
       @oid8,
       @oid9,
       @oid10
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

getargs.c

```

//      File:              GETARGS.C
//
//      TPC-C Kit Ver. 4.51
//
//      Copyright
//      Microsoft, 1996, 1997, 1998, 1999, 2000, 2001, 2002,
//      2003
//      Purpose: Source file for command line
//      processing

// Includes
#include "tpcc.h"

//=====
//
//      Function name: GetArgsLoader
//
//=====

void GetArgsLoader(int argc, char **argv,
TPCCCLDR_ARGS *pargs)
{
    int          i;
    char *ptr;

#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n",
(int) GetCurrentThreadId());
#endif

    /* init args struct with some useful values */
    pargs->server      = SERVER;
    pargs->user         = USER;
    pargs->password     = PASSWORD;
    pargs->database     = DATABASE;
    pargs->batch        = BATCH;
    pargs->num_warehouses = UNDEF;
}

```



```

pargs->tables_all =
TRUE;
pargs->table_item =
FALSE;
pargs->table_warehouse =
FALSE;
pargs->table_customer =
FALSE;
pargs->table_orders =
FALSE;
pargs->loader_res_file =
LOADER_RES_FILE;
pargs->log_path =
= LOADER_LOG_PATH;
pargs->pack_size =
DEFLDPACKSIZE;
pargs->starting_warehouse =
DEF_STARTING_WAREHOUSE;
pargs->build_index =
BUILD_INDEX;
pargs->index_order =
INDEX_ORDER;
pargs->index_script_path =
INDEX_SCRIPT_PATH;
pargs->scale_down =
SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i)
{
    if (argv[i][0] != '-' &&
argv[i][0] != '/')
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case '?': /* Fall through */

            GetArgsLoaderUsage();

            break;

        case 'D':
            >database = ptr+2;
            break;

        case 'P':
            >password = ptr+2;
            break;

        case 'S':
            >server = ptr+2;

```

```

break;

        case 'U':
            >user = ptr+2;
            break;

        case 'b':
            >batch = atol(ptr+2);
            break;

        case 'W':
            >num_warehouses = atol(ptr+2);
            break;

        case 's':
            >starting_warehouse = atol(ptr+2);
            break;

        case 't':
            {
                pargs->tables_all = FALSE;
                if
                (strcmp(ptr+2,"item") == 0)
                    pargs->table_item = TRUE;
                else if (strcmp(ptr+2,"warehouse") == 0)
                    pargs->table_warehouse = TRUE;
                else if (strcmp(ptr+2,"customer") == 0)
                    pargs->table_customer = TRUE;
                else if (strcmp(ptr+2,"orders") == 0)
                    pargs->table_orders = TRUE;
                else
                    {
                        printf("\nUnrecognized command");
                        GetArgsLoaderUsage();
                        exit(1);
                    }
                break;

                case 'f':
                    >loader_res_file = ptr+2;
                    break;

                case 'L':

```

```

            >log_path = ptr+2;
            break;

            case 'p':
                >pack_size = atol(ptr+2);
                break;

            case 'i':
                >build_index = atol(ptr+2);
                break;

            case 'o':
                >index_order = atol(ptr+2);
                break;

            case 'c':
                >scale_down = atol(ptr+2);
                break;

            case 'd':
                >index_script_path = ptr+2;
                break;

            default:
                GetArgsLoaderUsage();
                exit(-1);
                break;
        }

        /* check for required args */
        if (pargs->num_warehouses == UNDEF )
        {
            printf("Number of Warehouses is
required\n");
            exit(-2);
        }

        return;
    }

    //=====
    //
    // Function name: GetArgsLoaderUsage
    //
    //=====

void GetArgsLoaderUsage()
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering
GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
    #endif

```

```

        printf("TPCCLDR:\n\n");
        printf("Parameter
Default\n");
        printf("-----\n");
        printf("-W Number of Warehouses to Load
Required \n");
        printf("-S Server
%s\n", SERVER);
        printf("-U Username
%s\n", USER);
        printf("-P Password
%s\n", PASSWORD);
        printf("-D Database
%s\n", DATABASE);
        printf("-b Batch Size
%ld\n", (long) BATCH);
        printf("-p TDS packet size
%ld\n", (long) DEFLDPACKSIZE);
        printf("-L Loader BCP Log Path
%s\n", LOADER_LOG_PATH);
        printf("-f Loader Results Output Filename
%s\n", LOADER_RES_FILE);
        printf("-s Starting Warehouse
%ld\n", (long) DEF_STARTING_WAREHOUSE);
        printf("-i Build Option (data = 0, data and
index = 1)
%ld\n", (long) BULD_INDEX);
        printf("-o Cluster Index Build Order
(before = 1, after = 0)
%ld\n", (long) INDEX_ORDER);
        printf("-c Build Scaled Database (normal =
0, tiny = 1)
%ld\n", (long) SCALE_DOWN);
        printf("-d Index Script Path
%s\n", INDEX_SCRIPT_PATH);
        printf("-t Table to Load
all tables \n");
        printf(" [item|warehouse|customer|orders]\n");
        printf(" Notes: \n");
        printf(" - the '-t' parameter may be included
multiple times to \n");
        printf(" specify multiple tables to be
loaded \n");
        printf(" - 'item' loads ITEM table \n");
        printf(" - 'warehouse' loads WAREHOUSE,
DISTRICT, and STOCK tables \n");
        printf(" - 'customer' loads CUSTOMER and
HISTORY tables \n");
        printf(" - 'orders' load NEW-ORDER, ORDERS,
ORDER-LINE tables \n");

        printf("\nNote: Command line switches are
case sensitive.\n");

        exit(0);
}

```

idxcuscl.sql

```

-----
--
-- File:   IDXCUSCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates clustered index on customer table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'customer_nc1' )
        DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON
customer(c_w_id, c_d_id, c_last, c_first, c_id)
ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'customer_c1' )
        DROP INDEX customer.customer_c1

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON
customer(c_w_id, c_d_id, c_id)
ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

idxcusnc.sql

```

-----
--
-- File:   IDXCUSNC.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates non-clustered index on customer
table
--

```

```

-----
--
-- File:   IDXDISCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates clustered index on district table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'customer_nc1' )
        DROP INDEX customer.customer_nc1

CREATE UNIQUE NONCLUSTERED INDEX customer_nc1 ON
customer(c_w_id, c_d_id, c_last, c_first, c_id)
ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)

GO

```

idxdiscl.sql

```

-----
--
-- File:   IDXDISCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates clustered index on district table
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'district_c1' )
        DROP INDEX district.district_c1

```

```

CREATE UNIQUE CLUSTERED INDEX district_cl ON
district(d_w_id, d_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
DATEDIFF(second, @startdate, @enddate)
GO

```

idxhiscl.sql

```

-----
--
-- File:   IDXHISCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
--
-- Creates clustered index on history table
--
--
-- CAUTION: This index is only beneficial
for systems --
-- CAUTION: with 8 or more processors.
--
-- CAUTION: It may negatively impact
performance on --
-- CAUTION: systems with less than 8
processors. --
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'history_cl' )
    DROP INDEX history.history_cl

CREATE UNIQUE CLUSTERED INDEX history_cl ON
history(h_c_w_id, h_date, h_c_d_id, h_c_id, h_amount)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()

```

```

SELECT 'End date:',
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
DATEDIFF(second, @startdate, @enddate)
GO

```

idxitmcl.sql

```

-----
--
-- File:   IDXITMCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
--
-- Creates clustered index on item table
--
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'item_cl' )
    DROP INDEX item.item_cl

CREATE UNIQUE CLUSTERED INDEX item_cl ON item(i_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
DATEDIFF(second, @startdate, @enddate)
GO

```

idxnodcl.sql

```

-----
--
-- File:   IDXNODCL.SQL
--

```

```

-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
--
-- Creates clustered index on new-order
table --
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
'new_order_cl' )
    DROP INDEX new_order.new_order_cl

CREATE UNIQUE CLUSTERED INDEX new_order_cl ON
new_order(no_w_id, no_d_id, no_o_id)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
DATEDIFF(second, @startdate, @enddate)
GO

```

idxodlcl.sql

```

-----
--
-- File:   IDXODLCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
--
-- Creates clustered index on order-line
table --
--
-----
USE tpcc
GO

```

```

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
            'order_line_cl' )
    DROP INDEX order_line.order_line_cl

CREATE UNIQUE CLUSTERED INDEX order_line_cl ON
order_line(ol_w_id, ol_d_id, ol_o_id, ol_number)
ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxordcl.sql

```

-----
--
-- File:   IDXORDCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates clustered index on orders table
--
-----
USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
            'orders_cl' )
    DROP INDEX orders.orders_cl

CREATE UNIQUE CLUSTERED INDEX orders_cl ON
orders(o_w_id, o_d_id, o_id)
ON MSSQL_misc_fg

```

```

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxstkcl.sql

```

-----
--
-- File:   IDXSTKCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates clustered index on stock table
--
-----
USE tpcc
GO

```

```

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
            'stock_cl' )
    DROP INDEX stock.stock_cl

CREATE UNIQUE CLUSTERED INDEX stock_cl ON
stock(s_i_id, s_w_id)
ON MSSQL_cs_fg

```

```

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

idxwarcl.sql

```

-- File:   IDXWARCL.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--

```

```

-- Creates clustered index on warehouse
table --
--
-----

```

```

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

```

```

IF EXISTS ( SELECT name FROM sysindexes WHERE name =
            'warehouse_cl' )
    DROP INDEX warehouse.warehouse_cl

```

```

CREATE UNIQUE CLUSTERED INDEX warehouse_cl ON
warehouse(w_id)
WITH FILLFACTOR=100 ON MSSQL_misc_fg

```

```

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

neword.sql

```

-----
--
-- File:   NEWORD.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--

```

```

-- Creates neworder stored procedure
--

```

```

-- Interface Level:   4.20.000
--

```

```

--
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE    tpcc_neworder
    @w_id            int,
    @d_id            tinyint,
    @c_id            int,
    @o_ol_cnt        tinyint,
    @o_all_local     tinyint,
    @i_id1 int = 0, @s_w_id1
int = 0, @ol_qty1  smallint = 0,
    @i_id2 int = 0, @s_w_id2
int = 0, @ol_qty2  smallint = 0,
    @i_id3 int = 0, @s_w_id3
int = 0, @ol_qty3  smallint = 0,
    @i_id4 int = 0, @s_w_id4
int = 0, @ol_qty4  smallint = 0,
    @i_id5 int = 0, @s_w_id5
int = 0, @ol_qty5  smallint = 0,
    @i_id6 int = 0, @s_w_id6
int = 0, @ol_qty6  smallint = 0,
    @i_id7 int = 0, @s_w_id7
int = 0, @ol_qty7  smallint = 0,
    @i_id8 int = 0, @s_w_id8
int = 0, @ol_qty8  smallint = 0,
    @i_id9 int = 0, @s_w_id9
int = 0, @ol_qty9  smallint = 0,
    @i_id10 int = 0, @s_w_id10
int = 0, @ol_qty10 smallint = 0,
    @i_id11 int = 0, @s_w_id11
int = 0, @ol_qty11 smallint = 0,
    @i_id12 int = 0, @s_w_id12
int = 0, @ol_qty12 smallint = 0,
    @i_id13 int = 0, @s_w_id13
int = 0, @ol_qty13 smallint = 0,
    @i_id14 int = 0, @s_w_id14
int = 0, @ol_qty14 smallint = 0,
    @i_id15 int = 0, @s_w_id15
int = 0, @ol_qty15 smallint = 0

AS
DECLARE @w_tax            smallmoney,
    @d_tax            smallmoney,
    @c_last           char(16),
    @c_credit         char(2),
    @c_discount       smallmoney,

```

```

    @i_price           smallmoney,
    @i_name           char(24),
    @i_data           char(50),
    @o_entry_d        datetime,
    @remote_flag      int,
    @s_quantity       smallint,
    @s_data           char(50),
    @s_dist           char(24),
    @li_no            int,
    @o_id             int,
    @commit_flag      tinyint,
    @li_id            int,
    @li_s_w_id        int,
    @li_qty           smallint,
    @ol_number        int,
    @c_id_local       int

BEGIN

BEGIN TRANSACTION n

-----
-- get district tax and next available order id and
update
-- plus initialize local variables
-----
UPDATE district
SET    @d_tax           = d_tax,
    @o_id             = d_next_o_id,
    d_next_o_id       = d_next_o_id + 1,
    @o_entry_d        = GETDATE(),
    @li_no            = 0,
    @commit_flag      = 1
WHERE  d_w_id          = @w_id AND
    d_id              = @d_id

-----
-- process orderlines
-----
WHILE (@li_no < @o_ol_cnt)
BEGIN
    SELECT @li_no = @li_no + 1

-----
-- set i_id, s_w_id, and qty for this lineitem
-----
    SELECT @li_id = CASE @li_no
        WHEN 1 THEN @i_id1
        WHEN 2 THEN @i_id2
        WHEN 3 THEN @i_id3
        WHEN 4 THEN @i_id4
        WHEN 5 THEN @i_id5
        WHEN 6 THEN @i_id6
        WHEN 7 THEN @i_id7
        WHEN 8 THEN @i_id8
        WHEN 9 THEN @i_id9
        WHEN 10 THEN @i_id10
        WHEN 11 THEN @i_id11
        WHEN 12 THEN @i_id12
        WHEN 13 THEN @i_id13
        WHEN 14 THEN @i_id14

```

```

        WHEN 15 THEN @i_id15
    END,
    @li_s_w_id = CASE @li_no
        WHEN 1 THEN @s_w_id1
        WHEN 2 THEN @s_w_id2
        WHEN 3 THEN @s_w_id3
        WHEN 4 THEN @s_w_id4
        WHEN 5 THEN @s_w_id5
        WHEN 6 THEN @s_w_id6
        WHEN 7 THEN @s_w_id7
        WHEN 8 THEN @s_w_id8
        WHEN 9 THEN @s_w_id9
        WHEN 10 THEN
@s_w_id10
        WHEN 11 THEN
@s_w_id11
        WHEN 12 THEN
@s_w_id12
        WHEN 13 THEN
@s_w_id13
        WHEN 14 THEN
@s_w_id14
        WHEN 15 THEN
@s_w_id15
    END,
    @li_qty = CASE @li_no
        WHEN 1 THEN @ol_qty1
        WHEN 2 THEN @ol_qty2
        WHEN 3 THEN @ol_qty3
        WHEN 4 THEN @ol_qty4
        WHEN 5 THEN @ol_qty5
        WHEN 6 THEN @ol_qty6
        WHEN 7 THEN @ol_qty7
        WHEN 8 THEN @ol_qty8
        WHEN 9 THEN @ol_qty9
        WHEN 10 THEN
@ol_qty10
        WHEN 11 THEN
@ol_qty11
        WHEN 12 THEN
@ol_qty12
        WHEN 13 THEN
@ol_qty13
        WHEN 14 THEN
@ol_qty14
        WHEN 15 THEN
@ol_qty15
    END

-----
-- get item data (no one updates item)
-----
    SELECT @i_price     = i_price,
        @i_name        = i_name,
        @i_data        = i_data
    FROM    item WITH (repeatableread)
    WHERE   i_id        = @li_id

-----
-- update stock values
-----

```

```

UPDATE stock
SET s_ytd = s_ytd + @li_qty,
@s_quantity = s_quantity -
s_quantity - @li_qty +
CASE WHEN
(s_quantity - @li_qty < 10) THEN 91 ELSE 0 END,
s_order_cnt = s_order_cnt + 1,
s_remote_cnt = s_remote_cnt +
CASE WHEN
(@li_s_w_id = @w_id) THEN 0 ELSE 1 END,
@s_data = s_data,
@s_dist = CASE @d_id
WHEN 1 THEN
s_dist_01
WHEN 2 THEN
s_dist_02
WHEN 3 THEN
s_dist_03
WHEN 4 THEN
s_dist_04
WHEN 5 THEN
s_dist_05
WHEN 6 THEN
s_dist_06
WHEN 7 THEN
s_dist_07
WHEN 8 THEN
s_dist_08
WHEN 9 THEN
s_dist_09
WHEN 10 THEN
s_dist_10
END
WHERE s_i_id = @li_id AND
s_w_id = @li_s_w_id
-----
-- if there actually is a stock (and item) with
these ids, go to work
-----
IF (@@rowcount > 0)
BEGIN
-----
-- insert order_line data (using data from item and
stock)
-----
INSERT INTO order_line VALUES( @o_id,
@d_id,
@s_w_id,
@li_no,
'dec 31,
1899',
@s_i_price
* @li_qty,
@li_s_w_id,
@li_qty,

```

```

@s_dist)
-----
-- send line-item data to client
-----
SELECT @i_name,
@s_quantity,
b_g = CASE WHEN (
(patindex('%ORIGINAL%',@i_data) > 0) AND
(patindex('%ORIGINAL%',@s_data) > 0) )
THEN 'B' ELSE 'G' END,
@i_price,
@i_price * @li_qty
END
ELSE
BEGIN
-----
-- no item (or stock) found - triggers rollback
condition
-----
SELECT ',0,',0,0
SELECT @commit_flag = 0
END
END
-----
-- get customer last name, discount, and credit
rating
-----
SELECT @c_last = c_last,
@c_discount = c_discount,
@c_credit = c_credit,
@c_id_local = c_id
customer WITH (repeatableread)
WHERE c_id = @c_id AND
c_w_id = @w_id AND
c_d_id = @d_id
-----
-- insert fresh row into orders table
-----
INSERT INTO orders VALUES ( @o_id,
@d_id,
@w_id,
@c_id_local,
0,
@o_ol_cnt,
@o_all_local,
@o_entry_d)
-----
-- insert corresponding row into new-order table
-----
INSERT INTO new_order VALUES ( @o_id,
@d_id,
@w_id)

```

```

-----
-- select warehouse tax
-----
SELECT @w_tax = w_tax
FROM warehouse WITH (repeatableread)
WHERE w_id = @w_id
IF (@commit_flag = 1)
COMMIT TRANSACTION n
ELSE
-- all that work for nuthin!!!
ROLLBACK TRANSACTION n
-----
-- return order data to client
-----
SELECT @w_tax,
@d_tax,
@o_id,
@c_last,
@c_discount,
@c_credit,
@o_entry_d,
@commit_flag
END
GO
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS ON
GO

```

null-txns.sql

```

-----
--
-- File: NULL-TXNS.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- This script will create stored procs
which --
-- accept the same parameters and return
correctly --
-- formed results sets to match the standard
TPC-C --
-- stored procs. Of course, the advantage
is that --
-- these stored procs place almost no load
on --

```

```

--      SQL Server and do not require a database.
--
--
--      Interface Level:      4.10.000
--
-----
USE tpce
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_delivery' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_neworder' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_orderstatus' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_payment' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_stocklevel' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_version' )
  DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'order_line_null' )
  DROP PROCEDURE order_line_null
GO

CREATE PROCEDURE      tpcc_delivery
      @w_id            int,
      @o_carrier_id   smallint

AS

DECLARE @d_id        tinyint,
        @o_id        int,
        @c_id        int,
        @total       numeric(12,2),
        @oid1        int,
        @oid2        int,
        @oid3        int,
        @oid4        int,
        @oid5        int,
        @oid6        int,
        @oid7        int,
        @oid8        int,
        @oid9        int,
        @oid10       int,

```

```

      @delaytime      varchar(30)

-----
-- uniform random delay of 0 - 1 second; avg = 0.50
-----
SELECT @delaytime = '00:00:0' +
CAST(CAST((RAND()*1.00) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001,
3001, 3001, 3001
GO

CREATE PROCEDURE      tpcc_neworder
      @w_id            int,
      @d_id            tinyint,
      @c_id            int,
      @o_ol_cnt        tinyint,
      @o_all_local     tinyint,
      @i_id1           int = 0, @s_w_id1 int
= 0, @ol_qty1 smallint = 0,
      @i_id2           int = 0, @s_w_id2 int
= 0, @ol_qty2 smallint = 0,
      @i_id3           int = 0, @s_w_id3 int
= 0, @ol_qty3 smallint = 0,
      @i_id4           int = 0, @s_w_id4 int
= 0, @ol_qty4 smallint = 0,
      @i_id5           int = 0, @s_w_id5 int
= 0, @ol_qty5 smallint = 0,
      @i_id6           int = 0, @s_w_id6 int
= 0, @ol_qty6 smallint = 0,
      @i_id7           int = 0, @s_w_id7 int
= 0, @ol_qty7 smallint = 0,
      @i_id8           int = 0, @s_w_id8 int
= 0, @ol_qty8 smallint = 0,
      @i_id9           int = 0, @s_w_id9 int
= 0, @ol_qty9 smallint = 0,
      @i_id10          int = 0, @s_w_id10
int = 0, @ol_qty10 smallint = 0,
      @i_id11          int = 0, @s_w_id11
int = 0, @ol_qty11 smallint = 0,
      @i_id12          int = 0, @s_w_id12
int = 0, @ol_qty12 smallint = 0,
      @i_id13          int = 0, @s_w_id13
int = 0, @ol_qty13 smallint = 0,
      @i_id14          int = 0, @s_w_id14
int = 0, @ol_qty14 smallint = 0,
      @i_id15          int = 0, @s_w_id15
int = 0, @ol_qty15 smallint = 0

AS

DECLARE @w_tax        numeric(4,4),
        @d_tax        numeric(4,4),
        @c_last       char(16),
        @c_credit     char(2),
        @c_discount   numeric(4,4),
        @i_price       numeric(5,2),
        @i_name        char(24),
        @o_entry_d     datetime,
        @li_no         int,

```

```

      @o_id            int,
      @commit_flag    tinyint,
      @li_id          int,
      @li_qty         smallint,
      @delaytime      varchar(30)

BEGIN
-----
-- uniform random delay of 0 - 0.6 second; avg =
0.3
-----
SELECT @delaytime = '00:00:0' +
CAST(CAST((RAND()*0.60) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

-----
-- process orderlines
-----
SELECT @commit_flag = 1,
       @li_no        = 0

WHILE (@li_no < @o_ol_cnt)
  BEGIN
    SELECT @li_id = CASE @li_no
      WHEN 1 THEN @i_id1
      WHEN 2 THEN @i_id2
      WHEN 3 THEN @i_id3
      WHEN 4 THEN @i_id4
      WHEN 5 THEN @i_id5
      WHEN 6 THEN @i_id6
      WHEN 7 THEN @i_id7
      WHEN 8 THEN @i_id8
      WHEN 9 THEN @i_id9
      WHEN 10 THEN @i_id10
      WHEN 11 THEN @i_id11
      WHEN 12 THEN @i_id12
      WHEN 13 THEN @i_id13
      WHEN 14 THEN @i_id14
      WHEN 15 THEN @i_id15
    END

    SELECT @li_no = @li_no + 1

    SELECT @i_price = 23.45, @li_qty = @li_no

    IF (@li_id = 999999)
      BEGIN
        SELECT '',0'',0,0

        SELECT @commit_flag = 0
      END
    ELSE
      BEGIN
        SELECT 'Item Name blah',
              17,
              'G',
              @i_price,
              @i_price * @li_qty
      END
  END

```

```

END

-----
-- return order data to client
-----
SELECT @w_tax      = 0.1234,
       @d_tax      = 0.0987,
       @o_id       = 3001,
       @c_last     = 'BAROUGHTABLE',
       @c_discount = 0.2198,
       @c_credit   = 'GC',
       @o_entry_d  = GETDATE()

SELECT @w_tax,
       @d_tax,
       @o_id,
       @c_last,
       @c_discount,
       @c_credit,
       @o_entry_d,
       @commit_flag

END
GO

CREATE PROCEDURE tpc_c_orderstatus
    @w_id int,
    @d_id tinyint,

    @c_id int,
    @c_last char(16) = ''

AS
DECLARE @c_balance numeric(12,2),
        @c_first char(16),
        @c_middle char(2),
        @o_id int,
        @o_entry_d datetime,
        @o_carrier_id smallint,
        @ol_cnt smallint,
        @delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.2 second; avg = 0.1
-----
SELECT @delaytime = '00:00:0' +
CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT @c_id = 113,
       @c_balance = -10.00,
       @c_first = '8YCodgytqCj8',
       @c_middle = 'OE',
       @c_last = 'OUGHTOUGHTABLE',
       @o_id = 3456,
       @o_entry_d = GETDATE(),
       @o_carrier_id = 1

SELECT @ol_cnt = (RAND() * 11) + 5

```

```

SET ROWCOUNT @ol_cnt

SELECT ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d
FROM   order_line_null

SELECT @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

GO

CREATE PROCEDURE tpc_c_payment
    @w_id int,
    @c_w_id int,
    @h_amount numeric(6,2),
    @d_id tinyint,
    @c_d_id tinyint,
    @c_id int,
    @c_last char(16) = ''

AS
DECLARE @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city char(20),
        @w_state char(2),
        @w_zip char(9),
        @w_name char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city char(20),
        @d_state char(2),
        @d_zip char(9),
        @d_name char(10),
        @c_first char(16),
        @c_middle char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city char(20),
        @c_state char(2),
        @c_zip char(9),
        @c_phone char(16),
        @c_since datetime,
        @c_credit char(2),
        @c_credit_lim numeric(12,2),
        @c_balance numeric(12,2),
        @c_discount numeric(4,4),
        @data char(500),
        @c_data char(500),
        @datetime datetime,
        @w_ytd numeric(12,2),
        @d_ytd numeric(12,2),
        @cnt smallint,
        @val smallint,
        @screen_data char(200),

```

```

    @id_local tinyint,
    @w_id_local int,
    @c_id_local int,
    @delaytime varchar(30)

-----
-- uniform random delay of 0 - 0.3 second; avg = 0.15
-----
SELECT @delaytime = '00:00:0' +
CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT @screen_data = ''

-----
-- get customer info and update balances
-----
SELECT @d_street_1 = 'rqSHHakqyV',
       @d_street_2 = 'zZ98nW3BR2s',
       @d_city = 'ArNr4GNFV9',
       @d_state = 'aV',
       @d_zip = '453511111'

-----
-- get warehouse data and update year-to-date
-----
SELECT @w_street_1 = 'rqSHHakqyV',
       @w_street_2 = 'zZ98nW3BR2s',
       @w_city = 'ArNr4GNFV9',
       @w_state = 'aV',
       @w_zip = '453511111'

SELECT @c_id = 123,
       @c_balance = -10000.00,
       @c_first = 'KmR03Xureb',
       @c_middle = 'OE',
       @c_last = 'BAROUGHTBAR',
       @c_street_1 = 'QpGdOHjv8mR9vNI8V',
       @c_street_2 = 'dzKcCObBqbc3yu',
       @c_city = 'zAKZXdc037FQxq',
       @c_state = 'QA',
       @c_zip = '700311111',
       @c_phone = '2967264064528555',
       @c_credit = 'GC',
       @c_credit_lim = 50000.00,
       @c_discount = 0.3069,
       @c_since = GETDATE(),
       @datetime = GETDATE()

-----
-- return data to client
-----
SELECT @c_id,
       @c_last,
       @datetime,
       @w_street_1,
       @w_street_2,
       @w_city,
       @w_state,
       @w_zip,
       @d_street_1,
       @d_street_2,

```



```

@d_city,
@d_state,
@d_zip,
@c_first,
@c_middle,
@c_street_1,
@c_street_2,
@c_city,
@c_state,
@c_zip,
@c_phone,
@c_since,
@c_credit,
@c_credit_lim,
@c_discount,
@c_balance,
@screen_data
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id int,
    @d_id tinyint,
    @threshold smallint
AS
DECLARE @delaytime varchar(30)

-----
-- uniform random delay of 0 - 3.6 second; avg = 1.8
-----
SELECT @delaytime = '00:00:0' +
CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS char(5))

WAITFOR delay @delaytime

SELECT 49
GO

CREATE PROCEDURE tpcc_version
AS
DECLARE @version char(8)
BEGIN
    SELECT @version = '4.10.000'
    SELECT @version AS 'Version'
END
GO

CREATE TABLE order_line_null (
    [ol_i_id] [int]
NOT NULL ,
    [ol_supply_w_id]
[int] NOT NULL ,
    [ol_delivery_d]
[datetime] NOT NULL ,
    [ol_quantity]
[smallint] NOT NULL ,
    [ol_amount]
[numerical](6, 2) NOT NULL
) ON [PRIMARY]
GO

```

```

INSERT INTO order_line_null VALUES ( 101, 1,
GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 102, 1,
GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 103, 1,
GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 104, 1,
GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 105, 1,
GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 106, 1,
GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 107, 1,
GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 108, 1,
GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 109, 1,
GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 110, 1,
GETDATE(), 5, 123.45 )
INSERT INTO order_line_null VALUES ( 111, 1,
GETDATE(), 1, 123.45 )
INSERT INTO order_line_null VALUES ( 112, 1,
GETDATE(), 2, 123.45 )
INSERT INTO order_line_null VALUES ( 113, 1,
GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1,
GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1,
GETDATE(), 5, 123.45 )
GO

```

ordstat.sql

```

-----
--
-- File: ORDSTAT.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates order status stored procedure
--
--
-- Interface Level: 4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS ON

```

```

GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id int,
    @d_id tinyint,
    @c_id int,
    @c_last char(16) = ''
AS
DECLARE @c_balance money,
@c_first char(16),
@c_middle char(2),
@o_id int,
@o_entry_d datetime,
@o_carrier_id smallint,
@cnt smallint

BEGIN TRANSACTION o
IF (@c_id = 0)
BEGIN
    -----
    -- get customer id and info using last name
    -----
    SELECT @cnt = (count(*)+1)/2
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @w_id AND
          c_d_id = @d_id

    SET rowcount @cnt

    SELECT @c_id = c_id,
           @c_balance = c_balance,
           @c_first = c_first,
           @c_last = c_last,
           @c_middle = c_middle
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @w_id AND
          c_d_id = @d_id

    ORDER BY c_w_id, c_d_id, c_last, c_first

    SET rowcount 0
END
ELSE
BEGIN
    -----
    -- get customer info if by id
    -----
    SELECT @c_balance = c_balance,
           @c_first = c_first,
           @c_middle = c_middle,
           @c_last = c_last

```

```

FROM customer WITH (repeatableread)
WHERE c_id = @c_id AND
      c_d_id = @d_id AND
      c_w_id = @w_id

SELECT @cnt = @@rowcount
END

-----
-- if no such customer
-----
IF (@cnt = 0)
BEGIN
    RAISERROR('Customer not found',18,1)
    GOTO custnotfound
END

-----
-- get order info
-----
SELECT @o_id = o_id,
       @o_entry_d = o_entry_d,
       @o_carrier_id = o_carrier_id

FROM orders WITH (serializable)
WHERE o_c_id = @c_id AND
      o_d_id = @d_id AND
      o_w_id = @w_id
ORDER BY o_id ASC

-----
-- select order lines for the current order
-----
SELECT ol_supply_w_id,
       ol_i_id,
       ol_quantity,
       ol_amount,
       ol_delivery_d

FROM order_line WITH (repeatableread)
WHERE ol_o_id = @o_id AND
      ol_d_id = @d_id AND
      ol_w_id = @w_id

custnotfound:

COMMIT TRANSACTION o

-----
-- return data to client
-----
SELECT @c_id,
       @c_last,
       @c_first,
       @c_middle,

       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id

GO

```

payment.sql

```

-----
--
-- File: PAYMENT.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Creates payment stored procedure
--
--
-- Interface Level: 4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
            'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE tpcc_payment
    @w_id int,
    @c_w_id int,
    @h_amount smallmoney,
    @d_id tinyint,
    @c_d_id tinyint,
    @c_id int,
    @c_last char(16) = ""

AS
DECLARE @w_street_1 char(20),
        @w_street_2 char(20),
        @w_city char(20),
        @w_state char(2),
        @w_zip char(9),
        @w_name char(10),
        @d_street_1 char(20),
        @d_street_2 char(20),
        @d_city char(20),
        @d_state char(2),
        @d_zip char(9),
        @d_name char(10),

```

```

        @c_first char(16),
        @c_middle char(2),
        @c_street_1 char(20),
        @c_street_2 char(20),
        @c_city char(20),
        @c_state char(2),
        @c_zip char(9),
        @c_phone char(16),
        @c_since datetime,
        @c_credit char(2),
        @c_credit_lim money,
        @c_balance money,
        @c_discount smallmoney,
        @c_data char(42),
        @datetime datetime,
        @w_ytd money,
        @d_ytd money,
        @cnt smallint,
        @val smallint,
        @screen_data char(200),
        @d_id_local tinyint,
        @w_id_local int,
        @c_id_local int

SELECT @screen_data = ""

BEGIN TRANSACTION p
-- get payment date
SELECT @datetime = GETDATE()

IF (@c_id = 0)
BEGIN
    -- get customer id and info using last name
    SELECT @cnt = COUNT(*)
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @c_w_id AND
          c_d_id = @c_d_id

    SELECT @val = (@cnt + 1) / 2

    SET rowcount @val

    SELECT @c_id = c_id
    FROM customer WITH (repeatableread)
    WHERE c_last = @c_last AND
          c_w_id = @c_w_id AND
          c_d_id = @c_d_id

    ORDER BY c_last, c_first

    SET rowcount 0

END

-- get customer info and update balances

UPDATE customer
SET @c_balance = c_balance -
    @h_amount,
    c_payment_cnt = c_payment_cnt + 1,
    c_ytd_payment = c_ytd_payment +
    @h_amount,

```

```

        @c_first      = c_first,
        @c_middle    = c_middle,
        @c_last      = c_last,
        @c_street_1  = c_street_1,
        @c_street_2  = c_street_2,
        @c_city       = c_city,
        @c_state     = c_state,
        @c_zip        = c_zip,
        @c_phone     = c_phone,
        @c_credit     = c_credit,
        @c_credit_lim = c_credit_lim,
        @c_discount   = c_discount,
        @c_since      = c_since,
        @c_id_local   = c_id
WHERE    c_id      = @c_id AND
        c_w_id     = @c_w_id AND
        c_d_id     = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
    -- compute new info
    SELECT @c_data = convert(char(5),@c_id) +
        convert(char(4),@c_d_id)
+
        convert(char(5),@c_w_id)
+
        convert(char(4),@d_id) +
        convert(char(5),@w_id) +
convert(char(19),@h_amount)

    -- update customer info
    UPDATE customer
    SET    c_data      = @c_data +
substring(c_data, 1, 458),
        @screen_data = @c_data +
substring(c_data, 1, 158)
    WHERE c_id      = @c_id AND
        c_w_id     = @c_w_id AND
        c_d_id     = @c_d_id
END

-- get district data and update year-to-date
UPDATE district
SET    d_ytd      = d_ytd + @h_amount,
        @d_street_1 = d_street_1,
        @d_street_2 = d_street_2,
        @d_city     = d_city,
        @d_state    = d_state,
        @d_zip      = d_zip,
        @d_name     = d_name,
        @d_id_local = d_id
WHERE  d_w_id     = @w_id AND
        d_id      = @d_id

-- get warehouse data and update year-to-date
UPDATE warehouse
SET    w_ytd      = w_ytd + @h_amount,
        @w_street_1 = w_street_1,
        @w_street_2 = w_street_2,
        @w_city     = w_city,
        @w_state    = w_state,

```

```

        @w_zip      = w_zip,
        @w_name     = w_name,
        @w_id_local = w_id
WHERE    w_id      = @w_id

-- create history record
INSERT INTO history VALUES
(@c_id_local,
        @c_d_id,
        @c_w_id,
        @d_id_local,
        @w_id_local,
        @datetime,
        @h_amount,
        @w_name + ' ' +
@d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

random.c

```

// File: RANDOM.C Microsoft
// TPC-C Kit Ver. 4.62

```

```

// Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001, 2002,
// 2005
// Purpose: Random number generation routines
// for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A 16807
#define M 2147483647
#define Q 127773 /* M div A */
#define R 2836 /* M mod A */
#define Thread __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

/*****
*****
*
* random -
*
* Implements a GOOD pseudo random number
* generator. This generator *
* will/should? run the complete period before
* repeating. *
*
* Copied from:
*
* Random Numbers Generators: Good Ones Are Hard
* to Find. *
* Communications of the ACM - October 1988
* Volume 31 Number 10 *
*
* Machine Dependencies:
*
* long must be 2 ^ 31 - 1 or greater.
*
*
*
*****
*****/

/*****
*****
* seed - load the Seed value used in irand and drand.
* Should be used before *
* first call to irand or drand.
*
*****
*****/

void seed(long val)
{

```

```

#ifdef DEBUG
    printf("[%ld]DBG: Entering seed()...\n", (int)
GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\n",Seed,
val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

/*****
*****
*
*
* irand - returns a 32 bit integer pseudo random
number with a period of *
* 1 to 2 ^ 32 - 1.
*
*
* parameters:
*
* none.
*
*
* returns:
*
* 32 bit integer - defined as long ( see above
).
*
*
* side effects:
*
* seed get recomputed.
*****
*****/

long irand()
{
    register long    s;    /* copy of seed */
    register long    test; /* test flag */
    register long    hi;   /* tmp value for speed
*/
    register long    lo;   /* tmp value for speed
*/

#ifdef DEBUG
    printf("[%ld]DBG: Entering irand()...\n", (int)
GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;

```

```

    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

/*****
*****
*
*
* drand - returns a double pseudo random number
between 0.0 and 1.0.
* See irand.
*
*****
*****/

double drand()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering drand()...\n", (int)
GetCurrentThreadId());
#endif

    return( (double)irand() / 2147483647.0);
}

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n",
(int) GetCurrentThreadId());
#endif

    if ( upper == lower ) /* pgd 08-13-
96 perf enhancement */
        return lower;

    upper++;

    if ( upper <= lower )
        rand_num = upper;
    else
        rand_num = lower + irand() %
(upper - lower); /* pgd 08-13-96 perf enhancement */

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld
==> %ld\n",

```

```

(int)
GetCurrentThreadId(), lower, upper, rand_num);
#endif

    return rand_num;
}

#ifdef 0
//Original code pgd 08/13/96

long RandomNumber(long lower,
long upper)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering RandomNumber()...\n",
(int) GetCurrentThreadId());
#endif

    upper++;

    if ((upper <= lower))
        rand_num = upper;
    else
        rand_num = lower + irand() %
((upper > lower) ? upper - lower : upper);

#ifdef DEBUG
    printf("[%ld]DBG: RandomNumber between %ld & %ld
==> %ld\n",
(int)
GetCurrentThreadId(), lower, upper, rand_num);
#endif

    return rand_num;
}
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
long x,
long y,
long C)
{
    long rand_num;

#ifdef DEBUG
    printf("[%ld]DBG: Entering NURand()...\n", (int)
GetCurrentThreadId());
#endif

```

```

        rand_num = (((RandomNumber(0,iConst) |
RandomNumber(x,y)) + C) % (y-x+1))+x;

#ifdef DEBUG
        printf("[%ld]DBG: NURand: num = %d\n", (int)
GetCurrentThreadId(), rand_num);
#endif

        return rand_num;
}

```

removedb.sql

```

-----
--
--
-- File:   REMOVEDB.SQL
--
--         Microsoft TPC-C Benchmark Kit Ver. 4.61
--
--         Copyright Microsoft, 2005
--
-----
USE master
GO

-----
-- remove any existing database and backup files
-----

EXEC sp_dbremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
GO
EXEC sp_dropdevice 'tpccback2'
GO
EXEC sp_dropdevice 'tpccback3'
GO
EXEC sp_dropdevice 'tpccback4'
GO
EXEC sp_dropdevice 'tpccback5'
GO
EXEC sp_dropdevice 'tpccback6'
GO
EXEC sp_dropdevice 'tpccback7'
GO
EXEC sp_dropdevice 'tpccback8'
GO
EXEC sp_dropdevice 'tpccback9'
GO
EXEC sp_dropdevice 'tpccback10'
GO

```

```

EXEC sp_dropdevice 'tpccback11'
GO
EXEC sp_dropdevice 'tpccback12'
GO

```

restore.sql

```

-----
--
--
-- File:   RESTORE.SQL
--
--         Microsoft TPC-C Benchmark Kit Ver. 4.61
--
--         Copyright Microsoft, 2005
--
-----
DECLARE @startdate DATETIME,
        @enddate   DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,
21)

LOAD DATABASE tpcc FROM tpccback2_1, tpccback2_2,
tpccback2_3, tpccback2_4, tpccback2_5, tpccback2_6,
tpccback2_7, tpccback2_8, tpccback2_9, tpccback2_10,
tpccback2_11, tpccback2_12 WITH stats = 1, replace

SELECT @enddate = GETDATE()
SELECT 'End date: ',
       CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO

```

RunSQLCfg.sql

```

-----
--
--
-- File:   RUNSQLCFG.SQL
--
--         Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--         Copyright Microsoft, 2005
--
--
--         Sets suggested runtime server
configuration
--

```

```

--         parameters
--
--
-----
EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

-----
-- change this value to approximately the number of
connected users
-----
EXEC sp_configure 'max worker threads',255

-----
-- increase priority of user threads
-----
EXEC sp_configure 'priority boost',1

-----
-- disable automatic checkpointing
-----
EXEC sp_configure 'recovery interval',32767

-----
-- change to a mask appropriate for the number of
processors on the server
-----
EXEC sp_configure 'affinity mask',0xf

-----
-- enable fibers
-----
EXEC sp_configure 'lightweight pooling',1
GO

RECONFIGURE WITH OVERRIDE
GO

```

sqlshutdown.sql

```

-----
--
--

```

```

-- File:  SQLSHUTDOWN.SQL
--
--      Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--      Copyright Microsoft, 2005
--
--
--      Checkpoints tpcc database and issues a
shutdown  --
--
-----
USE tpcc
GO

CHECKPOINT
GO

SHUTDOWN
GO

```

stocklev.sql

```

-----
--
-- File:  STOCKLEV.SQL
--
--      Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--      Copyright Microsoft, 2005
--
--
--      Creates stock level stored procedure
--
--
--      Interface Level:  4.20.000
--
-----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name =
'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

```

```

CREATE PROCEDURE  tpcc_stocklevel
                @w_id          int,
                @d_id          tinyint,
                @threshold     smallint

AS
DECLARE @o_id_low  int,
        @o_id_high int

SELECT @o_id_low = (d_next_o_id - 20),
       @o_id_high = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id   = @w_id AND
       d_id     = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id = @w_id AND
       ol_d_id = @d_id and
       ol_o_id BETWEEN @o_id_low AND
                    @o_id_high AND

       s_w_id = ol_w_id AND
       s_i_id = ol_i_id AND
       s_quantity < @threshold

OPTION(OORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

strings.c

```

//      File:  STRINGS.C
//
//      Microsoft
//
//      TPC-C Kit Ver. 4.51
//
//      Copyright
//      Microsoft, 1996, 1997, 1998, 1999, 2000, 2001, 2002,
//      2003
//      Purpose:  Source file for database loader
//      string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

//=====
//
//      Function name: MakeAddress
//
//=====

```

```

void MakeAddress(char *street_1,
                char
                *street_2,
                char *city,
                char *state,
                char *zip)
{
#ifdef DEBUG
    printf("[%d]DBG: Entering MakeAddress()\n",
(int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString ( 2,  2, STATE_LEN, state);
    MakeZipNumberString( 9,  9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%d]DBG: MakeAddress: street_1: %s,
street_2: %s, city: %s, state: %s, zip: %s\n",
(int)
GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====
//
//      Function name: LastName
//
//=====
void LastName(int num,
            char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI"
, "PRES" ,
        "ESE" , "ANTI" , "CALLY" ,
"ATION" , "EING"
    };

#ifdef DEBUG
    printf("[%d]DBG: Entering LastName()\n", (int)
GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)

```

```

        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()...
num <%ld> out of range (0,999)\n", num);
        exit(-1);
    }
}

#ifdef DEBUG
printf("[%ld]DBG: LastName: num = [%d] ==>
[%d][%d][%d]\n",
        (int)
GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
printf("[%ld]DBG: LastName: String = %s\n",
(int) GetCurrentThreadId(), name);
#endif

return;
}

//=====
//
// Function name: MakeAlphaString
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-
Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a
string of random alphanumeric
//(respectively, numeric) characters of a random
length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and
0..9. The only other
//requirement is that the character set used "must be
able to represent a minimum
//of 128 different characters". We are using 8-bit
chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing
chars into the text fields.
//--Clevine 08/13/96

int MakeAlphaString( int x, int y, int z, char
*str)
{
    int len;
    int i;
    char cc = 'a';

```

```

        static char chArray[] =
"0123456789ABCDEFGHIJKLMNPOQRSTUVWXYZabcdefghijklmnop
qrstuvwxyz";
        static int chArrayMax = 61;

#ifdef DEBUG
printf("[%ld]DBG: Entering MakeAlphaString()\n",
(int) GetCurrentThreadId());
#endif

len= RandomNumber(x, y);

for (i=0; i<len; i++)
    str[i] =
chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

return len;
}

int MakeAlphaStringPadded( int minLen, int maxLen,
int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNPOQRSTUVWXYZabcdefghijklmnop
qrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
printf("[%ld]DBG: Entering
MakeAlphaStringPadded()\n", (int)
GetCurrentThreadId());
#endif

len= RandomNumber(minLen, maxLen);

for (i=0; i<len; i++)
    str[i] =
chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen -
len);
    str[padLen] = 0;
return padLen;
}

//=====
//
// Function name: MakeOriginalAlphaString
//=====

int MakeOriginalAlphaString(int x,
int y,

```

```

        int z,
        char *str,
        int percent)
{
    int len;
    int val;
    int start;

#ifdef DEBUG
printf("[%ld]DBG: Entering
MakeOriginalAlphaString()\n", (int)
GetCurrentThreadId());
#endif

// verify percentage is valid
if ((percent < 0) || (percent > 100))
{
    printf("MakeOriginalAlphaString:
Invalid percentage: %d\n", percent);
    exit(-1);
}

// verify string is at least 8 chars in length
if (x < 8)
{
    printf("MakeOriginalAlphaString:
string length must be >= 8\n");
    exit(-1);
}

// Make Alpha String
len = MakeAlphaString(x,y, z, str);

val = RandomNumber(1,100);
if (val <= percent)
{
    start = RandomNumber(0, len - 8);
    strncpy(str + start, "ORIGINAL",
8);
}

#ifdef DEBUG
printf("[%ld]DBG: MakeOriginalAlphaString: :
%s\n",
        (int)
GetCurrentThreadId(), str);
#endif

return len;
}

//=====
//
// Function name: MakeNumberString
//=====

```

```

int MakeNumberString(int x, int y, int z, char
*str)
{
    char tmp[16];

    //MakeNumberString is always called
MakeZipNumberString(16, 16, 16, string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;

    return 16;
}

//=====
//
// Function name: MakeZipNumberString
//
//=====
int MakeZipNumberString(int x, int y, int z, char
*str)
{
    char tmp[16];

    //MakeZipNumberString is always called
MakeZipNumberString(9, 9, 9, string)

    strcpy(str, "000011111");

    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    return 9;
}

//=====
//
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int)
GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

```

```

//=====
//
// Function name: InitAddress
//
// Description:
//
//=====
void InitAddress(char *street_1, char *street_2, char
*city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
//
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int len;

    len = strlen(name);
    if ( len < max )
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

tables.sql

```

-----
--
-- File: TABLES.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--

```

```

-- Copyright Microsoft, 2005
--
--
-- Creates TPC-C tables
--
-----
SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

-----
-- Remove all existing TPC-C tables
-----
if exists ( select name from sysobjects where name =
'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name =
'district' )
    drop table district
go
if exists ( select name from sysobjects where name =
'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name =
'history' )
    drop table history
go
if exists ( select name from sysobjects where name =
'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name =
'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name =
'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name =
'item' )
    drop table item
go
if exists ( select name from sysobjects where name =
'stock' )
    drop table stock
go

-----
-- Create new tables
-----
create table warehouse
(
    w_id int,
    w_ytd money,
    w_tax smallmoney,

```



```

        w_name          char(10),
        w_street_1     char(20),
        w_street_2     char(20),
        w_city         char(20),
        w_state        char(2),
        w_zip          char(9)
    ) on MSSQL_misc_fg
go

create table district
(
    d_id              tinyint,
    d_w_id            int,
    d_ytd             money,
    d_next_o_id       int,

    d_tax             smallmoney,
    d_name            char(10),
    d_street_1        char(20),
    d_street_2        char(20),
    d_city            char(20),
    d_state            char(2),
    d_zip             char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id              int,
    c_d_id            tinyint,
    c_w_id            int,
    c_discount         smallmoney,
    c_credit_lim       money,
    c_last             char(16),
    c_first            char(16),
    c_credit            char(2),
    c_balance          money,
    c_ytd_payment      money,
    c_payment_cnt      smallint,
    c_delivery_cnt     smallint,
    c_street_1         char(20),
    c_street_2         char(20),
    c_city             char(20),
    c_state            char(2),
    c_zip              char(9),
    c_phone            char(16),
    c_since            datetime,
    c_middle           char(2),
    c_data             char(500)
) on MSSQL_cs_fg
go

-- Use the following table option if using c_data
varchar(max)
-- sp_tableoption 'customer','large value types out
of row','1'
-- go

create table history
(
    h_c_id            int,
    h_c_d_id          tinyint,
    h_c_w_id          int,

```

```

        h_d_id        tinyint,
        h_w_id        int,
        h_date        datetime,
        h_amount      smallmoney,
        h_data        char(24)
    ) on MSSQL_misc_fg
go

create table new_order
(
    no_o_id           int,
    no_d_id           tinyint,
    no_w_id           int
) on MSSQL_misc_fg
go

create table orders
(
    o_id              int,
    o_d_id            tinyint,
    o_w_id            int,
    o_c_id            int,
    o_carrier_id      tinyint,
    o_ol_cnt           tinyint,
    o_all_local       tinyint,
    o_entry_d         datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id           int,
    ol_d_id           tinyint,
    ol_w_id           int,
    ol_number         tinyint,
    ol_i_id           int,
    ol_delivery_d     datetime,
    ol_amount         smallmoney,
    ol_supply_w_id    int,
    ol_quantity        smallint,
    ol_dist_info      char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id              int,
    i_name            char(24),
    i_price           smallmoney,
    i_data            char(50),
    i_im_id           int
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id            int,
    s_w_id            int,
    s_quantity        smallint,
    s_ytd             int,
    s_order_cnt       smallint,
    s_remote_cnt      smallint,
    s_data            char(50),

```

```

        s_dist_01     char(24),
        s_dist_02     char(24),
        s_dist_03     char(24),
        s_dist_04     char(24),
        s_dist_05     char(24),
        s_dist_06     char(24),
        s_dist_07     char(24),
        s_dist_08     char(24),
        s_dist_09     char(24),
        s_dist_10     char(24)
    ) on MSSQL_cs_fg
go

```

time.c

```

// File: TIME.C
// Microsoft
TPC-C Kit Ver. 4.62
// Copyright
Microsoft, 1996, 1997, 1998, 1999, 2000, 2001, 2002,
2005
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
//
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%d]DBG: Entering TimeNow()\n", (int)
GetCurrentThreadId());
#endif

    _ftime(&el_time);

    time_now = ((el_time.time - start_sec) * 1000) +
el_time.millitm;

    return time_now;
}

```

tpcc.h

```
// File: TPC.H Microsoft
// TPC-C Kit Ver. 4.51 Copyright
// Microsoft, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2005
// Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>
#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbc.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "C:\\MSTPC.C.450\\SETUP\\LOGS\\load.out"
```

```
#define LOADER_LOG_PATH "C:\\MSTPC.C.450\\SETUP\\LOGS\\"
#define LOADER_NURAND_C 123

#define DEF_STARTING_WAREHOUSE 1
#define BUILD_INDEX 1 // build both data and indexes
#define INDEX_ORDER 1 // build indexes before load
#define SCALE_DOWN 0 // build a normal scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all; //
    set if loading all tables //
    BOOL table_item; //
    set if loading ITEM table specifically //
    BOOL table_warehouse; // set if loading
    WAREHOUSE, DISTRICT, and STOCK //
    BOOL table_customer; // set if
    loading CUSTOMER and HISTORY //
    BOOL table_orders; // set if
    loading NEW-ORDER, ORDERS, ORDER-LINE //
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
    char *log_path;
    char *synch_servername;
    long case_sensitivity;
    long starting_warehouse;
    long build_index;
    long index_order;
    long scale_down;
```

```
char *index_script_path;
} TPCCCLR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_OL_NEW_ORDER_ITEMS 15
#define MAX_OL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();
int MakeAlphaStringPadded();
int MakeOriginalAlphaString();
```

```

int    MakeNumberString();
int    MakeZipNumberString();
void   InitString();
void   InitAddress();
void   PaddString();

```

tpccldr.c

```

//=====
// File:          TPCCLDR.C
//               Microsoft
TPC-C Kit Ver. 4.51
//               Copyright
Microsoft, 1996, 1997, 1998, 1999,
//               2000, 2001,
2002, 2003
// Purpose: Source file for TPC-C database
loader
//=====
// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS          100000
#define MAXITEMS_SCALE_DOWN 100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN 30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT 3000
#define ORDERS_SCALE_DOWN 30
#define MAX_CUSTOMER_THREADS 2
#define MAX_ORDER_THREADS 3
#define MAX_MAIN_THREADS 4
#define MAX_SQL_ERRORS 10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();

```

```

void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{
    double          ol_i_id;          ol;
    long            ol_supply_w_id;
    short           ol_quantity;
    double          ol_amount;
    char            ol_dist_info[DIST_INFO_LEN+1];
    char            ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
    long            o_id;
    short           o_d_id;
    long            o_w_id;
    long            o_c_id;
    short           o_carrier_id;
    short           o_ol_cnt;
    short           o_all_local;
    ORDER_LINE_STRUCT o_ol[15];
} ORDERS_STRUCT;

typedef struct
{
    long            c_id;
    short           c_d_id;
    long            c_w_id;
    char            c_first[FIRST_NAME_LEN+1];
    char            c_middle[MIDDLE_NAME_LEN+1];
    char            c_last[LAST_NAME_LEN+1];
    char            c_street_1[ADDRESS_LEN+1];
    char            c_street_2[ADDRESS_LEN+1];
    char            c_city[ADDRESS_LEN+1];
    char            c_state[STATE_LEN+1];
    char            c_zip[ZIP_LEN+1];
    char            c_phone[PHONE_LEN+1];
    char            c_credit[CREDIT_LEN+1];
    double          c_credit_lim;
    double          c_discount;
    char            c_balance[6];
}

```

```

double
    c_ytd_payment;
    short
    c_payment_cnt;
    short
    c_delivery_cnt;
    char
    c_data[C_DATA_LEN+1];
    double
    h_amount;
    char
    h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
    char            c_last[LAST_NAME_LEN+1];
    char            c_first[FIRST_NAME_LEN+1];
    long            c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
    long            time_start;
} LOADER_TIME_STRUCT;

// Global variables
char    szLastError[300];

HENV    henv;
HDBC    v_hdbc;
// for SQL Server version
verification
HDBC    i_hdbc1;
// for ITEM table
HDBC    w_hdbc1;
// for WAREHOUSE, DISTRICT, STOCK
HDBC    c_hdbc1;
// for CUSTOMER
HDBC    c_hdbc2;
// for HISTORY
HDBC    o_hdbc1;
// for ORDERS
HDBC    o_hdbc2;
// for NEW-ORDER
HDBC    o_hdbc3;
// for ORDER-LINE
HSTMT    v_hstmt;
// for SQL Server version verification
HSTMT    i_hstmt1;
HSTMT    w_hstmt1;
HSTMT    c_hstmt1, c_hstmt2;
HSTMT    o_hstmt1, o_hstmt2, o_hstmt3;

int    total_db_errors;

ORDERS_STRUCT    orders_buf[ORDERS_PER_DISTRICT];

```

```

CUSTOMER_STRUCT
    customer_buf[CUSTOMERS_PER_DISTRICT];
long      orders_rows_loaded;
double    new_order_rows_loaded;
double    order_line_rows_loaded;
long      history_rows_loaded;
long      customer_rows_loaded;
double    stock_rows_loaded;
long      district_rows_loaded;
long      item_rows_loaded;
long      warehouse_rows_loaded;
long      main_time_start;
long      main_time_end;
long      max_items;
long      customers_per_district;
long      orders_per_district;
long      first_new_order;
long      last_new_order;

TPCCCLDR_ARGS  *aptr, args;

//=====
//
// Function name: main
//
//=====
int main(int argc, char **argv)
{
    DWORD
dwThreadID[MAX_MAIN_THREADS];
HANDLE      hThread[MAX_MAIN_THREADS];
FILE        *fLoader;
char        buffer[255];
int         i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

printf("\n*****\n");
printf("\n*
*");
printf("\n* Microsoft SQL Server
*");
printf("\n*
*");
printf("\n* TPC-C BENCHMARK KIT: Database
loader *");
printf("\n* Version %s
*", TPCKIT_VER);
printf("\n*
*");
printf("\n*****\n");

    // process command line arguments
    aptr = &args;
    GetArgsLoader(argc, argv, aptr);

```

```

printf("Build interface is ODBC.\n");

    if (aptr->build_index == 0)
        printf("Data load only - no index
creation.\n");
    else
        printf("Data load and index
creation.\n");

    if (aptr->index_order == 0)
        printf("Clustered indexes will be
created after bulk load.\n");
    else
        printf("Clustered indexes will be
created before bulk load.\n");

    // set database scale values
    if (aptr->scale_down == 1)
    {
        printf("*** Scaled Down Database
***\n");
        max_items = MAXITEMS_SCALE_DOWN;
        customers_per_district =
CUSTOMERS_SCALE_DOWN;
        orders_per_district =
ORDERS_SCALE_DOWN;
        first_new_order = 0;
        last_new_order = 30;
    }
    else
    {
        max_items = MAXITEMS;
        customers_per_district =
CUSTOMERS_PER_DISTRICT;
        orders_per_district =
ORDERS_PER_DISTRICT;
        first_new_order = 2100;
        last_new_order = 3000;
    }

    // open connections to SQL Server
    OpenConnections();

    // open file for loader results
    fLoader = fopen(aptr->loader_res_file,
"w");

    if (fLoader == NULL)
    {
        printf("Error, loader result file
open failed.");
        exit(-1);
    }

    // start loading data
    sprintf(buffer, "TPC-C load started for %ld
warehouses.\n", aptr->num_warehouses);
    if (aptr->scale_down == 1)
    {
        sprintf(buffer, "SCALED DOWN
DATABASE.\n");
    }

```

```

printf("%s", buffer);
fprintf(fLoader, "%s", buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads
if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting
loader threads for: item\n");

        hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadItem,
NULL,
0,
&dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed
in creating creating thread = 0.\n");
            exit(-1);
        }

        if (aptr->tables_all || aptr-
>table_warehouse)
        {
            fprintf(fLoader, "Starting loader
threads for: warehouse\n");

                hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadWarehouse,
NULL,
0,
&dwThreadID[1]);

                if (hThread[1] == NULL)
                {
                    printf("Error, failed
in creating creating thread = 1.\n");
                    exit(-1);
                }

                if (aptr->tables_all || aptr-
>table_customer)

```

```

    {
        fprintf(fLoader, "Starting loader
threads for: customer\n");
        hThread[2] = CreateThread(NULL,
            0,
(LPTHREAD_START_ROUTINE) LoadCustomer,
            NULL,
            0,
            &dwThreadID[2]);
        if (hThread[2] == NULL)
        {
            printf("Error, failed
in creating creating main thread = 2.\n");
            exit(-1);
        }
        if (aptr->tables_all || aptr->table_orders)
        {
            fprintf(fLoader, "Starting loader
threads for: orders\n");
            hThread[3] = CreateThread(NULL,
                0,
(LPTHREAD_START_ROUTINE) LoadOrders,
                NULL,
                0,
                &dwThreadID[3]);
            if (hThread[3] == NULL)
            {
                printf("Error, failed
in creating creating main thread = 3.\n");
                exit(-1);
            }
            // Wait for threads to finish...
            for (i=0; i<MAX_MAIN_THREADS; i++)
            {
                if (hThread[i] != NULL)
                {
                    WaitForSingleObject(
hThread[i], INFINITE);
                    CloseHandle(hThread[i]);
                    hThread[i] = NULL;
                }
            }
        }
    }

```

```

        main_time_end = (TimeNow() / MILLI);
        sprintf(buffer, "\nTPC-C load completed
successfully in %ld minutes.\n",
            (main_time_end -
main_time_start)/60);
        printf("%s",buffer);
        fprintf(fLoader, "%s", buffer);
        fclose(fLoader);
        SQLFreeEnv(henv);
        exit(0);
        return 0;
    }
//=====
//
// Function name: LoadItem
//
//=====
void LoadItem()
{
    int            i;
    long           i_id;
    long           i_im_id;
    char           i_name[I_NAME_LEN+1];
    double         i_price;
    char           i_data[I_DATA_LEN+1];
    char           name[20];
    long           time_start;
    RETCODE        rc;
    DBINT          rcint;
    char           bcphint[128];
    char           err_log_path[256];
    // Seed with unique number
    seed(11);
    printf("Loading item table...\n");
    //if build index before load
    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        BuildIndex("idxitmc1");
    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);
    sprintf(name, "%s..%s", aptr->database,
"item");
    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "item.err");
    rc = bcp_init(i_hdbc1, name, NULL,
err_log_path, DB_IN);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            sprintf(bcp hint, "tablock, order
(i_id), ROWS_PER_BATCH = 100000");
            rc = bcp_control(i_hdbc1,
BCPHINTS, (void*) bcp hint);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);
        }
        i = 0;
        rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0,
I_NAME_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        rc = bcp_bind(i_hdbc1, (BYTE *) &i_price,
0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0,
SQL_VARLEN_DATA, "", 1, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
        time_start = (TimeNow() / MILLI);
        item_rows_loaded = 0;
        for (i_id = 1; i_id <= max_items; i_id++)
        {
            i_im_id = RandomNumber(1L,
10000L);
            MakeAlphaStringPadded(14, 24,
I_NAME_LEN, i_name);
            i_price = ((float)
RandomNumber(100L, 10000L))/100.0;
            MakeOriginalAlphaString(26, 50,
I_DATA_LEN, i_data, 10);
            rc = bcp_sendrow(i_hdbc1);
            if (rc != SUCCEED)
                HandleErrorDBC(i_hdbc1);
            item_rows_loaded++;
        }
    }

```

```

        CheckForCommit(i_hdbc1, i_hstmt1,
item_rows_loaded, "item", &time_start);
    }

    rcint = bcp_done(i_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(i_hdbc1);

    printf("Finished loading item table.\n");

    SQLFreeStmt(i_hstmt1, SQL_DROP);
    SQLDisconnect(i_hdbc1);
    SQLFreeConnect(i_hdbc1);

    // if build index after load
    if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
        BuildIndex("idxitmc1");
}

//=====
//
// Function   : LoadWarehouse
//
// Loads WAREHOUSE table and loads Stock and District
as Warehouses are created
//
//=====
void LoadWarehouse()
{
    int            i;
    long           w_id;
    char           w_name[W_NAME_LEN+1];
    char           w_street_1[ADDRESS_LEN+1];
    char           w_street_2[ADDRESS_LEN+1];
    char           w_city[ADDRESS_LEN+1];
    char           w_state[STATE_LEN+1];
    char           w_zip[ZIP_LEN+1];
    double         w_tax;
    double         w_ytd;
    char           name[20];
    long           time_start;
    RETCODE        rc;
    DBINT          rcint;
    char           bcphint[128];
    char           err_log_path[256];

    // Seed with unique number
    seed(2);

    printf("Loading warehouse table...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        BuildIndex("idxwarc1");

    InitString(w_name, W_NAME_LEN+1);

```

```

    InitAddress(w_street_1, w_street_2, w_city,
w_state, w_zip);

    sprintf(name, "%s..%s", aptr->database,
"warehouse");

    strcpy(err_log_path, aptr->log_path);
    strcat(err_log_path, "whouse.err");
    rc = bcp_init(w_hdbc1, name, NULL,
err_log_path, DB_IN);

    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    {
        sprintf(bcphint, "tablock, order
(w_id), ROWS_PER_BATCH = %d", aptr->num_warehouses);
        rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
        if (rc != SUCCEEDED)

            HandleErrorDBC(w_hdbc1);
    }

    i = 0;
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0,
W_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1,
0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2,
0, ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0,
ADDRESS_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0,
STATE_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);
    rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0,
ZIP_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(w_hdbc1);

```

```

    time_start = (TimeNow() / MILLI);

    warehouse_rows_loaded = 0;

    for (w_id = (long)aptr->starting_warehouse;
w_id <= aptr->num_warehouses; w_id++)
    {
        MakeAlphaStringPadded(6,10,
W_NAME_LEN, w_name);

        MakeAddress(w_street_1,
w_street_2, w_city, w_state, w_zip);

        w_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

        w_ytd = 300000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEEDED)

            HandleErrorDBC(w_hdbc1);

        warehouse_rows_loaded++;
        CheckForCommit(w_hdbc1, i_hstmt1,
warehouse_rows_loaded, "warehouse", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading warehouse
table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
        BuildIndex("idxwarc1");

    stock_rows_loaded = 0;
    district_rows_loaded = 0;

    District();
    Stock();
}

//=====
//
// Function   : District
//
//=====
void District()
{
    int            i;
    short          d_id;
    long           d_w_id;
    char           d_name[D_NAME_LEN+1];
    char           d_street_1[ADDRESS_LEN+1];

```

```

char d_street_2[ADDRESS_LEN+1];
char d_city[ADDRESS_LEN+1];
char d_state[STATE_LEN+1];
char d_zip[ZIP_LEN+1];
double d_tax;
double d_ytd;
char name[20];
long d_next_o_id;
long time_start;
long w_id;
RETCODE rc;
DBINT rcint;
char bcphint[128];
char err_log_path[256];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdiscl");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city,
d_state, d_zip);
sprintf(name, "%s.%s", aptr->database,
"district");

strcpy(err_log_path, aptr->log_path);
strcat(err_log_path, "district.err");
rc = bcp_init(w_hdbc1, name, NULL,
err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order
(d_w_id, d_id), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)

        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *)
&d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0,
D_NAME_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1,
0, ADDRESS_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2,
0, ADDRESS_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0,
ADDRESS_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0,
STATE_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
        rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0,
ZIP_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        d_ytd = 30000.0;

        d_next_o_id = orders_per_district+1;

        time_start = (TimeNow() / MILLI);

        for (w_id = aptr->starting_warehouse; w_id
<= aptr->num_warehouses; w_id++)
        {
            d_w_id = w_id;

            for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)
            {
                MakeAlphaStringPadded(6,10,D_NAME_LEN,
d_name);
                MakeAddress(d_street_1,
d_street_2, d_city, d_state, d_zip);

                d_tax = ((float)
RandomNumber(0L,2000L))/10000.00;

                rc =
bcp_sendrow(w_hdbc1);
                if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1,
w_hstmt1, district_rows_loaded, "district",
&time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district
table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");

    return;
}

//=====
// Function : Stock
//
//=====
void Stock()
{
    int i;
    long s_i_id;
    long s_w_id;

    short s_quantity;
    char s_dist_01[S_DIST_LEN+1];
    char s_dist_02[S_DIST_LEN+1];
    char s_dist_03[S_DIST_LEN+1];
    char s_dist_04[S_DIST_LEN+1];
    char s_dist_05[S_DIST_LEN+1];
    char s_dist_06[S_DIST_LEN+1];
    char s_dist_07[S_DIST_LEN+1];
    char s_dist_08[S_DIST_LEN+1];
    char s_dist_09[S_DIST_LEN+1];
    char s_dist_10[S_DIST_LEN+1];
    long s_ytd;
    short s_order_cnt;
    short s_remote_cnt;
    char s_data[S_DATA_LEN+1];
    short len;
    char name[20];
    long time_start;
    RETCODE rc;
    DBINT rcint;
    char bcphint[128];
    char err_log_path[256];

    // Seed with unique number
    seed(3);

```

```

// if build index before load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    BuildIndex("idxstkcl");

printf(name, "%s..%s", aptr->database,
"stock");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"stock.err");
rc = bcp_init(w_hdbc1, name, NULL,
err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
{
    sprintf(bcphint, "tablock, order
(s_i_id, s_w_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 100000));
    rc = bcp_control(w_hdbc1,
BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *)
&s_quantity, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *)
&s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *)
&s_remote_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0,
SQL_VARLEN_DATA, "", 1, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01,
0, S_DIST_LEN, NULL, 0, 0, ++i);

```

```

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10,
0, S_DIST_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");
for (s_i_id=1; s_i_id <= max_items;
s_i_id++)
{
    for (s_w_id = (long)aptr-
>starting_warehouse; s_w_id <= aptr->num_warehouses;
s_w_id++)
    {
        s_quantity =
(short)RandomNumber(10L,100L);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);

```

```

        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
        len =
MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

        len =
MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

        rc =
bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        stock_rows_loaded++;

        CheckForCommit_Big(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading stock table.\n");

    SQLFreeStmt(w_hstmt1, SQL_DROP);
    SQLDisconnect(w_hdbc1);
    SQLFreeConnect(w_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
        BuildIndex("idxstkcl");

    return;
}

//=====
//
// Function : LoadCustomer
//
//=====
void LoadCustomer()
{
    LOADER_TIME_STRUCT
customer_time_start;
    LOADER_TIME_STRUCT
history_time_start;

```



```

long
w_id;
short      d_id;
DWORD
dwThreadId[MAX_CUSTOMER_THREADS];
HANDLE
hThread[MAX_CUSTOMER_THREADS];
char      name[20];
RETCODE
rc;
DBINT
rcint;
char
bcphint[128];
char
cmd[256];
int
num_procs;
char
err_log_path_cust[256];
char
err_log_path_hist[256];

// Seed with unique number
seed(5);

printf("Loading customer and history
tables...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
{
    BuildIndex("idxcuscl");
    // check the number of
processors on this system
    // if 8 or more processors, then
build index on History.
    // if less than 8 processors, do
not build the index
    num_procs = atoi(getenv(
"NUMBER_OF_PROCESSORS" ));
    if ( num_procs >= 8 )
        BuildIndex("idxhiscl");
}

// Initialize bulk copy
sprintf(name, "%s..%s", aptr->database,
"customer");
strcpy(err_log_path_cust, aptr->log_path);
strcat(err_log_path_cust, "customer.err");
rc = bcp_init(c_hdbc1, name, NULL,
err_log_path_cust, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
{
    sprintf(bcphint, "tablock, order
(c_w_id, c_d_id, c_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 30000));

```

```

rc = bcp_control(c_hdbc1,
BCPHINTS, (void*) bcphint);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
}
sprintf(name, "%s..%s", aptr->database,
"history");
rc = bcp_init(c_hdbc2, name, NULL,
"logs\\history.err", DB_IN);
strcpy(err_log_path_hist, aptr->log_path);
strcat(err_log_path_hist, "history.err");
rc = bcp_init(c_hdbc2, name, NULL,
err_log_path_hist, DB_IN);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);
sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*)
bcphint);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc2);

customer_rows_loaded = 0;
history_rows_loaded = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow()
/ MILLI);
history_time_start.time_start = (TimeNow()
/ MILLI);

for (w_id = (long)aptr->starting_warehouse;
w_id <= aptr->num_warehouses; w_id++)
{
    for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id,
w_id);

        // Start parallel
loading threads here...

        // Start customer table
thread
        printf("...Loading
customer table for: d_id = %d, w_id = %d\n", d_id,
w_id);

        hThread[0] =
CreateThread(NULL,
0,

(LPTHREAD_START_ROUTINE) LoadCustomerTable,

&customer_time_start,

```

```

0,

&dwThreadId[0]);

if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating
thread = 0.\n");
    exit(-1);
}

// Start History table
thread
printf("...Loading
history table for: d_id = %d, w_id = %d\n", d_id,
w_id);

hThread[1] =
CreateThread(NULL,
0,

(LPTHREAD_START_ROUTINE) LoadHistoryTable,

&history_time_start,
0,

&dwThreadId[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
    exit(-1);
}

WaitForSingleObject(
hThread[0], INFINITE );
WaitForSingleObject(
hThread[1], INFINITE );

if
(CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing customer
thread handle with errno: %d\n", GetLastError());
}

if
(CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing history
thread handle with errno: %d\n", GetLastError());
}

```

```

    }
}
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer
table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors
on this system
    // if 8 or more processors, then
build index on History.
    // if less than 8 processors, do
not build the index
    num_procs = atoi(getenv(
"NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader
into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -
Q\"update customer set c_first = 'C_LOAD = %d' where
c_id = 1 and c_w_id = 1 and c_d_id = 1\" >
%snurand_load.log",
aptr->server,
aptr->user,
aptr-
>password,
aptr-
>database,
aptr-
    LOADER_NURAND_C,
aptr-
>log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);

```

```

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
//
// Function : CustomerBufInit
//
//=====
void CustomerBufInit()
{
    long i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");

        strcpy(customer_buf[i].c_phone,"");

        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount =
(float) 0;

        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment =
0;
        customer_buf[i].c_payment_cnt =
0;
        customer_buf[i].c_delivery_cnt =
0;

        strcpy(customer_buf[i].c_data,"");

        customer_buf[i].h_amount = 0;

```

```

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
//
// Function : CustomerBufLoad
//
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long i;
    CUSTOMER_SORT_STRUCT
c(CUSTOMERS_PER_DISTRICT);

    for (i=0;i<customers_per_district;i++)
    {
        if (i < 1000)
            LastName(i,
c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN,
c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for:
d_id = %d, w_id = %d\n",
d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment =
10.0;
        customer_buf[i].c_payment_cnt =
1;
        customer_buf[i].c_delivery_cnt =
0;
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first,
c[i].c_first);
        strcpy(customer_buf[i].c_last,
c[i].c_last);
        customer_buf[i].c_middle[0] =
'O';
        customer_buf[i].c_middle[1] =
'E';

        MakeAddress(customer_buf[i].c_street_1,

```

```

customer_buf[i].c_street_2,
customer_buf[i].c_city,
customer_buf[i].c_state,
customer_buf[i].c_zip);
    MakeNumberString(16, 16,
PHONE_LEN, customer_buf[i].c_phone);
    if (RandomNumber(1L, 100L) > 10)
        customer_buf[i].c_credit[0] = 'G';
    else
        customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] =
'C';
        customer_buf[i].c_credit_lim =
50000.0;
        customer_buf[i].c_discount =
((float) RandomNumber(0L, 5000L) / 10000.0;
        strcpy(customer_buf[i].c_balance, "-10.0");
        MakeAlphaStringPadded(300, 500,
C_DATA_LEN, customer_buf[i].c_data);
        // Generate HISTORY data
        MakeAlphaStringPadded(12, 24,
H_DATA_LEN, customer_buf[i].h_data);
    }
}
//=====
//
// Function : LoadCustomerTable
//
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT
*customer_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    char c_first[FIRST_NAME_LEN+1];
    char c_middle[MIDDLE_NAME_LEN+1];
    char c_last[LAST_NAME_LEN+1];
    char c_street_1[ADDRESS_LEN+1];
    char c_street_2[ADDRESS_LEN+1];
    char c_city[ADDRESS_LEN+1];
    char c_state[STATE_LEN+1];
    char c_zip[ZIP_LEN+1];
    char c_phone[PHONE_LEN+1];
    char c_credit[CREDIT_LEN+1];
    double c_credit_lim;
    double c_discount;
    char c_balance[6];
    double c_ytd_payment;

```

```

short c_payment_cnt;
short c_delivery_cnt;
char char c_data[C_DATA_LEN+1];
char char c_since[C_SINCE_LEN+1];
RETCODE rc;
i = 0;
rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0,
LAST_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0,
FIRST_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0,
CREDIT_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5,
NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment,
0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt,
0, SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *)
&c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0,
ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0,
ADDRESS_LEN, NULL, 0, 0, ++i);

```

```

if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0,
ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0,
STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0,
ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0,
PHONE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_since,
0, C_SINCE_LEN, NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_middle,
0, MIDDLE_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0,
C_DATA_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEEDED)
    HandleErrorDBC(c_hdbc1);
for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;
    strcpy(c_first,
customer_buf[i].c_first);
    strcpy(c_middle,
customer_buf[i].c_middle);
    strcpy(c_last,
customer_buf[i].c_last);
    strcpy(c_street_1,
customer_buf[i].c_street_1);
    strcpy(c_street_2,
customer_buf[i].c_street_2);
    strcpy(c_city,
customer_buf[i].c_city);
    strcpy(c_state,
customer_buf[i].c_state);
    strcpy(c_zip,
customer_buf[i].c_zip);
    strcpy(c_phone,
customer_buf[i].c_phone);
    strcpy(c_credit,
customer_buf[i].c_credit);
    FormatDate(&c_since);
    c_credit_lim =
customer_buf[i].c_credit_lim;

```

```

        c_discount =
customer_buf[i].c_discount;
        strcpy(c_balance,
customer_buf[i].c_balance);
        c_ytd_payment =
customer_buf[i].c_ytd_payment;
        c_payment_cnt =
customer_buf[i].c_payment_cnt;
        c_delivery_cnt =
customer_buf[i].c_delivery_cnt;
        strcpy(c_data,
customer_buf[i].c_data);

        // Send data to server
rc = bcp_sendrow(c_hdbc1);
if (rc != SUCCEED)

        HandleErrorDBC(c_hdbc1);

        customer_rows_loaded++;
        CheckForCommit(c_hdbc1, c_hstmt1,
customer_rows_loaded, "customer",
&customer_time_start->time_start);
    }
}

//=====
//
// Function   : LoadHistoryTable
//
//=====
void LoadHistoryTable(LOADER_TIME_STRUCT
*history_time_start)
{
    long         i;
    long         c_id;
    short        c_d_id;
    long         c_w_id;
    double       h_amount;
    char         h_data[H_DATA_LEN+1];
    char         h_date[H_DATE_LEN+1];

    RETCODE      rc;

    i = 0;
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

```

```

        rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0,
H_DATE_LEN, NULL, 0, SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0,
H_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;
        c_w_id = customer_buf[i].c_w_id;
        h_amount =
customer_buf[i].h_amount;
        strcpy(h_data,
customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
rc = bcp_sendrow(c_hdbc2);
if (rc != SUCCEED)

        HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2,
history_rows_loaded, "history", &history_time_start-
>time_start);
    }
}

//=====
//
// Function   : LoadOrders
//
//=====
void LoadOrders()
{
    LOADER_TIME_STRUCT    orders_time_start;
    LOADER_TIME_STRUCT    new_order_time_start;
    LOADER_TIME_STRUCT    order_line_time_start;
    long                  w_id;
    short                  d_id;

```

```

    DWORD
dwThreadId[MAX_ORDER_THREADS];
    HANDLE
hThread[MAX_ORDER_THREADS];
    char                    name[20];
    RETCODE
rc;
    char
bcphint[128];
    char
err_log_path_ord[256];
    char
err_log_path_nord[256];
    char
err_log_path_ord1[256];

    // seed with unique number
seed(6);

    printf("Loading orders...\n");

    // if build index before load...
if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    {
        BuildIndex("idxordc1");
        BuildIndex("idxnodc1");
        BuildIndex("idxodlc1");
    }

    // initialize bulk copy
sprintf(name, "%s..%s", aptr->database,
"orders");

    rc = bcp_init(o_hdbc1, name, NULL,
"logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL,
err_log_path_ord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
    {
        sprintf(bcphint, "tablock, order
(o_w_id, o_d_id, o_id), ROWS_PER_BATCH = %u", (aptr-
>num_warehouses * 30000));
        rc = bcp_control(o_hdbc1,
BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)

            HandleErrorDBC(o_hdbc1);

        sprintf(name, "%s..%s", aptr->database,
"new_order");

        rc = bcp_init(o_hdbc2, name, NULL,
"logs\\neword.err", DB_IN);
        strcpy(err_log_path_nord, aptr->log_path);
        strcat(err_log_path_nord, "neword.err");

```

```

        rc = bcp_init(o_hdbc2, name, NULL,
err_log_path_nord, DB_IN);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            sprintf(bcphint, "tablock, order
(no_w_id, no_d_id, no_o_id), ROWS_PER_BATCH = %u",
(aptr->num_warehouses * 9000));
            rc = bcp_control(o_hdbc2,
BCPHINTS, (void*) bcphint);
            if (rc != SUCCEED)

                HandleErrorDBC(o_hdbc2);
        }

        sprintf(name, "%s..%s", aptr->database,
"order_line");

        rc = bcp_init(o_hdbc3, name, NULL,
"logs\\ordline.err", DB_IN);
        strcpy(err_log_path_ordl, aptr->log_path);
        strcat(err_log_path_ordl, "ordline.err");
        rc = bcp_init(o_hdbc3, name, NULL,
err_log_path_ordl, DB_IN);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        if ((aptr->build_index == 1) && (aptr-
>index_order == 1))
        {
            sprintf(bcphint, "tablock, order
(ol_w_id, ol_d_id, ol_o_id, ol_number),
ROWS_PER_BATCH = %u", (aptr->num_warehouses *
300000));
            rc = bcp_control(o_hdbc3,
BCPHINTS, (void*) bcphint);
            if (rc != SUCCEED)

                HandleErrorDBC(o_hdbc3);
        }

        orders_rows_loaded = 0;
        new_order_rows_loaded = 0;
        order_line_rows_loaded = 0;

        OrdersBufInit();

        orders_time_start.time_start = (TimeNow() /
MILLI);
        new_order_time_start.time_start =
(TimeNow() / MILLI);
        order_line_time_start.time_start =
(TimeNow() / MILLI);

        for (w_id = (long)aptr->starting_warehouse;
w_id <= aptr->num_warehouses; w_id++)
        {
            for (d_id = 1; d_id <=
DISTRICT_PER_WAREHOUSE; d_id++)

```

```

w_id);

        OrdersBufLoad(d_id,
w_id);

        loading_threads_here... // start parallel

        thread // start Orders table
        printf("...Loading
Order Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

        hThread[0] =
        CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadOrdersTable,
        &orders_time_start,
        0,
        &dwThreadID[0]);

        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        thread // start NewOrder table
        printf("...Loading New-
Order Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

        hThread[1] =
        CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadNewOrderTable,
        &new_order_time_start,
        0,
        &dwThreadID[1]);

        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");

```

```

        }
        exit(-1);

        // start Order-Line
        table thread
        printf("...Loading
Order-Line Table for: d_id = %d, w_id = %d\n", d_id,
w_id);

        hThread[2] =
        CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadOrderLineTable,
        &order_line_time_start,
        0,
        &dwThreadID[2]);

        if (hThread[2] == NULL)
        {
            printf("Error, failed in creating creating
thread = 2.\n");
            exit(-1);
        }

        WaitForSingleObject(
hThread[0], INFINITE );
        WaitForSingleObject(
hThread[1], INFINITE );
        WaitForSingleObject(
hThread[2], INFINITE );

        if
(CloseHandle(hThread[0]) == FALSE)
        {
            printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
        }

        if
(CloseHandle(hThread[1]) == FALSE)
        {
            printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
        }

        if
(CloseHandle(hThread[2]) == FALSE)
        {
            printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
        }

```

```

    }
}
printf("Finished loading orders.\n");

return;
}
//=====
//
// Function   : OrdersBufInit
//
// Clears shared buffer for ORDERS, NEWORDER, and
// ORDERLINE
//
//=====
void OrdersBufInit()
{
    int    i;
    int    j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o_ol_cnt = 0;
        orders_buf[i].o_all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o_ol[j].ol = 0;

            orders_buf[i].o_ol[j].ol_i_id = 0;

            orders_buf[i].o_ol[j].ol_supply_w_id = 0;

            orders_buf[i].o_ol[j].ol_quantity = 0;

            orders_buf[i].o_ol[j].ol_amount = 0;

            strcpy(orders_buf[i].o_ol[j].ol_dist_info,"
                ");
        }
    }
//=====
//
// Function   : OrdersBufLoad
//
// Fills shared buffer for ORDERS, NEWORDER, and
// ORDERLINE
//
//=====
void OrdersBufLoad(short d_id, long w_id)

```

```

{
    int    cust[ORDERS_PER_DISTRICT+1];
    long   o_id;
    long   ol;

    printf("...Loading Order Buffer for: d_id =
%d, w_id = %d\n",
                d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for
    (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER
        data
            orders_buf[o_id].o_d_id = d_id;
            orders_buf[o_id].o_w_id = w_id;
            orders_buf[o_id].o_c_id = o_id+1;
            orders_buf[o_id].o_c_id =

    cust[o_id+1];
            orders_buf[o_id].o_ol_cnt =
    (short)RandomNumber(5L, 15L);

            if (o_id < first_new_order)
            {
                orders_buf[o_id].o_carrier_id =
    (short)RandomNumber(1L, 10L);

                orders_buf[o_id].o_all_local = 1;
            }
            else
            {
                orders_buf[o_id].o_carrier_id = 0;

                orders_buf[o_id].o_all_local = 1;
            }

            for (ol=0;
    ol<orders_buf[o_id].o_ol_cnt; ol++)
            {
                orders_buf[o_id].o_ol[ol].ol = ol+1;

                orders_buf[o_id].o_ol[ol].ol_i_id =
    RandomNumber(1L, max_items);

                orders_buf[o_id].o_ol[ol].ol_supply_w_id =
    w_id;

                orders_buf[o_id].o_ol[ol].ol_quantity = 5;
                MakeAlphaString(24, 24,
    OL_DIST_INFO_LEN,
    &orders_buf[o_id].o_ol[ol].ol_dist_info);

                // Generate ORDER-LINE
                data
                    if (o_id <
    first_new_order)

```

```

{
            orders_buf[o_id].o_ol[ol].ol_amount = 0;
            // Added to
            insure ol_delivery_d set properly during load

            FormatDate(&orders_buf[o_id].o_ol[ol].ol_de
    livery_d);

            }
            else
            {
                orders_buf[o_id].o_ol[ol].ol_amount =
    RandomNumber(1,999999)/100.0;
                // Added to
                insure ol_delivery_d set properly during load
                // odbc
                datetime format
                strcpy(orders_buf[o_id].o_ol[ol].ol_deliver
    y_d,"1899-12-31 00:00:00.000");
            }
        }
    }
//=====
//
// Function   : LoadOrdersTable
//
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT
*orders_time_start)
{
    int    i;
    long   o_id;
    short  o_d_id;
    long   o_w_id;

    long   o_c_id;
    short  o_carrier_id;
    short  o_ol_cnt;
    short  o_all_local;

    char   o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT  rcint;

    // bind ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0,
    SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0,
    SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
    if (rc != SUCCEEDED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0,
    SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_ol_cnt, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
        rc = bcp_bind(o_hdbc1, (BYTE *) &o_entry_d,
0, O_ENTRY_D_LEN, NULL, 0, SQLCHARACTER, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        for (i = 0; i < orders_per_district; i++)
        {
            o_id          =
orders_buf[i].o_id;
            o_d_id        =
orders_buf[i].o_d_id;
            o_w_id        =
orders_buf[i].o_w_id;
            o_c_id        =
orders_buf[i].o_c_id;
            o_carrier_id =
orders_buf[i].o_carrier_id;
            o_ol_cnt      =
orders_buf[i].o_ol_cnt;
            o_all_local   =
orders_buf[i].o_all_local;

            FormatDate(&o_entry_d);

            // send data to server
            rc = bcp_sendrow(o_hdbc1);
            if (rc != SUCCEED)

                HandleErrorDBC(o_hdbc1);

            orders_rows_loaded++;
            CheckForCommit(o_hdbc1, o_hstmt1,
orders_rows_loaded, "orders", &orders_time_start-
>time_start);
        }

        if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
        {
            rcint = bcp_done(o_hdbc1);

            if (rcint < 0)

                HandleErrorDBC(o_hdbc1);

```

```

SQLFreeStmt(o_hstmt1, SQL_DROP);
SQLDisconnect(o_hdbc1);
SQLFreeConnect(o_hdbc1);

        // if build index after load...
        if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
            BuildIndex("idxordc1");

        // build non-clustered index
        if (aptr->build_index == 1)
            BuildIndex("idxordnc");
    }
}

//=====
//
// Function   : LoadNewOrderTable
//
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT
*new_order_time_start)
{
    long         i;
    long         o_id;
    short        o_d_id;
    long         o_w_id;
    RETCODE      rc;
    DBINT        rcint;

    // Bind NEW-ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);
    rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    for (i = first_new_order; i <
last_new_order; i++)
    {
        o_id = orders_buf[i].o_id;
        o_d_id = orders_buf[i].o_d_id;
        o_w_id = orders_buf[i].o_w_id;

        rc = bcp_sendrow(o_hdbc2);
        if (rc != SUCCEED)

            HandleErrorDBC(o_hdbc2);

        new_order_rows_loaded++;

```

```

        CheckForCommit_Big(o_hdbc2,
o_hstmt2, new_order_rows_loaded, "new_order",
&new_order_time_start->time_start);
    }

    if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
    {
        rcint = bcp_done(o_hdbc2);

        if (rcint < 0)

            HandleErrorDBC(o_hdbc2);

        SQLFreeStmt(o_hstmt2, SQL_DROP);
        SQLDisconnect(o_hdbc2);
        SQLFreeConnect(o_hdbc2);

        // if build index after load...
        if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
            BuildIndex("idxmodc1");
    }
}

//=====
//
// Function   : LoadOrderLineTable
//
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT
*order_line_time_start)
{
    long         i;
    long         j;
    long         o_id;
    short        o_d_id;
    long         o_w_id;
    double       ol;
    long         ol_i_id;
    long         ol_supply_w_id;
    short        ol_quantity;
    double       ol_amount;
    char         ol_dist_info[DIST_INFO_LEN+1];
    char         ol_delivery_d[OL_DELIVERY_D_LEN+1];
    RETCODE      rc;
    DBINT        rcint;

    // bind ORDER-LINE data
    i = 0;
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);
    rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *)
&ol_delivery_d, 0, OL_DELIVERY_D_LEN, NULL, 0,
SQLCHARACTER, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0,
SQL_VARLEN_DATA, NULL, 0, SQLFLT8, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *)
&ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0,
SQL_VARLEN_DATA, NULL, 0, SQLINT2, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
        rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0,
DIST_INFO_LEN, NULL, 0, 0, ++i);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        for (i = 0; i < orders_per_district; i++)
        {
            o_id = orders_buf[i].o_id;
            o_d_id = orders_buf[i].o_d_id;
            o_w_id = orders_buf[i].o_w_id;

            for (j=0; j <
orders_buf[i].o_ol_cnt; j++)
            {
                ol =
orders_buf[i].o_ol[j].ol;
                ol_i_id =
orders_buf[i].o_ol[j].ol_i_id;
                ol_supply_w_id =
orders_buf[i].o_ol[j].ol_supply_w_id;
                ol_quantity =
orders_buf[i].o_ol[j].ol_quantity;
                ol_amount =
orders_buf[i].o_ol[j].ol_amount;

                strcpy(ol_delivery_d,orders_buf[i].o_ol[j].
ol_delivery_d);

                strcpy(ol_dist_info,orders_buf[i].o_ol[j].o
l_dist_info);

                rc =
bcp_sendrow(o_hdbc3);

```

```

        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        order_line_rows_loaded++;

        CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line",
&order_line_time_start->time_start);
    }
}

if ((o_w_id == aptr->num_warehouses) &&
(o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);

    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) &&
(aptr->index_order == 0))
        BuildIndex("idxodlcl");
}

}

//=====
//
// Function : GetPermutation
//
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
//
// Function : CheckForCommit
//

```

```

//=====
//
// Function : CheckForCommit(HDBC hdbc,
//
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,
                    long rows_loaded,
                    char *table_name,
                    long
*time_start)
{
    long time_end, time_diff;

    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end -
*time_start;

        printf("-> Loaded %ld rows into
%s in %ld sec - Total = %d (%.2f rps)\n",
aptr->batch,
table_name,
time_diff,
rows_loaded,
(float) aptr-
>batch / (time_diff ? time_diff : 1L));

        *time_start = time_end;
    }
}

return;
}

//=====
//
// Function : CheckForCommit_Big
//
//=====
void CheckForCommit_Big(HDBC hdbc,
                        HSTMT hstmt,
                        double rows_loaded,
                        char *table_name,
                        long
*time_start)
{
    long time_end, time_diff;

    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end -
*time_start;

```



```

        printf("-> Loaded %ld rows into
%s in %ld sec - Total = %.0f (%.2f rps)\n",
        aptr->batch,
        table_name,
        time_diff,
        rows_loaded,
        (float) aptr->batch / (time_diff ? time_diff : 1L));
    }
    *time_start = time_end;
}
return;
}

//=====
//
// Function : OpenConnections
//
//=====
void OpenConnections()
{
    RETCODE rc;

    char
    szDriverString[300];
    char
    szDriverStringOut[1024];
    SQLSMALLINT
    cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV,
    SQL_NULL_HANDLE, &henv );

    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION,
    (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv ,
    &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );

```

```

    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP,
    (void *)SQL_BCP_ON, SQL_IS_INTEGER );

    // Open connections to SQL Server
    // Connection 1
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database );

    rc = SQLSetConnectOption(i_hdbc1,
    SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
    NULL,

    (SQLCHAR*)&szDriverString[0] ,
    SQL_NTS,

    (SQLCHAR*)&szDriverStringOut[0],
    sizeof(szDriverStringOut),
    &cbDriverStringOut,
    SQL_DRIVER_NOPROMPT );

    if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(i_hdbc1);
        printf("TPC-C Loader
aborted!\n");
        exit(9);
    }

    // Connection 2
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database );

```

```

    rc = SQLSetConnectOption (w_hdbc1,
    SQL_PACKET_SIZE, aptr->pack_size);

    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = SQLDriverConnect ( w_hdbc1,
    NULL,

    (SQLCHAR*)&szDriverString[0] ,
    SQL_NTS,

    (SQLCHAR*)&szDriverStringOut[0],
    sizeof(szDriverStringOut),
    &cbDriverStringOut,
    SQL_DRIVER_NOPROMPT );

    if ( (rc != SUCCEED) &&
    (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(w_hdbc1);
        printf("TPC-C Loader
aborted!\n");
        exit(9);
    }

    // Connection 3
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

        aptr->server,
        aptr->user,
        aptr->password,
        aptr->database );

    rc = SQLSetConnectOption (c_hdbc1,
    SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = SQLDriverConnect ( c_hdbc1,
    NULL,

    (SQLCHAR*)&szDriverString[0] ,
    SQL_NTS,

    (SQLCHAR*)&szDriverStringOut[0],
    sizeof(szDriverStringOut),
    &cbDriverStringOut,
    SQL_DRIVER_NOPROMPT );

```

```

        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(c_hdbc1);
            printf("TPC-C Loader
aborted!\n");
            exit(9);
        }

        // Connection 4
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

            aptr->server,

            aptr->user,

            aptr->password,

            aptr->database );

        rc = SQLSetConnectOption ( c_hdbc2,
SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        rc = SQLDriverConnect ( c_hdbc2,

            NULL,

            (SQLCHAR*)&szDriverString[0] ,

            SQL_NTS,

            (SQLCHAR*)&szDriverStringOut[0],

            sizeof(szDriverStringOut),

            &cbDriverStringOut,

            SQL_DRIVER_NOPROMPT );
        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(c_hdbc2);
            printf("TPC-C Loader
aborted!\n");
            exit(9);
        }

        // Connection 5
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

            aptr->server,

            aptr->user,

            aptr->password,

            aptr->database );

```

```

        rc = SQLSetConnectOption (o_hdbc1,
SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);

        rc = SQLDriverConnect ( o_hdbc1,

            NULL,

            (SQLCHAR*)&szDriverString[0] ,

            SQL_NTS,

            (SQLCHAR*)&szDriverStringOut[0],

            sizeof(szDriverStringOut),

            &cbDriverStringOut,

            SQL_DRIVER_NOPROMPT );
        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(o_hdbc1);
            printf("TPC-C Loader
aborted!\n");
            exit(9);
        }

        // Connection 6
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

            aptr->server,

            aptr->user,

            aptr->password,

            aptr->database );

        rc = SQLSetConnectOption (o_hdbc2,
SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);

        rc = SQLDriverConnect ( o_hdbc2,

            NULL,

            (SQLCHAR*)&szDriverString[0] ,

            SQL_NTS,

            (SQLCHAR*)&szDriverStringOut[0],

            sizeof(szDriverStringOut),

            &cbDriverStringOut,

            SQL_DRIVER_NOPROMPT );
        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )

```

```

        {
            HandleErrorDBC(o_hdbc2);
            printf("TPC-C Loader
aborted!\n");
            exit(9);
        }

        // Connection 7
        sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,

            aptr->server,

            aptr->user,

            aptr->password,

            aptr->database );

        rc = SQLSetConnectOption (o_hdbc3,
SQL_PACKET_SIZE, aptr->pack_size);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);

        rc = SQLDriverConnect ( o_hdbc3,

            NULL,

            (SQLCHAR*)&szDriverString[0] ,

            SQL_NTS,

            (SQLCHAR*)&szDriverStringOut[0],

            sizeof(szDriverStringOut),

            &cbDriverStringOut,

            SQL_DRIVER_NOPROMPT );
        if ( (rc != SUCCEED) &&
            (rc != SQL_SUCCESS_WITH_INFO) )
        {
            HandleErrorDBC(o_hdbc3);
            printf("TPC-C Loader
aborted!\n");
            exit(9);
        }
    }

    //=====
    //
    // Function name: BuildIndex
    //
    //=====
    void BuildIndex(char          *index_script)
    {
        char          cmd[256];

        printf("Starting index creation:
%s\n",index_script);

```

```

        sprintf(cmd, "osql -S%s -U%s -P%s -e -
i%s\\%s.sql > %s%s.log",
                aptr->server,
                aptr->user,
                aptr->password,
                aptr->index_script_path,
                aptr->log_path,
                index_script);
        system(cmd);
        printf("Finished index creation:
%s\n",index_script);
    }
//=====
//
// Function name: HandleErrorDBC
//
//=====
void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR          SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN          NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char            timebuf[128];
    char            datebuf[128];
    char            err_log_path[256];
    FILE            *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC
, hdbc1, i, SqlState , &NativeError,
sizeof(Msg) , &MsgLen ) != SQL_NO_DATA )
    {
        sprintf( szLastError , "%s" ,
Msg );
        _strtime(timebuf);
        _strdate(datebuf);
        printf( "[%s : %s]
%s\n=>SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);
        strcpy(err_log_path,aptr-
>log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)

```

```

                printf("ERROR: Unable
to open errorlog file.\n");
            else
            {
                fprintf(fp1, "[%s : %s]
%s\nSQLState: %s\n" , datebuf, timebuf, szLastError,
SqlState);
                fclose(fp1);
            }
            i++;
        }
    }
//=====
//
// Function : HandleErrorSTMT
//
//=====
void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR          SqlState[6],
Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN          NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN rc2;
    char            timebuf[128];
    char            datebuf[128];
    char            err_log_path[256];
    FILE            *fp1;

    i = 1;
    while (( rc2 =
SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
sizeof(Msg) , &MsgLen ) != SQL_NO_DATA )
    {
        if (total_db_errors >=
MAX_SQL_ERRORS)
        {
            printf(">>>> Maximum
SQL errors of %d exceeded. Terminating
TPCCCLR.<<<<<\n",total_db_errors);
            exit(9);
        }
        total_db_errors++;
        sprintf( szLastError , "%s" ,
Msg );
        _strtime(timebuf);
        _strdate(datebuf);
        printf( "[%s : %s] %s\nSQLState:
%s\n" , datebuf, timebuf, szLastError, SqlState);
        strcpy(err_log_path,aptr-
>log_path);
        strcat(err_log_path,"tpccldr.err");

```

```

        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable
to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s]
%s\nSQLState: %s\n" , datebuf, timebuf, szLastError,
SqlState);
            fclose(fp1);
        }
        i++;
    }
}
//=====
//
// Function : FormatDate
//
//=====
void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;
    time( &now );
    when = *localtime( &now );
    mktime( &when );
    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d
%H:%M:%S.000" , &when );
    return;
}

```

tpcc_neworder_new.sql

```

SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO
-- 8666: full showplan text info (to see if rowset
sharing)
dbcc traceon(8666)
go
-- prevent sort over tvf
dbcc traceon(8710)
go
use tpcc
go
drop procedure tpcc_neworder_new
go
-- neworder_new v2.5 6/23/05 PeterCa

```

```

-- lq stock/order_line/client. upd district & ins
neworder.
-- cust/warehouse select together, ins order
separate
-- uses rownumber to distinct w any transform
-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idX,@s_w_idX pairs not
unique) OR (@i_idX not unique).
create proc tpcc_neworder_new
  @w_id int,
  @d_id tinyint,
  @c_id int,
  @o_ol_cnt tinyint,
  @o_all_local tinyint,
  @i_id1 int = 0, @s_w_id1 int = 0,
  @i_id2 int = 0, @s_w_id2 int = 0,
  @i_id3 int = 0, @s_w_id3 int = 0,
  @i_id4 int = 0, @s_w_id4 int = 0,
  @i_id5 int = 0, @s_w_id5 int = 0,
  @i_id6 int = 0, @s_w_id6 int = 0,
  @i_id7 int = 0, @s_w_id7 int = 0,
  @i_id8 int = 0, @s_w_id8 int = 0,
  @i_id9 int = 0, @s_w_id9 int = 0,
  @i_id10 int = 0, @s_w_id10 int = 0,
  @i_id11 int = 0, @s_w_id11 int = 0,
  @i_id12 int = 0, @s_w_id12 int = 0,
  @i_id13 int = 0, @s_w_id13 int = 0,
  @i_id14 int = 0, @s_w_id14 int = 0,
  @i_id15 int = 0, @s_w_id15 int = 0,
  @ol_qty1 smallint = 0,
  @ol_qty2 smallint = 0,
  @ol_qty3 smallint = 0,
  @ol_qty4 smallint = 0,
  @ol_qty5 smallint = 0,
  @ol_qty6 smallint = 0,
  @ol_qty7 smallint = 0,
  @ol_qty8 smallint = 0,
  @ol_qty9 smallint = 0,
  @ol_qty10 smallint = 0,
  @ol_qty11 smallint = 0,
  @ol_qty12 smallint = 0,
  @ol_qty13 smallint = 0,
  @ol_qty14 smallint = 0,
  @ol_qty15 smallint = 0

as
begin
declare @o_id int,
        @d_tax smallmoney,
        @o_entry_d datetime,
        @commit_flag tinyint

begin transaction n

-- get district tax and next available order id and
update
-- insert corresponding row into new-order table
-- plus initialize local variables

```

```

update district
set @d_tax = d_tax,
    @o_id = d_next_o_id,
    d_next_o_id = d_next_o_id + 1,
    @o_entry_d = getdate(),
    @commit_flag = 1
output deleted.d_next_o_id,@d_id,@w_id into
new_order
where d_w_id = @w_id and
      d_id = @d_id

-- update stock from stock join (item join (params))
-- output to orderline, output to client
-- NOTE: @@rowcount != @ol_o_cnt
-- if (@i_idX,@s_w_idX pairs not unique) OR
(@i_idX not unique).
update stock
set s_ytd = s_ytd +
    info.ol_qty,
    s_quantity = s_quantity -
    info.ol_qty +
    case when (s_quantity -
    info.ol_qty < 10) then 91 else 0 end,
    s_order_cnt = s_order_cnt
+ 1,
    s_remote_cnt =
    s_remote_cnt +
    case when (info.w_id =
    @w_id) then 0 else 1 end
output @o_id,@d_id,@w_id,info.lino,
    info.i_id,"dec 31, 1899",
    info.i_price * info.ol_qty,
    info.w_id,info.ol_qty,
    case @d_id when 1 then inserted.s_dist_01
    when 2 then inserted.s_dist_02
    when 3 then inserted.s_dist_03
    when 4 then inserted.s_dist_04
    when 5 then inserted.s_dist_05
    when 6 then inserted.s_dist_06
    when 7 then inserted.s_dist_07
    when 8 then inserted.s_dist_08
    when 9 then inserted.s_dist_09
    when 10 then inserted.s_dist_10
    end
into order_line
output info.i_name,inserted.s_quantity,
    case when
    ((charindex("ORIGINAL",info.i_data) > 0) and
    (charindex("ORIGINAL",inserted.s_data) > 0) )
    then "B" else "G" end,
    info.i_price,info.i_price*info.ol_qty

from
stock inner join
(select iid,wid,
    lino,ol_qty,
    i_price,
    i_name,

```

```

i_data
from
(select iid,wid,lino,qty,
    row_number() over (partition by
    iid,wid order by iid,wid) from
(select
    @i_id1,@s_w_id1,1,@ol_qty1 union all
    select @i_id2,@s_w_id2,2,@ol_qty2
union all
    select @i_id3,@s_w_id3,3,@ol_qty3
union all
    select @i_id4,@s_w_id4,4,@ol_qty4
union all
    select @i_id5,@s_w_id5,5,@ol_qty5
union all
    select @i_id6,@s_w_id6,6,@ol_qty6
union all
    select @i_id7,@s_w_id7,7,@ol_qty7
union all
    select @i_id8,@s_w_id8,8,@ol_qty8
union all
    select @i_id9,@s_w_id9,9,@ol_qty9
union all
    select
    @i_id10,@s_w_id10,10,@ol_qty10 union all
    select
    @i_id11,@s_w_id11,11,@ol_qty11 union all
    select
    @i_id12,@s_w_id12,12,@ol_qty12 union all
    select
    @i_id13,@s_w_id13,13,@ol_qty13 union all
    select
    @i_id14,@s_w_id14,14,@ol_qty14 union all
    select
    @i_id15,@s_w_id15,15,@ol_qty15) as
uol(iid,wid,lino,qty)
) as ol(iid,wid,lino,ol_qty,rownum)
inner join
    item (repeatableread) on i_id = iid --
filters out invalid items
and rownum=1
) as
info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
on s_i_id = info.i_id and
   s_w_id = info.w_id

if (@@rowcount <> @o_ol_cnt) -- must have an invalid
item
select @commit_flag = 0 -- 2.4.2.3
requires rest to proceed

-- insert fresh row into orders table
insert into orders values ( @o_id,
    @d_id,
    @w_id,
    @c_id,
    0,

```

```

        @o_ol_cnt,

        @o_all_local,

        @o_entry_d)

-- get customer last name, discount, and credit
rating
-- get warehouse tax
-- return order_data to client

        select w_tax,@d_tax,@o_id,

        c_last,c_discount,c_credit,

                @o_entry_d,@commit_flag

        from

        warehouse(repeatableread),customer(repeatable
leread)

        where      w_id      = @w_id and
                  c_id      =

@c_id and

                  c_w_id    =

@w_id and

                  c_d_id    =

@d_id

        -- @@rowcount checks that previous select
found a valid customer
        if ((@commit_flag = 1) and (@@rowcount =
1))

                commit transaction n
        else -- all that work for nothing.
                rollback transaction n

end
go
set showplan_text on
go
{call tpcc_neworder_new(1,1,1,10,1,
1,1,1,2,1,1,3,1,1,4,1,1,5,1,1,6,1,1,7,1,1,8,1,1,9,1,1
,10,1,1)}
go

```

VerifyTpccLoad.sql

```

-----
--
-- File:      VerifyTPCCLoad.SQL
--
--           Microsoft TPC-C Benchmark Kit Ver. 4.62
--
--           Copyright Microsoft, 2005
--
--

```

```

-----
-----
SET NOCOUNT ON
PRINT ' '
SELECT CONVERT(CHAR(30), GETDATE(), 21)
PRINT ' '

USE      tpcc
GO

IF EXISTS (SELECT name
           FROM sysobjects
           WHERE name = 'TPCC_INFO' AND
                 type = 'U')

        DROP TABLE TPCC_INFO
GO
PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of
warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of
warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

```

```

CREATE TABLE TPCC_INFO
(
    INFO_DATE          datetime,
    NUM_WAREHOUSE      bigint,
    WAREHOUSE_TARGET   bigint,
    NUM_DISTRICT       bigint,
    DISTRICT_TARGET    bigint,
    NUM_ITEM            bigint,
    ITEM_TARGET        bigint,
    NUM_CUSTOMER       bigint,
    CUSTOMER_TARGET    bigint,
    NUM_ORDERS         bigint,
    ORDERS_TARGET      bigint,
    ORDERS_TARGET_LOW  bigint,
    ORDERS_TARGET_HIGH bigint,
    NUM_ORDER_LINE     bigint,
    ORDER_LINE_TARGET  bigint,
    ORDER_LINE_TARGET_LOW  bigint,
    ORDER_LINE_TARGET_HIGH  bigint,
    NUM_NEW_ORDER      bigint,
    NEW_ORDER_TARGET   bigint,
    NEW_ORDER_TARGET_LOW  bigint,
    NEW_ORDER_TARGET_HIGH  bigint,
    NUM_HISTORY        bigint,
    HISTORY_TARGET     bigint,
    NUM_STOCK          bigint,
    STOCK_TARGET       bigint)
GO

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET   bigint,
        @NUM_DISTRICT       bigint,
        @DISTRICT_TARGET    bigint,
        @NUM_ITEM            bigint,
        @ITEM_TARGET        bigint,
        @NUM_CUSTOMER       bigint,
        @CUSTOMER_TARGET    bigint,
        @NUM_ORDERS         bigint,
        @ORDERS_TARGET      bigint,
        @ORDERS_TARGET_LOW  bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE     bigint,
        @ORDER_LINE_TARGET  bigint,
        @ORDER_LINE_TARGET_LOW  bigint,
        @ORDER_LINE_TARGET_HIGH  bigint,
        @NUM_NEW_ORDER      bigint,
        @NEW_ORDER_TARGET   bigint,
        @NEW_ORDER_TARGET_LOW  bigint,
        @NEW_ORDER_TARGET_HIGH  bigint,
        @NUM_HISTORY        bigint,
        @HISTORY_TARGET     bigint,
        @NUM_STOCK          bigint,
        @STOCK_TARGET       bigint

-- set the local variables prior to inserting them
into the TPCC_INFO table
SELECT @NUM_WAREHOUSE      = COUNT_BIG(*)
FROM warehouse

SELECT @NUM_DISTRICT       = COUNT_BIG(*)
FROM district

SELECT @NUM_ITEM           = COUNT_BIG(*)
FROM item

```

```

SELECT @NUM_CUSTOMER      = COUNT_BIG(*)
FROM customer

SELECT @NUM_ORDERS        = COUNT_BIG(*)
FROM orders

SELECT @NUM_ORDER_LINE    = COUNT_BIG(*)
FROM order_line

SELECT @NUM_NEW_ORDER     = COUNT_BIG(*)
FROM new_order

SELECT @NUM_HISTORY       = COUNT_BIG(*)
FROM history

SELECT @NUM_STOCK         = COUNT_BIG(*)
FROM stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET = @NUM_WAREHOUSE,
       @DISTRICT_TARGET  = @NUM_WAREHOUSE *
10,
       @ITEM_TARGET      = 100000,
       @CUSTOMER_TARGET  = @NUM_WAREHOUSE *
30000,
       @ORDERS_TARGET    = @NUM_WAREHOUSE *
30000,
       @ORDERS_TARGET_LOW = @ORDERS_TARGET -
FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH = @ORDERS_TARGET +
FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET = @NUM_WAREHOUSE *
300000,
       @ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET
- FLOOR(@ORDER_LINE_TARGET * .01),
       @ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET
+ FLOOR(@ORDER_LINE_TARGET * .01),
       @NEW_ORDER_TARGET  = @NUM_WAREHOUSE *
9000,
       @NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET -
FLOOR(@NEW_ORDER_TARGET * .01),
       @NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET +
FLOOR(@NEW_ORDER_TARGET * .01),
       @HISTORY_TARGET     = @NUM_WAREHOUSE *
30000,
       @STOCK_TARGET       = @NUM_WAREHOUSE *
100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES (GETDATE(),
                              @NUM_WAREHOUSE,
                              @WAREHOUSE_TARGET,
                              @NUM_DISTRICT,
                              @DISTRICT_TARGET,
                              @NUM_ITEM,
                              @ITEM_TARGET,
                              @NUM_CUSTOMER,
                              @CUSTOMER_TARGET,
                              @NUM_ORDERS,
                              @ORDERS_TARGET,
                              @ORDERS_TARGET_LOW,
                              @ORDERS_TARGET_HIGH,
                              @NUM_ORDER_LINE,
                              @ORDER_LINE_TARGET,
                              @NEW_ORDER_TARGET,
                              @NEW_ORDER_TARGET_LOW,
                              @NEW_ORDER_TARGET_HIGH,
                              @NUM_HISTORY,
                              @HISTORY_TARGET,
                              @NUM_STOCK,
                              @STOCK_TARGET)

GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_WAREHOUSE AS
'Warehouse Rows',
WAREHOUSE_TARGET AS
'Warehouse Target',
CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS
'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_DISTRICT AS 'District
Rows',
DISTRICT_TARGET AS
'District Target',
CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'District
Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ITEM AS 'Item
Rows',
ITEM_TARGET AS
'Item Target',
CASE WHEN (NUM_ITEM = ITEM_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Item
Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_CUSTOMER AS 'Customer
Rows',
CUSTOMER_TARGET AS
'Customer Target',
CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Customer
Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ORDERS AS 'Orders
Rows',
ORDERS_TARGET AS
'Orders Target',
CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
THEN 'OK!'
WHEN (NUM_ORDERS BETWEEN
ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
THEN 'OK! (within 1%)'
ELSE 'ERROR!!!'
END AS 'Orders
Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ORDER_LINE AS 'Order
Line Rows',
ORDER_LINE_TARGET AS
'Order Line Target',
CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
THEN 'OK!'
ELSE 'ERROR!!!'
END AS 'Order Line
Message'
FROM TPCC_INFO
GO

```

```

ORDER_LINE_TARGET AS
    'Order Line Target',
CASE WHEN (NUM_ORDER_LINE =
ORDER_LINE_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDER_LINE BETWEEN
ORDER_LINE_TARGET_LOW AND ORDER_LINE_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
END AS 'Orders
Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER AS 'New
Order Rows',
    NEW_ORDER_TARGET AS
    'New Order Target',
CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
    THEN 'OK!'
    WHEN (NUM_NEW_ORDER BETWEEN
NEW_ORDER_TARGET_LOW AND NEW_ORDER_TARGET_HIGH)
    THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!'
END AS 'New
Order Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| HISTORY TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_HISTORY AS 'History
Rows',
    HISTORY_TARGET AS
    'History Target',
CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
END AS 'New
Order Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| STOCK TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',

```

```

NUM_STOCK AS 'Stock
Rows',
    STOCK_TARGET AS
    'Stock Target',
CASE WHEN (NUM_STOCK = STOCK_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!'
END AS 'Stock
Message'
FROM TPCC_INFO
GO

-----
-- Check Indexes
-----
USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| TPC-C INDEXES |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders
EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

version.sql

```

-----
--
-- File: VERSION.SQL
--
-- Microsoft TPC-C Benchmark Kit Ver. 4.62
--
-- Copyright Microsoft, 2005
--
-- Extracts current version of SQL Server
--
-----
USE master
GO

SELECT CONVERT(char(20),
SERVERPROPERTY('ProductLevel')),
CONVERT(char(29), SERVERPROPERTY('Edition'))
GO

SELECT CONVERT(char(30), GETDATE(), 21)
GO

```

Appendix C: Tunable Parameters

Microsoft SQL Server 2005 Startup Parameters

```
start sqlservr.exe -c -x -T3502 -T8011 -T8012 -T8018
-T8019 -T8710 -T661 -T836 -T834
```

Where:

```
-c Start SQL Server independently of the
Windows NT Service Control Manager
-x Disables the keeping of CPU time and cache-
hit ratio statistics
-T3502 Prints a message to the SQL Server log at the
start and end of each checkpoint
-T8011 Disable diagnostics for resource monitor
-T8012 Disable ring buffer for scheduler
-T8018 Disable exceptions rung buffer
-T8019 Disable stack collection for exception ring
buffer
-T661 Disable ghost writer
-T8710 Disable HP checks.
-T836 Force max server memory
-T834 Enable large page support
```

File locations:

```
sqlservr.exe C:\Program
Files\Microsoft SQL Server\MSSQL.1\MSSQL\BINN
ERRORLOG C:\Program Files\Microsoft SQL
Server\MSSQL.1\MSSQL\LOG
```

Boot.ini Parameters

```
[boot loader]
timeout=10
default=multi(0)disk(0)rdisk(0)partition(1)\WINDOWS
[operating systems]
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Windows
Server 2003 Enterprise x64 Edition /pmtimer"
/noexecute=optout /fastdetect /pmtimer
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Windows
Server 2003 Enterprise x64 Edition" /noexecute=optout
/fastdetect
```

Microsoft SQL Server 2005 Configuration Parameters

name	config_value	run_value	minimum
Ad Hoc Distributed Queries			0
1	0	0	
affinity I/O mask			-2147483648
2147483647	0	0	
affinity mask			-2147483648
2147483647	15	15	
affinity64 I/O mask			-2147483648
2147483647	0	0	
affinity64 mask			-2147483648
2147483647	0	0	
Agent XPs			0
1	0	0	
allow updates			0
1	0	0	
awe enabled			0
1	0	0	
blocked process threshold			0
86400	0	0	
c2 audit mode			0
1	0	0	
clr enabled			0
1	0	0	
cost threshold for parallelism			0
32767	5	5	
cross db ownership chaining			0
1	0	0	
cursor threshold			-1
2147483647	-1	-1	
Database Mail XPs			0
1	0	0	
default full-text language			0
2147483647	1033	1033	
default language			0
9999	0	0	
default trace enabled			0
1	0	0	
disallow results from triggers			0
1	0	0	
fill factor (%)			0
100	0	0	
ft crawl bandwidth (max)			0
32767	100	100	
ft crawl bandwidth (min)			0
32767	0	0	
ft notify bandwidth (max)			0
32767	100	100	
ft notify bandwidth (min)			0
32767	0	0	
in-doubt xact resolution			0
2	0	0	

index create memory (KB)			704
2147483647	704	704	
lightweight pooling			0
1	1	1	
locks			5000
2147483647	0	0	
max degree of parallelism			0
64	1	1	
max full-text crawl range			0
256	4	4	
max server memory (MB)			16
2147483647	62000	62000	
max text repl size (B)			0
2147483647	65536	65536	
max worker threads			128
32767	575	575	
media retention			0
365	0	0	
min memory per query (KB)			512
2147483647	512	512	
min server memory (MB)			0
2147483647	0	16	
nested triggers			0
1	1	1	
network packet size (B)			512
32767	2048	2048	
Ole Automation Procedures			0
1	0	0	
open objects			0
2147483647	0	0	
PH timeout (s)			1
3600	60	60	
precompute rank			0
1	0	0	
priority boost			0
1	1	1	
query governor cost limit			0
2147483647	0	0	
query wait (s)			-1
2147483647	-1	-1	
recovery interval (min)			0
32767	32767	32767	
remote access			0
1	1	1	
remote admin connections			0
1	0	0	
remote login timeout (s)			0
2147483647	20	20	
remote proc trans			0
1	0	0	
remote query timeout (s)			0
2147483647	600	600	
Replication XPs			0
1	0	0	
scan for startup procs			0
1	0	0	
server trigger recursion			0
1	1	1	
set working set size			0
1	0	0	
show advanced options			0
1	1	1	


```

SMO and DMO XPs          0
1 1 1 0
SQL Mail XPs            0
1 0 0 0
transform noise words   0
1 0 0 0
two digit year cutoff   1753
9999 2049 2049
user connections        0
32767 0 0
user options            0
32767 0 0
Web Assistant Procedures 0
1 0 0
xp_cmdshell            0
1 0 0

```

1> 2> 3>

Microsoft SQL Server 2005 Torn Page Detection Status

```

1> 2> OptionName
CurrentSetting
-----
torn page detection      OFF

```

1> 2> 3>

Benchcraft Profile

```

Profile:  genghis_13456_8cl_shift
File Path: C:\genghis_profiles\genghis_13456_8cl_shift.xml
Version:  5

```

Number of Engines: 16

```

Name: RTE2
Description:
Directory: c:\blog\rte2.log
Machine: n25
Parameter Set: ExtraKick
Index: 1600000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER53164609
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25

```

```

CPU: 1
Additional Options:

Name: RTE1
Description:
Directory: c:\blog\rte1.log
Machine: n25
Parameter Set: ExtraKick
Index: 700000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER44265281
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

```

```

Name: RTE3
Description:
Directory: c:\blog\rte3.log
Machine: n26
Parameter Set: ExtraKick
Index: 200000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER3439676359
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

```

```

Name: RTE4
Description:
Directory: c:\blog\rte4.log
Machine: n26
Parameter Set: ExtraKick
Index: 300000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER4439706187
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

```

```

Name: RTE5
Description:
Directory: c:\blog\rte5.log
Machine: n27
Parameter Set: ExtraKick
Index: 400000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER5346413218

```

```

Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

```

```

Name: RTE6
Description:
Directory: c:\blog\rte6.log
Machine: n27
Parameter Set: ExtraKick
Index: 500000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER62226046
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

```

```

Name: RTE7
Description:
Directory: c:\blog\rte7.log
Machine: n28
Parameter Set: ExtraKick
Index: 600000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER72289718
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

```

```

Name: RTE8
Description:
Directory: c:\blog\rte8.log
Machine: n28
Parameter Set: ExtraKick
Index: 170000000
Seed: 4678
Configured Users: 8420
Pipe Name: DRIVER82325578
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

```

```

Name: RTE9
Description:
Directory: c:\blog\rte9.log
Machine: n29

```

Parameter Set: ExtraKick
Index: 800000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER92360187
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE10
Description:
Directory: c:\blog\rte10.log
Machine: n29
Parameter Set: ExtraKick
Index: 900000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER102399796
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE11
Description:
Directory: c:\blog\rte11.log
Machine: n30
Parameter Set: ExtraKick
Index: 1000000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER1122682203
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE12
Description:
Directory: c:\blog\rte12.log
Machine: n30
Parameter Set: ExtraKick
Index: 1100000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER1222731546
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE13
Description:
Directory: c:\blog\rte13.log
Machine: n45
Parameter Set: ExtraKick
Index: 1200000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER13-1439076421
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE14
Description:
Directory: c:\blog\rte14.log
Machine: n45
Parameter Set: ExtraKick
Index: 1300000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER14-1438943656
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE15
Description:
Directory: c:\blog\rte15.log
Machine: n46
Parameter Set: ExtraKick
Index: 1400000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER15-1438852265
Connect Rate: 10000
Start Rate: 10000
Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE16
Description:
Directory: c:\blog\rte16.log
Machine: n46
Parameter Set: ExtraKick
Index: 1500000000
Seed: 4678
Configured Users: 8400
Pipe Name: DRIVER16-1438790906
Connect Rate: 10000
Start Rate: 10000

Max. Concurrency: 8000
Concurrency Rate: 10000
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Number of User groups: 16

Driver Engine: RTE1
IIS Server: cr25
SQL Server: genghis
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1 - 842
w_id Min Warehouse: 1
w_id Max Warehouse: 13456
Scale: Normal
User Count: 8420
District id: 1
Scale Down: No

Driver Engine: RTE2
IIS Server: cr25
SQL Server: genghis
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 843 - 1684
w_id Min Warehouse: 1
w_id Max Warehouse: 13456
Scale: Normal
User Count: 8420
District id: 1
Scale Down: No

Driver Engine: RTE3
IIS Server: cr26
SQL Server: genghis
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 1685 - 2526
w_id Min Warehouse: 1
w_id Max Warehouse: 13456
Scale: Normal
User Count: 8420
District id: 1
Scale Down: No

Driver Engine: RTE4
IIS Server: cr26
SQL Server: genghis
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 2527 - 3368
w_id Min Warehouse: 1
w_id Max Warehouse: 13456
Scale: Normal
User Count: 8420
District id: 1
Scale Down: No

Driver Engine: RTE5
 IIS Server: cr27
 SQL Server: genghis
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 3369 - 4210
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8420
 District id: 1
 Scale Down: No

Driver Engine: RTE6
 IIS Server: cr27
 SQL Server: genghis
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 4211 - 5052
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8420
 District id: 1
 Scale Down: No

Driver Engine: RTE7
 IIS Server: cr28
 SQL Server: genghis
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 5053 - 5894
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8420
 District id: 1
 Scale Down: No

Driver Engine: RTE8
 IIS Server: cr28
 SQL Server: genghis
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 5895 - 6736
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8420
 District id: 1
 Scale Down: No

Driver Engine: RTE9
 IIS Server: cr29
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML

w_id Range: 6737 - 7576
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE10
 IIS Server: cr29
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 7577 - 8416
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE11
 IIS Server: cr30
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 8417 - 9256
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE12
 IIS Server: cr30
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 9257 - 10096
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE13
 IIS Server: cr5
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 10097 - 10936
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE14
 IIS Server: cr5
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 10937 - 11776
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE15
 IIS Server: cr6
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 11777 - 12616
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Driver Engine: RTE16
 IIS Server: cr6
 SQL Server: genghisb
 Database: tpcc
 User: sa
 Protocol: HTML
 w_id Range: 12617 - 13456
 w_id Min Warehouse: 1
 w_id Max Warehouse: 13456
 Scale: Normal
 User Count: 8400
 District id: 1
 Scale Down: No

Number of Parameter Sets: 66

Key	~Default Default Parameter Set				
	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	10.00	
12.05	18.01		0.10	5.00	0.10
			Payment	10.00	
12.05	3.01		0.10	5.00	0.10
			Delivery	1.00	
5.05	2.01		0.10	5.00	0.10
			Stock Level	1.00	
5.05	2.01		0.10	20.00	0.10
			Order Status	1.00	
10.05	2.01		0.10	5.00	0.10

Tuned Distribution						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
12.05	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
12.05	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
5.05	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
5.05	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
10.05	2.01	0.10	0.10	5.00	0.10	
			No Think			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	10.00		
0.00	0.00	0.00	0.00	5.00	0.00	
			Payment	10.00		
0.00	0.00	0.00	0.00	5.00	0.00	
			Delivery	1.00		
0.00	0.00	0.00	0.00	5.00	0.00	
			Stock Level	1.00		
0.00	0.00	0.00	0.00	20.00	0.00	
			Order Status	1.00		
0.00	0.00	0.00	0.00	5.00	0.00	
			95%			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
13.00	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
13.00	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
6.00	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
6.00	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
11.00	2.01	0.10	0.10	5.00	0.10	
			90%			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
16.00	18.01	0.10	0.10	5.00	0.10	
			Payment	43.05		
16.00	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.04		
9.00	2.01	0.10	0.10	5.00	0.10	

9.00	2.01		Stock Level	4.04		
			0.10	20.00	0.10	
			Order Status	4.04		
14.00	2.01		0.10	5.00	0.10	
			3.0			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
36.15	0.00	0.10	0.10	5.00	0.10	
			Payment	43.10		
36.15	0.00	0.10	0.10	5.00	0.10	
			Delivery	4.05		
15.15	0.00	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
15.15	0.00	0.10	0.10	20.00	0.10	
			Order Status	4.05		
30.15	0.00	0.10	0.10	5.00	0.10	
			4.0			
			4.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
48.20	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
48.20	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
20.20	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
20.20	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
40.20	2.01	0.10	0.10	5.00	0.10	
			3.8			
			3.8 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
45.70	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
45.70	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
19.10	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
19.10	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
38.10	2.01	0.10	0.10	5.00	0.10	
			3.6			
			3.6 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	

43.30	18.01		New Order	44.75		
			0.10	5.00	0.10	
			Payment	43.10		
43.30	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
18.10	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
18.10	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
36.18	2.01	0.10	0.10	5.00	0.10	
			3.4			
			3.4 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
40.90	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
40.90	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
17.10	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
17.10	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
17.10	2.01	0.10	0.10	5.00	0.10	
			3.2			
			3.2 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
38.50	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
38.50	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
16.10	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
16.10	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
32.10	2.01	0.10	0.10	5.00	0.10	
			2.8			
			2.8 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.75		
33.74	18.01	0.10	0.10	5.00	0.10	
			Payment	43.10		
33.74	3.01	0.10	0.10	5.00	0.10	
			Delivery	4.05		
14.14	2.01	0.10	0.10	5.00	0.10	
			Stock Level	4.05		
14.14	2.01	0.10	0.10	20.00	0.10	
			Order Status	4.05		
28.14	2.01	0.10	0.10	5.00	0.10	
			2.6			

2.6 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
31.30	18.01		0.10	5.00	0.10
			Payment	43.10	
31.30	3.01		0.10	5.00	0.10
			Delivery	4.05	
13.10	2.01		0.10	5.00	0.10
			Stock Level	4.05	
13.10	2.01		0.10	20.00	0.10
			Order Status	4.05	
26.10	2.01		0.10	5.00	0.10
2.4					
2.4 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
28.90	18.01		0.10	5.00	0.10
			Payment	43.10	
28.90	3.01		0.10	5.00	0.10
			Delivery	4.05	
12.10	2.01		0.10	5.00	0.10
			Stock Level	4.05	
12.10	2.01		0.10	20.00	0.10
			Order Status	4.05	
24.10	2.01		0.10	5.00	0.10
2.2					
2.2 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
28.90	18.01		0.10	5.00	0.10
			Payment	43.10	
28.90	3.01		0.10	5.00	0.10
			Delivery	4.05	
12.10	2.01		0.10	5.00	0.10
			Stock Level	4.05	
12.10	2.01		0.10	20.00	0.10
			Order Status	4.05	
24.12	2.01		0.10	5.00	0.10
2.0					
2.0 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
24.10	18.01		0.10	5.00	0.10
			Payment	43.10	
24.10	3.01		0.10	5.00	0.10
			Delivery	4.05	
10.10	2.01		0.10	5.00	0.10

10.10	2.01		Stock Level	4.05	
			0.10	20.00	0.10
			Order Status	4.05	
20.10	2.01		0.10	5.00	0.10
			5.0		
			5.0 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
60.25	18.01		0.10	5.00	0.10
			Payment	43.10	
60.25	3.01		0.10	5.00	0.10
			Delivery	4.05	
25.25	2.01		0.10	5.00	0.10
			Stock Level	4.05	
25.25	2.01		0.10	20.00	0.10
			Order Status	4.05	
50.25	2.01		0.10	5.00	0.10
			4.5		
			4.5 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
54.20	18.01		0.10	5.00	0.10
			Payment	43.10	
54.20	3.01		0.10	5.00	0.10
			Delivery	4.05	
22.70	2.01		0.10	5.00	0.10
			Stock Level	4.05	
22.70	2.01		0.10	20.00	0.10
			Order Status	4.05	
45.20	2.01		0.10	5.00	0.10
			3.5		
			3.5 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
42.10	18.01		0.10	5.00	0.10
			Payment	43.10	
42.10	3.01		0.10	5.00	0.10
			Delivery	4.05	
17.60	2.01		0.10	5.00	0.10
			Stock Level	4.05	
17.60	2.01		0.10	20.00	0.10
			Order Status	4.05	
35.10	2.01		0.10	5.00	0.10
			1.8		
			1.8 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time

21.60	18.01		New Order	44.75	
			0.10	5.00	0.10
			Payment	43.10	
21.60	3.01		0.10	5.00	0.10
			Delivery	4.05	
9.09	2.01		0.10	5.00	0.10
			Stock Level	4.05	
9.09	2.01		0.10	20.00	0.10
			Order Status	4.05	
18.09	2.01		0.10	5.00	0.10
			4.2		
			4.2 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
54.20	18.01		0.10	5.00	0.10
			Payment	43.10	
54.20	3.01		0.10	5.00	0.10
			Delivery	4.05	
22.70	2.01		0.10	5.00	0.10
			Stock Level	4.05	
22.70	2.01		0.10	20.00	0.10
			Order Status	4.05	
45.20	2.01		0.10	5.00	0.10
			1.6		
			1.6 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
19.20	18.01		0.10	5.00	0.10
			Payment	43.10	
19.20	3.01		0.10	5.00	0.10
			Delivery	4.05	
8.08	2.01		0.10	5.00	0.10
			Stock Level	4.05	
8.08	2.01		0.10	20.00	0.10
			Order Status	4.05	
16.08	2.01		0.10	5.00	0.10
			1.4		
			1.4 tt		
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
16.87	18.01		0.10	5.00	0.10
			Payment	43.10	
16.87	3.01		0.10	5.00	0.10
			Delivery	4.05	
7.07	2.01		0.10	5.00	0.10
			Stock Level	4.05	
7.07	2.01		0.10	20.00	0.10
			Order Status	4.05	
14.07	2.01		0.10	5.00	0.10
			1.2		

1.2 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
14.46	18.01		0.10	5.00	0.10
			Payment	43.05	
14.46	3.01		0.10	5.00	0.10
			Delivery	4.04	
6.06	2.01		0.10	5.00	0.10
			Stock Level	4.04	
6.06	2.01		0.10	20.00	0.10
			Order Status	4.04	
12.06	2.01		0.10	5.00	0.10
3.5					
3.5 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
42.10	18.01		0.10	5.00	0.10
			Payment	43.10	
42.10	3.01		0.10	5.00	0.10
			Delivery	4.05	
17.60	2.01		0.10	5.00	0.10
			Stock Level	4.05	
17.60	2.01		0.10	20.00	0.10
			Order Status	4.05	
35.10	2.01		0.10	5.00	0.10
1.9					
1.9 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
22.89	18.01		0.10	5.00	0.10
			Payment	43.10	
22.89	3.01		0.10	5.00	0.10
			Delivery	4.05	
9.59	2.01		0.10	5.00	0.10
			Stock Level	4.05	
9.59	2.01		0.10	20.00	0.10
			Order Status	4.05	
19.09	2.01		0.10	5.00	0.10
1.1					
1.1 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
13.25	18.01		0.10	5.00	0.10
			Payment	43.05	
13.25	3.01		0.10	5.00	0.10
			Delivery	4.04	
5.55	2.01		0.10	5.00	0.10

5.55	2.01		Stock Level	4.04	
			0.10	20.00	0.10
			Order Status	4.04	
11.05	2.01		0.10	5.00	0.10
1.05 better					
1.05 tt better					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.92	
12.65	18.01		0.10	5.00	0.10
			Payment	43.01	
12.65	3.01		0.10	5.00	0.10
			Delivery	4.02	
5.30	2.01		0.10	5.00	0.10
			Stock Level	4.03	
5.30	2.01		0.10	20.00	0.10
			Order Status	4.02	
10.55	2.01		0.10	5.00	0.10
1.09					
1.09 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
13.13	18.01		0.10	5.00	0.10
			Payment	43.05	
13.13	3.01		0.10	5.00	0.10
			Delivery	4.04	
5.50	2.01		0.10	5.00	0.10
			Stock Level	4.04	
5.50	2.01		0.10	20.00	0.10
			Order Status	4.04	
10.95	2.01		0.10	5.00	0.10
1.08					
1.08 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
13.01	18.01		0.10	5.00	0.10
			Payment	43.05	
13.01	3.01		0.10	5.00	0.10
			Delivery	4.04	
5.45	2.01		0.10	5.00	0.10
			Stock Level	4.04	
5.45	2.01		0.10	20.00	0.10
			Order Status	4.04	
10.85	2.01		0.10	5.00	0.10
1.07					
1.07 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time

12.89	18.01		New Order	44.83	
			0.10	5.00	0.10
			Payment	43.05	
12.89	3.01		0.10	5.00	0.10
			Delivery	4.04	
5.40	2.01		0.10	5.00	0.10
			Stock Level	4.04	
5.40	2.01		0.10	20.00	0.10
			Order Status	4.04	
10.75	2.01		0.10	5.00	0.10
1.06					
1.06 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
12.77	18.01		0.10	5.00	0.10
			Payment	43.05	
12.77	3.01		0.10	5.00	0.10
			Delivery	4.04	
5.35	2.01		0.10	5.00	0.10
			Stock Level	4.04	
5.35	2.01		0.10	20.00	0.10
			Order Status	4.04	
10.65	2.01		0.10	5.00	0.10
1.15					
1.15 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.75	
13.85	18.01		0.10	5.00	0.10
			Payment	43.10	
13.85	3.01		0.10	5.00	0.10
			Delivery	4.05	
5.80	2.01		0.10	5.00	0.10
			Stock Level	4.05	
5.80	2.01		0.10	20.00	0.10
			Order Status	4.05	
11.55	2.01		0.10	5.00	0.10
1.25					
1.25 tt					
Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
			New Order	44.83	
15.06	18.01		0.10	5.00	0.10
			Payment	43.05	
15.06	3.01		0.10	5.00	0.10
			Delivery	4.04	
6.31	2.01		0.10	5.00	0.10
			Stock Level	4.04	
6.31	2.01		0.10	20.00	0.10
			Order Status	4.04	
12.56	2.01		0.10	5.00	0.10
1.3					

```

1.3 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
15.66 18.01 New Order 44.83
0.10 5.00 0.10
15.66 3.01 Payment 43.05
0.10 5.00 0.10
6.56 2.01 Delivery 4.04
0.10 5.00 0.10
6.56 2.01 Stock Level 4.04
0.10 20.00 0.10
13.06 2.01 Order Status 4.04
0.10 5.00 0.10

1.12
1.12 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
13.49 18.01 New Order 44.75
0.10 5.00 0.10
13.49 3.01 Payment 43.10
0.10 5.00 0.10
5.65 2.01 Delivery 4.05
0.10 5.00 0.10
5.65 2.01 Stock Level 4.05
0.10 20.00 0.10
11.25 2.01 Order Status 4.05
0.10 5.00 0.10

1.18
1.18 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
14.21 18.01 New Order 44.75
0.10 5.00 0.10
14.21 3.01 Payment 43.10
0.10 5.00 0.10
5.95 2.01 Delivery 4.05
0.10 5.00 0.10
5.95 2.01 Stock Level 4.05
0.10 20.00 0.10
11.85 2.01 Order Status 4.05
0.10 5.00 0.10

1.22
1.22 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
14.70 18.01 New Order 44.75
0.10 5.00 0.10
14.70 3.01 Payment 43.10
0.10 5.00 0.10
6.16 2.01 Delivery 4.05
0.10 5.00 0.10

```

```

Stock Level 4.05
6.16 2.01 0.10 20.00 0.10
Order Status 4.05
12.26 2.01 0.10 5.00 0.10

1.28
1.28 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
15.42 18.01 New Order 44.75
0.10 5.00 0.10
15.42 3.01 Payment 43.10
0.10 5.00 0.10
6.46 2.01 Delivery 4.05
0.10 5.00 0.10
6.46 2.01 Stock Level 4.05
0.10 20.00 0.10
12.86 2.01 Order Status 4.05
0.10 5.00 0.10

1.04
1.04 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.53 18.01 New Order 44.83
0.10 5.00 0.10
12.53 3.01 Payment 43.05
0.10 5.00 0.10
5.25 2.01 Delivery 4.04
0.10 5.00 0.10
5.25 2.01 Stock Level 4.04
0.10 20.00 0.10
10.45 2.01 Order Status 4.04
0.10 5.00 0.10

1.03
1.03 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.41 18.01 New Order 44.83
0.10 5.00 0.10
12.41 3.01 Payment 43.05
0.10 5.00 0.10
5.20 2.01 Delivery 4.04
0.10 5.00 0.10
5.20 2.01 Stock Level 4.04
0.10 20.00 0.10
10.35 2.01 Order Status 4.04
0.10 5.00 0.10

1.02
1.02 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time

```

```

New Order 44.83
12.29 18.01 0.10 5.00 0.10
Payment 43.05
12.29 3.01 0.10 5.00 0.10
Delivery 4.04
5.15 2.01 0.10 5.00 0.10
Stock Level 4.04
5.15 2.01 0.10 20.00 0.10
Order Status 4.04
10.25 2.01 0.10 5.00 0.10

1.01
1.01 tt
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.17 18.01 New Order 44.83
0.10 5.00 0.10
12.17 3.01 Payment 43.05
0.10 5.00 0.10
5.10 2.01 Delivery 4.04
0.10 5.00 0.10
5.10 2.01 Stock Level 4.04
0.10 20.00 0.10
10.15 2.01 Order Status 4.04
0.10 5.00 0.10

1.005_best
1.005 tt best
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.11 18.01 New Order 44.88
0.10 5.00 0.10
12.11 3.01 Payment 43.02
0.10 5.00 0.10
5.07 2.01 Delivery 4.03
0.10 5.00 0.10
5.07 2.01 Stock Level 4.03
0.10 20.00 0.10
10.10 2.01 Order Status 4.03
0.10 5.00 0.10

1.001_best
1.001 tt best
Key RT RT Menu Txn Think
Time Delay Fence Delay Weight Time
12.06 18.01 New Order 44.91
0.10 5.00 0.10
12.06 3.01 Payment 43.04
0.10 5.00 0.10
5.06 2.01 Delivery 4.01
0.10 5.00 0.10
5.06 2.01 Stock Level 4.02
0.10 20.00 0.10
10.06 2.01 Order Status 4.02
0.10 5.00 0.10

1.03 better

```

1.03 tt more aggressive						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.92		
12.41	18.01		0.10	5.00	0.10	
			Payment	43.01		
12.41	3.01		0.10	5.00	0.10	
			Delivery	4.02		
5.20	2.01		0.10	5.00	0.10	
			Stock Level	4.03		
5.20	2.01		0.10	20.00	0.10	
			Order Status	4.02		
10.35	2.01		0.10	5.00	0.10	
1.005 better						
1.005 tt more aggressive						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.90		
12.11	18.01		0.10	5.00	0.10	
			Payment	43.05		
12.11	3.01		0.10	5.00	0.10	
			Delivery	4.01		
5.07	2.01		0.10	5.00	0.10	
			Stock Level	4.03		
5.07	2.01		0.10	20.00	0.10	
			Order Status	4.01		
10.10	2.01		0.10	5.00	0.10	
1.02 better						
1.02 tt more aggressive						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.92		
12.29	18.01		0.10	5.00	0.10	
			Payment	43.01		
12.29	3.01		0.10	5.00	0.10	
			Delivery	4.02		
5.15	2.01		0.10	5.00	0.10	
			Stock Level	4.03		
5.15	2.01		0.10	20.00	0.10	
			Order Status	4.02		
10.25	2.01		0.10	5.00	0.10	
1.01 best						
1.01 tt best						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.90		
12.17	18.01		0.10	5.00	0.10	
			Payment	43.05		
12.17	3.01		0.10	5.00	0.10	
			Delivery	4.01		
5.10	2.01		0.10	5.00	0.10	

5.10	2.01		Stock Level	4.03		
			0.10	20.00	0.10	
			Order Status	4.01		
10.15	2.01		0.10	5.00	0.10	
			1.02 best			
			1.02 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.96		
12.29	18.01		0.00	5.00	0.00	
			Payment	43.00		
12.29	3.01		0.00	5.00	0.00	
			Delivery	4.00		
5.15	2.01		0.00	5.00	0.00	
			Stock Level	4.03		
5.15	2.01		0.00	20.00	0.00	
			Order Status	4.01		
10.25	2.01		0.00	5.00	0.00	
			1.03 best			
			1.03 tt best			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.96		
12.41	18.01		0.10	5.00	0.10	
			Payment	43.01		
12.41	3.01		0.10	5.00	0.10	
			Delivery	4.01		
5.20	2.01		0.10	5.00	0.10	
			Stock Level	4.01		
5.20	2.01		0.10	20.00	0.10	
			Order Status	4.01		
10.35	2.01		0.10	5.00	0.10	
			5.5			
			5.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
66.28	18.01		0.10	5.00	0.10	
			Payment	43.05		
66.28	3.01		0.10	5.00	0.10	
			Delivery	4.04		
27.77	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
27.77	2.01		0.10	20.00	0.10	
			Order Status	4.04		
55.27	2.01		0.10	5.00	0.10	
			6.0			
			6.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	

72.30	18.01		New Order	44.83		
			0.10	5.00	0.10	
			Payment	43.05		
72.30	3.01		0.10	5.00	0.10	
			Delivery	4.04		
30.30	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
30.30	2.01		0.10	20.00	0.10	
			Order Status	4.04		
60.30	2.01		0.10	5.00	0.10	
			6.5			
			6.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
79.53	18.01		0.10	5.00	0.10	
			Payment	43.05		
79.53	3.01		0.10	5.00	0.10	
			Delivery	4.04		
33.33	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
33.33	2.01		0.10	20.00	0.10	
			Order Status	4.04		
66.33	2.01		0.10	5.00	0.10	
			7.0			
			7.0 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
84.35	18.01		0.10	5.00	0.10	
			Payment	43.05		
84.35	3.01		0.10	5.00	0.10	
			Delivery	4.04		
35.35	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
35.35	2.01		0.10	20.00	0.10	
			Order Status	4.04		
70.35	2.01		0.10	5.00	0.10	
			7.5			
			7.5 tt			
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	Weight	Time	
			New Order	44.83		
90.38	18.01		0.10	5.00	0.10	
			Payment	43.05		
90.38	3.01		0.10	5.00	0.10	
			Delivery	4.04		
37.88	2.01		0.10	5.00	0.10	
			Stock Level	4.04		
37.88	2.01		0.10	20.00	0.10	
			Order Status	4.04		
75.38	2.01		0.10	5.00	0.10	
			8.0			

Key	RT	RT	Menu	Txn	Think
8.0 tt					
Time	Delay	Fence	Delay	Weight	Time
96.40	18.01		New Order	44.83	
			0.10	5.00	0.10
96.40	3.01		Payment	43.05	
			0.10	5.00	0.10
40.40	2.01		Delivery	4.04	
			0.10	5.00	0.10
40.40	2.01		Stock Level	4.04	
			0.10	20.00	0.10
80.40	2.01		Order Status	4.04	
			0.10	5.00	0.10

Key	RT	RT	Menu	Txn	Think
8.5					
8.5 tt					
Time	Delay	Fence	Delay	Weight	Time
102.43	18.01		New Order	44.83	
			0.10	5.00	0.10
192.43	3.01		Payment	43.05	
			0.10	5.00	0.10
42.92	2.01		Delivery	4.04	
			0.10	5.00	0.10
42.92	2.01		Stock Level	4.04	
			0.10	20.00	0.10
85.42	2.01		Order Status	4.04	
			0.10	5.00	0.10

Key	RT	RT	Menu	Txn	Think
9.0					
9.0 tt					
Time	Delay	Fence	Delay	Weight	Time
108.45	18.01		New Order	44.83	
			0.10	5.00	0.10
108.45	3.01		Payment	43.05	
			0.10	5.00	0.10
45.45	2.01		Delivery	4.04	
			0.10	5.00	0.10
45.45	2.01		Stock Level	4.04	
			0.10	20.00	0.10
90.45	2.01		Order Status	4.04	
			0.10	5.00	0.10

Key	RT	RT	Menu	Txn	Think
9.5					
9.5 tt					
Time	Delay	Fence	Delay	Weight	Time
114.47	18.01		New Order	44.83	
			0.10	5.00	0.10
114.47	3.01		Payment	43.05	
			0.10	5.00	0.10
47.98	2.01		Delivery	4.04	
			0.10	5.00	0.10

47.98	2.01		Stock Level	4.04	
			0.10	20.00	0.10
95.47	2.01		Order Status	4.04	
			0.10	5.00	0.10
10					
10 tt					

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
120.50	18.01		New Order	44.83	
			0.10	5.00	0.10
120.50	3.01		Payment	43.05	
			0.10	5.00	0.10
50.50	2.01		Delivery	4.04	
			0.10	5.00	0.10
50.50	2.01		Stock Level	4.04	
			0.10	20.00	0.10
100.50	2.01		Order Status	4.04	
			0.10	5.00	0.10

1.01 better
1.01 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.17	18.01		New Order	44.92	
			0.10	5.00	0.10
12.17	3.01		Payment	43.01	
			0.10	5.00	0.10
5.10	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.10	2.01		Stock Level	4.03	
			0.10	20.00	0.10
10.15	2.01		Order Status	4.02	
			0.10	5.00	0.10

1.001 better
1.001 more aggressive

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.06	18.01		New Order	44.92	
			0.10	5.00	0.10
12.06	3.01		Payment	43.01	
			0.10	5.00	0.10
5.06	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.06	2.01		Stock Level	4.03	
			0.10	20.00	0.10
10.06	2.01		Order Status	4.02	
			0.10	5.00	0.10

FullSpeed
1.000 tt

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time

12.05	18.01		New Order	44.91	
			0.10	5.00	0.10
12.05	3.01		Payment	43.01	
			0.10	5.00	0.10
5.05	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.05	2.01		Stock Level	4.03	
			0.10	20.00	0.10
10.05	2.01		Order Status	4.03	
			0.10	5.00	0.10

1.003 best
1.003 best

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.09	18.01		New Order	44.90	
			0.10	5.00	0.10
12.09	3.01		Payment	43.05	
			0.10	5.00	0.10
5.07	2.01		Delivery	4.01	
			0.10	5.00	0.10
5.07	2.01		Stock Level	4.03	
			0.10	20.00	0.10
10.08	2.01		Order Status	4.01	
			0.10	5.00	0.10

ExtraKick
FullSpeedKick

Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	Weight	Time
12.03	18.01		New Order	44.92	
			0.10	5.00	0.10
12.03	3.01		Payment	43.01	
			0.10	5.00	0.10
5.03	2.01		Delivery	4.02	
			0.10	5.00	0.10
5.03	2.01		Stock Level	4.02	
			0.10	20.00	0.10
10.03	2.01		Order Status	4.03	
			0.10	5.00	0.10

Internet Information Server Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters]
"ListenBackLog"=dword:00000019
```

```
"DispatchEntries"=hex(7):4c,00,44,00,41,00,50,00,53,0
0,56,00,43,00,00,00,00,00
"PoolThreadLimit"=dword:000007fe
"ThreadTimeout"=dword:00015180
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\InetInfo\Performance]
"Library"="infcctrs.dll"
"Open"="OpenINFOPerformanceData"
"Close"="CloseINFOPerformanceData"
"Collect"="CollectINFOPerformanceData"
"Last Counter"=dword:00000842
"Last Help"=dword:00000843
"First Counter"=dword:00000802
"First Help"=dword:00000803
"Library Validation
Code"=hex:de,d0,18,8b,93,a2,c5,01,10,25,00,00,00,00,0
0,00
"WbemAdapFileTime"=hex:00,a0,38,ed,84,36,c3,01
"WbemAdapFileSize"=dword:00002510
"WbemAdapStatus"=dword:00000000
```

World Wide Web Service Registry Parameters

Windows Registry Editor Version 5.00

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC]
"Type"=dword:00000020
"Start"=dword:00000002
"ErrorControl"=dword:00000001
"ImagePath"=hex(2):43,00,3a,00,5c,00,57,00,49,00,4e,0
0,4e,00,54,00,5c,00,53,00,\
```

```
79,00,73,00,74,00,65,00,6d,00,33,00,32,00,5c,00,69,00
,6e,00,65,00,74,00,73,\
```

```
00,72,00,76,00,5c,00,69,00,6e,00,65,00,74,00,69,00,6e
,00,66,00,6f,00,2e,00,\
65,00,78,00,65,00,00,00
```

```
"DisplayName"="World Wide Web Publishing Service"
"DependOnService"=hex(7):49,00,49,00,53,00,41,00,44,0
0,4d,00,49,00,4e,00,00,00,\
00,00
```

```
"DependOnGroup"=hex(7):00,00
"ObjectName"="LocalSystem"
"Description"="Provides Web connectivity and
administration through the Internet Information
Services snap-in."
"FailureActions"=hex:ff,ff,ff,ff,80,3a,0e,00,90,3a,0e
,00,03,00,00,00,98,3a,0e,\
```

```
00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00,00
,00,00,00,00,00,00,00
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\ASP]
```

```
"NOTE"="This is for backward compatibility only."
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\ASP\Parameters]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters]
"MajorVersion"=dword:00000005
"MinorVersion"=dword:00000000
"InstallPath"="C:\\WINNT\\System32\\inetrv"
"CertMapList"="C:\\WINNT\\System32\\inetrv\\iisrmap
.dll"
"AccessDeniedMessage"="Error: Access is Denied."
"Filter DLLs"=""
"LogFileDirectory"="C:\\WINNT\\System32\\LogFiles"
"AcceptExOutstanding"=dword:00000028
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters\ADCLaunch]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters\ADCLaunch\AdvancedDataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters\ADCLaunch\RDSServer.DataFactory]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters\Script Map]
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Parameters\Virtual Roots]
"/"="c:\\inetpub\\wwwroot,,207"
"/Scripts"="c:\\inetpub\\scripts,,1"
"/IISHelp"="c:\\winnt\\help\\iishelp,,1"
"/IISAdmin"="C:\\WINNT\\System32\\inetrv\\iisadmin,,
1"
"/IISamples"="c:\\inetpub\\iissamples,,1"
"/MSADC"="c:\\program files\\common
files\\system\\msadc,,1"
"/_vti_bin"="C:\\Program Files\\Common
Files\\Microsoft Shared\\Web Server
Extensions\\40\\isapi,,1"
"/Printers"="C:\\WINNT\\web\\printers,,201"
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Performance]
"Library"="w3ctrts.dll"
"Open"="OpenW3PerformanceData"
"Close"="CloseW3PerformanceData"
"Collect"="CollectW3PerformanceData"
"Last Counter"=dword:000008e6
"Last Help"=dword:000008e7
"First Counter"=dword:00000844
"First Help"=dword:00000845
"Library Validation
Code"=hex:52,4c,7b,a6,7a,5b,c2,01,10,1d,00,00,00,00,0
0,00
"WbemAdapFileTime"=hex:00,a0,38,ed,84,36,c3,01
"WbemAdapFileSize"=dword:00001d10
"WbemAdapStatus"=dword:00000000
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Security]
```

```
"Security"=hex:01,00,14,80,a0,00,00,00,ac,00,00,00,14
,00,00,00,30,00,00,00,02,\
```

```
00,1c,00,01,00,00,00,02,80,14,00,ff,01,0f,00,01,01,00
,00,00,00,00,01,00,00,\
```

```
00,00,02,00,70,00,04,00,00,00,00,00,18,00,fd,01,02,00
,01,01,00,00,00,00,00,\
```

```
05,12,00,00,00,74,00,6f,00,00,00,1c,00,ff,01,0f,00,01
,02,00,00,00,00,00,05,\
```

```
20,00,00,00,20,02,00,00,72,00,73,00,00,00,18,00,8d,01
,02,00,01,01,00,00,00,\
```

```
00,00,05,0b,00,00,00,20,02,00,00,00,00,1c,00,fd,01,02
,00,01,02,00,00,00,00,\
```

```
00,05,20,00,00,00,23,02,00,00,72,00,73,00,01,01,00,00
,00,00,00,05,12,00,00,\
00,01,01,00,00,00,00,00,05,12,00,00,00
```

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
W3SVC\Enum]
"0"="Root\\LEGACY_W3SVC\\0000"
"Count"=dword:00000001
"NextInstance"=dword:00000001
```

TPCC Application Registry Parameters

REGEDIT4

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC]
"Path"="C:\\inetpub\\wwwroot\\"
"NumberOfDeliveryThreads"=dword:00000006
"MaxConnections"=dword:00007530
"MaxPendingDeliveries"=dword:000007d0
"DB_Protocol"="ODBC"
"TxnMonitor"="COM"
"DbName"="tpcc"
"DbUser"="sa"
"DbPassword"=""
"COM_SinglePool"="YES"
"CallNoDuplicatesNewOrder"=dword:00000001
"yyDbServer"="bobcat"
"DbServer"="genghis"
"ConnectDelay"=dword:00000001
```

Disk Controller Driver Registry Parameters

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb
 Class Name: <NO CLASS>
 Last Write Time: 5/19/2006 - 8:39 AM

Value 0
 Name: Type
 Type: REG_DWORD
 Data: 0x1

Value 1
 Name: Start
 Type: REG_DWORD
 Data: 0

Value 2
 Name: ErrorControl
 Type: REG_DWORD
 Data: 0x1

Value 3
 Name: Tag
 Type: REG_DWORD
 Data: 0x102

Value 4
 Name: ImagePath
 Type: REG_EXPAND_SZ
 Data: system32\DRIVERS\hpqcissb.sys

Value 5
 Name: DisplayName
 Type: REG_SZ
 Data: Smart Array Controllers Non-Miniport Bus Driver

Value 6
 Name: Group
 Type: REG_SZ
 Data: port

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters
 Class Name: <NO CLASS>
 Last Write Time: 5/16/2006 - 8:04 PM

Value 0
 Name: CompletionMode
 Type: REG_DWORD
 Data: 0x2

Value 1
 Name: CosTimerRate
 Type: REG_DWORD
 Data: 0x2

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller6
 Class Name: <NO CLASS>
 Last Write Time: 5/12/2006 - 7:44 PM

Value 0
 Name: CompletionMode
 Type: REG_DWORD
 Data: 0x1

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security
 Class Name: <NO CLASS>
 Last Write Time: 1/5/2006 - 1:07 PM

Value 0
 Name: Security
 Type: REG_BINARY
 Data:
 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
 00 00 00Ä.....
 00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
 80 14 00 0.....
 00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
 00 00 00 ý.....
 00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
 01 02 00ý...
 00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00
 00 18 00
 00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
 00 00 00 ý.....
 00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
 01 00 00
 00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
 01 02 00
 00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
 00 14 00
 00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
 00 00 00
 000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
 00 00 05ý.....
 000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
 00 00 05 ...#.....
 000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
 00 00 00
 00 00 00

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Enum
 Class Name: <NO CLASS>
 Last Write Time: 5/19/2006 - 8:39 AM

Value 0
 Name: 0
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\6&1a6a5b31&0&00000010

Value 1

Name: Count
 Type: REG_DWORD
 Data: 0x7

Value 2
 Name: NextInstance
 Type: REG_DWORD
 Data: 0x7

Value 3
 Name: 1
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\6&1225caad&0&00080010

Value 4
 Name: 2
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&29ee7c4d&0&0038

Value 5
 Name: 3
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&21341818&0&0030

Value 6
 Name: 4
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&3526ff9f&0&0028

Value 7
 Name: 5
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&24699cd&0&0020

Value 8
 Name: 6
 Type: REG_SZ
 Data:
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&3028ba6e&0&0018

HP NC373i Driver Parameters (Port 1)

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0153

Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 3:42 PM

Value 0
 Name: create_pdo_flag
 Type: REG_SZ
 Data: 4

Value 1
 Name: mtu
 Type: REG_SZ
 Data: 1500

Value 2
 Name: req_medium
 Type: REG_SZ
 Data: 0

Value 3
 Name: InfPath
 Type: REG_SZ
 Data: oem31.inf

Value 4
 Name: InfSection
 Type: REG_SZ
 Data: NC373i_inst_amd64

Value 5
 Name: ProviderName
 Type: REG_SZ
 Data: Hewlett-Packard Company

Value 6
 Name: DriverDateData
 Type: REG_BINARY
 Data: 00 c0 59 88 d6 64 c6 01 -
 .ÅY.ôd&.

Value 7
 Name: DriverDate
 Type: REG_SZ
 Data: 4-21-2006

Value 8
 Name: DriverVersion
 Type: REG_SZ
 Data: 2.6.17.0

Value 9
 Name: MatchingDeviceId
 Type: REG_SZ
 Data: pci\ven_14e4&dev_164c&subsys_7038103c

Value 10
 Name: DriverDesc
 Type: REG_SZ
 Data: HP NC373i Virtual Bus Device

Value 11
 Name: target_ips
 Type: REG_SZ

Data: 2000

Value 12
 Name: optimize_ips
 Type: REG_SZ
 Data: 0

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
 lass\{4D36E97D-E325-11CE-BFCL-08002BE10318}\0153\ndi
 Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 12:10 PM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
 lass\{4D36E97D-E325-11CE-BFCL-08002BE10318}\0153\ndi\params
 Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 12:10 PM

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
 lass\{4D36E97D-E325-11CE-BFCL-08002BE10318}\0153\ndi\params\mtu
 Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 12:10 PM

Value 0
 Name: paramdesc
 Type: REG_SZ
 Data: Maximum Transfer Unit

Value 1
 Name: default
 Type: REG_SZ
 Data: 1500

Value 2
 Name: type
 Type: REG_SZ
 Data: dword

Value 3
 Name: min
 Type: REG_SZ
 Data: 1500

Value 4
 Name: max
 Type: REG_SZ
 Data: 9000

Value 5
 Name: step
 Type: REG_SZ
 Data: 500

Value 6
 Name: base
 Type: REG_SZ
 Data: 10

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
 lass\{4D36E97D-E325-11CE-BFCL-08002BE10318}\0153\ndi\params\req_medium
 Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 12:10 PM

Value 0
 Name: paramDesc
 Type: REG_SZ
 Data: Speed & Duplex

Value 1
 Name: default
 Type: REG_SZ
 Data: 0

Value 2
 Name: type
 Type: REG_SZ
 Data: enum

Key Name:
 HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\C
 lass\{4D36E97D-E325-11CE-BFCL-08002BE10318}\0153\ndi\params\req_medium\enum
 Class Name: <NO CLASS>
 Last Write Time: 5/17/2006 - 12:10 PM

Value 0
 Name: 0
 Type: REG_SZ
 Data: Auto

Value 1
 Name: 65794
 Type: REG_SZ
 Data: 10 Mb Half

Value 2
 Name: 258
 Type: REG_SZ
 Data: 10 Mb Full

Value 3
 Name: 66050
 Type: REG_SZ
 Data: 100 Mb Half

Value 4
 Name: 514
 Type: REG_SZ
 Data: 100 Mb Full

HP NC373i Driver Parameters (Port 2)

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 3:42 PM

Value 0
Name: create_pdo_flag
Type: REG_SZ
Data: 4

Value 1
Name: mtu
Type: REG_SZ
Data: 1500

Value 2
Name: req_medium
Type: REG_SZ
Data: 0

Value 3
Name: InfPath
Type: REG_SZ
Data: oem31.inf

Value 4
Name: InfSection
Type: REG_SZ
Data: NC373i_inst_amd64

Value 5
Name: ProviderName
Type: REG_SZ
Data: Hewlett-Packard Company

Value 6
Name: DriverDateData
Type: REG_BINARY
Data: 00 c0 59 88 d6 64 c6 01 -
.ÅY.ôdE.

Value 7
Name: DriverDate
Type: REG_SZ
Data: 4-21-2006

Value 8
Name: DriverVersion
Type: REG_SZ
Data: 2.6.17.0

Value 9
Name: MatchingDeviceId
Type: REG_SZ
Data: pci\ven_14e4&dev_164c&subsys_7038103c

Value 10
Name: DriverDesc
Type: REG_SZ
Data: HP NC373i Virtual Bus Device

Value 11
Name: target_ips
Type: REG_SZ
Data: 2000

Value 12
Name: optimize_ips
Type: REG_SZ
Data: 0

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154\ndi
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 12:10 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154\ndi\params
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 12:10 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154\ndi\params\mtu
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 12:10 PM

Value 0
Name: paramdesc
Type: REG_SZ
Data: Maximum Transfer Unit

Value 1
Name: default
Type: REG_SZ
Data: 1500

Value 2
Name: type
Type: REG_SZ
Data: dword

Value 3
Name: min
Type: REG_SZ
Data: 1500

Value 4
Name: max
Type: REG_SZ
Data: 9000

Value 5
Name: step

Type: REG_SZ
Data: 500

Value 6
Name: base
Type: REG_SZ
Data: 10

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154\ndi\params\req_medium
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 12:10 PM

Value 0
Name: paramDesc
Type: REG_SZ
Data: Speed & Duplex

Value 1
Name: default
Type: REG_SZ
Data: 0

Value 2
Name: type
Type: REG_SZ
Data: enum

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Class\{4D36E97D-E325-11CE-BFC1-08002BE10318}\0154\ndi\params\req_medium\enum
Class Name: <NO CLASS>
Last Write Time: 5/17/2006 - 12:10 PM

Value 0
Name: 0
Type: REG_SZ
Data: Auto

Value 1
Name: 65794
Type: REG_SZ
Data: 10 Mb Half

Value 2
Name: 258
Type: REG_SZ
Data: 10 Mb Full

Value 3
Name: 66050
Type: REG_SZ
Data: 100 Mb Half

Value 4
Name: 514
Type: REG_SZ
Data: 100 Mb Full

Microsoft SQL Server 2005 Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration
Class Name: <NO CLASS>
Last Write Time: 5/13/2006 - 8:54 AM

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0
Class Name: <NO CLASS>
Last Write Time: 5/13/2006 - 2:00 AM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0x3

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1
Class Name: <NO CLASS>
Last Write Time: 5/13/2006 - 2:00 AM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xc

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\xxxNode2
Class Name: <NO CLASS>
Last Write Time: 5/13/2006 - 8:53 AM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0x30

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\xxxNode3
Class Name: <NO CLASS>
Last Write Time: 5/13/2006 - 8:54 AM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xc0

Additional Microsoft SQL Server 2005 Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM

Value 0
Name: ForceEncryption
Type: REG_DWORD
Data: 0

Value 1
Name: HideInstance
Type: REG_DWORD
Data: 0

Value 2
Name: Certificate
Type: REG_SZ
Data:

Value 3
Name: DisplayName
Type: REG_SZ
Data: SQL Server Network Configuration

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\AdminCon
nection
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM
Value 0
Name: DisplayName
Type: REG_SZ
Data: Dedicated Administrative
Connection

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\AdminCon
nection\Tcp
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM
Value 0
Name: TcpDynamicPorts
Type: REG_SZ
Data: 1434

Value 1
Name: DisplayName
Type: REG_SZ
Data: TCP/IP

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Np
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM
Value 0
Name: Enabled
Type: REG_DWORD
Data: 0

Value 1
Name: PipeName
Type: REG_SZ
Data: \\.\pipe\sql\query

Value 2
Name: DisplayName
Type: REG_SZ
Data: Named Pipes

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Sm
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM
Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: DisplayName
Type: REG_SZ
Data: Shared Memory

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp
Class Name: <NO CLASS>
Last Write Time: 5/8/2006 - 4:54 PM
Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: ListenOnAllIPs
Type: REG_DWORD
Data: 0x1

Value 2
Name: NoDelay
Type: REG_DWORD
Data: 0

Value 3
Name: KeepAlive
Type: REG_DWORD
Data: 0x7530

Value 4
 Name: DisplayName
 Type: REG_SZ
 Data: TCP/IP

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1
 Class Name: <NO CLASS>
 Last Write Time: 5/13/2006 - 2:04 PM

Value 0
 Name: Enabled
 Type: REG_DWORD
 Data: 0x1

Value 1
 Name: Active
 Type: REG_DWORD
 Data: 0x1

Value 2
 Name: TcpPort
 Type: REG_SZ
 Data: 2002

Value 3
 Name: TcpDynamicPorts
 Type: REG_SZ
 Data:

Value 4
 Name: DisplayName
 Type: REG_SZ
 Data: Specific IP Address

Value 5
 Name: IpAddress
 Type: REG_SZ
 Data: 130.168.211.101

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2
 Class Name: <NO CLASS>
 Last Write Time: 5/13/2006 - 2:04 PM

Value 0
 Name: Enabled
 Type: REG_DWORD
 Data: 0x1

Value 1
 Name: Active
 Type: REG_DWORD
 Data: 0x1

Value 2
 Name: TcpPort
 Type: REG_SZ
 Data: 2001

Value 3
 Name: TcpDynamicPorts
 Type: REG_SZ
 Data:

Value 4
 Name: DisplayName
 Type: REG_SZ
 Data: Specific IP Address

Value 5
 Name: IpAddress
 Type: REG_SZ
 Data: 130.120.211.100

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP3
 Class Name: <NO CLASS>
 Last Write Time: 5/8/2006 - 4:54 PM

Value 0
 Name: Enabled
 Type: REG_DWORD
 Data: 0

Value 1
 Name: Active
 Type: REG_DWORD
 Data: 0x1

Value 2
 Name: TcpPort
 Type: REG_SZ
 Data: 1433

Value 3
 Name: TcpDynamicPorts
 Type: REG_SZ
 Data:

Value 4
 Name: DisplayName
 Type: REG_SZ
 Data: Specific IP Address

Value 5
 Name: IpAddress
 Type: REG_SZ
 Data: 127.0.0.1

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IPAL1
 Class Name: <NO CLASS>
 Last Write Time: 5/13/2006 - 8:56 AM

Value 0
 Name: TcpPort
 Type: REG_SZ
 Data: 2001[0x1],2002[0x2]

Value 1
 Name: TcpDynamicPorts
 Type: REG_SZ
 Data:

Value 2
 Name: DisplayName
 Type: REG_SZ
 Data: Any IP Address

Key Name:
 HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Via
 Class Name: <NO CLASS>
 Last Write Time: 5/8/2006 - 4:54 PM

Value 0
 Name: Enabled
 Type: REG_DWORD
 Data: 0

Value 1
 Name: DefaultServerPort
 Type: REG_SZ
 Data: 0:1433

Value 2
 Name: ListenInfo
 Type: REG_SZ
 Data: 0:1433

Value 3
 Name: DisplayName
 Type: REG_SZ
 Data: VIA

System Summary

System Information report written at: 05/18/06
 19:12:52
 System Name: GENGHIS
 [System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	GENGHIS
System Manufacturer	HP
System Model	ProLiant ML370 G5
System Type	x64-based PC
Processor	EM64T Family 6 Model 15 Stepping 4
GenuineIntel	~3000 Mhz
Processor	EM64T Family 6 Model 15 Stepping 4
GenuineIntel	~3000 Mhz

Processor EM64T Family 6 Model 15 Stepping 4
 GenuineIntel ~3000 Mhz
 Processor EM64T Family 6 Model 15 Stepping 4
 GenuineIntel ~3000 Mhz
 BIOS Version/Date HP P57, 5/15/2006
 SMBIOS Version 2.3
 Windows Directory C:\WINDOWS
 System Directory C:\WINDOWS\system32
 Boot Device \Device\HarddiskVolume74
 Locale United States
 Hardware Abstraction Layer Version =
 "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
 User Name GENGHIS\Administrator
 Time Zone Central Daylight Time
 Total Physical Memory 64,511.11 MB
 Available Physical Memory 366.19 MB
 Total Virtual Memory 63.45 GB
 Available Virtual Memory 2.16 GB
 Page File Space 2.00 GB
 Page File C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]

Resource Device
 I/O Port 0x0000A000-0x0000AFFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x0000A000-0x0000AFFF Smart Array
 P800 Controller (Non-Miniport)
 I/O Port 0x00000000-0x00000CF7 PCI bus
 I/O Port 0x00000000-0x00000CF7 Direct memory access controller
 I/O Port 0x00009000-0x00009FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00009000-0x00009FFF Smart Array
 P800 Controller (Non-Miniport)
 I/O Port 0x00006000-0x00006FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00006000-0x00006FFF Smart Array
 P800 Controller (Non-Miniport)
 I/O Port 0x0000B000-0x0000BFFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x0000B000-0x0000BFFF Smart Array
 P800 Controller (Non-Miniport)
 IRQ 16 PCI standard PCI-to-PCI bridge
 IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 Smart Array P800 Controller (Non-Miniport)

IRQ 16 Smart Array P800 Controller (Non-Miniport)
 IRQ 16 PCI standard PCI-to-PCI bridge
 IRQ 16 HP NC373i Virtual Bus Device
 Memory Address 0xFD300000-0xFD6FFFFFF PCI standard
 PCI-to-PCI bridge
 Memory Address 0xFD300000-0xFD6FFFFFF PCI standard
 PCI-to-PCI bridge
 IRQ 17 PCI standard PCI-to-PCI bridge
 IRQ 17 Smart Array P800 Controller (Non-Miniport)
 IRQ 17 PCI standard PCI-to-PCI bridge
 IRQ 17 HP NC373i Virtual Bus Device
 I/O Port 0x00005000-0x00007FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00005000-0x00007FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00005000-0x00007FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00005000-0x00007FFF Smart Array
 P800 Controller (Non-Miniport)
 Memory Address 0xA000-0xBFFFF PCI bus
 Memory Address 0xA000-0xBFFFF ATI ES1000
 Memory Address 0xFA000000-0xFBFFFFFF PCI standard
 PCI-to-PCI bridge
 Memory Address 0xFA000000-0xFBFFFFFF PCI standard
 PCI-to-PCI bridge
 Memory Address 0xFA000000-0xFBFFFFFF HP NC373i
 Virtual Bus Device
 Memory Address 0xF8000000-0xF9FFFFFF PCI standard
 PCI-to-PCI bridge
 Memory Address 0xF8000000-0xF9FFFFFF PCI standard
 PCI-to-PCI bridge
 Memory Address 0xF8000000-0xF9FFFFFF HP NC373i
 Virtual Bus Device
 I/O Port 0x00007000-0x00007FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00007000-0x00007FFF Smart Array
 Controller
 I/O Port 0x00004000-0x00004FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00004000-0x00004FFF Smart Array
 P800 Controller (Non-Miniport)
 I/O Port 0x00008000-0x00008FFF PCI standard
 PCI-to-PCI bridge
 I/O Port 0x00008000-0x00008FFF Smart Array
 P800 Controller (Non-Miniport)
 [DMA]
 Resource Device Status

Channel 7 Direct memory access controller OK
 Channel 2 Standard floppy disk controller OK
 [Forced Hardware]
 Device PNP Device ID
 [I/O]
 Resource Device Status
 0x00000000-0x00000CF7 PCI bus OK
 0x00000000-0x00000CF7 Direct memory access
 controller OK
 0x0000D000-0x0000FFFF PCI bus OK
 0x00005000-0x00007FFF PCI standard PCI-to-PCI
 bridge OK
 0x00005000-0x00007FFF PCI standard PCI-to-PCI
 bridge OK
 0x00005000-0x00007FFF PCI standard PCI-to-PCI
 bridge OK
 0x00005000-0x00007FFF PCI standard PCI-to-PCI
 bridge OK
 0x00005000-0x00007FFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x00006000-0x00006FFF PCI standard PCI-to-PCI
 bridge OK
 0x00006000-0x00006FFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x00007000-0x00007FFF PCI standard PCI-to-PCI
 bridge OK
 0x00007000-0x00007FFF Smart Array Controller
 OK
 0x00004000-0x00004FFF PCI standard PCI-to-PCI
 bridge OK
 0x00004000-0x00004FFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x00008000-0x00008FFF PCI standard PCI-to-PCI
 bridge OK
 0x00008000-0x00008FFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x00009000-0x00009FFF PCI standard PCI-to-PCI
 bridge OK
 0x00009000-0x00009FFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x0000A000-0x0000AFFF PCI standard PCI-to-PCI
 bridge OK
 0x0000A000-0x0000AFFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x0000B000-0x0000BFFF PCI standard PCI-to-PCI
 bridge OK
 0x0000B000-0x0000BFFF Smart Array P800
 Controller (Non-Miniport)
 OK
 0x00003000-0x000030FF ATI ES1000 OK
 0x00003B00-0x00003BBB ATI ES1000 OK
 0x00003C00-0x00003DFF ATI ES1000 OK
 0x00002800-0x000028FF HP ProLiant iLO 2
 Legacy Support Function OK
 0x00003400-0x000034FF Base System Device OK

0x00003800-0x0000381F	Standard Universal PCI	
to USB Host Controller	OK	
0x00000070-0x00000077	Motherboard resources	
OK		
0x00000408-0x0000040F	Motherboard resources	
OK		
0x000004D0-0x000004D1	Motherboard resources	
OK		
0x00000020-0x0000003F	Motherboard resources	
OK		
0x000000A0-0x000000BF	Motherboard resources	
OK		
0x00000090-0x0000009F	Motherboard resources	
OK		
0x00000050-0x00000053	Motherboard resources	
OK		
0x00000700-0x0000071F	Motherboard resources	
OK		
0x00000800-0x0000083F	Motherboard resources	
OK		
0x00000900-0x0000097F	Motherboard resources	
OK		
0x00000010-0x0000001F	Motherboard resources	
OK		
0x00000C80-0x00000C83	Motherboard resources	
OK		
0x00000CD4-0x00000CD7	Motherboard resources	
OK		
0x00000F50-0x00000F58	Motherboard resources	
OK		
0x000000F0-0x000000F0	Motherboard resources	
OK		
0x00000CA0-0x00000CA1	Motherboard resources	
OK		
0x00000CA4-0x00000CA5	Motherboard resources	
OK		
0x00000CA2-0x00000CA3	OK	
0x00000040-0x00000043	System timer	OK
0x00000080-0x0000008F	Direct memory access	
controller	OK	
0x000000C0-0x000000DF	Direct memory access	
controller	OK	
0x00000061-0x00000061	System speaker	OK
0x00000060-0x00000060	Standard 101/102-Key or	
Microsoft Natural PS/2 Keyboard	OK	
0x00000064-0x00000064	Standard 101/102-Key or	
Microsoft Natural PS/2 Keyboard	OK	
0x0000002E-0x0000002F	Extended IO Bus	OK
0x0000004E-0x0000004F	Extended IO Bus	OK
0x00000620-0x0000065F	Extended IO Bus	OK
0x00000680-0x0000069F	Extended IO Bus	OK
0x00000600-0x0000061F	Extended IO Bus	OK
0x00000660-0x0000067F	Extended IO Bus	OK
0x00000300-0x0000030F	Extended IO Bus	OK

0x000003F0-0x000003F5	Standard floppy disk	
controller	OK	
0x000003F7-0x000003F7	Standard floppy disk	
controller	OK	
0x00000500-0x0000050F	Standard Dual Channel	
PCI IDE Controller	OK	
0x000001F0-0x000001F7	Primary IDE Channel	OK
0x000003F6-0x000003F6	Primary IDE Channel	OK
0x00000170-0x00000177	Secondary IDE Channel	OK
0x00000376-0x00000376	Secondary IDE Channel	OK
OK		
[IRQs]		
Resource	Device	Status
IRQ 9	Microsoft ACPI-Compliant System	OK
IRQ 16	PCI standard PCI-to-PCI bridge	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 16	PCI standard PCI-to-PCI bridge	OK
IRQ 16	HP NC373i Virtual Bus Device	OK
IRQ 17	PCI standard PCI-to-PCI bridge	OK
IRQ 17	Smart Array P800 Controller (Non-Miniport)	OK
IRQ 17	PCI standard PCI-to-PCI bridge	OK
IRQ 17	HP NC373i Virtual Bus Device	OK
IRQ 18	PCI standard PCI-to-PCI bridge	OK
IRQ 25	Smart Array Controller	OK
IRQ 23	ATI ES1000	OK
IRQ 10	HP ProLiant iLO 2 Legacy Support Function	OK
IRQ 7	Base System Device	OK
IRQ 22	Standard Universal PCI to USB Host	OK
Controller	OK	
IRQ 21	HP ProLiant iLO 2 Management Controller	OK
Driver	OK	
IRQ 0	System timer	OK
IRQ 1	Standard 101/102-Key or Microsoft Natural	OK
PS/2 Keyboard	OK	
IRQ 12	PS/2 Compatible Mouse	OK
IRQ 6	Standard floppy disk controller	OK
IRQ 14	Primary IDE Channel	OK

[Memory]		
Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI ES1000	OK
0xD0000000-0xDFFFFFFF	PCI bus	OK
0xF0000000-0xFEFFFFFF	PCI bus	OK
0xFD200000-0xFD7FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD300000-0xFD6FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD300000-0xFD6FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD400000-0xFD4FFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD3F0000-0xFD3F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD500000-0xFD6FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD600000-0xFD6FFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD5F0000-0xFD5F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD700000-0xFD7FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD7F0000-0xFD7F1FFF	Smart Array Controller	
OK		
0xFD780000-0xFD7BFFFF	Smart Array Controller	
OK		
0xFD000000-0xFD1FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD100000-0xFD1FFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD0F0000-0xFD0F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD800000-0xFD9FFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD900000-0xFD9FFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD8F0000-0xFD8F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDA00000-0xFDBFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDB00000-0xFDBFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDAF0000-0xFDAF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDC00000-0xFDDFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDD00000-0xFDDFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDCF0000-0xFDCF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDE00000-0xFDFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDF00000-0xFDFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDEF0000-0xFDEF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xF8000000-0xF9FFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xF8000000-0xF9FFFFFF	PCI standard PCI-to-PCI	
bridge	OK	

```

0xF8000000-0xF9FFFFFF HP NC373i Virtual Bus
Device OK
0xFA000000-0xFBFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFFF PCI standard PCI-to-PCI
bridge OK
0xFA000000-0xFBFFFFFF HP NC373i Virtual Bus
Device OK
0xD8000000-0xDFFFFFFF ATI ES1000 OK

0xF7F00000-0xF7FFFFFF ATI ES1000 OK

0xF7FE0000-0xF7FE01FF HP ProLiant iLO 2
Legacy Support Function OK
0xF7FD0000-0xF7FD07FF Base System Device OK

0xF7FC0000-0xF7FC1FFF Base System Device OK

0xF7F00000-0xF7F7FFFF Base System Device OK

0xF7EF0000-0xF7EF00FF HP ProLiant iLO 2
Management Controller Driver OK
0xE0000000-0xEFFFFFFF Motherboard resources
OK
0xFE000000-0xFEFFFFFF Motherboard resources
OK
0xFED00000-0xFED003FF High precision event
timer OK

[Components]

[Multimedia]

[Audio Codecs]

CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msg711.acm Microsoft
Corporation msg711.acm OK
C:\WINDOWS\system32\MSG711.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
13.50 KB (13,824 bytes) 3/25/2005

6:00 AM
c:\windows\system32\msgsm32.acm Microsoft
Corporation msgsm32.acm OK
C:\WINDOWS\system32\MSGSM32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
34.50 KB (35,328 bytes) 3/25/2005

6:00 AM
c:\windows\system32\tssoft32.acm DSP GROUP,
INC. tssoft32.acm OK
C:\WINDOWS\system32\TSSOFT32.ACM
1.01 13.50 KB (13,824 bytes)
3/25/2005 6:00 AM

c:\windows\system32\imaadp32.acm Microsoft
Corporation imaadp32.acm OK
C:\WINDOWS\system32\IMAADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)

```

```

24.00 KB (24,576 bytes) 3/25/2005

6:00 AM
c:\windows\system32\msadp32.acm Microsoft
Corporation msadp32.acm OK
C:\WINDOWS\system32\MSADP32.ACM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
23.50 KB (24,064 bytes) 3/25/2005

6:00 AM

[Video Codecs]

CODEC Manufacturer Description
Status File Version Size
Creation Date
c:\windows\system32\msyuv.dll Microsoft
Corporation msyuv.dll OK
C:\WINDOWS\system32\MSYUV.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
21.00 KB (21,504 bytes)
3/24/2005 11:21 AM

c:\windows\system32\msrle32.dll Microsoft
Corporation msrle32.dll OK
C:\WINDOWS\system32\MSRLE32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
15.50 KB (15,872 bytes) 3/25/2005

6:00 AM
c:\windows\system32\iyuv_32.dll Microsoft
Corporation iyuv_32.dll OK
C:\WINDOWS\system32\IYUV_32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
52.50 KB (53,760 bytes) 3/24/2005

11:19 AM
c:\windows\system32\tsbyuv.dll Microsoft
Corporation tsbyuv.dll OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.50 KB (12,800 bytes) 3/24/2005

11:34 AM
c:\windows\system32\msvidc32.dll Microsoft
Corporation msvidc32.dll OK
C:\WINDOWS\system32\MSVIDC32.DLL
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
43.00 KB (44,032 bytes) 3/25/2005

6:00 AM

[CD-ROM]

Item Value
Drive D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name HL-DT-ST CD-ROM GCR-8482B
Manufacturer (Standard CD-ROM drives)
Status OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMHL-DT-ST_CD-ROM_GCR-
8482B_2.09_5&5FD9AC6&0&0.0.0
Driver c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 75.50 KB
(77,312 bytes), 3/25/2005 6:00 AM)

[Sound Device]

```

```

Item Value

[Display]

Item Value
Name ATI ES1000
PNP Device ID PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Adapter Type ATI ES1000 (0x515E), ATI
Technologies Inc. compatible
Adapter Description ATI ES1000
Adapter RAM 32.00 MB (33,554,432 bytes)
Installed Drivers ati2dvag.dll
Driver Version 6.14.10.6583
INF File oem17.inf (ati2mtag_RN50 section)
Color Planes 1
Color Table Entries 4294967296
Resolution 1024 x 768 x 60 hertz
Bits/Pixel 32
Memory Address 0xD8000000-0xDFFFFFFF
I/O Port 0x00003000-0x000030FF
Memory Address 0xF7FF0000-0xF7FFFFFF
IRQ Channel IRQ 23
I/O Port 0x000003B0-0x000003BB
I/O Port 0x000003C0-0x000003DF
Memory Address 0xA0000-0xBFFFF
Driver c:\windows\system32\drivers\ati2mtag.sys
(6.14.10.6583, 1.97 MB (2,066,432 bytes), 5/3/2006
3:53 PM)

[Infrared]

Item Value

[Input]

[Keyboard]

Item Value
Description USB Human Interface Device
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00
Number of Function Keys 12
Driver c:\windows\system32\drivers\hidusb.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
(18,944 bytes), 3/25/2005 6:00 AM)

Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name Enhanced (101- or 102-key)
Layout 00000409
PNP Device ID ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys 12
I/O Port 0x00000060-0x00000060
I/O Port 0x00000064-0x00000064
IRQ Channel IRQ 1

```

Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 3/25/2005 6:00 AM)

[Pointing Device]

Item Value
Hardware Type USB Human Interface Device
Number of Buttons 5
Status OK
PNP Device ID
USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01

Power Management Supported No
Double Click Threshold 6
Handedness Right Handed Operation
Driver c:\windows\system32\drivers\hidusb.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 18.50 KB
(18,944 bytes), 3/25/2005 6:00 AM)

Hardware Type PS/2 Compatible Mouse
Number of Buttons 5
Status OK
PNP Device ID ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported No
Double Click Threshold 6
Handedness Right Handed Operation
IRQ Channel IRQ 12
Driver c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB
(93,184 bytes), 3/25/2005 6:00 AM)

[Modem]

Item Value

[Network]

[Adapter]

Item Value
Name [00000001] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 1
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000002] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)

Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPOINT\0000
Last Reset 5/18/2006 2:40 PM
Index 2
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 132.00 KB
(135,168 bytes), 3/25/2005 6:00 AM)

Name [00000003] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPOINT\0000
Last Reset 5/18/2006 2:40 PM
Index 3
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Driver c:\windows\system32\drivers\raspptp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 117.50 KB
(120,320 bytes), 3/25/2005 6:00 AM)

Name [00000004] WAN Miniport (PPPOE)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPPOE)
Installed Yes
PNP Device ID ROOT\MS_PPPOEMINIPOINT\0000
Last Reset 5/18/2006 2:40 PM
Index 4
Service Name Rasppoe
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 33:50:6F:45:30:30
Driver c:\windows\system32\drivers\rasppoe.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 67.50 KB
(69,120 bytes), 3/25/2005 6:00 AM)

Name [00000005] Direct Parallel
Adapter Type Not Available
Product Type Direct Parallel
Installed Yes
PNP Device ID ROOT\MS_PTIMINIPOINT\0000
Last Reset 5/18/2006 2:40 PM

Index 5
Service Name Raspti
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\raspti.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB
(31,232 bytes), 3/25/2005 6:00 AM)

Name [00000006] WAN Miniport (IP)
Adapter Type Not Available
Product Type WAN Miniport (IP)
Installed Yes
PNP Device ID ROOT\MS_NDISWANIP\0000
Last Reset 5/18/2006 2:40 PM
Index 6
Service Name NdisWan
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver c:\windows\system32\drivers\ndiswan.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 157.50 KB
(161,280 bytes), 3/25/2005 6:00 AM)

Name [00000007] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 7
Service Name l2nd
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000008] HP NC373i Multifunction Gigabit
Server Adapter
Adapter Type Not Available
Product Type HP NC373i Multifunction Gigabit
Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 8
Service Name l2nd

IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000009] HP NC373i Multifunction Gigabit Server Adapter
Adapter Type Ethernet 802.3
Product Type HP NC373i Multifunction Gigabit Server Adapter
Installed Yes
PNP Device ID B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R EV_11\6&2826E01F&1&20050300
Last Reset 5/18/2006 2:40 PM
Index 9
Service Name 12nd
IP Address 130.120.211.100
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:16:35:80:1F:60
Driver c:\windows\system32\drivers\bxnd52a.sys (2.6.14.0 built by: WinDDK, 78.00 KB (79,872 bytes), 5/5/2006 10:50 AM)

Name [00000010] HP NC373i Multifunction Gigabit Server Adapter
Adapter Type Ethernet 802.3
Product Type HP NC373i Multifunction Gigabit Server Adapter
Installed Yes
PNP Device ID B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R EV_11\6&253A0954&1&20050500
Last Reset 5/18/2006 2:40 PM
Index 10
Service Name 12nd
IP Address 130.168.211.101
IP Subnet 255.255.0.0
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 00:16:35:80:1F:62
Driver c:\windows\system32\drivers\bxnd52a.sys (2.6.14.0 built by: WinDDK, 78.00 KB (79,872 bytes), 5/5/2006 10:50 AM)

Name [00000011] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes

PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 11
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000012] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 12
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000013] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 13
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000014] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 14
Service Name N1000
IP Address Not Available
IP Subnet Not Available

Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000015] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 15
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000016] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 16
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000017] HP NC340T PCI-X Quad-port Gigabit Server Adapter
Adapter Type Not Available
Product Type HP NC340T PCI-X Quad-port Gigabit Server Adapter
Installed Yes
PNP Device ID Not Available
Last Reset 5/18/2006 2:40 PM
Index 17
Service Name N1000
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled Yes
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available

Name [00000018] HP NC340T PCI-X Quad-port
 Gigabit Server Adapter
 Adapter Type Not Available
 Product Type HP NC340T PCI-X Quad-port Gigabit
 Server Adapter
 Installed Yes
 PNP Device ID Not Available
 Last Reset 5/18/2006 2:40 PM
 Index 18
 Service Name N1000
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled No
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No

Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

[WinSock]

Item	Value
File	c:\windows\system32\wsock32.dll
Size	24.50 KB (25,088 bytes)
Version	5.2.3790.1830 (srv03_spl_rtm.050324-1447)

[Ports]

Item	Value
------	-------

[Parallel]

Item	Value
------	-------

[Storage]

[Drives]

Item	Value
Drive	C:
Description	Local Fixed Disk

Compressed	No
File System	NTFS
Size	33.88 GB (36,381,306,880 bytes)
Free Space	21.51 GB (23,099,195,392 bytes)

Volume Name	
Volume Serial Number	E82437B9

Drive	D:
Description	CD-ROM Disc

Drive	E:
Description	Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available

[Disks]

Item	Value
Description	\\.\PHYSICALDRIVE24
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	615.01 GB (660,366,604,800 bytes)
Total Cylinders	80,285
Total Sectors	1,289,778,525
Total Tracks	20,472,675
Tracks/Cylinder	255
Partition Disk #24,	Partition #0
Partition Size	615.01 GB (660,362,018,816 bytes)

Partition Starting Offset	16,384 bytes
---------------------------	--------------

Description	\\.\PHYSICALDRIVE61
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	74.21 GB (79,686,512,640 bytes)
Total Cylinders	9,688
Total Sectors	155,637,720
Total Tracks	2,470,440
Tracks/Cylinder	255
Partition Disk #61,	Partition #0

Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE62
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #62, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE63
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #63, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE64
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975

Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #64, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE65
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #65, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE66
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 74.21 GB (79,686,512,640 bytes)
Total Cylinders 9,688
Total Sectors 155,637,720
Total Tracks 2,470,440
Tracks/Cylinder 255
Partition Disk #66, Partition #0
Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE67
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #67, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE68
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #68, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE69
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #69, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE70
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available

SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #70, Partition #0
 Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE71
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #71, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE72
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #72, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE49
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #49, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE50
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #50, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE51
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 123.04 GB (132,114,447,360 bytes)
 Total Cylinders 16,062
 Total Sectors 258,036,030
 Total Tracks 4,095,810
 Tracks/Cylinder 255
 Partition Disk #51, Partition #0
 Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE52
 Manufacturer Not Available
 Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 75.19 GB (80,731,123,200 bytes)
 Total Cylinders 9,815
 Total Sectors 157,677,975
 Total Tracks 2,502,825
 Tracks/Cylinder 255
 Partition Disk #52, Partition #0
 Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE53
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #53, Partition #0
 Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE54
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #54, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE55
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #55, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE56
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 123.04 GB (132,114,447,360 bytes)
 Total Cylinders 16,062
 Total Sectors 258,036,030
 Total Tracks 4,095,810
 Tracks/Cylinder 255
 Partition Disk #56, Partition #0
 Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE57
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 75.19 GB (80,731,123,200 bytes)
 Total Cylinders 9,815
 Total Sectors 157,677,975
 Total Tracks 2,502,825
 Tracks/Cylinder 255
 Partition Disk #57, Partition #0

Partition Size 75.19 GB (80,731,090,944 bytes)
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE58
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #58, Partition #0
 Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE59
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #59, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE60
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240

Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #60, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE25
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE26
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #26, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE27
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63

Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #27, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE28
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #28, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE29
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #29, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE30
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available

SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 74.21 GB (79,686,512,640 bytes)
Total Cylinders 9,688
Total Sectors 155,637,720
Total Tracks 2,470,440
Tracks/Cylinder 255
Partition Disk #30, Partition #0
Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE31
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #31, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE32
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #32, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE33
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #33, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE34
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #34, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE35
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 195.31 GB (209,711,738,880 bytes)
Total Cylinders 25,496
Total Sectors 409,593,240
Total Tracks 6,501,480
Tracks/Cylinder 255
Partition Disk #35, Partition #0
Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE36
Manufacturer Not Available
Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #36, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE37
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #37, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE38
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #38, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE39
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 123.04 GB (132,114,447,360 bytes)
 Total Cylinders 16,062
 Total Sectors 258,036,030
 Total Tracks 4,095,810
 Tracks/Cylinder 255
 Partition Disk #39, Partition #0
 Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE40
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 75.19 GB (80,731,123,200 bytes)
 Total Cylinders 9,815
 Total Sectors 157,677,975
 Total Tracks 2,502,825
 Tracks/Cylinder 255
 Partition Disk #40, Partition #0
 Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE41
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #41, Partition #0

Partition Size 49.80 GB (53,472,513,024 bytes)
 Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE42
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #42, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE43
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #43, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE44
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 123.04 GB (132,114,447,360 bytes)
 Total Cylinders 16,062
 Total Sectors 258,036,030

Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #44, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE45
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #45, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE46
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #46, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE47
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

Size 195.31 GB (209,711,738,880 bytes)
Total Cylinders 25,496
Total Sectors 409,593,240
Total Tracks 6,501,480
Tracks/Cylinder 255
Partition Disk #47, Partition #0
Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE48
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 195.31 GB (209,711,738,880 bytes)
Total Cylinders 25,496
Total Sectors 409,593,240
Total Tracks 6,501,480
Tracks/Cylinder 255
Partition Disk #48, Partition #0
Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE12
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 74.21 GB (79,686,512,640 bytes)
Total Cylinders 9,688
Total Sectors 155,637,720
Total Tracks 2,470,440
Tracks/Cylinder 255
Partition Disk #12, Partition #0
Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE13
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available

SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #13, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE14
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #14, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE15
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #15, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE16
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE17
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #17, Partition #0
 Partition Size 74.21 GB (79,685,484,544 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE18
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 48.83 GB (52,427,934,720 bytes)
 Total Cylinders 6,374
 Total Sectors 102,398,310
 Total Tracks 1,625,370
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE19
 Manufacturer Not Available
 Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 123.04 GB (132,114,447,360 bytes)
 Total Cylinders 16,062
 Total Sectors 258,036,030
 Total Tracks 4,095,810
 Tracks/Cylinder 255
 Partition Disk #19, Partition #0
 Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE20
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 75.19 GB (80,731,123,200 bytes)
 Total Cylinders 9,815
 Total Sectors 157,677,975
 Total Tracks 2,502,825
 Tracks/Cylinder 255
 Partition Disk #20, Partition #0
 Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE21
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 49.80 GB (53,472,545,280 bytes)
 Total Cylinders 6,501
 Total Sectors 104,438,565
 Total Tracks 1,657,755
 Tracks/Cylinder 255
 Partition Disk #21, Partition #0
 Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE22
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #22, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE23
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 195.31 GB (209,711,738,880 bytes)
 Total Cylinders 25,496
 Total Sectors 409,593,240
 Total Tracks 6,501,480
 Tracks/Cylinder 255
 Partition Disk #23, Partition #0
 Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 74.21 GB (79,686,512,640 bytes)
 Total Cylinders 9,688
 Total Sectors 155,637,720
 Total Tracks 2,470,440
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0

Partition Size 74.22 GB (79,688,630,272 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE1
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #1, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE2
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #2, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE3
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975

Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #3, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE4
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #4, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE5
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 74.21 GB (79,686,512,640 bytes)
Total Cylinders 9,688
Total Sectors 155,637,720
Total Tracks 2,470,440
Tracks/Cylinder 255
Partition Disk #5, Partition #0
Partition Size 74.22 GB (79,688,630,272 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE6
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63

Size 48.83 GB (52,427,934,720 bytes)
Total Cylinders 6,374
Total Sectors 102,398,310
Total Tracks 1,625,370
Tracks/Cylinder 255
Partition Disk #6, Partition #0
Partition Size 48.83 GB (52,427,751,424 bytes)

Partition Starting Offset 65,536 bytes

Description \\.\PHYSICALDRIVE7
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 123.04 GB (132,114,447,360 bytes)
Total Cylinders 16,062
Total Sectors 258,036,030
Total Tracks 4,095,810
Tracks/Cylinder 255
Partition Disk #7, Partition #0
Partition Size 123.04 GB (132,114,415,104 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE8
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 75.19 GB (80,731,123,200 bytes)
Total Cylinders 9,815
Total Sectors 157,677,975
Total Tracks 2,502,825
Tracks/Cylinder 255
Partition Disk #8, Partition #0
Partition Size 75.19 GB (80,731,090,944 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE9
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available

```

SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 49.80 GB (53,472,545,280 bytes)
Total Cylinders 6,501
Total Sectors 104,438,565
Total Tracks 1,657,755
Tracks/Cylinder 255
Partition Disk #9, Partition #0
Partition Size 49.80 GB (53,472,513,024 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE10
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 195.31 GB (209,711,738,880 bytes)
Total Cylinders 25,496
Total Sectors 409,593,240
Total Tracks 6,501,480
Tracks/Cylinder 255
Partition Disk #10, Partition #0
Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE11
Manufacturer Not Available
Model Not Available
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID Not Available
Sectors/Track 63
Size 195.31 GB (209,711,738,880 bytes)
Total Cylinders 25,496
Total Sectors 409,593,240
Total Tracks 6,501,480
Tracks/Cylinder 255
Partition Disk #11, Partition #0
Partition Size 195.31 GB (209,711,706,624 bytes)

Partition Starting Offset 32,256 bytes

Description Disk drive
Manufacturer (Standard disk drives)
Model HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk

```

```

Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 4
Sectors/Track 32
Size 33.89 GB (36,385,505,280 bytes)
Total Cylinders 8,709
Total Sectors 71,065,440
Total Tracks 2,220,795
Tracks/Cylinder 255
Partition Disk #73, Partition #0
Partition Size 33.88 GB (36,381,310,976 bytes)

Partition Starting Offset 16,384 bytes

[SCSI]

Item Value
Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\6&1A6A5B31&0&0000010
Memory Address 0xFD400000-0xFD4FFFFF
I/O Port 0x00005000-0x00007FFF
Memory Address 0xFD3F0000-0xFD3F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\6&1225CAAD&0&0000010
Memory Address 0xFD600000-0xFD6FFFFF
I/O Port 0x00006000-0x00006FFF
Memory Address 0xFD5F0000-0xFD5F0FFF
IRQ Channel IRQ 17
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array Controller
Manufacturer Compaq
Status OK
PNP Device ID PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&35DD332E&0&100310
Memory Address 0xFD7F0000-0xFD7F1FFF
I/O Port 0x00007000-0x00007FFF
Memory Address 0xFD780000-0xFD7BFFFF
IRQ Channel IRQ 25
Driver c:\windows\system32\drivers\hpcissb.sys
(5.11.0.64 Build 2 (x86-64) (NT.041115-0204), 30.50
KB (31,232 bytes), 3/25/2005 6:00 AM)

```

```

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&3028BA6E&0&0018
Memory Address 0xFD100000-0xFD1FFFFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0xFD0F0000-0xFD0F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&24699CD&0&0020
Memory Address 0xFD900000-0xFD9FFFFF
I/O Port 0x00008000-0x00008FFF
Memory Address 0xFD8F0000-0xFD8F0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&3526FF9F&0&0028
Memory Address 0xFDB00000-0xFDBFFFFF
I/O Port 0x00009000-0x00009FFF
Memory Address 0xFDAF0000-0xFDAF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard
Status OK
PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&21341818&0&0030
Memory Address 0xFDD00000-0xFDDFFFFF
I/O Port 0x0000A000-0x0000AFFF
Memory Address 0xFDCF0000-0xFDCF0FFF
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpcqissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)

Name Smart Array P800 Controller (Non-Miniport)

Manufacturer Hewlett-Packard

```

```
Status OK
PNP Device ID
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&29EE7C4D&0&0038
Memory Address 0xFDF00000-0xFDF00000
I/O Port 0x0000B000-0x0000BFFF
Memory Address 0xFDEF0000-0xFDEF0000
IRQ Channel IRQ 16
Driver c:\windows\system32\drivers\hpgcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 1/5/2006 11:46 AM)
```

[IDE]

```
Item Value
Name Standard Dual Channel PCI IDE Controller
```

```
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F
Driver c:\windows\system32\drivers\pciide.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 6.00 KB
(6,144 bytes), 3/25/2005 6:00 AM)
```

```
Name Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCIIDE\IDECHANNEL\4&56E2F28&0
```

```
I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14
Driver c:\windows\system32\drivers\ataapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)
```

```
Name Secondary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCIIDE\IDECHANNEL\4&56E2F28&0&1
```

```
I/O Port 0x00000170-0x00000177
I/O Port 0x00000376-0x00000376
Driver c:\windows\system32\drivers\ataapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB
(148,480 bytes), 3/25/2005 6:00 AM)
```

[Printing]

```
Name Driver Port Name Server Name
```

[Problem Devices]

```
Device PNP Device ID Error Code
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
```

```
3\4&2014205D&0&22F0 The drivers for this device are
not installed.
Not Available ACPI\IPI0001\0 The drivers
for this device are not installed.
```

[USB]

```
Device PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&2014205D&0&24F0
```

[Software Environment]

[System Drivers]

Name	Description	File	Type	Started	Start Mode	State	Accept	Pause
abiosdsk	Abiosdsk	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	Kernel Driver	Yes	Normal	Running	OK	Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver	No	Disabled	Stopped	OK	No
adpu160m	adpu160m	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
adpu320	adpu320	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
afd	AFD	c:\windows\system32\drivers\afd.sys	Kernel Driver	Yes	Normal	Running	OK	Yes
aic78u2	aic78u2	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
aic78xx	aic78xx	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
aliide	AliIde	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
amdide	AmdIde	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
arc	arc	Not Available	Kernel Driver	No	Disabled	Stopped	OK	
asynctac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asynctac.sys						

Kernel Driver	No	Manual	Stopped	OK	Normal	No	No
ataapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\ataapi.sys	Kernel Driver	Yes	Normal	Running	OK
atdisk	Atdisk	Not Available	Kernel Driver	No	Disabled	Stopped	OK
ati2mtag	ati2mtag	c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver	Yes	Normal	Running	OK
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver	No	Manual	Stopped	OK
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver	Yes	Normal	Running	OK
b06bdrv	HP Virtual Bus Device	c:\windows\system32\drivers\bxbvnda.sys	Kernel Driver	Yes	Normal	Running	OK
beep	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver	Yes	System	Running	OK
bus_use	bus_use.sys	\\?\c:\windows\system32\drivers\bus_use.sys	Kernel Driver	No	Manual	Stopped	OK
cdac15ba	CdaC15BA	c:\windows\system32\drivers\cdac15ba.sys	Kernel Driver	Yes	Auto	Running	OK
cdad10ba	CdaD10BA	c:\windows\system32\drivers\cdad10ba.sys	Kernel Driver	Yes	Auto	Running	OK
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes	Disabled	Running	OK
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	System	Running	OK

changer	Changer	Not Available	Kernel Driver					
	No	System	Stopped	OK				
	Ignore	No	No					
clusdisk	Cluster Disk Driver							
	c:\windows\system32\drivers\clusdisk.sys							
	Kernel Driver	No	Disabled					
	Stopped	OK	Normal	No	No			
cmdide	CmdIde	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
cpqccissm	cpqccissm	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
crcdisk	CRC Disk Filter Driver							
	c:\windows\system32\drivers\crcdisk.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
dfsdriver	DfsDriver							
	c:\windows\system32\drivers\dfs.sys							
	File System Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
disk	Disk Driver							
	c:\windows\system32\drivers\disk.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
dmboot	dmboot							
	c:\windows\system32\drivers\dmboot.sys							
	Kernel Driver	No	Disabled					
	Stopped	OK	Normal	No	No			
dmio	Logical Disk Manager Driver							
	c:\windows\system32\drivers\dmio.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
dmload	dmload							
	c:\windows\system32\drivers\dmload.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
dpti2o	dpti2o	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
elxstor	elxstor	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
fastfat	Fastfat							
	c:\windows\system32\drivers\fastfat.sys							
	File System Driver	No	Disabled					
	Stopped	OK	Normal	No	No			
fdc	Floppy Disk Controller Driver							
	c:\windows\system32\drivers\fdc.sys							
	Kernel Driver	Yes	Manual					
	Running	OK	Normal	No	Yes			
fips	Fips							
	c:\windows\system32\drivers\fips.sys							
	Kernel Driver	Yes	System					

	Running	OK	Normal	No	Yes			
flpydisk	Flpydisk							
	c:\windows\system32\drivers\flpydisk.sys							
	Kernel Driver	No	System					
	Stopped	OK	Ignore	No	No			
fltmgr	FltMgr							
	c:\windows\system32\drivers\fltmgr.sys							
	File System Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
ftdisk	Volume Manager Driver							
	c:\windows\system32\drivers\ftdisk.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
gpc	Generic Packet Classifier							
	c:\windows\system32\drivers\msgpc.sys							
	Kernel Driver	Yes	Manual					
	Running	OK	Normal	No	Yes			
hidusb	Microsoft HID Class Driver							
	c:\windows\system32\drivers\hidusb.sys							
	Kernel Driver	Yes	Manual					
	Running	OK	Ignore	No	Yes			
hpcisss	hpcisss							
	c:\windows\system32\drivers\hpcisss.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
hpcisss2	HpCISSs2							
	c:\windows\system32\drivers\hpcisss2.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
hpqcissb	Smart Array Controllers Non-Miniport Bus Driver							
	c:\windows\system32\drivers\hpqcissb.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
hpqcissd	Smart Array Controllers Non-Miniport Disk Driver							
	c:\windows\system32\drivers\hpqcissd.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			
hpqilo2	hpqilo2							
	c:\windows\system32\drivers\hpqilo2.sys							
	Kernel Driver	Yes	Manual					
	Running	OK	Normal	No	Yes			
http	HTTP							
	c:\windows\system32\drivers\http.sys							
	Kernel Driver	No	Manual					
	Stopped	OK	Normal	No	No			
i2omgmt	i2omgmt	Not Available	Kernel Driver					
	No	System	Stopped	OK				
	Normal	No	No					
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver							
	c:\windows\system32\drivers\i8042prt.sys							
	Kernel Driver	Yes	System					

	Running	OK	Normal	No	Yes			
iirsp	iirsp	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
imapi	CD-Burning Filter Driver							
	c:\windows\system32\drivers\imapi.sys							
	Kernel Driver	No	System					
	Stopped	OK	Normal	No	No			
intelide	IntelIde	Not Available	Kernel Driver					
	No	Disabled	Stopped	OK				
	Normal	No	No					
intelppm	Intel Processor Driver							
	c:\windows\system32\drivers\intelppm.sys							
	Kernel Driver	Yes	Manual					
	Running	OK	Normal	No	Yes			
ip6fw	IPv6 Windows Firewall Driver							
	c:\windows\system32\drivers\ip6fw.sys							
	Kernel Driver	No	Manual					
	Stopped	OK	Normal	No	No			
ipfilterdriver	IP Traffic Filter Driver							
	c:\windows\system32\drivers\ipfltdrv.sys							
	Kernel Driver	No	Manual					
	Stopped	OK	Normal	No	No			
ipinip	IP in IP Tunnel Driver							
	c:\windows\system32\drivers\ipinip.sys							
	Kernel Driver	No	Manual					
	Stopped	OK	Normal	No	No			
ipnat	IP Network Address Translator							
	c:\windows\system32\drivers\ipnat.sys							
	Kernel Driver	No	Manual					
	Stopped	OK	Normal	No	No			
ipsec	IPSEC driver							
	c:\windows\system32\drivers\ipsec.sys							
	Kernel Driver	Yes	System					
	Running	OK	Normal	No	Yes			
isapnp	PNP ISA/EISA Bus Driver							
	c:\windows\system32\drivers\isapnp.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Critical	No	Yes			
kbdclass	Keyboard Class Driver							
	c:\windows\system32\drivers\kbdclass.sys							
	Kernel Driver	Yes	System					
	Running	OK	Normal	No	Yes			
kbdhid	Keyboard HID Driver							
	c:\windows\system32\drivers\kbdhid.sys							
	Kernel Driver	Yes	System					
	Running	OK	Ignore	No	Yes			
ksecdd	KSecDD							
	c:\windows\system32\drivers\ksecdd.sys							
	Kernel Driver	Yes	Boot					
	Running	OK	Normal	No	Yes			

ksthunk	Kernel Streaming WOW64 Thunk Service c:\windows\system32\drivers\ksthunk.sys Kernel Driver Yes Manual Running OK Normal No Yes	File System Driver Yes Boot Running OK Normal No Yes	Kernel Driver No Manual Stopped OK Ignore No No
l2nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52a.sys Kernel Driver Yes Manual Running OK Normal No Yes	n1000 HP Gigabit NIC Driver c:\windows\system32\drivers\nlg5132e.sys Kernel Driver No Manual Stopped OK Normal No No	partmgr Partition Manager c:\windows\system32\drivers\partmgr.sys Kernel Driver Yes Boot Running OK Normal No Yes
lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK Normal No No	ndis NDIS System Driver c:\windows\system32\drivers\ndis.sys Kernel Driver Yes Boot Running OK Normal No Yes	pci PCI Bus Driver c:\windows\system32\drivers\pci.sys Kernel Driver Yes Boot Running OK Critical No Yes
mnmdd	mnmdd c:\windows\system32\drivers\mnmdd.sys Kernel Driver Yes System Running OK Ignore No Yes	ndistapi Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys Kernel Driver Yes Manual Running OK Normal No Yes	pciide PCIIDE c:\windows\system32\drivers\pciide.sys Kernel Driver Yes Boot Running OK Normal No Yes
modem	Modem c:\windows\system32\drivers\modem.sys Kernel Driver No Manual Stopped OK Ignore No No	ndisuio NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisuio.sys Kernel Driver No Manual Stopped OK Normal No No	pcmcia Pcmcia c:\windows\system32\drivers\pcmcia.sys Kernel Driver No Disabled Stopped OK Normal No No
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys Kernel Driver Yes System Running OK Normal No Yes	ndiswan Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys Kernel Driver Yes Manual Running OK Normal No Yes	pdcomp PDCOMP Not Available Kernel Driver No Manual Stopped OK Ignore No No
mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys Kernel Driver Yes Manual Running OK Ignore No Yes	ndproxy NDIS Proxy c:\windows\system32\drivers\ndproxy.sys Kernel Driver Yes Manual Running OK Normal No Yes	pdframe PDFRAME Not Available Kernel Driver No Manual Stopped OK Ignore No No
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys Kernel Driver Yes Boot Running OK Normal No Yes	netbios NetBIOS Interface c:\windows\system32\drivers\netbios.sys File System Driver Yes System Running OK Normal No Yes	pdreli PDRELI Not Available Kernel Driver No Manual Stopped OK Ignore No No
mraid35x	mraid35x Not Available Kernel Driver No Disabled Stopped OK Normal No No	netbt NetBios over Tcpip c:\windows\system32\drivers\netbt.sys Kernel Driver Yes System Running OK Normal No Yes	pdrframe PDRFRAME Not Available Kernel Driver No Manual Stopped OK Ignore No No
mrxdav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys File System Driver No Manual Stopped OK Normal No No	nfrd960 nfrd960 Not Available Kernel Driver No Disabled Stopped OK Normal No No	pptpminiport WAN Miniport (PPTP) c:\windows\system32\drivers\rasppptp.sys Kernel Driver Yes Manual Running OK Normal No Yes
mrxsmb	MRXSMB c:\windows\system32\drivers\mrxsmb.sys File System Driver Yes System Running OK Normal No Yes	npfs Npfs c:\windows\system32\drivers\npfs.sys File System Driver Yes System Running OK Normal No Yes	ptilink Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys Kernel Driver Yes Manual Running OK Normal No Yes
msfs	Msfs c:\windows\system32\drivers\msfs.sys File System Driver Yes System Running OK Normal No Yes	ntfs Ntfs c:\windows\system32\drivers\ntfs.sys File System Driver Yes Disabled Running OK Normal No Yes	ql2300 QLogic Fibre Channel SCSI Miniport Driver (wx64 IP) c:\windows\system32\drivers\ql2300.sys Kernel Driver Yes Boot Running OK Normal No Yes
mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys Kernel Driver Yes Manual Running OK Normal No Yes	null Null c:\windows\system32\drivers\null.sys Kernel Driver Yes System Running OK Normal No Yes	rasacd Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys Kernel Driver Yes System Running OK Normal No Yes
mup	Mup c:\windows\system32\drivers\mup.sys	parport Parport c:\windows\system32\drivers\parport.sys	rasl2tp WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys Kernel Driver Yes Manual Running OK Normal No Yes
			rasppoe Remote Access PPPOE Driver c:\windows\system32\drivers\rasppoe.sys Kernel Driver Yes Manual

	Running	OK	Normal	No	Yes
raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys				
	File System Driver	Yes	System		
	Running	OK	Normal	No	Yes
rdpcdd	RDPcDD c:\windows\system32\drivers\rdpcdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
secdrv	Security Driver c:\windows\system32\drivers\secdrv.sys				
	Kernel Driver	Yes	Auto		
	Running	OK	Normal	No	Yes
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
serial	Serial port driver c:\windows\system32\drivers\serial.sys				
	Kernel Driver	No	System		
	Stopped	OK	Ignore	No	No
sfloppy	High-Capacity Floppy Disk Drive c:\windows\system32\drivers\sfloppy.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
simbad	Simbad	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
srv	Srv c:\windows\system32\drivers\srv.sys				
	File System Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
swenum	Software Bus Driver c:\windows\system32\drivers\swenum.sys				
	Kernel Driver	Yes	Manual		

	Running	OK	Normal	No	Yes
symc8xx	symc8xx No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
symmpi	symmpi No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
sym_hi	sym_hi No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
sym_u3	sym_u3 No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
tcpip	TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
tdpipe	TDPIPE c:\windows\system32\drivers\tdpipe.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
tdtcp	TDTCP c:\windows\system32\drivers\tdtcp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Ignore	No	Yes
termdd	Terminal Device Driver c:\windows\system32\drivers\termdd.sys				
	Kernel Driver	Yes	System		
	Running	OK	Normal	No	Yes
toside	TosIde No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
udfs	Udfs c:\windows\system32\drivers\udfs.sys				
	File System Driver	No	Disabled		
	Stopped	OK	Normal	No	No
ultra	ultra No Normal				
	Not Available	Disabled	Stopped	OK	
	No	No	No		
update	Microcode Update Driver c:\windows\system32\drivers\update.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbccgp	Microsoft USB Generic Parent Driver c:\windows\system32\drivers\usbccgp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbehci	Microsoft USB 2.0 Enhanced Host Controller Miniport Driver c:\windows\system32\drivers\usbehci.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
usbhub	Microsoft USB Standard Hub Driver c:\windows\system32\drivers\usbhub.sys				

	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
usbstor	USB Mass Storage Driver c:\windows\system32\drivers\usbstor.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
usbuhci	Microsoft USB Universal Host Controller Miniport Driver c:\windows\system32\drivers\usbuhci.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
vga	vga c:\windows\system32\drivers\vgapnp.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Ignore	No	No
vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys				
	Kernel Driver	Yes	System		
	Running	OK	Ignore	No	Yes
viaide	ViaIde	Not Available		Kernel Driver	
	No	Disabled	Stopped	OK	
	Normal	No	No		
volsnap	Storage volumes c:\windows\system32\drivers\volsnap.sys				
	Kernel Driver	Yes	Boot		
	Running	OK	Normal	No	Yes
wanarp	Remote Access IP ARP Driver c:\windows\system32\drivers\wanarp.sys				
	Kernel Driver	Yes	Manual		
	Running	OK	Normal	No	Yes
wdica	WDICA	Not Available		Kernel Driver	
	No	Manual	Stopped	OK	
	Ignore	No	No		
wlbs	Network Load Balancing c:\windows\system32\drivers\wlbs.sys				
	Kernel Driver	No	Manual		
	Stopped	OK	Normal	No	No
[Signed Drivers]					
Device Name	Signed	Device Class			
Driver Version	Manufacturer	Driver Date	INF Name	Driver Name	Device ID
Microsoft	System Management	BIOS Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)	machine.inf	Not Available
Microcode Update Device	Yes	SYSTEM			
5.2.3790.1830	10/1/2002	(Standard			
system devices)	machine.inf	Not Available			
ROOT\SYSTEM\0001					
Plug and Play Software Device Enumerator		Yes			
SYSTEM	5.2.3790.1830	10/1/2002			

(Standard system devices)	machine.inf		
Not Available	ROOT\SYSTEM\0000		
Terminal Server Mouse Driver	Yes	SYSTEM	
5.2.3790.1830	10/1/2002	(Standard	
system devices)	machine.inf	Not Available	
ROOT\RDP_MOU\0000			
Terminal Server Keyboard Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf		
Not Available	ROOT\RDP_KBD\0000		
Terminal Server Device Redirector	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	
(Standard system devices)	machine.inf		
Not Available	ROOT\RDPDR\0000		
Direct Parallel	Yes	NET	5.2.3790.1830
10/1/2002	Microsoft	netrasa.inf	Not
Available	ROOT\MS_PTMINIPORT\0000		
WAN Miniport (PPTP)	Yes	NET	5.2.3790.1830
10/1/2002	Microsoft	netrasa.inf	Not
Available	ROOT\MS_PPTPMINIPORT\0000		
WAN Miniport (PPPOE)	Yes	NET	
5.2.3790.1830	10/1/2002	Microsoft	
netrasa.inf	Not Available		
ROOT\MS_PPPOEMINIPORT\0000			
WAN Miniport (IP)	Yes	NET	5.2.3790.1830
10/1/2002	Microsoft	netrasa.inf	Not
Available	ROOT\MS_NDISWANIP\0000		
WAN Miniport (L2TP)	Yes	NET	5.2.3790.1830
10/1/2002	Microsoft	netrasa.inf	Not
Available	ROOT\MS_L2TPMINIPORT\0000		
Video Codecs	Yes	MEDIA	5.2.3790.1830
10/1/2002	(Standard system devices)		
wave.inf	Not Available		
ROOT\MEDIA\MS_MMVID			
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMVCD			
Media Control Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMMCI			
Legacy Audio Drivers	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)	wave.inf	Not Available	
ROOT\MEDIA\MS_MMDRV			
Audio Codecs	Yes	MEDIA	5.2.3790.1830
10/1/2002	(Standard system devices)		
wave.inf	Not Available		
ROOT\MEDIA\MS_MMACH			
Remote Access IP ARP Driver	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_WANARP\0000		
volsnap	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		
ROOT\LEGACY_VOLSNAP\0000			
VGA Display Controller.	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_VGASAVE\0000		

TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_TDTCP\0000	
TCP/IP Protocol Driver	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_TCPIP\0000		
Security Driver	Not Available	LEGACYDRIVER	
Not Available			Not
Available	Not Available		Not
Available	ROOT\LEGACY_SECDRV\0000		
RDPWD	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_RDPWD\0000	
RDPCCD	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_RDPCCD\0000	
Remote Access Auto Connection Driver	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_RASACD\0000		
QLogic Fibre Channel SCSI Miniport Driver (wx64 IP)	Not Available		
Not Available		LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_QL2300\0000	
Partition Manager	Not Available	LEGACYDRIVER	
Not Available			Not
Available	Not Available		Not
Available	ROOT\LEGACY_PARTMGR\0000		
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_NULL\0000	
NetBios over Tcpip	Not Available	LEGACYDRIVER	
Not Available			Not
Available	Not Available		Not
Available	ROOT\LEGACY_NETBT\0000		
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		
ROOT\LEGACY_NDPROXY\0000			
NDIS Usermode I/O Protocol	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_NDISUIO\0000		
Remote Access NDIS TAPI Driver	Not Available		
LEGACYDRIVER	Not Available		Not
Available	Not Available		Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS System Driver	Not Available	LEGACYDRIVER	
Not Available			Not
Available	Not Available		Not
Available	ROOT\LEGACY_NDIS\0000		
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		
ROOT\LEGACY_MOUNTMGR\0000			
modem	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not

Available	Not Available		ROOT\LEGACY_MODEM\0000
mnmdd	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_MNMDD\0000	
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_KSECDD\0000	
IPSEC driver	Not Available	LEGACYDRIVER	
Not Available			Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_IPSEC\0000	
IP Network Address Translator	Not Available		
LEGACYDRIVER			Not
Available	Not Available		Not
Available	ROOT\LEGACY_IPNAT\0000		
HpCISSs2	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_HPCISSS2\0000	
Generic Packet Classifier	Not Available		
LEGACYDRIVER			Not
Available	Not Available		Not
Available	ROOT\LEGACY_GPC\0000		
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_FIPS\0000	
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_DMLoad\0000	
dmboot	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
CRC Disk Filter Driver	Not Available		
LEGACYDRIVER			Not
Available	Not Available		Not
Available	ROOT\LEGACY_CRCDISK\0000		
CdaD10BA	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		
ROOT\LEGACY_CDAD10BA\0000			
CdaC15BA	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available		
Available	ROOT\LEGACY_CDAC15BA\0000		
Beep	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_BEEP\0000	
AFD	Not Available	LEGACYDRIVER	Not
Available	Not Available		Not
Available	Not Available	ROOT\LEGACY_AFD\0000	
Generic volume	Yes	VOLUME	5.2.3790.1830
Available	10/1/2002	Microsoft	volume.inf
Not Available			Not
STORAGE\VOLUME\1&30A96598&0&SIGNATURE9A069A			
06OFFSET4000LENGTH8787EC00			


```

system devices) machine.inf Not Available
ACPI\FIXEDBUTTON\2dDABA3FF&0
ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\THERMALZONE\THM0
Secondary IDE Channel Yes HDC
5.2.3790.1830 10/1/2002 (Standard IDE
ATA/ATAPI controllers) mshdc.inf Not Available
PCIIDE\DECHANNEL\4&56E2F28&0&1
CD-ROM Drive Yes CDROM 5.2.3790.1830
10/1/2002 (Standard CD-ROM drives)
cdrom.inf Not Available IDE\CDROMHL-
DT-ST_CD-ROM_GCR-
8482B 2.09 \5&5FD9AC6&0&0.0.0
Primary IDE Channel Yes HDC 5.2.3790.1830
10/1/2002 (Standard IDE ATA/ATAPI
controllers) mshdc.inf Not Available
PCIIDE\DECHANNEL\4&56E2F28&0&0
Standard Dual Channel PCI IDE Controller Yes
HDC 5.2.3790.1830 10/1/2002
(Standard IDE ATA/ATAPI controllers)
mshdc.inf Not Available
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F9
Standard floppy disk controller Yes FDC
5.2.3790.1830 10/1/2002 (Standard
floppy disk controllers) fdcc.inf Not Available
ACPI\PNP0700\5&33D3B1FA&0
Extended IO Bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A06\4&2AA4AD3D&0
PS/2 Compatible Mouse Yes MOUSE
5.2.3790.1830 10/1/2002 Microsoft
mmouse.inf Not Available
ACPI\PNP0F13\4&2AA4AD3D&0
Standard 101/102-Key or Microsoft Natural PS/2
Keyboard Yes KEYBOARD 5.2.3790.1830
10/1/2002 (Standard keyboards)
keyboard.inf Not Available
ACPI\PNP0303\4&2AA4AD3D&0
System speaker Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0800\4&2AA4AD3D&0
Direct memory access controller Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
ACPI\PNP0200\4&2AA4AD3D&0
High precision event timer Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0103\0
System timer Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0100\4&2AA4AD3D&0
Not Available Not Available Not Available
Available Not Available Not Available Not
ACPI\IPI0001\0

```

```

Motherboard resources Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\PNP0C02\0
PCI standard ISA bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_2670&SUBSYS_00000000&REV_0
9\3&61AAA01&0&F8
HP ProLiant iLO 2 Management Controller Driver No
SYSTEM 1.1.0.0 4/14/2006 Hewlett-
Packard Company oeml8.inf Not Available
PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0
0\4&2014205D&0&26F0
Generic USB Hub Yes USB 5.2.3790.1830
10/1/2002 (Generic USB Hub) usb.inf Not
Available USB\VID_03F0&PID_1327\6&18FFBC52&0&2
HID-compliant mouse Yes MOUSE 5.2.3790.1830
10/1/2002 Microsoft msmouse.inf Not
Available
HID\VID_03F0&PID_1027&MI_01\8&25B103E6&0&00
00
USB Human Interface Device Yes HIDCLASS
5.2.3790.1830 10/1/2002 (Standard
system devices) input.inf Not Available
USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
01
HID Keyboard Device Yes KEYBOARD 5.2.3790.1830
10/1/2002 (Standard keyboards)
keyboard.inf Not Available
HID\VID_03F0&PID_1027&MI_00\8&DED77A1&0&000
0
USB Human Interface Device Yes HIDCLASS
5.2.3790.1830 10/1/2002 (Standard
system devices) input.inf Not Available
USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
00
USB Composite Device Yes USB
5.2.3790.1830 10/1/2002 (Standard USB
Host Controller) usb.inf Not Available
USB\VID_03F0&PID_1027\6&18FFBC52&0&1
USB Root Hub Yes USB 5.2.3790.1830
10/1/2002 (Standard USB Host Controller)
usbport.inf Not Available
USB\ROOT_HUB\5&26BC3420&0
Standard Universal PCI to USB Host Controller Yes
USB 5.2.3790.1830 10/1/2002
(Standard USB Host Controller)
usbport.inf Not Available
PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0
0\4&2014205D&0&24F0
Base System Device Not Available UNKNOWN Not
Available Not Available Not Available Not
Available Not Available
PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0
3\4&2014205D&0&22F0
HP ProLiant iLO 2 Legacy Support Function No
SYSTEM 1.1.0.0 4/14/2006 Hewlett-
Packard Company oeml8.inf Not Available
PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0
3\4&2014205D&0&20F0
Default Monitor Yes MONITOR 5.2.3790.1830
10/1/2002 (Standard monitor types)

```

```

monitor.inf Not Available
DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000000
&01&03
Plug and Play Monitor Yes MONITOR
5.2.3790.1830 10/1/2002 (Standard
monitor types) monitor.inf Not Available
DISPLAY\AVO0000\5&E64F3B&0&10000081&01&03
ATI ES1000 Yes DISPLAY 8.19.4.0
12/6/2005 ATI Technologies Inc.
oeml7.inf Not Available
PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
2\4&2014205D&0&18F0
Intel(R) 82801 PCI Bridge - 244E Yes
SYSTEM 5.2.3790.1830 10/1/2002
Intel machine.inf Not Available
PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_D
9\3&61AAA01&0&F0
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 2.6.14.0 4/3/2006 Hewlett-
Packard Company oem32.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_11\6&253A0954&1&20050500
HP NC373i Virtual Bus Device Yes SYSTEM
2.6.17.0 4/21/2006 Hewlett-Packard Company
oem31.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
1\5&DE7916A&0&0000E1
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
2\4&110C88BD&0&00E1
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2692&SUBSYS_00000000&REV_0
9\3&61AAA01&0&E1
HP NC373i Multifunction Gigabit Server Adapter Yes
NET 2.6.14.0 4/3/2006 Hewlett-
Packard Company oem32.inf Not Available
B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_11\6&2826E01F&1&20050300
HP NC373i Virtual Bus Device Yes SYSTEM
2.6.17.0 4/21/2006 Hewlett-Packard Company
oem31.inf Not Available
PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
1\5&2EADD4B0&0&0000E0
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
2\4&187919FE&0&00E0
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_2690&SUBSYS_00000000&REV_0
9\3&61AAA01&0&E0

```



```

oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&4
67B63D&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem11.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&3526FF9F&0&0028
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_9
3\3&61AAA01&0&28
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available

```

```

HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0B00004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0A00004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
B3ADDEA&0&0100004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem11.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&24699CD&0&0020

```

```

PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E4&SUBSYS_00000000&REV_9
3\3&61AAA01&0&20
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
5C802C8&0&0100004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem11.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&3028BA6E&0&0018
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_9
3\3&61AAA01&0&18
Disk drive Yes DISKDRIVE 5.2.3790.1830
10/1/2002 (Standard disk drives)
disk.inf Not Available
SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
28\6&ABB8C96&0&040
HP Virtual LUN Yes SYSTEM 5.2.3790.1830
10/1/2002 Compaq scsidev.inf Not
Available
SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
&REV_CISS\6&ABB8C96&0&000
Smart Array Controller Yes SCSIADAPTER
5.2.3790.1830 10/1/2002 Compaq
pnpscsi.inf Not Available
PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&35DD332E&0&100310
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
1\4&276E5639&0&0310
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
1\5&36FA8587&0&100010
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0B00004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0A00004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available

```



```

HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0100004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&2
47B7B6&0&0000004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem11.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\6&1225CAAD&0&00080010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
1\5&36FA8587&0&080010
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0B00004000000000

```

```

Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0A00004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0900004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0800004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0700004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0600004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0500004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0400004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0300004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0200004000000000
Smart Array Logical Volume No DISKDRIVE
5.8.2.64 2/25/2005 Hewlett-Packard
oem9.inf Not Available
HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&3
04F207C&0&0100004000000000
Smart Array P800 Controller (Non-Miniport) No
SCSIADAPTER 5.18.2.64 1/23/2006
Hewlett-Packard oem11.inf Not Available
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\6&1A6A5B31&0&00000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf

```

```

Not Available
PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
1\5&36FA8587&0&000010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
1\4&276E5639&0&0010
PCI standard PCI-to-PCI bridge Yes
SYSTEM 5.2.3790.1830 10/1/2002
(Standard system devices) machine.inf
Not Available
PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_9
3\3&61AAA01&0&10
PCI standard host CPU bridge Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_9
3\3&61AAA01&0&00
PCI bus Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\PNP0A03\2&DABA3FF&0
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_15\7
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_15\6
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_15\1
Intel Processor Yes PROCESSOR 5.2.3790.1830
10/1/2002 Intel cpu.inf Not Available
ACPI\GENUINEINTEL_-
_EM64T_FAMILY_6_MODEL_15\0
Microsoft ACPI-Compliant System Yes
SYSTEM 5.2.3790.1830 10/1/2002
Microsoft acpi.inf Not Available
ACPI_HAL\PNP0C08\0
ACPI Multiprocessor x64-based PC Yes
COMPUTER 5.2.3790.1830 10/1/2002
(Standard computers) hal.inf Not
Available ROOT\ACPI_HAL\0000
Not Available Not Available Not Available
Available Not Available Not Available
HTREE\ROOT\0

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem\C:\Program Files (x86)\Microsoft
SQL Server\80\Tools\Binn\C:\Program Files\Microsoft
SQL Server\90\Tools\Binn\C:\Program Files
(x86)\Microsoft SQL Server\90\Tools\Binn\C:\Program

```

```

Files (x86)\Microsoft SQL
Server\90\DTSP\Binn\;C:\Program Files (x86)\Microsoft
SQL
Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program
Files (x86)\Microsoft Visual Studio
8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER EM64T Family 6 Model 15
Stepping 4, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0f04 <SYSTEM>
NUMBER_OF_PROCESSORS 4 <SYSTEM>
ClusterLog C:\WINDOWS\cluster\cluster.log
<SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TMP %USERPROFILE%\Local Settings\Temp NT
AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp
GENGHIS\Administrator
TMP %USERPROFILE%\Local Settings\Temp
GENGHIS\Administrator

[Print Jobs]

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Print
Processor Host Print Queue Data Type Name

[Network Connections]

Local Name Remote Name Type
Status User Name

[Running Tasks]

Name Path Process ID Priority Min
Working Set Max Working Set Start Time
Version Size File Date
system idle process Not Available 0 0
Not Available Not Available Not
Available Not Available Not Available Not
Available
system Not Available 4 8 0
1413120 Not Available Not Available
Not Available Not Available

```

```

smss.exe Not Available 632 11
204800 1413120 5/18/2006 2:41 PM Not
Available Not Available
csrss.exe Not Available 904 13 Not
Available Not Available 5/18/2006 2:43 PM Not
Available Not Available Not Available
winlogon.exe c:\windows\system32\winlogon.exe
980 13 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 901.00 KB (922,624
bytes) 3/25/2005 6:00 AM
services.exe c:\windows\system32\services.exe
220 9 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 216.50 KB (221,696
bytes) 3/25/2005 6:00 AM
lsass.exe c:\windows\system32\lsass.exe 248 9
204800 1413120 5/18/2006 2:43 PM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
14.00 KB (14,336 bytes) 3/25/2005
6:00 AM
svchost.exe c:\windows\system32\svchost.exe
460 8 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
svchost.exe Not Available 588 8
Not Available Not Available
5/18/2006 2:43 PM Not Available Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
688 8 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
msdtc.exe Not Available 724 8 Not
Available Not Available 5/18/2006 2:43 PM Not
Available Not Available
svchost.exe c:\windows\system32\svchost.exe
852 8 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
tssdis.exe c:\windows\system32\tssdis.exe
936 8 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 97.50 KB (99,840 bytes)
1/5/2006 11:23 AM
explorer.exe c:\windows\explorer.exe
1528 8 204800 1413120
5/18/2006 2:43 PM 6.00.3790.1830
(srv03_spl_rtm.050324-1447) 1.30 MB (1,364,480
bytes) 3/25/2005 6:00 AM
svchost.exe c:\windows\system32\svchost.exe
1612 8 204800 1413120
5/18/2006 2:43 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 24.50 KB (25,088 bytes)
3/25/2005 6:00 AM
wmiprvse.exe Not Available 236 8
Not Available Not Available
5/18/2006 2:43 PM Not Available Not
Available Not Available

```

```

sqlservr.exe c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe 1484 13
204800 1413120 5/18/2006 2:45 PM
2005.090.2047.00 37.44 MB (39,263,520
bytes) 4/14/2006 11:59 AM
cmd.exe c:\windows\system32\cmd.exe 628 8
204800 1413120 5/18/2006 6:20 PM
5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 3/25/2005
6:00 AM
notepad.exe c:\windows\system32\notepad.exe
1120 8 204800 1413120
5/18/2006 7:04 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 86.00 KB (88,064 bytes)
3/25/2005 6:00 AM
helpctr.exe c:\windows\pchealth\helpctr\binaries\helpct
r.exe 1812 8 204800 1413120
5/18/2006 7:08 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 1.30 MB (1,363,456
bytes) 1/5/2006 11:25 AM
wmiprvse.exe Not Available 1840 8
Not Available Not Available
5/18/2006 7:09 PM Not Available Not
Available Not Available
helpsvc.exe c:\windows\pchealth\helpctr\binaries\helpsv
c.exe 676 8 204800 1413120
5/18/2006 7:09 PM 5.2.3790.1830
(srv03_spl_rtm.050324-1447) 1.52 MB (1,591,296
bytes) 1/5/2006 11:25 AM

[Loaded Modules]

Name Version Size File Date Manufacturer
Path
winlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
901.00 KB (922,624 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\winlogon.exe
ntdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.20 MB (1,257,472 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\ntdll.dll
kernel32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.43 MB (1,500,160 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\kernel32.dll
advapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.00 MB (1,051,136 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\advapi32.dll
rpcrt4 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.63 MB (1,714,176 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\rpcrt4.dll
crypt32 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
1.36 MB (1,428,992 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\crypt32.dll
msasn1 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
152.50 KB (156,160 bytes) 3/25/2005

```

6:00 AM Microsoft Corporation
 c:\windows\system32\msasn1.dll
 msvcr7 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
 508.00 KB (520,192 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\msvcr7.dll
 user32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.04 MB (1,085,952 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\user32.dll
 gdi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 592.00 KB (606,208 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\gdi32.dll
 nddeapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 25.00 KB (25,600 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\nddeapi.dll
 profmap 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 36.00 KB (36,864 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\profmap.dll
 netapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 589.00 KB (603,136 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\netapi32.dll
 userenv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.02 MB (1,069,056 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\userenv.dll
 psapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 29.00 KB (29,696 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\psapi.dll
 regapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 108.50 KB (111,104 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\regapi.dll
 secur32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 120.00 KB (122,880 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\secur32.dll
 setupapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.45 MB (1,523,200 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\setupapi.dll
 version 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 28.00 KB (28,672 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\version.dll
 winsta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 89.00 KB (91,136 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\winsta.dll
 ws2_32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 176.50 KB (180,736 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ws2_32.dll
 ws2help 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 30.50 KB (31,232 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ws2help.dll

msgina 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.14 MB (1,193,472 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\msgina.dll
 shsvcs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 193.50 KB (198,144 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\shsvcs.dll
 shlwapi 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 606.50 KB (621,056 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\shlwapi.dll
 sfc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 6.00 KB (6,144 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\sfc.dll
 sfc_os 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 183.50 KB (187,904 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\sfc_os.dll
 wintrust 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
 297.50 KB (304,640 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wintrust.dll
 imagehlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 57.50 KB (58,880 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\imagehlp.dll
 ole32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 2.43 MB (2,543,616 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ole32.dll
 comctl32 6.0 (srv03_spl_rtm.050324-1447)
 1.51 MB (1,584,128 bytes) 1/5/2006 5:09
 AM Microsoft Corporation
 c:\windows\winsxs\amd64_microsoft.windows.c
 ommon-controls_6595b64144ccfd5f_6.0.3790.1830_x-
 ww_aced72af\comctl32.dll
 winscard 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 230.00 KB (235,520 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\winscard.dll
 wtsapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 29.00 KB (29,696 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wtsapi32.dll
 winmm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 303.50 KB (310,784 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\winmm.dll
 shell32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 10.01 MB (10,492,416 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\shell32.dll
 sxss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 1.91 MB (2,003,968 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\sxss.dll
 rsaenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 241.96 KB (247,768 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\rsaenh.dll

wldap32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 390.00 KB (399,360 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wldap32.dll
 csddl 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 151.50 KB (155,136 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\csddl.dll
 dimntfy 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 28.00 KB (28,672 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\dimntfy.dll
 wlnotify 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 148.00 KB (151,552 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\wlnotify.dll
 mpr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 115.00 KB (117,760 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\mpr.dll
 oleaut32 5.2.3790.1830 1.06 MB (1,116,160
 bytes) 3/25/2005 6:00 AM Microsoft Corporation
 c:\windows\system32\oleaut32.dll
 winspool 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 247.00 KB (252,928 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\winspool.drv
 comctl32 5.82 (srv03_spl_rtm.050324-1447)
 934.50 KB (956,928 bytes) 1/5/2006 5:09
 AM Microsoft Corporation
 c:\windows\winsxs\amd64_microsoft.windows.c
 ommon-controls_6595b64144ccfd5f_5.82.3790.1830_x-
 ww_4d792d2a\comctl32.dll
 uxtheme 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
 494.50 KB (506,368 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\uxtheme.dll
 samlib 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 69.00 KB (70,656 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\samlib.dll
 csui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 441.00 KB (451,584 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\csui.dll
 clbcatq 2001.12.4720.1830 (srv03_spl_rtm.050324-
 1447) 865.00 KB (885,760 bytes) 1/5/2006
 11:23 AM Microsoft Corporation
 c:\windows\system32\clbcatq.dll
 comres 2001.12.4720.1830 (srv03_spl_rtm.050324-
 1447) 779.50 KB (798,208 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\comres.dll
 ntmarta 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 222.50 KB (227,840 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\ntmarta.dll
 xpsp2res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 2.77 MB (2,899,456 bytes) 3/25/2005
 6:00 AM Microsoft Corporation
 c:\windows\system32\xpsp2res.dll
 wbemprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
 38.00 KB (38,912 bytes) 1/5/2006

11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll
wbemcomn 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
524.00 KB (536,576 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcomn.dll
wbemsvcs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
58.00 KB (59,392 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wbemsvcs.dll
fastprox 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
866.50 KB (887,296 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\fastprox.dll
msvcp60 7.0.3790.1830 (srv03_spl_rtm.050324-1447)
919.50 KB (941,568 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msvcp60.dll
ntdsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
127.50 KB (130,560 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntdsapi.dll
dnsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
297.50 KB (304,640 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\dnsapi.dll
services 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
216.50 KB (221,696 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\services.exe
ncobjapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
80.00 KB (81,920 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ncobjapi.dll
scesrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
594.50 KB (608,768 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\scesrv.dll
authz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
167.00 KB (171,008 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\authz.dll
umpnpmgr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
205.00 KB (209,920 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\umpnpmgr.dll
eventlog 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
127.00 KB (130,048 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\eventlog.dll
lsass 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
14.00 KB (14,336 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\lsass.exe
lsasrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.50 MB (1,568,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\lsasrv.dll
samsvr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.01 MB (1,059,328 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\samsvr.dll

cryptdll 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
47.00 KB (48,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cryptdll.dll
msprivs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
47.50 KB (48,640 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msprivs.dll
kerberos 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
698.00 KB (714,752 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\kerberos.dll
msvl_0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
253.00 KB (259,072 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msvl_0.dll
iphlpapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
177.00 KB (181,248 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\iphlpapi.dll
netlogon 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
666.00 KB (681,984 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netlogon.dll
w32time 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
400.50 KB (410,112 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\w32time.dll
schannel 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
248.00 KB (253,952 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\schannel.dll
wdigest 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
130.50 KB (133,632 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wdigest.dll
rassfm 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
36.00 KB (36,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rassfm.dll
kdcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
409.00 KB (418,816 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\kdcsvc.dll
ntdsa 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.81 MB (2,948,096 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntdsa.dll
esent 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.26 MB (2,366,976 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\esent.dll
ntdsatq 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
51.00 KB (52,224 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntdsatq.dll
mwssock 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
478.00 KB (489,472 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mwssock.dll
scecli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
308.00 KB (315,392 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\scecli.dll
ws03res 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
794.00 KB (813,056 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ws03res.dll
pstorsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
36.00 KB (36,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\pstorsvc.dll
psbase 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
124.00 KB (126,976 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\psbase.dll
hnetcfg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
561.00 KB (574,464 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\hnetcfg.dll
wshtcpip 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
29.00 KB (29,696 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wshtcpip.dll
dssenh 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
226.96 KB (232,408 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\dssenh.dll
svchost 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.50 KB (25,088 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\svchost.exe
rpcss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
672.00 KB (688,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rpcss.dll
wiarpc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
57.00 KB (58,368 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wiarpc.dll
aelupsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
31.50 KB (32,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\aelupsvc.dll
apphelp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
241.00 KB (246,784 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\apphelp.dll
cryptsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
114.00 KB (116,736 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cryptsvc.dll
certcli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
372.00 KB (380,928 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\certcli.dll
atl 3.05.2284.96.50 KB (98,816 bytes)
3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\atl.dll
vssapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.26 MB (1,320,960 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\vssapi.dll
es 2001.12.4720.1830 (srv03_spl_rtm.050324-1447)
357.00 KB (365,568 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\es.dll
srvsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
156.50 KB (160,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\srsvsc.dll
wmisvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
227.00 KB (232,448 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wmisvc.dll
sens 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
63.50 KB (65,024 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\sens.dll
comsvcs 2001.12.4720.1830 (srv03_spl_rtm.050324-1447)
2.06 MB (2,156,544 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\comsvcs.dll
netman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
457.00 KB (467,968 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netman.dll
mprapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
154.50 KB (158,208 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mprapi.dll
activeds 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
348.50 KB (356,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\activeds.dll
adslfdc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
240.50 KB (246,272 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\adslfdc.dll
credui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
202.00 KB (206,848 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\credui.dll
rtutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
66.00 KB (67,584 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rtutils.dll
netshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
2.32 MB (2,437,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netshell.dll
clusapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
127.00 KB (130,048 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\clusapi.dll
rasapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
410.00 KB (419,840 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasapi32.dll
rasman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
95.50 KB (97,792 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasman.dll
tapi32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
332.50 KB (340,480 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\tapi32.dll

wininet 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.13 MB (1,186,304 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wininet.dll
wzcsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
49.00 KB (50,176 bytes) 3/24/2005
11:35 AM Microsoft Corporation
c:\windows\system32\wzcsapi.dll
wzcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
492.00 KB (503,808 bytes) 3/24/2005
11:35 AM Microsoft Corporation
c:\windows\system32\wzcsvc.dll
wmi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
5.50 KB (5,632 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wmi.dll
dhcpcsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
219.00 KB (224,256 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\dhcpcsvc.dll
wbemcore 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.24 MB (1,299,968 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcore.dll
esscli 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
626.50 KB (641,536 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\esscli.dll
wmiutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
171.00 KB (175,104 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wmiutils.dll
repdrvfs 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
353.50 KB (361,984 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\repdrvfs.dll
wmiprvsd 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
743.00 KB (760,832 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wmiprvsd.dll
wbemess 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
532.50 KB (545,280 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wbemess.dll
rasdlg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
859.50 KB (880,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasdlg.dll
ncprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
73.00 KB (74,752 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\ncprov.dll
netcfgx 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.29 MB (1,354,240 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netcfgx.dll
winipsec 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
52.50 KB (53,760 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\winipsec.dll
ntlsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
11.00 KB (11,264 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\ntlsapi.dll
pchsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
76.00 KB (77,824 bytes) 1/5/2006
11:26 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\pchsvc
.dll
wbemcons 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
65.50 KB (67,072 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\wbem\wbemcons.dll
ersvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
31.00 KB (31,744 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ersvc.dll
tssdis 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
97.50 KB (99,840 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\tssdis.exe
resutils 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
98.50 KB (100,864 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\resutils.dll
explorer 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,364,480 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\explorer.exe
browseui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.53 MB (1,601,536 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browseui.dll
shdocvw 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
2.30 MB (2,416,128 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdocvw.dll
cryptui 5.131.3790.1830 (srv03_spl_rtm.050324-1447)
705.50 KB (722,432 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cryptui.dll
themeui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
530.50 KB (543,232 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\themeui.dll
msimg32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.50 KB (6,656 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\msimg32.dll
actxprxy 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
220.50 KB (225,792 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\actxprxy.dll
linkinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\linkinfo.dll
ntshrui 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
184.00 KB (188,416 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntshrui.dll
browselc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
63.00 KB (64,512 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\browselc.dll

urlmon 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.02 MB (1,074,176 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32?urlmon.dll
mlang 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
686.00 KB (702,464 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mlang.dll
webcheck 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
439.00 KB (449,536 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\webcheck.dll
wsock32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.50 KB (25,088 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\wsock32.dll
stobject 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
142.50 KB (145,920 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\stobject.dll
batmeter 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
41.50 KB (42,496 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\batmeter.dll
powrprof 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
32.50 KB (33,280 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\powrprof.dll
shdoclc 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
589.50 KB (603,648 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\shdoclc.dll
diskcopy 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
1.44 MB (1,507,840 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\diskcopy.dll
mydocs 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
101.00 KB (103,424 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mydocs.dll
zipfldr 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
449.50 KB (460,288 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\zipfldr.dll
mprui 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
67.50 KB (69,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mprui.dll
netui0 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
130.00 KB (133,120 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netui0.dll
netui2 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
542.00 KB (555,008 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netui2.dll
comdlg32 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
446.50 KB (457,216 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\comdlg32.dll
netui1 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
338.50 KB (346,624 bytes) 3/25/2005

6:00 AM Microsoft Corporation
c:\windows\system32\netui1.dll
netmsg 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
179.00 KB (183,296 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netmsg.dll
netplwiz 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
938.50 KB (961,024 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\netplwiz.dll
drprov 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
24.00 KB (24,576 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\drprov.dll
ntlanman 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
71.50 KB (73,216 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\ntlanman.dll
davclnt 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
38.00 KB (38,912 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\davclnt.dll
wsheht 5.6.0.8827 80.00 KB (81,920 bytes)
3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\wsheht.dll
termsrv 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
354.50 KB (363,008 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\termsrv.dll
icaapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
27.50 KB (28,160 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\icaapi.dll
mstlsapi 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
187.00 KB (191,488 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mstlsapi.dll
rdpwsx 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
170.13 KB (174,216 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\rdpwsx.dll
sqlservr 2005.090.2047.00 37.44 MB (39,263,520
bytes) 4/14/2006 11:59 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlservr.exe
msvcr80 8.00.50727.42 803.50 KB (822,784
bytes) 9/23/2005 12:26 AM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt-
1fc8b3b9a1e18e3b_8.0.50727.42_x-
ww_3fea50ad\msvcr80.dll
msvcp80 8.00.50727.42 1.05 MB (1,097,728
bytes) 9/23/2005 12:28 AM Microsoft Corporation
c:\windows\winsxs\amd64_microsoft.vc80.crt-
1fc8b3b9a1e18e3b_8.0.50727.42_x-
ww_3fea50ad\msvcp80.dll
opends60 2005.090.1399.00 22.21 KB (22,744 bytes)
10/14/2005 2:31 PM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\opends60.dll
instapi 2005.090.1399.00 40.71 KB (41,688 bytes)
10/14/2005 2:23 PM Microsoft Corporation
c:\program files\microsoft sql
server\90\shared\instapi.dll

sqllevn70 2005.090.2047.00 1.58 MB (1,652,512
bytes) 4/14/2006 11:53 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\resources\1033\sqllevn70.rll
sqlos 2005.090.1399.00 15.71 KB (16,088 bytes)
10/14/2005 2:35 PM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\sqlos.dll
mscoree 2.0.50727.42 (RTM.050727-4200)
441.00 KB (451,584 bytes) 9/23/2005
12:37 AM Microsoft Corporation
c:\windows\system32\mscoree.dll
xolehlp 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 10.50 KB (10,752 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\xolehlp.dll
msdtcprx 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 805.50 KB (824,832 bytes) 1/5/2006
11:23 AM Microsoft Corporation
c:\windows\system32\msdtcprx.dll
mtxclu 2001.12.4720.1830 (srv03_spl_rtm.050324-
1447) 141.50 KB (144,896 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\mtxclu.dll
winrnr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
30.00 KB (30,720 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\winrnr.dll
rasadhlp 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
12.00 KB (12,288 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\rasadhlp.dll
security 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
6.00 KB (6,144 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\security.dll
msfte 12.0.6214.0 3.63 MB (3,805,904
bytes) 2/14/2006 3:19 AM Microsoft Corporation
c:\program files\microsoft sql
server\mssql.1\mssql\bin\msfte.dll
dbghelp 6.6.0003.5 (vbl_core_fbrel(DrewB)).051022-
1733) 1.25 MB (1,312,032 bytes) 4/14/2006
11:51 AM Microsoft Corporation c:\program
files\microsoft sql server\90\shared\dbghelp.dll
sqlncli 2005.090.2047.00 2.72 MB (2,854,744
bytes) 4/14/2006 11:59 AM Microsoft Corporation
c:\windows\system32\sqlncli.dll
sqlnclir 2005.090.1399.00 201.21 KB (206,040
bytes) 10/14/2005 2:31 PM Microsoft Corporation
c:\windows\system32\sqlnclir.rll
cmd 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
538.50 KB (551,424 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\cmd.exe
notepad 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
86.00 KB (88,064 bytes) 3/25/2005
6:00 AM Microsoft Corporation
c:\windows\system32\notepad.exe
helpctr 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.30 MB (1,363,456 bytes) 1/5/2006
11:25 AM Microsoft Corporation

```

c:\windows\pchealth\helpctr\binaries\helpctr
r.exe
hcappres 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.50 KB (7,680 bytes) 1/5/2006
11:25 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\hcappres
es.dll
itss 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\itss.dll
msxml3 8.70.1104.0 2.04 MB (2,141,184
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msxml3.dll
pchshell 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
155.00 KB (158,720 bytes) 1/5/2006
Microsoft Corporation
11:26 AM c:\windows\pchealth\helpctr\binaries\pchshell
ll.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
5.65 MB (5,928,448 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\mshtml.dll
msls31 3.10.349.0 357.00 KB (365,568
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\msls31.dll
msimtf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
380.50 KB (389,632 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\msimtf.dll
msctf 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
617.50 KB (632,320 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\msctf.dll
jscript 5.6.0.8827 974.50 KB (997,888
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\jscript.dll
imm32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
208.00 KB (212,992 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\imm32.dll
mshtml 6.00.3790.1830 (srv03_spl_rtm.050324-1447)
905.50 KB (927,232 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\mshtml.dll
vbscript 5.6.0.8827 646.50 KB (662,016
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
636.00 KB (651,264 bytes) 1/5/2006
Microsoft Corporation
11:26 AM c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u 6.50.9146.0 1.39 MB (1,462,272
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
7.00 KB (7,168 bytes) 3/25/2005
Microsoft Corporation
6:00 AM c:\windows\system32\riched32.dll
riched20 5.31.23.1224 1.10 MB (1,157,120
bytes) 3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll

```

```

helpsvc 5.2.3790.1830 (srv03_spl_rtm.050324-1447)
1.52 MB (1,591,296 bytes) 1/5/2006
11:25 AM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsvc
c.exe
[Services]
Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0
Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CsiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorsvw.exe Ignore LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped Manual Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorsvw.exe Ignore LocalSystem 0

```

```

COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfsrv.exe
Normal LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmdadmin Stopped Manual Share Process
c:\windows\system32\dmdadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Dnscache Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Stopped Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IAS Jet Database Access IASJet Stopped
Manual Share Process
c:\windows\syswow64\svchost.exe -k iasjet
Normal LocalSystem 0

```

```

IMAPI CD-Burning COM Service  ImapiService
  Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\windows\system32\ismsserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
  Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\llssrv.exe
Normal NT AUTHORITY\NetworkService 0

TCP/IP NetBIOS Helper LmHosts Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k
LocalService Normal NT
AUTHORITY\LocalService 0
Messenger Messenger Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
  Stopped Disabled Own Process
c:\windows\system32\mnmsrvc.exe
Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
  Running Auto Own Process
c:\windows\system32\msdtc.exe Normal NT
AUTHORITY\NetworkService 0
SQL Server FullText Search (MSSQLSERVER)
  msftesql Stopped Manual Own Process
  "c:\program files\microsoft sql
  server\mssql.1\mssql\bin\msftesql.exe" -s:mssql.1 -
  f:mssqlserver Normal LocalSystem 0

Windows Installer MSIServer Stopped Manual
Share Process
c:\windows\system32\msiexec.exe /v
Normal LocalSystem 0
SQL Server (MSSQLSERVER) MSSQLSERVER
  Stopped Manual Own Process
  "c:\program files\microsoft sql
  server\mssql.1\mssql\bin\sqlservr.exe" -smssqlserver
Normal LocalSystem 0
SQL Server Active Directory Helper
  MSSQLServerADHelper Stopped Disabled Own
  Process "c:\program files\microsoft sql
  server\90\shared\sqladhip90.exe" Normal NT
  AUTHORITY\NetworkService 0
Network DDE NetDDE Stopped Disabled
Share Process

```

```

c:\windows\system32\netdde.exe
Normal LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Disabled Share Process
c:\windows\system32\netdde.exe
Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Location Awareness (NLA) Nla
  Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\windows\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
  Stopped Manual Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Office Source Engine ose Stopped
Manual Own Process "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe" Normal LocalSystem 0

Plug and Play PlugPlay Running Auto
Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
IPSEC Services PolicyAgent Stopped
Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Remote Access Auto Connection Manager RasAuto
  Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
  Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Desktop Help Session Manager RDSessMgr
  Stopped Manual Own Process
c:\windows\system32\sessmgr.exe
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
  Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry RemoteRegistry Stopped
Disabled Share Process

```

```

c:\windows\system32\svchost.exe -k regsvr
Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped Manual Own Process
c:\windows\system32\locator.exe
Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\windows\system32\svchost.exe -k rpcss
Normal NT AUTHORITY\NetworkService 0
Resultant Set of Policy Provider RSoPProv
  Stopped Manual Share Process
c:\windows\system32\rsopprov.exe
Normal LocalSystem 0
Special Administration Console Helper sacsvr
  Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\windows\system32\scardsvr.exe
Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Secondary Logon seclogon Stopped Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
  SharedAccess Stopped Disabled
  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
  Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Print Spooler Spooler Stopped Disabled Own
Process c:\windows\system32\spoolsv.exe
Normal LocalSystem 0
SQL Server Browser SQLBrowser Stopped
Disabled Own Process "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe" Normal
LocalSystem 0
SQL Server Agent (MSSQLSERVER)
  SQLSERVERAGENT Stopped Manual Own
  Process "c:\program files\microsoft sql
  server\mssql.1\mssql\bin\sqlagent90.exe" -i

```



```

mssqlserver      Normal      LocalSystem      0
SQL Server VSS Writer      SQLWriter Stopped
Manual      Own Process      "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
Normal      LocalSystem      0
Windows Image Acquisition (WIA)      stisvc
Stopped      Disabled      Share Process
c:\windows\system32\svchost.exe -k imgsvc
Normal      NT AUTHORITY\LocalService      0

Microsoft Software Shadow Copy Provider swprv
Stopped      Manual      Own Process
c:\windows\system32\svchost.exe -k swprv
Normal      LocalSystem      0
HP ProLiant System Shutdown Service      sysdown
Stopped      Disabled      Own Process
c:\windows\system32\sysdown.exe
Normal      LocalSystem      0
Performance Logs and Alerts      SysmonLog Stopped
Auto      Own Process
c:\windows\system32\smlogsvc.exe
Normal      NT Authority\NetworkService      0

Telephony TapiSrv      Stopped      Manual      Share Process
c:\windows\system32\svchost.exe -k tapisrv
Normal      LocalSystem      0
Terminal Services      TermService      Running
Manual      Share Process
c:\windows\system32\svchost.exe -k termsvcs
Normal      LocalSystem      0
Themes      Themes      Stopped      Disabled      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Telnet      TlntSvr      Stopped      Disabled      Own Process
c:\windows\system32\tlntsvr.exe
Normal      NT AUTHORITY\LocalService      0

Distributed Link Tracking Server      TrkSvr
Stopped      Disabled      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Distributed Link Tracking Client      TrkWks
Stopped      Disabled      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Terminal Services Session Directory      Tssdis
Running      Auto      Own Process
c:\windows\system32\tssdis.exe
Normal      LocalSystem      0
Windows User Mode Driver Framework      UMWdf
Stopped      Manual      Own Process
c:\windows\system32\wdmfr.exe
Normal      NT AUTHORITY\LocalService      0

Uninterruptible Power Supply      UPS      Stopped
Manual      Own Process
c:\windows\system32\ups.exe
Normal      NT
AUTHORITY\LocalService      0
Virtual Disk Service      vds      Stopped
Manual      Own Process
c:\windows\system32\vds.exe
Normal      LocalSystem      0

```

```

Volume Shadow Copy VSS      Stopped      Manual      Own
Process      c:\windows\system32\vssvc.exe Normal
LocalSystem      0
Windows Time      W32Time      Stopped      Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal      NT
AUTHORITY\LocalService      0
WebClient WebClient      Stopped      Disabled      Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal      NT
AUTHORITY\LocalService      0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc      Stopped      Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal      NT
AUTHORITY\LocalService      0
Windows Management Instrumentation      winmgmt
Running      Auto      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore      LocalSystem      0
Portable Media Serial Number Service      WmdmPmSN
Stopped      Manual      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Windows Management Instrumentation Driver Extensions
Wmi      Stopped      Manual      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
WMI Performance Adapter      WmiApSrv      Stopped
Manual      Own Process
c:\windows\system32\wbem\wmiaprv.exe
Normal      LocalSystem      0
Automatic Updates      wuusersv      Stopped      Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Wireless Configuration      WZCSVC      Stopped
Disabled      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0
Network Provisioning Service      xmlprov      Stopped
Manual      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal      LocalSystem      0

[Program Groups]

Group Name      Name      User Name
Accessories      Default User:Accessories
Default User
Accessories\Accessibility      Default
User:Accessories\Accessibility      Default User
Accessories\Entertainment      Default
User:Accessories\Entertainment      Default User
Startup      Default User:Startup      Default User

Accessories      All Users:Accessories      All
Users

```

```

Accessories\Accessibility      All
Users:Accessories\Accessibility      All Users
Accessories\Communications      All
Users:Accessories\Communications      All Users
Accessories\Entertainment      All
Users:Accessories\Entertainment      All Users
Accessories\System Tools      All
Users:Accessories\System Tools      All Users
Administrative Tools      All
Users:Administrative Tools      All Users
HP System Tools      All Users:HP System Tools      All
Users
HP System Tools\HP Array Diagnostic Utility      All
Users:HP System Tools\HP Array Diagnostic Utility      All
Users
Microsoft SQL Server 2005      All Users:Microsoft SQL
Server 2005      All Users
Microsoft SQL Server 2005\Analysis Services      All
Users:Microsoft SQL Server 2005\Analysis Services      All
Users
Microsoft SQL Server 2005\Configuration Tools      All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials
All Users:Microsoft SQL Server
2005\Documentation and Tutorials      All Users
Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials      All
Users
Microsoft SQL Server 2005\Performance Tools      All
Users:Microsoft SQL Server 2005\Performance Tools      All
Users
Microsoft Visual Studio 2005      All Users:Microsoft
Visual Studio 2005      All Users
Microsoft Visual Studio 2005\Visual Studio Tools      All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools      All Users
Startup      All Users:Startup      All Users
Accessories      NT AUTHORITY\SYSTEM:Accessories
NT AUTHORITY\SYSTEM
Accessories\Accessibility      NT
AUTHORITY\SYSTEM:Accessories\Accessibility      NT
AUTHORITY\SYSTEM
Accessories\Entertainment      NT
AUTHORITY\SYSTEM:Accessories\Entertainment      NT
AUTHORITY\SYSTEM
Startup      NT AUTHORITY\SYSTEM:Startup      NT
AUTHORITY\SYSTEM
Accessories      GENGHIS\Administrator:Accessories
GENGHIS\Administrator
Accessories\Accessibility
GENGHIS\Administrator:Accessories\Accessibi
lity
GENGHIS\Administrator
Accessories\Communications
GENGHIS\Administrator:Accessories\Communica
tions
GENGHIS\Administrator
Accessories\Communications\HyperTerminal
GENGHIS\Administrator:Accessories\Communica
tions\HyperTerminal GENGHIS\Administrator
Accessories\Entertainment
GENGHIS\Administrator:Accessories\Entertain
ment
GENGHIS\Administrator

```

```

Administrative Tools
  GENGHIS\Administrator\Administrative Tools
  GENGHIS\Administrator
Startup
  GENGHIS\Administrator:Startup
  GENGHIS\Administrator

[Startup Programs]

Program  Command  User Name  Location
desktop  desktop.ini  NT AUTHORITY\SYSTEM
Startup
desktop  desktop.ini  GENGHIS\Administrator
Startup
desktop  desktop.ini  .DEFAULT Startup
desktop  desktop.ini  All Users Common
Startup

[OLE Registration]

Object  Local Server
Sound (OLE2)  sndrec32.exe
Media Clip  mplay32.exe
Video Clip  mplay32.exe /avi
MIDI Sequence  mplay32.exe /mid
Sound  Not Available
Media Clip  Not Available
WordPad Document  "%programfiles%\windows
nt\accessories\wordpad.exe"
Bitmap Image  mspaint.exe

[Windows Error Reporting]

Time  Type  Details
5/9/2006 1:47 PM  Application Hang  Hanging
application IEXPLORE.EXE, version 6.0.3790.1830, hang
module hungapp, version 0.0.0.0, hang address
0x00000000.&#x000d;&#x000a;

[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item  Value
Version  6.0.3790.1830
Build  63790.1830
Application Path  C:\Program Files\Internet
Explorer
Language  English (United States)
Active Printer  Not Available

Cipher Strength  128-bit
Content Advisor  Disabled
IEAK Install  No

[File Versions]

```

File	Version	Size	Date	Path
actxprxy.dll	6.0.3790.1830	221 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.1830	146 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.1830	147 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browsecl.dll	6.0.3790.1830	63 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.1830	1,564 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.1830	216 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.1830	935 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtrans.dll	6.3.3790.1830	320 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.1830	549 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iecont.dll	<File Missing>	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.1830	417 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iepeers.dll	6.0.3790.1830	361 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
iesetup.dll	6.0.3790.1830	71 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
ieuinit.inf	Not Available	24 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Not Available
iexplore.exe	6.0.3790.1830	94 KB	3/25/2005 7:00:00 AM	C:\Program Files\Internet Explorer Microsoft Corporation

imgutil.dll	6.0.3790.1830	61 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcpl.cpl	6.0.3790.1830	428 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inetcplc.dll	6.0.3790.1830	110 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
inseng.dll	6.0.3790.1830	147 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mlang.dll	6.0.3790.1830	686 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msencode.dll	<File Missing>	Not Available	Not Available	Not Available
mshta.exe	6.0.3790.1830	38 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.dll	6.0.3790.1830	5,790 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtml.tlb	6.0.3790.1830	1,320 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmlled.dll	6.0.3790.1830	906 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mshtmlmer.dll	6.0.3790.1830	56 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msident.dll	6.0.3790.1830	69 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msidntld.dll	6.0.3790.1830	16 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msieftpl.dll	6.0.3790.1830	369 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
msrating.dll	6.0.3790.1830	240 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
mstime.dll	6.0.3790.1830	878 KB	3/25/2005 7:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
occache.dll	6.0.3790.1830	126 KB	3/25/2005 7:00:00 AM	

```

C:\WINDOWS\system32 Microsoft Corporation
proctexe.ocx      <File Missing>      Not Available
                  Not Available      Not Available      Not
Available
sendmail.dll     6.0.3790.1830      64 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shdoclc.dll     6.0.3790.1830      590 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shdocvw.dll     6.0.3790.1830      2,360 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shfolder.dll    6.0.3790.1830      34 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
shlwapi.dll    6.0.3790.1830      607 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
tdc.ocx        1.3.0.3130          91 KB      3/25/2005
7:00:00 AM     C:\WINDOWS\system32 Microsoft
Corporation
url.dll        6.0.3790.1830      40 KB      3/25/2005
7:00:00 AM     C:\WINDOWS\system32 Microsoft
Corporation
urlmon.dll     6.0.3790.1830      1,049 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
webcheck.dll   6.0.3790.1830      439 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation
wininet.dll    6.0.3790.1830      1,159 KB
                  3/25/2005 7:00:00 AM
                  C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]

Item      Value
Connection Preference      Never dial

LAN Settings

AutoConfigProxy      wininet.dll
AutoProxyDetectMode Disabled
AutoConfigURL
Proxy      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category
]
[Summary]

```

```

Item      Value
Page Refresh Type      Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space      Not Available
Available Disk Space      Not Available
Maximum Cache Size      Not Available
Available Cache Size      Not Available

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity      Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity      Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone      Security Level
My Computer      Custom
Local intranet      Custom
Trusted sites      Custom
Internet High
Restricted sites      Custom

Client Summary

System Information report written at: 05/18/2006
07:20:45 PM
[System Information]

[ Following are sub-categories of this main category
]

```

```

[System Summary]

Item      Value
OS Name      Microsoft Windows 2000 Server
Version      5.0.2195 Service Pack 4 Build 2195
OS Manufacturer      Microsoft Corporation
System Name      CL25
System Manufacturer      HP
System Model      ProLiant DL360 G4
System Type      X86-based PC
Processor x86 Family 15 Model 4 Stepping 1
GenuineIntel ~3600 Mhz
Processor x86 Family 15 Model 4 Stepping 1
GenuineIntel ~3600 Mhz
Processor x86 Family 15 Model 4 Stepping 1
GenuineIntel ~3600 Mhz
Processor x86 Family 15 Model 4 Stepping 1
GenuineIntel ~3600 Mhz
BIOS Version      12/02/04
Windows Directory      C:\WINNT
System Directory      C:\WINNT\system32
Boot Device      \Device\Harddisk0\Partition1
Locale      United States
User Name      CL25\Administrator
Time Zone      Central Daylight Time
Total Physical Memory      1,048,056 KB
Available Physical Memory      781,768 KB
Total Virtual Memory      2,782,824 KB
Available Virtual Memory      2,339,000 KB
Page File Space      1,734,768 KB
Page File      C:\pagefile.sys

[Hardware Resources]

[ Following are sub-categories of this main category
]

[Conflicts/Sharing]

Resource      Device
IRQ 16      PCI standard PCI-to-PCI bridge
IRQ 16      PCI standard PCI-to-PCI bridge
IRQ 16      PCI standard PCI-to-PCI bridge
IRQ 16      Standard Universal PCI to USB Host
Controller
IRQ 5      Universal Serial Bus (USB) Controller
IRQ 5      Base System Device
IRQ 5      Base System Device

[DMA]

Channel      Device      Status
7      Direct memory access controller      OK
2      Standard floppy disk controller      OK

[Forced Hardware]

Device      PNP Device ID
No Forced Hardware

[I/O]

```

Address Range	Device	Status
0x0000-0x0CF7	PCI bus	OK
0x0000-0x0CF7	Direct memory access controller	
OK		
0x0D00-0x0FFF	PCI bus	OK
0x4000-0x4FFF	PCI standard PCI-to-PCI bridge	
OK		
0x4000-0x4FFF	Smart Array 6i	OK
0x2000-0x201F	Standard Universal PCI to USB	
Host Controller	OK	
0x2020-0x203F	Standard Universal PCI to USB	
Host Controller	OK	
0x3000-0x30FF	ATI Technologies Inc. RAGE XL PCI	
OK		
0x03B0-0x03BB	ATI Technologies Inc. RAGE XL PCI	
OK		
0x03C0-0x03DF	ATI Technologies Inc. RAGE XL PCI	
OK		
0x1800-0x18FF	Base System Device	OK
0x3400-0x34FF	Base System Device	OK
0x0A79-0x0A79	ISAPNP Read Data Port	OK
0x0279-0x0279	ISAPNP Read Data Port	OK
0x0274-0x0277	ISAPNP Read Data Port	OK
0x0070-0x0077	Motherboard resources	OK
0x0408-0x040F	Motherboard resources	OK
0x04D0-0x04D1	Motherboard resources	OK
0x0020-0x003F	Motherboard resources	OK
0x00A0-0x00BF	Motherboard resources	OK
0x0090-0x009F	Motherboard resources	OK
0x0050-0x0053	Motherboard resources	OK
0x0700-0x071F	Motherboard resources	OK
0x0800-0x083F	Motherboard resources	OK
0x0900-0x097F	Motherboard resources	OK
0x0010-0x001F	Motherboard resources	OK
0x0C80-0x0C83	Motherboard resources	OK
0x0CD4-0x0CD7	Motherboard resources	OK
0x0F50-0x0F58	Motherboard resources	OK
0x02F8-0x02FF	Motherboard resources	OK
0x0040-0x0043	System timer	OK
0x0080-0x008F	Direct memory access controller	
OK		
0x00C0-0x00DF	Direct memory access controller	
OK		
0x0061-0x0061	System speaker	OK
0x0060-0x0060	Standard 101/102-Key or Microsoft	
Natural PS/2 Keyboard	OK	
0x0064-0x0064	Standard 101/102-Key or Microsoft	
Natural PS/2 Keyboard	OK	
0x002E-0x002F	Extended IO Bus	OK
0x004E-0x004F	Extended IO Bus	OK
0x0220-0x022F	Extended IO Bus	OK
0x0280-0x029F	Extended IO Bus	OK
0x03F8-0x03FF	Communications Port (COM1)	OK
0x03F2-0x03F5	Standard floppy disk controller	
OK		
0x03F7-0x03F7	Standard floppy disk controller	
OK		
0x0500-0x050F	Standard Dual Channel PCI IDE	
Controller	OK	
0x01F0-0x01F7	Primary IDE Channel	OK
0x03F6-0x03F6	Primary IDE Channel	OK
0x0170-0x0177	Secondary IDE Channel	OK
0x0376-0x0376	Secondary IDE Channel	OK

[IRQs]

IRQ Number	Device
9	Microsoft ACPI-Compliant System
16	PCI standard PCI-to-PCI bridge
16	PCI standard PCI-to-PCI bridge
16	PCI standard PCI-to-PCI bridge
16	Standard Universal PCI to USB Host
Controller	
24	Smart Array 6i
25	HP NC7782 Gigabit Server Adapter
26	HP NC7782 Gigabit Server Adapter #2
19	Standard Universal PCI to USB Host
Controller	
5	Universal Serial Bus (USB) Controller
5	Base System Device
5	Base System Device
1	Standard 101/102-Key or Microsoft Natural
PS/2 Keyboard	
12	PS/2 Compatible Mouse
4	Communications Port (COM1)
6	Standard floppy disk controller
14	Primary IDE Channel

[Memory]

Range	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI Technologies Inc. RAGE XL PCI	
OK		
0x40000000-0xFEFFFFFF	PCI bus	OK
0xFDF00000-0xFDFFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDF00000-0xFDF1FFF	Smart Array 6i	OK
0xFDF80000-0xFDFBFFFF	Smart Array 6i	OK
0xFDF70000-0xFDF7FFF	HP NC7782 Gigabit	
Server Adapter	OK	
0xFDF60000-0xFDF6FFF	HP NC7782 Gigabit	
Server Adapter #2	OK	
0xFBEE0000-0xFBEE000F	Intel(R) 6300ESB	
Watchdog Timer - 25AB	OK	
0xFBEE0000-0xFBEE03FF	Universal Serial Bus	
(USB) Controller	OK	
0xFC000000-0xFCFFFFFF	ATI Technologies Inc.	
RAGE XL PCI	OK	
0xFBFF0000-0xFBFF0FFF	ATI Technologies Inc.	
RAGE XL PCI	OK	
0xFBFE0000-0xFBFE01FF	Base System Device	OK
0xFBFD0000-0xFBFD07FF	Base System Device	OK
0xFBFC0000-0xFBFC1FFF	Base System Device	OK
0xFBFB0000-0xFBFB7FFF	Base System Device	OK
0xE0000000-0xEFFFFFFF	Motherboard resources	
OK		
0xFBEBFC00-0xFBEBFFFF	Standard Dual Channel	
PCI IDE Controller	OK	

[Components]

[Following are sub-categories of this main category]

[Multimedia]

[Following are sub-categories of this main category]

[Audio Codecs]

Codec	Manufacturer	Description	Status	File	Version	Size
Creation Date						
c:\winnt\system32\lhacm.acm Microsoft Corporation						
OK						
C:\WINNT\system32\LHACM.ACM 4.4.3385						
33.27 KB (34,064 bytes) 9/13/2002						
5:46:04 PM						
c:\winnt\system32\msg723.acm Microsoft Corporation						
OK						
C:\WINNT\system32\MSG723.ACM 4.4.3385						
106.77 KB (109,328 bytes) 9/13/2002						
5:46:03 PM						
c:\winnt\system32\iac25_32.ax Intel Corporation						
Indeo® audio software OK						
C:\WINNT\system32\IAC25_32.AX 2.05.53						
195.00 KB (199,680 bytes) 12/7/1999						
7:00:00 AM						
c:\winnt\system32\msadp32.acm Microsoft Corporation						
OK						
C:\WINNT\system32\MSADP32.ACM 5.00.2134.1						
14.77 KB (15,120 bytes) 12/7/1999						
7:00:00 AM						
c:\winnt\system32\msgsm32.acm Microsoft Corporation						
OK						
C:\WINNT\system32\MSGSM32.ACM 5.00.2134.1						
22.27 KB (22,800 bytes) 12/7/1999						
7:00:00 AM						
c:\winnt\system32\tssoft32.acm DSP GROUP, INC.						
OK						
C:\WINNT\system32\TSSOFT32.ACM						
1.01 9.27 KB (9,488 bytes)						
12/7/1999 7:00:00 AM						
c:\winnt\system32\msg711.acm Microsoft Corporation						
OK						
C:\WINNT\system32\MSG711.ACM 5.00.2134.1						
10.27 KB (10,512 bytes) 12/7/1999						
7:00:00 AM						
c:\winnt\system32\imaadp32.acm Microsoft Corporation						
OK						
C:\WINNT\system32\IMAADP32.ACM						
5.00.2195.6612 16.27 KB (16,656 bytes)						
8/16/2005 1:51:42 PM						
[Video Codecs]						
Codec Manufacturer Description						
Status File Version Size						
Creation Date						
c:\winnt\system32\ir50_32.dll Intel Corporation						
Indeo® video 5.10 OK						
C:\WINNT\system32\IR50_32.DLL						
R.5.10.15.2.55 737.50 KB (755,200						
bytes) 12/7/1999 7:00:00 AM						
c:\winnt\system32\msh261.drv Microsoft Corporation						
OK						
C:\WINNT\system32\MSH261.DRV 4.4.3385						

```

163.77 KB (167,696 bytes)    9/13/2002
5:46:04 PM
c:\winnt\system32\msh263.driv Microsoft Corporation
OK
C:\WINNT\system32\MSH263.DRV 4.4.3385
252.27 KB (258,320 bytes)    9/13/2002
5:45:39 PM
c:\winnt\system32\ir32_32.dll Intel(R) Corporation
OK
C:\WINNT\system32\IR32_32.DLL Not Available
194.50 KB (199,168 bytes)    12/7/1999
7:00:00 AM
c:\winnt\system32\iccvid.dll Radius Inc.
OK C:\WINNT\system32\ICCVID.DLL
1.10.0.6 108.00 KB (110,592 bytes)
12/7/1999 7:00:00 AM
c:\winnt\system32\msv32.dll Microsoft
Corporation OK
C:\WINNT\system32\MSVIDC32.DLL
5.00.2134.1 27.27 KB (27,920 bytes)
12/7/1999 7:00:00 AM
c:\winnt\system32\msrle32.dll Microsoft Corporation
OK
C:\WINNT\system32\MSRLE32.DLL
5.00.2195.6612 10.77 KB (11,024 bytes)
8/16/2005 1:51:49 PM

```

[CD-ROM]

Item	Value
Drive D:	
Description	CD-ROM Drive
Media Loaded	False
Media Type	CD-ROM
Name	COMPAQ CD-ROM SN-124
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMCOMPAQ_CD-ROM_SN-124_1104_5&180B77CF&0&0.0.0

[Sound Device]

Item	Value
No sound devices	

[Display]

Item	Value
Name	ATI Technologies Inc. RAGE XL PCI
PNP Device ID	PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_27\4&2183A681&0&18F0
Adapter Type	ATI RAGE XL PCI, ATI Technologies Inc. compatible
Adapter Description	ATI Technologies Inc. RAGE XL PCI
Adapter RAM	8.00 MB (8,388,608 bytes)
Installed Drivers	atidrab.dll
Driver Version	5.00.2179.1
INF File	display.inf (atirage3 section)
Color Planes	1

```

Color Table Entries 65536
Resolution 1024 x 768 x 60 hertz
Bits/Pixel 16

```

[Infrared]

Item	Value
No infrared devices	

[Input]

[Following are sub-categories of this main category]

[Keyboard]

Item	Value
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&1F443D2A&0
NumberOfFunctionKeys	12

[Pointing Device]

Item	Value
Hardware Type	USB Human Interface Device
Number of Buttons	5
Status	OK
PNP Device ID	USB\VID_049F&PID_0048\5&20E9BADC&0&1
Power Management Supported	False
Double Click Threshold	6
Handedness	Right Handed Operation

Item	Value
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	5
Status	OK
PNP Device ID	ACPI\PNP0F13\4&1F443D2A&0
Power Management Supported	False
Double Click Threshold	6
Handedness	Right Handed Operation

[Modem]

Item	Value
No modems	

[Network]

[Following are sub-categories of this main category]

[Adapter]

Item	Value
Name	[00000000] RAS Async Adapter
Adapter Type	Not Available
Product Name	RAS Async Adapter

```

Installed True
PNP Device ID Not Available
Last Reset 5/18/2006 9:39:05 AM
Index 0
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled False
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Service Name Not Available

```

Name	Value
[00000001] WAN Miniport (L2TP)	
Adapter Type	Not Available
Product Name	WAN Miniport (L2TP)
Installed True	
PNP Device ID	ROOT\MS_L2TPMINIPOINT\0000
Last Reset	5/18/2006 9:39:05 AM
Index	1
Service Name	Rasl2tp
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Service Name	Rasl2tp
Driver	c:\winnt\system32\drivers\rasl2tp.sys (52112, 5.00.2195.6655)

Name	Value
[00000002] WAN Miniport (PPTP)	
Adapter Type	Wide Area Network (WAN)
Product Name	WAN Miniport (PPTP)
Installed True	
PNP Device ID	ROOT\MS_PPTPMINIPOINT\0000
Last Reset	5/18/2006 9:39:05 AM
Index	2
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	False
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30
Service Name	PptpMiniport
Driver	c:\winnt\system32\drivers\raspptp.sys (48464, 5.00.2195.6711)

Name	Value
[00000003] Direct Parallel	
Adapter Type	Not Available
Product Name	Direct Parallel
Installed True	
PNP Device ID	ROOT\MS_PTMINIPOINT\0000
Last Reset	5/18/2006 9:39:05 AM
Index	3
Service Name	Raspti

IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name Raspti
 Driver c:\winnt\system32\drivers\raspti.sys
 (16880, 5.00.2146.1)

Name [00000004] WAN Miniport (IP)
 Adapter Type Not Available
 Product Name WAN Miniport (IP)
 Installed True
 PNP Device ID ROOT\MS_NDISWANIP\0000
 Last Reset 5/18/2006 9:39:05 AM
 Index 4
 Service Name NdisWan
 IP Address Not Available
 IP Subnet Not Available
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address Not Available
 Service Name NdisWan
 Driver c:\winnt\system32\drivers\ndiswan.sys
 (93360, 5.00.2195.6699)

Name [00000005] Compaq NC7780 Gigabit Server
 Adapter Not Available
 Product Name Compaq NC7780 Gigabit Server
 Adapter
 Installed True
 PNP Device ID Not Available
 Last Reset 5/18/2006 9:39:05 AM
 Index 5
 Service Name q57w2k
 IP Address 130.168.40.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled True
 DHCP Server 130.168.253.2
 DHCP Lease Expires 9/16/2002 7:03:07 PM
 DHCP Lease Obtained 9/15/2002 7:03:07 PM
 MAC Address 00:13:21:B1:A8:9B
 Service Name Not Available

Name [00000006] Compaq NC7780 Gigabit Server
 Adapter Not Available
 Adapter Type Not Available
 Product Name Compaq NC7780 Gigabit Server
 Adapter
 Installed True
 PNP Device ID Not Available
 Last Reset 5/18/2006 9:39:05 AM
 Index 6
 Service Name q57w2k
 IP Address 130.168.40.25

IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:A8:9B
 Service Name Not Available

Name [00000007] Compaq NC3123 Fast Ethernet NIC
 Adapter Type Not Available
 Product Name Compaq NC3123 Fast Ethernet NIC
 Installed True
 PNP Device ID Not Available
 Last Reset 5/18/2006 9:39:05 AM
 Index 7
 Service Name N100
 IP Address 130.168.40.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled True
 DHCP Server 130.168.253.2
 DHCP Lease Expires 9/16/2002 3:58:55 PM
 DHCP Lease Obtained 9/15/2002 3:58:55 PM
 MAC Address 00:13:21:B1:A8:9B
 Service Name Not Available

Name [00000008] Compaq NC7781 Gigabit Server
 Adapter Not Available
 Product Name Compaq NC7781 Gigabit Server
 Adapter
 Installed True
 PNP Device ID Not Available
 Last Reset 5/18/2006 9:39:05 AM
 Index 8
 Service Name q57w2k
 IP Address 130.168.40.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:A8:9B
 Service Name Not Available

Name [00000009] Compaq NC7781 Gigabit Server
 Adapter Not Available
 Product Name Compaq NC7781 Gigabit Server
 Adapter
 Installed True
 PNP Device ID Not Available
 Last Reset 5/18/2006 9:39:05 AM
 Index 9
 Service Name q57w2k
 IP Address 130.168.40.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available

DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:A8:9B
 Service Name Not Available

Name [00000010] HP NC7782 Gigabit Server Adapter
 Adapter Type Ethernet 802.3
 Product Name HP NC7782 Gigabit Server Adapter
 Installed True
 PNP Device ID
 PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&10E0
 Last Reset 5/18/2006 9:39:05 AM
 Index 10
 Service Name q57w2k
 IP Address 130.172.11.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:A8:9C
 Service Name q57w2k
 IRQ Number 25
 Driver c:\winnt\system32\drivers\q57w2k.sys
 (192247, 7.80.0.0)

Name [00000011] HP NC7782 Gigabit Server Adapter
 Adapter Type Ethernet 802.3
 Product Name HP NC7782 Gigabit Server Adapter
 Installed True
 PNP Device ID
 PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&11E0
 Last Reset 5/18/2006 9:39:05 AM
 Index 11
 Service Name q57w2k
 IP Address 130.168.40.25
 IP Subnet 255.255.0.0
 Default IP Gateway Not Available
 DHCP Enabled False
 DHCP Server Not Available
 DHCP Lease Expires Not Available
 DHCP Lease Obtained Not Available
 MAC Address 00:13:21:B1:A8:9B
 Service Name q57w2k
 IRQ Number 26
 Driver c:\winnt\system32\drivers\q57w2k.sys
 (192247, 7.80.0.0)

[Protocol]

Item	Value
Name	MSAFD Tcpip [TCP/IP]
ConnectionlessService	False
GuaranteesDelivery	True
GuaranteesSequencing	True
MaximumAddressSize	16 bytes
MaximumMessageSize	0 bytes
MessageOriented	False
MinimumAddressSize	16 bytes
PseudoStreamOriented	False

SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData True
 SupportsGracefulClosing True
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD Tcpip [UDP/IP]
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 16 bytes
 MaximumMessageSize 65467 bytes
 MessageOriented True
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting True

Name RSVP UDP Service Provider
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 16 bytes
 MaximumMessageSize 65467 bytes
 MessageOriented True
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption True
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting True

Name RSVP TCP Service Provider
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 16 bytes
 MaximumMessageSize 0 bytes
 MessageOriented False
 MinimumAddressSize 16 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption True
 SupportsExpeditedData True
 SupportsGracefulClosing True
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{37E5A54E-FF18-486C-B3AD-E80449420A01}] SEQPACKET 8
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{37E5A54E-FF18-486C-B3AD-E80449420A01}] DATAGRAM 8
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{4D85C014-5E76-48CF-93EA-317E0F725486}] SEQPACKET 7
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{4D85C014-5E76-48CF-93EA-317E0F725486}] DATAGRAM 7

ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{2D8AA674-9F13-43EE-9055-F9ECADD87F7F}] SEQPACKET 6
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{2D8AA674-9F13-43EE-9055-F9ECADD87F7F}] DATAGRAM 6
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{EFD5741D-3A14-456C-98EB-17ABC580A075}] SEQPACKET 5
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True

MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{EFD5741D-3A14-456C-98EB-17ABC580A075}] DATAGRAM 5
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{4249431A-469E-4735-A292-01AA526741FC}] SEQPACKET 4
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{4249431A-469E-4735-A292-01AA526741FC}] DATAGRAM 4
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True

MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{3B09DDB7-7EB8-4941-8121-52DC6359F5A6}] SEQPACKET 3
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{3B09DDB7-7EB8-4941-8121-52DC6359F5A6}] DATAGRAM 3
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{684FA660-D082-4A8C-AC8C-C9D449B21686}] SEQPACKET 0
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False

SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{684FA660-D082-4A8C-AC8C-C9D449B21686}] DATAGRAM 0
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{D90E04F2-3AD9-4F98-9464-751E106D7E6A}] SEQPACKET 1
 ConnectionlessService False
 GuaranteesDelivery True
 GuaranteesSequencing True
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting False
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False
 SupportsExpeditedData False
 SupportsGracefulClosing False
 SupportsGuaranteedBandwidth False
 SupportsMulticasting False

Name MSAFD NetBIOS
 [\Device\NetBT_Tcpip_{D90E04F2-3AD9-4F98-9464-751E106D7E6A}] DATAGRAM 1
 ConnectionlessService True
 GuaranteesDelivery False
 GuaranteesSequencing False
 MaximumAddressSize 20 bytes
 MaximumMessageSize 64000 bytes
 MessageOriented True
 MinimumAddressSize 20 bytes
 PseudoStreamOriented False
 SupportsBroadcasting True
 SupportsConnectData False
 SupportsDisconnectData False
 SupportsEncryption False


```

SupportsExpeditedData      False
SupportsGracefulClosing    False
SupportsGuaranteedBandwidth False
SupportsMulticasting       False

```

```

Name      MSAFD NetBIOS
[Device\NetBT_Tcpip_{3F1BA297-E685-416B-82D7-70E771CC8745}] SEQPACKET 2
ConnectionlessService      False
GuaranteesDelivery         True
GuaranteesSequencing       True
MaximumAddressSize         20 bytes
MaximumMessageSize         64000 bytes
MessageOriented            True
MinimumAddressSize         20 bytes
PseudoStreamOriented       False
SupportsBroadcasting       False
SupportsConnectData        False
SupportsDisconnectData     False
SupportsEncryption         False
SupportsExpeditedData      False
SupportsGracefulClosing    False
SupportsGuaranteedBandwidth False
SupportsMulticasting       False

```

```

Name      MSAFD NetBIOS
[Device\NetBT_Tcpip_{3F1BA297-E685-416B-82D7-70E771CC8745}] DATAGRAM 2
ConnectionlessService      True
GuaranteesDelivery         False
GuaranteesSequencing       False
MaximumAddressSize         20 bytes
MaximumMessageSize         64000 bytes
MessageOriented            True
MinimumAddressSize         20 bytes
PseudoStreamOriented       False
SupportsBroadcasting       True
SupportsConnectData        False
SupportsDisconnectData     False
SupportsEncryption         False
SupportsExpeditedData      False
SupportsGracefulClosing    False
SupportsGuaranteedBandwidth False
SupportsMulticasting       False

```

[WinSock]

```

Item      Value
File      c:\winnt\system32\winsock.dll
Version   3.10
Size      2.80 KB (2,864 bytes)

```

```

File      c:\winnt\system32\wsock32.dll
Version   5.00.2195.6603
Size      21.27 KB (21,776 bytes)

```

[Ports]

[Following are sub-categories of this main category]

[Serial]

```

Item      Value
Name      COM1
Status    OK
PNP Device ID      ACPI\PNP0501\0
Maximum Input Buffer Size      0
Maximum Output Buffer Size     False
Settable Baud Rate            True
Settable Data Bits            True
Settable Flow Control         True
Settable Parity               True
Settable Parity Check         True
Settable Stop Bits           True
Settable RLSD                 True
Supports RLSD                 True
Supports 16 Bit Mode          False
Supports Special Characters    False
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy 0
Abort Read/Write on Error     0
Binary Mode Enabled -1
Continue XMit on XOff         0
CTS Outflow Control 0
Discard NULL Bytes 0
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type        Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled 0
Event Character 0
Parity Check Enabled 0
RTS Flow Control Type        Enable
XOff Character 19
XOffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXoff InFlow Control 0
XOnXoff OutFlow Control 0
IRQ Number 4
I/O Port 0x03F8-0x03FF
Driver c:\winnt\system32\drivers\serial.sys
(62736, 5.00.2195.6655)

```

[Parallel]

```

Item      Value
No parallel port information

```

[Storage]

[Following are sub-categories of this main category]

[Drives]

```

Item      Value
Drive     A:

```

Description 3 1/2 Inch Floppy Drive

```

Drive     C:
Description      Local Fixed Disk
Compressed      False
File System      NTFS
Size            33.90 GB (36,405,055,488 bytes)
Free Space      30.56 GB (32,812,605,440 bytes)
Volume Name
Volume Serial Number      C8B488FA
Partition Disk #0, Partition #0
Partition Size      33.90 GB (36,405,057,024 bytes)
Starting Offset      32256 bytes
Drive Description      Disk drive
Drive Manufacturer      (Standard disk drives)
Drive Model            HP LOGICAL VOLUME SCSI Disk
Device
Drive BytesPerSector      512
Drive MediaLoaded      True
Drive MediaType          Fixed hard disk media
Drive Partitions 1
Drive SCSIbus 0
Drive SCSILogicalUnit      0
Drive SCSIPort 2
Drive SCISITargetId 4
Drive SectorsPerTrack      63
Drive Size            36413314560 bytes
Drive TotalCylinders      4427
Drive TotalSectors      71119755
Drive TotalTracks      1128885
Drive TracksPerCylinder      255

```

```

Drive     E:
Description      Network Connection
Provider Name    \\n25\c$

```

```

Drive     F:
Description      Network Connection
Provider Name    \\inforb\mount

```

[SCSI]

```

Item      Value
Name      Smart Array 6i
Caption   Smart Array 6i
Driver    cpqcissm
Status    OK
PNP Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_01\4&19638ECB&0&08E0
Device ID
PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_01\4&19638ECB&0&08E0
Device Map      Not Available
Index          Not Available
Max Number Controlled      Not Available
IRQ Number      24
I/O Port      0x4000-0x4FFF
Driver c:\winnt\system32\drivers\cpqcissm.sys
(16512, 5.64.0.32 Build 7 (x86))

```

[Printing]

Name Port Name Server Name
No printing information

[Problem Devices]

Device	PNP Device ID	Error Code
Universal Serial Bus (USB) Controller	PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_02\3&61AAA01&0&EF28	
Base System Device	PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_01\4&2183A681&0&22F028	
Base System Device	PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_01\4&2183A681&0&22F028	

[USB]

Device	PNP Device ID
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_02\3&61AAA01&0&E8
USB Root Hub	USB\ROOT_HUB\4&312B1C17&0
USB Human Interface Device	USB\VID_049F&PID_0048\5&20E9BADC&0&1
HID-compliant mouse	HID\VID_049F&PID_0048\6&360717A3&0&0000
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_02\3&61AAA01&0&E9
USB Root Hub	USB\ROOT_HUB\4&24B43ADC&0

[Software Environment]

[Following are sub-categories of this main category]

[Drivers]

Name	Description	File	Type	Started	Start Mode	State
abiosdsk	Abiosdsk	Not Available	Kernel Driver	False	Disabled	Stopped
abp480n5	abp480n5	Not Available	Kernel Driver	False	Disabled	Stopped
acpi	Microsoft ACPI Driver	c:\winnt\system32\drivers\acpi.sys	Kernel Driver	True	Boot	Running
acpiec	ACPIEC	c:\winnt\system32\drivers\acpiec.sys	Kernel Driver	False	Disabled	Stopped

adpu160m	adpu160m	Not Available	Kernel Driver	False	Disabled	Stopped
afd	AFD Networking Support Environment	c:\winnt\system32\drivers\afd.sys	Kernel Driver	True	Auto	Running
ahal54x	Ahal54x	Not Available	Kernel Driver	False	Disabled	Stopped
aicl16x	aicl16x	Not Available	Kernel Driver	False	Disabled	Stopped
aic78u2	aic78u2	Not Available	Kernel Driver	False	Disabled	Stopped
aic78xx	aic78xx	Not Available	Kernel Driver	False	Disabled	Stopped
alkernel	Altiris Kernel Driver	c:\winnt\system32\drivers\alkernel.sys	Kernel Driver	True	Manual	Running
ami0nt	ami0nt	Not Available	Kernel Driver	False	Disabled	Stopped
amsint	amsint	Not Available	Kernel Driver	False	Disabled	Stopped
asc	asc	Not Available	Kernel Driver	False	Disabled	Stopped
asc3350p	asc3350p	Not Available	Kernel Driver	False	Disabled	Stopped
asc3550	asc3550	Not Available	Kernel Driver	False	Disabled	Stopped
asynmac	RAS Asynchronous Media Driver	c:\winnt\system32\drivers\asynmac.sys	Kernel Driver	False	Manual	Stopped
atapi	Standard IDE/ESDI Hard Disk Controller	c:\winnt\system32\drivers\atapi.sys	Kernel Driver	True	Boot	Running
atdisk	Atdisk	Not Available	Kernel Driver	False	Disabled	Stopped
atirage3	atirage3	c:\winnt\system32\drivers\atimpab.sys	Kernel Driver	True	Manual	Running
atmarpc	ATM ARP Client Protocol	c:\winnt\system32\drivers\atmarpc.sys	Kernel Driver	False	Manual	Stopped

audstub	Audio Stub Driver	c:\winnt\system32\drivers\audstub.sys	Kernel Driver	True	Manual	Running
beep	Beep	c:\winnt\system32\drivers\beep.sys	Kernel Driver	True	System	Running
buslogic	BusLogic	Not Available	Kernel Driver	False	Disabled	Stopped
cd20xrnt	cd20xrnt	Not Available	Kernel Driver	False	Disabled	Stopped
cdaudio	Cdaudio	c:\winnt\system32\drivers\cdaudio.sys	Kernel Driver	False	System	Stopped
cdfs	Cdfs	c:\winnt\system32\drivers\cdfs.sys	File System Driver	True	Disabled	Running
cdrom	CD-ROM Driver	c:\winnt\system32\drivers\cdrom.sys	Kernel Driver	True	System	Running
changer	Changer	Not Available	Kernel Driver	False	System	Stopped
cpqarray	Cpqarray	Not Available	Kernel Driver	False	Disabled	Stopped
cpqarray2	cpqarray2	Not Available	Kernel Driver	False	Disabled	Stopped
cpqcissm	cpqcissm	c:\winnt\system32\drivers\cpqcissm.sys	Kernel Driver	True	Boot	Running
cpqfcalm	cpqfcalm	Not Available	Kernel Driver	False	Disabled	Stopped
cpqfws2e	cpqfws2e	Not Available	Kernel Driver	False	Disabled	Stopped
dac960nt	dac960nt	Not Available	Kernel Driver	False	Disabled	Stopped
deckzpsx	deckzpsx	Not Available	Kernel Driver	False	Disabled	Stopped
dfsdriver	DfsDriver	c:\winnt\system32\drivers\dfs.sys	File System Driver	True	Boot	Running
disk	Disk Driver	c:\winnt\system32\drivers\disk.sys				

	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
diskperf	Diskperf		
	c:\winnt\system32\drivers\diskperf.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
dmboot	dmboot		
	c:\winnt\system32\drivers\dmboot.sys		
	Kernel Driver	False	Disabled
	Stopped	OK	Normal
	True	False	False
dmio	Logical Disk Manager Driver		
	c:\winnt\system32\drivers\dmio.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
dmload	dmload		
	c:\winnt\system32\drivers\dmload.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
efs	EFS	c:\winnt\system32\drivers\efs.sys	
	File System Driver	True	Disabled
	Running	OK	Normal
	True	False	False
fastfat	Fastfat		
	c:\winnt\system32\drivers\fastfat.sys		
	File System Driver	True	Disabled
	Running	OK	Normal
	True	False	False
fd16_700	Fd16_700	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
fdc	Floppy Disk Controller Driver		
	c:\winnt\system32\drivers\fdc.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
fips	Fips		
	c:\winnt\system32\drivers\fips.sys		
	Kernel Driver	True	Auto
	Running	OK	Normal
	True	False	False
fireport	fireport	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
flashpnt	flashpnt	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
flpydisk	Floppy Disk Driver		
	c:\winnt\system32\drivers\flpydisk.sys		
	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
ftdisk	Volume Manager Driver		
	c:\winnt\system32\drivers\ftdisk.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
gpc	Generic Packet Classifier		
	c:\winnt\system32\drivers\msgpc.sys		

	Kernel Driver	True	Manual
	Running	OK	Normal
	True	False	False
hidusb	Microsoft HID Class Driver		
	c:\winnt\system32\drivers\hidusb.sys		
	Kernel Driver	True	Auto
	Running	OK	Ignore
	True	False	False
i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver		
	c:\winnt\system32\drivers\i8042prt.sys		
	Kernel Driver	True	System
	Running	OK	Normal
	True	False	False
ini910u	ini910u	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
intelide	IntelIde	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
ipfilterdriver	IP Traffic Filter Driver		
	c:\winnt\system32\drivers\ipfltdrv.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
ipinip	IP in IP Tunnel Driver		
	c:\winnt\system32\drivers\ipinip.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
ipnat	IP Network Address Translator		
	c:\winnt\system32\drivers\ipnat.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
ipsec	IPSEC driver		
	c:\winnt\system32\drivers\ipsec.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
ipsraidn	ipsraidn	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
irenum	IR Enumerator Service		
	c:\winnt\system32\drivers\irenum.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
isapnp	PnP ISA/EISA Bus Driver		
	c:\winnt\system32\drivers\isapnp.sys		
	Kernel Driver	True	Boot
	Running	OK	Critical
	True	False	False
kbdclass	Keyboard Class Driver		
	c:\winnt\system32\drivers\kbdclass.sys		
	Kernel Driver	True	System
	Running	OK	Normal
	True	False	False
ksecdd	KSecDD		
	c:\winnt\system32\drivers\ksecdd.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False

lbrtfdc	lbrtfdc	Not Available	Kernel Driver
	False	System	Stopped
	Ignore	False	OK
lp6nds35	lp6nds35	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
mmdd	mmdd		
	c:\winnt\system32\drivers\mmdd.sys		
	Kernel Driver	True	System
	Running	OK	Ignore
	True	False	False
modem	Modem		
	c:\winnt\system32\drivers\modem.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Ignore
	True	False	False
mouclass	Mouse Class Driver		
	c:\winnt\system32\drivers\mouclass.sys		
	Kernel Driver	True	System
	Running	OK	Normal
	True	False	False
mouhid	Mouse HID Driver		
	c:\winnt\system32\drivers\mouhid.sys		
	Kernel Driver	True	Manual
	Running	OK	Ignore
	True	False	False
mountmgr	MountMgr		
	c:\winnt\system32\drivers\mountmgr.sys		
	Kernel Driver	True	Boot
	Running	OK	Normal
	True	False	False
mraid35x	mraid35x	Not Available	Kernel Driver
	False	Disabled	Stopped
	Normal	False	OK
mrxsmb	MRXSMB		
	c:\winnt\system32\drivers\mrxsmb.sys		
	File System Driver	True	System
	Running	OK	Normal
	True	False	False
msfs	Msfs		
	c:\winnt\system32\drivers\msfs.sys		
	File System Driver	True	System
	Running	OK	Normal
	True	False	False
mskssrv	Microsoft Streaming Service Proxy		
	c:\winnt\system32\drivers\mskssrv.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
mspclock	Microsoft Streaming Clock Proxy		
	c:\winnt\system32\drivers\mspclock.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
mspqm	Microsoft Streaming Quality Manager Proxy		
	c:\winnt\system32\drivers\mspqm.sys		
	Kernel Driver	False	Manual
	Stopped	OK	Normal
	True	False	False
mup	Mup	c:\winnt\system32\drivers\mup.sys	
	File System Driver	True	Boot
	Running	OK	Normal
	True	False	False

n100 Driver	Compaq Ethernet or Fast Ethernet NIC NT			
	c:\winnt\system32\drivers\n100nt5.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
ncrc710	Nc710	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
ndis	NDIS System Driver			
	c:\winnt\system32\drivers\ndis.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
ndistapi	Remote Access NDIS TAPI Driver			
	c:\winnt\system32\drivers\ndistapi.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
ndisuio	NDIS Usermode I/O Protocol			
	c:\winnt\system32\drivers\ndisuio.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
ndiswan	Remote Access NDIS WAN Driver			
	c:\winnt\system32\drivers\ndiswan.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
ndproxy	NDIS Proxy			
	c:\winnt\system32\drivers\ndproxy.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
netbios	NetBIOS Interface			
	c:\winnt\system32\drivers\netbios.sys			
	File System Driver	True	System	
	Running	OK	Normal	False
	True			
netbt	NetBios over Tcpip			
	c:\winnt\system32\drivers\netbt.sys			
	Kernel Driver	True	System	
	Running	OK	Normal	False
	True			
netdetect	NetDetect			
	c:\winnt\system32\drivers\netdetect.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
npfs	Npfs			
	c:\winnt\system32\drivers\npfs.sys			
	File System Driver	True	System	
	Running	OK	Normal	False
	True			
ntfs	Ntfs			
	c:\winnt\system32\drivers\ntfs.sys			
	File System Driver	True	Disabled	
	Running	OK	Normal	False
	True			
null	Null			
	c:\winnt\system32\drivers\null.sys			
	Kernel Driver	True	System	
	Running	OK	Normal	False
	True			

nwlkflt	IPX Traffic Filter Driver			
	c:\winnt\system32\drivers\nwlkflt.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
nwlkfwd	IPX Traffic Forwarder Driver			
	c:\winnt\system32\drivers\nwlkfwd.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
openhci	Microsoft USB Open Host Controller Driver			
	c:\winnt\system32\drivers\openhci.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
parallel	Parallel			
	c:\winnt\system32\drivers\parallel.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
parport	Parport			
	c:\winnt\system32\drivers\parport.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
partmgr	PartMgr			
	c:\winnt\system32\drivers\partmgr.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
parvdm	ParVdm			
	c:\winnt\system32\drivers\parvdm.sys			
	Kernel Driver	False	Auto	
	Stopped	OK	Ignore	False
	False			
pci	PCI Bus Driver			
	c:\winnt\system32\drivers\pci.sys			
	Kernel Driver	True	Boot	
	Running	OK	Critical	False
	True			
pcidump	PCIDump	Not Available	Kernel Driver	
	False	System	Stopped	OK
	Ignore	False	False	
pciide	PCIIde			
	c:\winnt\system32\drivers\pciide.sys			
	Kernel Driver	True	Boot	
	Running	OK	Normal	False
	True			
pcmcia	Pcmcia			
	c:\winnt\system32\drivers\pcmcia.sys			
	Kernel Driver	False	Disabled	
	Stopped	OK	Normal	False
	False			
pdcomp	PDCOMP	Not Available	Kernel Driver	
	False	Manual	Stopped	OK
	Ignore	False	False	
pdframe	PDFRAME	Not Available	Kernel Driver	
	False	Manual	Stopped	OK
	Ignore	False	False	
pdreli	PDRELI	Not Available	Kernel Driver	
	False	Manual	Stopped	OK
	Ignore	False	False	

pdrframe	PDFRAME	Not Available	Kernel Driver	
	False	Manual	Stopped	OK
	Ignore	False	False	
pptpminiport	WAN Miniport (PPTP)			
	c:\winnt\system32\drivers\raspppt.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
ptilink	Direct Parallel Link Driver			
	c:\winnt\system32\drivers\ptilink.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
q57w2k	HP NC7782 Gigabit Server Adapter			
	c:\winnt\system32\drivers\q57w2k.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
ql1080	ql1080	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
ql10wmt	ql10wmt	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
ql1240	ql1240	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
ql2100	ql2100	Not Available	Kernel Driver	
	False	Disabled	Stopped	OK
	Normal	False	False	
rasacd	Remote Access Auto Connection Driver			
	c:\winnt\system32\drivers\rasacd.sys			
	Kernel Driver	True	System	
	Running	OK	Normal	False
	True			
rasl2tp	WAN Miniport (L2TP)			
	c:\winnt\system32\drivers\rasl2tp.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
raspti	Direct Parallel			
	c:\winnt\system32\drivers\raspti.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
rca	Microsoft Streaming Network Raw Channel			
	c:\winnt\system32\drivers\rca.sys			
	Kernel Driver	False	Manual	
	Stopped	OK	Normal	False
	False			
rdbss	Rdbss			
	c:\winnt\system32\drivers\rdbss.sys			
	File System Driver	True	System	
	Running	OK	Normal	False
	True			
rdpdr	Terminal Server Device Redirector Driver			
	c:\winnt\system32\drivers\rdpdr.sys			
	Kernel Driver	True	Manual	
	Running	OK	Normal	False
	True			
rdpwd	RDPWD			
	c:\winnt\system32\drivers\rdpwd.sys			
	Kernel Driver	True	Manual	

```

Running OK Ignore False
True
redbook Digital CD Audio Playback Filter Driver
c:\winnt\system32\drivers\redbook.sys
Kernel Driver False System
Stopped OK Normal False
False
serenum Serenum Filter Driver
c:\winnt\system32\drivers\serenum.sys
Kernel Driver True Manual
Running OK Normal False
True
serial Serial port driver
c:\winnt\system32\drivers\serial.sys
Kernel Driver True System
Running OK Ignore False
True
sfloppy Sfloppy
c:\winnt\system32\drivers\sfloppy.sys
Kernel Driver False System
Stopped OK Ignore False
False
sglfb sglfb Not Available Kernel Driver
False System Stopped OK
Normal False False
simbad Simbad Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
sparrow Sparrow Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
spud Special Purpose Utility Driver
c:\winnt\system32\drivers\spud.sys
Kernel Driver True Manual
Running OK Normal False
True
srv Srv c:\winnt\system32\drivers\srv.sys
File System Driver True Manual
Running OK Normal False
True
swenum Software Bus Driver
c:\winnt\system32\drivers\swenum.sys
Kernel Driver True Manual
Running OK Normal False
True
symc810 symc810 Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
symc8xx symc8xx Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
sym_hi sym_hi Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
tcpip TCP/IP Protocol Driver
c:\winnt\system32\drivers\tcpip.sys
Kernel Driver True System
Running OK Normal False
True
tdasync TDASYNC
c:\winnt\system32\drivers\tdasync.sys
Kernel Driver False Manual

```

```

Stopped OK Ignore False
False
tdipx TDIPX
c:\winnt\system32\drivers\tdipx.sys
Kernel Driver False Manual
Stopped OK Ignore False
False
tdnetb TDNETB
c:\winnt\system32\drivers\tdnetb.sys
Kernel Driver False Manual
Stopped OK Ignore False
False
tdpipe TDPIPE
c:\winnt\system32\drivers\tdpipe.sys
Kernel Driver False Manual
Stopped OK Ignore False
False
tdspix TDSPX
c:\winnt\system32\drivers\tdspix.sys
Kernel Driver False Manual
Stopped OK Ignore False
False
tdtcp TDTCP
c:\winnt\system32\drivers\tdtcp.sys
Kernel Driver True Manual
Running OK Ignore False
True
termdd Terminal Device Driver
c:\winnt\system32\drivers\termdd.sys
Kernel Driver True Auto
Running OK Normal False
True
tga tga Not Available Kernel Driver
False System Stopped OK
Ignore False False
udfs Udfs
c:\winnt\system32\drivers\udfs.sys
File System Driver False Disabled
Stopped OK Normal False
False
uhcd Microsoft USB Universal Host Controller
Driver c:\winnt\system32\drivers\uhcd.sys
Kernel Driver True Manual
Running OK Normal False
True
ultra66 ultra66 Not Available Kernel Driver
False Disabled Stopped OK
Normal False False
update Microcode Update Driver
c:\winnt\system32\drivers\update.sys
Kernel Driver True Manual
Running OK Normal False
True
usbhub Microsoft USB Standard Hub Driver
c:\winnt\system32\drivers\usbhub.sys
Kernel Driver True Manual
Running OK Normal False
True
vgasave VgaSave c:\winnt\system32\drivers\vga.sys
Kernel Driver True System
Running OK Ignore False
True

```

```

wanarp Remote Access IP ARP Driver
c:\winnt\system32\drivers\wanarp.sys
Kernel Driver True Manual
Running OK Normal False
True
wdica WDICA Not Available Kernel Driver
False Manual Stopped OK
Ignore False False

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Os2LibPath %SystemRoot%\system32\os2\dll;
<SYSTEM>

Path
%SystemRoot%\system32;%SystemRoot%;%SystemR
oot%\System32\Wbem;C:\Program Files\Microsoft SQL
Server\90\Tools\bin\
windir %SystemRoot% <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE x86 <SYSTEM>
PROCESSOR_LEVEL 15 <SYSTEM>
PROCESSOR_IDENTIFIER x86 Family 15 Model 4
Stepping 1, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0401 <SYSTEM>
NUMBER_OF_PROCESSORS 4 <SYSTEM>
PATHEXT
.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\
<SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp
CL25\Administrator
TMP %USERPROFILE%\Local Settings\Temp
CL25\Administrator

[Jobs]

[ Following are sub-categories of this main category
]

[Print]

Document Size Owner Notify Status
Time Submitted Start Time
Until Time Elapsed Time
Pages Printed Job ID Priority
Parameters Driver Name
Print Processor Host Print Queue
Data Type Name
Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown
Unknown Unknown Unknown Unknown

[Network Connections]

Local Name Remote Name Type
Status User Name

```

F: \\inforb\mount Disk Error
 E: \\n25\c\$ Disk OK
 CL25\Administrator

[Running Tasks]

Name	Path	Process ID	Priority	Min
Working Set	Max Working Set	Start Time		
	Version	Size	File Date	
system idle process	Not Available	0	0	0
Available	Unknown	Unknown	Unknown	Not
system	Not Available	8	8	0
	1413120	Not Available	Unknown	
smss.exe	c:\winnt\system32\smss.exe	192	11	
	204800	1413120	5/18/2006 2:39:14 PM	
	5.00.2195.6601	44.77 KB (45,840 bytes)		
	12/7/1999 7:00:00 AM			
csrss.exe	Not Available	216	13	Not
Available	Not Available	5/18/2006 2:39:16 PM		
	Unknown	Unknown	Unknown	
winlogon.exe	c:\winnt\system32\winlogon.exe			
	212	13	204800	1413120
	5/18/2006 2:39:17 PM			
	5.00.2195.6714	176.77 KB (181,008 bytes)		
	8/16/2005 1:52:00 PM			
services.exe	c:\winnt\system32\services.exe			
	268	9	204800	1413120
	5/18/2006 2:39:17 PM			
	5.00.2195.6700	87.27 KB (89,360 bytes)		
	12/7/1999 7:00:00 AM			
lsass.exe	c:\winnt\system32\lsass.exe	280	9	
	204800	1413120	5/18/2006 2:39:17 PM	
	5.00.2195.6695	32.77 KB (33,552 bytes)		
	12/7/1999 7:00:00 AM			
termsrv.exe	c:\winnt\system32\termsrv.exe	396		
	10	204800	1413120	5/18/2006
	2:39:17 PM			
	5.00.2195.6696	139.27 KB (142,608 bytes)		
	8/16/2005 1:51:58 PM			
aclnt.exe	c:\program			
files\altiris\aclnt\aclnt.exe		468	8	
	204800	1413120	5/18/2006 2:39:18 PM	
	6.1.401	4.63 MB (4,857,932 bytes)		
	6/5/2003 1:55:46 PM			
regsvc.exe	c:\winnt\system32\regsvc.exe	496		
	8	204800	1413120	5/18/2006
	2:39:19 PM			
	5.00.2195.6701	66.77 KB (68,368 bytes)		
	8/16/2005 1:51:54 PM			
rsys.exe	c:\benchcraft\rsys.exe	512	8	
	204800	1413120	5/18/2006 2:39:19 PM	
	Not Available	32.00 KB (32,768 bytes)		
	9/13/2002 6:30:57 PM			
svchost.exe	c:\winnt\system32\svchost.exe	532		
	8	204800	1413120	5/18/2006
	2:39:19 PM			
	5.00.2134.1	7.77 KB (7,952 bytes)		
	12/7/1999 7:00:00 AM			
svchost.exe	c:\winnt\system32\svchost.exe	564		
	8	204800	1413120	5/18/2006
	2:39:19 PM			
	5.00.2134.1	7.77 KB (7,952 bytes)		
	12/7/1999 7:00:00 AM			
svchost.exe	c:\winnt\system32\svchost.exe	656		
	8	204800	1413120	5/18/2006

2:39:22 PM	5.00.2134.1	7.77 KB (7,952 bytes)		
	12/7/1999 7:00:00 AM			
mstask.exe	c:\winnt\system32\mstask.exe	680		
	8	204800	1413120	5/18/2006
	2:39:22 PM			
	4.71.2195.6704	116.77 KB (119,568 bytes)		
	8/16/2005 1:51:49 PM			
winmgmt.exe	c:\winnt\system32\wbem\winmgmt.exe	724		
	8	204800	1413120	5/18/2006
	2:39:23 PM			
	1.50.1085.0100	192.10 KB (196,706 bytes)		
	8/16/2005 1:52:03 PM			
inetinfo.exe	c:\winnt\system32\inetrv\inetinfo.exe	752		
	8	204800	1413120	5/18/2006
	2:39:23 PM			
	5.00.0984	14.27 KB (14,608 bytes)		
	8/16/2005 1:52:12 PM			
svchost.exe	c:\winnt\system32\svchost.exe			
	1044	8	204800	1413120
	5/18/2006 2:39:38 PM			
	7.77 KB (7,952 bytes)			
	12/7/1999			
7:00:00 AM				
dllhost.exe	Not Available	324	8	
	Not Available	Not Available		
	5/18/2006 2:46:13 PM			
	Unknown	Unknown		
explorer.exe	c:\winnt\explorer.exe			
	1404	8	204800	1413120
	5/18/2006 2:55:51 PM			
	5.00.3700.6690	237.77 KB (243,472 bytes)		
	8/16/2005 1:52:01 PM			
aclntusr.exe	c:\program			
files\altiris\aclnt\aclntusr.exe		1460	8	
	204800	1413120	5/18/2006 2:55:52 PM	
	6, 1, 401	180.00 KB (184,320 bytes)		
	6/5/2003 1:55:47 PM			
tardis.exe	c:\program files\tardis 2000			
v1.4\tardis.exe		1492	8	204800
	1413120	5/18/2006 2:55:52 PM		
	0, 1, 4	308.00 KB (315,392 bytes)		
	9/13/2002			
6:21:25 PM				
cmd.exe	c:\winnt\system32\cmd.exe	1532	8	
	204800	1413120	5/18/2006 2:55:53 PM	
	5.00.2195.6656	230.77 KB (236,304 bytes)		
	8/16/2005 1:51:36 PM			
notepad.exe	c:\winnt\system32\notepad.exe			
	6912	8	204800	1413120
	5/18/2006 6:14:21 PM			
	49.77 KB (50,960 bytes)			
	12/7/1999			
7:00:00 AM				
mmc.exe	c:\winnt\system32\mmc.exe	2888	8	
	204800	1413120	5/18/2006 7:19:31 PM	
	5.00.2195.6601	589.27 KB (603,408 bytes)		
	8/16/2005 1:51:45 PM			
rsvp.exe	c:\winnt\system32\rsvp.exe	1688	8	
	204800	1413120	5/18/2006 7:20:34 PM	
	5.00.2195.6663	172.77 KB (176,912 bytes)		
	8/16/2005 1:51:55 PM			
[Loaded Modules]				
Name	Version	Size	File Date	Manufacturer
Path				

traffic.dll	5.00.2195.6613	30.77 KB (31,504 bytes)		
	8/16/2005 1:51:58 PM			
	Microsoft Corporation			
rsvp.exe	c:\winnt\system32\traffic.dll			
	5.00.2195.6663	172.77 KB (176,912 bytes)		
	8/16/2005 1:51:55 PM			
	Microsoft Corporation			
wbemprox.dll	c:\winnt\system32\rsvp.exe			
	1.50.1085.0100	40.10 KB (41,061 bytes)		
	8/16/2005 1:52:03 PM			
	Microsoft Corporation			
mlang.dll	c:\winnt\system32\wbem\wbemprox.dll			
	5.00.3700.6655	510.77 KB (523,024 bytes)		
	8/16/2005 1:51:45 PM			
	Microsoft Corporation			
cabinet.dll	c:\winnt\system32\mlang.dll			
	5.00.2147.1	54.77 KB (56,080 bytes)		
	12/7/1999 7:00:00 AM			
	Microsoft Corporation			
msinfo32.dll	c:\winnt\system32\cabinet.dll			
	5.00.2195.6601	312.27 KB (319,760 bytes)		
	8/16/2005 1:52:05 PM			
	Microsoft Corporation			
	c:\program			
files\common files\microsoft				
shared\msinfo\msinfo32.dll				
mmcndmgr.dll	5.00.2195.6601	816.27 KB (835,856 bytes)		
	8/16/2005 1:51:45 PM			
	Microsoft Corporation			
msvc50.dll	c:\winnt\system32\mmcndmgr.dll			
	5.00.7051	552.50 KB (565,760 bytes)		
	12/7/1999 7:00:00 AM			
	Microsoft Corporation			
mfc42u.dll	c:\winnt\system32\msvc50.dll			
	6.00.9586.0	988.05 KB (1,011,764 bytes)		
	8/16/2005 1:51:44 PM			
	Microsoft Corporation			
mmc.exe	c:\winnt\system32\mfc42u.dll			
	5.00.2195.6601	589.27 KB (603,408 bytes)		
	8/16/2005 1:51:45 PM			
	Microsoft Corporation			
notepad.exe	c:\winnt\system32\mmc.exe			
	5.00.2140.1	49.77 KB (50,960 bytes)		
	12/7/1999 7:00:00 AM			
	Microsoft Corporation			
notepad.exe	c:\winnt\system32\notepad.exe			
	5.00.2195.6656	230.77 KB (236,304 bytes)		
	8/16/2005 1:51:36 PM			
	Microsoft Corporation			
rapilib.dll	c:\winnt\system32\notepad.exe			
	5.00.2195.6601	24.77 KB (25,360 bytes)		
	8/16/2005 1:51:54 PM			
	Microsoft Corporation			
rsvp.dll	c:\winnt\system32\rapilib.dll			
	5.00.2195.6611	75.27 KB (77,072 bytes)		
	8/16/2005 1:51:55 PM			
	Microsoft Corporation			
tardis.exe	c:\winnt\system32\rsvp.dll			
	5, 0, 1, 4	308.00 KB (315,392 bytes)		
	9/13/2002 6:21:25 PM			
	H.C.Mingham-Smith Ltd.			
	c:\program			
files\tardis 2000 v1.4\tardis.exe				
aclntusr.exe	6, 1, 401	180.00 KB (184,320 bytes)		
	6/5/2003 1:55:47 PM			
	Microsoft Corporation			
actxprxy.dll	c:\winnt\system32\aclntusr.exe			
	5.00.3502.6601	70.77 KB (72,464 bytes)		
	8/16/2005 1:51:31 PM			
	Microsoft Corporation			
	c:\winnt\system32\actxprxy.dll			

```

shdoclc.dll      5.00.3700.6668      324.50 KB
(332,288 bytes)  8/16/2005 1:51:56 PM
Microsoft Corporation
c:\winnt\system32\shdoclc.dll
netplwiz.dll    5.00.2195.6601     169.77 KB
(173,840 bytes)  8/16/2005 1:51:51 PM
Microsoft Corporation
c:\winnt\system32\netplwiz.dll
netmsg.dll      5.00.2137.1        152.50 KB
(156,160 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\netmsg.dll
netui2.dll      5.00.2134.1        280.27 KB
(286,992 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\netui2.dll
mprui.dll       5.00.2195.6601     54.77 KB (56,080 bytes)
8/16/2005 1:51:46 PM
Microsoft Corporation
c:\winnt\system32\mprui.dll
urlmon.dll      5.00.3700.6705     442.77 KB
(453,392 bytes)  8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\urlmon.dll
browselc.dll    5.00.3700.6661     34.50 KB
(35,328 bytes)  8/16/2005 1:51:34 PM
Microsoft Corporation
c:\winnt\system32\browselc.dll
faxshell.dll    5.00.2134.1        8.27 KB
(8,464 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\faxshell.dll
msacm32.dll     5.00.2134.1        65.27 KB
(66,832 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\msacm32.dll
avifil32.dll    5.00.2195.6612     76.77 KB
(78,608 bytes)  8/16/2005 1:51:34 PM
Microsoft Corporation
c:\winnt\system32\avifil32.dll
msvfw32.dll     5.00.2195.6612     113.77 KB
(116,496 bytes)  8/16/2005 1:51:49 PM
Microsoft Corporation
c:\winnt\system32\msvfw32.dll
docprop2.dll    5.00.2178.1        297.77 KB
(304,912 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\docprop2.dll
linkinfo.dll    5.00.2134.1        15.77 KB
(16,144 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\linkinfo.dll
powrprof.dll   5.00.3502.6601     13.27 KB
(13,584 bytes)  8/16/2005 1:51:53 PM
Microsoft Corporation
c:\winnt\system32\powrprof.dll
batmeter.dll    5.00.3502.6601     20.27 KB
(20,752 bytes)  8/16/2005 1:51:34 PM
Microsoft Corporation
c:\winnt\system32\batmeter.dll
stobject.dll   5.00.2195.6601     79.27 KB
(81,168 bytes)  8/16/2005 1:51:57 PM
Microsoft Corporation
c:\winnt\system32\stobject.dll

```

```

msi.dll 3.1.4000.2435 2.76 MB (2,890,240
bytes) 8/16/2005 1:51:47 PM
Microsoft Corporation
c:\winnt\system32\msi.dll
webcheck.dll 5.00.3502.6601 251.77 KB
(257,808 bytes) 8/16/2005 1:51:59 PM
Microsoft Corporation
c:\winnt\system32\webcheck.dll
ntshrui.dll 5.00.2134.1 46.77 KB
(47,888 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntshrui.dll
mydocs.dll 5.00.3502.6601 55.77 KB
(57,104 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\mydocs.dll
browseui.dll 5.00.3700.6661 789.27 KB
(808,208 bytes) 8/16/2005 1:51:34 PM
Microsoft Corporation
c:\winnt\system32\browseui.dll
shdocvw.dll 5.00.3700.6668 1.06 MB
(1,107,728 bytes) 8/16/2005 1:51:56 PM
Microsoft Corporation
c:\winnt\system32\shdocvw.dll
explorer.exe 5.00.3700.6690 237.77 KB
(243,472 bytes) 8/16/2005 1:52:01 PM
Microsoft Corporation
c:\winnt\explorer.exe
h323.tsp 5.00.2195.6699 248.77 KB (254,736
bytes) 8/16/2005 1:51:40 PM
Microsoft Corporation
c:\winnt\system32\h323.tsp
ipconf.tsp 5.00.2143.1 10.77 KB
(11,024 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ipconf.tsp
ndptsp.tsp 5.00.2143.1 38.27 KB
(39,184 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ndptsp.tsp
kmddsp.tsp 5.00.2150.1 17.77 KB
(18,192 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\kmddsp.tsp
uniplat.dll 5.00.2195.6601 14.27 KB
(14,608 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\uniplat.dll
unimdm.tsp 5.00.2195.6601 199.27 KB
(204,048 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\unimdm.tsp
tapisrv.dll 5.00.2195.6666 169.27 KB
(173,328 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\tapisrv.dll
dbnetlib.dll 2000.080.0194.00 84.06 KB
(86,082 bytes) 9/13/2002 6:19:43 PM
Microsoft Corporation
c:\winnt\system32\dbnetlib.dll
odbc32.dll 3.520.6526.0 100.27 KB
(102,672 bytes) 9/13/2002 6:19:39 PM
Microsoft Corporation
c:\winnt\system32\odbc32.dll

```

```

sqlsrv32.rll 2000.080.0194.00 88.00 KB
(90,112 bytes) 9/13/2002 6:19:44 PM
Microsoft Corporation
c:\winnt\system32\sqlsrv32.rll
mtxdm.dll 2000.2.3504.0 22.77 KB (23,312 bytes)
8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\mtxdm.dll
sqlunirl.dll 2000.080.0194.00 176.06 KB
(180,290 bytes) 8/6/2000 1:51:56 AM
Microsoft Corporation
c:\winnt\system32\sqlunirl.dll
sqlsrv32.dll 2000.080.0194.00 460.08 KB
(471,119 bytes) 9/13/2002 6:19:44 PM
Microsoft Corporation
c:\winnt\system32\sqlsrv32.dll
tpcc_com_all.dll 1, 0, 0, 1 104.00 KB
(106,496 bytes) 9/13/2002 6:29:44 PM
c:\inetpub\wwwroot\tpcc_com_all.dll
tpcc_odbc.dll Not Available 20.00 KB
(20,480 bytes) 6/1/2005 11:49:37 PM
Not Available
c:\inetpub\wwwroot\tpcc_odbc.dll
msvcr70.dll 7.00.9466.0 336.00 KB
(344,064 bytes) 6/1/2005 11:48:32 PM
Microsoft Corporation
c:\winnt\system32\msvcr70.dll
mfc42.dll 6.00.9586.0 992.05 KB (1,015,859
bytes) 8/16/2005 1:51:44 PM
Microsoft Corporation
c:\winnt\system32\mfc42.dll
wam.dll 5.00.0984 70.77 KB (72,464 bytes)
8/16/2005 1:52:13 PM
Microsoft Corporation
c:\winnt\system32\inetsrv\wam.dll
odbcint.dll 3.520.6526.0 88.00 KB
(90,112 bytes) 9/13/2002 6:19:39 PM
Microsoft Corporation
c:\winnt\system32\odbcint.dll
odbc32.dll 3.520.6526.0 216.27 KB
(221,456 bytes) 9/13/2002 6:19:39 PM
Microsoft Corporation
c:\winnt\system32\odbc32.dll
mtxoci.dll 2000.2.3504.0 103.27 KB
(105,744 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\mtxoci.dll
iislog.dll 5.00.0984 75.27 KB (77,072 bytes)
8/16/2005 1:52:12 PM
Microsoft Corporation
c:\winnt\system32\inetsrv\iislog.dll
inetsloc.dll 5.00.0984 20.27 KB (20,752 bytes)
8/16/2005 1:51:42 PM
Microsoft Corporation
c:\winnt\system32\inetsloc.dll
isatq.dll 5.00.0984 61.27 KB (62,736 bytes)
8/16/2005 1:52:12 PM
Microsoft Corporation
c:\winnt\system32\inetsrv\isatq.dll
security.dll 5.00.2154.1 5.77 KB
(5,904 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\security.dll
svcxext.dll 5.00.0984 39.77 KB (40,720 bytes)
8/16/2005 1:52:13 PM
Microsoft Corporation
c:\winnt\system32\inetsrv\svcxext.dll
admexs.dll 5.00.0984 27.77 KB (28,432 bytes)
8/16/2005 1:52:11 PM
Microsoft

```

Corporation
 c:\winnt\system32\inetsrv\admexs.dll
 wamreg.dll 5.00.0984 45.77 KB (46,864 bytes)
 8/16/2005 1:52:13 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\wamreg.dll
 metadata.dll 5.00.0984 68.77 KB (70,416 bytes)
 8/16/2005 1:52:13 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\metadata.dll
 iismap.dll 5.00.0984 56.27 KB (57,616 bytes)
 8/16/2005 1:51:42 PM Microsoft Corporation
 c:\winnt\system32\iismap.dll
 nsepm.dll 5.00.0984 43.27 KB (44,304 bytes)
 8/16/2005 1:52:13 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\nsepm.dll
 admwprox.dll 5.00.0984 31.77 KB (32,528 bytes)
 9/13/2002 5:45:33 PM Microsoft Corporation
 c:\winnt\system32\admwprox.dll
 coadmin.dll 5.00.0984 39.77 KB (40,720 bytes)
 8/16/2005 1:52:12 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\coadmin.dll
 iisadmin.dll 5.00.0984 15.77 KB (16,144 bytes)
 8/16/2005 1:52:12 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\iisadmin.dll
 rpcref.dll 5.00.0984 4.27 KB (4,368 bytes)
 8/16/2005 1:52:13 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\rpcref.dll
 iisrtl.dll 5.00.0984 121.27 KB (124,176 bytes)
 8/16/2005 1:51:42 PM Microsoft Corporation
 c:\winnt\system32\iisrtl.dll
 inetinfo.exe 5.00.0984 14.27 KB (14,608 bytes)
 8/16/2005 1:52:12 PM Microsoft Corporation
 c:\winnt\system32\inetsrv\inetinfo.exe
 netui1.dll 5.00.2134.1 210.27 KB (215,312 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\netui1.dll
 netui0.dll 5.00.2195.6601 70.27 KB (71,952 bytes)
 8/16/2005 1:51:51 PM Microsoft Corporation
 c:\winnt\system32\netui0.dll
 ntlanman.dll 5.00.2195.6601 35.27 KB (36,112 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\ntlanman.dll
 wshnetbs.dll 5.00.2134.1 7.77 KB (7,952 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\wshnetbs.dll
 perfos.dll 5.00.2155.1 21.27 KB (21,776 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\perfos.dll
 provthrd.dll 1.50.1085.0000 68.07 KB (69,708 bytes)
 9/13/2002 5:45:53 PM Microsoft Corporation
 c:\winnt\system32\wbem\provthrd.dll

ntevt.dll 1.50.1085.0072 192.06 KB (196,671 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\ntevt.dll
 framedyn.dll 1.50.1085.0076 164.07 KB (168,009 bytes)
 8/16/2005 1:52:02 PM Microsoft Corporation
 c:\winnt\system32\wbem\framedyn.dll
 cimwin32.dll 1.50.1085.0103 1.04 MB (1,089,637 bytes)
 8/16/2005 1:52:02 PM Microsoft Corporation
 c:\winnt\system32\wbem\cimwin32.dll
 wbemsvc.dll 1.50.1085.0007 40.07 KB (41,036 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\wbemsvc.dll
 wbemess.dll 1.50.1085.0100 364.09 KB (372,825 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\wbemess.dll
 fastprox.dll 1.50.1085.0100 152.10 KB (155,749 bytes)
 8/16/2005 1:52:02 PM Microsoft Corporation
 c:\winnt\system32\wbem\fastprox.dll
 wbemcore.dll 1.50.1085.0100 632.09 KB (647,257 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\wbemcore.dll
 wbemcomn.dll 1.50.1085.0100 692.09 KB (708,696 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\wbemcomn.dll
 winmgmt.exe 1.50.1085.0100 192.10 KB (196,706 bytes)
 8/16/2005 1:52:03 PM Microsoft Corporation
 c:\winnt\system32\wbem\winmgmt.exe
 msidle.dll 5.00.2920.0000 6.27 KB (6,416 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\msidle.dll
 mstask.exe 4.71.2195.6704 116.77 KB (119,568 bytes)
 8/16/2005 1:51:49 PM Microsoft Corporation
 c:\winnt\system32\mstask.exe
 wmi.dll 5.00.2191.1 6.27 KB (6,416 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\wmi.dll
 netshell.dll 5.00.2195.6604 466.27 KB (477,456 bytes)
 8/16/2005 1:51:51 PM Microsoft Corporation
 c:\winnt\system32\netshell.dll
 netman.dll 5.00.2195.6660 93.27 KB (95,504 bytes)
 8/16/2005 1:51:51 PM Microsoft Corporation
 c:\winnt\system32\netman.dll
 resutils.dll 5.00.2195.6702 39.77 KB (40,720 bytes)
 8/16/2005 1:51:54 PM Microsoft Corporation
 c:\winnt\system32\resutils.dll
 clusapi.dll 5.00.2195.6683 54.27 KB (55,568 bytes)
 8/16/2005 1:51:35 PM Microsoft Corporation
 c:\winnt\system32\clusapi.dll

mtxclu.dll 2000.2.3504.0 51.27 KB (52,496 bytes)
 8/16/2005 1:51:50 PM Microsoft Corporation
 c:\winnt\system32\mtxclu.dll
 msdtcprx.dll 2000.2.3504.0 690.77 KB (707,344 bytes)
 8/16/2005 1:51:46 PM Microsoft Corporation
 c:\winnt\system32\msdtcprx.dll
 comsvcs.dll 2000.2.3504.0 1.38 MB (1,448,208 bytes)
 8/16/2005 1:51:36 PM Microsoft Corporation
 c:\winnt\system32\comsvcs.dll
 ntmsdba.dll 5.00.2195.6655 169.27 KB (173,328 bytes)
 8/16/2005 1:51:52 PM Microsoft Corporation
 c:\winnt\system32\ntmsdba.dll
 ipbootp.dll 5.00.2168.1 33.77 KB (34,576 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\ipbootp.dll
 cryptui.dll 5.131.2195.6628 433.27 KB (443,664 bytes)
 8/16/2005 1:51:37 PM Microsoft Corporation
 c:\winnt\system32\cryptui.dll
 rastls.dll 5.00.2195.6680 98.27 KB (100,624 bytes)
 8/16/2005 1:51:54 PM Microsoft Corporation
 c:\winnt\system32\rastls.dll
 raschap.dll 5.00.2195.6663 59.27 KB (60,688 bytes)
 8/16/2005 1:51:54 PM Microsoft Corporation
 c:\winnt\system32\raschap.dll
 rasppp.dll 5.00.2195.6626 194.27 KB (198,928 bytes)
 8/16/2005 1:51:54 PM Microsoft Corporation
 c:\winnt\system32\rasppp.dll
 rastapi.dll 5.00.2195.6604 52.77 KB (54,032 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\rastapi.dll
 rasdlg.dll 5.00.2195.6625 516.77 KB (529,168 bytes)
 12/7/1999 7:00:00 AM Microsoft Corporation
 c:\winnt\system32\rasdlg.dll
 netcfgx.dll 5.00.2195.6604 534.77 KB (547,600 bytes)
 8/16/2005 1:51:50 PM Microsoft Corporation
 c:\winnt\system32\netcfgx.dll
 rasmans.dll 5.00.2195.6696 149.77 KB (153,360 bytes)
 8/16/2005 1:51:54 PM Microsoft Corporation
 c:\winnt\system32\rasmans.dll
 sens.dll 5.00.2195.6627 37.27 KB (38,160 bytes)
 8/16/2005 1:51:55 PM Microsoft Corporation
 c:\winnt\system32\sens.dll
 ntmsvc.dll 5.00.2195.6655 391.77 KB (401,168 bytes)
 8/16/2005 1:51:52 PM Microsoft Corporation
 c:\winnt\system32\ntmsvc.dll
 sensapi.dll 5.00.2195.6627 7.27 KB (7,440 bytes)
 8/16/2005 1:51:55 PM Microsoft Corporation
 c:\winnt\system32\sensapi.dll


```

winhttp.dll 5.1.2600.1188 (xpsp2.030318-2132)
303.50 KB (310,784 bytes) 8/16/2005
1:52:11 PM Microsoft Corporation
c:\winnt\system32\winhttp.dll
txfaux.dll 2000.2.3504.0 388.27 KB
(397,584 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\txfaux.dll
es.dll 2000.2.3504.0 227.77 KB (233,232
bytes) 8/16/2005 1:51:39 PM Microsoft
Corporation c:\winnt\system32\es.dll
util.dll 5.00.2195.6701 25.77 KB
(26,384 bytes) 8/16/2005 1:51:59 PM
Microsoft Corporation
c:\winnt\system32\util.dll
wtsapi32.dll 5.00.2134.1 14.27 KB
(14,608 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\wtsapi32.dll
advpack.dll 5.00.3502.6601 86.77 KB
(88,848 bytes) 8/16/2005 1:51:33 PM
Microsoft Corporation
c:\winnt\system32\advpack.dll
wuaueng.dll 5.4.3630.2554 built by: lab04_n
188.00 KB (192,512 bytes) 8/16/2005
1:52:11 PM Microsoft Corporation
c:\winnt\system32\wuaueng.dll
wuauerv.dll 5.4.3630.2554 built by: lab04_n
9.00 KB (9,216 bytes) 8/16/2005
1:52:11 PM Microsoft Corporation
c:\winnt\system32\wuauerv.dll
rpcss.dll 5.00.2195.6702 233.77 KB (239,376
bytes) 8/16/2005 1:51:55 PM Microsoft
Corporation c:\winnt\system32\rpcss.dll
svchost.exe 5.00.2134.1 7.77 KB
(7,952 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\svchost.exe
rsys.exe Not Available 32.00 KB (32,768 bytes)
9/13/2002 6:30:57 PM Not Available
c:\benchcraft\rsys.exe
regsvc.exe 5.00.2195.6701 66.77 KB
(68,368 bytes) 8/16/2005 1:51:54 PM
Microsoft Corporation
c:\winnt\system32\regsvc.exe
ntmarta.dll 5.00.2195.6666 100.27 KB
(102,672 bytes) 8/16/2005 1:51:52 PM
Microsoft Corporation
c:\winnt\system32\ntmarta.dll
psapi.dll 5.00.2134.1 28.27 KB (28,944 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\psapi.dll
riched20.dll 5.30.23.1215 421.77 KB
(431,888 bytes) 8/16/2005 1:51:54 PM
Microsoft Corporation
c:\winnt\system32\riched20.dll
riched32.dll 5.00.2134.1 3.77 KB
(3,856 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\riched32.dll
comdlg32.dll 5.00.3700.6693 235.77 KB
(241,424 bytes) 12/7/1999 7:00:00 AM

```

```

Microsoft Corporation
c:\winnt\system32\comdlg32.dll
aclient.exe 6.1.401 4.63 MB (4,857,932
bytes) 6/5/2003 1:55:46 PM Altiris, Inc.
c:\program
files\altiris\aclient\aclient.exe
rdpwsx.dll 5.00.2195.6697 97.90 KB
(100,248 bytes) 8/16/2005 1:51:54 PM
Microsoft Corporation
c:\winnt\system32\rdpwsx.dll
mstlsapi.dll 5.00.2195.6659 25.77 KB
(26,384 bytes) 8/16/2005 1:51:49 PM
Microsoft Corporation
c:\winnt\system32\mstlsapi.dll
icaapi.dll 5.00.2195.6654 122.77 KB
(125,712 bytes) 8/16/2005 1:51:41 PM
Microsoft Corporation
c:\winnt\system32\icaapi.dll
regapi.dll 5.00.2195.6602 35.27 KB
(36,112 bytes) 8/16/2005 1:51:54 PM
Microsoft Corporation
c:\winnt\system32\regapi.dll
termsrv.exe 5.00.2195.6696 139.27 KB
(142,608 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\termsrv.exe
dssenh.dll 5.00.2195.6612 143.77 KB
(147,216 bytes) 8/16/2005 1:52:09 PM
Microsoft Corporation
c:\winnt\system32\dssenh.dll
iissuba.dll 5.00.0984.9.77 KB (10,000 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\iissuba.dll
scecli.dll 5.00.2195.6704 111.77 KB
(114,448 bytes) 8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\scecli.dll
esent.dll 6.1.3940.31 1.08 MB (1,135,376
bytes) 8/16/2005 1:51:39 PM Microsoft
Corporation c:\winnt\system32\esent.dll
mwssock.dll 5.00.2195.6603 62.77 KB
(64,272 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\mwssock.dll
ntdsatq.dll 5.00.2195.6620 31.27 KB
(32,016 bytes) 8/16/2005 1:51:51 PM
Microsoft Corporation
c:\winnt\system32\ntdsatq.dll
ntdsa.dll 5.00.2195.6697 1016.27 KB (1,040,656
bytes) 8/16/2005 1:51:51 PM Microsoft
Corporation c:\winnt\system32\ntdsa.dll
kdcsvc.dll 5.00.2195.6627 144.77 KB
(148,240 bytes) 8/16/2005 1:51:44 PM
Microsoft Corporation
c:\winnt\system32\kdcsvc.dll
sfmapi.dll 5.00.2134.1 38.77 KB
(39,696 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\sfmapi.dll
rassfm.dll 5.00.2195.6604 21.27 KB
(21,776 bytes) 8/16/2005 1:51:54 PM
Microsoft Corporation
c:\winnt\system32\rassfm.dll

```

```

rsabase.dll 5.00.2195.6619 129.27 KB
(132,368 bytes) 6/19/2003 12:05:04 PM
Microsoft Corporation
c:\winnt\system32\rsabase.dll
schannel.dll 5.00.2195.6705 144.27 KB
(147,728 bytes) 5/4/2001 12:05:02 PM
Microsoft Corporation
c:\winnt\system32\schannel.dll
netlogon.dll 5.00.2195.6695 363.27 KB
(371,984 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\netlogon.dll
kerberos.dll 5.00.2195.6666 207.77 KB
(212,752 bytes) 8/16/2005 1:51:44 PM
Microsoft Corporation
c:\winnt\system32\kerberos.dll
msprivs.dll 5.00.2195.6695 46.00 KB
(47,104 bytes) 8/16/2005 1:51:48 PM
Microsoft Corporation
c:\winnt\system32\msprivs.dll
samsrv.dll 5.00.2195.6697 380.77 KB
(389,904 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\samsrv.dll
lsaasrv.dll 5.00.2195.6695 506.77 KB
(518,928 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\lsaasrv.dll
lsass.exe 5.00.2195.6695 32.77 KB (33,552 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\lsass.exe
ntlsapi.dll 5.00.2195.6601 6.77 KB
(6,928 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ntlsapi.dll
wmicore.dll 5.00.2195.6611 72.77 KB
(74,512 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wmicore.dll
browser.dll 5.00.2195.6693 67.27 KB
(68,880 bytes) 8/16/2005 1:51:34 PM
Microsoft Corporation
c:\winnt\system32\browser.dll
trkwks.dll 5.00.2195.6623 88.27 KB
(90,384 bytes) 8/16/2005 1:51:58 PM
Microsoft Corporation
c:\winnt\system32\trkwks.dll
psbase.dll 5.00.2195.6661 112.77 KB
(115,472 bytes) 8/16/2005 1:51:53 PM
Microsoft Corporation
c:\winnt\system32\psbase.dll
cryptsvc.dll 5.00.2195.6661 74.27 KB
(76,048 bytes) 8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\cryptsvc.dll
cfgmgr32.dll 5.00.2134.1 16.77 KB
(17,168 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\cfgmgr32.dll
dmserver.dll 2195.6605.297.3 11.77 KB
(12,048 bytes) 8/16/2005 1:51:38 PM
VERITAS Software Corp.
c:\winnt\system32\dmserver.dll

```

```

seclogon.dll      5.00.2195.6707      16.77 KB
(17,168 bytes)   8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\seclogon.dll
cryptdll.dll     5.00.2195.6607      43.27 KB
(44,304 bytes)   8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\cryptdll.dll
wkssvc.dll       5.00.2195.6692      95.77 KB
(98,064 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\wkssvc.dll
srvsvc.dll       5.00.2195.6697      81.77 KB
(83,728 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\srvc.dll
eventlog.dll     5.00.2195.6716      46.77 KB
(47,888 bytes)   8/16/2005 1:51:40 PM
Microsoft Corporation
c:\winnt\system32\eventlog.dll
scesrv.dll       5.00.2195.6704      248.77 KB
(254,736 bytes)  8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\scesrv.dll
umpnpgm.dll      5.00.2182.1          86.27 KB
(88,336 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\umpnpgm.dll
services.exe     5.00.2195.6700      87.27 KB
(89,360 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\services.exe
clbcatq.dll      2000.2.3504.0        498.27 KB
(510,224 bytes)  8/16/2005 1:51:35 PM
Microsoft Corporation
c:\winnt\system32\clbcatq.dll
wzcsapi.dll      5.00.2195.6604      29.27 KB
(29,968 bytes)   8/16/2005 1:52:10 PM
Microsoft Corporation
c:\winnt\system32\wzcsapi.dll
wzcdlg.dll       5.00.2195.6604      51.27 KB
(52,496 bytes)   8/16/2005 1:52:10 PM
Microsoft Corporation
c:\winnt\system32\wzcdlg.dll
cscui.dll        5.00.2195.6705      237.27 KB
(242,960 bytes)   8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\cscui.dll
wininet.dll      5.00.3700.6713      455.77 KB
(466,704 bytes)  8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wininet.dll
cryptnet.dll     5.131.2195.6601      42.27 KB
(43,280 bytes)   8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\cryptnet.dll
msv1_0.dll       5.00.2195.6680      114.77 KB
(117,520 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\msv1_0.dll
ntdsapi.dll      5.00.2195.6666      56.27 KB
(57,616 bytes)   8/16/2005 1:51:51 PM
Microsoft Corporation
c:\winnt\system32\ntdsapi.dll

```

```

rasadhlp.dll     5.00.2168.1          7.27 KB
(7,440 bytes)    12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\rasadhlp.dll
winrnr.dll       5.00.2160.1          18.77 KB
(19,216 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\winrnr.dll
rnr20.dll        5.00.2195.6603      35.77 KB (36,624 bytes)
8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\rnr20.dll
dhcpcsvc.dll     5.00.2195.6685      90.77 KB
(92,944 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\dhcpcsvc.dll
tapi32.dll       5.00.2195.6664      123.77 KB
(126,736 bytes)  8/16/2005 1:51:57 PM
Microsoft Corporation
c:\winnt\system32\tapi32.dll
rasman.dll       5.00.2195.6604      54.77 KB
(56,080 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\rasman.dll
rasapi32.dll     5.00.2195.6625      192.77 KB
(197,392 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\rasapi32.dll
rtutils.dll      5.00.2168.1          43.77 KB
(44,816 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\rtutils.dll
adslrpc.dll      5.00.2195.6701      130.77 KB
(133,904 bytes)  8/16/2005 1:51:33 PM
Microsoft Corporation
c:\winnt\system32\adslrpc.dll
activeds.dll     5.00.2195.6601      177.77 KB
(182,032 bytes)  8/16/2005 1:51:31 PM
Microsoft Corporation
c:\winnt\system32\activeds.dll
oleaut32.dll     2.40.4522.612.27 KB (626,960
bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\oleaut32.dll
mprapi.dll       5.00.2181.1          79.27 KB
(81,168 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\mprapi.dll
icmp.dll         5.00.2134.1          7.27 KB (7,440 bytes)
12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\icmp.dll
iphlpapi.dll     5.00.2195.6602      68.27 KB
(69,904 bytes)   8/16/2005 1:51:43 PM
Microsoft Corporation
c:\winnt\system32\iphlpapi.dll
wshtcpip.dll     5.00.2195.6601      17.27 KB
(17,680 bytes)   8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wshtcpip.dll
msafd.dll        5.00.2195.6602      106.27 KB (108,816
bytes) 8/16/2005 1:51:46 PM
Microsoft Corporation
c:\winnt\system32\msafd.dll
mpr.dll          5.00.2195.6611      53.77 KB (55,056 bytes)
8/16/2005 1:51:45 PM
Microsoft Corporation
c:\winnt\system32\mpr.dll

```

```

winspool.drv     5.00.2195.6659      111.27 KB
(113,936 bytes)  12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\winspool.drv
winscard.dll     5.00.2195.6609      77.27 KB
(79,120 bytes)   8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\winscard.dll
atl.dll          3.00.9435.73.06 KB (74,810 bytes)
8/16/2005 1:51:33 PM
Microsoft Corporation
c:\winnt\system32\atl.dll
certcli.dll      5.00.2195.6619      132.27 KB
(135,440 bytes)  8/16/2005 1:51:35 PM
Microsoft Corporation
c:\winnt\system32\certcli.dll
wlnotify.dll     5.00.2195.6706      56.27 KB
(57,616 bytes)   8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wlnotify.dll
csddl.dll        5.00.2195.6713      98.77 KB
(101,136 bytes)  8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\csddl.dll
lz32.dll         5.00.2195.6611      9.77 KB (10,000 bytes)
8/16/2005 1:51:44 PM
Microsoft Corporation
c:\winnt\system32\lz32.dll
version.dll      5.00.2195.6623      15.77 KB
(16,144 bytes)   8/16/2005 1:51:59 PM
Microsoft Corporation
c:\winnt\system32\version.dll
rsaenh.dll       5.00.2195.6611      131.77 KB
(134,928 bytes)  8/16/2005 1:52:09 PM
Microsoft Corporation
c:\winnt\system32\rsaenh.dll
mscat32.dll      5.131.2134.1         7.77 KB
(7,952 bytes)    12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\mscat32.dll
ole32.dll        5.00.2195.6692      972.77 KB (996,112
bytes) 8/16/2005 1:51:52 PM
Microsoft Corporation
c:\winnt\system32\ole32.dll
imagehlp.dll     5.00.2195.6613      125.77 KB
(128,784 bytes)  5/4/2001 12:05:02 PM
Microsoft Corporation
c:\winnt\system32\imagehlp.dll
msasn1.dll       5.00.2195.6666      51.77 KB
(53,008 bytes)   12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\msasn1.dll
crypt32.dll      5.131.2195.6661      468.27 KB
(479,504 bytes)  8/16/2005 1:51:37 PM
Microsoft Corporation
c:\winnt\system32\crypt32.dll
wintrust.dll     5.131.2195.6624      162.27 KB
(166,160 bytes)  8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wintrust.dll
shlwapi.dll      5.00.3502.6601      282.77 KB
(289,552 bytes)  8/16/2005 1:51:56 PM
Microsoft Corporation
c:\winnt\system32\shlwapi.dll
shell32.dll      5.00.3700.6705      2.27 MB
(2,383,632 bytes) 8/16/2005 1:51:56 PM

```

```

Microsoft Corporation
c:\winnt\system32\shell32.dll
msgina.dll 5.00.2195.6669 326.27 KB
(334,096 bytes) 8/16/2005 1:51:46 PM
Microsoft Corporation
c:\winnt\system32\msgina.dll
comctl32.dll 5.81 537.77 KB (550,672
bytes) 12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\comctl32.dll
setupapi.dll 5.00.2195.6622 556.77 KB
(570,128 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\setupapi.dll
winmm.dll 5.00.2161.1 184.77 KB (189,200
bytes) 12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\winmm.dll
winsta.dll 5.00.2195.6701 38.27 KB
(39,184 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\winsta.dll
wsock32.dll 5.00.2195.6603 21.27 KB
(21,776 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wsock32.dll
dnsapi.dll 5.00.2195.6680 131.77 KB
(134,928 bytes) 8/16/2005 1:51:38 PM
Microsoft Corporation
c:\winnt\system32\dnsapi.dll
wldap32.dll 5.00.2195.6666 158.27 KB
(162,064 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\wldap32.dll
ws2help.dll 5.00.2134.1 17.77 KB
(18,192 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\ws2help.dll
ws2_32.dll 5.00.2195.6601 68.27 KB
(69,904 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\ws2_32.dll
samlib.dll 5.00.2195.6666 48.77 KB
(49,936 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\samlib.dll
netrap.dll 5.00.2134.1 11.27 KB
(11,536 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\netrap.dll
netapi32.dll 5.00.2195.6601 304.27 KB
(311,568 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\netapi32.dll
profmap.dll 5.00.2195.6610 29.27 KB
(29,968 bytes) 8/16/2005 1:51:53 PM
Microsoft Corporation
c:\winnt\system32\profmap.dll
secur32.dll 5.00.2195.6695 47.77 KB
(48,912 bytes) 8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\secur32.dll
sfc.dll 5.00.2195.6673 92.80 KB (95,024 bytes)
8/16/2005 1:51:55 PM Microsoft
Corporation c:\winnt\system32\sfc.dll

```

```

nddeapi.dll 5.00.2195.6661 15.77 KB
(16,144 bytes) 8/16/2005 1:51:50 PM
Microsoft Corporation
c:\winnt\system32\nddeapi.dll
userenv.dll 5.00.2195.6711 380.77 KB
(389,904 bytes) 8/16/2005 1:51:59 PM
Microsoft Corporation
c:\winnt\system32\userenv.dll
user32.dll 5.00.2195.6688 393.77 KB
(403,216 bytes) 8/16/2005 1:51:59 PM
Microsoft Corporation
c:\winnt\system32\user32.dll
gdi32.dll 5.00.2195.6660 228.27 KB (233,744
bytes) 8/16/2005 1:51:40 PM Microsoft
Corporation c:\winnt\system32\gdi32.dll
rpcrt4.dll 5.00.2195.6701 443.77 KB
(454,416 bytes) 8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\rpcrt4.dll
advapi32.dll 5.00.2195.6710 378.27 KB
(387,344 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\advapi32.dll
kernel32.dll 5.00.2195.6688 725.77 KB
(743,184 bytes) 12/7/1999 7:00:00 AM
Microsoft Corporation
c:\winnt\system32\kernel32.dll
msvcrt.dll 6.10.9844.0 280.05 KB
(286,773 bytes) 6/19/2003 12:05:04 PM
Microsoft Corporation
c:\winnt\system32\msvcrt.dll
winlogon.exe 5.00.2195.6714 176.77 KB
(181,008 bytes) 8/16/2005 1:52:00 PM
Microsoft Corporation
c:\winnt\system32\winlogon.exe
sfcfiles.dll 5.00.2195.6717 948.27 KB
(971,024 bytes) 8/16/2005 1:51:55 PM
Microsoft Corporation
c:\winnt\system32\sfcfiles.dll
ntdll.dll 5.00.2195.6685 480.27 KB (491,792
bytes) 5/4/2001 12:05:02 PM Microsoft
Corporation c:\winnt\system32\ntdll.dll
smss.exe 5.00.2195.6601 44.77 KB (45,840 bytes)
12/7/1999 7:00:00 AM Microsoft
Corporation c:\winnt\system32\smss.exe

[Services]

Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Altiris Client Service
Auto Own Process c:\program
files\altiris\aclient\aclient.exe -service
Normal LocalSystem 0
Alerter Alerter Stopped Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Application Management AppMgmt Stopped
Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0

```

```

ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\winnt\microsoft.net\framework\v2.0.50215
\aspnet_state.exe Normal \ASPNET 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\winnt\system32\svchost.exe -k bitsgroup
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Indexing Service cisvc Stopped Manual
Share Process
c:\winnt\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Manual Own Process
c:\winnt\system32\clipsrv.exe Normal
LocalSystem 0
.NET Runtime Optimization Service v2.0.50215_X86
clr_optimization_v2.0.50215_32
Stopped Manual Own Process
c:\winnt\microsoft.net\framework\v2.0.50215
\mscorsvw.exe Ignore LocalSystem 0
Distributed File System Dfs Stopped
Disabled Own Process
c:\winnt\system32\dfssvc.exe Normal
LocalSystem 0
DHCP Client Dhcp Stopped Disabled
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\winnt\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
DNS Client Dnscache Stopped Manual
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Fax Service Fax Stopped Manual Own
Process c:\winnt\system32\faxsvc.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto
Share Process
c:\winnt\system32\inetrv\inetinfo.exe
Normal LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process c:\winnt\system32\ismserv.exe Normal
LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process

```

```

c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
License Logging Service LicenseService
Stopped Manual Own Process
c:\winnt\system32\llssrv.exe Normal
LocalSystem 0
TCP/IP NetBIOS Helper Service LmHosts Stopped
Disabled Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Messenger Messenger Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrv
Stopped Manual Own Process
c:\winnt\system32\mnmsrv.exe Normal
LocalSystem 0
Distributed Transaction Coordinator MSDTC
Stopped Manual Own Process
c:\winnt\system32\msdtc.exe Normal
LocalSystem 0
Windows Installer MSIServer Stopped Manual
Share Process
c:\winnt\system32\msiexec.exe /v
Normal LocalSystem 0
Network DDE NetDDE Stopped Manual
Share Process
c:\winnt\system32\netdde.exe Normal
LocalSystem 0
Network DDE DSDM NetDDEdsdm Stopped
Manual Share Process
c:\winnt\system32\netdde.exe Normal
LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Network Connections Netman Running Manual
Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
File Replication NtFrs Stopped Manual Own
Process c:\winnt\system32\ntfrs.exe Ignore
LocalSystem 0
NT LM Security Support Provider NtLmSsp
Stopped Manual Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Removable Storage NtmsSvc Running Auto
Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0

```

```

IPSEC Policy Agent PolicyAgent Stopped
Disabled Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Protected Storage ProtectedStorage Running
Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Remote Access Auto Connection Manager RasAuto
Stopped Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Access Connection Manager RasMan
Running Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Routing and Remote Access RemoteAccess
Stopped Disabled Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Remote Registry Service RemoteRegistry
Running Auto Own Process
c:\winnt\system32\regsvc.exe Normal
LocalSystem 0
Remote Command Service RMSYS Running
Auto Own Process
c:\benchcraft\rsys.exe Normal
LocalSystem 0
Remote Procedure Call (RPC) Locator RpcLocator
Stopped Manual Own Process
c:\winnt\system32\locator.exe Normal
LocalSystem 0
Remote Procedure Call (RPC) RpcSs Running
Auto Share Process
c:\winnt\system32\svchost -k rpccs
Normal LocalSystem 0
QoS RSVP RSVP Running Manual Own Process
c:\winnt\system32\rsvp.exe -s Normal
LocalSystem 0
Security Accounts Manager SamSs Running
Auto Share Process
c:\winnt\system32\lsass.exe Normal
LocalSystem 0
Smart Card Helper SCardDrv Stopped Manual
Share Process
c:\winnt\system32\scardsvr.exe
Ignore LocalSystem 0
Smart Card SCardSvr Stopped Manual
Share Process
c:\winnt\system32\scardsvr.exe
Ignore LocalSystem 0
Task Scheduler Schedule Running Auto
Share Process
c:\winnt\system32\mstask.exe Normal
LocalSystem 0
RunAs Service seclogon Running Auto
Share Process
c:\winnt\system32\services.exe
Ignore LocalSystem 0
System Event Notification SENS Running
Auto Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Internet Connection Sharing SharedAccess
Stopped Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Print Spooler Spooler Stopped Manual Own
Process c:\winnt\system32\spoolsv.exe Normal
LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
Manual Own Process
c:\winnt\system32\smlogsvc.exe
Normal LocalSystem 0
Telephony Tapisrv Running Manual Share Process
c:\winnt\system32\svchost.exe -k tapisrv
Normal LocalSystem 0
Terminal Services TermService Running
Auto Own Process
c:\winnt\system32\termsrv.exe Normal
LocalSystem 0
Telnet TlntSvr Stopped Manual Own Process
c:\winnt\system32\tlntsvr.exe Normal
LocalSystem 0
Distributed Link Tracking Server TrkSvr
Stopped Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\winnt\system32\ups.exe Normal
LocalSystem 0
Utility Manager UtilMan Stopped Manual Own
Process c:\winnt\system32\utilman.exe Normal
LocalSystem 0
Windows Time W32Time Stopped Manual
Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
World Wide Web Publishing Service W3SVC
Stopped Auto Share Process
c:\winnt\system32\inetrv\inetinfo.exe
Normal LocalSystem 0
Windows Management Instrumentation WinMgmt
Running Auto Own Process
c:\winnt\system32\wbem\winmgmt.exe
Ignore LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi Running Manual Share Process
c:\winnt\system32\services.exe
Normal LocalSystem 0
Automatic Updates wuauclt Running Auto
Share Process
c:\winnt\system32\svchost.exe -k wugroup
Normal LocalSystem 0
Wireless Configuration WZCSVC Stopped
Manual Share Process
c:\winnt\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
[Program Groups]

```

Group Name	Name	User Name
Accessories	Default	User:Accessories
	Default User	
Accessories\Accessibility	Default	
User:Accessories\Accessibility		Default User
Accessories\Entertainment	Default	
User:Accessories\Entertainment		Default User
Accessories\System Tools	Default	
User:Accessories\System Tools		Default User
Startup	Default User:Startup	Default User
Accessories	All Users:Accessories	All Users
Accessories\Communications	All	
User:Accessories\Communications		All Users
Accessories\Entertainment	All	
User:Accessories\Entertainment		All Users
Accessories\Microsoft Script Debugger	All	
User:Accessories\Microsoft Script Debugger		All Users
Accessories\System Tools	All	
User:Accessories\System Tools		All Users
Administrative Tools	All	
User:Administrative Tools		All Users
HP System Tools	All Users:HP System Tools	All Users
HP System Tools\HP Array Diagnostic Utility	All	
User:HP System Tools\HP Array Diagnostic Utility		All Users
Microsoft SQL Server 2005 CTP	All Users:Microsoft SQL Server 2005 CTP	All Users
Microsoft SQL Server 2005 CTP\Configuration Tools	All Users:Microsoft SQL Server 2005 CTP\Configuration Tools	All Users
Microsoft SQL Server 2005 CTP\Documentation and Tutorials	All Users:Microsoft SQL Server 2005 CTP\Documentation and Tutorials	All Users
Startup	All Users:Startup	All Users
Tardis	All Users:Tardis	All Users
Accessories	CL25\Administrator:Accessories	
	CL25\Administrator	
Accessories\Accessibility	CL25\Administrator:Accessories\Accessibility	
	CL25\Administrator	
Accessories\Entertainment	CL25\Administrator:Accessories\Entertainment	
	CL25\Administrator	
Accessories\System Tools	CL25\Administrator:Accessories\System Tools	
	CL25\Administrator	
Administrative Tools	CL25\Administrator:Administrative Tools	
	CL25\Administrator	
Startup	CL25\Administrator:Startup	
	CL25\Administrator	
[Startup Programs]		
Program	Command	User Name Location

Tardis 2000 c:\progra-1\tardis-1.4\tardis.exe

All Users Common Startup

ACIntUsr c:\program files\altiris\aclient\aclntusr.exe All Users

HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run

[OLE Registration]

Object	Local Server
Sound (OLE2)	sndrec32.exe
Media Clip	mplay32.exe
Video Clip	mplay32.exe /avi
MIDI Sequence	mplay32.exe /mid
Sound	Not Available
Media Clip	Not Available
Image Document	"C:\Program Files\Windows NT\Accessories\ImageVue\KodakImg.exe"
WordPad Document	"%ProgramFiles%\Windows NT\Accessories\WORDPAD.EXE"
Windows Media Services DRM Storage object	Not Available
Available	
DDSContainerCtl Class	Not Available
Bitmap Image	mspaint.exe

[Internet Explorer 5]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Version	5.00.3700.1000
Build	53700.1000
Product ID	51876-270-9567332-05753
Application Path	C:\Program Files\Internet Explorer
Language	English (United States)
Active Printer	Not Available
Cipher Strength	168-bit
Content Advisor	Disabled
IEAK Install	No

[File Versions]

File	Version	Size	Date	Path
advapi32.dll	5.0.2195.6710	378 KB		
	6/19/2003 12:05:04 PM			
advpack.dll	5.0.3502.6601	87 KB		
	6/19/2003 12:05:04 PM			
browselc.dll	5.0.3700.6661	35 KB		
	6/19/2003 12:05:04 PM			
browseui.dll	5.0.3700.6661	789 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation

ckcnv.exe	5.0.2189.1	9 KB	12/7/1999	
	8:00:00 AM			
	C:\WINNT\system32			Microsoft Corporation
comctl32.dll	5.81.3502.6601	538 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
crypt32.dll	5.131.2195.6661	468 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
ehnsig.dll	<File Missing>	Not Available		Not Available
	Not Available	Not Available		Not Available
Available				
iemigrat.dll	<File Missing>	Not Available		Not Available
	Not Available	Not Available		Not Available
Available				
iesetup.dll	5.0.3502.6601	57 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
iexplore.exe	5.0.2920.0	59 KB		
	12/7/1999 8:00:00 AM			C:\Program Files\Internet Explorer
	5.0.2195.6613	126 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
imghelp.dll	<File Missing>	Not Available		Not Available
	Not Available	Not Available		Not Available
Available				
inseng.dll	5.0.3502.6601	72 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
jobexec.dll	5.0.0.1	47 KB	12/7/1999	
	8:00:00 AM			
	C:\WINNT\system32			Microsoft Corporation
jscript.dll	5.1.0.8513	476 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
jsproxy.dll	5.0.2920.0	13 KB		
	12/7/1999 8:00:00 AM			
	C:\WINNT\system32			Microsoft Corporation
msahtml.dll	<File Missing>	Not Available		Not Available
	Not Available	Not Available		Not Available
Available				
mshtml.dll	5.0.3700.6699	2299 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
msoss.dll	<File Missing>	Not Available		Not Available
	Not Available	Not Available		Not Available
msxml.dll	8.0.6730.0	502 KB	6/19/2003	
	12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
occache.dll	5.0.3502.6601	86 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
ole32.dll	5.0.2195.6692	973 KB	6/19/2003	
	12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
oleaut32.dll	2.40.4522.0	612 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation
olepro32.dll	5.0.4522.0	160 KB		
	6/19/2003 12:05:04 PM			
	C:\WINNT\system32			Microsoft Corporation

```

rsabase.dll          5.0.2195.6619      129 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
rsaenh.dll          5.0.2195.6611      132 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
rsapi32.dll         <File Missing>     Not Available
Not Available       Not Available       Not
Available
rsasig.dll          <File Missing>     Not Available
Not Available       Not Available       Not
Available
schannel.dll        5.1.2195.6705      144 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
shdoc401.dll        <File Missing>     Not Available
Not Available       Not Available       Not
Available
shdocvw.dll         5.0.3700.6668      1082 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
shell32.dll         5.0.3700.6705      2328 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
shlwapi.dll         5.0.3502.6601      283 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
url.dll             5.0.3502.6601      82 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
urlmon.dll          5.0.3700.6705      443 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
vbscript.dll        5.1.0.7426         428 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
webcheck.dll        5.0.3502.6601      252 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
win.com             5.0.2134.1         24 KB
12/7/1999 8:00:00 AM
C:\WINNT\system32 Microsoft Corporation
wininet.dll         5.0.3700.6713      456 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
winsock.dll         3.10.0.103         3 KB
12/7/1999 8:00:00 AM
C:\WINNT\system32 Microsoft Corporation
wintrust.dll        5.131.2195.6624    162 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
wsock.vxd           <File Missing>     Not Available
Not Available       Not Available       Not
Available
wsock32.dll         5.0.2195.6603      21 KB
6/19/2003 12:05:04 PM
C:\WINNT\system32 Microsoft Corporation
wsock32n.dll        <File Missing>     Not Available
Not Available       Not Available       Not
Available

[Connectivity]

Item      Value

```

```

Connection Preference      Never dial
EnableHttp1.1             1
ProxyHttp1.1              0

LAN Settings

AutoConfigProxy           wininet.dll
AutoProxyDetectMode       Disabled
AutoConfigURL
Proxy                      Disabled
ProxyServer
ProxyOverride

[Cache]

[ Following are sub-categories of this main category ]

[Summary]

Item      Value
Page Refresh Type         Automatic
Temporary Internet Files Folder C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space          34718 MB
Available Disk Space      31292 MB
Maximum Cache Size        542 MB
Available Cache Size      542 MB

[List of Objects]

Program File      Status      CodeBase
No cached object information available

[Content]

[ Following are sub-categories of this main category ]

[Summary]

Item      Value
Content Advisor      Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
Administrator Administrator 9/13/2002 to
8/20/2102 sha1RSA

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
Hewlett-Packard Company

[Security]

```

```

Zone      Security Level
Local intranet Medium-low
Trusted sites Low
Internet Medium
Restricted sites High

```

Microsoft SQL Server 2005 Installation Procedures

Microsoft SQL Server 2005 Installation Procedures
Type of installation: custom
During the custom installation, use the default settings for all except the following two areas:
Services accounts:
SQL Server - local system account
SQL Server Agent - local system account
Set the sort order/collation as
SQL_Latin1_General_CP437_Bin

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2000 was used to change the queue settings for the TPCC COM+ single queue component. The single queue component was set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The min and max pool size for the single queue component on each client was 58. Delivery threads were set under the TPCC key in the registry. The construction string was Dummy String

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	13,600					
Table	Rows	Data KB	Index KB	Extra 5% KB	TpmC	8hr Space
Warehouse	13,600	1,456	104	78		1638
District	136,000	15,112	136	762		16010
Customer	408,000,000	296,727,280	18,513,920	15,762,060		331003260
History	408,000,000	23,824,824	89,016			29150943
NewOrder	122,400,000	2,180,848	5,560	109,320		2295728
Orders	408,000,000	13,322,456	30,424			20566952
OrderLine	4,079,995,554	267,540,696	630,192			367207790
Item	100,000	9,416	120	477		10013
Stock	1,360,000,000	435,200,008	917,472	21,805,874		0
Total		1,038,822,096	20,186,944	37,678,572		419,249,074
Dynamic Space	297,547					12
Static Space	773,437					6,387,200
Free Space	na					76,646,400
Daily Growth	59,439					613,171,200
Daily Spread	-					419,249,074
60 Day Space MB	4,339,799					932,659,200
60 Day Space GB	4,238.08					788,926,614
Log Size	629,000.00					
KB Per New Order	6.57					
8 hr log MB	522,952					
8 hr log GB	510.6949					

files= 12
size= 6,387,200
Total= 76,646,400
8K blocks = 613,171,200
Needed = 419,249,074

OK OK
OK OK

GB 399.83

Space Usage	GB Needed	Disks		Formatted		Space Available
		Measured	Size	Size	Size	
180 Day Space DB	4,238.08	576	36GB	33.880	19,514.88	
			9GB		0.00	
			4GB		0.00	
Total DB		576.00			19,514.88	
8-hr log + mirror	1,021.3898	18	72GB	68.330	1,229.94	
OS, Swap	3	2	36GB	33.880	67.76	
Total Storage	5,262.47	GB			20,812.58	

tpmC	169,800.00												
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB	8-Hr Growth MB			
History	23,824,824	89,016	26095024	178384	2,270,200	89,368	2,359,568	0.0643	5,237,102.85	5,114.36			
Order	13,322,456	30,424	16543016	60152	3,220,560	29,728	3,250,288	0.0885	7,214,071.62	7,044.99			
Order-Line	267,540,696	630,192	311534224	1257576	43,993,528	627,384	44,620,912	1.2151	99,036,902.19	96,715.72			
	sum(*) Before		sum(*) After		Num New-Order					108,875.07			
d_next_o_id	408,136,000		444,857,492		36,721,492								
	Before MB		After MB		Grow MB				8-Hr Growth MB	8-Hr Growth GB			
Log	29825.81		265440.79		235614.97			6.5703	522,951.59	510.69			
Database tpcc log used (%)	6,727.9458 bytes												
629,000	4.7417827		42.200443										

Appendix E: *Third Party Quotes*

May 18, 2006

Hewlett-Packard Company
Brean Campbell
20555 SH 249
Houston, TX 77070

Mr. Campbell:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03150	SQL Server 2005 Enterprise x64 Edition <i>Per Processor License</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 4% discount from the retail unit price of \$24,999.</i>	\$23,911	2	\$47,822
P72-00274	Windows Server 2003 Enterprise x64 Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: Open Program - No Level</i> <i>Unit Price reflects a 42% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
C11-00821	Windows 2000 Server <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 8% discount from the retail unit price of \$799.</i>	\$738	8	\$5,904
254-00170	Visual C++ Standard Edition <i>No Discounts Applied</i>	\$109	1	\$109
N/A	Microsoft Problem Resolution Services <i>Professional Support</i> <i>(1 Incident)</i>	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels.

Some products may not be currently orderable but will be available through Microsoft's normal distribution channels by November 7, 2005.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCbrca0618058267.

Please include this Reference ID in any correspondence regarding this price quote.

- Home
- WE ARE ANTI SPAM
- Blacklisted Brands
- Software
- Storage
- Barcode
- Hardware
- Housewares And Tools
- Networking
- Print servers
- SCSI
- Miscellaneous Items
- Printing Supplies and Cables
- Cables
- Network Cables & Parts
Cat5 Cat5e Cat6
- Power

LanAdapters.com



10 foot Category 5E Non Booted Network Patch Cables (Cat 5e)(backwards c

Cat 5E LIFETIME WARRANTY

cblc5ENB10 Regular price: \$3.00 Sale price: \$2.02, 50/\$76.00, 100/\$141.00, 200/\$262.00,
400/\$484.00 color:

- Show Order
- Privacy Policy
- Info &
Shipping Notes
& Ways to delay
Processing of order
- Search
- Index
- Y! SHOPPING**

Appendix F: Price Verification

Description	Part Number	Order Date	Order Method	Price Verification
HP ML370 G5 Rack SAS MOD-FX Svr	400606-B21	6/26/2006	Note 1	Note 2
HP X5160 ML370G5 Kit (3.0Ghz/4MB dual-core processor option kit)	416198-B21	6/26/2006	Note 1	Note 2
8GB FBD PC2-5300 2 x 4GB Kit	397415-B21	6/26/2006	Note 1	Note 2
HP ML370 G5 Mem. Board Kit	403766-B21	6/26/2006	Note 1	Note 2
HP Smart Array P800/512MB SAS Controller	381513-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage	418408-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21	11/22/2006	Note 1	Note 2
Note 1 = HP Direct : 800-203-6748.				
Note 2 = These components are not immediately orderable. For price verification before order date: e-mail hp.pricing.desk@hp.com				