



Hewlett-Packard Company

TPC Benchmark™ C
Full Disclosure Report
for
HP ProLiant ML370 G5/2.66GHz Quad Core
using
Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1)
and
Windows Server 2003 Enterprise (x64) Edition (SP1)

**First Edition
Submitted for Review
November 13, 2006**

First Edition –November 2006

Hewlett-Packard Company (HP) believes that the information in this document is accurate as of the publication date. The information in this document is subject to change without notice. HP assumes no responsibility for any errors that may appear in this document. The pricing information in this document is believed to accurately reflect the current prices as of the publication date. However, HP provides no warranty of the pricing information in this document.

Benchmark results are highly dependent upon workload, specific application requirements, and system design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC Benchmark C should not be used as a substitute for a specific customer application benchmark when critical capacity planning and/or product evaluation decisions are contemplated.

All performance data contained in this report were obtained in a rigorously controlled environment. Results obtained in other operating environments may vary significantly. HP does not warrant or represent that a user can or will achieve similar performance expressed in transactions per minute (tpmC) or normalized price/performance (\$/tpmC). No warranty of system performance or price/performance is expressed or implied in this report.

Copyright 2006 Hewlett-Packard Company.

All rights reserved. Permission is hereby granted to reproduce this document in whole or in part provided the copyright notice printed above is set forth in full text or on the title page of each item reproduced.

Printed in U.S.A., 2006

HP, NonStop, ProLiant ML370 G5, and ProLiant are registered trademarks of Hewlett-Packard Company.

Microsoft, Windows 2003, Windows Server 2003 x64 and SQL Server 2005 x64 are registered trademarks of Microsoft Corporation.

Xeon is a registered trademark of Intel.

TPC Benchmark is a trademark of the Transaction Processing Performance Council.

Other product names mentioned in this document may be trademarks and/or registered trademarks of their respective companies.

Table of Contents

TABLE OF CONTENTS	3
PREFACE	5
TPC BENCHMARK C OVERVIEW	5
ABSTRACT	6
OVERVIEW.....	6
TPC BENCHMARK C METRICS	6
STANDARD AND EXECUTIVE SUMMARY STATEMENTS	6
AUDITOR	6
GENERAL ITEMS.....	10
TEST SPONSOR.....	10
APPLICATION CODE AND DEFINITION STATEMENTS	10
PARAMETER SETTINGS	10
CONFIGURATION ITEMS	10
CLAUSE 1 RELATED ITEMS	12
TABLE DEFINITIONS	12
PHYSICAL ORGANIZATION OF DATABASE	12
<i>Benchmarked Configuration:</i>	12
PRICED CONFIGURATION VS. MEASURED CONFIGURATION:.....	14
INSERT AND DELETE OPERATIONS.....	14
PARTITIONING	14
REPLICATION, DUPLICATION OR ADDITIONS	14
CLAUSE 2 RELATED ITEMS	15
RANDOM NUMBER GENERATION.....	15
INPUT/OUTPUT SCREEN LAYOUT.....	15
PRICED TERMINAL FEATURE VERIFICATION.....	15
PRESENTATION MANAGER OR INTELLIGENT TERMINAL.....	15
TRANSACTION STATISTICS	15
QUEUING MECHANISM	16
CLAUSE 3 RELATED ITEMS	17
TRANSACTION SYSTEM PROPERTIES (ACID)	17
ATOMICITY	17
<i>Completed Transactions</i>	17
<i>Aborted Transactions</i>	17
CONSISTENCY	17
ISOLATION	17
DURABILITY	18
<i>Durable Media Failure</i>	18
<i>Instantaneous Interruption and Loss of Memory</i>	19
CLAUSE 4 RELATED ITEMS	20
INITIAL CARDINALITY OF TABLES	20

DATABASE LAYOUT	20
TYPE OF DATABASE.....	21
DATABASE MAPPING.....	21
60 DAY SPACE.....	21
CLAUSE 5 RELATED ITEMS.....	22
THROUGHPUT	22
KEYING AND THINK TIMES.....	22
RESPONSE TIME FREQUENCY DISTRIBUTION CURVES AND OTHER GRAPHS	23
STEADY STATE DETERMINATION	28
WORK PERFORMED DURING STEADY STATE.....	28
MEASUREMENT PERIOD DURATION.....	28
REGULATION OF TRANSACTION MIX.....	29
TRANSACTION STATISTICS	29
CHECKPOINT COUNT AND LOCATION	30
CHECKPOINT DURATION.....	30
CLAUSE 6 RELATED ITEMS.....	31
RTE DESCRIPTIONS.....	31
EMULATED COMPONENTS	31
FUNCTIONAL DIAGRAMS	31
NETWORKS	31
OPERATOR INTERVENTION	31
CLAUSE 7 RELATED ITEMS.....	32
SYSTEM PRICING	32
AVAILABILITY, THROUGHPUT, AND PRICE PERFORMANCE	32
COUNTRY SPECIFIC PRICING.....	32
USAGE PRICING	32
CLAUSE 9 RELATED ITEMS.....	33
AUDITOR'S REPORT	33
AVAILABILITY OF THE FULL DISCLOSURE REPORT.....	33
APPENDIX A: SOURCE CODE	A-1 - A-111
APPENDIX B: DATABASE DESIGN	B-1 – B-51
APPENDIX C: TUNABLE PARAMETERS	C-1 - C-73
APPENDIX D: 60-DAY SPACE	D-1 - D-3
APPENDIX E: THIRD PARTY QUOTES	E-1 - E-4
APPENDIX F: PRICE VERIFICATION	F-1

Preface

The TPC Benchmark C was developed by the Transaction Processing Performance Council (TPC). The TPC was founded to define transaction processing benchmarks and to disseminate objective, verifiable performance data to the industry. This full disclosure report is based on the TPC Benchmark C Standard Specifications Version 5.7.

TPC Benchmark C Overview

The TPC describes this benchmark in Clause 0.1 of the specifications as follows:

TPC Benchmark™ C (TPC-C) is an OLTP workload. It is a mixture of read-only and update intensive transactions that simulate the activities found in complex OLTP application environments. It does so by exercising a breadth of system components associated with such environments, which are characterized by:

- The simultaneous execution of multiple transaction types that span a breadth of complexity
- On-line and deferred transaction execution modes
- Multiple on-line terminal sessions
- Moderate system and application execution time
- Significant disk input/output
- Transaction integrity (ACID properties)
- Non-uniform distribution of data access through primary and secondary keys
- Databases consisting of many tables with a wide variety of sizes, attributes, and relationships
- Contention on data access and update

The performance metric reported by TPC-C is a "business throughput" measuring the number of orders processed per minute. Multiple transactions are used to simulate the business activity of processing an order, and each transaction is subject to a response time constraint. The performance metric for this benchmark is expressed in transactions-per-minute-C (tpmC). To be compliant with the TPC-C standard, all references to tpmC results must include the tpmC rate, the associated price-per-tpmC, and the availability date of the priced configuration.

Although these specifications express implementation in terms of a relational data model with conventional locking scheme, the database may be implemented using any commercially available database management system (DBMS), database server, file system, or other data repository that provides a functionally equivalent implementation. The terms "table", "row", and "column" are used in this document only as examples of logical data structures.

TPC-C uses terminology and metrics that are similar to other benchmarks, originated by the TPC or others. Such similarity in terminology does not in any way imply that TPC-C results are comparable to other benchmarks. The only benchmark results comparable to TPC-C are other TPC-C results conformant with the same revision.

Despite the fact that this benchmark offers a rich environment that emulates many OLTP applications, this benchmark does not reflect the entire range of OLTP requirements. In addition, the extent to which a customer can achieve the results reported by a vendor is highly dependent on how closely TPC-C approximates the customer application. The relative performance of systems derived from this benchmark does not necessarily hold for other workloads or environments. Extrapolations to any other environment are not recommended.

Benchmark results are highly dependent upon workload, specific application requirements, and systems design and implementation. Relative system performance will vary as a result of these and other factors. Therefore, TPC-C should not be used as a substitute for a specific customer application benchmarking when critical capacity planning and/or product evaluation decisions are contemplated.

Abstract

Overview

This report documents the methodology and results of the TPC Benchmark C test conducted on the HP ProLiant ML370 G5. The operating system used for the benchmark was Windows Server 2003, Enterprise (x64) Edition (SP1). The DBMS used was Microsoft SQL Server 2005 Enterprise (x64) Edition (SP1).

TPC Benchmark C Metrics

The standard TPC Benchmark C metrics, tpmC (transactions per minute), price per tpmC (three year capital cost per measured tpmC), and the availability date are reported as:

240,737 tpmC
USD \$1.85 per tpmC

The availability date is February 1, 2007.

Standard and Executive Summary Statements

The following pages contain executive summary of results for this benchmark.

Auditor

The benchmark configuration, environment and methodology were audited by Lorna Livingtree of Performance Metrics, Inc. to verify compliance with the relevant TPC specifications.

Hewlett-Packard Company		HP ProLiant ML370 G5 SAS Intel X5355 QC		TPC-C Rev. 5.7		
		C/S with 8 HP ProLiant DL360 G4p		Report Date: Nov. 13, 2006		
Total System Cost		TPC-C Throughput		Price/Performance		Availability Date
USD \$443,553		240,737		USD \$1.85		Feb. 1 , 2007
Database Server Processors /Cores/Threads	Database Manager	Operating System	Other Software	Number of Users		
2/8 Intel X5355 2.66GHz QC	Microsoft SQL Server 2005 Enterprise x64 Edition SP1	Windows Server 2003 Enterprise x64 Edition SP1	Microsoft Visual C++ Microsoft COM+	192,000		
System Components		Server	Each Client			
Processors/Cores/Threads		Quantity 2/8 Description 2.66GHz Intel X5355 QC w/ 8M Cache	Quantity 2/2/4 Description 3.6 GHz Intel Xeon w/ 2MB cache			
Memory		8 8 GB DDR (2 X 4 GB)	1 1024 MB			
Disk Controllers		1 Smart P600 Controller 7 Smart P800 Controller	1 Integrated Smart Array 6i Controller			
Disk Drives		24 528 2 72GB 15K LFF SAS Drives (database log) 36 GB 15K LFF SAS Drives (database data) 36 GB 10K SFF SAS Drives (internal, O/S) 19,554 GB	2 36 GB SCSI Drive			
Total Storage				72 GB		

Hewlett-Packard Company	HP ProLiant ML370 G5 SAS			TPC-C Rev. 5.7					
	Intel X5355 QC Client/Server			Report Date	13-Nov-06				
Description	Part Number	Third Party	Unit Price	Qty	Extended Price	3 yr. Maint. Price			
Server Hardware									
HP ML370 G5 Rack SAS MOD-FX Svr	400606-B21	1	1,513	1	1,513				
HP X2.6GHz/1333MHz, 120W processor kit	433104-B21	1*	1,999	2	3,998				
8GB FBD PC2-5300 2 x 4GB Kit	397415-B21	1	8,499	8	67,992				
HP ML370 G5 Mem. Board Kit	403766-B21	1	179	1	179				
HP Smart Array P800/512MB SAS Controller	381513-B21	1*	1,299	7	9,093				
HP SMART Array P600 3G SAS/SATA RAID Controller	337972-B21	1	729	1	729				
HP s7540 17in. CRT Monitor	PF997AA#ABA	1	139	1	139				
HP PS/2 Scroll Mouse carbonite	DG169AV	1	5	1	5				
HP Enhanced Keyboard	DG170AV#ABA	1	10	1	10				
HP 5642 Pallet Unassembled Rack	358254-B21	1	689	3	2,067				
UPS R1500 XR Low Voltage US	204404-001	1	866	1	866				
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive	375868-B21	1	269	528	142,032				
HP 36GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375868-B21	1	269	53		14,257			
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive	375870-B21	1	399	24	9,576				
HP 72GB 15K SAS 3.5 Hot Plug Hard Drive (10% Spares)	375870-B21	1	399	3		1,197			
HP 36GB 10K SAS 2.5 Hot Plug Hard Drive	375859-B21	1	279	2	558				
HP StorageWorks MSA-60 Storage	418408-B21	1*	3,250	46	149,500				
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21	1*	3,250	5		16,250			
HP CPe 3Y 4H 24x7 HW Proliant ML370	U4529E	1	949	1	949				
				Subtotal	388,257	32,653			
Server Software									
Microsoft SQL Server 2005 Enterprise X64 Edition(per processor)	810-03134	Microsoft	23,432	2	46,864	Incl Below			
Microsoft Visual C++ Standard	254-00170	Microsoft	109	1	109	Incl Below			
Microsoft Windows 2003 Server, Enterprise Edition X64	P72-00274	Microsoft	2,334	1	2,334	Incl Below			
Microsoft Problem Resolution Services		Microsoft	245	1		245			
				Subtotal	49,307	245			
Client Hardware									
HP DL360G4p X3.6GHz/2MB/1GB SCSI US Srvr	376236-001	1	2,699	8	21,592				
Dual Integrated Gigabit NIC, Integrated Smart Array Controller 6i									
Intel Xeon 3.6GHz 2MB DL360G4 Processor	376242-B21	1	879	8	7,032				
36GB 15K U320 Pluggable Hard Drive	286776-B22	1	269	16	4,304				
HP CP 3Y 4H 24x7 HW Entry300 4-Hour 24 Hour x 7 Day Coverage 3 Years	162675-002	1	599	8		4,792			
				Subtotal	32,928	4,792			
Client Software									
Windows Server 2003, Standard Edition	P73-00295	Microsoft	719	8	5,752	Incl. Above			
				Subtotal	5,752	0			
User Connectivity									
HP ProCurve Switch 2824	J4903A#ABA	1	2499	1	2,499				
HP CP for HP ProCurve Networking products 3 Yr 4 hr/24x7	U2856E	1	1000	1		1,000			
10 foot Cat5E Non Booted Network Patch Cables	cblc5ENB10	3	3	18	54				
10 foot Cat5E Non Booted Network Patch Cables (plus 10% spares)	cblc5ENB10	3	3	2		6			
				Subtotal	2,553	1,006			
Large Purchase and Net 30 discount (See Note 1)	16.0%		1		(\$67,789)	(\$6,151)			
				Total	\$411,008	\$32,545			
Prices used in TPC benchmarks reflect the actual prices a customer would pay for a one-time purchase of the stated components. Individually negotiated discounts are not permitted. Special prices based on assumptions about past or future purchases are not permitted. All discounts reflect standard pricing policies for the listed components. For complete details, see the pricing sections of the TPC benchmark pricing specifications. If you find that the stated prices are not available according to these terms, please inform the TPC at pricing@tpc.org. Thank you.				Three-Year Cost of Ownership: USD \$443,553					
				tpmC Rating: 240,737					
				\$ / tpmC: USD \$1.85					
Pricing: 1=HP Direct 800-203-6748 2= Microsoft 3= LanAdapters.com									
Note 1 = Discount based on HP Direct guidance applies to all lines where pricing = 1									

Numerical Quantities Summary			
MQTH, Computed Maximum Qualified Throughput	240,737 tpmC		
Response Times (in seconds)	Average	90%	Maximum
New-Order	0.34	0.58	5.24
Payment	0.31	0.54	4.50
Order-Status	0.33	0.56	5.33
Delivery (interactive portion)	0.11	0.11	1.00
Delivery (deferred portion)	0.14	0.19	5.31
Stock-Level	0.33	0.56	2.23
Menu	0.11	0.12	1.15
Transaction Mix, in percent of total transaction			
New-Order			44.91%
Payment			43.02%
Order-Status			4.03%
Delivery			4.01%
Stock-Level			4.03%
Emulation Delay (in seconds)	Resp.Time	Menu	
New-Order	0.10	0.10	
Payment	0.10	0.10	
Order-Status	0.10	0.10	
Delivery (interactive)	0.10	0.10	
Stock-Level	0.10	0.10	
Keying/Think Times (in seconds)	Min.	Average	Max.
New-Order	18.02/0.00	18.03/12.06	18.40/120.54
Payment	3.02/0.00	3.03/12.06	3.40/120.54
Order-Status	2.02/0.00	2.03/10.06	2.40/100.53
Delivery (interactive)	2.02/0.00	2.03/5.07	2.40/50.53
Stock-Level	2.02/0.00	2.03/5.07	2.40/50.53
Test Duration			
Ramp-up time			48 minutes
Measurement interval			120 minutes
Transactions (all types) completed during measurement interval			66,612,080
Ramp down time			6 minutes
Checkpointing			
Number of checkpoints			4
Checkpoint interval			30 minutes

General Items

Test Sponsor

A statement identifying the benchmark sponsor(s) and other participating companies must be provided.

This benchmark was sponsored by Hewlett-Packard Company. The benchmark was developed and engineered by Hewlett-Packard Company. Testing took place at HP benchmarking laboratories in Houston, Texas.

Application Code and Definition Statements

The application program (as defined in clause 2.1.7) must be disclosed. This includes, but is not limited to, the code implementing the five transactions and the terminal input output functions.

Appendix A contains all source code implemented in this benchmark.

Parameter Settings

Settings must be provided for all customer-tunable parameters and options which have been changed from the defaults found in actual products, including by not limited to:

- *Database options*
- *Recover/commit options*
- *Consistency locking options*
- *Operating system and application configuration parameters*

This requirement can be satisfied by providing a full list of all parameters.

Appendix C contains the tunable parameters to for the database, the operating system, and the transaction monitor.

Configuration Items

Diagrams of both measured and priced configurations must be provided, accompanied by a description of the differences.

The configuration diagram for both the tested and priced systems are included on the following page.

Figure 1. Benchmarked Configuration


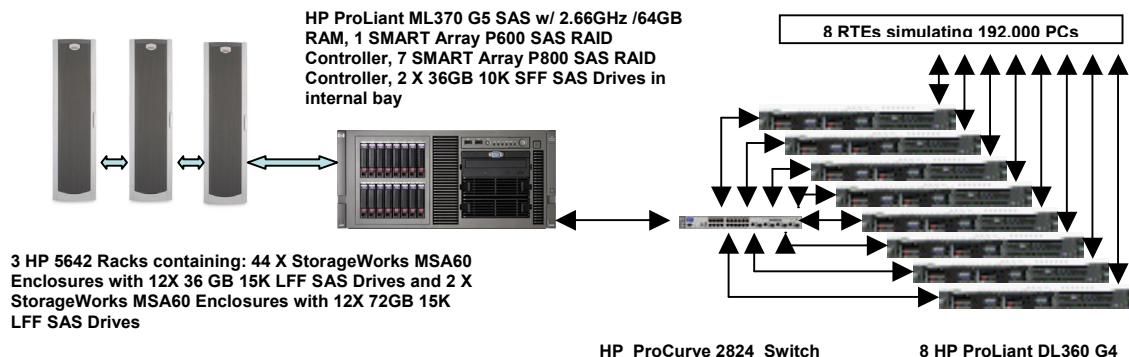


Figure 2. Priced Configuration

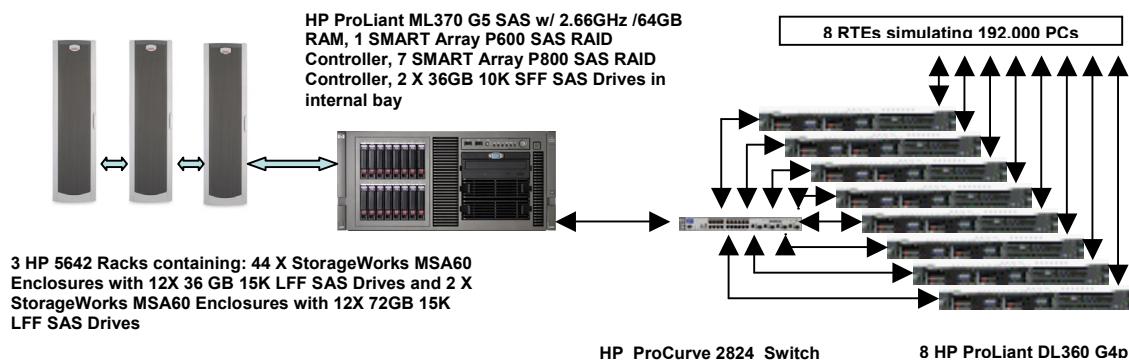

Clause 1 Related Items

Table Definitions

Listing must be provided for all table definition statements and all other statements used to set up the database.

Appendix B contains the code used to define and load the database tables.

Physical Organization of Database

The physical organization of tables and indices within the database must be disclosed.

The tested configuration consisted of 528 drives at 36GB for database data, two 36GB drives for the operating system, and 24 drives at 72GB for database log. There were 528 X 36GB drives for database data on six Smart Array P800 controllers, 24 X 72GB drives for database log on a Smart Array P800 controller, and 2 X 36GB drives on a Smart Array P600 controller for the Operating System.

Benchmarked Configuration:

Smart Array P800 Controller, Slot 5, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs1:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc1:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 5, Array B

<u>LOGICAL DRIVE C:\tpcc\cs\cs2:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc2:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 4, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs5:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc5:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 4, Array B

<u>LOGICAL DRIVE C:\tpcc\cs\cs6:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc6:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 1, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs9:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc9:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 1, Array B

<u>LOGICAL DRIVE C:\tpcc\cs\cs10:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc10:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 9, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs11:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc11:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 8, Array A

<u>LOGICAL DRIVE E:</u>	<u>Total Capacity = 820.01GB</u>	<u>RAID 0+1</u>
Tpcc_log		

Smart Array P800 Controller, Slot 7, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs7</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc7:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE Z:</u>	<u>Total Capacity = 734.04GB</u>	<u>RAID 6</u>
TpccBack4		

Smart Array P800 Controller, Slot 7, Array B

<u>LOGICAL DRIVE C:\tpcc\cs\cs8:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc8:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P800 Controller, Slot 6, Array A

<u>LOGICAL DRIVE C:\tpcc\cs\cs3</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc3:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		
<u>LOGICAL DRIVE X:</u>	<u>Total Capacity = 734.04GB</u>	<u>RAID 6</u>
TpccBack4		

Smart Array P800 Controller, Slot 6, Array B

<u>LOGICAL DRIVE C:\tpcc\cs\cs4:</u>	<u>Total Capacity = 101.46GB</u>	<u>RAID 0</u>
Cs_fg		
<u>LOGICAL DRIVE C:\tpcc\misc\misc4:</u>	<u>Total Capacity = 57.03GB</u>	<u>RAID 0</u>
Misc_fg		

Smart Array P600 Controller, Slot 2, Array A
LOGICAL DRIVE C:\ Total Capacity = 33.88GB RAID 1
Operating System

Priced Configuration vs. Measured Configuration:

The benchmarked configuration used DL360G4 servers for clients. The priced configuration used DL360G4P servers.

Insert and Delete Operations

It must be ascertained that insert and/or delete operations to any of the tables can occur concurrently with the TPC-C transaction mix. Furthermore, any restrictions in the SUT database implementation that precludes inserts beyond the limits defined in Clause 1.4.11 must be disclosed. This includes the maximum number of rows that can be inserted and the minimum key value for these new rows.

All insert and delete functions were fully operational during the entire benchmark.

Partitioning

While there are a few restrictions placed upon horizontal or vertical partitioning of tables and rows in the TPC-C benchmark, any such partitioning must be disclosed.

No partitioning was used in this benchmark.

Replication, Duplication or Additions

Replication of tables, if used, must be disclosed. Additional and/or duplicated attributes in any table must be disclosed along with a statement on the impact on performance.

No replications, duplications or additional attributes were used in this benchmark.

Clause 2 Related Items

Random Number Generation

The method of verification for the random number generation must be described.

In the Benchcraft RTE from Microsoft, each driver engine uses an independent random number sequence. All of the users within a given driver draw from the same sequence.

The Benchcraft RTE computes random integers as described in "Random Numbers Generators: Good Ones Are Hard to Find." Communications of the ACM - October 1988 Volume 31 Number 10.

The seeds for each user were captured and verified by the auditor to be unique. In addition, the contents of the database were systematically searched, and randomly sampled by the auditor for patterns that would indicate the random number generator had affected any kind of a discernible pattern; none was found.

Input/Output Screen Layout

The actual layout of the terminal input/output screens must be disclosed.

All screen layouts followed the specifications exactly.

Priced Terminal Feature Verification

The method used to verify that the emulated terminals provide all the features described in Clause 2.2.2.4 must be explained. Although not specifically priced, the type and model of the terminals used for the demonstration in 8.1.3.3 must be disclosed and commercially available (including supporting software and maintenance).

The terminal attributes were verified by the auditor. The auditor manually exercised each specification on a representative HP ProLiant web server.

Presentation Manager or Intelligent Terminal

Any usage of presentation managers or intelligent terminals must be explained.

Application code running on the client machines implemented the TPC-C user interface. No presentation manager software or intelligent terminal features were used. The source code for the forms applications is listed in Appendix A.

Transaction Statistics

Table 2.1 lists the numerical quantities that Clauses 8.1.3.5 to 8.1.3.11 require.

Table 2.1 Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%

Statistic		Value
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Order Status	Accessed by last name	60.06%
Transaction Mix	New Order	44.91%
	Payment	43.02%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.03%

Queuing Mechanism

The queuing mechanism used to defer the execution of the Delivery transaction must be disclosed.

Microsoft COM+ on each client machine served as the queuing mechanism to the database. Each delivery request was submitted to Microsoft COM+ asynchronously with control being returned to the client process immediately and the deferred delivery part completing asynchronously.

The source code is listed in Appendix A.

Clause 3 Related Items

Transaction System Properties (ACID)

The results of the ACID tests must be disclosed along with a description of how the ACID requirements were met. This includes disclosing which case was followed for the execution of Isolation Test 7.

All ACID property tests were successful. The executions are described below.

Atomicity

The system under test must guarantee that the database transactions are atomic; the system will either perform all individual operations on the data or will assure that no partially completed operations leave any effects on the data.

Completed Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was committed and the rows were verified to contain correctly updated balances.

Aborted Transactions

A row was selected in a script from the warehouse, district and customer tables, and the balances noted. A payment transaction was started with the same warehouse, district and customer identifiers and a known amount. The payment transaction was rolled back and the rows were verified to contain the original balances.

Consistency

Consistency is the property of the application that requires any execution of a database transaction to take the database from one consistent state to another, assuming that the database is initially in a consistent state.

Consistency conditions one through four were tested using a script to issue queries to the database. The results of the queries verified that the database was consistent for all four tests.

A run was executed under full load lasting over two hours and included 4 checkpoints.

The script was executed again. The result of the same queries verified that the database remained consistent after the run.

Isolation

Sufficient conditions must be enabled at either the system or application level to ensure the required isolation defined above (clause 3.4.1) is obtained.

Isolation tests one through nine were executed using shell scripts to issue queries to the database. Each script included timestamps to demonstrate the concurrency of operations. The results of the queries were captured to files. The captured files were verified by the auditor to demonstrate the required isolation had been met.

In addition, the phantom tests and the stock level tests were executed and verified.

For Isolation test seven, case A was followed.

Durability

The tested system must guarantee durability: the ability to preserve the effects of committed transaction and insure database consistency after recovery from any one of the failures listed in Clause 3.5.3.

Durable Media Failure

Loss of Data and Log

To demonstrate recovery from a permanent failure of durable medium containing DBMS logs and TPC-C tables, the following steps were executed. This test was executed on a fully scaled database of 19200 warehouses of which 1920 were used under a load of 19200 users.

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTEs were started with 19200 users.
- The test was allowed to run for a minimum of 10 minutes.
- One disk was removed from one of the StorageWorks MSA60 cabinets containing the log disks.
- Since the disk was mirrored, processing was not interrupted. This was verified by checking the user's status on the RTE.
- One of the data disks was removed from one StorageWorks MSA60 data drive cabinet.
- When Microsoft SQL Server recorded errors about not being able to access the database, the RTE was shut down, and a database transaction log dump was taken.
- Microsoft SQL Server was shutdown, and the system rebooted after replacing the pulled drives with new drives.
- Microsoft SQL Server was started.
- The database was restored from backup and the transaction log dump was applied.
- Consistency condition #3 was executed and verified.
- Step 2 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in steps 12 and 13 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Instantaneous Interruption and Loss of Memory

Because loss of power erases the contents of memory, the instantaneous interruption and the loss of memory tests were combined into a single test. This test was executed on a fully scaled database of 19200 warehouses under a full load of 192,000 users. The following steps were executed:

- The total number of New Orders was determined by the sum of D_NEXT_O_ID of all rows in the DISTRICT table giving the beginning count.
- The RTE was started with 192,000 users.
- The test was allowed to run for a minimum of 10 minutes.
- Pulling the power cords from the SUT induced system crash and loss of memory. No battery backup or Uninterruptible Power Supply (UPS) were used to preserve the contents of memory.
- The RTE was paused then stopped.
- Power was restored and the system restarted.
- Microsoft SQL Server was restarted and performed an automatic recovery.
- Consistency condition #3 was executed and verified.
- Step 1 was repeated and the difference between the first and second counts was noted.
- An RTE report was generated for the entire run time giving the number of NEW-ORDERS successfully returned to the RTE.
- The counts in step 9 and 10 were compared and the results verified that all committed transactions had been successfully recovered.
- Samples were taken from the RTE files and used to query the database to demonstrate successful transactions had corresponding rows in the ORDER table.

Clause 4 Related Items

Initial Cardinality of Tables

The cardinality (e.g. number of rows) of each table, as it existed at the start of the benchmark run, must be disclosed. If the database was over-scaled and inactive rows of the WAREHOUSE table were deleted, the cardinality of the WAREHOUSE table as initially configured and the number of rows deleted must be disclosed.

Table 4.1 Number of Rows for Server

Table	Cardinality as built
Warehouse	19,200
District	192,000
Customer	576,000,000
History	576,000,000
Orders	576,000,000
New Order	172,800,000
Order Line	5,759,990,075
Stock	1,920,000,000
Item	100,000
Unused Warehouses	0

Database Layout

The distribution of tables and logs across all media must be explicitly depicted for tested and priced systems.

The benchmarked configuration used 528 SAS drives at 36GB for database data, two 36GB SAS drives for the operating system, and 24 SAS drives at 72GB for database log.

For database data, five Smart Array P800 controllers connected to 8 StorageWorks MSA60 drive boxes each (4 StorageWorks MSA60's on each of two ports of the controller configured as an array). One Smart Array P800 controller connected to 4 StorageWorks MSA60 drive boxes (4 StorageWorks MSA60's on one port of the controller). Each StorageWorks MSA60 contained (12) 36GB SAS drives. Each array had two RAID 0 logical drives for data, and on three of the controllers each port also contained a RAID 6 logical drive for database backup files.

For database log, two StorageWorks MSA60's containing 12 72GB drives each were connected to a Smart Array P800 controller. This was configured as an array with one RAID 0+1 logical drive for the database log.

The Smart Array P600 controller was connected to the internal drive cage which contained 2 X 36GB SAS drives configured as a RAID 0+1 logical drive. The Array Accelerators on the data controllers were configured as 100% write cache and were enabled for all logical drives containing “misc” file groups. The Smart Array P800 connected to the transaction log had cache disabled. All RAID volumes used hardware RAID.

Section 1.2 of this report details the distribution of database tables across all disks. The code that creates the file groups and tables is included in Appendix B.

Type of Database

A statement must be provided that describes:

- *The data model implemented by DBMS used (e.g. relational, network, hierarchical).*
- *The database interface (e.g. embedded, call level) and access language (e.g. SQL, DL/I, COBOL read/write used to implement the TPC-C transaction. If more than one interface/access language is used to implement TPC-C, each interface/access language must be described and a list of which interface/access language is used with which transaction type must be disclosed.*

Microsoft SQL Server 2005 Enterprise (x64) Edition is a relational DBMS.

The interface used was Microsoft SQL Server stored procedures accessed with Remote Procedure Calls embedded in C code.

Database Mapping

The mapping of database partitions/replications must be explicitly described.

The database was not replicated.

60 Day Space

Details of the 60-day space computations along with proof that the database is configured to sustain 8 hours of growth for the dynamic tables (Order, Order-Line, and History) must be disclosed.

To calculate the space required to sustain the database log for 8 hours of growth at steady state, the following steps were followed:

- The free space on the log file was queried using *dbcc sqlperf(logspace)*.
- Transactions were run against the database with a full load of users.
- The free space was again queried using *dbcc sqlperf(logspace)*.
- The space used was calculated as the difference between the first and second query.
- The number of NEW-ORDERS was verified from the difference in the *sum(d_next_o_id)* taken from before and after the run.
- The space used was divided by the number of NEW-ORDERS giving a space used per NEW-ORDER transaction.
- The space used per transaction was multiplied by the measured tpmC rate times 480 minutes.

The same methodology was used to compute growth requirements for dynamic tables Order, Order-Line and History.

Details of both the 8-hour transaction log space requirements and the 60-day space requirements are shown in Appendix D.

Clause 5 Related Items

Throughput

Measured tpmC must be reported

Measured tpmC 240,737tpmC
Price per tpmC USD \$1.85

Response Times

Ninetieth percentile, maximum and average response times must be reported for all transaction types as well as for the menu response time.

Table 5.2: Response Times

Type	Average	90 th %	Maximum
New-Order	0.34	0.58	4.48
Payment	0.31	0.54	3.87
Order-Status	0.33	0.56	4.45
Interactive Delivery	0.11	0.11	0.16
Deferred Delivery	0.14	0.19	5.31
Stock-Level	0.33	0.56	4.18
Menu	0.11	0.12	0.45

Keying and Think Times

The minimum, the average, and the maximum keying and think times must be reported for each transaction type.

Table 5.3: Keying Times

Type	Minimum	Average	Maximum
New-Order	18.02	18.03	18.40
Payment	3.02	3.03	3.40
Order-Status	2.02	2.03	2.40
Interactive Delivery	2.02	2.03	2.40
Stock-Level	2.02	2.03	2.40

Table 5.4: Think Times

Type	Minimum	Average	Maximum
New-Order	0.00	12.06	120.54
Payment	0.00	12.06	120.54
Order-Status	0.00	10.06	100.53
Interactive Delivery	0.00	5.07	50.53
Stock-Level	0.00	5.07	50.53

Response Time Frequency Distribution Curves and Other Graphs

Response Time frequency distribution curves (see Clause 5.6.1) must be reported for each transaction type.

The performance curve for response times versus throughput (see Clause 5.6.2) must be reported for the New-Order transaction.

Think Time frequency distribution curves (see Clause 5.6.3) must be reported for each transaction type.

Keying Time frequency distribution curves (see Clause 5.6.4) must be reported for each transaction type.

A graph of throughput versus elapsed time (see Clause 5.6.5) must be reported for the New-Order transaction.

Figure 3. New Order Response Time Distribution

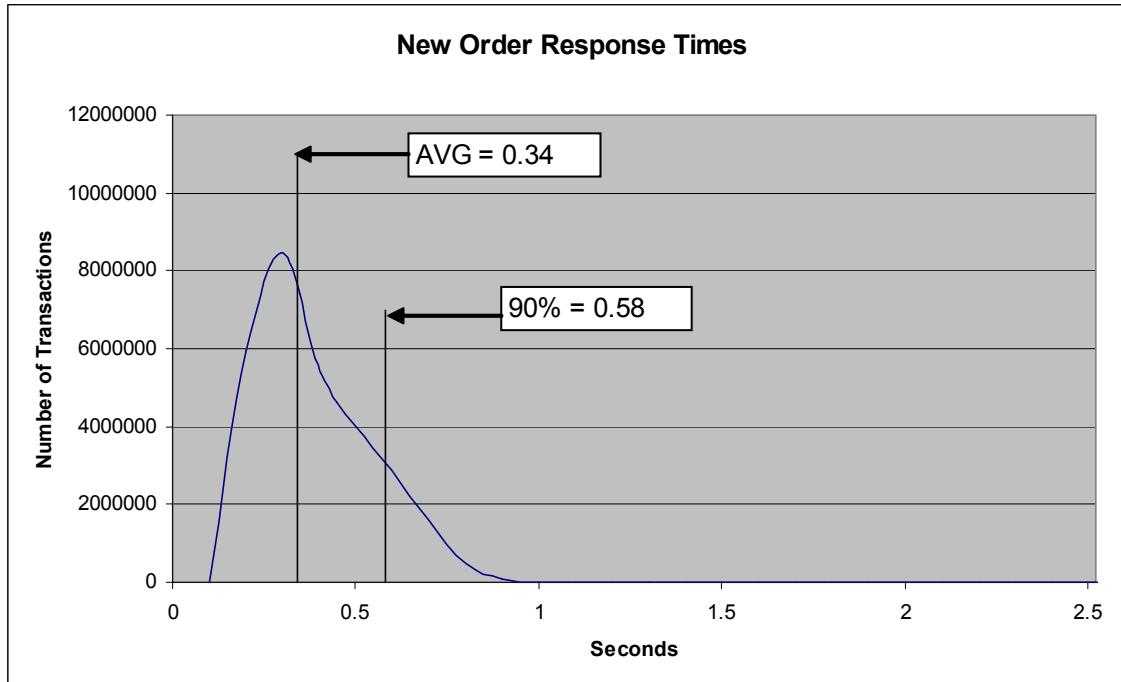


Figure 4. Payment Response Time Distribution

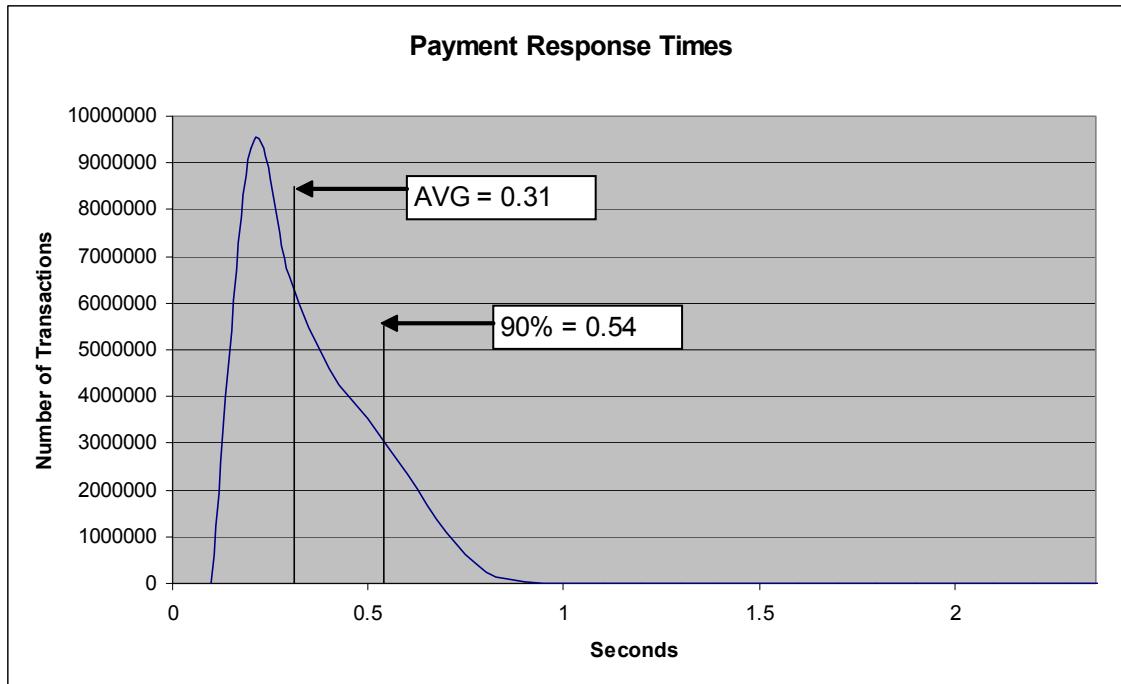


Figure 5. Order Status Response Time Distribution

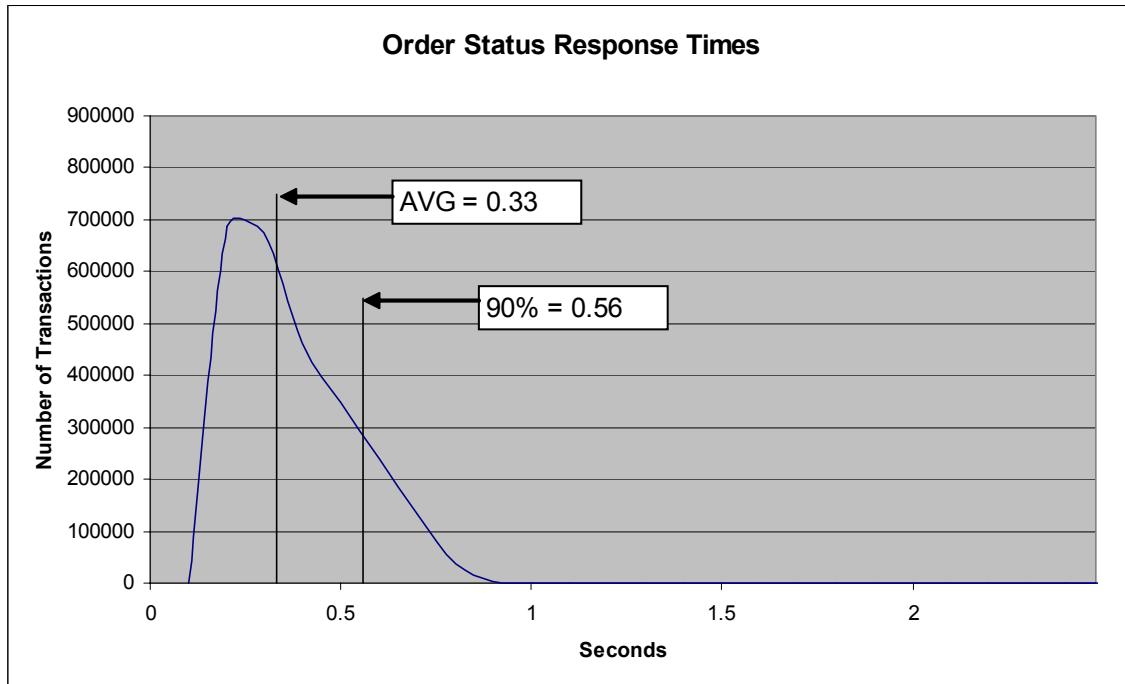


Figure 6. Delivery Response Time Distribution

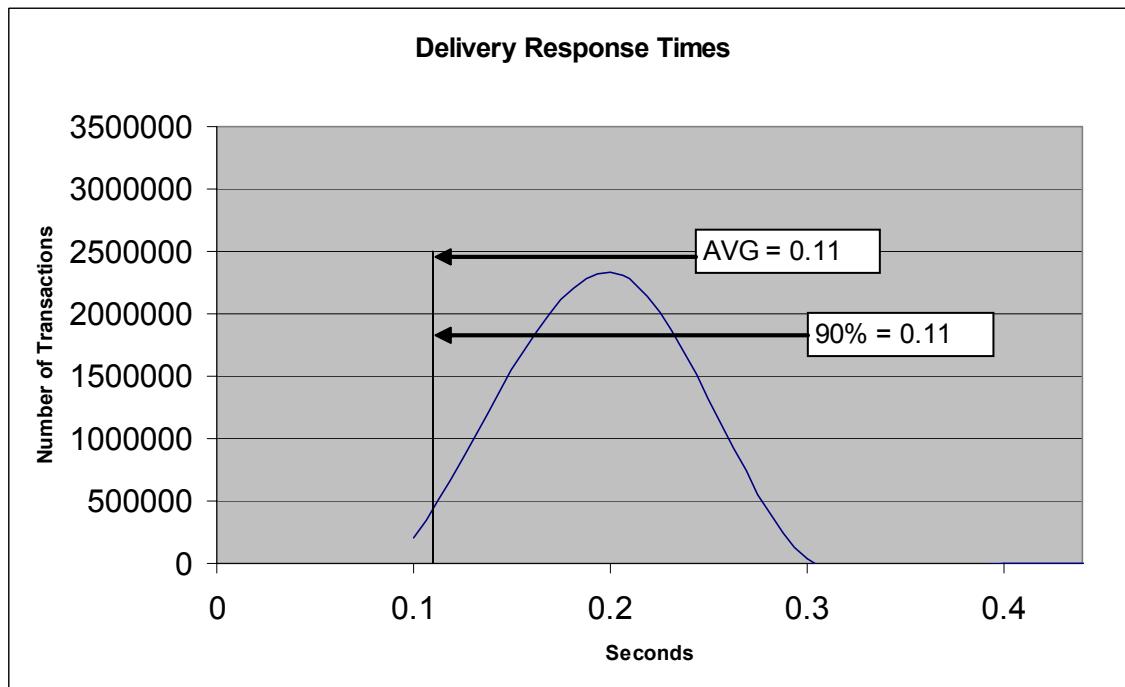


Figure 7. Stock Level Response Time Distribution

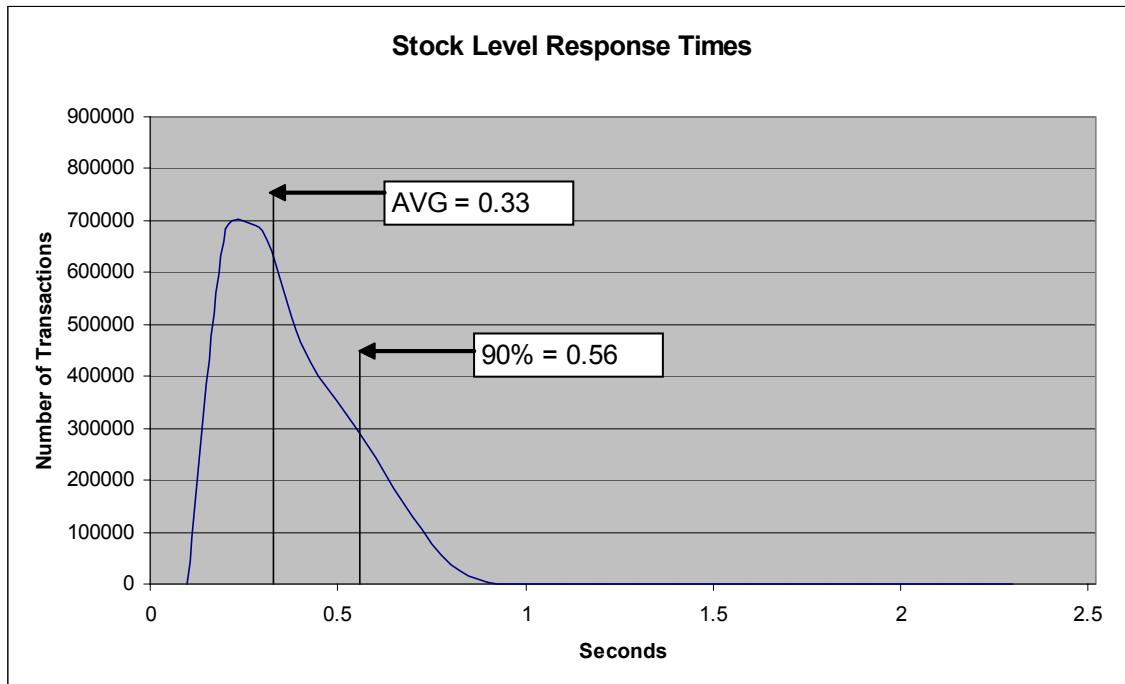


Figure 8. Response Time vs. Throughput

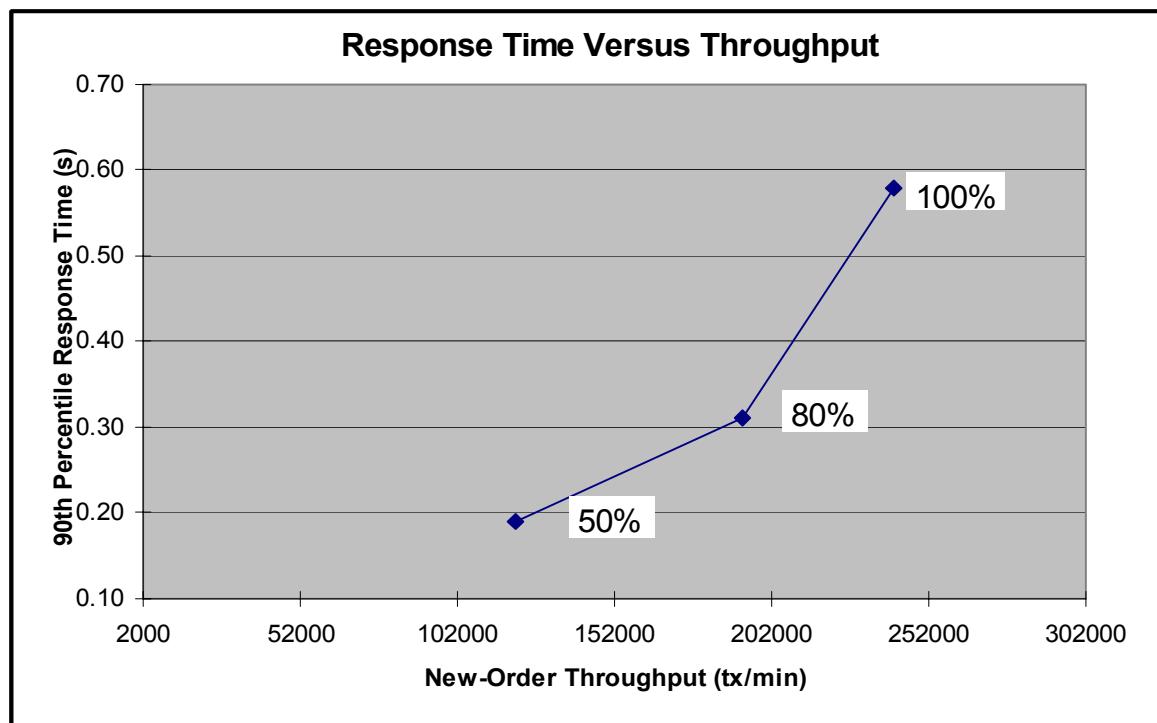


Figure 9. New Order Think Time Distribution


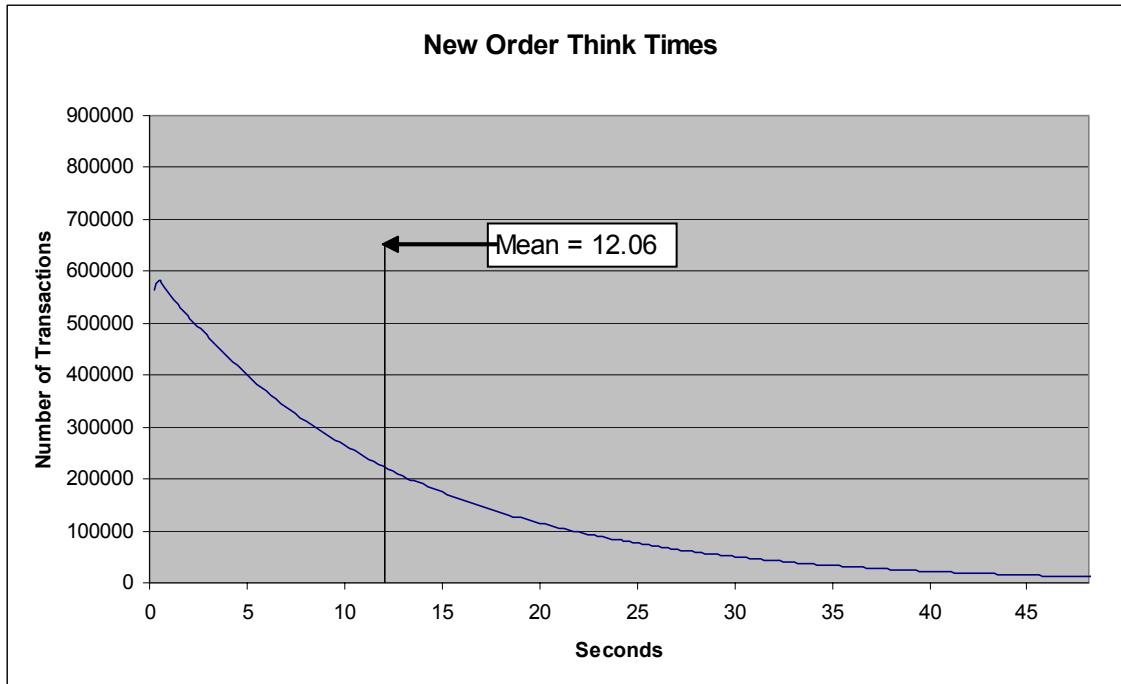


Figure 10. Throughput vs. Time Distribution

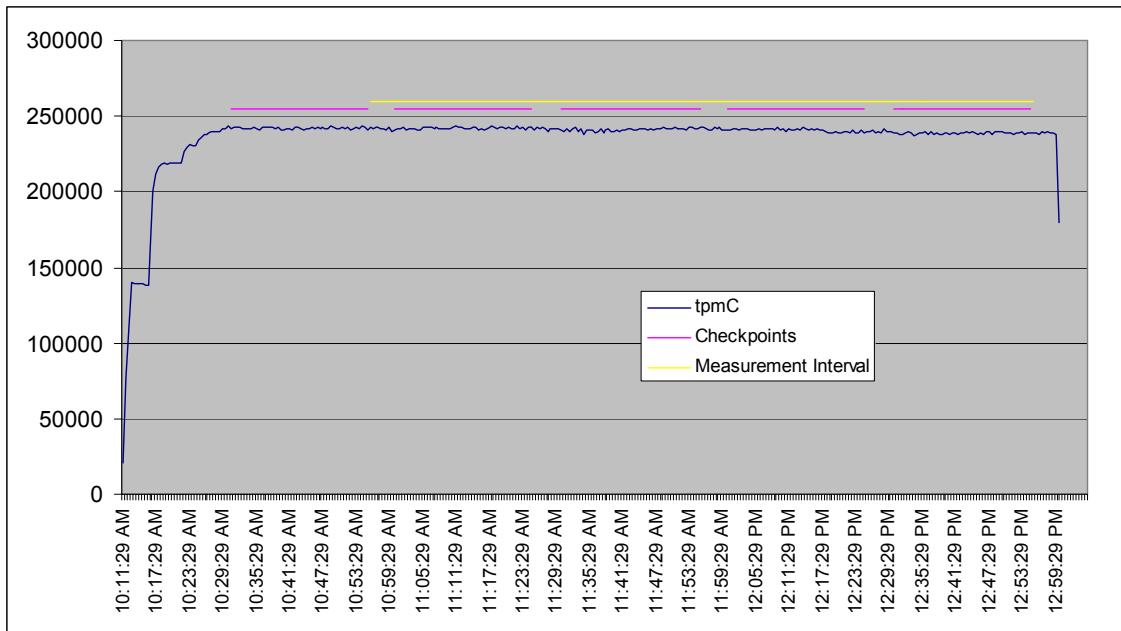

Steady State Determination

The method used to determine that the SUT had reached a steady state prior to commencing the measurement interval must be disclosed.

Steady state was determined using real time monitor utilities from the RTE. Steady state was further confirmed by the throughput data collected during the run and graphed in Figure 10.

Work Performed During Steady State

A description of how the work normally performed during a sustained test (for example checkpointing, writing redo/undo log records, etc.), actually occurred during the measurement interval must be reported.

The RTE generated the required input data to choose a transaction from the menu. This data was timestamped. The input screen for the requested transaction was returned and timestamped. The difference between these two timestamps was the menu response time. The RTE writes to the log file once per transaction on selective fields such as order id. There is one log file per driver engine.

The RTE generated the required input data for the chosen transaction. It waited to complete the minimum required key time before transmitting the input screen. The transmission was timestamped. The return of the screen with the required response data was timestamped. The difference between these two timestamps was the response time for that transaction.

The RTE then waited the required think time interval before repeating the process starting at selecting a transaction from the menu.

The RTE transmissions were sent to application processes running on the client machines through Ethernet LANs. These client application processes handled all screen I/O as well as all requests to the database on the server. The applications communicated with the database server over gigabit Ethernet LANs using ODBC and RPC calls.

To perform checkpoints at specific intervals, the SQL Server *recovery interval* was set to 32767 and a script was written to schedule multiple checkpoints at specific intervals. The script included a wait time between each checkpoint equal to 30 minutes. The measurement interval was 120 minutes. The checkpoint script was started manually after the RTE had all users logged in and the database had achieved steady state.

At each checkpoint, Microsoft SQL Server wrote to disk all memory pages that had been updated but not yet physically written to disk. The positioning of the measurement interval is depicted on the graph in Figure 9.

Measurement Period Duration

A statement of the duration of the measurement interval for the reported Maximum Qualified Throughput (tpmC) must be included.

The reported measured interval was exactly 120 minutes long.

Regulation of Transaction Mix

The method of regulation of the transaction mix (e.g., card decks or weighted random distribution) must be described. If weighted distribution is used and the RTE adjusts the weights associated with each transaction type, the maximum adjustments to the weight from the initial value must be disclosed.

The RTE was given a weighted random distribution, which was not adjusted during the run.

Transaction Statistics

The percentage of the total mix for each transaction type must be disclosed. The percentage of New-Order transactions rolled back as a result of invalid item number must be disclosed. The average number of order-lines entered per New-Order transaction must be disclosed. The percentage of remote order lines per New-Order transaction must be disclosed. The percentage of remote Payment transactions must be disclosed. The percentage of customer selections by customer last name in the Payment and Order-Status transactions must be disclosed. The percentage of Delivery transactions skipped due to there being fewer than necessary orders in the New-Order table must be disclosed.

Table 5.5: Transaction Statistics

Statistic		Value
New Order	Home warehouse order lines	99.00%
	Remote warehouse order lines	1.00%
	Rolled back transactions	1.00%
	Average items per order	10.00
Payment	Home warehouse payments	85.00%
	Remote warehouse payments	15.00%
	Accessed by last name	60.01%
Delivery	Skipped transactions (interactive)	0
	Skipped transactions (deferred)	0
Order Status	Accessed by last name	60.06%
Transaction Mix	New Order	44.91%
	Payment	43.02%
	Order status	4.03%
	Delivery	4.01%
	Stock level	4.03%

Checkpoint Count and Location

The number of checkpoints in the Measurement Interval, the time in seconds from the start of the Measurement Interval to the first checkpoint, and the Checkpoint Interval must be disclosed.

The initial checkpoint was started 48 minutes after the start of the ramp-up. Subsequent checkpoints occurred every 30 minutes. Each checkpoint in the measurement interval lasted 25 minutes. The measurement interval contains four checkpoints.

Checkpoint Duration

The start time and duration in seconds of at least the four longest checkpoints during the Measurement Interval must be disclosed.

Checkpoint Start Time	Duration
11:00:28.31 pm	25 minutes
11:30:25.32 pm	25 minutes
12:00:22.35 pm	25 minutes
12:30:19.35 pm	25 minutes

Clause 6 Related Items

RTE Descriptions

If the RTE is commercially available, then its inputs must be specified. Otherwise, a description must be supplied of what inputs (e.g., scripts) to the RTE had been used.

The RTE used was Microsoft Benchcraft RTE. Benchcraft is a proprietary tool provided by Microsoft and is not commercially available. The RTE's input is listed in Appendix A.

Emulated Components

It must be demonstrated that the functionality and performance of the components being emulated in the Driver System are equivalent to the priced system. The results of the test described in Clause 6.6.3.4 must be disclosed.

The driver system consisted of 8 HP ProLiant servers. These driver machines emulated the users' web browsers.

Functional Diagrams

A complete functional diagram of both the benchmark configuration and the configuration of the proposed (target) system must be disclosed. A detailed list of all hardware and software functionality being performed on the Driver System and its interface to the SUT must be disclosed.

The driver system performed the data generation and input functions of the priced display device. It also captured the input and output data and timestamps for post-processing of the reported metrics. No other functionality was included on the driver system.

Section 1.4 of this report contains detailed diagrams of both the benchmark configuration and the priced configuration.

Networks

The network configuration of both the tested services and proposed (target) services that are being represented and a thorough explanation of exactly which parts of the proposed configuration are being replaced with the Driver System must be disclosed.

The bandwidth of the networks used in the tested/priced configuration must be disclosed.

In the tested configuration, 8 driver (RTE) machines were connected through a gigabit Ethernet switch to the client machines at 1Gbps, thus providing the path from the RTEs to the clients. The server (SUT) was connected to the clients through a gigabit Ethernet switch on a separate LAN.

The priced configuration was connected in the same manner as the tested configuration.

Operator Intervention

If the configuration requires operator intervention (see Clause 6.6.6), the mechanism and the frequency of this intervention must be disclosed.

This configuration does not require any operator intervention to sustain eight hours of the reported throughput.

Clause 7 Related Items

System Pricing

A detailed list of hardware and software used in the priced system must be reported. Each separately orderable item must have vendor part number, description, and release/revision level, and either general availability status or committed delivery data. If package-pricing is used, vendor part number of the package and a description uniquely identifying each of the components of the package must be disclosed. Pricing source and effective date(s) of price(s) must also be reported.

The total 3 year price of the entire configuration must be reported, including: hardware, software, and maintenance charges. Separate component pricing is recommended. The basis of all discounts used must be disclosed.

The details of the hardware and software are reported in the front of this report as part of the executive summary. All third party quotations are included at the end of this report as Appendix E.

Availability, Throughput, and Price Performance

The committed delivery date for general availability (availability date) of products used in the price calculation must be reported. When the priced system included products with different availability dates, the reported availability date for the priced system must be the date at which all components are committed to be available.

A statement of the measured tpmC as well as the respective calculations for the 5-year pricing, price/performance (price/tpmC), and the availability date must be included.

- | | |
|--------------------------------|---------------------|
| • Maximum Qualified Throughput | 240,737tpmC |
| • Price per tpmC | USD \$1.85 per tpmC |
| • Availability | February 1, 2007 |

Country Specific Pricing

Additional Clause 7 related items may be included in the Full Disclosure Report for each country specific priced configuration. Country specific pricing is subject to Clause 7.1.7

This system is being priced for the United States of America.

Usage Pricing

For any usage pricing, the sponsor must disclose:

- Usage level at which the component was priced.
- A statement of the company policy allowing such pricing.

The component pricing based on usage is shown below:

- 8 Microsoft Windows Server 2003 Standard Edition
- 1 Microsoft Windows Server 2003 Enterprise x64 Edition (SP1)
- 1 Microsoft SQL Server 2005 Enterprise x64 Edition (per processor) (SP1)
- 1 Microsoft Visual C++
- HP Servers include 3 years of support.

Clause 9 Related Items

Auditor's Report

The auditor's name, address, phone number, and a copy of the auditor's attestation letter indicating compliance must be included in the Full Disclosure Report.

This implementation of the TPC Benchmark C was audited by Lorna Livingtree of Performance Metrics, Inc.

Performance Metrics, Inc.
PO Box 984
Klamath CA 95548
(phone) 707-482-0523
(fax) 707-482-0575
e-mail: lornaL@perfmetrics.com

Availability of the Full Disclosure Report

The Full Disclosure Report must be readily available to the public at a reasonable charge, similar to the charges for similar documents by the test sponsor. The report must be made available when results are made public. In order to use the phrase "TPC Benchmark™ C", the Full Disclosure Report must have been submitted to the TPC Administrator as well as written permission obtained to distribute same.

Requests for this TPC Benchmark C Full Disclosure Report should be sent to:

TPC
Presidio of San Francisco
Building 572B Ruger St. (surface)
P.O. Box 29920 (mail)
San Francisco, CA 94129-0920

or

Hewlett-Packard Company
Database Performance Engineering
P.O. Box 692000
Houston, TX 77269-2000



November 8, 2006

Mr. Brean Campbell
Hewlett-Packard Company
20555 SH 249
Houston, TX 77077

I have verified by remote the TPC Benchmark™ C for the following configuration:

Platform: HP ProLiant ML370 G5 SAS
Database Manager: Microsoft SQL Server 2005 Enterprise X64 Edition
Operating System: Microsoft Windows 2003 Server Enterprise X64 Edition
Transaction Monitor: COM+

System Under Test: HP ProLiant ML370 G5 with:				
CPU's	Memory	Disks (total)	90% Response	TpmC
2 Intel EM64T @2.6GHz	Main: 64 GB	530 @36GB 24 @ 72GB	0.58	240,737
8 clients: DL360G4 each with:				
1 Intel Xeon @3.6 GHz	Main: 1 GB	1 @ 36GB	Na	Na

In my opinion, these performance results were produced in compliance with the TPC requirements for the benchmark. The following attributes of the benchmark were given special attention:

- The transactions were correctly implemented.
- The database files were properly sized.
- The database was properly scaled with 19,200 warehouses, all of which were active during the measured interval.
- The ACID properties were successfully demonstrated.
- Data loss durability was demonstrated on a subset of the SUT configured with a database properly populated for 1,920 warehouses.
- Input data was generated according to the specified percentages.
- Eight hours of mirrored log space was present on the tested system.
- Eight hours of growth space for the dynamic tables was present on the tested system.
- The data for the 60 days space calculation was verified.
- The controller cache for the log disks was enabled and mirrored.

- The steady state portion of the test was 120 minutes.
- One checkpoint was taken in steady state before the measured interval opened.
- Four checkpoints were completed inside the measured interval.
- The system pricing was checked for major components and maintenance.
- Third party quotes were verified for compliance.
- Client pricing was verified to be compliant with all requirements for substitution.

Auditor Notes:

None.

Sincerely,

A handwritten signature in black ink, appearing to read "Lorna Livingtree".

Lorna Livingtree
Auditor

Appendix A: Source Code

The client source code is listed below.

dlldata.c

```
*****  
***** DllData file -- generated by MIDL compiler  
  
DO NOT ALTER THIS FILE  
  
This file is regenerated by MIDL on every IDL file  
compile.  
  
To completely reconstruct this file, delete it and  
rerun MIDL  
on all the IDL files in this DLL, specifying this  
file for the  
/dlldata command line option  
*****  
*****  
  
#include <rpcproxy.h>  
  
#ifdef __cplusplus  
extern "C"  
{  
#endif  
  
EXTERN_PROXY_FILE( tpcc_com_ps )  
  
PROXYFILE_LIST_START  
/* Start of list */  
REFERENCE_PROXY_FILE( tpcc_com_ps ),  
/* End of list */  
PROXYFILE_LIST_END  
  
DLLDATA_ROUTINES( aProxyFileList, GET_DLL_CLSID )  
  
#ifdef __cplusplus  
} /*extern "C" */  
#endif  
  
/* end of generated dlldata file */
```

error.h

```
/* FILE: ERROR.H Microsoft  
TPC-C Kit Ver. 4.20.000 Copyright Microsoft, 1999  
* All Rights Reserved  
* Version 4.10.000 audited by Richard Gimarc, Performance Metrics, 3/17/99  
* PURPOSE: Header file for error exception classes.  
* Change history:  
* 4.20.000 - updated rev number to match kit  
* 4.21.000 - fixed bug: ~CBaseErr needed to be declared virtual  
*/  
  
#pragma once  
  
#ifndef _INC_STRING  
#include <string.h>  
#endif  
  
const int m_szMsg_size = 512;  
const int m_szApp_size = 64;  
const int m_szLoc_size = 64;  
  
//error message structure used in ErrorText routines  
typedef struct _SERRORMSG  
{  
    int iError;  
    //error id of message  
    char szMsg[256];  
    //message to sent to browser  
} SERRORMSG;  
  
typedef enum _ErrorLevel  
{  
    ERR_FATAL_LEVEL = 1,  
    ERR_WARNING_LEVEL = 2,  
    ERR_INFORMATION_LEVEL = 3  
} ErrorLevel;  
  
#define ERR_TYPE_LOGIC -1  
    //logic error in program; internal error  
#define ERR_SUCCESS 0  
    //success (a non-error error)  
#define ERR_BAD_ITEM_ID 1  
    //expected abort record in txnRecord  
#define ERR_TYPE_DELIVERY_POST 2  
    //expected delivery post failed  
  
#define ERR_TYPE_WEBDLL 3  
    //tpcc web generated error  
#define ERR_TYPE_SQL 4  
    //sql server generated error  
#define ERR_TYPE_DBLIB 5  
    //dblib generated error  
#define ERR_TYPE_ODBC 6  
    //odbc generated error  
#define ERR_TYPE_SOCKET 7  
    //error on communication socket client rte only  
#define ERR_TYPE_DEADLOCK 8  
    //dblib and odbc only deadlock condition  
#define ERR_TYPE_COM 9  
    //error from COM call  
#define ERR_TYPE_TUXEDO 10  
    //tuxedo error  
#define ERR_TYPE_OS 11  
    //operating system error  
#define ERR_TYPE_MEMORY 12  
    //memory allocation error  
#define ERR_TYPE_TPCC_ODBC 13  
    //error from tpcc odbc txn module  
#define ERR_TYPE_TPCC_DBLIB 14  
    //error from tpcc dblib txn module  
#define ERR_TYPE_DELISRV 15  
    //delivery server error  
#define ERR_TYPE_TXNLOG 16  
    //txn log error  
#define ERR_TYPE_ECCONN 17  
    //Benchcraft connection class  
#define ERR_TYPE_TPCC_CONN 18  
    //Benchcraft connection class  
#define ERR_TYPE_ENCINA 19  
    //Encina error  
#define ERR_TYPE_COMPONENT 20  
    //error from COM component  
#define ERR_TYPE_RTE 21  
    //Benchcraft rte  
#define ERR_TYPE_AUTOMATION 22  
    //Benchcraft automation errors
```

```

#define ERR_TYPE_DRIVER 23
    //Driver engine errors
#define ERR_TYPE_RTE_BASE 24
    //Framework errors
#define ERR_BUF_OVERFLOW 25
    //Buffer overflow during receive
#define ERR_TYPE_SOAP_HTTP 26
    //HTTP/SOAP dll generated error
#define ERR_TYPE_OLEDB 27
    //OLE-DB generated error
#define ERR_TYPE_TPCC_OLEDB 28
    //error from tpcc ole-db txn module
// TPC-W error types
#define ERR_TYPE_TPCW_CONN 50
    //Benchcraft connection class
#define ERR_TYPE_TPCW_HTML 51
    //error from TpcwHtml dll
#define ERR_TYPE_TPCW_USER 52
    //error from TPC-W user class
#define ERR_TYPE_TPCW_ENG_BASE 53
#define ERR_TYPE_TPCW_ENG_OS 54
#define ERR_TYPE_HTML_RESP 55
#define ERR_TYPE_TPCW_ODBC 56
#define ERR_TYPE_SCHANNEL 57
#define ERR_TYPE_THINK_LIST 58
//----- end TPC-W -----
#define ERR_TYPE_XML_PROFILE 59
// TPC-E error types
#define ERR_TYPE_TPCE_CONN 60
    //TPC-E pipe connection errors
#define ERR_TYPE_TPCE RTE 61
    //TPC-E Rte errors
#define ERR_TYPE_TPCE_ENG_BASE 62
    //Tpce Driver engine errors
#define ERR_TYPE_TPCE_ENG_OS 63
    //Tpce Driver
engine system errors
//#define ERR_TYPE_TPCE_MEE_ENG_BASE 64
    //Tpce MEE
Driver engine errors
//#define ERR_TYPE_TPCE_MEE_ENG_OS 65
    //Tpce MEE
Driver engine system errors

```

```

#define ERR_INS_MEMORY
    "Insufficient Memory to continue."
#define ERR_UNKNOWN
    "Unknown error."
#define ERR_MSG_BUF_SIZE 512
#define INV_ERROR_CODE -1
#define ERR_INS_BUF_OVERFLOW "Insufficient Buffer size to receive HTML pages."

class CBaseErr
{
public:
    enum Action
    {
        eNone = 0
    };

    CBaseErr(LPCTSTR szLoc = NULL)
    {
        m_idMsg = GetLastErrorMessage(); //take the error code immediately before it is reset by other functions
        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
        GetModuleFileName(GetModuleHandle(NULL), m_szApp, m_szApp_size);
    }

    CBaseErr(int idMsg, LPCTSTR szLoc = NULL)
    {
        m_idMsg = idMsg;
        if (szLoc)
        {
            m_szLoc = new char[strlen(szLoc)+1/*m_szLoc_size*/];
            strcpy(m_szLoc, szLoc);
        }
        else
            m_szLoc = NULL;
        m_szApp = new char[m_szApp_size];
    }

```

```

        GetModuleFileName(GetModuleHandle(NULL),
m_szApp, m_szApp_size);
    }

    virtual ~CBaseErr(void)
    {
        if (m_szApp)
            delete [] m_szApp;
        if (m_szLoc)
            delete [] m_szLoc;
    };

    virtual void Draw(HWND hwnd, LPCTSTR szStr
= NULL)
    {
        int j = 0;
        char szTmp[512];
        if (szStr)
            j += wsprintf(szTmp,
"%s\n", szStr);
        if (ErrorNum() != INV_ERROR_CODE)
            j += wsprintf(szTmp+j,
"Error = %d\n", ErrorNum());
        if (m_szLoc)
            j += wsprintf(szTmp+j,
"Location = %s\n", GetLocation());
        j += wsprintf(szTmp+j, "%s\n",
ErrorText());
        MessageBox(hwnd, szTmp, m_szApp,
MB_OK);
    }

    char *GetApp(void) { return m_szApp; }
    char *GetLocation(void) { return m_szLoc; }
    virtual int ErrorNum() { return m_idMsg; }

    virtual int ErrorType() = 0; // a value which distinguishes the kind of error that occurred
    virtual char *ErrorTypeStr() = 0; // text representation of the error type
    virtual char *ErrorText() = 0; // a string (i.e., human readable) representation of the error
    virtual int ErrorAction() { return eNone; } // the function call that caused the error

protected:
    char *m_szApp;
    char *m_szLoc; // code location where the error occurred
    int m_idMsg;
    //short m_errType;
};

class CSocketErr : public CBaseErr
{

```

```

public:
    enum Action
    {
        eNone = 0,
        eSend,
        eSocket,
        eBind,
        eConnect,
        eListen,
        eHost,
        eRecv,
        eGetHostByName,
        eWSACreateEvent,
        eWSASend,
        eWSAGetOverlappedResult,
        eWSARecv,
        eWSAWaitForMultipleEvents,
        eWSAStartup,
        eWSAResetEvent,
        eWSAEnumNetworkEvents,
        eWSAEventSelect,
        eSelect,
        eAccept,
        eNonRetryable
    };

    CSocketErr(Action eAction, LPCTSTR
szLocation = NULL);

    ~CSocketErr()
    {
        if (m_szErrorText != NULL)
            delete []
    }

    Action    m_eAction;
    char     *m_szErrorText;

    int           ErrorType() { return
ERR_TYPE_SOCKET; };
    char*        ErrorTypeStr() { return "SOCKET";
}
    char*        ErrorText(void);
    int           ErrorAction() { return
(int)m_eAction; }

};

class CSysErr : public CBaseErr
{
public:
    enum Action
    {
        eNone = 0,
        eTransactNamedPipe,
        eWaitNamedPipe,
        eSetNamedPipeHandleState,
        eCreateFile,
        eCreateProcess,
        eCallNamedPipe,
        eCreateEvent,
        eCreateThread,
        eVirtualAlloc,
        eReadFile = 10,
        eWriteFile,
        eMapViewOfFile,
        eCreateFileMapping,
        eInitializeSecurityDescriptor,
        eSetSecurityDescriptorDacl,
        eCreateNamedPipe,
        eConnectNamedPipe,
        eWaitForSingleObject,
        eRegOpenKeyEx,
        eRegQueryValueEx = 20,
        ebeginthread,
        eRegEnumValue,
        eRegSetValueEx,
        eRegCreateKeyEx,
        eWaitForMultipleObjects,
        eRegisterClassEx,
        eCreateWindow,
        eCreateSemaphore,
        eReleaseSemaphore,
        eSeek,
        eRead,
        eFWrite,
        eTmpFile,
        eSetFilePointer,
        eNew,
        eCloseHandle,
        eGetOverlappedResult
    };

    CSysErr(Action
eAction, LPCTSTR szLocation);
    CSysErr(int iError,
Action eAction, LPCTSTR szLocation);
    int           ErrorType() { return
ERR_TYPE_OS; };
    char*        ErrorTypeStr() { return "SYSTEM";
}
    char*        *ErrorText(void);
    int           ErrorAction() { return
(int)m_eAction; }
    void         Draw(HWND hwnd, LPCTSTR szStr =
NULL);

    Action    m_eAction;

private:
    char m_szMsg[ERR_MSG_BUF_SIZE];
};

class CMemoryErr : public CBaseErr
{
public:
    CMemoryErr();

    int           ErrorType() { return
ERR_TYPE_MEMORY; };
    char*        ErrorTypeStr() { return "OUT OF
MEMORY"; };
    char*        ErrorText() { return
ERR_INS_MEMORY; }
};

class CBufferOverflowErr : public CBaseErr
{
public:
    CBufferOverflowErr(int,LPTSTR);

    int           ErrorType() { return
ERR_BUF_OVERFLOW; };
    char*        ErrorTypeStr() { return "BUFFER
OVERFLOW"; };
    char*        ErrorText() { return
ERR_INS_BUF_OVERFLOW; }

// Exception type for XML profiles
class CXMLProfileErr : public CBaseErr
{
public:
    enum Action
    {
        LoadProfile = 1,
        LoadSchema,
        ValidateProfile,
        SaveProfile,
        LoadFromXML,
        SaveToXML,
        ApplyProcessingInstruction,
        ApplyAttribute,
        ApplyNode
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        m_bOverload = true;
    };

    CXMLProfileErr(Action eAction,
int eCode, LPCTSTR szLocation, char * szMsg)
    {
        m_eAction = eAction;
        m_eCode = eCode;
        strcpy(m_szMsg, szMsg);
        m_bOverload = false;
    };

    virtual int
ErrorType() { return
ERR_TYPE_XML_PROFILE; };
    virtual char
*ErrorTypeStr() { return "XML PROFILE"; };
    virtual char
*ErrorText() { return
ERR_INS_XML_PROFILE; };

    virtual int
ErrorCode() { return m_eCode; };
    int           ErrorAction() { return (int)m_eAction; }
    void         Draw(HWND
hwnd, LPCTSTR szStr = NULL)
    //{{{
};

```

```

        // ::MessageBox(hwnd,
szStr, m_szLoc, MB_OK);
        //};

private:
    char
m_szMsg[ERR_MSG_BUF_SIZE];
    LPCTSTR m_szLoc;
    int           m_eCode;
    bool          m_bOverload;
    Action        m_eAction;
};


```

install.c

```

/*      FILE:          INSTALL.C
 *      Microsoft
TPC-C Kit Ver. 4.51.000
*      Copyright
Microsoft, 2003
*          All Rights Reserved
*
*          not audited
*
*      PURPOSE: Automated installation
application for TPC-C Web Kit
*      Contact: Charles Levine
(clevine@microsoft.com)
*
*      Change history:
*          4.20.000 - added COM installation
steps
*          4.50.000 - added IIS6 configuration options
*          4.51.000 - added routines to copy
Visual Studio runtime module (MSVCR70.DLL)
*          to
SystemRoot\System32
*/
#include <windows.h>
#include <direct.h>
#include <io.h>
#include <stdlib.h>
#include <tchar.h>
#include <stdio.h>
#include <commctrl.h>
#include ".\common\src\ReadRegistry.h"
#include <process.h>

#include "resource.h"

#define WM_INITTEXT          WM_USER+100
HICON                 hIcon;
HINSTANCE hInst;

DWORD                versionExeMS;
DWORD                versionExeLS;
DWORD                versionExeMM;
DWORD                versionDllMS;
DWORD                versionDllLS;

```

```

// TPC-C registry settings
TPCCREGISTRYDATA     Reg;

static   int           iPoolThreadLimit;
static   int           iMaxPoolThreads;
static   int           iThreadTimeout;
static   int           iListenBackLog;
static   int           iAcceptExOutstanding;
static   int           iUriEnableCache;
static   int           iUriScavengerPeriod;
static   int           iMaxConnections;

static   int           iIISMajorVersion;
static   int           iNumberOfProcessors;

static   int           iMaxPhysicalMemory;
//max physical memory in MB
static   char          szLastFileName[64];           // last file we worked on (for error reporting)

BOOL     CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK MainDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
BOOL     CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam);
static  void           ProcessOK(HWND hwnd, char *szDllPath, char *szWindowsPath);
static  void           ReadRegistrySettings(void);
static  void           WriteRegistrySettings(char *szDllPath);
static  BOOL          RegisterDLL(char *szFileName);
static  int            CopyFiles(HWND hDlg, char *szDllPath, char *szWindowsPath);
static  BOOL          GetInstallPath(char *szDllPath);
static  BOOL          GetWindowsInstallPath(char *szWindowsPath);
static  void           GetVersionInfo(char *szDLLPath, char *szExePath);
static  BOOL          CheckWWWWebService(void);
static  BOOL          StartWWWWebService(void);
static  BOOL          StopWWWWebService(void);
static  void           UpdateDialog(HWND hDlg);
static  void           ConfigureIIS6(HWND hwnd, HWND hDlg);

SYSTEM_INFO siSysInfo;

BOOL install_com(char *szDllPath);
#include "...\\common\\src\\ReadRegistry.cpp"

```

```

int WINAPI WinMain( HINSTANCE hInstance, HINSTANCE hPrevInstance, LPSTR lpCmdLine, int nCmdShow )
{
    int iRc;

    hInst = hInstance;
    InitCommonControls();
    hIcon = LoadIcon(hInstance, MAKEINTRESOURCE(IDI_ICON1));
    iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG4), GetDesktopWindow(), LicenseDlgProc);
    if ( iRc )
    {
        iRc = DialogBox(hInstance, MAKEINTRESOURCE(IDD_DIALOG1), GetDesktopWindow(), MainDlgProc);
        if ( iRc )
        {
            DialogBoxParam(hInstance, MAKEINTRESOURCE(IDD_DIALOG2), GetDesktopWindow(), UpdatedDlgProc, (LPARAM)iRc);
        }
    }
    DestroyIcon(hIcon);
    return 0;
}

BOOL CALLBACK LicenseDlgProc(HWND hwnd, UINT uMsg, WPARAM wParam, LPARAM lParam)
{
    HGLOBAL             hRes;
    HRSRC               hResInfo;
    BYTE                *pSrc, *pDst;
    DWORD               dwSize;
    static  HFONT        hFont;
    switch(uMsg)
    {
        case WM_INITDIALOG:
            hFont = CreateFont(-12, 0, 0, 0, 400, 0, 0, 0, 0, 0, 0, 0, 0, 0, "Arial");
            SendMessage(
GetDlgItem(hwnd, IDR_LICENSE1), WM_SETFONT, (WPARAM)hFont, MAKELPARAM(0, 0));
            PostMessage(hwnd, WM_INITTEXT, (WPARAM)0, (LPARAM)0);
            return TRUE;
        case WM_INITTEXT:
            hResInfo =
FindResource(hInst, MAKEINTRESOURCE(IDR_LICENSE1), "LICENSE");
            dwSize =
SizeofResource(hInst, hResInfo);
            hRes =
LoadResource(hInst, hResInfo );
            pSrc = (BYTE *)LockResource(hRes);

```

```

*)malloc(dwSize+1);
    pDst = (unsigned char
    if ( pDst )
    {
        memcpy(pDst,
pSrc, dwSize);
        pDst[dwSize]
= 0;

        SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        free(pDst);
    }
    else

        SetDlgItemText(hwnd, IDC_LICENSE, (const
char *)pSrc);
        return TRUE;
    case WM_DESTROY:
        DeleteObject(hFont);
        return TRUE;
    case WM_COMMAND:
        if ( wParam == IDOK )
            EndDialog(hwnd, TRUE);
            if ( wParam == IDCANCEL
)
        EndDialog(hwnd, FALSE);
        default:
            break;
    }
    return FALSE;
}

BOOL CALLBACK UpdatedDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    switch(uMsg)
    {
        case WM_INITDIALOG:
            switch(lParam)
            {
                case 1:
                case 2:
                    SetDlgItemText(hwnd, IDC_RESULTS, "TPC-C
Web Client Installed");
                    break;
                }
                return TRUE;
            case WM_COMMAND:
                if ( wParam == IDOK )
                    EndDialog(hwnd, TRUE);
                    break;
                default:
                    break;
    }
    return FALSE;
}

```

```

BOOL CALLBACK MainDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    PAINTSTRUCT ps;
    MEMORYSTATUS memoryStatus;
    OSVERSIONINFO VI;
    static char szTmp[256];
    static char szDllPath[256];
    static char szWindowsPath[256];
    static char szExePath[256];

    switch(uMsg)
    {
        case WM_INITDIALOG:
            GlobalMemoryStatus(&memoryStatus);
            iMaxPhysicalMemory =
(memoryStatus.dwTotalPhys/ 1048576);
            if (
GetWindowsInstallPath(szWindowsPath) )
            {
                MessageBox(hwnd, "Error: Cannot determine
Windows System Root.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            if (
GetInstallPath(szDllPath) )
            {
                MessageBox(hwnd, "Error internet service
inetsrv is not installed.", NULL, MB_ICONSTOP | MB_OK);
                EndDialog(hwnd, FALSE);
                return TRUE;
            }
            // set default values
            ZeroMemory( &Reg,
sizeof(Reg) );
            Reg.dwNumberOfDeliveryThreads = 4;
            Reg.dwMaxConnections =
100;
            Reg.dwMaxPendingDeliveries = 100;
            Reg.eDB_Protocol =
ODBC;
            Reg.eTxnMon = None;
            strcpy(Reg.szDbServer,
(""));
            strcpy(Reg.szDbName,
"tpcc");
            strcpy(Reg.szDbUser,
"sa");

```

```

strcpy(Reg.szDbPassword, "");
iPoolThreadLimit =
iMaxPhysicalMemory * 2;
iThreadTimeout = 86400;
iListenBackLog = 15;
iAcceptExOutstanding =
40;

ReadTPCCRegistrySettings( &Reg );
ReadRegistrySettings();

// copy the hardware
information to the SYSTEM_INFO structure
GetSystemInfo(&siSysInfo);
// store the number of
processors on this system
iNumberOfProcessors =
siSysInfo.dwNumberOfProcessors;

GetModuleFileName(hInst, szExePath,
sizeof(szExePath));
GetVersionInfo(szDllPath, szExePath);
wsprintf(szTmp,
"Version %d.%2.2d.%3.3d", versionExeMS, versionExeLS);
SetDlgItemText(hwnd,
IDC_VERSION, szTmp);
SetDlgItemText(hwnd,
IDC_PATH, szDllPath);
SetDlgItemText(hwnd,
ED_DB_SERVER, Reg.szDbServer);
SetDlgItemText(hwnd,
ED_DB_USER_ID, Reg.szDbUser);
SetDlgItemText(hwnd,
ED_DB_PASSWORD, Reg.szDbPassword);
SetDlgItemText(hwnd,
ED_DB_NAME, Reg.szDbName);
SetDlgItemInt(hwnd,
ED_THREADS, Reg.dwNumberOfDeliveryThreads, FALSE);
SetDlgItemInt(hwnd,
ED_MAXCONNECTION, Reg.dwMaxConnections, FALSE);
SetDlgItemInt(hwnd,
ED_MAXDELIVERIES, Reg.dwMaxPendingDeliveries, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, iPoolThreadLimit,
FALSE);
SetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, iThreadTimeout, FALSE);
SetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, iListenBackLog, FALSE);
SetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,
iAcceptExOutstanding, FALSE);

```

```

        // check OS version
level for COM. Must be at least Windows 2000
        VI.dwOSVersionInfoSize
= sizeof(VI);
        GetVersionEx( &VI );
        if (VI.dwMajorVersion <
5)
        {
            HWND hDlg =
GetDlgItem( hwnd, IDC_TM_MTS );
            EnableWindow(
hDlg, 0 ); // disable COM option
if
(Reg.eTxnMon == COM)

            Reg.eTxnMon = None;
        }
        CheckDlgButton(hwnd,
IDC_TM_NONE, 0 );
        CheckDlgButton(hwnd,
IDC_TM_MTS, 0 );
        switch (Reg.eTxnMon)
{
    case None:
        CheckDlgButton(hwnd, IDC_TM_NONE, 1 );
        break;
    case COM:
        CheckDlgButton(hwnd, IDC_TM_MTS, 1 );
        break;
}
        return TRUE;
    case WM_PAINT:
        if ( IsIconic(hwnd) )
        {

BeginPaint(hwnd, &ps);
        DrawIcon(ps.hdc, 0, 0, hIcon);
        EndPaint(hwnd, &ps);
        return TRUE;
    }
    break;
    case WM_COMMAND:
        if ( HIWORD(wParam) ==
BN_CLICKED )
        {
            switch(
LOWORD(wParam) )
            {
                case IDOK:
                    ProcessOK(hwnd, szDllPath, szWindowsPath);
                    return TRUE;
                case IDCANCEL:

```

```

                    EndDialog(hwnd, FALSE);
                    return TRUE;
                default:
                    return FALSE;
                }
            }
            default:
                break;
        }
        return FALSE;
    }

    static void ProcessOK(HWND hwnd, char *szDllPath,
char *szWindowsPath)
{
    int d;
    HWND hDlg;
    int rc;
    BOOL bSvcRunning;
    char szFullName[256];
    char szErrTxt[128];

    // Check whether Service Pack 1 has been
installed if
        // running on Windows Server 2003. The RTM
version has
        // a limitation on the number of concurrent
HTTP connections.
        //
        OSVERSIONINFOEX VersionInfo;
    VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
    if
        (GetVersionEx((LPOVERSIONINFO)&VersionInfo))
        {
            if (VersionInfo.dwMajorVersion ==
5 && // Windows 2000/2003 Server?
                VersionInfo.dwMinorVersion == 2 && // Windows
2003 Server?
                VersionInfo.wServicePackMajor == 0) // Service
Pack installed?
            {
                TCHAR szMsg[256];
                _snprintf(szMsg,
sizeof(szMsg),
running on Windows Server 2003 without at least
Service Pack 1\n"
                                         "limits the
number of concurrent HTTP connections to around
8000.");

```

```

                MessageBox(hwnd, szMsg,
_T("Service Pack not Installed"), MB_ICONEXCLAMATION
| MB_OK);
}

// read settings from dialog
Reg.dwNumberOfDeliveryThreads =
GetDlgItemInt(hwnd, ED_THREADS, &d, FALSE);
Reg.dwMaxConnections = GetDlgItemInt(hwnd,
ED_MAXCONNECTION, &d, FALSE);
Reg.dwMaxPendingDeliveries =
GetDlgItemInt(hwnd, ED_MAXDELIVERIES, &d, FALSE);

GetDlgItemText(hwnd, ED_DB_SERVER,
Reg.szDbServer, sizeof(Reg.szDbServer));
GetDlgItemText(hwnd, ED_DB_USER_ID,
Reg.szDbUser, sizeof(Reg.szDbUser));
GetDlgItemText(hwnd, ED_DB_PASSWORD,
Reg.szDbPassword, sizeof(Reg.szDbPassword));
GetDlgItemText(hwnd, ED_DB_NAME,
Reg.szDbName, sizeof(Reg.szDbName));

if ( IsDlgItemChecked(hwnd, IDC_TM_NONE)
)
    Reg.eTxnMon = None;
else if ( IsDlgItemChecked(hwnd,
IDC_TM_MTS) )
    Reg.eTxnMon = COM;

iPoolThreadLimit = GetDlgItemInt(hwnd,
ED_IIS_MAX_THREAD_POOL_LIMIT, &d, FALSE);
iThreadTimeout = GetDlgItemInt(hwnd,
ED_IIS_THREAD_TIMEOUT, &d, FALSE);
iListenBackLog = GetDlgItemInt(hwnd,
ED_IIS_LISTEN_BACKLOG, &d, FALSE);
iAcceptExOutstanding = GetDlgItemInt(hwnd,
ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE, &d, FALSE);

ShowWindow(hwnd, SW_HIDE);
hDlg = CreateDialog(hInst,
MAKEINTRESOURCE(IDD_DIALOG3), hwnd, CopyDlgProc);
ShowWindow(hDlg, SW_SHOWNA);
UpdateDialog(hDlg);

// check to see if the web services are
running
bSvcRunning = CheckWWWebService();
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Stopping Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    StopWWWebService();
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

// write binaries to inetpub\wwwroot
rc = CopyFiles(hDlg, szDllPath,
szWindowsPath);
if ( !rc )
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error(s)
occurred when creating " );
    strcat( szErrTxt, szLastFileName
);
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// while we have the web services shutdown,
check to see if this
// is IIS6. If it is, then call
ConfigureIIS6
if ( iIISMajorVersion == 6 )
{
    ConfigureIIS6(hwnd, hDlg);
}

//if we stopped service restart it.
if ( bSvcRunning )
{
    SetDlgItemText(hDlg, IDC_STATUS,
"Starting Web Service.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    StartWWWService();
}

// update registry
SetDlgItemText(hDlg, IDC_STATUS, "Updating
Registry.");
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
WriteRegistrySettings(szDllPath);

// register com proxy stub
strcpy(szFullName, szDllPath);
strcat(szFullName, "tpcc_com_ps.dll");
if (!RegisterDLL(szFullName))
{
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    strcpy( szErrTxt, "Error occurred
when registering " );
    strcat( szErrTxt, szFullName );
    MessageBox(hwnd, szErrTxt, NULL,
MB_ICONSTOP | MB_OK);
    EndDialog(hwnd, 0);
    return;
}

// if using COM
if (Reg.eTxnMon == COM)

```

```

{
    SetDlgItemText(hDlg, IDC_STATUS,
"Configuring COM.");
    SendDlgItemMessage(hDlg,
IDC_PROGRESS1, PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
    if (install_com(szDllPath))
    {
        ShowWindow(hwnd,
SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt,
"Error occurred when configuring COM settings." );
        MessageBox(hwnd,
szErrTxt, NULL, MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
    Sleep(100);
    ShowWindow(hwnd, SW_SHOWNA);
    DestroyWindow(hDlg);
    EndDialog(hwnd, rc);
    return;
}

static void ReadRegistrySettings(void)
{
    HKEY hKey;
    DWORD size;
    DWORD type;

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_READ, &hKey)
== ERROR_SUCCESS )
    {
        size = sizeof(iIISMajorVersion);
        if ( RegQueryValueEx(hKey,
"MajorVersion", 0, &type, (char *)&iIISMajorVersion,
&size) == ERROR_SUCCESS )
            if ( !iIISMajorVersion
)
                iIISMajorVersion = 5;
        if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Services\Inetinfo\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )
            {
                if ( iIISMajorVersion == 6 )
                {
                    // since IIS6 handles
                    // the pool thread parameters differently, we need to
                    // fill in the dialog
                    // with the
                    MaxPoolThreads rather than PoolThreadLimit
                }
            }
    }
}

```

```

// for ease of coding,
we are just going to stuff the value into
iPoolThreadLimit
size = sizeof(iPoolThreadLimit);
if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
    if ( !iPoolThreadLimit
)

iPoolThreadLimit = iMaxPhysicalMemory * 2;
}
else
{
    size =
sizeof(iPoolThreadLimit);
    if (
RegQueryValueEx(hKey, "MaxPoolThreads", 0, &type,
(char *)&iPoolThreadLimit, &size) == ERROR_SUCCESS )
        if ( !iPoolThreadLimit
)

iPoolThreadLimit = iMaxPhysicalMemory * 2;
}

size = sizeof(iThreadTimeout);
if ( RegQueryValueEx(hKey,
"ThreadTimeout", 0, &type, (char *)&iThreadTimeout,
&size) == ERROR_SUCCESS )
    if ( !iThreadTimeout
)

iThreadTimeout = 86400;
size = sizeof(iListenBackLog);
if ( RegQueryValueEx(hKey,
"ListenBackLog", 0, &type, (char *)&iListenBackLog,
&size) == ERROR_SUCCESS )
    if ( !iListenBackLog
)

iListenBackLog = 15;
RegCloseKey(hKey);
}

if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Parameters\W3SVC\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )
{
    size =
sizeof(iAcceptExOutstanding);
    if ( RegQueryValueEx(hKey,
"AcceptExOutstanding", 0, &type, (char *)
&iAcceptExOutstanding, &size) == ERROR_SUCCESS )
        if (
!iAcceptExOutstanding
)
        iAcceptExOutstanding = 40;
    RegCloseKey(hKey);
}
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\CurrentControlSet\Parameters\HTTP\Parameters",
0, KEY_READ, &hKey) == ERROR_SUCCESS )

```

```

{
    size = sizeof(iUriEnableCache);
    if ( RegQueryValueEx(hKey,
    "UriEnableCache", 0, &type, (char *)&iUriEnableCache,
    &size) == ERROR_SUCCESS )
        if ( !iUriEnableCache )

    iUriEnableCache = 0;

    size =
    sizeof(iUriScavengerPeriod);
    if ( RegQueryValueEx(hKey,
    "UriScavengerPeriod", 0, &type, (char *)
    *&iUriScavengerPeriod, &size) == ERROR_SUCCESS )
        if (
    !iUriScavengerPeriod )

    iUriScavengerPeriod = 10800;

    size = sizeof(iMaxConnections);
    if ( RegQueryValueEx(hKey,
    "MaxConnections", 0, &type, (char *)&iMaxConnections,
    &size) == ERROR_SUCCESS )
        if ( !iMaxConnections )

    iMaxConnections = 100000;

    RegCloseKey(hKey);
}

static void WriteRegistrySettings(char *szDllPath)
{
    HKEY hKey;
    DWORD dwDisposition;
    char szTmp[256];
    char *ptr;
    int iRc;

    if ( RegCreateKeyEx(HKEY_LOCAL_MACHINE,
    "SOFTWARE\\Microsoft\\TPCC", 0, NULL,
    REG_OPTION_NON_VOLATILE, KEY_ALL_ACCESS, NULL, &hKey,
    &dwDisposition) == ERROR_SUCCESS )
    {
        strcpy(szTmp, szDllPath);
        ptr = strstr(szTmp, "tpcc");
        if ( ptr )
            *ptr = 0;

        RegSetValueEx(hKey, "Path", 0,
        REG_SZ, szTmp, strlen(szTmp)+1);

        RegSetValueEx(hKey,
        "NumberOfDeliveryThreads", 0, REG_DWORD, (char
        *)&Reg.dwNumberOfDeliveryThreads,
        sizeof(Reg.dwNumberOfDeliveryThreads));
        RegSetValueEx(hKey,
        "MaxConnections", 0, REG_DWORD, (char
        *)&Reg.dwMaxConnections,
        sizeof(Reg.dwMaxConnections));
        RegSetValueEx(hKey,
        "MaxPendingDeliveries", 0, REG_DWORD, (char
        *) &Reg.dwMaxPendingDeliveries,
        sizeof(Reg.dwMaxPendingDeliveries));
    }
    else
    {
        RegSetValueEx(hKey,
        "DB_Protocol", 0, REG_SZ,
        szDBNames[Reg.eDB_Protocol],
        strlen(szDBNames[Reg.eDB_Protocol])+1);
        RegSetValueEx(hKey, "TxnMonitor",
        0, REG_SZ, szTxnMonNames[Reg.eTxnMon],
        strlen(szTxnMonNames[Reg.eTxnMon])+1);
        RegSetValueEx(hKey, "DbServer",
        0, REG_SZ, Reg.szDbServer, strlen(Reg.szDbServer)+1);
        RegSetValueEx(hKey, "DbName", 0,
        REG_SZ, Reg.szDbName, strlen(Reg.szDbName)+1);
        RegSetValueEx(hKey, "DbUser", 0,
        REG_SZ, Reg.szDbUser, strlen(Reg.szDbUser)+1);
        RegSetValueEx(hKey, "DbPassword",
        0, REG_SZ, Reg.szDbPassword,
        strlen(Reg.szDbPassword)+1);

        strcpy(szTmp, "YES");
        RegSetValueEx(hKey,
        "COM_SinglePool", 0, REG_SZ, szTmp,
        strlen(szTmp)+1);

        RegFlushKey(hKey);
        RegCloseKey(hKey);
    }

    if (
    (iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
    "SYSTEM\\CurrentControlSet\\Services\\Inetinfo\\Parameters", 0, NULL,
    REG_OPTION_NON_VOLATILE,
    KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
    ERROR_SUCCESS )
    {
        // if this is IIS6, then we need
        // to treat the PoolThreadLimit differently
        // if IIS6, then PoolThreadLimit
        // is the maximum number of threads for the entire
        // system.
        // IIS6 added MaxPoolThreads
        // which controls the number of threads per processor.
        // For IIS6
        // we will set MaxPoolThreads to
        // the value the user provided in the dialog and then
        // set
        // PoolThreadLimit to
        // MaxPoolThreads * number of processors on this system
        if ( iIISMajorVersion == 6 )
        {
            iMaxPoolThreads =
            iPoolThreadLimit;
            iPoolThreadLimit =
            iMaxPoolThreads * iNumberOfProcessors;
            RegSetValueEx(hKey,
            "PoolThreadLimit", 0, REG_DWORD, (char
            *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
            RegSetValueEx(hKey,
            "MaxPoolThreads", 0, REG_DWORD, (char
            *)&iMaxPoolThreads, sizeof(iMaxPoolThreads));
        }
        else
    }
}

{
    RegSetValueEx(hKey,
    "PoolThreadLimit", 0, REG_DWORD, (char
    *)&iPoolThreadLimit, sizeof(iPoolThreadLimit));
}

{
    RegSetValueEx(hKey,
    "ThreadTimeout", 0, REG_DWORD, (char
    *)&iThreadTimeout, sizeof(iThreadTimeout));
    RegSetValueEx(hKey,
    "ListenBackLog", 0, REG_DWORD, (char
    *)&iListenBackLog, sizeof(iListenBackLog));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

if (
(iRc=RegCreateKeyEx(HKEY_LOCAL_MACHINE,
"SYSTEM\\CurrentControlSet\\Services\\W3SVC\\Parameters", 0, NULL,
REG_OPTION_NON_VOLATILE,
KEY_ALL_ACCESS, NULL, &hKey, &dwDisposition)) ==
ERROR_SUCCESS )
{
    RegSetValueEx(hKey,
    "AcceptExOutstanding", 0, REG_DWORD, (char
    *)&iAcceptExOutstanding,
    sizeof(iAcceptExOutstanding));

    RegFlushKey(hKey);
    RegCloseKey(hKey);
}

return;
}

BOOL CALLBACK CopyDlgProc(HWND hwnd, UINT uMsg,
WPARAM wParam, LPARAM lParam)
{
    if ( uMsg == WM_INITDIALOG )
    {
        SendDlgItemMessage(hwnd,
        IDC_PROGRESS1, PBM_SETRANGE, 0, MAKELPARAM(0, 13));
        SendDlgItemMessage(hwnd,
        IDC_PROGRESS1, PBM_SETSTEP, (WPARAM)1, 0);
        return TRUE;
    }
    return FALSE;
}

BOOL RegisterDLL(char *szFileName)
{
    HINSTANCE hLib;
    FARPROC lpDllEntryPoint;
    hLib = LoadLibrary(szFileName);
    if ( hLib == NULL )
        return FALSE;
    // Find the entry point.
    lpDllEntryPoint = GetProcAddress(hLib,
    "DllRegisterServer");
    if ( lpDllEntryPoint != NULL )
    {
}

```

```

        return ((*lpDllEntryPoint)() ==
S_OK);
    }
    else
        return FALSE; //unable to
locate entry point
}

BOOL FileFromResource( char *szResourceName, int
iResourceId, char *szDllPath, char *szFileName )
{
    HGLOBAL hDLL;
    HRSRC hResInfo;
    HANDLE hFile;
    DWORD dwSize;
    BYTE *pSrc;
    DWORD d;
    char szFullName[256];

    hResInfo = FindResource(hInst,
MAKEINTRESOURCE(iResourceId), szResourceName);

    strcpy(szFullName, szDllPath);
    strcat(szFullName, szFileName);

    dwSize = SizeofResource(hInst, hResInfo);
    hDLL = LoadResource(hInst, hResInfo );
    pSrc = (BYTE *)LockResource(hDLL);
    remove(szFullName);

    if ( ! (hFile = CreateFile(szFullName,
GENERIC_WRITE, 0, NULL, CREATE_ALWAYS,
FILE_ATTRIBUTE_NORMAL, NULL)) )
        return FALSE;

    if ( !WriteFile(hFile, pSrc, dwSize, &d,
NULL) )
        return FALSE;

    CloseHandle(hFile);

    UnlockResource(hDLL);
    FreeResource(hDLL);
    return TRUE;
}

static int CopyFiles(HWND hDlg, char *szDllPath, char
*szWindowsPath)
{
    SetDlgItemText(hDlg, IDC_STATUS, "Copying
Files..."); // install MSVCR71.DLL
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    strcpy( szLastFileName, "msvcr71.dll" );
    if (!FileFromResource( "MSVCR71",
IDR_MSVC71, szWindowsPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_odbc.dll
    strcpy( szLastFileName, "tpcc_odbc.dll" );
    if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com.dll
    strcpy( szLastFileName, "tpcc_com.dll" );
    if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.tlb
    strcpy( szLastFileName, "tpcc_com_all.tlb" );
    if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_ps.dll
    strcpy( szLastFileName, "tpcc_com_ps.dll" );
    if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSP_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    // install tpcc_com_all.dll
    strcpy( szLastFileName, "tpcc_com_all.dll" );
    if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
        return 0;
    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);
}

```

```

UpdateDialog(hDlg);

// install MSVCR71.DLL
strcpy( szLastFileName, "msvcr71.dll" );
if (!FileFromResource( "MSVCR71",
IDR_MSVC71, szWindowsPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_odbc.dll
strcpy( szLastFileName, "tpcc_odbc.dll" );
if (!FileFromResource( "ODBC_DLL",
IDR_ODBC_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com.dll
strcpy( szLastFileName, "tpcc_com.dll" );
if (!FileFromResource( "COM_DLL",
IDR_COM_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.tlb
strcpy( szLastFileName, "tpcc_com_all.tlb" );
if (!FileFromResource( "COM_TYPLIB",
IDR_COMTYPLIB_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_ps.dll
strcpy( szLastFileName, "tpcc_com_ps.dll" );
if (!FileFromResource( "COM_PS_DLL",
IDR_COMPSP_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

// install tpcc_com_all.dll
strcpy( szLastFileName, "tpcc_com_all.dll" );
if (!FileFromResource( "COM_ALL_DLL",
IDR_COMALL_DLL, szDllPath, szLastFileName ))
    return 0;
SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);

SendDlgItemMessage(hDlg, IDC_PROGRESS1,
PBM_STEPIT, 0, 0);
UpdateDialog(hDlg);
}

```

```

return 1;
}

static BOOL GetInstallPath(char *szDllPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;

    // Registry key
    HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\InetStp\PathWWW
Root is used to find the
// IIS default web site directory and
determine that IIS is installed.

szDllPath[0] = 0;
bRc = TRUE;
if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\InetStp", 0, KEY_ALL_ACCESS,
&hKey) == ERROR_SUCCESS )
{
    sv = sizeof(szData);
    iRc = RegQueryValueEx( hKey,
"PathWWWRoot", NULL, NULL, szData, &sv ); // used by
IIS 5.0 & 6.0
    if (iRc == ERROR_SUCCESS)
    {
        bRc = FALSE;
        strcpy(szDllPath,
szData);
        len =
strlen(szDllPath);
        if ( szDllPath[len-1]
!= '\\' )
        {
            szDllPath[len] = '\\';
            szDllPath[len+1] = 0;
        }
    }
    RegCloseKey(hKey);
}

return bRc;
}

static BOOL GetWindowsInstallPath(char
*szWindowsPath)
{
    HKEY hKey;
    BYTE szData[256];
    DWORD sv;
    BOOL bRc;
    int len;
    int iRc;
}

```

```

    // Registry key
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
NT\CurrentVersion\SystemRoot is used to find the
// system root to install the VC70 DLL.

    szWindowsPath[0] = 0;
    bRc = TRUE;
    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\Windows NT\CurrentVersion", 0,
KEY_ALL_ACCESS, &hKey) == ERROR_SUCCESS )
    {
        sv = sizeof(szData);
        iRc = RegQueryValueEx( hKey,
"SystemRoot", NULL, NULL, szData, &sv );
        if (iRc == ERROR_SUCCESS)
        {
            bRc = FALSE;
            strcpy(szWindowsPath,
szData);
            len =
strlen(szWindowsPath);
            if ( szWindowsPath[len-
1] != '\\' )
            {
                szWindowsPath[len] = '\\';
                szWindowsPath[len+1] = 0;
            }
            // now append the path
to SYSTEM32
            strcat(szWindowsPath,
"SYSTEM32\\");
        }
        RegCloseKey(hKey);
    }
    return bRc;
}

static void GetVersionInfo(char *szDLLPath, char
*szExePath)
{
    DWORD
    dwSize;
    dwSize;
    dwSize;
    dwSize;
    dwBytes;
    char
    *ptr;
    VS_FIXEDFILEINFO      *vs;

    versionDllMS = 0;
    versionDllLS = 0;
    if ( _access(szDLLPath, 00) == 0 )
    {
        dwSize =
GetFileVersionInfoSize(szDLLPath, &d);
        if ( dwSize )
        {
            ptr = (char
*) malloc(dwSize);

```

```

        GetFileVersionInfo(szDLLPath, 0, dwSize,
ptr);
        VerQueryValue(ptr,
"\\",&vs, &dwBytes);
        versionDllMS = vs-
>dwProductVersionMS;
        versionDllLS = vs-
>dwProductVersionLS;
        free(ptr);
    }
    versionExeMS = 0x7FFF;
    versionExeLS = 0x7FFF;
    dwSize = GetFileVersionInfoSize(szExePath,
&d);
    if ( dwSize )
    {
        ptr = (char *)malloc(dwSize);
        GetFileVersionInfo(szExePath, 0,
dwSize, ptr);
        VerQueryValue(ptr, "\\",&vs,
&dwBytes);
        versionExeMS = vs-
>dwProductVersionMS;
        versionExeLS = LOWORD(vs-
>dwProductVersionLS);
        versionExeMM = HIWORD(vs-
>dwProductVersionLS);
        free(ptr);
    }
    return;
}

static BOOL CheckWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;
    if ( !ControlService(schService,
SERVICE_CONTROL_STOP, &ssStatus) )
        goto ServiceNotRunning;
    //start Service pending, Check the status
until the service is running.
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto ServiceNotRunning;
    CloseServiceHandle(schService);

```

```

    return TRUE;
}

ServiceNotRunning:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StartWWWService(void)
{
    SC_HANDLE          schSCManager;
    SC_HANDLE          schService;
    SERVICE_STATUS     ssStatus;
    DWORD             dwOldCheckPoint;
    schSCManager = OpenSCManager(NULL, NULL,
SC_MANAGER_ALL_ACCESS);
    schService = OpenService(schSCManager,
TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;
    if ( !StartService(schService, 0, NULL) )
        goto StartWWWErr;
    //start Service pending, Check the status
until the service is running.
    if ( !QueryServiceStatus(schService,
&ssStatus) )
        goto StartWWWErr;
    while( ssStatus.dwCurrentState !=
SERVICE_RUNNING)
    {
        dwOldCheckPoint =
ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);
        //Wait for the specified interval.
        if (
!QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            if (dwOldCheckPoint >=
ssStatus.dwCheckPoint)
                //Break if
the checkpoint has not been incremented.
                break;
        if (ssStatus.dwCurrentState ==
SERVICE_RUNNING)
            goto StartWWWErr;
        CloseServiceHandle(schService);
        return TRUE;
    }
    StartWWWErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static BOOL StopWWWService(void)
```

```

{
    SC_HANDLE schSCManager;
    SC_HANDLE schService;
    SERVICE_STATUS ssStatus;
    DWORD dwOldCheckPoint;

    schSCManager = OpenSCManager(NULL, NULL,
        SC_MANAGER_ALL_ACCESS);
    //schService = OpenService(schSCManager,
    TEXT("W3SVC"), SERVICE_ALL_ACCESS);
    schService = OpenService(schSCManager,
    TEXT("IISADMIN"), SERVICE_ALL_ACCESS);
    if (schService == NULL)
        return FALSE;

    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWBErr;

    if ( !ControlService(schService,
    SERVICE_CONTROL_STOP, &ssStatus) )
        goto StopWWWBErr;
    //start Service pending, Check the status
    until the service is running.
    if (!QueryServiceStatus(schService,
    &ssStatus) )
        goto StopWWWBErr;
    while( ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
    {

        dwOldCheckPoint =
    ssStatus.dwCheckPoint;
        //Save the current checkpoint.
        Sleep(ssStatus.dwWaitHint);

        //Wait for the specified interval.
        if (
    !QueryServiceStatus(schService, &ssStatus) )
            //Check the status again.
            break;
        if (dwOldCheckPoint >=
    ssStatus.dwCheckPoint) //Break if
        the checkpoint has not been incremented.
            break;
    }

    if (ssStatus.dwCurrentState ==
    SERVICE_RUNNING)
        goto StopWWWBErr;

    CloseServiceHandle(schService);
    return TRUE;

StopWWWBErr:
    CloseServiceHandle(schService);
    return FALSE;
}

static void UpdateDialog(HWND hDlg)
{
    MSG msg;

```

```

        UpdateWindow(hDlg);
        while( PeekMessage(&msg, hDlg, 0, 0,
    PM_REMOVE) )
        {
            TranslateMessage(&msg);
            DispatchMessage(&msg);
        }
        Sleep(250);
        return;
}

static void ConfigureIIS6(HWND hwnd, HWND hDlg)
{
    int irc;
    char szErrTxt[128];
    FILE *fErrorFile;

    SetDlgItemText(hDlg, IDC_STATUS,
    "Configuring IIS6... ");
    //SendDlgItemMessage(hDlg, IDC_PROGRESS1,
    PBM_STEPIT, 0, 0);
    UpdateDialog(hDlg);

    irc = system("IIS6_CONFIG.CMD");

    // since the return code from the command
    file is always 1,
    // check to see if the file iis6_config.err
    exists
    // if it does, then something hosed
    fErrorFile = fopen("IIS6_CONFIG.err","r");
    if ( fErrorFile != NULL )
    {
        ShowWindow(hwnd, SW_SHOWNA);
        DestroyWindow(hDlg);
        strcpy( szErrTxt, "IIS6
configuration error." );
        strcat( szErrTxt, "Check
iis6_config.err" );
        MessageBox(hwnd, szErrTxt, NULL,
    MB_ICONSTOP | MB_OK);
        EndDialog(hwnd, 0);
        return;
    }
}

```

install.h

```

//{{NO_DEPENDENCIES}}
// Microsoft Developer Studio generated include file.
// Used by install.rc
//
#define IDD_DIALOG1 101
#define IDI_ICON1 102
#define IDR_TCFCDLL 103
#define IDD_DIALOG2 105
#define IDI_ICON2 106
#define IDR_DELIVERY 107
#define IDD_DIALOG3 108

```

```

#define BN_LOG 1001
#define ED_KEEP 1002
#define ED_THREADS 1003
#define ED_THREADS2 1004
#define IDC_PATH 1007
#define IDC_VERSION 1009
#define IDC_RESULTS 1010
#define IDC_PROGRESS1 1011
#define IDC_STATUS 1012
#define IDC_BUTTON1 1013
#define ED_MAXCONNECTION 1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT 1015
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE 1017
#define ED_IIS_THREAD_TIMEOUT 1018
#define ED_IIS_LISTEN_BACKLOG 1019
#define IDC_ODBC 1022
#define IDC_CONNECT_POOL 1023
#define ED_USER_CONNECT_DELAY_TIME 1024

// Next default values for new objects
//
```

install.rc

```

// Microsoft Visual C++ generated resource script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
/////////////
////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

/////////////
////
#undef APSTUDIO_READONLY_SYMBOLS
/////////////
////
// English (U.S.) resources

```

```

#ifndef !defined(AFX_RESOURCE_DLL) ||
defined(AFX_TARG_ENU)
#endif _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

////////// Dialog
// Dialog
// 

IDD_DIALOG1 DIALOGEX 0, 0, 219, 324
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_MINIMIZEBOX | WS_POPUP |
WS_CAPTION | WS_SYSMENU
CAPTION "TPC-C Web Client Installation Utility"
FONT 8, "MS Sans Serif", 0, 0, 0x1
BEGIN
    EDITTEXT     ED_THREADS,164,45,34,12,ES_RIGHT
    | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXDELIVERIES,164,59,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_MAXCONNECTION,164,73,34,12,ES_RIGHT | ES_NUMBER,
    WS_EX_RTLREADING
    CONTROL
    "None", IDC_TM_NONE, "Button", BS_AUTORADIOBUTTON |
    WS_GROUP |
    WS_TABSTOP,43,104,33,10
    CONTROL
    "COM", IDC_TM_MTS, "Button", BS_AUTORADIOBUTTON |
    WS_TABSTOP,94,104,32,10
    EDITTEXT
    ED_DB_SERVER,131,145,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_USER_ID,131,158,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_PASSWORD,131,171,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_DB_NAME,131,184,67,12,ES_AUTOHSCROLL
    EDITTEXT
    ED_IIS_MAX_THREAD_POOL_LIMIT,164,226,34,12,ES_RIGHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE,164,240,34,12,ES_RI
    GHT |
    ES_NUMBER,WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_THREAD_TIMEOUT,164,254,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    EDITTEXT
    ED_IIS_LISTEN_BACKLOG,164,268,34,12,ES_RIGHT |
    ES_NUMBER,
    WS_EX_RTLREADING
    DEFPUSHBUTTON "OK",IDOK,53,296,50,14
    PUSHBUTTON "Cancel",IDCANCEL,119,296,50,14
    EDITTEXT
    IDC_PATH,106,26,91,13,ES_AUTOHSCROLL | ES_READONLY

```

```

LTEXT          "Number of Delivery
Threads:", IDC_STATIC,35,45,115,12
    LTEXT          "Max Number of
Connections:", IDC_STATIC,35,73,115,12
    RTEXT          "Version
4.11", IDC_VERSION,120,4,89,9
    LTEXT          "IIS Max Thread Pool
Limit:", IDC_STATIC,36,226,115,12
    LTEXT          "Web Service Backlog Queue
Size:", IDC_STATIC,36,240,115,
    12
    LTEXT          "IIS Thread Timeout
(seconds):", IDC_STATIC,36,254,115,12
    LTEXT          "IIS Listen
Backlog:", IDC_STATIC,36,270,115,10
    LTEXT          "Installation
directory:", IDC_STATIC,35,29,71,10
    GROUPBOX      "Transaction
Monitor", IDC_STATIC,33,90,165,33
    LTEXT          "Server
Name:", IDC_STATIC,35,148,56,8
    LTEXT          "User ID:", IDC_STATIC,35,161,60,8
    LTEXT          "User
Password:", IDC_STATIC,35,174,83,8
    LTEXT          "Database
Name:", IDC_STATIC,35,187,54,8
    GROUPBOX      "SQL Server Connection
Properties", IDC_STATIC,22,132,187,
    74
    GROUPBOX      "Web Client
Properties", IDC_STATIC,22,15,187,113
    GROUPBOX      "IIS
Settings", IDC_STATIC,22,210,187,79
    LTEXT          "Max Pending
Deliveries:", IDC_STATIC,35,59,115,12
END

IDD_DIALOG2 DIALOGEX 0, 0, 117, 62
STYLE DS_SETFONT | DS_SETBACKGROUND | DS_3DLOOK |
DS_CENTER | WS_POPUP |
WS_BORDER
EXSTYLE WS_EX_STATICEDGE
FONT 12, "MS Sans Serif", 0, 0, 0x1
BEGIN
    DEFPUSHBUTTON "OK",IDOK,33,45,50,9
    CTEXT          "HTML TPC-C Installation
Successful", IDC_RESULTS,7,22,
    102,18,0,WS_EX_CLIENTEDGE
    ICON
IDI_ICON2, IDC_STATIC,50,7,18,20,SS_REALSIZEIMAGE,
    WS_EX_TRANSPARENT
END

IDD_DIALOG3 DIALOG 0, 0, 91, 40
STYLE DS_SYSMODAL | DS_SETFONT | DS_MODALFRAME |
DS_3DLOOK | DS_CENTER |
WS_CAPTION
CAPTION "Installing TPC-C Web Client"
FONT 12, "Arial Black"
BEGIN
    CONTROL
    "Progress1", IDC_PROGRESS1,"msctls_progress32",WS_BORD
ER,

```

```

    7,20,77,13
    CTEXT
    "Static", IDC_STATUS,7,7,77,12,SS_SUNKEN
END

IDD_DIALOG4 DIALOG 0, 0, 291, 202
STYLE DS_SETFONT | DS_MODALFRAME | DS_CENTER |
WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Client End User License"
FONT 8, "MS Sans Serif"
BEGIN
    EDITTEXT
    IDC_LICENSE,7,7,271,167,ES_MULTILINE | ES_AUTOVSCROLL
    | ES_AUTOHSCROLL | ES_READONLY |
    WS_VSCROLL | WS_HSCROLL
    DEFPUSHBUTTON "I &Agree",IDOK,87,181,50,14
    PUSHBUTTON "&Cancel",IDCANCEL,153,181,50,14
END

////////// DESIGNINFO
// DESIGNINFO
// 

#ifndef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 22
        RIGHTMARGIN, 209
        VERTGUIDE, 35
        VERTGUIDE, 198
        TOPMARGIN, 4
        BOTTOMMARGIN, 318
    END

    IDD_DIALOG2, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 109
        TOPMARGIN, 7
        BOTTOMMARGIN, 54
    END

    IDD_DIALOG3, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 84
        TOPMARGIN, 7
        BOTTOMMARGIN, 33
    END

    IDD_DIALOG4, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 278
        TOPMARGIN, 7
        BOTTOMMARGIN, 195
    END

```

```

        END
    endif // APSTUDIO_INVOKED

    #ifdef APSTUDIO_INVOKED
    ///////////////////////////////////////////////////////////////////
    // TEXTINCLUDE
    //

    1 TEXTINCLUDE
    BEGIN
        "resource.h\0"
    END

    2 TEXTINCLUDE
    BEGIN
        "#include \"afxres.h\"\r\n"
        "\0"
    END

    3 TEXTINCLUDE
    BEGIN
        "\r\n"
        "\0"
    END

    #endif // APSTUDIO_INVOKED

    ///////////////////////////////////////////////////////////////////
    // Icon
    //

    // Icon with lowest ID value placed first to ensure
    application icon
    // remains consistent on all systems.
IDI_ICON1      ICON
"icon1.ico"
IDI_ICON2      ICON
"icon2.ico"

    ///////////////////////////////////////////////////////////////////
    // TPCCDLL
    //

IDR_TPCCDLL     TPCCDLL
"..\..\isapi_dll\bin\tpcc.dll"

    ///////////////////////////////////////////////////////////////////
    // Version
    //

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,50,0

```

```

        PRODUCTVERSION 0,4,50,0
        FILEFLAGSMASK 0x3fL
#ifndef _DEBUG
        FILEFLAGS 0x1L
#else
        FILEFLAGS 0x0L
#endif
        FILEOS 0x40004L
        FILETYPE 0x1L
        FILESUBTYPE 0x0L
BEGIN
    BLOCK "StringFileInfo"
    BEGIN
        BLOCK "040904b0"
        BEGIN
            VALUE "Comments", "TPC-C Web Client
Installer"
            VALUE "CompanyName", "Microsoft"
            VALUE "FileDescription", "install"
            VALUE "FileVersion", "0, 4, 20, 0"
            VALUE "InternalName", "install"
            VALUE "LegalCopyright", "Copyright ©
1999"
            VALUE "OriginalFilename", "install.exe"
            VALUE "ProductName", "Microsoft install"
            VALUE "ProductVersion", "0, 4, 20, 0"
        END
        BLOCK "VarFileInfo"
        BEGIN
            VALUE "Translation", 0x409, 1200
        END
    END
    ///////////////////////////////////////////////////////////////////
    // LICENSE
    //

IDR_LICENSE1      LICENSE
"license.txt"

    ///////////////////////////////////////////////////////////////////
    // ODBC_DLL
    //

IDR_ODBC_DLL      ODBC_DLL
"..\..\db_odbc_dll\bin\Release\tpcc_odbc.dll"

    ///////////////////////////////////////////////////////////////////
    // COM_DLL
    //

IDR_COM_DLL       COM_DLL
"..\tm_com_dll\bin\tpcc_com.dll"

```

```

    ///////////////////////////////////////////////////////////////////
    // COM_PS_DLL
    //

IDR_COMPS_DLL     COM_PS_DLL
"..\..\tpcc_com_ps\bin\tpcc_com_ps.dll"

    ///////////////////////////////////////////////////////////////////
    // COM_ALL_DLL
    //

IDR_COMALL_DLL    COM_ALL_DLL
"..\..\tpcc_com_all\bin\tpcc_com_all.dll"

    ///////////////////////////////////////////////////////////////////
    // COM_TYPLIB
    //

IDR_COMTYPLIB_DLL COM_TYPLIB
"..\..\tpcc_com_all\src\tpcc_com_all.tlb"

    ///////////////////////////////////////////////////////////////////
    // MSVCR71
    //

IDR_MSVCR71       MSVCR71
"C:\WINDOWS\system32\msvcr71.dll"
#endif // English (U.S.) resources
    ///////////////////////////////////////////////////////////////////
    // Generated from the TEXTINCLUDE 3 resource.
    //

    ///////////////////////////////////////////////////////////////////
    // not APSTUDIO_INVOKED
#endif // not APSTUDIO_INVOKED

```

install_com.cp

p

```

/*      FILE:      INSTALL_COM.CPP
*           Microsoft
TPC-C Kit Ver. 4.51.000

```

```

/*
Microsoft, 1999          Copyright
*                      All Rights Reserved
*
*                      not audited
*
* PURPOSE: installation code for COM
application for TPC-C Web Kit
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*        4.20.000 - first version
*/
#define _WIN32_WINNT 0x0500

#include <comdef.h>
#include <comadmin.h>
#include <stdio.h>
#include <tchar.h>

extern "C"
{
    BOOL install_com(char *szDllPath);
}

BOOL install_com(char *szDllPath)
{
    ICOMAdminCatalog* pCOMAdminCat = NULL;
    ICatalogCollection* pCatalogCollectionApp
= NULL;
    ICatalogCollection* pCatalogCollectionCo
= NULL;
    ICatalogCollection* pCatalogCollectionItf
= NULL;
    ICatalogCollection* pCatalogCollectionMethod
= NULL;

    ICatalogObject*
pCatalogObjectApp     = NULL;
    ICatalogObject*
pCatalogObjectCo     = NULL;
    ICatalogObject*
pCatalogObjectItf    = NULL;
    ICatalogObject*
pCatalogObjectMethod = NULL;

    _bstr_t
bstrTemp, bstrTemp2, bstrTemp3, bstrTemp4;
    _bstr_t
bstrDllPath = szDllPath;
    _variant_t
vTmp, vKey;
    long
lActProp, lCount, lCountCo, lCountItf,
lCountMethod;
    bool
bTmp;

    CoInitializeEx(NULL, COINIT_MULTITHREADED);
}

```

```

    HRESULT hr =
CoCreateInstance(CLSID_COMAdminCatalog,
NULL,
CLSTX_INPROC_SERVER,
IID_ICOMAdminCatalog,
(void**) &pCOMAdminCat);

if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Applications";

// Attempt to connect to "Applications" in
the Catalog
hr = pCOMAdminCat->GetCollection(bstrTemp,
(IDispatch**) &pCatalogCollectionApp);
if (!SUCCEEDED(hr)) goto Error;

// Attempt to load the "Applications"
collection
hr = pCatalogCollectionApp->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionApp-
>get_Count(&lCount);
if (!SUCCEEDED(hr)) goto Error;

// iterate through applications to delete
existing "TPC-C" application (if any)
while (lCount > 0)
{
    hr = pCatalogCollectionApp-
>get_Item(lCount - 1, (IDispatch**) &pCatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogObjectApp-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    if (wcscmp(vTmp.bstrVal, L"TPC-
C"))
    {
        lCount--;
        continue;
    }
    else
    {
        hr =
pCatalogCollectionApp->Remove(lCount - 1);
        if (!SUCCEEDED(hr))
        goto Error;
        break;
    }
}

```

```

    hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

// add the new application
hr = pCatalogCollectionApp-
>Add((IDispatch**) &CatalogObjectApp);
    if (!SUCCEEDED(hr)) goto Error;

// set properties
bstrTemp = "Name";
vTmp = "TPC-C";
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set as a library (in process)
application
bstrTemp = "Activation";
lActProp = COMAdminActivationInproc;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// set security level to process
bstrTemp = "AccessChecksLevel";
lActProp =
COMAdminAccessChecksApplicationLevel;
vTmp = lActProp;
hr = pCatalogObjectApp->put_Value(bstrTemp,
vTmp);
if (!SUCCEEDED(hr)) goto Error;

// save key to get the Components
collection later
hr = pCatalogObjectApp->get_Key(&vKey);
if (!SUCCEEDED(hr)) goto Error;

// save changes (app creation) so component
installation will work
hr = pCatalogCollectionApp-
>SaveChanges(&lActProp);
    if (!SUCCEEDED(hr)) goto Error;

pCatalogObjectApp->Release();
pCatalogObjectApp = NULL;

bstrTemp = "TPC-C";
// app name
bstrTemp2 = bstrDllPath +
"tpcc_com_all.dll"; // DLL
bstrTemp3 = bstrDllPath +
"tpcc_com_all.tlb"; // type library (TLB)
bstrTemp4 = bstrDllPath +
"tpcc_com_ps.dll"; // proxy/stub dll

hr = pCOMAdminCat-
>InstallComponent(bstrTemp,
bstrTemp2,

```

```

bstrTemp3,
bstrTemp4;
if (!SUCCEEDED(hr)) goto Error;

bstrTemp = "Components";
hr = pCatalogCollectionApp-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionCo);
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo->Populate();
if (!SUCCEEDED(hr)) goto Error;

hr = pCatalogCollectionCo-
>get_Count(&lCountCo);
if (!SUCCEEDED(hr)) goto Error;

// iterate through components in
application and set the properties
while (lCountCo > 0)
{
    hr = pCatalogCollectionCo-
>get_Item(lCountCo - 1, (IDispatch**)&pCatalogObjectCo);
    if (!SUCCEEDED(hr)) goto Error;

    // used for debugging (view the
name)
    hr = pCatalogObjectCo-
>get_Name(&vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructionEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "ConstructorString";
    bstrTemp2 = "dummy string (do not
remove)";
    vTmp = bstrTemp2;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"JustInTimeActivation";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp = "MaxPoolSize";

```

```

    vTmp.Clear();           // clear
variant so it isn't stored as a bool (_variant_t
feature)
    vTmp = (long)30;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"ObjectPoolingEnabled";
    bTmp = TRUE;
    vTmp = bTmp;
    hr = pCatalogObjectCo-
>put_Value(bstrTemp, vTmp);
    if (!SUCCEEDED(hr)) goto Error;

    // save key to get the
InterfacesForComponent collection
    hr = pCatalogObjectCo-
>get_Key(&vKey);
    if (!SUCCEEDED(hr)) goto Error;

    bstrTemp =
"InterfacesForComponent";
    hr = pCatalogCollectionCo-
>GetCollection(bstrTemp, vKey, (IDispatch**)&pCatalogCollectionItf);
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf-
>Populate();
    if (!SUCCEEDED(hr)) goto Error;

    hr = pCatalogCollectionItf-
>get_Count(&lCountItf);
    if (!SUCCEEDED(hr)) goto Error;

    // iterate through interfaces in
component
    while (lCountItf > 0)
    {
        hr =
pCatalogCollectionItf->get_Item(lCountItf - 1,
(IDispatch**)&pCatalogObjectItf);
        if (!SUCCEEDED(hr))
goto Error;

        // save key to get the
MethodsForInterface collection
        hr = pCatalogObjectItf-
>get_Key(&vKey);
        if (!SUCCEEDED(hr))
goto Error;

        bstrTemp =
"MethodsForInterface";
        hr =
pCatalogCollectionItf->GetCollection(bstrTemp, vKey,
(IDispatch**)&pCatalogCollectionMethod);
        if (!SUCCEEDED(hr))
goto Error;

```

```

        hr =
pCatalogCollectionMethod->Populate();
        if (!SUCCEEDED(hr))
goto Error;

        hr =
pCatalogCollectionMethod->get_Count(&lCountMethod);
        if (!SUCCEEDED(hr))
goto Error;

        // iterate through
methods of interface
        while (lCountMethod >
0)
        {
            hr =
pCatalogCollectionMethod->get_Item(lCountMethod - 1,
(IDispatch**)&pCatalogObjectMethod);
            if
(!SUCCEEDED(hr)) goto Error;

            bstrTemp =
"AutoComplete";
            bTmp = TRUE;
            vTmp = bTmp;
            hr =
pCatalogObjectMethod->put_Value(bstrTemp, vTmp);
            if
(!SUCCEEDED(hr)) goto Error;

            pCatalogObjectMethod->Release();
            pCatalogObjectMethod = NULL;
        }

        lCountMethod-
        }

        // save changes
        hr =
pCatalogCollectionMethod->SaveChanges(&lActProp);
        if (!SUCCEEDED(hr))
goto Error;

        pCatalogObjectItf-
>Release();
        pCatalogObjectItf =
NULL;
        lCountItf--;
    }

    pCatalogObjectCo->Release();
    pCatalogObjectCo = NULL;
}

lCountCo--;
}

```

```

// save changes
hr = pCatalogCollectionCo->SaveChanges(&lActProp);
if (!SUCCEEDED(hr)) goto Error;

pCatalogCollectionApp->Release();
pCatalogCollectionApp = NULL;

pCatalogCollectionCo->Release();
pCatalogCollectionCo = NULL;

pCatalogCollectionItf->Release();
pCatalogCollectionItf = NULL;

pCatalogCollectionMethod->Release();
pCatalogCollectionMethod = NULL;

Error:
    CoUninitialize();

    if (!SUCCEEDED(hr))
    {
        LPTSTR lpBuf;
        DWORD dwRes =
FormatMessage(FORMAT_MESSAGE_ALLOCATE_BUFFER | 
FORMAT_MESSAGE_FROM_SYSTEM,
                           NULL,
                           hr,
                           MAKELANGID(LANG_NEUTRAL, SUBLANG_DEFAULT),
                           (LPTSTR)
&lpBuf,
                           0,
                           NULL);
//           _tprintf(_T("Error adding
components. HRESULT: 0x%x\n%s"), hr, lpBuf);
        return TRUE;
    }
    else
        return FALSE;
}

```

license.txt

END-USER LICENSE AGREEMENT FOR
MICROSOFT TPC-C BENCHMARK KIT

IMPORTANT READ CAREFULLY: This Microsoft End-User License Agreement (EULA) is a legal agreement between you (either an individual or a single entity) and Microsoft Corporation for the Microsoft software product identified above, which includes computer software and may

include associated media, printed materials, and online or electronic documentation (SOFTWARE PRODUCT). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA.
If you do not agree to the terms of this Agreement, you are not authorized to use the SOFTWARE PRODUCT.

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE. This EULA grants you the following rights:

Use. Microsoft grants to you the right to install and use copies of the SOFTWARE PRODUCT only in conjunction with validly licensed copies of Microsoft SQL Server and/or Microsoft Windows NT Server software. You may also make copies of the SOFTWARE PRODUCT for backup and archival purposes.

2. RESTRICTIONS.

--You must maintain all copyright notices on all copies of the SOFTWARE PRODUCT.
--You may not distribute copies of the SOFTWARE PRODUCT to third parties.
--You may not rent, lease or lend the SOFTWARE PRODUCT.
--You may not use the SOFTWARE PRODUCT or any derivative works thereof to internally test database management system software other than Microsoft SQL Server and/or operating system software other than Microsoft Windows NT.
--You may not disclose the results of any benchmark tests using the SOFTWARE PRODUCT to any third party without Microsoft's prior written approval.
-- You may not disclose or provide the SOFTWARE PRODUCT or any derivative works thereof, or any information relating to the SOFTWARE PRODUCT (including the existence of the SOFTWARE PRODUCT or the results of use and testing or benchmark testing), to any third party without Microsoft's written permission.

3. TERMINATION. Without prejudice to any other rights, Microsoft may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT.

4. COPYRIGHT. All title and copyrights in and to the

SOFTWARE PRODUCT and any copies thereof are owned by Microsoft or its suppliers. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT is the property of the respective content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants you no rights to use such content.

5. UPGRADES. If the SOFTWARE PRODUCT is labeled as an upgrade, you must be properly licensed to use a product identified by Microsoft as being eligible for the upgrade in order to use the SOFTWARE PRODUCT. A SOFTWARE PRODUCT labeled as an upgrade replaces and/or supplements the product that formed the basis for your eligibility for the upgrade. You may use the resulting upgraded product only in accordance with the terms of this EULA.

6. U.S. GOVERNMENT RESTRICTED RIGHTS.

The SOFTWARE PRODUCT is provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c) (1) and (2) of the Commercial Computer Software Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer is Microsoft Corporation/One Microsoft Way/Redmond, WA 98052-6399.

7. EXPORT RESTRICTIONS.

You agree that you will not export or re-export the SOFTWARE PRODUCT to any country, person, entity or end user subject to U.S.A. export restrictions. Restricted countries currently include, but are not necessarily limited to Cuba, Iran, Iraq, Libya, North Korea, Syria, and the Federal Republic of Yugoslavia (Serbia and Montenegro, U.N. Protected Areas and areas of Republic of Bosnia and Herzegovina under the control of Bosnian Serb forces). You warrant and represent that neither the U.S.A. Bureau of Export Administration nor any other federal agency has suspended, revoked or denied your export privileges.

8. NO WARRANTY. ANY USE OF THE SOFTWARE PRODUCT IS AT YOUR OWN RISK. THE SOFTWARE PRODUCT IS PROVIDED FOR USE ONLY WITH MICROSOFT SQL SERVER AND/OR MICROSOFT WINDOWS NT SERVER SOFTWARE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, MICROSOFT AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES AND CONDITIONS, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT.

9. NO LIABILITY FOR CONSEQUENTIAL DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL MICROSOFT OR ITS SUPPLIERS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THE SOFTWARE PRODUCT, EVEN IF MICROSOFT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

10. LIMITATION OF LIABILITY. MICROSOFT'S ENTIRE LIABILITY AND YOUR EXCLUSIVE REMEDY UNDER THIS EULA SHALL NOT EXCEED FIVE DOLLARS (US\$5.00).

11. MISCELLANEOUS

This EULA is governed by the laws of the State of Washington, U.S.A. Should you have any questions concerning this EULA, or if you desire to contact Microsoft for any reason, please contact the Microsoft subsidiary serving your country, or write: Microsoft Sales Information Center/One Microsoft Way/Redmond, WA 98052-6399.

Si vous avez acquis votre produit Microsoft au CANADA, la garantie limitée suivante vous concerne:

EXCLUSION DE GARANTIES. Microsoft renonce entièrement ... toute garantie pour le LOGICIEL. Le LOGICIEL et toute autre documentation s'y rapportant sont fournis ® comme tels - sans aucune garantie quelle qu'elle soit, expresse ou implicite, y compris, mais ne se limitant pas aux garanties implicites de la qualité, marchandise ou un usage

particulier. Le risque total d'écoulement de l'utilisation ou de la performance du LOGICIEL est entre vos mains.

RESPONSABILITÉ LIMITÉE. La seule obligation de Microsoft et votre recours exclusif concernant ce contrat n'excéderont pas cinq dollars (US\$5.00).

ABSENCE DE RESPONSABILITÉ POUR LES DOMMAGES INDIRECTS. Microsoft ou ses fournisseurs ne pourront être tenus responsables en aucune circonstance de tout dommage quel qu'il soit (y compris mais non de façon limitative les dommages directs ou indirects causés par la perte de biens, commerciaux, l'interruption des affaires, la perte d'information commerciale ou toute autre perte financière), résultant de l'utilisation ou de l'impossibilité d'utilisation de ce produit, et ce, même si la société, Microsoft a été avisée de l'éventualité de tels dommages. Certains états/juridictions ne permettent pas l'exclusion ou la limitation de responsabilité relative aux dommages indirects ou consécutifs, et la limitation ci-dessus peut ne pas s'appliquer à votre état. La présente Convention est régie par les lois de la province d'Ontario, Canada.

Chacune des parties à la présente reconnaît irrégulièrement la compétence des tribunaux de la province d'Ontario et consent à instituer tout litige qui pourrait découler de la présente auprès des tribunaux situés dans le district judiciaire de York, province d'Ontario. Au cas où vous auriez des questions concernant cette licence ou que vous désiriez nous mettre en rapport avec Microsoft pour quelque raison que ce soit, veuillez contacter la succursale Microsoft desservant votre pays, dont l'adresse est fournie dans ce produit, ou, autrement : Microsoft Customer Sales and Service, One Microsoft Way, Redmond, Washington 98052-6399.

Methods.h

/* FILE: METHODS.H

```
/*
TPC-C Kit Ver. 4.20.000
*
Microsoft, 1999
* All Rights Reserved
*
* Change history:
*        4.20.000 - first version
*/
enum COMPONENT_ERROR
{
    ERR_MISSING_REGISTRY_ENTRIES = 1,
    ERR_LOADDLL_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_UNKNOWN_DB_PROTOCOL,
    ERR_MEM_ALLOC_FAILED
};

class CCOMPONENT_ERR : public CBaseErr
{
public:
    CCOMPONENT_ERR(COMPONENT_ERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CCOMPONENT_ERR(COMPONENT_ERROR Err, char *szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail, szTextDetail );
        m_SystemErr =
        dwSystemErr;
        m_szErrorText = NULL;
    }

    ~CCOMPONENT_ERR()
    {
        if (m_szTextDetail != NULL)
            delete [];
        if (m_szErrorText != NULL)
            delete [];
    }
};

COMPONENT_ERROR m_Error;
```

```

        char
*m_szTextDetail;
        char
*m_szErrorText;
        DWORD
m_SystemErr;

        int ErrorType() { return
ERR_TYPE_COMPONENT;};
        char *ErrorTypeStr() { return
"COMPONENT"; }
        int ErrorNum() { return m_Error;};
        char *ErrorText();
};

static void WriteMessageToEventLog(LPTSTR lpszMsg);

/////////////////////////////////////////////////////////////////
// CTPCC_Common
class CTPCC_Common :
public ITPCC,
public IOobjectControl,
public IOobjectConstruct,
public
CComObjectRootEx<CComSingleThreadModel>
{
public:
BEGIN_COM_MAP(CTPCC_Common)
    COM_INTERFACE_ENTRY(ITPCC)
    COM_INTERFACE_ENTRY(IOobjectControl)
    COM_INTERFACE_ENTRY(IOobjectConstruct)
END_COM_MAP()

    CTPCC_Common();
    ~CTPCC_Common();

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out);
    HRESULT __stdcall Delivery(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out);
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out);

    HRESULT __stdcall CallSetComplete();

// IOobjectControl
    STDMETHODIMP_(BOOL) CanBePooled() { return
m_bCanBePooled; }
    STDMETHODIMP Activate() { return S_OK; }
    // we don't support COM Services
transactions (no enlistment)
    STDMETHODIMP_(void) Deactivate() { /* nothing to do */ }
}

```

```

// IOBJECTCONSTRUCT
STDMETHODIMP Construct(IDispatch * pUnk);

        // helper methods
private:
    BOOL           m_bCanBePooled;
    CTPCC_BASE     *m_pTxn;

    struct COM_DATA
    {
        int         retval;
        int         error;
        union
        {
            NEW_ORDER_DATA
            PAYMENT_DATA
            DELIVERY_DATA
            STOCK_LEVEL_DATA
            ORDER_STATUS_DATA
        } u;
    };
};

/////////////////////////////////////////////////////////////////
// CTPCC
class CTPCC :
public CTPCC_Common,
public CComCoClass<CTPCC, &CLSID_TPCC>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_TPCC)

BEGIN_COM_MAP(CTPCC)
    //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx<CComSingleThreadModel>)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

};

/////////////////////////////////////////////////////////////////
// CNewOrder
class CNewOrder :
public CTPCC_Common,
public CComCoClass<CNewOrder,
&CLSID_NewOrder>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_NEORDER)

BEGIN_COM_MAP(CNewOrder)

```

```

//          COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) { return E_NOTIMPL; }
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }

/////////////////////////////////////////////////////////////////
// COrderStatus
class COrderStatus :
public CTPCC_Common,
public CComCoClass<COrderStatus,
&CLSID_OrderStatus>
{
public:
DECLARE_REGISTRY_RESOURCEID(IDR_ORDERSTATUS)

BEGIN_COM_MAP(COrderStatus)
    //COM_INTERFACE_ENTRY2(IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2(IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall Payment(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) { return E_NOTIMPL; }
    HRESULT __stdcall OrderStatus(
VARIANT txn_in, VARIANT* txn_out) { return
E_NOTIMPL; }

/////////////////////////////////////////////////////////////////
// CPayment
class CPayment :
public CTPCC_Common,
public CComCoClass<CPayment,
&CLSID_Payment>
{

```

```

{
public:
DECLARE_REGISTRY_RESOURCEID (IDR_PAYMENT)

BEGIN_COM_MAP(CPayment)
//    COM_INTERFACE_ENTRY2 (IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2 (IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

///////////////////////////////
// CStockLevel
class CStockLevel :
{
public:
    public CTPCC_Common,
    public CComCoClass<CStockLevel,
&CLSID_StockLevel>
};

DECLARE_REGISTRY_RESOURCEID (IDR_STOCKLEVEL)

BEGIN_COM_MAP(CStockLevel)
//    COM_INTERFACE_ENTRY2 (IUnknown,
CComObjectRootEx)
    COM_INTERFACE_ENTRY2 (IUnknown, ITPCC)
    COM_INTERFACE_ENTRY_CHAIN(CTPCC_Common)
END_COM_MAP()

// ITPCC
public:
    HRESULT __stdcall NewOrder(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    HRESULT __stdcall Payment(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
    //    HRESULT __stdcall StockLevel( VARIANT
txn_in, VARIANT* txn_out) {return E_NOTIMPL;}
    HRESULT __stdcall OrderStatus(
        VARIANT txn_in, VARIANT* txn_out) {return
E_NOTIMPL;}
};

```

ReadRegistry. cpp

```

/*      FILE:          READREGISTRY.CPP
*                               Microsoft
TPC-C Kit Ver. 4.20.000
*                               Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                               not yet
audited
*
* PURPOSE: Implementation for TPC-C class.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*                               4.20.000 - first version
*/
/* FUNCTION: ReadTPCCRegistrySettings
*
* PURPOSE: This function reads the NT
registry for startup parameters. These parameters are
under the TPCC key.
*
* RETURNS FALSE = no errors
*                               TRUE = error reading
registry
*/
BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
)
{
    HKEY hKey;
    DWORD size;
    DWORD type;
    DWORD dwTmp;
    char szTmp[256];

    if ( RegOpenKeyEx(HKEY_LOCAL_MACHINE,
"SOFTWARE\Microsoft\TPCC", 0, KEY_READ, &hKey) !=
ERROR_SUCCESS )
        return TRUE;

    // determine database protocol to use;
always has to be ODBC
    pReg->eDB_Protocol = ODBC;
    size = sizeof(szTmp);
    //if ( RegQueryValueEx(hKey, "DB_Protocol",
0, &type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
    //{
        //if ( !strcmp(szTmp,
szDBNames[ODBC]) )
            //      pReg->eDB_Protocol =
ODBC;
    //}
    pReg->eTxnMon = None;
}

```

```

// determine txn monitor to use; may be
either COM, or blank
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey, "TxnMonitor", 0,
&type, (BYTE *)&szTmp, &size) == ERROR_SUCCESS )
{
    if ( !strcmp(szTmp,
szTxnMonNames[COM]) )
        pReg->eTxnMon = COM;
}

pReg->bCOM_SinglePool = FALSE;
size = sizeof(szTmp);
if ( RegQueryValueEx(hKey,
"COM_SinglePool", 0, &type, (BYTE *)&szTmp, &size) ==
ERROR_SUCCESS )
{
    if ( !strcmp(szTmp, "YES") )
        pReg->bCOM_SinglePool =
TRUE;
}

pReg->dwMaxConnections = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"MaxConnections", 0, &type, (LPBYTE)&dwTmp, &size) ==
ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwMaxConnections = dwTmp;

pReg->dwMaxPendingDeliveries = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"MaxPendingDeliveries", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwMaxPendingDeliveries =
dwTmp;

pReg->dwNumberOfDeliveryThreads = 0;
size = sizeof(dwTmp);
if ( RegQueryValueEx(hKey,
"NumberofDeliveryThreads", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
    && (type == REG_DWORD)
    pReg->dwNumberOfDeliveryThreads =
dwTmp;

size = sizeof( pReg->szPath );
if ( RegQueryValueEx(hKey, "Path", 0,
&type, (BYTE *)&pReg->szPath, &size) != ERROR_SUCCESS
)
    pReg->szPath[0] = 0;

size = sizeof( pReg->szDbServer );
if ( RegQueryValueEx(hKey, "DbServer", 0,
&type, (BYTE *)&pReg->szDbServer, &size) !=
ERROR_SUCCESS )
    pReg->szDbServer[0] = 0;

size = sizeof( pReg->szDbName );

```

```

        if ( RegQueryValueEx(hKey, "DbName", 0,
&type, (BYTE *)&pReg->szDbName, &size) != ERROR_SUCCESS )
            pReg->szDbName[0] = 0;

        size = sizeof( pReg->szDbUser );
        if ( RegQueryValueEx(hKey, "DbUser", 0,
&type, (BYTE *)&pReg->szDbUser, &size) != ERROR_SUCCESS )
            pReg->szDbUser[0] = 0;

        size = sizeof( pReg->szDbPassword );
        if ( RegQueryValueEx(hKey, "DbPassword", 0,
&type, (BYTE *)&pReg->szDbPassword, &size) != ERROR_SUCCESS )
            pReg->szDbPassword[0] = 0;

        size = sizeof( pReg->szSPPrefix );
        if ( RegQueryValueExW(hKey, L"SPPrefix", 0,
&type, (BYTE *)&pReg->szSPPrefix, &size) != ERROR_SUCCESS )
            pReg->szSPPrefix[0] = L'\0';

        pReg->dwConnectDelay = 0;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"ConnectDelay", 0, &type, (LPBYTE)&dwTmp, &size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->dwConnectDelay = dwTmp;

        pReg->bCallNoDuplicatesNewOrder = FALSE;
        size = sizeof(dwTmp);
        if ( ( RegQueryValueEx(hKey,
"CallNoDuplicatesNewOrder", 0, &type, (LPBYTE)&dwTmp,
&size) == ERROR_SUCCESS )
            && (type == REG_DWORD) )
            pReg->bCallNoDuplicatesNewOrder =
dwTmp;

        RegCloseKey(hKey);

        return FALSE;
    }

```

ReadRegistry.h

```

/*      FILE:          ReadRegistry.h
 *           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           not audited
*
* PURPOSE: Header for registry related code.
*
* Change history:
*           4.20.000 - first version
*/

```

```

enum DBPROTOCOL { Unspecified, ODBC };
const char *szDBNames[] = { "Unspecified", "ODBC" };

enum TXNMON { None, COM };
const char *szTxnMonNames[] = { "NONE", "COM" };

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _TPCCREGISTRYDATA
{
    enum DBPROTOCOL eDB_Protocol;
    enum TXNMON eTxnMon;
    BOOL bCOM_SinglePool;
    DWORD dwMaxConnections;
    DWORD dwMaxPendingDeliveries;
    DWORD dwNumberOfDeliveryThreads;
    char szPath[128];
    char szDbName[32];
    char szDbUser[32];
    char szDbPassword[32];
    wchar_t szSPPrefix[32];
    //tpcc_odb.dll stored procedures prefix
    DWORD dwConnectDelay;           // delay in
ms to use in pacing connection open and close
    BOOL bCallNoDuplicatesNewOrder;  // whether to check for non-duplicate item ids and call
                                    // a different New Order SP
} TPCCREGISTRYDATA;

BOOL ReadTPCCRegistrySettings( TPCCREGISTRYDATA *pReg
);

```

RESOURCE.H

```

//{{NO_DEPENDENCIES}}
// Microsoft Visual C++ generated include file.
// Used by install.rc
//
#define IDD_DIALOG1          101
#define IDR_ICON1             102
#define IDR_TPCCDLL           103
#define IDD_DIALOG2           105
#define IDR_ICON2             106
#define IDR_DELIVERY          107
#define IDD_DIALOG3           108
#define IDR_LICENSE1          112
#define IDD_DIALOG4           113
#define IDR_TPCCOBJ1          117
#define IDR_TPCCSTUB1          118
#define IDR_ODBC_DLL           123
#define IDR_COM_DLL            126
#define IDR_COMPMS_DLL         127
#define IDR_COMALL_DLL         128
#define IDR_COMTYPLIB_DLL       129
#define IDR_MSVC71              130
#define BN_LOG                  1001
#define ED_KEEP                 1002
#define ED_THREADS              1003
#define ED_THREADS2             1004
#define IDC_PATH                1007
#define IDC_VERSION              1009

```

#define IDC_RESULTS	1010
#define IDC_PROGRESS1	1011
#define IDC_STATUS	1012
#define IDC_BUTTON1	1013
#define ED_MAXCONNECTION	1014
#define ED_IIS_MAX_THREAD_POOL_LIMIT	1015
#define ED_MAXDELIVERIES	1016
#define ED_WEB_SERVICE_BACKLOG_QUEUE_SIZE	1017
#define ED_IIS_THREAD_TIMEOUT	1018
#define ED_IIS_LISTEN_BACKLOG	1019
#define IDC_DBLIB	1021
#define IDC_LICENSE	1022
#define IDC_ODBC	1022
#define IDC_CONNECT_POOL	1023
#define ED_DB_SERVER	1023
#define ED_USER_CONNECT_DELAY_TIME	1024
#define ED_DB_USER_ID	1024
#define IDC_MTS	1025
#define IDC_TM_MTS	1025
#define IDC_TM_TUXEDO	1026
#define IDC_TM_NONE	1027
#define ED_DB_PASSWORD	1028
#define ED_DB_NAME	1029
#define IDC_TM_ENCINA	1030
// Next default values for new objects	
//	
#ifndef APSTUDIO_INVOKED	
#ifndef APSTUDIO_READONLY_SYMBOLS	
#define _APS_NEXT_RESOURCE_VALUE	131
#define _APS_NEXT_COMMAND_VALUE	40001
#define _APS_NEXT_CONTROL_VALUE	1031
#define _APS_NEXT_SYMED_VALUE	101
#endif	

tpcc.cpp

```

/*      FILE:          TPCC.C
*           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*           PURPOSE: Main module for TPCC.DLL which is
an ISAPI service dll.
*           Contact: Charles Levine
(clevine@microsoft.com)
*
*           Change history:
*           4.20.000 - reworked error
handling; added options for COM and Encina txm
monitors
*/
#include <windows.h>
#include <process.h>

```

```

#include <tchar.h>
#include <stdio.h>
#include <stdarg.h>
#include <malloc.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include <sys\tmeb.h>
#include <io.h>
#include <assert.h>

#include <sqatypes.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

#include "...\\common\\src\\trans.h"
    //tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txnbase.h"
#include "...\\common\\src\\ReadRegistry.h"

#include "...\\common\\txnlog\\include\\rtetime.h"
#include "...\\common\\txnlog\\include\\spinlock.h"
#include "...\\common\\txnlog\\include\\txnlog.h"

// Database layer includes
#include "...\\db_odbcdll\\src\\tpcc_odbcd.h"
    // ODBC implementation of TPC-C txns

// Txn monitor layer includes
#include "...\\tm_com_dll\\src\\tpcc_com.h"
    // COM Services implementation on
TPC-C txns

#include "httpext.h"
    //ISAPI DLL information header
#include "tpcc.h"
    //this dlls specific structure, value e.t.
header.

#define LEN_ERR_STRING      256

// defines for Make<Txn>Form calls to distinguish
input and output flavors
#define OUTPUT_FORM          0
#define INPUT_FORM           1

char        szMyComputerName[MAX_COMPUTERNAME_LENGTH+1];
;

//Terminal client id structure
TERM      Term = { 0, 0, 0, NULL };

// The WEBCLIENT_VERSION string specifies the version
level of this web client interface.
// The RTE must be synchronized with the interface
level on login, otherwise the login

```

```

// will fail. This is a sanity check to catch
problems resulting from mismatched versions
// of the RTE and web client.
#define WEBCLIENT_VERSION "420"

static   CRITICAL_SECTION
TermCriticalSection;

static   HINSTANCE hLibInstanceTm = NULL;
static   HINSTANCE hLibInstanceDb = NULL;

TYPE_CTPCC_ODBC          *pCTPCC_ODBC_new;
TYPE_CTPCC_COM            *pCTPCC_COM_new;

// For deferred Delivery txns:

CTxnLog
{
    *txnDelilog = NULL;
    //used to log delivery transaction
information

HANDLE
hWorkerSemaphore = INVALID_HANDLE_VALUE;
HANDLE
hDoneEvent = INVALID_HANDLE_VALUE;
HANDLE
*pDeliHandles = NULL;

// configuration settings from registry
TPCCREGISTRYDATA Reg;

DWORD
dwNumDeliveryThreads = 4;
CRITICAL_SECTION DelBuffCriticalSection;
    //critical section for delivery
transactions cache
DELIVERY_TRANSACTION *pDelBuff
= NULL;
DWORD
dwDelBuffSize = 100;
    // size of circular buffer for delivery
txns
DWORD
dwDelBuffFreeCount;
    // number of buffers free
DWORD
dwDelBuffBusyIndex = 0;
    // index position of entry waiting to be delivered
DWORD
dwDelBuffFreeIndex = 0;
    // index position of unused entry
    // Critical section to synchronize connection open
and close.
    //
CRITICAL_SECTION hConnectCriticalSection;
#include "...\\common\\src\\ReadRegistry.cpp"
/* FUNCTION: DllMain
*/

```

```

* PURPOSE:      This function is the entry point
for the DLL. This implementation is based on the
*
fact that
DLL_PROCESS_ATTACH is only called from the inet
service once.
*
* ARGUMENTS:      HANDLE     hModule
module handle
*                                     DWORD
*             ul_reason_for_call  reason for call
*                                     LPVOID
*             lpReserved
reserved for future use
*
* RETURNS:      BOOL      FALSE
errors occurred in
initialization
*
*             TRUE
successfully initialized
*/
DLL
BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    DWORD i;
    char szEvent[LEN_ERR_STRING] = "\0";
    char szLogFile[128];
    char szDllName[128];

// debugging...
// DebugBreak();

try
{
    switch( ul_reason_for_call )
    {
        case
DLL_PROCESS_ATTACH:
        {
            DWORD dwSize = MAX_COMPUTERNAME_LENGTH+1;
GetComputerName(szMyComputerName, &dwSize);
szMyComputerName[dwSize] = 0;
}

DisableThreadLibraryCalls((HMODULE)hModule);
;

InitializeCriticalSection(&TermCriticalSection);
if (
ReadTPCCRegistrySettings( &Reg ) )
throw new CWEBCNT_ERR(
ERR_MISSING_REGISTRY_ENTRIES);
}
}

```

```

if (pCTPCC_ODBC_new == NULL)
    throw new CWEBCLNT_ERR(
ERR_GETPROCADDR_FAILED, szDllName, GetLastError() );
}

}

// Check
whether Service Pack 1 has been installed if
// running on
Windows Server 2003. The RTM version has
// a
limitation on concurrent HTTP connections.
//



OSVERSIONINFOEX VersionInfo;

VersionInfo.dwOSVersionInfoSize =
sizeof(OSVERSIONINFOEX);
if
(GetVersionEx( (LPOSVERSIONINFO)&VersionInfo))
{
    if
(VersionInfo.dwMajorVersion == 5 && // Windows
2000/2003 Server?

    VersionInfo.dwMinorVersion == 2 && // Windows
2003 Server?

    VersionInfo.wServicePackMajor == 0) // Service
Pack installed?
{



TCHAR szMsg[256];

_sntprintf(szMsg, sizeof(szMsg),
"\nRunning on
Windows Server 2003 without at least Service Pack
1\n"
"limits the
number of concurrent HTTP connections to around
8000");
}

// Use event logging to log the error.

//



HANDLE hEventSource =
RegisterEventSource(NULL, TEXT("TPCC.DLL"));

LPTSTR lpszStrings[1] = { szMsg };



if (hEventSource != NULL)

```

```

    {

        ReportEvent(hEventSource, // handle of event source

// event type                                EVENTLOG_WARNING_TYPE,
                                            0,
// event category                            0,
// event ID                                 0,
// current user's SID                        NULL,
// strings in lpszStrings                   1,
// no bytes of raw data                     0,
// array of error strings                  (LPCTSTR *)lpszStrings,
// no raw data                             NULL);

        DerejectEventSource(hEventSource);

        (VOID)
DeregisterEventSource(hEventSource);

    }

}

if
(dwNumDeliveryThreads)
{
    Initialize delivery delay critical section
    // InitializeCriticalSection(&hConnectCriticalSection);
    // for deferred delivery txns:
        hDoneEvent = CreateEvent( NULL, TRUE /* manual reset */, FALSE /* initially not signalled */,
NULL );
        InitializeCriticalSection(&DelBuffCriticalSection);
        hWorkerSemaphore = CreateSemaphore( NULL,
0, dwDelBuffSize, NULL );
}

```

```

dwDelBuffFreeCount = dwDelBuffSize;

InitJulianTime(NULL);

// create unique log file name based on delilog-yymmdd-
hhmm.log

SYSTEMTIME Time;
GetLocalTime( &Time );
wsprintf( szLogFile, "%sdelivery-
%2.2d%2.2d-%2.2d%2.2d-%2.2dms.log",
Reg.szPath, Time.wYear % 100, Time.wMonth,
Time.wDay, Time.wHour, Time.wMinute, Time.wSecond,
Time.wMilliseconds );

txnDelilog = new CTxnLog( szLogFile,
TXN_LOG_WRITE );

// write event into txn log for START

txnDelilog-
>WriteCtrlRecToLog( TXN_EVENT_START, szMyComputerName,
sizeof(szMyComputerName) );
// allocate structures for delivery buffers and thread
mgmt

pDeliHandles = new
HANDLE[ dwNumDeliveryThreads ];
pDelBuff = new
DELIVERY_TRANSACTION[ dwDelBuffSize ];
// launch DeliveryWorkerThread to perform actual
delivery txns
for(i=0; i<dwNumDeliveryThreads; i++)
{
    pDeliHandles[i] = (HANDLE) _beginthread(
DeliveryWorkerThread, 0, NULL );
    if (pDeliHandles[i] ==
INVALID_HANDLE_VALUE)
        throw new CWEBCNLT_ERR(
ERR_DELIVERY_THREAD_FAILED );
}
break;
case
DLL_PROCESS_DETACH:

```

```

(dwNumDeliveryThreads)
if
{
    if
(txnDelilog != NULL)
{
    //write event into txn log for STOP
    txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_STOP, szMyComputerName,
sizeof(szMyComputerName));
    // This will do a clean shutdown of the
    delivery log file
    CTxnLog *txnDelilogLocal = txnDelilog;
    txnDelilog= NULL;
    delete txnDelilogLocal;
}
delete [] pDeliHandles;
delete [] pDelBuff;
CloseHandle( hWorkerSemaphore );
CloseHandle( hDoneEvent );
DeleteCriticalSection(&DelBuffCriticalSection);
Delete delivery delay critical section
DeleteCriticalSection(&hConnectCriticalSection);
DeleteCriticalSection(&TermCriticalSection);
if
(hLibInstanceTm != NULL)
    FreeLibrary( hLibInstanceTm );
hLibInstanceTm = NULL;
if
(hLibInstanceDb != NULL)
    FreeLibrary( hLibInstanceDb );
hLibInstanceDb = NULL;

```

```

Sleep(500);
break;
default:
/* nothing */
*/
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );
    delete e;
    TerminateExtension(0);
    return FALSE;
}
catch (...)

{
    WriteMessageToEventLog(TEXT("Unhandled
exception. DLL could not load."));
    TerminateExtension(0);
    return FALSE;
}
return TRUE;
}

/* FUNCTION: GetExtensionVersion
*
* PURPOSE: This function is called by the
inet service when the DLL is first loaded.
*
* ARGUMENTS: HSE_VERSION_INFO *pVer
passed in structure in which to place
expected version number.
*
* RETURNS: TRUE
inet service
expected return value.
*/
BOOL WINAPI GetExtensionVersion(HSE_VERSION_INFO
*pVer)
{
    pVer->dwExtensionVersion =
MAKELONG(HSE_VERSION_MINOR, HSE_VERSION_MAJOR);
    lstrcpy(pVer->lpszExtensionDesc, "TPC-C
Server.", HSE_MAX_EXT_DLL_NAME_LEN);
    return TRUE;
}

/* FUNCTION: TerminateExtension
*
* PURPOSE: This function is called by the
inet service when the DLL is about to be unloaded.

```

```

/*
 *          Release all resources
in anticipation of being unloaded.
*
* RETURNS:      TRUE      inet service
expected return value.
*/
BOOL WINAPI TerminateExtension( DWORD dwFlags )
{
    if (pDeliHandles)
    {
        SetEvent( hDoneEvent );
        for(DWORD i=0;
i<dwNumDeliveryThreads; i++)
            WaitForSingleObject(
pDeliHandles[i], INFINITE );
    }

    TermDeleteAll();
    return TRUE;
}

/* FUNCTION: HttpExtensionProc
*
* PURPOSE:      This function is the main entry
point for the TPCC DLL. The internet service
*                  calls this function
passing in the http string.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
*                  *pECB      structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      DWORD
*                  HSE_STATUS_SUCCESS
connection can be dropped if
error
*
*                  HSE_STATUS_SUCCESS_AND_KEEP_CONN
keep connect valid comment sent
*
* COMMENTS:      None
*
*/
DWORD WINAPI
HttpExtensionProc(EXTENSION_CONTROL_BLOCK *pECB)
{
    int                               TermId,
iSyncId;
    char                             szBuffer[4096];
    int                               lpbSize;
    static char                      szHeader[] = "200 Ok";
    DWORD                            dwSize = 6;
// initial value is strlen(szHeader)
    char                             szHeader1[4096];
    DWORD                            dwAddr; // used to
store Win32 exception address
}

```

```

LPEXCEPTION_POINTERS
pExceptionInfo; // pointer to Win32
exception info

#ifndef ICECAP
StartCAP();
#endif

// Use structured exception handling for
Win32 exceptions
//
try
{
    ProcessCommand(pECB, szBuffer,
TermId, iSyncId);
}
except (
    pExceptionInfo =
GetExceptionInformation(), // can call
GetExceptionInformation only in filter (not handler)
    dwAddr =
(DWORD)pExceptionInfo->ExceptionRecord-
>ExceptionAddress, // save the address
    EXCEPTION_EXECUTE_HANDLER) // handle all
exceptions
{
    char
szMsg[512];
    int
iLen;

    MEMORY_BASIC_INFORMATION mbi ;
VirtualQuery( (void*)dwAddr,
&mbi, sizeof( mbi ) );
    DWORD hInstance =
(DWORD)mbi.AllocationBase ;

    iLen = wsprintf(szMsg,
TEXT("Unhandled exception (%#x) in Web Client's
HttpExtensionProc. "
"Occured at
address %#x, base %#x, tpcc_com.dll at %#x, tpcc.dll
at %#x, tpcc_com_all.dll at %#x"),
GetExceptionCode(), dwAddr, hInstance,
GetModuleHandle("tpcc_com.dll"),
GetModuleHandle("tpcc.dll"),
GetModuleHandle("tpcc_com_all.dll"));

    if (txnDelilog != NULL)
    {
        txnDelilog-
>WriteCtrlRecToLog(TXN_EVENT_WARNING, szMsg, iLen +
1);

    }
    ErrorForm( pECB, ERR_TYPE_WEBDLL,
GetExceptionCode(), TermId, iSyncId, szMsg, szBuffer
);
}
}

```

```

#endif ICECAP
StopCAP();
#endif

lpbSize = strlen(szBuffer);
dwSize += lpbSize;
dwSize += wsprintf(szHeader1,
"Content-Type:
text/html\r\n"
"Content-Length:
%d\r\n"
"Connection: Keep-
Alive\r\n\r\n", lpbSize);
strcat( szHeader1, szBuffer );

(*pECB->ServerSupportFunction)(pECB-
>ConnID, HSE_REQ_SEND_RESPONSE_HEADER, szHeader,
(LPDWORD) &dwSize, (LPDWORD)szHeader1);

//finish up and keep connection
pECB->dwHttpStatusCodes = 200;
return HSE_STATUS_SUCCESS_AND_KEEP_CONN;
}

/* FUNCTION: ProcessCommand
*
* PURPOSE:      This function parses the commands
from the driver and executes corresponding
transactions.
*
* ARGUMENTS:      EXTENSION_CONTROL_BLOCK
*                  *pECB      structure pointer to passed in
internet
*
*                  service information.
*
* RETURNS:      None (outputs into the
szBuffer parameter).
*
* COMMENTS:      Separated from HttpExtensionProc
to be able to use structured exception handling in
*
*                  HttpExtensionProc (cannot mix C++ and Win32
exceptions in one functions).
*
*/
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId)
{
    int                               iCmd, FormId;
    try
    {
        //process http query
        ProcessQueryString(pECB, &iCmd,
&FormId, &TermId, &iSyncId);

        if (TermId != 0)
        {
            if (TermId < 0 ||
TermId >= Term.iNumEntries ||
Term.pClientData[TermId].iNextFree != -1 )
}
}

```

```

{
    // debugging...
    szTmp[128];
    wsprintf( szTmp, "Invalid term ID; TermId = %d", TermId );
    WriteMessageToEventLog( szTmp );
    throw new CWEBCNT_ERR( ERR_INVALID_TERMID );
}

//must have a valid syncid here since termid is valid
if (iSyncId != Term.pClientData[TermId].iSyncId)
    throw new CWEBCNT_ERR( ERR_INVALID_SYNC_CONNECTION );

//set use time
Term.pClientData[TermId].iTickCount =
GetTickCount();
}

switch(iCmd)
{
case 0:
    WelcomeForm(pECB,
szBuffer);
    break;
case 1:
    switch( FormId )
    {
    case WELCOME_FORM:
    case MAIN_MENU_FORM:
        break;
    case NEW_ORDER_FORM:
        ProcessNewOrderForm(pECB, TermId,
szBuffer);
        break;
    case PAYMENT_FORM:
        ProcessPaymentForm(pECB, TermId, szBuffer);
        break;
    case DELIVERY_FORM:
        ProcessDeliveryForm(pECB, TermId,
szBuffer);
        break;
    case ORDER_STATUS_FORM:
        ProcessOrderStatusForm(pECB, TermId,
szBuffer);
        break;
    case STOCK_LEVEL_FORM:
        ProcessStockLevelForm(pECB, TermId,
szBuffer);
        break;
    }
}

{
    // char
    wsprintf(
szTmp, "Invalid term ID; TermId = %d", TermId );
    WriteMessageToEventLog( szTmp );
    throw new CWEBCNT_ERR( ERR_INVALID_TERMID );
}

case 2:
    // new-order selected from menu; display new-order input form
    MakeNewOrderForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
case 3:
    // payment selected from menu; display payment input form
    MakePaymentForm(TermId, NULL, INPUT_FORM, szBuffer);
    break;
case 4:
    // delivery selected from menu; display delivery input form
    MakeDeliveryForm(TermId, NULL, INPUT_FORM,
szBuffer);
    break;
case 5:
    // order-status selected from menu; display order-status input form
    MakeOrderStatusForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
case 6:
    // stock-level selected from menu; display stock-level input form
    MakeStockLevelForm(TermId, NULL,
INPUT_FORM, szBuffer);
    break;
case 7:
    // ExitCmd
    TermDelete(TermId);
    WelcomeForm(pECB,
szBuffer);
    break;
case 8:
    SubmitCmd(pECB,
szBuffer);
    break;
case 9:
    // menu
    MakeMainMenuForm(TermId,
Term.pClientData[TermId].iSyncId, szBuffer);
    break;
case 10:
    // CMD=Clear
    // resets all connections; should only be used when no other
    // connections are active
    TermDeleteAll();
    TermInit();
    WelcomeForm(pECB,
szBuffer);
    break;
}

case 11: // CMD=Stats
StatsCmd(pECB,
szBuffer);
break;
}

catch (CBaseErr *e)
{
    ErrorForm( pECB, e->ErrorType(),
e->ErrorNum(), TermId, iSyncId, e->ErrorText(),
szBuffer );
    delete e;
}

void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
TEXT("TPCC.DLL"));

    _stprintf(szMsg, TEXT("Error in TPCC.DLL: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
            EVENTLOG_ERROR_TYPE, // event type
            0, // event category
            0, // event ID
            NULL, // current user's
SID
            2, // strings in
lpszStrings
            0, // no bytes of raw
data
            (LPCTSTR *)lpszStrings, // array of
error strings
            NULL); // no raw data
        (VOID) DeregisterEventSource(hEventSource);
    }
}

/* FUNCTION: DeliveryWorkerThread
*
* PURPOSE: This function processes deferred
* delivery txns. There are typically several
* threads running this
* routine. The number of threads is determined by an
* entry
*      read from the registry.
* The thread waits for work by waiting on semaphore.
*      When a delivery txn is
* posted, the semaphore is released. After processing

```

```

/*
   the delivery txn,
information is logged to record the txn status and
execution
   time.
*/
/*static*/ void DeliveryWorkerThread(void *ptr)
{
    CTPCC_BASE           *pTxn = NULL;
    DELIVERY_TRANSACTION delivery;
    PDELIVERY_DATA       pDeliveryData;
    TXN_RECORD_TPCC_DELIV_DEF      txnDeliRec;
    DWORD                index;
    HANDLE               handles[2];
    SYSTEMTIME           trans_end;
    //delivery transaction finished
    SYSTEMTIME           trans_start;
    //delivery transaction start time
    assert(txnDeliLog != NULL);
    try
    {
        if (Reg.eDB_Protocol == ODBC)
        {
            if (Reg.dwConnectDelay
> 0)
            {
                // Synchronize connect (for VIA)
                // EnterCriticalSection(&hConnectCriticalSection);
                Sleep(Reg.dwConnectDelay);
                LeaveCriticalSection(&hConnectCriticalSection);
            }
            pTxn = pCTPCC_ODBC_new(
                Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
                szMyComputerName, Reg.szDbName,
                Reg.szSPPrefix,
                Reg.bCallNoDuplicatesNewOrder );
            pDeliveryData = pTxn->BuffAddr_Delivery();
        }
    }

```

```

    catch (CBaseErr *e)
    {
        char szTmp[1024];
        wsprintf( szTmp, "Error in
Delivery Txn thread. Could not connect to database.
"
        "%s.
Server=%s, User=%s, Password=%s, Database=%s",
        e-
>ErrorText(), Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword, Reg.szDbName );
        WriteMessageToEventLog( szTmp );
        delete e;
        goto ErrorExit;
    }
    catch (...)
    {
        WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
        goto ErrorExit;
    }
    while (TRUE)
    {
        try
        {
            //while delivery thread
running, i.e. user has not requested termination
            while (TRUE)
            {
                // need to
wait for multiple objects: program exit or worker
semaphore;
                handles[0] =
hDoneEvent;
                handles[1] =
hWorkerSemaphore;
                index =
WaitForMultipleObjects( 2, &handles[0], FALSE,
INFINITE );
                if (index ==
WAIT_OBJECT_0)
                    goto ErrorExit;
                ZeroMemory(&txnDeliRec,
sizeof(txnDeliRec));
                txnDeliRec.TxnType =
TXN_REC_TYPE_TPCC_DELIV_DEF;
                // make a
local copy of current entry from delivery buffer and
increment buffer index
                EnterCriticalSection(&DelBuffCriticalSection);
                delivery =
*(pDelBuff+dwDelBuffBusyIndex);
                dwDelBuffFreeCount++;

```

```

        dwDelBuffBusyIndex++;
        if
(dwDelBuffBusyIndex == dwDelBuffSize) // wrap-
around if at end of buffer
        dwDelBuffBusyIndex = 0;
        LeaveCriticalSection(&DelBuffCriticalSection);

        pDeliveryData->w_id = delivery.w_id;
        pDeliveryData->o_carrier_id =
delivery.o_carrier_id;

        txnDeliRec.w_id = pDeliveryData->w_id;
        txnDeliRec.o_carrier_id = pDeliveryData-
>o_carrier_id;
        txnDeliRec.TxnStartT0 =
Get64BitTime(&delivery.queue);
        GetLocalTime(
&trans_start );
        pTxn-
>Delivery();
        GetLocalTime(
&trans_end );
        //log txn
        txnDeliRec.TxnStatus = ERR_SUCCESS;
        for (int i=0;
i<10; i++)
        txnDeliRec.o_id[i] = pDeliveryData-
>o_id[i];
        txnDeliRec.DeltaT4 =
(int)(Get64BitTime(&trans_end) -
txnDeliRec.TxnStartT0);
        txnDeliRec.DeltaTxnExec =
(int)(Get64BitTime(&trans_end) -
Get64BitTime(&trans_start));
        if
(txnDeliLog != NULL)
            txnDeliLog->WriteToLog(&txnDeliRec);
        }
        catch (CBaseErr *e)
        {
            char szTmp[1024];
            wsprintf( szTmp, "%s
Error (code %d) in Delivery Txn thread. %s",

```

```

e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText() );
        WriteMessageToEventLog(
szTmp );

                // log the error txn
txnDeliRec.TxnStatus =
e->ErrorType();
                if (txnDeliog != NULL)
                        txnDeliog-
>WriteToLog(&txnDeliRec);

                delete e;
            }
            catch (...)
            {
                // unhandled exception;
shouldn't happen; not much we can do...

                WriteMessageToEventLog(TEXT("Unhandled
exception caught in DeliveryWorkerThread."));
            }
}

ErrorExit:
    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        EnterCriticalSection(&hConnectCriticalSecti
on);

        Sleep(Reg.dwConnectDelay);
    }

    delete pTxn;

    if (Reg.dwConnectDelay > 0)
    {
        // Synchronize disconnect (for
VIA)
        //

        LeaveCriticalSection(&hConnectCriticalSecti
on);
    }

    _endthread();
}

/* FUNCTION: PostDeliveryInfo
*
* PURPOSE:      This function enters the delivery
txn into the deferred delivery buffer.
*
* RETURNS:      BOOL      FALSE
*                  delivery information posted successfully
*
*                  TRUE      error cannot post delivery info
*/

```

```

BOOL PostDeliveryInfo(long w_id, short o_carrier_id)
{
    BOOL bError;

    EnterCriticalSection(&DelBuffCriticalSection);
    if (dwDelBuffFreeCount > 0)
    {
        bError = FALSE;
        (pDelBuff+dwDelBuffFreeIndex)-
>w_id = w_id;
        (pDelBuff+dwDelBuffFreeIndex)-
>o_carrier_id = o_carrier_id;
        GetLocalTime(&(pDelBuff+dwDelBuffFreeIndex)
->queue);

        dwDelBuffFreeCount--;
        dwDelBuffFreeIndex++;
        if (dwDelBuffFreeIndex == dwDelBuffSize)
            dwDelBuffFreeIndex = 0;
        // wrap-around if at end of
        buffer
    }
    else
        // No free buffers.  Return an
error, which indicates that the delivery buffer is
full.
        // Most likely, the number of
delivery worker threads needs to be increased to keep
up
        // with the txn rate.
        bError = TRUE;
    LeaveCriticalSection(&DelBuffCriticalSection);

    if (!bError)
        // increment worker semaphore to
wake up a worker thread
        ReleaseSemaphore(
hWorkerSemaphore, 1, NULL);

    return bError;
}

/* FUNCTION: ProcessQueryString
*
* PURPOSE:      This function extracts the
relevant information out of the http command passed
in from
*                  the browser.
*
* COMMENTS:      If this is the initial connection
i.e. client is at welcome screen then
*                  there will
not be a terminal id or current form id.  If this is
the case
*                  then the
pTermid and pFormid return values are undefined.
*/

```

```

void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermid, int
*pSyncId)
{
    char *ptr = pECB->lpszQueryString;
    char szBuffer[25];
    int i;

    //allowable client command strings i.e.
CMD=command
    static char *szCmds[] =
    {
        "Process", "..NewOrder..",
"..Payment..", "..Delivery..", "..Order-Status..",
"..Stock-Level..", "...Exit..", "Submit", "Menu",
"Clear", "Stats", ""
    };

    *pCmd = 0;                                // default is
the login screen
    *pTermid = 0;

    // if no params (i.e., empty query string),
then return login screen
    if (strlen(pECB->lpszQueryString) == 0)
        return;

    // parse FORMID, TERMID, and SYNCID
    *pFormId = GetIntKeyValue(&ptr, "FORMID",
NO_ERR, NO_ERR);
    *pTermid = GetIntKeyValue(&ptr, "TERMID",
NO_ERR, NO_ERR);
    *pSyncId = GetIntKeyValue(&ptr, "SYNCID",
NO_ERR, NO_ERR);

    // parse CMD
    GetKeyValue(&ptr, "CMD", szBuffer,
sizeof(szBuffer), ERR_COMMAND_UNDEFINED);

    // see which command it matches
    for(i=0; ; i++)
    {
        if (szCmds[i][0] == 0)
            // no more; no match;
        return error
        throw new CWEBCNT_ERR(
ERR_COMMAND_UNDEFINED);
        if ( !strcmp(szCmds[i], szBuffer)
        )
        {
            *pCmd = i+1;
            break;
        }
    }

    /* FUNCTION: void WelcomeForm
*
*/
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuf)

```

```

{
    char szTmp[1024];

    //welcome to tpc-c html form buffer, this
is first form client sees.
    strcpy( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web
Client</TITLE></HEAD><BODY>"

        "<B><BIG>Microsoft TPC-C Web Client (ver
4.20)</BIG></B> <BR> <BR>

        "<font face=\"Courier New\"><PRE>"

        "Compiled: __DATE__ , __TIME__ <BR>
        "Source: __FILE__ ( __TIMESTAMP__ )
<BR>

        "</PRE></font>

        "<FORM ACTION=\"tpcc.dll\" METHOD=\"GET\">

        "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"0\">

        "<INPUT TYPE=\"hidden\" NAME=\"ERROR\" VALUE=\"0\">

        "<INPUT TYPE=\"hidden\" NAME=\"FORMID\" VALUE=\"1\">

        "<INPUT TYPE=\"hidden\" NAME=\"TERMID\" VALUE=\"0\">

        "<INPUT TYPE=\"hidden\" NAME=\"SYNCID\" VALUE=\"0\">

        "<INPUT TYPE=\"hidden\" NAME=\"VERSION\" VALUE=\"\" WEBCLIENT_VERSION \">
        );

        sprintf( szTmp, "Configuration
Settings: <BR><font face=\"Courier New\" color=\"blue\"><PRE>"

        "Txn Monitor      = <B>%s</B><BR>"
        "Database protocol = <B>%s</B><BR>"
        "Max Connections   = <B>%d</B><BR>" "# of Delivery Threads = <B>%d</B><BR>" "# Max Pending Deliveries = <B>%d</B><BR>"

szTnxMonNames[Reg.eTnxMon],
szDBNames[Reg.eDB_Protocol],
        Reg.dwMaxConnections,
dwNumDeliveryThreads, dwDelBuffSize );
strcat( szBuffer, szTmp);

if (Reg.eTnxMon == COM)

```

```

{
    sprintf( szTmp, "COM Single
Pool      = <B>%s</B><BR>", Reg.bCOM_SinglePool ?
"YES" : "NO" );
    strcat( szBuffer, szTmp);
}
strcat( szBuffer, "</PRE></font>");

if (Reg.eTnxMon == None)
    // connection options may be
specified when not using a txn monitor
    sprintf( szTmp, "Please enter
your database options for this connection:<BR>

        "<font face=\"Courier New\" color=\"blue\"><PRE>

        "DB Server      = <INPUT NAME=\"db_server\" SIZE=20 VALUE=\"%s\"><BR>
        "DB User ID     = <INPUT NAME=\"db_user\" SIZE=20 VALUE=\"%s\"><BR>
        "DB Password    = <INPUT NAME=\"db_passwd\" SIZE=20 VALUE=\"%s\"><BR>
        "DB Name        = <INPUT NAME=\"db_name\" SIZE=20 VALUE=\"%s\"><BR>
        "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
else
    // if using a txn monitor,
connection options are determined from registry;
can't
    // set per user. show options
fyi
    sprintf( szTmp, "Database
options which will be used by the transaction
monitor:<BR>

        "<font face=\"Courier New\" color=\"blue\"><PRE>

        "DB Server      = <B>%s</B><BR>
        "DB User ID     = <B>%s</B><BR>
        "DB Password    = <B>%s</B><BR>
        "DB Name        = <B>%s</B><BR>
        "</PRE></font>

Reg.szDbServer, Reg.szDbUser, Reg.szDbPassword,
Reg.szDbName );
strcat( szBuffer, szTmp);

sprintf( szTmp, "Please enter your
Warehouse and District for this session:<BR>"

```

```

        "<font face=\"Courier New\" color=\"blue\"><PRE>";
        strcat( szBuffer, szTmp);
        strcat( szBuffer, "Warehouse ID = <INPUT NAME=\"w_id\" SIZE=6><BR>"
        "District ID = <INPUT NAME=\"d_id\" SIZE=2><BR>" "</PRE></font><HR>
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"Submit\">
        "</FORM></BODY></HTML>"

/* FUNCTION: SubmitCmd
*
* PURPOSE: This function allocated a new
terminal id in the Term structure array.
*/
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char *szBuffer)
{
    int iNewTerm;
    char *ptr = pECB->lpszQueryString;
    char szVersion[32] = { 0 };
    char szServer[32] = { 0 };
    char szUser[32] = "sa";
    char szPassword[32] = { 0 };
    char szDatabase[32] = "tpcc";

    // validate version field; the version
field ensures that the RTE is synchronized with the
web client
    GetKeyValue(&ptr, "VERSION", szVersion,
sizeof(szVersion), ERR_VERSION_MISMATCH);
    if (strcmp( szVersion, WEBCLIENT_VERSION ) )
        throw new CWEBCLNT_ERR(
ERR_VERSION_MISMATCH );

    if (Reg.eTnxMon == None)
    {
        // parse Server name
        GetKeyValue(&ptr, "db_server",
szServer, sizeof(szServer), ERR_NO_SERVER_SPECIFIED);
        // parse User name
        GetKeyValue(&ptr, "db_user",
szUser, sizeof(szUser), NO_ERR);
        // parse Password
        GetKeyValue(&ptr, "db_passwd",
szPassword, sizeof(szPassword), NO_ERR);
        // parse Database name
        GetKeyValue(&ptr, "db_name",
szDatabase, sizeof(szDatabase), NO_ERR);
    }
}

```

```

    // parse warehouse ID
    int w_id = GetIntKeyValue(&ptr, "w_id",
ERR_HTML_ILL_FORMED, ERR_W_ID_INVALID);
    if ( w_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_W_ID_INVALID );

    // parse district ID
    int d_id = GetIntKeyValue(&ptr, "d_id",
ERR_HTML_ILL_FORMED, ERR_D_ID_INVALID);
    if ( d_id < 1 || d_id > 10 )
        throw new CWEBCLNT_ERR(
ERR_D_ID_INVALID );

    iNewTerm = TermAdd();

    Term.pClientData[iNewTerm].w_id = w_id;
    Term.pClientData[iNewTerm].d_id = d_id;

    try
    {
        if (Reg.eTxnMon == COM)

            Term.pClientData[iNewTerm].pTxn =
pCTPCC_COM_new( Reg.bCOM_SinglePool );
            else if (Reg.eDB_Protocol ==
ODBC)

                Term.pClientData[iNewTerm].pTxn =
pCTPCC_ODBC_new( szServer, szUser, szPassword,
szMyComputerName,

                szDatabase, Reg.szSPPrefix,

                Reg.bCallNoDuplicatesNewOrder );
        catch (...)
        {
            TermDelete(iNewTerm);
            throw; // pass
exception upward
        }

        MakeMainMenuForm(iNewTerm,
Term.pClientData[iNewTerm].iSyncId, szBuffer);
    }

/* FUNCTION: StatsCmd
*
* PURPOSE: This function returns to the
browser the total number of active terminal ids.
* This routine is for
development/debugging purposes.
*/

```

```

void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer)
{
    int i;
    int iTotal;

    EnterCriticalSection(&TermCriticalSection);

    iTotal = 0;
    for(i=0; i<Term.iNumEntries; i++)
    {
        if (Term.pClientData[i].iNextFree
== -1)
            iTotal++;
    }

    LeaveCriticalSection(&TermCriticalSection);

    wsprintf( szBuffer,
    "<HTML><HEAD><TITLE>TPC-C Web Client
Stats</TITLE></HEAD>" "<><BODY><B> Total
Active Connections: %d </BIG></B><BR></BODY></HTML>" , iTotal );
}

char *CWEBCLNT_ERR::ErrorText()
{
    static SERRORMSG errorMsgs[] =
    {
        {ERR_COMMAND_UNDEFINED,
        "Command undefined."},
        {ERR_D_ID_INVALID,
        "Invalid District ID Must be 1 to 10."},
        {ERR_DELIVERY_CARRIER_ID_RANGE,
        "Delivery Carrier ID out of range
must be 1 - 10."},
        {ERR_DELIVERY_CARRIER_INVALID,
        "Delivery Carrier ID invalid must be
numeric 1 - 10."},
        {ERR_DELIVERY_MISSING_OCD_KEY,
        "Delivery missing Carrier ID key \"OCD*\"."},
        {ERR_DELIVERY_THREAD_FAILED,
        "Could not start delivery worker
thread."},
        {ERR_GETPROCADDR_FAILED,
        }
    };
}
```

```

    "Could not map proc in DLL. GetProcAddress
error. DLL="
    {
        ERR_HTML_ILL_FORMED,
        "Required key field is missing from HTML
string."
    }
    {
        ERR_INVALID_SYNC_CONNECTION,
        "Invalid Terminal Sync ID."
    }
    {
        ERR_INVALID_TERMID,
        "Invalid Terminal ID."
    }
    {
        ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL="
    }
    {
        ERR_MAX_CONNECTIONS_EXCEEDED,
        "No connections available. Max Connections
is probably too low."
    }
    {
        ERR_MISSING_REGISTRY_ENTRIES,
        "Required registry entries are missing.
Rerun INSTALL to correct."
    }
    {
        ERR_NEWORDER_CUSTOMER_INVALID,
        "New Order customer id invalid
data type, range = 1 to 3000."
    }
    {
        ERR_NEWORDER_CUSTOMER_KEY,
        "New Order missing Customer key
\"CID*\"."
    }
    {
        ERR_NEWORDER_DISTRICT_INVALID,
        "New Order District ID Invalid
range 1 - 10."
    }
    {
        ERR_NEWORDER_FORM_MISSING_DID,
        "New Order missing District key
\"DID*\"."
    }
    {
        ERR_NEWORDER_ITEMID_INVALID,
        "New Order Item Id is wrong data type, must
be numeric."
    }
    {
        ERR_NEWORDER_ITEMID_RANGE,
        "New Order Item Id is out of
range. Range = 1 to 999999."
    }
    {
        ERR_NEWORDER_ITEMID_WITHOUT_SUPPW,
        "New Order Item_Id field entered without a
corresponding Supp_W."
    }
    {
        ERR_NEWORDER_MISSING_IID_KEY,
        "New Order missing Item Id key \"IID*\"."
    }

```

```

        },
        {
    ERR_NEORDER_MISSING_QTY_KEY,
    "New Order Missing Qty key \\"Qty##*\\"."
        },
        {
    ERR_NEORDER_MISSING_SUPPW_KEY,
    "New Order missing Supp_W key
\"SP##*\\"."
        },
        {
    ERR_NEORDER_NOITEMS_ENTERED,
    "New Order No order lines entered."
        },
        {
    ERR_NEORDER_QTY_INVALID,
    "New Order Qty invalid must be
numeric range 1 - 99."
        },
        {
            ERR_NEORDER_QTY_RANGE,
    "New Order Qty is out of range. Range = 1
to 99."
        },
        {
    ERR_NEORDER_QTY_WITHOUT_SUPPW,
    "New Order Qty field entered
without a corresponding Supp_W."
        },
        {
    ERR_NEORDER_SUPPW_INVALID,
    "New Order Supp_W invalid data
type must be numeric."
        },
        {
    ERR_NO_SERVER_SPECIFIED,
    "No Server name specified."
        },
        {
    ERR_ORDERSTATUS_CID_AND_CLT,
    "Order Status Only Customer ID or Last Name
may be entered, not both."
        },
        {
    ERR_ORDERSTATUS_CID_INVALID,
    "Order Status Customer ID invalid, range
must be numeric 1 - 3000."
        },
        {
    ERR_ORDERSTATUS_CLT_RANGE,
    "Order Status Customer last name
longer than 16 characters."
        },
        {
    ERR_ORDERSTATUS_DID_INVALID,
    "Order Status District invalid, value must
be numeric 1 - 10."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    "Order Status Either Customer ID or Last
Name must be entered."
        },
        {
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    "Order Status missing Customer key

```

```

\"CID*\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    "Order Status missing Customer Last Name
key \\"CLT*\\"."
        },
        {
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    "Order Status missing District key
\"DID*\\"."
        },
        {
    ERR_PAYMENT_CDI_INVALID,
    "Payment Customer district
invalid must be numeric."
        },
        {
    ERR_PAYMENT_CID_AND_CLT,
    "Payment Only Customer ID or Last
Name may be entered, not both."
        },
        {
    ERR_PAYMENT_CUSTOMER_INVALID,
    "Payment Customer data type invalid, must
be numeric."
        },
        {
    ERR_PAYMENT_CWI_INVALID,
    "Payment Customer Warehouse
invalid, must be numeric."
        },
        {
    ERR_PAYMENT_DISTRICT_INVALID,
    "Payment District ID is invalid, must be 1
- 10."
        },
        {
    ERR_PAYMENT_HAM_INVALID,
    "Payment Amount invalid data type
must be numeric."
        },
        {
            ERR_PAYMENT_HAM_RANGE,
    "Payment Amount out of range, 0 - 9999.99."
        },
        {
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    "Payment Customer last name
longer than 16 characters."
        },
        {
    ERR_PAYMENT_MISSING_CDI_KEY,
    "Payment missing Customer district key
\"CDI*\\"."
        },
        {
    ERR_PAYMENT_MISSING_CID_CLT,
    "Payment Either Customer ID or Last Name
must be entered."
        },
        {
    ERR_PAYMENT_MISSING_CID_KEY,
    "Payment missing Customer Key \\"CID*\\"."
        },

```

```

    {
    ERR_PAYMENT_MISSING_CLT_KEY,
    "Payment missing Customer Last Name key
\"CLT*\\"."
    },
    {
    ERR_PAYMENT_MISSING_CWI_KEY,
    "Payment missing Customer Warehouse key
\"CWI*\\"."
    },
    {
    ERR_PAYMENT_MISSING_DID_KEY,
    "Payment missing District Key \\"DID*\\"."
    },
    {
    ERR_PAYMENT_MISSING_HAM_KEY,
    "Payment missing Amount key \\"HAM*\\"."
    },
    {
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    "Stock Level; missing Threshold key
\"TT*\\"."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    "Stock Level; Threshold value must be in
the range = 1 - 99."
    },
    {
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    "Stock Level Threshold out of
range, range must be 1 - 99."
    },
    {
        ERR_VERSION_MISMATCH,
    "Invalid version field. RTE and Web Client
are probably out of sync."
    },
    {
        ERR_W_ID_INVALID,
    "Invalid Warehouse ID."
    },
    {
        0,
        ""
    };
char szTmp[256];
int i = 0;
while (TRUE)
{
    if (errorMsgs[i].szMsg[0] == 0)
    {
        strcpy( szTmp, "Unknown
error number." );
        break;
    }
    if (m_Error ==
errorMsgs[i].iError)
    {

```

```

errorMsgs[i].szMsg );
                strcpy( szTmp,
                break;
            }
        }

        if (m_szTextDetail)
            strcat( szTmp, m_szTextDetail );
        if (m_SystemErr)
            wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

        m_szErrorText = new char[strlen(szTmp)+1];
        strcpy( m_szErrorText, szTmp );
        return m_szErrorText;
    }

/* FUNCTION: GetKeyValue
*
* PURPOSE:      This function parses a http
formatted string for specific key values.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser           *
*                           char
*               *pKey             key
*               value to look for
*                           *
*                           char
*               *pValue           character array into which to place key's
*               value
*                           int
*               iMax             maximum length of key value array.
*                           WEBERROR
*               err              error value to throw
*
* RETURNS:      nothing.
*
* ERROR:        if (the pKey value is not found)
then
*                           if
(err == 0)
*
*               return (empty string)
*
*               else
*
*               throw CWECLNT_ERR(err)
*
* COMMENTS:     http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*                           TPC-C input
fields in such a manner that the keys can be
extracted in the
*                           above manner.
*/

```

```

void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err)
{
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorExit;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorExit;
    ptr++;
    iMax--; // one position is for terminating
null
    while( *ptr && *ptr != '&' && iMax)
    {
        *pValue++ = *ptr++;
        iMax--;
    }
    *pValue = 0; // terminating null
    *pQueryString = ptr;
    return;

ErrorExit:
    if (err != NO_ERR)
        throw new CWECLNT_ERR( err );
    *pValue = 0; // return empty result string
}

/* FUNCTION: GetIntKeyValue
*
* PURPOSE:      This function parses a http
formatted string for a specific key value.
*
* ARGUMENTS:    char
*               *pQueryString      http string from client
*               browser           *
*                           char
*               *pKey             key
*               value to look for
*                           *
*                           WEBERROR
*               NoKeyErr         error value to throw if
key not found
*                           *
*                           WEBERROR
*               NotIntErr        error value to throw if
value not numeric
*                           *
* RETURNS:      integer
*
* ERROR:        if (the pKey value is not found)
then
*                           if
(NoKeyErr != NO_ERR)
*
*               throw CWECLNT_ERR(err)
*
*               else
*
*               return 0
*
*               else if (non-
numeric char found) then

```

```

*
* (NotIntErr != NO_ERR) then
*
*               throw CWECLNT_ERR(err)
*
*               else
*
*               return 0
*
* COMMENTS:      http keys are formatted either
KEY=value& or KEY=value\0. This DLL formats
*                           TPC-C input
fields in such a manner that the keys can be
extracted in the
*                           above manner.

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr)
{
    char *ptr0;
    char *ptr;

    if ( !(ptr=strstr(*pQueryString, pKey)) )
        goto ErrorNoKey;
    ptr += strlen(pKey);
    if ( *ptr != '=' )
        goto ErrorNoKey;
    ptr++;
    ptr0 = ptr; // remember
starting point
// scan string until a terminator (null or
&) or a non-digit
while( *ptr && *ptr != '&' && isdigit(*ptr)
)
    ptr++;

// make sure we stopped scanning for the
right reason
if ((ptr0 == ptr) || (*ptr && *ptr != '&'))
{
    if (NotIntErr != NO_ERR)
        throw new CWECLNT_ERR(
NoKeyErr );
    return 0;
}

*pQueryString = ptr;
return atoi(ptr0);

ErrorNoKey:
    if (NoKeyErr != NO_ERR)
        throw new CWECLNT_ERR( NoKeyErr );
}
return 0;

/* FUNCTION: TermInit
*
* PURPOSE:      This function initializes the
client terminal structure; it is called when the
TPCC.DLL

```

```

/*
   is first loaded by the
*/
void TermInit(void)
{
    EnterCriticalSection(&TermCriticalSection);

    Term.iMasterSyncId = 1;
    Term.iNumEntries =
Reg.dwMaxConnections+1;

    Term.pClientData = NULL;
    Term.pClientData =
(PCLIENTDATA)malloc(Term.iNumEntries *
sizeof(CLIENTDATA));
    if (Term.pClientData == NULL)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTErr(
ERR_MEM_ALLOC_FAILED );
    }

    ZeroMemory( Term.pClientData,
Term.iNumEntries * sizeof(CLIENTDATA) );

    Term.iFreeList =
Term.iNumEntries-1;
    // build free list
    // note: Term.pClientData[0].iNextFree gets
set to -1, which marks it as "in use".
    // This is intentional, as the zero
entry is used as an anchor and never
    // allocated as an actual
terminal.
    for(int i=0; i<Term.iNumEntries; i++)
        Term.pClientData[i].iNextFree =
i-1;

    LeaveCriticalSection(&TermCriticalSection);
}

/* FUNCTION: TermDeleteAll
*
* PURPOSE: This function frees allocated
resources associated with the terminal structure.
*
* ARGUMENTS: none
*
* RETURNS: None
*
* COMMENTS: This function is called only when
the inet service unloads the TPCC.DLL
*/
void TermDeleteAll(void)
{
    EnterCriticalSection(&TermCriticalSection);

    for(int i=1; i<Term.iNumEntries; i++)

```

```

    {
        if (Term.pClientData[i].iNextFree
== -1)
            delete
Term.pClientData[i].pTxn;
        }

        Term.iFreeList
        = 0;
        Term.iNumEntries
        = 0;
        if (Term.pClientData)
            free(Term.pClientData);
        Term.pClientData
        = NULL;

        LeaveCriticalSection(&TermCriticalSection);
    }

/* FUNCTION: TermAdd
*
* PURPOSE: This function assigns a terminal
id which is used to identify a client browser.
*
* RETURNS: int
*           assigned terminal id
*/
int TermAdd(void)
{
    DWORD i;
    int iNewTerm, iTickCount;

    if (Term.iNumEntries == 0)
        return -1;

    EnterCriticalSection(&TermCriticalSection);
    if (Term.iFreeList != 0)
    {
        // position is available
        iNewTerm = Term.iFreeList;
        Term.iFreeList =
Term.pClientData[iNewTerm].iNextFree;

        Term.pClientData[iNewTerm].iNextFree = -1;
        // indicates this position is in use
    }
    else
    {
        // no open slots, so find the
slot that hasn't been used in the longest time and
reuse it
        for(iNewTerm=1, i=1,
iTICKCOUNT=0x7FFFFFFF; i<Reg.dwMaxConnections; i++)
        {
            if (iTICKCOUNT >
Term.pClientData[i].iTICKCOUNT)
                iTICKCOUNT =
Term.pClientData[i].iTICKCOUNT;
            iNewTerm = i;
        }
        // if oldest term is less than
one minute old, it probably means that more
connections
    }
}

```

```

        // are being attempted than were
specified as "Max Connections" at install. In this
case,
        // do not bump existing
connection; instead, return error to requestor.
        if ((GetTickCount() - iTickCount)
< 60000)
    {

        LeaveCriticalSection(&TermCriticalSection);
        throw new CWEBCLNTErr(
ERR_MAX_CONNECTIONS_EXCEEDED );
    }

    Term.pClientData[iNewTerm].iTICKCOUNT =
GetTickCount();
    Term.pClientData[iNewTerm].iSyncId =
Term.iMasterSyncId++;
    Term.pClientData[iNewTerm].pTxn = NULL;

    LeaveCriticalSection(&TermCriticalSection);
    return iNewTerm;
}

/* FUNCTION: TermDelete
*
* PURPOSE: This function makes a terminal
entry in the Term array available for reuse.
*
* ARGUMENTS: int
*           id
*           Terminal id of client exiting
*/
void TermDelete(int id)
{
    if (id > 0 && id < Term.iNumEntries )
    {
        delete Term.pClientData[id].pTxn;
        // put onto free list
        EnterCriticalSection(&TermCriticalSection);
        Term.pClientData[id].iNextFree =
Term.iFreeList;
        Term.iFreeList = id;

        LeaveCriticalSection(&TermCriticalSection);
    }
}

/* FUNCTION: MakeErrorForm
*/
void ErrorForm(EXTENSION_CONTROL_BLOCK *pecb, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer )
{

```

```

wsprintf(szBuffer,
        "<HTML><HEAD><TITLE>TPC-C
Error</TITLE></HEAD><BODY>"
        "<FORM ACTION=\"tpcc.dll\""
METHOD=\\\"GET\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"STATUSID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"ERROR\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"TERMINID\\\" VALUE=\\\"%d\\\" >
        "<INPUT TYPE=\"hidden\\\""
NAME=\\\"SYNCID\\\" VALUE=\\\"%d\\\" >
        "<BOLD>An Error
Occurred</BOLD><BR><BR>
        \"%s"
        "<BR><BR><HR>"
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". NewOrder..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Payment..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Delivery..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Order-Status..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Stock-Level..\\\" >
        "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Exit..\\\" >
        "</FORM></BODY></HTML>"
        , iType, iErrorMsg,
MAIN_MENU_FORM, iTermId, iSyncId, szErrorText );
}

/* FUNCTION: MakeMainMenuForm
 */
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm)
{
    wsprintf(szForm,
            "<HTML><HEAD><TITLE>TPC-C Main
Menu</TITLE></HEAD><BODY>"
            "Select Desired
Transaction.<BR><HR>"
            "<FORM ACTION=\"tpcc.dll\\\""
METHOD=\\\"GET\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"STATUSID\\\" VALUE=\\\"0\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"ERROR\\\" VALUE=\\\"0\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"TERMINID\\\" VALUE=\\\"%d\\\" >
            "<INPUT TYPE=\"hidden\\\""
NAME=\\\"CMD\\\" VALUE=\\\". NewOrder..\\\" >
            "<INPUT TYPE=\"submit\\\""
NAME=\\\"CMD\\\" VALUE=\\\". Payment..\\\" >
            "<INPUT TYPE=\"submit\\\""

```

```

        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Delivery..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Order_Status..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Stock_Level..\">"
        "<INPUT TYPE=\"submit\""
NAME= \"CMD\" VALUE= \"..Exit..\">"
        "</FORM></BODY></HTML>"
```

, MAIN_MENU_FORM, iTermId,

iSyncId);

}

/* FUNCTION: MakeStockLevelForm

*

*** PURPOSE:** This function constructs the Stock Level HTML page.

*

*** COMMENTS:** The internal client buffer is created when the terminal id is assigned and should not be freed except when the client terminal id is no longer needed.

*/

void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA *pStockLevelData, BOOL bInput, char *szForm)

{

int c;

c = wsprintf(szForm,

"<HTML><HEAD><TITLE>TPC-C Stock

Level</TITLE></HEAD><FORM ACTION=\"tpcc.dll\""

METHOD= \"GET\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"STATUSID\" VALUE= \"0\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"ERROR\" VALUE= \"0\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"FORMID\" VALUE= \"%d\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"TERMID\" VALUE= \"%d\" >"

"<INPUT TYPE=\"hidden\""

NAME= \"SYNCID\" VALUE= \"%d\" >"

"<PRE>"

Stock-Level
"

"Warehouse: %6.6d District:

%2.2d

,

STOCK_LEVEL_FORM, iTermId,

Term.pClientData[iTermId].iSyncid,

Term.pClientData[iTermId].w_id,

Term.pClientData[iTermId].d_id);

if (bInput)

{

strcpy(szForm+c,

"Stock Level Threshold:

<INPUT NAME= \"TT*\" SIZE=2>

"

"low stock:

"

```

<BR> <BR> <BR></PRE><HR>"           "<BR> <BR> <BR> <BR>
NAME=\\"CMD\\" VALUE=\\"Process\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"Menu\\">>           "<INPUT TYPE=\\"submit\\"
}
else
{
    wsprintf(szForm+c,
              "Stock Level Threshold:
%2.2d<BR> <BR>"           "low stock:
%3.3d</font> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR>"           "<BR> <BR> <BR> <BR>
<BR> <BR> <BR></PRE><HR>"           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..NewOrder..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Payment..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Delivery..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Order-Status..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Stock-Level..\\">>           "<INPUT TYPE=\\"submit\\"
NAME=\\"CMD\\" VALUE=\\"..Exit..\\">>"           "</FORM></HTML>
, pStockLevelData-
>threshold, pStockLevelData->low_stock);
}
}

/* FUNCTION: MakeNewOrderForm
 *
 * COMMENTS:      The internal client buffer is
created when the terminal id is assigned and should
not
 *                                     be freed
except when the client terminal id is no longer
needed.
 */
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm)
{
    int                     i, c;
    BOOL                   bValid;
    static     char szBR[] = " <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>
<BR> <BR>";
    if (!bInput)
        assert( pNewOrderData-
>exec_status_code == eOK || pNewOrderData-
>exec_status_code == eInvalidItem );
    bValid = (bInput || (pNewOrderData-
>exec status code == eOK));
}

```

```

c = wsprintf(szForm,
    "<HTML><HEAD><TITLE>TPC-C New
Order</TITLE></HEAD><BODY>" 
    "<FORM ACTION=\"tpcc.dll\" "
METHOD="GET" >
    "<INPUT TYPE=\"hidden\" "
NAME="STATUSID" VALUE="%d">
    "<INPUT TYPE=\"hidden\" "
NAME="ERROR" VALUE="0">
    "<INPUT TYPE=\"hidden\" "
NAME="FORMID" VALUE="%d" " 
    "<INPUT TYPE=\"hidden\" "
NAME="TERMID" VALUE="%d" " 
    "<INPUT TYPE=\"hidden\" "
NAME="SYNCID" VALUE="%d" " 
    "<PRE><font face=\"Courier\">
New Order<BR>" 
        , bValid ? 0 : ERR_BAD_ITEM_ID,
NEW_ORDER_FORM, iTermId,
Term.pClientData[iTermid].iSyncId);

if (bInput)
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d ", Term.pClientData[iTermId].w_id
);

    strcpy( szForm+c,
            "District: <INPUT
NAME=\"DID*\" SIZE=1>
Date:<BR>" 
                "Customer: <INPUT
NAME=\"CID*\" SIZE=4> Name:
Credit: %Disc:<BR>" 
                    "Order Number:
Number of Lines: W_tax: D_tax:<BR>
<BR>" 
                        " Supp_W Item_Id Item
Name Qty Stock B/G Price
Amount<BR>" 
                            "<INPUT
NAME=\"SP00*\" SIZE=4> <INPUT NAME=\"IID00*\""
SIZE=6>
                            "<INPUT
NAME=\"Qty00*\" SIZE=1><BR>" 
                                "<INPUT
NAME=\"SP01*\" SIZE=4> <INPUT NAME=\"IID01*\""
SIZE=6>
                                "<INPUT
NAME=\"Qty01*\" SIZE=1><BR>" 
                                    "<INPUT
NAME=\"SP02*\" SIZE=4> <INPUT NAME=\"IID02*\""
SIZE=6>
                                    "<INPUT
NAME=\"Qty02*\" SIZE=1><BR>" 
                                        "<INPUT
NAME=\"SP03*\" SIZE=4> <INPUT NAME=\"IID03*\""
SIZE=6>
                                        "<INPUT
NAME=\"Qty03*\" SIZE=1><BR>" 
                                            "<INPUT
NAME=\"SP04*\" SIZE=4> <INPUT NAME=\"IID04*\""
SIZE=6>
                                            "<INPUT
NAME=\"Qty04*\" SIZE=1><BR>" 
                                                "<INPUT
NAME=\"SP05*\" SIZE=4> <INPUT NAME=\"IID05*\""
SIZE=6>

```

```

                                                "<INPUT
NAME=\"Qty05*\" SIZE=1><BR>" 
                                                    "<INPUT
NAME=\"SP06*\" SIZE=4> <INPUT NAME=\"IID06*\""
SIZE=6>
                                                    "<INPUT
NAME=\"Qty06*\" SIZE=1><BR>" 
                                                        "<INPUT
NAME=\"SP07*\" SIZE=4> <INPUT NAME=\"IID07*\""
SIZE=6>
                                                        "<INPUT
NAME=\"Qty07*\" SIZE=1><BR>" 
                                                            "<INPUT
NAME=\"SP08*\" SIZE=4> <INPUT NAME=\"IID08*\""
SIZE=6>
                                                            "<INPUT
NAME=\"Qty08*\" SIZE=1><BR>" 
                                                                "<INPUT
NAME=\"SP09*\" SIZE=4> <INPUT NAME=\"IID09*\""
SIZE=6>
                                                                "<INPUT
NAME=\"Qty09*\" SIZE=1><BR>" 
                                                                    "<INPUT
NAME=\"SP10*\" SIZE=4> <INPUT NAME=\"IID10*\""
SIZE=6>
                                                                    "<INPUT
NAME=\"Qty10*\" SIZE=1><BR>" 
                                                                        "<INPUT
NAME=\"SP11*\" SIZE=4> <INPUT NAME=\"IID11*\""
SIZE=6>
                                                                        "<INPUT
NAME=\"Qty11*\" SIZE=1><BR>" 
                                                                            "<INPUT
NAME=\"SP12*\" SIZE=4> <INPUT NAME=\"IID12*\""
SIZE=6>
                                                                            "<INPUT
NAME=\"Qty12*\" SIZE=1><BR>" 
                                                                                "<INPUT
NAME=\"SP13*\" SIZE=4> <INPUT NAME=\"IID13*\""
SIZE=6>
                                                                                "<INPUT
NAME=\"Qty13*\" SIZE=1><BR>" 
                                                                                    "<INPUT
NAME=\"SP14*\" SIZE=4> <INPUT NAME=\"IID14*\""
SIZE=6>
                                                                                    "<INPUT
NAME=\"Qty14*\" SIZE=1><BR>" 
                                                                                        "Execution Status:
Total:<BR>" 
                            "</font></PRE><HR>" 
                            "<INPUT TYPE=\"submit\""
NAME="CMD" VALUE="Process" >
                            "<INPUT TYPE=\"submit\""
NAME="CMD" VALUE="Menu" >
                            "</FORM></HTML>" 
);
}
else
{
    c += wsprintf(szForm+c,
"Warehouse: %6.6d District: %2.2d
Date: ", 
                    pNewOrderData->w_id,
                    pNewOrderData->d_id);

    if (bValid)
    {
        c += wsprintf(szForm+c,
"%2.2d-%2.2d-%4.4d %2.2d:%2.2d:%2.2d",
pNewOrderData->o_entry_d.day,

```

```

pNewOrderData->o_entry_d.month,
pNewOrderData->o_entry_d.year,
pNewOrderData->o_entry_d.hour,
pNewOrderData->o_entry_d.minute,
pNewOrderData->o_entry_d.second);
}

c += wsprintf(szForm+c,
"<BR>Customer: %4.4d Name: %-16s Credit: %-2s",
pNewOrderData->c_id,
pNewOrderData->c_last, pNewOrderData->c_credit);

if (bValid)
{
    c += sprintf(szForm+c,
"%&Disc: %5.2f <BR>" 
        "Order Number: %8.8d Number of Lines:
%2.2d W_tax: %5.2f D_tax: %5.2f <BR> <BR>" 
            " Supp_W Item_Id Item Name
Qty Stock B/G Price Amount<BR>",
100.0*pNewOrderData->c_discount,
pNewOrderData->o_id,
pNewOrderData->o.ol_cnt,
pNewOrderData->w_tax,
pNewOrderData->d_tax);
100.0 *
pNewOrderData->w_tax,
100.0 *

for(i=0;
i<pNewOrderData->o.ol_cnt; i++)
{
    c +=
sprintf(szForm+c, "%6.6d %6.6d %-24s %2.2d
%3.3d %1.1s $%6.2f $%7.2f <BR>",
pNewOrderData->OL[i].ol_supply_w_id,
pNewOrderData->OL[i].ol_i_id,
pNewOrderData->OL[i].ol_i_name,
pNewOrderData->OL[i].ol_quantity,
pNewOrderData->OL[i].ol_stock,
pNewOrderData->OL[i].ol_brand_generic,
pNewOrderData->OL[i].ol_i_price,
pNewOrderData->OL[i].ol_amount );
}
```

```

        }
    else
    {
        c += wsprintf(szForm+c,
                      "$Disc:<BR>" 
                      "Order
Number: %8.8d Number of Lines:          W_tax:
D_tax:<BR> <BR>" 
                      " Supp_W
Item_Id Item Name          Qty Stock B/G
Price   Amount<BR>" 
                      ,
pNewOrderData->o_id);

        i = 0;
    }

    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;

    if ( bValid )
        c += sprintf(szForm+c,
"Execution Status: Transaction committed.
Total: $%8.2f ",

pNewOrderData->total_amount);
    else
        c += wsprintf(szForm+c,
"Execution Status: Item number is not valid.
Total:");
}

strcpy(szForm+c,
"
<BR></font></PRE><HR>
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Payment..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Delivery..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Order_Status..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Stock_Level..\">" 
        "<INPUT TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..Exit..\">" 
        "</FORM></HTML>"
);
}
}

/* FUNCTION: MakePaymentForm
 *
 * COMMENTS:      The internal client buffer is
 * created when the terminal id is assigned and should
 * not
 *                  be freed
 * except when the client terminal id is no longer
 * needed.
 */

```

```

void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm)
{
    int c;

    c = wsprintf(szForm,
                  "<HTML><HEAD><TITLE>TPC-C
Payment</TITLE></HEAD><BODY>" 
                  "<FORM ACTION=\"tpcc.dll\""
METHOD="GET">" 
                  "<INPUT TYPE=\"hidden\" NAME=\"STATUSID\" VALUE=\"%0\"\""
NAME="ERROR\" VALUE=\"%0\"\" 
                  "<INPUT TYPE=\"hidden\" NAME="FORMID\" VALUE=\"%d\"\""
NAME="TERMID\" VALUE=\"%d\"\" 
                  "<INPUT TYPE=\"hidden\" NAME="SYNCID\" VALUE=\"%d\"\""
NAME="CMD\" VALUE=\"Process\"><INPUT TYPE=\"submit\" NAME="CMD\" VALUE=\"Menu\">" 
                  "</BODY></FORM></HTML>"

Term.pClientData[iTermId].w_id;
}
else
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d
%-20s<BR>" 
                  "%-20s
%-20s<BR>" 
                  "%-20s %-2s %5.5s-%4.4s
%-20s %-2s %5.5s-%4.4s<BR> <BR>" 
                  "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>" 
                  "Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>" 
                  " %-20s
Credit: %-2s<BR>" 

Term.pClientData[iTermId].w_id,
pPaymentData->d_id
>w_street_1, pPaymentData->d_street_1
>w_street_2, pPaymentData->d_street_2
pPaymentData->w_state, pPaymentData->w_city,
pPaymentData->w_zip+
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+
pPaymentData->c_w_id, pPaymentData->c_d_id
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
>c_street_1, pPaymentData->c_credit
);

    c += sprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d
District: <INPUT NAME=\"DID\" SIZE=1><BR> <BR> <BR>
Customer: <INPUT
NAME="CID\" SIZE=4>" 
                  "Cust-Warehouse: <INPUT
NAME="CWI\" SIZE=4> "
                  "Cust-District: <INPUT
NAME="CDI\" SIZE=1><BR>" 
                  "Name:
<INPUT NAME="CLT\" SIZE=16>
Since:<BR>" 
                  " "
Credit:<BR>" 

```

```

Disc:<BR>" 
"
Phone:<BR> <BR>" 
"Amount Paid:
$<INPUT NAME="HAM\" SIZE=7>      New Cust-
Balance:<BR>" 
"Credit Limit:<BR>
<BR>Cust-Data: <BR> <BR> <BR> <BR>
<BR><font><PRE><HR>" 
                  "<INPUT TYPE=\"submit\" NAME="CMD\" VALUE="Process"><INPUT TYPE=\"submit\" NAME="CMD\" VALUE="Menu">" 
                  "</BODY></FORM></HTML>" 

Term.pClientData[iTermId].w_id;
}
else
{
    c += wsprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d
%-20s<BR>" 
                  "%-20s
%-20s<BR>" 
                  "%-20s %-2s %5.5s-%4.4s
%-20s %-2s %5.5s-%4.4s<BR> <BR>" 
                  "Customer: %4.4d Cust-
Warehouse: %6.6d Cust-District: %2.2d<BR>" 
                  "Name: %-16s %-2s %-
16s Since: %2.2d-%2.2d-%4.4d<BR>" 
                  " %-20s
Credit: %-2s<BR>" 

Term.pClientData[iTermId].w_id,
pPaymentData->d_id
>w_street_1, pPaymentData->d_street_1
>w_street_2, pPaymentData->d_street_2
pPaymentData->w_state, pPaymentData->w_city,
pPaymentData->w_zip+
pPaymentData->d_state, pPaymentData->d_zip,
pPaymentData->d_zip+
pPaymentData->c_w_id, pPaymentData->c_d_id
>c_first, pPaymentData->c_middle, pPaymentData-
>c_last
>c_since.day, pPaymentData->c_since.month,
pPaymentData->c_since.year
>c_street_1, pPaymentData->c_credit
);

    c += sprintf(szForm+c,
                  "<BR> <BR>Warehouse:
%6.6d
%-20s
%%Disc: %5.2f<BR>",

```

```

    pPaymentData-
>c_street_2, 100.0*pPaymentData->c_discount);

    c += wsprintf(szForm+c,
                  "                %-20s %-2s
$5.5s-$4.4s      Phone:   $6.6s-$3.3s+$3.3s-$4.4s<BR>
<BR>",
                  pPaymentData->c_state, pPaymentData->c_zip,
pPaymentData->c_zip+5,
                  pPaymentData->c_phone,
pPaymentData->c_phone+6, pPaymentData->c_phone+9,
pPaymentData->c_phone+12 );

    c += sprintf(szForm+c,
                  "Amount Paid:
$%7.2f      New Cust-Balance: $%14.2f<BR>
                  "Credit Limit:
$%13.2f<BR> <BR>",
                  pPaymentData-
>h_amount, pPaymentData->c_balance
                  , pPaymentData-
>c_credit_lim
                  );
}

if ( pPaymentData->c_credit[0] == 'B' && pPaymentData->c_credit[1] == 'C' )
    c += wsprintf(szForm+c,
                  "Cust-Data: %-50.50s<BR>      %
50.50s<BR>      %
50.50s<BR>",

    pPaymentData->c_data, pPaymentData-
>c_data+50, pPaymentData->c_data+100, pPaymentData-
>c_data+150 );
else
    strcpy(szForm+c, "Cust-
Data: <BR> <BR> <BR>");

    strcat(szForm,
                  "
<BR></font></PRE><HR>

    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..NewOrder..\">>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Payment..\">>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Delivery..\">>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Order-Status..\">>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Stock-Level..\">>
    "<INPUT TYPE=\"submit\" NAME=\"CMD\"
VALUE=\"..Exit..\">>
}

```

```

    }

/* FUNCTION: MakeOrderStatusForm
 *
 * COMMENTS: The internal client buffer is
 * created when the terminal id is assigned and should
 * not
 *           be freed
 * except when the client terminal id is no longer
 * needed.
 */

void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm)
{
    int i, c;
    static char szBR[] = "<BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR> <BR>";

    c = wsprintf(szForm,
                  "<HTML><HEAD><TITLE>TPC-C Order-
Status</TITLE></HEAD><BODY>"
                  "<FORM ACTION=\"tpcc.dll\""
METHOD=\\\"GET\\\">"
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"STATUSID\\\" VALUE=\\\"0\\\">
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"ERROR\\\" VALUE=\\\"0\\\">
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"FORMID\\\" VALUE=\\\"%d\\\">
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"TERMID\\\" VALUE=\\\"%d\\\">
                  "<INPUT TYPE=\"hidden\""
NAME=\\\"SYNCID\\\" VALUE=\\\"%d\\\">
                  "<PRE><font face=\\\"Courier\\\">
Order-Status<BR>
                  "Warehouse: %6.6d      ",
                  ORDER_STATUS_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id);

    if ( bInput )
    {
        strcpy(szForm+c,
                  "District: <INPUT
NAME=\\\"DID\\\" SIZE=1><BR>"           "Customer: <INPUT
NAME=\\\"CID\\\" SIZE=4>      Name:
<INPUT NAME=\\\"CLT\\\" SIZE=23><BR>
                  "Cust-Balance:<BR>
<BR>"                                     "Order-Number:
Entry-Date:                                         Carrier-
Number:<BR>"                                     "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR> <BR> <BR>
<BR>"                                     " <BR> <BR> <BR> <BR>
<BR> <BR> <BR> <BR> <BR> <BR></font></PRE>"
}

```

```

    "<HR><INPUT
TYPE=\\\"submit\\\" NAME=\\\"CMD\\\" VALUE=\\\"Process\\\"><INPUT
TYPE=\\\"submit\\\" NAME=\\\"CMD\\\" VALUE=\\\"Menu\\\">
                  "</BODY></FORM></HTML\\\""
);
}
else
{
    c += wsprintf(szForm+c,
                  "District: %2.2d<BR>"           "Customer: %4.4d
Name: %16s %-2s %16s<BR>",
                  pOrderStatusData->d_id,
pOrderStatusData->c_id,
pOrderStatusData-
>c_first, pOrderStatusData->c_middle,
pOrderStatusData->c_last);

    c += sprintf(szForm+c, "Cust-
Balance: $%9.2f<BR> <BR>",
                  pOrderStatusData-
>c_balance);

    c += wsprintf(szForm+c,
                  "Order-Number: %8.8d
Entry-Date: %2.2d-%2.2d-%4.4d %2.2d.%2.2d.%2.2d
Carrier-Number: %2.2d<BR>"           "Supply-W      Item-Id
Qty      Amount      Delivery-Date<BR> <BR> <BR>
>o_entry_d.day,                               pOrderStatusData->o_id,
pOrderStatusData-
>o_entry_d.month,                            pOrderStatusData-
>o_entry_d.year,                            pOrderStatusData-
>o_entry_d.hour,                            pOrderStatusData-
>o_entry_d.minute,                          pOrderStatusData-
>o_entry_d.second,                          pOrderStatusData-
>o_carrier_id);                            pOrderStatusData-
for(i=0; i < pOrderStatusData-
>o.ol_cnt; i++)
{
    c += sprintf(szForm+c,
                  "%6.6d      %6.6d      %2.2d      $%8.2f      %2.2d-
$2.2d-%4.4d<BR>",
                  pOrderStatusData->OL[i].ol_supply_w_id,
pOrderStatusData->OL[i].ol_i_id,
pOrderStatusData->OL[i].ol_quantity,
pOrderStatusData->OL[i].ol_amount,
pOrderStatusData->OL[i].ol_delivery_d.day,
}

```

```

        pOrderStatusData-
>OL[i].ol_delivery_d.month,
        pOrderStatusData-
>OL[i].ol_delivery_d.year;
    }

    strncpy( szForm+c, szBR, (15-i)*5
);
    c += (15-i)*5;
    strcpy(szForm+c,
        "</font></PRE><HR><INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..NewOrder..\">"
        "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Payment..\">"
        "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Delivery..\">"
        "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Order-Status..\">"
        "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Stock-Level..\">"
        "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Exit..\">"
        "</BODY></FORM></HTML>"
);
}

/* FUNCTION: MakeDeliveryForm
*
* COMMENTS: The internal client buffer is
created when the terminal id is assigned and should
not
* be freed
except when the client terminal id is no longer
needed.
*/
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm)
{
    int      c;

    c = wsprintf(szForm,
        "<HTML><HEAD><TITLE>TPC-C
Delivery</TITLE></HEAD><BODY>""
        "<FORM ACTION=\"tpcc.dll\""
METHOD=\"GET\">""
        "<INPUT TYPE=\"hidden\""
NAME=\"STATUSID\" VALUE=\"%d\">""
        "<INPUT TYPE=\"hidden\""
NAME=\"ERROR\" VALUE=\"0\">""
        "<INPUT TYPE=\"hidden\""
NAME=\"FORMID\" VALUE=\"%d\">""
        "<INPUT TYPE=\"hidden\""
NAME=\"TERMINAL\" VALUE=\"%d\">""
        "<INPUT TYPE=\"hidden\""
NAME=\"SYNCID\" VALUE=\"%d\">""
        "<PRE><font face=\"Courier\">
Delivery<BR>"

```

```

        "Warehouse: %6.6d<BR> <BR>",
        (!bInput && (pDeliveryData-
>exec_status_code != eOK)) ? ERR_TYPE_DELIVERY_POST :
0,
        DELIVERY_FORM, iTermId,
Term.pClientData[iTermId].iSyncId,
Term.pClientData[iTermId].w_id;

        if ( bInput )
    {
        strcpy( szForm+c,
            "Carrier Number: <INPUT
NAME=\"OCD*\" SIZE=1><BR> <BR>"
            "Execution Status: <BR>
<BR> <BR> <BR> <BR> <BR>""
            "<BR> <BR> <BR> <BR> <BR>""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"Process..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"Menu..\">""
            "</BODY></FORM></HTML>"
);
    }
    else
    {
        wsprintf( szForm+c,
            "Carrier Number:
%2.2d<BR> <BR>""
            "Execution Status: %s
<BR> <BR> <BR> <BR> <BR> <BR> <BR>""
            "<BR> <BR> <BR> <BR> <BR> <BR> <BR>""
            "<HR><INPUT
TYPE=\"submit\" NAME=\"CMD\" VALUE=\"..NewOrder..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Payment..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Delivery..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Order-Status..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Stock-Level..\">""
            "<INPUT TYPE=\"submit\""
NAME=\"CMD\" VALUE=\"..Exit..\">""
            "</BODY></FORM></HTML>""
            , pDeliveryData-
>o_carrier_id,
            (pDeliveryData-
>exec_status_code == eOK) ? "Delivery has been
queued." : "Delivery Post Failed"
        );
    }
}

/* FUNCTION: ProcessNewOrderForm
*
* PURPOSE: This function gets and validates
the input data from the new order form
* filling in the required
input variables. it then calls the SQLNewOrder

```

```

        *
transaction, constructs
the output form and writes it back to client
browser.
*/
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
    *pECB, int iTermId, char *szBuffer)
{
    PNEW_ORDER_DATA          pNewOrder;
    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    ZeroMemory(pNewOrder,
sizeof(NEW_ORDER_DATA));
    pNewOrder->w_id =
Term.pClientData[iTermId].w_id;
    GetNewOrderData(pECB->lpszQueryString,
pNewOrder);

    Term.pClientData[iTermId].pTxn->NewOrder();

    pNewOrder = Term.pClientData[iTermId].pTxn-
>BuffAddr_NewOrder();
    MakeNewOrderForm(iTermId, pNewOrder,
OUTPUT_FORM, szBuffer );
}

/* FUNCTION: void ProcessPaymentForm
*
* PURPOSE: This function gets and validates
the input data from the payment form
* filling in the required
input variables. It then calls the SQLPayment
* transaction, constructs
the output form and writes it back to client
browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
    *pECB passed in structure pointer from
inetsrv.
*
int
iTermId client browser terminal id
*/
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
    *pECB, int iTermId, char *szBuffer)
{
    PPAYMENT_DATA          pPayment;
    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    ZeroMemory(pPayment, sizeof(PAYMENT_DATA));
    pPayment->w_id =
Term.pClientData[iTermId].w_id;
    GetPaymentData(pECB->lpszQueryString,
pPayment);

    Term.pClientData[iTermId].pTxn->Payment();
}

```

```

    pPayment = Term.pClientData[iTermId].pTxn-
>BuffAddr_Payment();
    MakePaymentForm(iTermId, pPayment,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessOrderStatusForm
*
* PURPOSE: This function gets and validates
the input data from the Order Status
*           form filling in the
required input variables. It then calls the
*           SQLOrderStatus
transaction, constructs the output form and writes it
*           back to client browser.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    PORDER_STATUS_DATA pOrderStatus;

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    ZeroMemory(pOrderStatus,
sizeof(ORDER_STATUS_DATA));
    pOrderStatus->w_id =
Term.pClientData[iTermId].w_id;
    GetOrderStatusData(pECB->lpszQueryString,
pOrderStatus);

    Term.pClientData[iTermId].pTxn-
>OrderStatus();

    pOrderStatus =
Term.pClientData[iTermId].pTxn-
>BuffAddr_OrderStatus();
    MakeOrderStatusForm(iTermId, pOrderStatus,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessDeliveryForm
*
* PURPOSE: This function gets and validates
the input data from the delivery form
*           filling in the required
input variables. It then calls the PostDeliveryInfo
*           Api, The client is then
informed that the transaction has been posted.
*
* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.

```

```

*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB->lpszQueryString;
    PDELIVERY_DATA pDelivery;

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    ZeroMemory(pDelivery,
sizeof(DELIVERY_DATA));
    pDelivery->w_id =
Term.pClientData[iTermId].w_id;

    pDelivery->o_carrier_id =
GetIntKeyValue(&ptr, "OCD**",
ERR_DELIVERY_MISSING_OCD_KEY,
ERR_DELIVERY_CARRIER_INVALIDID);
    if ( pDelivery->o_carrier_id > 10 || 
pDelivery->o_carrier_id < 1 )
        throw new CWEBCLNT_ERR(
ERR_DELIVERY_CARRIER_ID_RANGE );

    if (dwNumDeliveryThreads)
    {
        //post delivery info
        if ( PostDeliveryInfo(pDelivery-
>w_id, pDelivery->o_carrier_id) )
            pDelivery-
>exec_status_code = eDeliveryFailed;
        else
            pDelivery-
>exec_status_code = eOK;
    }
    else // delivery is done synchronously if
no delivery threads configured
    Term.pClientData[iTermId].pTxn-
>Delivery();

    pDelivery = Term.pClientData[iTermId].pTxn-
>BuffAddr_Delivery();
    MakeDeliveryForm(iTermId, pDelivery,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: ProcessStockLevelForm
*
* PURPOSE: This function gets and validates
the input data from the Stock Level
*           form filling in the
required input variables. It then calls the
*           SQLStockLevel
transaction, constructs the output form and writes it
*           back to client browser.
*
```

```

* ARGUMENTS: EXTENSION_CONTROL_BLOCK
*           *pECB passed in structure pointer from
inetsrv.
*
*           int
*
*           iTermId client browser terminal id
*/
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer)
{
    char *ptr = pECB-
>lpszQueryString;
    PSTOCK_LEVEL_DATA pStockLevel;

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    ZeroMemory( pStockLevel,
sizeof(STOCK_LEVEL_DATA) );
    pStockLevel->w_id =
Term.pClientData[iTermId].w_id;
    pStockLevel->d_id =
Term.pClientData[iTermId].d_id;
    pStockLevel->threshold =
GetIntKeyValue(&ptr, "TT**",
ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
ERR_STOCKLEVEL_THRESHOLD_INVALIDID);
    if ( pStockLevel->threshold >= 100 || 
pStockLevel->threshold < 0 )
        throw new CWEBCLNT_ERR(
ERR_STOCKLEVEL_THRESHOLD_RANGE );

    Term.pClientData[iTermId].pTxn-
>StockLevel();

    pStockLevel =
Term.pClientData[iTermId].pTxn-
>BuffAddr_StockLevel();
    MakeStockLevelForm(iTermId, pStockLevel,
OUTPUT_FORM, szBuffer);
}

/* FUNCTION: GetNewOrderData
*
* PURPOSE: This function extracts and
validates the new order form data from an http
command string.
*
* ARGUMENTS: LPSTR lpszQueryString client
browser http command string
*
*           NEW_ORDER_DATA *pNewOrderData
pointer to new order data structure
*
*/
```

```

void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData)
{
    char      szTmp[26];
    int          i;
    short     items;
    int          ol_i_id, ol_quantity;
    char      *ptr = lpszQueryString;

    static char szSP[MAX_OL_NEW_ORDER_ITEMS][6]
= {
        { "SP00*", "SP01*", "SP02*",
"SP03*", "SP04*", "SP05*", "SP06*", "SP07*",
"SP08*", "SP09*", "SP10*", "SP11*", "SP12*",
"SP13*", "SP14*" },
        static char
szIID[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "IID00*", "IID01*", "IID02*",
"IID03*", "IID04*", "IID05*", "IID06*", "IID07*",
"IID08*", "IID09*", "IID10*", "IID11*", "IID12*",
"IID13*", "IID14*" },
        static char
szQty[MAX_OL_NEW_ORDER_ITEMS][7] =
        { "Qty00*", "Qty01*", "Qty02*",
"Qty03*", "Qty04*", "Qty05*", "Qty06*", "Qty07*",
"Qty08*", "Qty09*", "Qty10*", "Qty11*", "Qty12*",
"Qty13*", "Qty14*" };

    pNewOrderData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_NEORDER_FORM_MISSING_DID,
ERR_NEORDER_DISTRICT_INVALID);
    pNewOrderData->c_id = GetIntKeyValue(&ptr,
"CID*", ERR_NEORDER_CUSTOMER_KEY,
ERR_NEORDER_CUSTOMER_INVALID);

    for(i=0, items=0; i<MAX_OL_NEW_ORDER_ITEMS;
i++)
    {
        GetKeyValue(&ptr, szSP[i], szTmp,
sizeof(szTmp), ERR_NEORDER_MISSING_SUPPW_KEY);
        if ( szTmp[0] )
        {
            if ( !IsNumeric(szTmp)
)
                throw new
CWEBCLNT_ERR( ERR_NEORDER_SUPPW_INVALID );
            pNewOrderData-
>OL[items].ol_supply_w_id = atoi(szTmp);

            ol_i_id =
pNewOrderData->OL[items].ol_i_id =
GetIntKeyValue(&ptr, szIID[i],
ERR_NEORDER_MISSING_IID_KEY,
ERR_NEORDER_ITEMID_INVALID);
            if ( ol_i_id > 999999
|| ol_i_id < 1 )

```

```

throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_RANGE );
ol_quantity =
pNewOrderData->OL[items].ol_quantity =
GetIntKeyValue(&ptr, szQty[i],
ERR_NEORDER_MISSING_QTY_KEY,
ERR_NEORDER_QTY_INVALID);
if ( ol_quantity > 99
|| ol_quantity < 1 )
throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_RANGE );
items++;
else
{
    // nothing entered for
supply warehouse, so item id and qty must also be
blank
    GetKeyValue(&ptr,
szIID[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_IID_KEY);
    if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEORDER_ITEMID_WITHOUT_SUPPW );
    GetKeyValue(&ptr,
szQty[i], szTmp, sizeof(szTmp),
ERR_NEORDER_MISSING_QTY_KEY);
    if ( szTmp[0] )
throw new
CWEBCLNT_ERR( ERR_NEORDER_QTY_WITHOUT_SUPPW );
}
if ( items == 0 )
throw new CWEBCLNT_ERR(
ERR_NEORDER_NOITEMS_ENTERED );
pNewOrderData->o.ol_cnt = items;
}

/* FUNCTION: GetPaymentData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*
* ARGUMENTS: LPSTR
lpszQueryString           client
browser http command string
*           *pPaymentData           PAYMENT_DATA
payment data structure
*/
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    BOOL     bCustIdBlank;
    int          iLen;

```

```

pPaymentData->d_id = GetIntKeyValue(&ptr,
"DID*", ERR_PAYMENT_MISSING_DID_KEY,
ERR_PAYMENT_DISTRICT_INVALID);

GetKeyValue(&ptr, "CID*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CID_KEY);
if ( szTmp[0] == 0 )
{
    bCustIdBlank = TRUE;
    pPaymentData->c_id = 0;
}
else
{
    // parse customer id and verify
that last name was NOT entered
    bCustIdBlank = FALSE;
    if ( !IsNumeric(szTmp) )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_CUSTOMER_INVALID );
    pPaymentData->c_id = atoi(szTmp);
}

pPaymentData->c_w_id = GetIntKeyValue(&ptr,
"CWI*", ERR_PAYMENT_MISSING_CWI_KEY,
ERR_PAYMENT_CWI_INVALID);
pPaymentData->c_d_id = GetIntKeyValue(&ptr,
"CDI*", ERR_PAYMENT_MISSING_CDI_KEY,
ERR_PAYMENT_CDI_INVALID);

if ( bCustIdBlank )
{
    // customer id is blank, so last
name must be entered
    GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] == 0 )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_MISSING_CID_CLT );

_strupr( szTmp );
if ( strlen(szTmp) >
LAST_NAME_LEN )
throw new CWEBCLNT_ERR(
ERR_PAYMENT_LAST_NAME_TO_LONG );
strcpy(pPaymentData->c_last,
szTmp);
// pad with spaces so that the
client layer doesn't have to do it
// before passing parameters to
stored procedure
iLen = strlen(pPaymentData-
>c_last);
memset(pPaymentData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
pPaymentData-
>c_last[LAST_NAME_LEN] = 0;
}
else
{
    // parse customer id and verify
that last name was NOT entered
    GetKeyValue(&ptr, "CLT*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_CLT_KEY);
    if ( szTmp[0] != 0 )

```

```

        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_CID_AND_CLT );
    }

    GetKeyValue(&ptr, "HAM*", szTmp,
sizeof(szTmp), ERR_PAYMENT_MISSING_HAM_KEY);
    if (!IsDecimal(szTmp))
        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_HAM_INVALID );
    pPaymentData->h_amount = atof(szTmp);
    if (pPaymentData->h_amount >= 10000.00 ||
pPaymentData->h_amount < 0 )
        throw new CWEBCLNTE_ERR(
ERR_PAYMENT_HAM_RANGE );
}

/* FUNCTION: GetOrderStatusData
*
* PURPOSE: This function extracts and
validates the payment form data from an http command
string.
*/
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData)
{
    char      szTmp[26];
    char      *ptr = lpszQueryString;
    int       iLen;

    pOrderStatusData->d_id =
GetIntKeyValue(&ptr, "DID",
ERR_ORDERSTATUS_MISSING_DID_KEY,
ERR_ORDERSTATUS_DID_INVALID);

    GetKeyValue(&ptr, "CID",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CID_KEY);
    if (szTmp[0] == 0 )
    {
        // customer id is blank, so last
name must be entered
        pOrderStatusData->c_id = 0;
        GetKeyValue(&ptr, "CLT",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if (szTmp[0] == 0 )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_MISSING_CID_CLT );

        _strupr( szTmp );
        if ( strlen(szTmp) >
LAST_NAME_LEN )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CLT_RANGE );

        strcpy(pOrderStatusData->c_last,
szTmp);
        // pad with spaces so that the
client layer doesn't have to do it
        // before passing parameters to
stored procedure
        iLen = strlen(pOrderStatusData-
>c_last);
        memset(pOrderStatusData->c_last +
iLen, ' ', LAST_NAME_LEN - iLen);
    }
}

```

```

        pOrderStatusData-
>c_last[LAST_NAME_LEN] = 0;
    }
    else
    {
        // parse customer id and verify
that last name was NOT entered
        if ( !IsNumeric(szTmp) )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CID_INVALID );
        pOrderStatusData->c_id =
atoi(szTmp);
        GetKeyValue(&ptr, "CLT",
szTmp, sizeof(szTmp), ERR_ORDERSTATUS_MISSING_CLT_KEY);
        if (szTmp[0] != 0 )
            throw new CWEBCLNTE_ERR(
ERR_ORDERSTATUS_CID_AND_CLT );
    }

/* FUNCTION: BOOL IsNumeric(char *ptr)
*
* PURPOSE: This function determines if a
string is numeric. It fails if any characters other
than numeric and null
terminator are present.
*
* ARGUMENTS:     char
*                  *ptr   pointer to string to check.
*
* RETURNS:          BOOL      FALSE      if
string is not all numeric
*
*                  TRUE      if string contains only numeric
characters i.e. '0' - '9'
*/
BOOL IsNumeric(char *ptr)
{
    if ( *ptr == 0 )
        return FALSE;

    while( *ptr && isdigit(*ptr) )
        ptr++;
    return ( !ptr );
}

/* FUNCTION: BOOL IsDecimal(char *ptr)
*
* PURPOSE: This function determines if a
string is a non-negative decimal value.
* It fails if any characters other than a
series of numbers followed by
* a decimal point,
another series of numbers, and a null terminator are
present.
*
* ARGUMENTS:     char
*                  *ptr   pointer to string to check.
*
* RETURNS:          BOOL      FALSE      if
string is not a valid non-negative decimal value
*/

```

```

*          TRUE      if string is OK
*/
BOOL IsDecimal(char *ptr)
{
    char *dotptr;
    BOOL bValid;

    if ( *ptr == 0 )
        return FALSE;

    // find decimal point
    dotptr = strchr( ptr, '.' );
    if (dotptr == NULL)
        // no decimal point, so just
check for numeric
        return IsNumeric(ptr);
    *dotptr = 0; // temporarily replace
decimal with a terminator

    if ( *ptr != 0 )
        bValid = IsNumeric(ptr);
    // string starts with decimal point
    else if ( *(dotptr+1) == 0 )
        return FALSE; // nothing but a
decimal point is bad
    else
        bValid = TRUE;

    if ( *(dotptr+1) != 0 )
        // check text after decimal point
        bValid &= IsNumeric(dotptr+1);

    *dotptr = '.'; // replace decimal point
    return bValid;
}

```

tpcc.def

LIBRARY TPCC.DLL

EXPORTS

```

GetExtensionVersion @1
HttpExtensionProc @2
TerminateExtension @3

```

tpcc.h

```

/* FILE:           TPCC.H
* Microsoft
TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99

```

```

/*
 * PURPOSE: Header file for ISAPI TPCC.DLL,
 defines structures and functions used in the isapi
 tpcc.dll.
 */
/*  

//VERSION RESOURCE DEFINES  

#define _APS_NEXT_RESOURCE_VALUE  

        101  

#define _APS_NEXT_COMMAND_VALUE  

        40001  

#define _APS_NEXT_CONTROL_VALUE  

        1000  

#define _APS_NEXT_SYMED_VALUE  

        101  

#define TP_MAX_RETRIES  

        50  

//note that the welcome form must be processed first
as terminal ids assigned here, once the
//terminal id is assigned then the forms can be
processed in any order.
#define WELCOME_FORM  

        1  

    //beginning form no term id assigned, form
id  

#define MAIN_MENU_FORM  

        2  

    //term id assigned main menu form id
#define NEW_ORDER_FORM  

        3  

    //new order form id
#define PAYMENT_FORM  

        4  

    //payment form id
#define DELIVERY_FORM  

        5  

    //delivery form id
#define ORDER_STATUS_FORM  

        6  

    //order
status id  

#define STOCK_LEVEL_FORM  

        7  

    //stock level
form id  

//This macro is used to prevent the compiler error
unused formal parameter
#define UNUSEDPARAM(x) (x = x)  

//This structure defines the data necessary to keep
distinct for each terminal or client connection.
typedef struct _CLIENTDATA
{
    int iNextFree; //index of
next free element or -1 if this entry in use.
    int w_id; //warehouse
id assigned at welcome form

```

```

        int d_id; //district id
assigned at welcome form

        int iSyncId; //synchronization id
        int iTickCount; //time of
last access;

        CTPCC_BASE *pTxn;
} CLIENTDATA, *PCLIENTDATA;

//This structure is used to define the operational
interface for terminal id support
typedef struct _TERM
{
    int iNumEntries;

    //total allocated terminal array entries
    int iFreeList;

    //next available terminal array element or
-1 if none
    int iMasterSyncId; //synchronization id
    CLIENTDATA *pClientData; //pointer to
allocated client data
} TERM;

typedef TERM *PTERM; //pointer to
terminal structure type

enum WEBERROR
{
    NO_ERR,
    ERR_COMMAND_UNDEFINED,
    ERR_D_ID_INVALID,
    ERR_DELIVERY_CARRIER_ID_RANGE,
    ERR_DELIVERY_CARRIER_INVALID,
    ERR_DELIVERY_MISSING_OCD_KEY,
    ERR_DELIVERY_THREAD_FAILED,
    ERR_GETPROCADDR_FAILED,
    ERR_HTML_ILL_FORMED,
    ERR_INVALID_SYNC_CONNECTION,
    ERR_INVALID_TERMID,
    ERR_LOADDLL_FAILED,
    ERR_MAX_CONNECTIONS_EXCEEDED,
    ERR_MEM_ALLOC_FAILED,
    ERR_MISSING_REGISTRY_ENTRIES,
    ERR_NEORDER_CUSTOMER_INVALID,
    ERR_NEORDER_CUSTOMER_KEY,
    ERR_NEORDER_DISTRICT_INVALID,
    ERR_NEORDER_FORM_MISSING_DID,
    ERR_NEORDER_ITEMID_INVALID,
    ERR_NEORDER_ITEMID_RANGE,
    ERR_NEORDER_ITEMID_WITHOUT_SUPPW,
    ERR_NEORDER_MISSING_IID_KEY,
    ERR_NEORDER_MISSING_QTY_KEY,
    ERR_NEORDER_MISSING_SUPPW_KEY,
    ERR_NEORDER_NOITEMS_ENTERED,
    ERR_NEORDER_QTY_INVALID,
    ERR_NEORDER_QTY_RANGE,
    ERR_NEORDER_QTY_WITHOUT_SUPPW,
    ERR_NEORDER_SUPPW_INVALID,
    ERR_NO_SERVER_SPECIFIED,
    ERR_ORDERSTATUS_CID_AND_CLT,
    ERR_ORDERSTATUS_CID_INVALID,
    ERR_ORDERSTATUS_CLT_RANGE,
    ERR_ORDERSTATUS_DID_INVALID,
    ERR_ORDERSTATUS_MISSING_CID_CLT,
    ERR_ORDERSTATUS_MISSING_CID_KEY,
    ERR_ORDERSTATUS_MISSING_CLT_KEY,
    ERR_ORDERSTATUS_MISSING_DID_KEY,
    ERR_PAYMENT_CDI_INVALID,
    ERR_PAYMENT_CID_AND_CLT,
    ERR_PAYMENT_CUSTOMER_INVALID,
    ERR_PAYMENT_CWI_INVALID,
    ERR_PAYMENT_DISTRICT_INVALID,
    ERR_PAYMENT_HAM_INVALID,
    ERR_PAYMENT_HAM_RANGE,
    ERR_PAYMENT_LAST_NAME_TO_LONG,
    ERR_PAYMENT_MISSING_CDI_KEY,
    ERR_PAYMENT_MISSING_CID_CLT,
    ERR_PAYMENT_MISSING_CID_KEY,
    ERR_PAYMENT_MISSING_CLT,
    ERR_PAYMENT_MISSING_CLT_KEY,
    ERR_PAYMENT_MISSING_CWI_KEY,
    ERR_PAYMENT_MISSING_DID_KEY,
    ERR_PAYMENT_MISSING_HAM_KEY,
    ERR_STOCKLEVEL_MISSING_THRESHOLD_KEY,
    ERR_STOCKLEVEL_THRESHOLD_INVALID,
    ERR_STOCKLEVEL_THRESHOLD_RANGE,
    ERR_VERSION_MISMATCH,
    ERR_W_ID_INVALID
};

class CWEBCLNTErr : public CBaseErr
{
public:
    CWEBCLNTErr(WEBERROR Err)
    {
        m_Error = Err;
        m_szTextDetail = NULL;
        m_SystemErr = 0;
        m_szErrorText = NULL;
    }

    CWEBCLNTErr(WEBERROR Err, char
*szTextDetail, DWORD dwSystemErr)
    {
        m_Error = Err;
        m_szTextDetail = new
char[strlen(szTextDetail)+1];
        strcpy( m_szTextDetail,
szTextDetail );
    }
};

```

```

dwSystemErr;
{
    m_SystemErr =
    m_szErrorText = NULL;
}

~CWEBCLNT_ERR()
{
    if (m_szTextDetail != NULL)
        delete []
m_szTextDetail;
    if (m_szErrorText != NULL)
        delete []
m_szErrorText;
}

WEBERROR m_Error;
char *m_szTextDetail; // char
*m_szErrorText;
DWORD m_SystemErr;

int ErrorType() { return
ERR_TYPE_WEBDLL; }
char *ErrorTypeStr() { return
"WEBCLIENT"; }
int ErrorNum() { return m_Error; }
char *ErrorText();

};

//These constants have already been defined in
engstut.h, but since we do
//not want to include it in the delisrv executable
#define TXN_EVENT_START 2
#define TXN_EVENT_STOP 4
#define TXN_EVENT_WARNING 6
//used to record a warning into the log

//function prototypes

BOOL APIENTRY DllMain(HANDLE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved);
void WriteMessageToEventLog(LPTSTR lpszMsg);
void ProcessQueryString(EXTENSION_CONTROL_BLOCK
*pECB, int *pCmd, int *pFormId, int *pTermId, int
*pSyncid);
void WelcomeForm(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void SubmitCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void BeginCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void ProcessCmd(EXTENSION_CONTROL_BLOCK *pECB, int
iFormId, int iTermId);
void StatsCmd(EXTENSION_CONTROL_BLOCK *pECB, char
*szBuffer);
void ErrorMessage(EXTENSION_CONTROL_BLOCK *pECB, int
iError, int iErrorType, char *szMsg, int iTermId);
void GetKeyValue(char **pQueryString, char *pKey,
char *pValue, int iMax, WEBERROR err);

```

```

int GetIntKeyValue(char **pQueryString, char *pKey,
WEBERROR NoKeyErr, WEBERROR NotIntErr);
void TermInit(void);
void TermDeleteAll(void);
int TermAdd(void);
void TermDelete(int id);
void ErrorForm(EXTENSION_CONTROL_BLOCK *pECB, int
iType, int iErrorNum, int iTermId, int iSyncId, char
*szErrorText, char *szBuffer );
void MakeMainMenuForm(int iTermId, int iSyncId, char
*szForm);
void MakeStockLevelForm(int iTermId, STOCK_LEVEL_DATA
*pStockLevelData, BOOL bInput, char *szForm);
void MakeNewOrderForm(int iTermId, NEW_ORDER_DATA
*pNewOrderData, BOOL bInput, char *szForm);
void MakePaymentForm(int iTermId, PAYMENT_DATA
*pPaymentData, BOOL bInput, char *szForm);
void MakeOrderStatusForm(int iTermId,
ORDER_STATUS_DATA *pOrderStatusData, BOOL bInput,
char *szForm);
void MakeDeliveryForm(int iTermId, DELIVERY_DATA
*pDeliveryData, BOOL bInput, char *szForm);
void ProcessNewOrderForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessPaymentForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessOrderStatusForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessDeliveryForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void ProcessStockLevelForm(EXTENSION_CONTROL_BLOCK
*pECB, int iTermId, char *szBuffer);
void GetNewOrderData(LPSTR lpszQueryString,
NEW_ORDER_DATA *pNewOrderData);
void GetPaymentData(LPSTR lpszQueryString,
PAYMENT_DATA *pPaymentData);
void GetOrderStatusData(LPSTR lpszQueryString,
ORDER_STATUS_DATA *pOrderStatusData);
BOOL PostDeliveryInfo(long w_id, short o_carrier_id);
BOOL IsNumeric(char *ptr);
BOOL IsDecimal(char *ptr);
void DeliveryWorkerThread(void *ptr);
// Separate function to be able to use Win32
exception handling in
// HttpExtensionProc.
void ProcessCommand(EXTENSION_CONTROL_BLOCK *pECB,
char* szBuffer, int& TermId, int& iSyncId);

```

tpcc.rc

```

//Microsoft Developer Studio generated resource
script.
//
#include "resource.h"

#define APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
// Generated from the TEXTINCLUDE 2 resource.
//
#include "afxres.h"

```

```

///////////////////////////////
#ifndef APSTUDIO_READONLY_SYMBOLS
///////////////////////////////
// English (U.S.) resources

#if !defined(AFX_RESOURCE_DLL) || defined(AFX_TARG_ENU)
#define _WIN32
LANGUAGE LANG_ENGLISH, SUBLANG_ENGLISH_US
#pragma code_page(1252)
#endif // _WIN32

#ifndef _MAC
///////////////////////////////
///////////////////////////////
// Version
//

VS_VERSION_INFO VERSIONINFO
FILEVERSION 0,4,0,0
PRODUCTVERSION 0,4,0,0
FILEFLAGSMASK 0x3fL
#endif // _DEBUG
FILEFLAGS 0x1L
#else
FILEFLAGS 0x0L
#endif
FILEOS 0x40004L
FILETYPE 0x2L
FILESUBTYPE 0x0L
BEGIN
BLOCK "StringFileInfo"
BEGIN
BLOCK "040904b0"
BEGIN
VALUE "Comments", "TPC-C HTML DLL"
Server\0
VALUE "CompanyName", "Microsoft\0"
VALUE "FileDescription", "TPC-C HTML DLL"
Server\0"
VALUE "FileVersion", "0, 4, 0, 0\0"
VALUE "InternalName", "tpcc\0"
VALUE "LegalCopyright", "Copyright ©
1997\0"
VALUE "OriginalFilename", "tpcc.dll\0"
VALUE "ProductName", "Microsoft tpcc\0"
VALUE "ProductVersion", "0, 4, 0, 0\0"
END
BLOCK "VarFileInfo"
BEGIN
VALUE "Translation", 0x409, 1200
END
#endif
#endif // !_MAC

```

```

#ifndef APSTUDIO_INVOKED
//////////////\//////////////\//////////////\//////////////\//////////////
// TEXTINCLUDE
// TEXTINCLUDE DISCARDABLE
BEGIN
    "resource.h\0"
END

2 TEXTINCLUDE DISCARDABLE
BEGIN
    "#include ""afxres.h""\r\n"
    "\0"
END

3 TEXTINCLUDE DISCARDABLE
BEGIN
    "\r\n"
    "\0"
END

#endif // APSTUDIO_INVOKED

//////////////\//////////////\//////////////\//////////////\//////////////
// Dialog
//

IDD_DIALOG1 DIALOG DISCARDABLE 0, 0, 186, 95
STYLE DS_MODALFRAME | WS_POPUP | WS_CAPTION |
WS_SYSMENU
CAPTION "Dialog"
FONT 8, "MS Sans Serif"
BEGIN
    DEFPUSHBUTTON    "OK",IDOK,129,7,50,14
    PUSHBUTTON      "Cancel",IDCANCEL,129,24,50,14
END

//////////////\//////////////\//////////////\//////////////\//////////////
// DESIGNINFO
//

#ifdef APSTUDIO_INVOKED
GUIDELINES DESIGNINFO DISCARDABLE
BEGIN
    IDD_DIALOG1, DIALOG
    BEGIN
        LEFTMARGIN, 7
        RIGHTMARGIN, 179
        TOPMARGIN, 7
        BOTTOMMARGIN, 88
    END
#endif // APSTUDIO_INVOKED

```

```

#endif // English (U.S.) resources
//////////////\//////////////\//////////////\//////////////\//////////////

#ifndef APSTUDIO_INVOKED
//////////////\//////////////\//////////////\//////////////\/////////////
// Generated from the TEXTINCLUDE 3 resource.
//

//////////////\//////////////\//////////////\//////////////\/////////////
#endif // not APSTUDIO_INVOKED



---



## tpcc_com.cpp



```

/* FILE: TPCC_COM.CPP
 * Microsoft
TPC-C Kit Ver. 4.20.000
 * Copyright
Microsoft, 1999
 * All Rights Reserved
 *
 * not yet
audited
*
* PURPOSE: Source file for TPC-C COM+ class
implementation.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
* 4.20.000 - first version
*/
/*
// needed for CoInitializeEx
#define _WIN32_WINNT 0x0400

#include <windows.h>

// need to declare functions for export
#define DllDecl __declspec(dllexport)

#include "...\\common\\src\\trans.h"
//tpckit transaction header contains
definitions of structures specific to TPC-C
#include "...\\common\\src\\error.h"
#include "...\\common\\src\\txn_base.h"
#include "...\\common\\src\\tpcc_com_errorcode.h"
#include "tpcc_com.h"

#include "...\\tpcc_com_ps\\src\\tpcc_com_ps_i.c"
#include "...\\tpcc_com_all\\src\\tpcc_com_all_i.c"

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_COM* CTPCC_COM_new(BOOL
bSinglePool)

```


```

```

{
    return new CTPCC_COM(bSinglePool);
}

CTPCC_COM::CTPCC_COM(BOOL bSinglePool)
{
    HRESULT hr = NULL;
    long lRet = 0;
    ULONG ulTmpSize = 0;

    m_pTxn = NULL;
    m_pNewOrder = NULL;
    m_pPayment = NULL;
    m_pStockLevel = NULL;
    m_pOrderStatus = NULL;

    m_bSinglePool = bSinglePool;

    ulTmpSize = (ULONG) sizeof(COM_DATA);
    VariantInit(&m_vTxn);
    m_vTxn.vt = VT_SAFEARRAY;

    m_vTxn.parray =
SafeArrayCreateVector(VT_UI1, ulTmpSize, ulTmpSize);
    if (!m_vTxn.parray)
        throw new CCOMERR( E_FAIL );

    memset((void*)m_vTxn.parray-
>pvData, 0, ulTmpSize);
    m_pTxn = (COM_DATA*)m_vTxn.parray->pvData;

    hr = CoInitializeEx(NULL,
COINIT_MULTITHREADED);
    if (FAILED(hr))
    {
        throw new CCOMERR( hr );
    }

    // create components
    if (m_bSinglePool)
    {
        hr = CoCreateInstance(CLSID_TPCC,
NULL, CLSCTX_SERVER, IID_ITPCC, (void
**) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);

        // all txns will use same
component
        m_pPayment = m_pNewOrder;
        m_pStockLevel = m_pNewOrder;
        m_pOrderStatus = m_pNewOrder;
    }
    else
    {
        // use different components for
each txn
        hr =
CoCreateInstance(CLSID_NewOrder, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **) &m_pNewOrder);
        if (FAILED(hr))
            throw new CCOMERR(hr);
    }
}

```

```

        hr =
CoCreateInstance(CLSID_Payment, NULL, CLSCTX_SERVER,
IID_ITPCC, (void **)&m_pPayment);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_StockLevel, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pStockLevel);
if (FAILED(hr))
    throw new CCOMERR(hr);

        hr =
CoCreateInstance(CLSID_OrderStatus, NULL,
CLSCXTX_SERVER, IID_ITPCC, (void **)&m_pOrderStatus);
if (FAILED(hr))
    throw new CCOMERR(hr);
}

// call setcomplete to release each
component back into pool
hr = m_pNewOrder->CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

if (!m_bSinglePool)
{
    hr = m_pPayment-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

    hr = m_pStockLevel-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);

    hr = m_pOrderStatus-
>CallSetComplete();
if (FAILED(hr))
    throw new CCOMERR(hr);
}

CTPCC_COM::~CTPCC_COM()
{
    if (m_pTxn)
        SafeArrayDestroy(m_vTxn.parray);

    ReleaseInterface(m_pNewOrder);
    if (!m_bSinglePool)
    {
        ReleaseInterface(m_pPayment);
        ReleaseInterface(m_pStockLevel);
        ReleaseInterface(m_pOrderStatus);
    }
    CoUninitialize();
}

void CTPCC_COM::NewOrder()
{
    VARIANT             vTxn_out;

```

```

        HRESULT hr = m_pNewOrder->NewOrder(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::Payment()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pPayment->Payment(m_vTxn,
&vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::StockLevel()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pStockLevel-
>StockLevel(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )

```

```

            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}

void CTPCC_COM::OrderStatus()
{
    VARIANT             vTxn_out;

    HRESULT hr = m_pOrderStatus-
>OrderStatus(m_vTxn, &vTxn_out);

        if (FAILED(hr) && hr != E_TPCCCOM)
            throw new CCOMERR( hr ); // COM call didn't succeed and there is no output
structure

        memcpy(m_pTxn, (void *)vTxn_out.parray-
>pvData,vTxn_out.parray->rgsabound[0].cElements);
hr = SafeArrayDestroy(vTxn_out.parray);
if (hr != S_OK)
    throw new CCOMERR( hr );

        if ( m_pTxn->ErrorType != ERR_SUCCESS )
            throw new CCOMERR( m_pTxn-
>ErrorType, m_pTxn->error );
}



---



## tpcc_com.h



```

/* FILE: TPCC_COM.H
 * Microsoft
*TPC-C Kit Ver. 4.20.000
* Copyright
Microsoft, 1999
* All Rights Reserved
*
* not yet
audited
*
* PURPOSE: Header file for TPC-C COM+ class
implementation.
*
* Change history:
* 4.20.000 - first version
*/
#pragma once

#include <stdio.h>
#include "..\..\tpcc_com_ps\src\tpcc_com_ps.h"

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec(dllexport)
#endif

class CCOMERR : public CBaseErr
{
private:
 char m_szErrorText[64];

```


```

```

public:           // use this interface for genuine
COM errors       CCOMERR( HRESULT hr )
{
    m_hr = hr;
    m_iErrorType = 0;
    m_iError = 0;
}

// use this interface to
impersonate a non-COM error type
CCOMERR( int iErrorType, int
iError )
{
    m_iErrorType =
iErrorType;
    m_iError = iError;
    m_hr = S_OK;
}

int             m_hr;
int             m_iErrorType;
int             m_iError;

// A CCOMERR class can
impersonate another class, which happens if the error
// was not actually a COM
Services error, but was simply transmitted back via
COM.
int ErrorType()
{
    if (m_iErrorType == 0)
        return
ERR_TYPE_COM;
    else
        return
m_iErrorType;
}

char *ErrorTypeStr() { return
"COM"; }

int ErrorNum()
{
    if (m_iErrorType == 0)
        return m_hr;
    // return COM error
    else
        return
m_iError; // return impersonated error
}

char *ErrorText()
{
    if (m_hr == S_OK)
        sprintf(
m_szErrorText, "Error: Class %d, error # %d",
m_iErrorType, m_iError );
    else
        sprintf(
m_szErrorText, "Error: COM HRESULT %x", m_hr );
}

```

```

};

return m_szErrorText;
}

class DllDecl CTPCC_COM : public CTPCC_BASE
{
private:
    BOOL m_bSinglePool;
    // COM Interface pointers
    ITPCC*
    m_pNewOrder;
    ITPCC*
    m_pPayment;
    ITPCC*
    m_pStockLevel;
    ITPCC*
    m_pOrderStatus;
    struct COM_DATA
    {
        int ErrorType;
        int error;
        union
        {
            NEW_ORDER_DATA      NewOrder;
            PAYMENT_DATA       Payment;
            DELIVERY_DATA      Delivery;
            STOCK_LEVEL_DATA   StockLevel;
            ORDER_STATUS_DATA  OrderStatus;
        } u;
        VARIANT m_vTxn;
    };
public:
    CTPCC_COM(BOOL bSinglePool);
    ~CTPCC_COM(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_pTxn->u.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_pTxn->u.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_pTxn->u.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_pTxn->u.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_pTxn->u.OrderStatus; }

    void NewOrder          ();
    void Payment           ();
    void StockLevel        ();
    void OrderStatus       ();
}

```

```

void Delivery          ();
{ throw new CCOMERR(E_NOTIMPL); } // not supported
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

// wrapper routine for class constructor
extern "C" __declspec(dllexport) CTPCC_COM*
CTPCC_COM_new(BOOL);

typedef CTPCC_COM* (TYPE_CTPCC_COM)(BOOL);



---



## tpcc_com_all. cpp


/* FILE:           TPCC_COM_ALL.CPP
 *               Microsoft
TPC-C Kit Ver. 4.20.000
 *               Copyright
Microsoft, 1999
 *               All Rights Reserved
 *
 *               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 *               PURPOSE: Implementation for TPC-C class.
 *               Contact: Charles Levine
(clevine@microsoft.com)
 *
 *               Change history:
 *               4.20.000 - updated rev number to
match kit
 */

#define STRICT
#define _WIN32_WINNT 0x0400
#define _ATL_APARTMENT_THREADS

#include <stdio.h>
#include <atlbase.h>
//You may derive a class from CComModule and use it
if you want to override
//something, but do not change the name of _Module
extern CComModule _Module;

#include <atlcom.h>
#include <initguid.h>
#include <transact.h>

```

```

//##include <atlimpl.cpp>
#include <comsvcs.h>

#include <sqltypes.h>
#include <sql.h>
#include <sqlext.h>

#include "tpcc_com_ps.h"
#include "..\..\common\src\trans.h"           //tpckit transaction
header contains definitions of structures specific to
TPC-C
#include "..\..\common\src\txn_base.h"
#include "..\..\common\src\error.h"
#include "..\..\common\src\ReadRegistry.h"
#include "..\..\common\src\tpcc_com_errorcode.h"
#include "..\..\db_odbc_dll\src\tpcc_odbc.h"
// ODBC implementation of TPC-C txns

#include "resource.h"
#include "tpcc_com_all.h"
#include "tpcc_com_all_i.c"
#include "Methods.h"
#include "..\..\tpcc_com_ps\src\tpcc_com_ps_i.c"
#include "..\..\common\src\ReadRegistry.cpp"

CComModule _Module;

BEGIN_OBJECT_MAP(ObjectMap)
    OBJECT_ENTRY(CLSID_TPCC, CTPCC)
    OBJECT_ENTRY(CLSID_NewOrder, CNewOrder)
    OBJECT_ENTRY(CLSID_OrderStatus,
COrderStatus)
    OBJECT_ENTRY(CLSID_Payment, CPayment)
    OBJECT_ENTRY(CLSID_StockLevel, CStockLevel)
END_OBJECT_MAP()

// configuration settings from registry
TPCCREGISTRYDATA Reg;
char szMyComputerName[MAX_COMPUTERNAME_LENGTH+1]
;

static HINSTANCE hLibInstanceDb = NULL;
TYPE_CTPCC_ODBC *pCTPCC_ODBC_new;

// Critical section to synchronize connection open
and close.
// CRITICAL_SECTION hConnectCriticalSection;
///////////////////////////////
// DLL Entry Point

extern "C"
BOOL WINAPI DllMain(HINSTANCE hInstance, DWORD dwReason, LPVOID *lpReserved*)
{
    char szDlName[128];

```

```

        try
        {
            if (dwReason ==
DLL_PROCESS_ATTACH)
            {
                _Module.Init(ObjectMap,
hInstance);

                DisableThreadLibraryCalls(hInstance);

                DWORD dwSize =
MAX_COMPUTERNAME_LENGTH+1;

                GetComputerName(szMyComputerName, &dwSize);

                szMyComputerName[dwSize] = 0;

                if (
ReadTPCCRegistrySettings( &Reg ) )
                    throw new
CCOMPONENT_ERR( ERR_MISSING_REGISTRY_ENTRIES );
                if (Reg.eDB_Protocol ==
ODBC)
                    {
                        strcpy(
szDlName, Reg.szPath );
                        strcat(
szDlName, "tpcc_odbc.dll");
                        hLibInstanceDb = LoadLibrary( szDlName );
                        if
(hLibInstanceDb == NULL)
                            throw new CCOMPONENT_ERR(
ERR_LOADDLL_FAILED, szDlName, GetLastError() );
                        // get
function pointer to wrapper for class constructor
                        pCTPCC_ODBC_new = (TYPE_CTPCC_ODBC*)
GetProcAddress(hLibInstanceDb, "CTPCC_ODBC_new");
                        if
(pCTPCC_ODBC_new == NULL)
                            throw new CCOMPONENT_ERR(
ERR_GETPROCADDR_FAILED, szDlName, GetLastError() );
                        else
                            throw new
CCOMPONENT_ERR( ERR_UNKNOWN_DB_PROTOCOL );
                        if (Reg.dwConnectDelay
> 0)
                            {
                                InitializeCriticalSection(&hConnectCriticalSection);
                            }
                        else if (dwReason ==
DLL_PROCESS_DETACH)

```

```

                            _Module.Term();
}
catch (CBaseErr *e)
{
    TCHAR szMsg[256];
    _snprintf(szMsg, sizeof(szMsg),
"%s error, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
    WriteMessageToEventLog( szMsg );

    delete e;
    return FALSE;
}
catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in object DllMain"));
    return FALSE;
}

return TRUE; // OK
}

///////////////////////////////
// Used to determine whether the DLL can be unloaded
by OLE
STDAPI DllCanUnloadNow(void)
{
    return (_Module.GetLockCount()==0) ? S_OK :
S_FALSE;
}

///////////////////////////////
// Returns a class factory to create an object of the
requested type
STDAPI DllGetClassObject(REFCLSID rclsid, REFIID
riid, LPVOID* ppv)
{
    return _Module.GetClassObject(rclsid, riid,
ppv);
}

///////////////////////////////
// DllRegisterServer - Adds entries to the system
registry
STDAPI DllRegisterServer(void)
{
    // registers object, typelib and all
interfaces in typelib
    return _Module.RegisterServer(TRUE);
}

```

```

////////// DllUnregisterServer - Removes entries from the
// system registry
STDAPI DllUnregisterServer(void)
{
    _Module.UnregisterServer();
    return S_OK;
}

static void WriteMessageToEventLog(LPTSTR lpszMsg)
{
    TCHAR szMsg[256];
    HANDLE hEventSource;
    LPTSTR lpszStrings[2];

    // Use event logging to log the error.
    //
    hEventSource = RegisterEventSource(NULL,
    TEXT("tpcc_com_all.dll"));

    _sprintf(szMsg, TEXT("Error in COM+ TPC-C
Component: "));
    lpszStrings[0] = szMsg;
    lpszStrings[1] = lpszMsg;

    if (hEventSource != NULL)
    {
        ReportEvent(hEventSource, // handle of event
source
                    EVENTLOG_ERROR_TYPE, // event type
                    0, // event category
                    0, // event ID
                    NULL, // current user's
SID
                    2, // strings in
lpszStrings
                    0, // no bytes of raw
data
                    (LPCTSTR *)lpszStrings, // array of
error strings
                    NULL); // no raw data

        (VOID) DeregisterEventSource(hEventSource);
    }
}

inline void ReleaseInterface(IUnknown *pUnk)
{
    if (pUnk)
    {
        pUnk->Release();
        pUnk = NULL;
    }
}

/* FUNCTION: CCOMPONENT_ERR::ErrorText
*/
char* CCOMPONENT_ERR::ErrorText(void)

```

```

{
    static SERRORMSG errorMsgs[] =
    {
        { ERR_MISSING_REGISTRY_ENTRIES,
        "Required entries missing from registry." },
        { ERR_LOADDLL_FAILED,
        "Load of DLL failed. DLL=" },
        { ERR_GETPROCADDR_FAILED,
        "Could not map proc in DLL. GetProcAddress
error. DLL=" },
        { ERR_UNKNOWN_DB_PROTOCOL,
        "Unknown database protocol specified in
registry." },
        { 0,
        "" }
    };

    char szTmp[256];
    int i = 0;
    while (TRUE)
    {
        if (errorMsgs[i].szMsg[0] == 0)
        {
            strcpy( szTmp, "Unknown
error number." );
            break;
        }
        if (m_Error ==
errorMsgs[i].iError)
        {
            strcpy( szTmp,
errorMsgs[i].szMsg );
            break;
        }
        i++;
    }

    if (m_szTextDetail)
        strcat( szTmp, m_szTextDetail );
    if (m_SystemErr)
        wsprintf( szTmp+strlen(szTmp), "
Error=%d", m_SystemErr );

    m_szErrorText = new char[strlen(szTmp)+1];
    strcpy( m_szErrorText, szTmp );
    return m_szErrorText;
}

CTPCC_Common::CTPCC_Common()
{
    m_pTxn = NULL;
    m_bCanBePooled = TRUE;
}

CTPCC_Common::~CTPCC_Common()
{

```

```

    // Pace connection close for VIA.
    //
    if (Reg.dwConnectDelay > 0)
    {
        EnterCriticalSection(&hConnectCriticalSection);
        Sleep(Reg.dwConnectDelay);

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (m_pTxn)
    {
        delete m_pTxn;
    }

HRESULT CTPCC_Common::CallSetComplete()
{
    IObjectContext* pObjectContext = NULL;
    // get our object context
    HRESULT hr = CoGetObjectContext(
    IID_IObjectContext, (void **)&pObjectContext);
    pObjectContext->SetComplete();
    ReleaseInterface(pObjectContext);
    return hr;
}

//
// called by the ctor activator
//
STDMETHODIMP CTPCC_Common::Construct(IDispatch *pUnk)
{
    // Code to access construction string, if
needed later...
    if (!pUnk)
        return E_UNEXPECTED;
    IObjectConstructString * pString
    = NULL;
    HRESULT hr = pUnk->QueryInterface(IID_IObjectContextString, (void
**)&pString);
    pString->Release();

    try
    {
        // Pace connection creation for
VIA.
        if (Reg.dwConnectDelay > 0)
        {
            EnterCriticalSection(&hConnectCriticalSection);
            Sleep(Reg.dwConnectDelay);
        }
    }
}
```

```

        LeaveCriticalSection(&hConnectCriticalSection);
    }

    if (Reg.eDB_Protocol == ODBC)
        m_pTxn = pCTPCC_ODBC_new(Reg.szDbServer, Reg.szDbUser,
Reg.szDbPassword,

        szMyComputerName, Reg.szDbName,

        Reg.szSPPrefix,
Reg.bCallNoDuplicatesNewOrder );
    }
    catch (CBaseErr *e)
    {
        TCHAR szMsg[256];
        _snprintf(szMsg, sizeof(szMsg),
"%s error in CTPCC_Common::Construct, code %d: %s",
e->ErrorTypeStr(), e->ErrorNum(), e->ErrorText());
        WriteMessageToEventLog( szMsg );
        delete e;
        return E_FAIL;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in object ::Construct"));
        return E_FAIL;
    }

    return S_OK;
}

HRESULT CTPCC_Common::NewOrder(VARIANT txn_in,
VARIANT* txn_out)
{
    PNEW_ORDER_DATA      pNewOrder;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                    txn_in.parray->rgsabound-
>cElements,
                    txn_in.parray->rgsabound-
>cElements);

```

```

        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*) txn_out-
>parray->pvData;
        pData = (COM_DATA*) txn_in.parray-
>pvData;
        pNewOrder = m_pTxn-
>BuffAddr_NewOrder();

        memcpy(pNewOrder, &pData-
>u.NewOrder, sizeof(NEW_ORDER_DATA));

        m_pTxn->NewOrder(); // do the actual txn

        memcpy( &pOutData->u.NewOrder,
pNewOrder, sizeof(NEW_ORDER_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::NewOrder."));
        pOutData->retval =
ERR_TYPE_LOGIC;
        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCOM;
    }
}

HRESULT CTPCC_Common::Payment(VARIANT txn_in,
VARIANT* txn_out)
{
    PPAYMENT_DATA      pPayment;
    COM_DATA             *pData;
    COM_DATA             *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txn_out);
        txn_out->vt = VT_SAFARRAY;
        txn_out->parray =
SafeArrayCreateVector( VT_UI1,
                    txn_in.parray->rgsabound-
>cElements,
                    txn_in.parray->rgsabound-
>cElements);
        if (txn_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }
        pOutData = (COM_DATA*) txn_out-
>parray->pvData;
        pData = (COM_DATA*) txn_in.parray-
>pvData;
        pPayment = m_pTxn-
>BuffAddr_Payment();

        memcpy(pPayment, &pData-
>u.Payment, sizeof(PAYMENT_DATA));

        m_pTxn->Payment(); // do the actual txn

        memcpy( &pOutData->u.Payment,
pPayment, sizeof(PAYMENT_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
m_bCanBePooled = FALSE;

        pOutData->retval = e-
>ErrorType();
        pOutData->error = e->ErrorNum();
        delete e;
        return E_TPCCOM;
    }
    catch (...)
    {

        WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::Payment."));
        pOutData->retval =
ERR_TYPE_LOGIC;
    }
}

```

```

        pOutData->error = 0;
        m_bCanBePooled = FALSE;
        return E_TPCCCOM;
    }

HRESULT CTPCC_Common::StockLevel(VARIANT txin_in,
VARIANT* txin_out)
{
    PSTOCK_LEVEL_DATA pStockLevel;
    COM_DATA          *pData;
    COM_DATA          *pOutData;

    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txin_out);
        txin_out->vt = VT_SAFEARRAY;
        txin_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin_in.parray->rgsabound-
>cElements,
                     txin_in.parray->rgsabound-
>cElements);
        if (txin_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txin_out-
>parray->pvData;
        pData = (COM_DATA*)txin_in.parray-
>pvData;
        pStockLevel = m_pTxn-
>BuffAddr_StockLevel();

        memcpy(pStockLevel, &pData-
>u.StockLevel, sizeof(STOCK_LEVEL_DATA));
        m_pTxn->StockLevel();

        memcpy( &pOutData->u.StockLevel,
pStockLevel, sizeof(STOCK_LEVEL_DATA));

        pOutData->retval = ERR_SUCCESS;
        pOutData->error = 0;
        return S_OK;
    }
    catch (CBaseErr *e)
    {
        // check for lost database
        connection; if yes, component is toast
        if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
            m_bCanBePooled = FALSE;
    }
}

```

```

>ErrorType()
{
    pOutData->retval = e-
    pOutData->error = e->ErrorNum();
    delete e;
    return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::StockLevel."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

HRESULT CTPCC_Common::OrderStatus(VARIANT txin_in,
VARIANT* txin_out)
{
    PORDER_STATUS_DATA pOrderStatus;
    COM_DATA          *pData;
    COM_DATA          *pOutData;
    try
    {
        // Allocate output structure
        first because it is also used in the catch clauses.
        //
        VariantInit(txin_out);
        txin_out->vt = VT_SAFEARRAY;
        txin_out->parray =
SafeArrayCreateVector( VT_UI1,
                     txin_in.parray->rgsabound-
>cElements,
                     txin_in.parray->rgsabound-
>cElements);
        if (txin_out->parray == NULL) // sanity error checking - for very rare case, but to be
        sure
        {
            return E_OUTOFMEMORY;
        }

        pOutData = (COM_DATA*)txin_out-
>parray->pvData;
        pData = (COM_DATA*)txin_in.parray-
>pvData;
        pOrderStatus = m_pTxn-
>BuffAddr_OrderStatus();

        memcpy(pOrderStatus, &pData-
>u.OrderStatus, sizeof(ORDER_STATUS_DATA));
        m_pTxn->OrderStatus();

        memcpy( &pOutData->u.OrderStatus,
pOrderStatus, sizeof(ORDER_STATUS_DATA));
    }
}

```

```

pOutData->retval = ERR_SUCCESS;
pOutData->error = 0;
return S_OK;
}

catch (CBaseErr *e)
{
    // check for lost database
    connection; if yes, component is toast
    if ( ((e->ErrorType() ==
ERR_TYPE_ODBC) && (e->ErrorNum() == 10054)) )
        m_bCanBePooled = FALSE;
}

pOutData->retval = e-
pOutData->error = e->ErrorNum();
delete e;
return E_TPCCCOM;
}

catch (...)
{
    WriteMessageToEventLog(TEXT("Unhandled
exception in CTPCC_Common::OrderStatus."));
    pOutData->retval =
ERR_TYPE_LOGIC;
    pOutData->error = 0;
    m_bCanBePooled = FALSE;
    return E_TPCCCOM;
}

```

tpcc_com_all.def

```

; tpcc_com_all.def : Declares the module parameters.

LIBRARY      "tpcc_com_all.dll"

EXPORTS
    DllCanUnloadNow      PRIVATE
    DllGetClassObject     PRIVATE
    DllRegisterServer     PRIVATE
    DllUnregisterServer   PRIVATE

```

tpcc_com_all.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:15 2006
*/
/* Compiler settings for .\src\tpcc_com_all.idl:
Oifc, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext, robust

```

```

    error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
    DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 475
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef __tpcc_com_all_h__
#define __tpcc_com_all_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __TPCC_FWD_DEFINED__
#define __TPCC_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class TPCC TPCC;
#else
typedef struct TPCC TPCC;
#endif /* __cplusplus */

#endif /* __TPCC_FWD_DEFINED__ */

#ifndef __NewOrder_FWD_DEFINED__
#define __NewOrder_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class NewOrder NewOrder;
#else
typedef struct NewOrder NewOrder;
#endif /* __cplusplus */

#endif /* __NewOrder_FWD_DEFINED__ */

#ifndef __OrderStatus_FWD_DEFINED__
#define __OrderStatus_FWD_DEFINED__

```

```

#endif /* __cplusplus
typedef class OrderStatus OrderStatus;
#else
typedef struct OrderStatus OrderStatus;
#endif /* __cplusplus */
#endif /* __OrderStatus_FWD_DEFINED__ */

#ifndef __Payment_FWD_DEFINED__
#define __Payment_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class Payment Payment;
#else
typedef struct Payment Payment;
#endif /* __cplusplus */
#endif /* __Payment_FWD_DEFINED__ */

#ifndef __StockLevel_FWD_DEFINED__
#define __StockLevel_FWD_DEFINED__
#endif

#ifndef __cplusplus
typedef class StockLevel StockLevel;
#else
typedef struct StockLevel StockLevel;
#endif /* __cplusplus */
#endif /* __StockLevel_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"
#include "tpcc_com_ps.h"

#ifndef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );

/* interface __MIDL_itf_tpcc_com_all_0000 */
/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_all_0000_v0_0_s_ifspec;

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

```

```

#define __TPCCLib_LIBRARY_DEFINED__

/* library TPCCLib */
/* [helpstring] [version] [uuid] */

EXTERN_C const IID LIBID_TPCCLib;
EXTERN_C const CLSID CLSID_TPCC;

#ifndef __cplusplus
class DECLSPEC_UUID("122A3128-2520-11D3-BA71-
00C04FBFE08B")
TPCC;
#endif

EXTERN_C const CLSID CLSID_NewOrder;

#ifndef __cplusplus
class DECLSPEC_UUID("975BAABF-84A7-11D2-BA47-
00C04FBFE08B")
NewOrder;
#endif

EXTERN_C const CLSID CLSID_OrderStatus;

#ifndef __cplusplus
class DECLSPEC_UUID("266836AD-A50D-11D2-BA4E-
00C04FBFE08B")
OrderStatus;
#endif

EXTERN_C const CLSID CLSID_Payment;

#ifndef __cplusplus
class DECLSPEC_UUID("CD02F7EF-A4FA-11D2-BA4E-
00C04FBFE08B")
Payment;
#endif

EXTERN_C const CLSID CLSID_StockLevel;

#ifndef __cplusplus
class DECLSPEC_UUID("2668369E-A50D-11D2-BA4E-
00C04FBFE08B")
StockLevel;
#endif

#endif /* __TPCCLib_LIBRARY_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

/* end of Additional Prototypes */

#ifndef __cplusplus
}
#endif

#endif

```

tpcc_com_all.i. c

```
/* this ALWAYS GENERATED file contains the IIDs and  
CLSIDs */  
  
/* link this file in with the server and any clients  
*/  
  
/* File created by MIDL compiler version 6.00.0361  
*/  
/* at Thu Mar 16 18:21:15 2006  
*/  
/* Compiler settings for .\src\tpcc_com_all.idl:  
    Oicf, W1, Zp8, env=Win32 (32b run)  
    protocol : dce , ms_ext, c_ext, robust  
    error checks: allocation ref bounds_check enum  
stub_data  
    VC __declspec() decoration level:  
        __declspec(uuid()), __declspec(selectany),  
        __declspec(novtable)  
        DECLSPEC_UUID(), MIDL_INTERFACE()  
*/  
//@@@MIDL_FILE_HEADING( )  
  
#if !defined(_M_IA64) && !defined(_M_AMD64)  
  
#pragma warning( disable: 4049 ) /* more than 64k  
source lines */  
  
#ifdef __cplusplus  
extern "C"  
#endif  
  
#include <rpc.h>  
#include <rpcndr.h>  
  
#ifdef _MIDL_USE_GUIDDEF_  
  
#ifndef INITGUID  
#define INITGUID  
#include <guiddef.h>  
#undef INITGUID  
#else  
#include <guiddef.h>  
#endif  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \
```

```
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)  
  
#else // !_MIDL_USE_GUIDDEF_  
#ifndef __IID_DEFINED__  
#define __IID_DEFINED__  
  
typedef struct _IID  
{  
    unsigned long x;  
    unsigned short s1;  
    unsigned short s2;  
    unsigned char c[8];  
} IID;  
  
#endif // __IID_DEFINED__  
  
#ifndef CLSID_DEFINED  
#define CLSID_DEFINED  
typedef IID CLSID;  
#endif // CLSID_DEFINED  
  
#define  
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,  
b7,b8) \  
    const type name =  
{l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}  
#endif !_MIDL_USE_GUIDDEF_  
  
MIDL_DEFINE_GUID(IID,  
LIBID_TPCClib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00  
,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x  
C0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,  
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0  
0,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
MIDL_DEFINE_GUID(CLSID,  
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0  
x00,0xC0,0x4F,0xBF,0xE0,0x8B);  
  
#undef MIDL_DEFINE_GUID  
  
#ifdef __cplusplus
```

```

#else // !_MIDL_USE_GUIDDEF

#ifndef __IID_DEFINED__
#define __IID_DEFINED__

typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;

#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8} }

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
LIBID_TPCCLib,0x122A3117,0x2520,0x11D3,0xBA,0x71,0x00
,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_TPCC,0x122A3128,0x2520,0x11D3,0xBA,0x71,0x00,0x
C0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_NewOrder,0x975BAABF,0x84A7,0x11D2,0xBA,0x47,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_OrderStatus,0x266836AD,0xA50D,0x11D2,0xBA,0x4E,
0x00,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_Payment,0xCD02F7EF,0xA4FA,0x11D2,0xBA,0x4E,0x0
0,0xC0,0x4F,0xBF,0xE0,0x8B);

MIDL_DEFINE_GUID(CLSID,
CLSID_StockLevel,0x2668369E,0xA50D,0x11D2,0xBA,0x4E,0
x00,0xC0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID

#ifdef __cplusplus
#endif

```

```
#endif /* defined(_M_IA64) || defined(_M_AMD64) */
```

tpcc_com_errorcode.h

```

/*      FILE:          TPCC_COM_ERRORCODE.H
 *      Microsoft
TPC-C Kit Ver. 4.20.000
*                                     Copyright
Microsoft, 1999
*                               All Rights Reserved
*
*                                         not yet
audited
*
*      PURPOSE: Header file defining the error
code returned from ITPCC COM interface.
*
*      Change history:
*          4.20.000 - first version
*/
// Error return value for methods in ITPCC interface.
// Define as 0x80042345 (decimal -2147212475).
const HRESULT E_TPCCCOM = MAKE_HRESULT
(SEVERITY_ERROR, FACILITY_ITF, 0x2345);

```

tpcc_com_ps.def

LIBRARY	"tpcc_com_ps"
EXPORTS	
	DllGetClassObject PRIVATE
	DllCanUnloadNow PRIVATE
	GetProxyDllInfo PRIVATE
	DllRegisterServer PRIVATE
	DllUnregisterServer PRIVATE

tpcc_com_ps.h

```

/* this ALWAYS GENERATED file contains the
definitions for the interfaces */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006

```

```

*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

/* verify that the <rpcndr.h> version is high enough
to compile this file*/
#ifndef __REQUIRED_RPCNDR_H_VERSION__
#define __REQUIRED_RPCNDR_H_VERSION__ 440
#endif

#include "rpc.h"
#include "rpcndr.h"

#ifndef __RPCNDR_H_VERSION__
#error this stub requires an updated version of
<rpcndr.h>
#endif // __RPCNDR_H_VERSION__

#ifndef COM_NO_WINDOWS_H
#include "windows.h"
#include "ole2.h"
#endif /*COM_NO_WINDOWS_H*/

#ifndef __tpcc_com_ps_h__
#define __tpcc_com_ps_h__

#if defined(_MSC_VER) && (_MSC_VER >= 1020)
#pragma once
#endif

/* Forward Declarations */

#ifndef __ITPCC_FWD_DEFINED__
#define __ITPCC_FWD_DEFINED__
typedef interface ITPCC ITPCC;
#endif /* __ITPCC_FWD_DEFINED__ */

/* header files for imported files */
#include "oaidl.h"
#include "ocidl.h"

#ifdef __cplusplus
extern "C"{
#endif

void * __RPC_USER MIDL_user_allocate(size_t);
void __RPC_USER MIDL_user_free( void * );
/* interface __MIDL_itf_tpcc_com_ps_0000 */


```

```

/* [local] */

extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_c_ifspec;
extern RPC_IF_HANDLE
__MIDL_itf_tpcc_com_ps_0000_v0_0_s_ifspec;

#ifndef __ITPCC_INTERFACE_DEFINED__
#define __ITPCC_INTERFACE_DEFINED__

/* interface ITPCC */
/* [unique][helpstring][uuid][oleautomation][object]
*/
EXTERN_C const IID IID_ITPCC;
#endif /* defined(_cplusplus) && !defined(CINTERFACE)

MIDL_INTERFACE("FEEE6AA2-84B1-11d2-BA47-
00C04FBFE08B")
ITPCC : public IUnknown
{
public:
    virtual HRESULT __stdcall NewOrder(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall Payment(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall Delivery(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall StockLevel(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall OrderStatus(
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out) = 0;
    virtual HRESULT __stdcall CallSetComplete(
void) = 0;
};

#else /* C style interface */

typedef struct ITPCCVtbl
{
    BEGIN_INTERFACE

    HRESULT ( STDMETHODCALLTYPE *QueryInterface(
        ITPCC * This,
        /* [in] */ REFIID riid,
        /* [iid_is][out] */ void **ppvObject);

```

```

    ULONG ( STDMETHODCALLTYPE *AddRef )((
        ITPCC * This);
    ULONG ( STDMETHODCALLTYPE *Release )((
        ITPCC * This);

    HRESULT ( STDMETHODCALLTYPE *NewOrder )((
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Payment )((
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *Delivery )((
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *StockLevel )((
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *OrderStatus )((
        ITPCC * This,
        /* [in] */ VARIANT txn_in,
        /* [out] */ VARIANT *txn_out);

    HRESULT ( STDMETHODCALLTYPE *CallSetComplete )((
        ITPCC * This);

    END_INTERFACE
} ITPCCVtbl;
interface ITPCC
{
    CONST_VTBL struct ITPCCVtbl *lpVtbl;
};

#endif /* COBJMACROS

#define ITPCC_QueryInterface(This,riid,ppvObject) \
    (This)->lpVtbl->QueryInterface(This,riid,ppvObject)
#define ITPCC_AddRef(This) \
    (This)->lpVtbl->AddRef(This)
#define ITPCC_Release(This) \
    (This)->lpVtbl->Release(This)
#define ITPCC_NewOrder(This,txn_in,txn_out) \
    (This)->lpVtbl->NewOrder(This,txn_in,txn_out)
#define ITPCC_Payment(This,txn_in,txn_out) \

```

```

    (This)->lpVtbl -> Payment(This,txn_in,txn_out)
#define ITPCC_Delivery(This,txn_in,txn_out) \
    (This)->lpVtbl -> Delivery(This,txn_in,txn_out)
#define ITPCC_StockLevel(This,txn_in,txn_out) \
    (This)->lpVtbl -> StockLevel(This,txn_in,txn_out)
#define ITPCC_OrderStatus(This,txn_in,txn_out) \
    (This)->lpVtbl -> OrderStatus(This,txn_in,txn_out)
#define ITPCC_CallSetComplete(This) \
    (This)->lpVtbl -> CallSetComplete(This)
#endif /* COBJMACROS */

#endif /* C style interface */

HRESULT __stdcall ITPCC_NewOrder_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_NewOrder_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Payment_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Payment_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_Delivery_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_Delivery_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *pdwStubPhase);

HRESULT __stdcall ITPCC_StockLevel_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);


```

```

/* [in] */ VARIANT txn_in,
/* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_StockLevel_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_OrderStatus_Proxy(
    ITPCC * This,
    /* [in] */ VARIANT txn_in,
    /* [out] */ VARIANT *txn_out);

void __RPC_STUB ITPCC_OrderStatus_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

HRESULT __stdcall ITPCC_CallSetComplete_Proxy(
    ITPCC * This);

void __RPC_STUB ITPCC_CallSetComplete_Stub(
    IRpcStubBuffer *This,
    IRpcChannelBuffer *_pRpcChannelBuffer,
    PRPC_MESSAGE _pRpcMessage,
    DWORD *_pdwStubPhase);

#endif /* __ITPCC_INTERFACE_DEFINED__ */

/* Additional Prototypes for ALL interfaces */

unsigned long __RPC_USER
VARIANT_UserSize( unsigned long *, unsigned long ,
    VARIANT * );
unsigned char * __RPC_USER VARIANT_UserMarshal(
    unsigned long *, unsigned char *, VARIANT * );
unsigned char * __RPC_USER
VARIANT_UserUnmarshal(unsigned long *, unsigned char *,
    VARIANT * );
void __RPC_USER
VARIANT_UserFree( unsigned long *, VARIANT * );

/* end of Additional Prototypes */

#ifndef __cplusplus
#endif
#endif

```

tpcc_com_ps.idl

```

/*      FILE:          ITPCC.IDL
*           Microsoft
TPC-C Kit Ver. 4.20.000
*           Copyright
Microsoft, 1999
*           All Rights Reserved
*
*           not yet
audited
*
*           PURPOSE: Defines the interface used by
TPCC. This interface can be implemented by C++ components.
*
*           Change history:
*           4.20.000 - first version
*/
// Forward declare all types defined
interface ITPCC;
import "oaidl.idl";
import "ocidl.idl";

[
    object,
    oleautomation,
    uuid(FEEE6AA2-84B1-11d2-BA47-
00C04FBPE08B),
    helpstring("ITPCC Interface"),
    pointer_default(unique)
]
interface ITPCC : IUnknown
{
    HRESULT __stdcall NewOrder
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Payment
    (
        [in] VARIANT txn_in,
        [out] VARIANT *txn_out
    );
    HRESULT __stdcall Delivery
    (

```

```

[in] VARIANT txn_in,
[out] VARIANT *txn_out
);
HRESULT __stdcall StockLevel
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall OrderStatus
(
    [in] VARIANT txn_in,
    [out] VARIANT *txn_out
);
HRESULT __stdcall CallSetComplete
(
);
}; // interface ITPCC

```

tpcc_com_ps_i.c

```

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win32 (32b run)
protocol : dce , ms_ext, c_ext
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:

```

```

    __declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // !_MIDL_USE_GUIDDEF_

```

```

#endif ! _MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID
#ifndef __cplusplus
}
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the IIDs and
CLSIDs */

/* link this file in with the server and any clients
*/

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env=Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */

#ifndef __cplusplus
extern "C"
#endif

#include <rpc.h>
#include <rpcndr.h>

#ifndef _MIDL_USE_GUIDDEF_
#ifndef INITGUID
#define INITGUID
#include <guiddef.h>
#endif
#else
#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

```

#include <guiddef.h>
#endif

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    DEFINE_GUID(name,l,w1,w2,b1,b2,b3,b4,b5,b6,b7,b8)

#ifndef !_MIDL_USE_GUIDDEF_
#ifndef __IID_DEFINED__
#define __IID_DEFINED__
typedef struct _IID
{
    unsigned long x;
    unsigned short s1;
    unsigned short s2;
    unsigned char c[8];
} IID;
#endif // __IID_DEFINED__

#ifndef CLSID_DEFINED
#define CLSID_DEFINED
typedef IID CLSID;
#endif // CLSID_DEFINED

#define
MIDL_DEFINE_GUID(type,name,l,w1,w2,b1,b2,b3,b4,b5,b6,
b7,b8) \
    const type name = \
{ l,w1,w2,{b1,b2,b3,b4,b5,b6,b7,b8}}
#endif // !_MIDL_USE_GUIDDEF_

MIDL_DEFINE_GUID(IID,
IID_ITPCC,0xFEEE6AA2,0x84B1,0x11d2,0xBA,0x47,0x00,0xC
0,0x4F,0xBF,0xE0,0x8B);

#undef MIDL_DEFINE_GUID
#ifndef __cplusplus
}
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

tpcc_com_ps_ p.c

```

/* this ALWAYS GENERATED file contains the proxy stub
code */

```

```

/* File created by MIDL compiler version 6.00.0361
 */
/* at Thu Mar 16 18:21:12 2006
 */
/* Compiler settings for .\src\tpcc_com_ps.idl:
   Oicf, W1, Zp8, env=Win32 (32b run)
   protocol : dce , ms_ext, c_ext
   error checks: allocation ref bounds_check enum
stub_data
VC __declspec() decoration level:
__declspec(uuid()), __declspec(selectany),
__declspec(novtable)
DECLSPEC_UUID(), MIDL_INTERFACE()

*/
//@@@MIDL_FILE_HEADING( )

#if !defined(_M_IA64) && !defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif
#pragma warning( disable: 4100 ) /* unreferenced
arguments in x86 call */
#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity*/
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REQD_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 440
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1023
#define PROC_FORMAT_STRING_SIZE 193
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{

```

```

short Pad;
unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0x8A885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}},{2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

#if !defined(__RPC_WIN32__)
#error Invalid build platform for this stub.
#endif

#if ! (TARGET_IS_NT40_OR_LATER)
#error You need a Windows NT 4.0 or later to run this
stub because it uses these features:
#error -Oif or -Oicf, [wire_marshal] or
[user_marshal] attribute.
#error However, your C/C++ compilation flags indicate
you intend to run this app on earlier systems.
#error This app will die there with the
RPC_X_WRONG_STUB_VERSION error.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    0,
    {
        /* Procedure NewOrder */
        0x33, /* FC_AUTO_HANDLE */
        0x6c, /* Old Flags: object, Oi2 */
        /* 2 */ NdrFcLong( 0x0 ), /* * 0 */
        /* 6 */ NdrFcShort( 0x3 ), /* * 3 */
        /* 8 */ NdrFcShort( 0x1c ), /* * x86 Stack
size/offset = 28 */
        /* 10 */ NdrFcShort( 0x0 ), /* * 0 */
        /* 12 */ NdrFcShort( 0x8 ), /* * 8 */
        /* 14 */ 0x7, /* * Oi2 Flags: srv must
size, clt must size, has return, */

```

```

0x3, /* Parameter txn_in */
/* 16 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 18 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 20 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 22 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 24 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 26 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */
/* Return value */
/* 28 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 30 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 32 */ 0x8, /* FC_LONG */
0x0, /* 0 */
/* Procedure Payment */
/* 34 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* Old Flags: object, Oi2 */
/* 36 */ NdrFcLong( 0x0 ), /* 0 */
/* 40 */ NdrFcShort( 0x4 ), /* 4 */
/* 42 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 44 */ NdrFcShort( 0x0 ), /* 0 */
/* 46 */ NdrFcShort( 0x8 ), /* 8 */
/* 48 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* 3 */
/* Parameter txn_in */
/* 50 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 52 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 54 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */
/* Parameter txn_out */
/* 56 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */

```

```

/* 58 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 60 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 62 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 64 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 66 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure Delivery */

/* 68 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 70 */ NdrFcLong( 0x0 ), /* 0 */
/* 74 */ NdrFcShort( 0x5 ), /* 5 */
/* 76 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 78 */ NdrFcShort( 0x0 ), /* 0 */
/* 80 */ NdrFcShort( 0x8 ), /* 8 */
/* 82 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 84 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 86 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 88 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 90 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 92 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 94 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 96 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 98 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 100 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure StockLevel */

/* 102 */ 0x33, /* FC_AUTO_HANDLE */

```

```

0x6c, /* */

Old Flags: object, Oi2 */
/* 104 */ NdrFcLong( 0x0 ), /* 0 */
/* 108 */ NdrFcShort( 0x6 ), /* 6 */
/* 110 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */
/* 114 */ NdrFcShort( 0x8 ), /* 8 */
/* 116 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 118 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 120 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 122 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 124 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 126 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 128 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 130 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 132 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 134 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure OrderStatus */

/* 136 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 138 */ NdrFcLong( 0x0 ), /* 0 */
/* 142 */ NdrFcShort( 0x7 ), /* 7 */
/* 144 */ NdrFcShort( 0x1c ), /* x86 Stack
size/offset = 28 */
/* 146 */ NdrFcShort( 0x0 ), /* 0 */
/* 148 */ NdrFcShort( 0x8 ), /* 8 */
/* 150 */ 0x7, /* Oi2 Flags: srv must
size, clt must size, has return, */
0x3, /* */

3 */

/* Parameter txn_in */

/* 152 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 154 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 156 */ NdrFcShort( 0x3e2 ), /* Type
Offset=994 */

/* Parameter txn_out */

/* 158 */ NdrFcShort( 0x4113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=16 */
/* 160 */ NdrFcShort( 0x14 ), /* x86 Stack
size/offset = 20 */
/* 162 */ NdrFcShort( 0x3f4 ), /* Type
Offset=1012 */

/* Return value */

/* 164 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 166 */ NdrFcShort( 0x18 ), /* x86 Stack
size/offset = 24 */
/* 168 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

/* Procedure CallSetComplete */

/* 170 */ 0x33, /* FC_AUTO_HANDLE */
0x6c, /* */

Old Flags: object, Oi2 */
/* 172 */ NdrFcLong( 0x0 ), /* 0 */
/* 176 */ NdrFcShort( 0x8 ), /* 8 */
/* 178 */ NdrFcShort( 0x8 ), /* x86 Stack
size/offset = 8 */
/* 180 */ NdrFcShort( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x8 ), /* 8 */
/* 184 */ 0x4, /* Oi2 Flags: has
return, */
0x1, /* */

1 */

/* Return value */

/* 186 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 188 */ NdrFcShort( 0x4 ), /* x86 Stack
size/offset = 4 */
/* 190 */ 0x8, /* FC_LONG */
0x0, /* */

0 */

}

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* */
        0 */
    }
    /* 2 */
}
```

```

          0x12, 0x0,           /* FC_UP */
/* 4 */ NdrFcShort( 0x3ca ),      /* Offset= 970 (974) */
/* 6 */                                         /* 0x2b,           */
FC_NON_ENCAPSULATED_UNION /* 0x9,           */
FC ULONG /* 0x7,           /* Corr desc: FC USHORT */
/* 8 */ 0x7,           /* 0x0,           */
/* 10 */ NdrFcShort( 0xffff8 ), /* -8 */
/* 12 */ NdrFcShort( 0x2 ),   /* Offset= 2 (14) */
/* 14 */ NdrFcShort( 0x10 ),  /* 16 */
/* 16 */ NdrFcShort( 0x2f ),  /* 47 */
/* 18 */ NdrFcLong( 0x14 ),  /* 20 */
/* 22 */ NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
/* 24 */ NdrFcLong( 0x3 ),   /* 3 */
/* 28 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 30 */ NdrFcLong( 0x11 ),  /* 17 */
/* 34 */ NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYTE */
/* 36 */ NdrFcLong( 0x2 ),   /* 2 */
/* 40 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 42 */ NdrFcLong( 0x4 ),   /* 4 */
/* 46 */ NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
/* 48 */ NdrFcLong( 0x5 ),   /* 5 */
/* 52 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 54 */ NdrFcLong( 0xb ),   /* 11 */
/* 58 */ NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
/* 60 */ NdrFcLong( 0xa ),   /* 10 */
/* 64 */ NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
/* 66 */ NdrFcLong( 0x6 ),   /* 6 */
/* 70 */ NdrFcShort( 0xe8 ),  /* Offset= 232 (302) */
/* 72 */ NdrFcLong( 0x7 ),   /* 7 */
/* 76 */ NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
/* 78 */ NdrFcLong( 0x8 ),   /* 8 */
/* 82 */ NdrFcShort( 0xe2 ),  /* Offset= 226 (308) */
/* 84 */ NdrFcLong( 0xd ),   /* 13 */
/* 88 */ NdrFcShort( 0xf4 ),  /* Offset= 244 (332) */
/* 90 */ NdrFcLong( 0x9 ),   /* 9 */
/* 94 */ NdrFcShort( 0x100 ), /* Offset= 256 (350) */
/* 96 */ NdrFcLong( 0x2000 ), /* 8192 */
/* 100 */ NdrFcShort( 0x10c ), /* Offset= 268 (368) */
/* 102 */ NdrFcLong( 0x24 ),  /* 36 */
/* 106 */ NdrFcShort( 0x31a ), /* Offset= 794 (900) */
/* 108 */ NdrFcLong( 0x4024 ), /* 16420 */
/* 112 */ NdrFcShort( 0x314 ), /* Offset= 788 (900) */
/* 114 */ NdrFcLong( 0x4011 ), /* 16401 */
/* 118 */ NdrFcShort( 0x312 ), /* 120 */
/* 124 */ NdrFcShort( 0x310 ), /* 126 */
/* 128 */ NdrFcLong( 0x4003 ), /* 130 */
/* 132 */ NdrFcLong( 0x4014 ), /* 136 */
/* 136 */ NdrFcShort( 0x30c ), /* 138 */
/* 140 */ NdrFcLong( 0x4004 ), /* 142 */
/* 144 */ NdrFcLong( 0x4005 ), /* 148 */
/* 148 */ NdrFcShort( 0x308 ), /* 150 */
/* 152 */ NdrFcLong( 0x400b ), /* 154 */
/* 156 */ NdrFcShort( 0x2f2 ), /* 156 */
/* 160 */ NdrFcShort( 0x2f0 ), /* 162 */
/* 164 */ NdrFcLong( 0x4006 ), /* 166 */
/* 168 */ NdrFcShort( 0x2fa ), /* 172 */
/* 172 */ NdrFcShort( 0x2f0 ), /* 174 */
/* 176 */ NdrFcLong( 0x4008 ), /* 178 */
/* 180 */ NdrFcShort( 0x2f2 ), /* 184 */
/* 184 */ NdrFcShort( 0x2f0 ), /* 186 */
/* 188 */ NdrFcLong( 0x4009 ), /* 190 */
/* 192 */ NdrFcShort( 0x2ee ), /* 196 */
/* 196 */ NdrFcShort( 0x2ec ), /* 198 */
/* 200 */ NdrFcLong( 0x6000 ), /* 202 */
/* 204 */ NdrFcShort( 0x2ea ), /* 208 */
/* 208 */ NdrFcShort( 0x8002 ), /* 210 */
/* 210 */ NdrFcLong( 0x12 ),  /* 214 */
/* 214 */ NdrFcShort( 0x8006 ), /* 216 */
/* 216 */ NdrFcLong( 0x13 ),  /* 220 */
/* 220 */ NdrFcShort( 0x8008 ), /* 222 */
/* 222 */ NdrFcLong( 0x15 ),  /* 226 */
/* 226 */ NdrFcShort( 0x800b ), /* 228 */
/* 228 */ NdrFcLong( 0x16 ),  /* 232 */
/* 232 */ NdrFcShort( 0x8008 ), /* 234 */
/* 234 */ NdrFcLong( 0x17 ),  /* 238 */
/* 238 */ NdrFcShort( 0x8008 ), /* 240 */
/* 240 */ NdrFcLong( 0xe ),   /* 244 */
/* 244 */ NdrFcShort( 0x2c8 ), /* 246 */
/* 246 */ NdrFcLong( 0x400e ), /* 250 */
/* 250 */ NdrFcShort( 0x2cc ), /* 252 */
/* 252 */ NdrFcLong( 0x4010 ), /* 256 */
/* 256 */ NdrFcShort( 0x2ca ), /* 258 */
/* 258 */ NdrFcLong( 0x4012 ), /* 262 */
/* 262 */ NdrFcShort( 0x286 ), /* 264 */
/* 264 */ NdrFcLong( 0x4013 ), /* 268 */
/* 268 */ NdrFcShort( 0x284 ), /* 270 */
/* 270 */ NdrFcLong( 0x4015 ), /* 274 */
/* 274 */ NdrFcShort( 0x282 ), /* 276 */
/* 276 */ NdrFcLong( 0x4016 ), /* 280 */
/* 280 */ NdrFcShort( 0x278 ), /* 282 */
/* 282 */ NdrFcLong( 0x4017 ), /* 286 */
/* 286 */ NdrFcShort( 0x272 ), /* 288 */
/* 288 */ NdrFcLong( 0x0 ),   /* 0 */
/* 292 */ NdrFcShort( 0x0 ),   /* Offset= 0 (292) */
/* 294 */ NdrFcLong( 0x1 ),   /* 1 */
/* 298 */ NdrFcShort( 0x0 ),   /* Offset= 0 (298) */
/* 300 */ NdrFcShort( 0xffff ), /* Offset= -1 (299) */
/* 302 */                                         /* 302 */
                                         /* 0x15,           */
FC_STRUCT /* 0x7,           */
/* 7 */ /* 304 */ NdrFcShort( 0x8 ), /* 8 */
/* 306 */ 0xb,           /* FC_HYPER */
                                         /* 0x5b,           */
FC_END /* 308 */
                                         /* 0x12, 0x0,           */
FC_UP /* 310 */ NdrFcShort( 0xc ), /* Offset= 12 (322) */
/* 312 */                                         /* 0x1b,           */
FC_CARRAY /* 0x1,           */
/* 1 */ /* 314 */ NdrFcShort( 0x2 ), /* 2 */
/* 316 */ 0x9,           /* Corr desc: FC ULONG
                                         /* 0x0,           */
                                         /* 318 */ NdrFcShort( 0xffffc ), /* -4 */
/* 320 */ 0x6,           /* FC_SHORT */
                                         /* 0x5b,           */
FC_END /* 322 */
                                         /* 0x17,           */
FC_CSTRUCT /* 0x3,           */
/* 3 */ /* 324 */ NdrFcShort( 0x8 ), /* 8 */

```

```

/* 326 */ NdrFcShort( 0xffff2 ), /* Offset= - 0x8, */
14 (312) /* FC_LONG */ 0x8, /* */
FC_LONG /* 0x5c, /* FC_PAD */ 0x5b, /* */
/* 330 */ 0x5b, /* */
FC_END /* 332 */ 0x2f, /* */
FC_IP /* 0xa, /* */
FC_CONSTANT_IID /* 0x0, /* 0 */ */
/* 334 */ NdrFcLong( 0x0 ), /* 0 */ */
/* 338 */ NdrFcShort( 0x0 ), /* 0 */ */
/* 340 */ NdrFcShort( 0x0 ), /* 0 */ */
/* 342 */ NdrFcShort( 0xc0, /* 192 */ */
0x0, /* */
0 */ */
/* 344 */ 0x0, /* 0 */ */
0 */ */
/* 346 */ 0x0, /* 0 */ */
0 */ */
/* 348 */ 0x0, /* 0 */ */
0x46, /* */
70 */ */
/* 350 */ 0x2f, /* */
FC_IP /* 0xa, /* */
FC_CONSTANT_IID /* 0x20400, /* 132096 */ */
/* 352 */ NdrFcLong( 0x0 ), /* 0 */ */
/* 356 */ NdrFcShort( 0x0 ), /* 0 */ */
/* 358 */ NdrFcShort( 0x0 ), /* 0 */ */
/* 360 */ NdrFcShort( 0xc0, /* 192 */ */
0x0, /* */
0 */ */
/* 362 */ 0x0, /* 0 */ */
0x0, /* */
0 */ */
/* 364 */ 0x0, /* 0 */ */
0x0, /* */
0 */ */
/* 366 */ 0x0, /* 0 */ */
0x46, /* */
70 */ */
/* 368 */ 0x12, 0x10, /* */
FC_UP [pointer_deref] /* */
/* 370 */ NdrFcShort( 0x2 ), /* Offset= 2 (372) */
/* 372 */ 0x12, 0x0, /* */
FC_UP /* */
/* 374 */ NdrFcShort( 0x1fc ), /* Offset= 508 (882) */
/* 376 */ 0x2a, /* */
FC_ENCAPSULATED_UNION /* 0x49, /* */
73 */ */
/* 378 */ NdrFcShort( 0x18 ), /* 24 */
/* 380 */ NdrFcShort( 0xa ), /* 10 */
/* 382 */ NdrFcLong( 0x8 ), /* 8 */
/* 386 */ NdrFcShort( 0x58 ), /* Offset= 88 (474) */
/* 388 */ NdrFcLong( 0xd ), /* 13 */
/* 392 */ NdrFcShort( 0x78 ), /* Offset= 120 (512) */
/* 394 */ NdrFcLong( 0x9 ), /* 9 */
/* 398 */ NdrFcShort( 0x94 ), /* Offset= 148 (546) */
/* 400 */ NdrFcLong( 0xc ), /* 12 */
/* 404 */ NdrFcShort( 0xbc ), /* Offset= 188 (592) */
/* 406 */ NdrFcLong( 0x24 ), /* 36 */
/* 410 */ NdrFcShort( 0x114 ), /* Offset= 276 (686) */
/* 412 */ NdrFcLong( 0x800d ), /* 32781 */
/* 416 */ NdrFcShort( 0x130 ), /* Offset= 304 (720) */
/* 418 */ NdrFcLong( 0x10 ), /* 16 */
/* 422 */ NdrFcShort( 0x148 ), /* Offset= 328 (750) */
/* 424 */ NdrFcLong( 0x2 ), /* 2 */
/* 428 */ NdrFcShort( 0x160 ), /* Offset= 352 (780) */
/* 430 */ NdrFcLong( 0x3 ), /* 3 */
/* 434 */ NdrFcShort( 0x178 ), /* Offset= 376 (810) */
/* 436 */ NdrFcLong( 0x14 ), /* 20 */
/* 440 */ NdrFcShort( 0x190 ), /* Offset= 400 (840) */
/* 442 */ NdrFcShort( 0xffff ), /* Offset= -1 (441) */
/* 444 */ 0x1b, /* */
FC_CARRAY /* 0x3, /* */
3 */ */
/* 446 */ NdrFcShort( 0x4 ), /* 4 */
/* 448 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x4b, /* */
FC_PP /* 0x5c, /* */
FC_PAD /* 454 */ 0x48, /* */
FC_VARIABLE_REPEAT /* 0x49, /* */
FC_FIXED_OFFSET /* 456 */ NdrFcShort( 0x4 ), /* 4 */
/* 458 */ NdrFcShort( 0x0 ), /* 0 */
/* 460 */ NdrFcShort( 0x1 ), /* 1 */
/* 462 */ NdrFcShort( 0x0 ), /* 0 */
/* 464 */ NdrFcShort( 0x0 ), /* 0 */
/* 466 */ 0x12, 0x0, /* FC_UP */
/* 468 */ NdrFcShort( 0xff6e ), /* Offset= -146 (322) */
/* 470 */ 0x5b, /* */
FC_END /* 0x8, /* */
FC_LONG /* 472 */ 0x5c, /* FC_PAD */
FC_END /* 474 */ 0x16, /* */
FC_PSTRUCT /* 0x3, /* */
3 */ */
/* 476 */ NdrFcShort( 0x8 ), /* 8 */
/* 478 */ 0x4b, /* */
FC_PP /* 0x5c, /* */
FC_PAD /* 480 */ 0x46, /* */
FC_NO_REPEAT /* 0x5c, /* */
FC_PAD /* 482 */ NdrFcShort( 0x4 ), /* 4 */
/* 484 */ NdrFcShort( 0x4 ), /* 4 */
/* 486 */ 0x11, 0x0, /* FC_RP */
/* 488 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (444) */
/* 490 */ 0x5b, /* */
FC_END /* 0x8, /* */
FC_LONG /* 492 */ 0x8, /* FC_LONG */
FC_END /* 494 */ 0x21, /* */
FC_BOGUS_ARRAY /* 0x3, /* */
3 */ */
/* 496 */ NdrFcShort( 0x0 ), /* 0 */
/* 498 */ 0x19, /* Corr desc: field pointer, FC ULONG */
0x0, /* */
/* 500 */ NdrFcShort( 0x0 ), /* 0 */
/* 502 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 506 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/* 508 */ NdrFcShort( 0xff50 ), /* Offset= -176 (332) */
/* 510 */ 0x5c, /* FC_PAD */
/* 512 */ 0x5b, /* */
FC_END /* 512 */ 0x1a, /* */
FC_BOGUS_STRUCT /* 0x3, /* */
3 */ */
/* 514 */ NdrFcShort( 0x8 ), /* 8 */
/* 516 */ NdrFcShort( 0x0 ), /* 0 */

```

```

/* 518 */ NdrFcShort( 0x6 ), /* Offset= 6 (524) */
/* 520 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 522 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 524 */
0x11, 0x0, /* */
FC_RP */
/* 526 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (494) */
/* 528 */
0x21, /* */
FC_BOGUS_ARRAY */
0x3, /* */
3 */
/* 530 */ NdrFcShort( 0x0 ), /* 0 */
/* 532 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 534 */ NdrFcShort( 0x0 ), /* 0 */
/* 536 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 540 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /* */
0 */
/* 542 */ NdrFcShort( 0xff40 ), /* Offset= -192 (350) */
/* 544 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 546 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 548 */ NdrFcShort( 0x8 ), /* 8 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 556 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 558 */
0x11, 0x0, /* */
FC_RP */
/* 560 */ NdrFcShort( 0xffe0 ), /* Offset= -32 (528) */
/* 562 */
0x1b, /* */
FC_CARRAY */
0x3, /* */
3 */
/* 564 */ NdrFcShort( 0x4 ), /* 4 */
/* 566 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 568 */ NdrFcShort( 0x0 ), /* 0 */
/*
/* 570 */ NdrFcShort( 0x4 ), /* 4 */
/* 572 */ 0x5c, /* FC_PAD */
0x48, /* */
FC_VARIABLE_REPEAT */
0x49, /* */
FC_FIXED_OFFSET */
/* 574 */ NdrFcShort( 0x4 ), /* 4 */
/* 576 */ NdrFcShort( 0x0 ), /* 0 */
/* 578 */ NdrFcShort( 0x1 ), /* 1 */
/* 580 */ NdrFcShort( 0x0 ), /* 0 */
/* 582 */ NdrFcShort( 0x0 ), /* 0 */
/* 584 */ 0x12, 0x0, /* FC_UP */
/* 586 */ NdrFcShort( 0x184 ), /* Offset= 388 (974) */
/* 588 */
0x5b, /* */
FC_END */
0x8, /* */
FC_LONG */
/* 590 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 592 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 594 */ NdrFcShort( 0x8 ), /* 8 */
/* 596 */ NdrFcShort( 0x0 ), /* 0 */
/* 598 */ NdrFcShort( 0x6 ), /* Offset= 6 (604) */
/* 600 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER */
/* 602 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END */
/* 604 */
0x11, 0x0, /* */
FC_RP */
/* 606 */ NdrFcShort( 0xffd4 ), /* Offset= -44 (562) */
/* 608 */
0x2f, /* */
FC_IP */
0x5a, /* */
FC_CONSTANT_IID */
/* 610 */ NdrFcLong( 0x2f ), /* 47 */
/* 614 */ NdrFcShort( 0x0 ), /* 0 */
/* 616 */ NdrFcShort( 0x0 ), /* 0 */
/* 618 */ 0xc0, /* 192 */
0x0, /* */
0 */
/* 620 */ 0x0, /* 0 */
0x0, /* */
0 */
/* 622 */ 0x0, /* 0 */
0x0, /* */
0 */
/*
/* 624 */ 0x0, /* 0 */
/* 626 */
0x1b, /* */
FC_CARRAY */
0x0, /* */
0 */
/* 628 */ NdrFcShort( 0x1 ), /* 1 */
/* 630 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 632 */ NdrFcShort( 0x4 ), /* 4 */
/* 634 */ 0x1, /* FC_BYT */
0x5b, /* */
FC_END */
/* 636 */
0x1a, /* */
FC_BOGUS_STRUCT */
0x3, /* */
3 */
/* 638 */ NdrFcShort( 0x10 ), /* 16 */
/* 640 */ NdrFcShort( 0x0 ), /* 0 */
/* 642 */ NdrFcShort( 0xa ), /* Offset= 10 (652) */
/* 644 */ 0x8, /* FC_LONG */
0x8, /* */
FC_LONG */
/* 646 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
*/
0x0, /* */
0 */
/* 648 */ NdrFcShort( 0xffd8 ), /* Offset= -40 (608) */
/* 650 */ 0x36, /* FC_POINTER */
0x5b, /* */
FC_END */
/* 652 */
0x12, 0x0, /* */
FC_UP */
/* 654 */ NdrFcShort( 0xffe4 ), /* Offset= -28 (626) */
/* 656 */
0x1b, /* */
FC_CARRAY */
0x3, /* */
3 */
/* 658 */ NdrFcShort( 0x4 ), /* 4 */
/* 660 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/* 662 */ NdrFcShort( 0x0 ), /* 0 */
/* 664 */
0x4b, /* */
FC_PP */
0x5c, /* */
FC_PAD */
/* 666 */
0x48, /* */
FC_VARIABLE_REPEAT */
0x49, /* */
FC_FIXED_OFFSET */

```

```

/* 668 */ NdrFcShort( 0x4 ), /* 4 */
/* 670 */ NdrFcShort( 0x0 ), /* 0 */
/* 672 */ NdrFcShort( 0x1 ), /* 1 */
/* 674 */ NdrFcShort( 0x0 ), /* 0 */
/* 676 */ NdrFcShort( 0x0 ), /* 0 */
/* 678 */ 0x12, 0x0, /* FC_UP */
/* 680 */ NdrFcShort( 0xffffd4 ), /* Offset= -44 (636) */
/* 682 */ 0x5b, /* */
FC_END /* 0x8, */
FC_LONG /* 0x8c,
/* 684 */ /* FC_PAD */
FC_END /* 0x5b, */
/* 686 */ 0x1a, /* */
FC_BOGUS_STRUCT /* 0x3, */
3 /*
/* 722 */ NdrFcShort( 0x18 ), /* 24 */
/* 724 */ NdrFcShort( 0x0 ), /* 0 */
/* 726 */ NdrFcShort( 0xa ), /* Offset= 10 (736) */
/* 728 */ 0x8, /* FC_LONG */
0x36, /* */
FC_POINTER /* */
/* 730 */ 0x4c, /* FC_EMBEDDED_COMPLEX */
/*
0 /*
/* 732 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (708) */
/* 734 */ 0x5c, /* FC_PAD */
0x5b, /* */
FC_END /* */
/* 736 */ /*
0x11, 0x0, /* */
FC_RP /* */
/* 738 */ NdrFcShort( 0xff0c ), /* Offset= -244 (494) */
/* 740 */ /*
0x1b, /* */
FC_CARRAY /* */
0x0, /* */
0 /*
/* 742 */ NdrFcShort( 0x1 ), /* 1 */
/* 744 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/*
/* 746 */ NdrFcShort( 0x0 ), /* 0 */
/* 748 */ 0x1, /* FC_BYTE */
0x5b, /* */
FC_END /* */
/* 750 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 752 */ NdrFcShort( 0x8 ), /* 8 */
/* 754 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 756 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 758 */ NdrFcShort( 0x4 ), /* 4 */
/* 760 */ NdrFcShort( 0x4 ), /* 4 */
/* 762 */ 0x12, 0x0, /* FC_UP */
/* 764 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (740) */
/* 766 */ /*
0x5b, /* */
FC_END /* */
FC_END /* 0x8, */
FC_LONG /* 0x8c,
/* 768 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 770 */ /*
0x1b, /* */
FC_CARRAY /* */
0x1, /* */
1 /*
/* 772 */ NdrFcShort( 0x2 ), /* 2 */
/* 774 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/*
/* 776 */ NdrFcShort( 0x0 ), /* 0 */
/* 778 */ 0x6, /* FC_SHORT */
0x5b, /* */
FC_END /* */
/* 780 */ /*
0x16, /* */
FC_PSTRUCT /* */
0x3, /* */
3 /*
/* 782 */ NdrFcShort( 0x8 ), /* 8 */
/* 784 */ /*
0x4b, /* */
FC_PP /* */
0x5c, /* */
FC_PAD /* */
/* 786 */ /*
0x46, /* */
FC_NO_REPEAT /* */
0x5c, /* */
FC_PAD /* */
/* 788 */ NdrFcShort( 0x4 ), /* 4 */
/* 790 */ NdrFcShort( 0x4 ), /* 4 */
/* 792 */ 0x12, 0x0, /* FC_UP */
/* 794 */ NdrFcShort( 0xffe8 ), /* Offset= -24 (770) */
/* 796 */ /*
0x5b, /* */
FC_END /* */
0x8, /* */
FC_LONG /* 0x8c,
/* 798 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */
/* 800 */ /*
0x1b, /* */
FC_CARRAY /* */
0x3, /* */
3 /*
/* 802 */ NdrFcShort( 0x4 ), /* 4 */
/* 804 */ 0x19, /* Corr desc: field
pointer, FC ULONG */
0x0, /* */
/*
/* 806 */ NdrFcShort( 0x0 ), /* 0 */
/* 808 */ 0x8, /* FC_LONG */
0x5b, /* */
FC_END /* */

```

<pre> /* 810 */ 0x16, /* FC_PSTRUCT */ 0x3, /* 3 */ /* 812 */ NdrFcShort(0x8), /* 8 */ /* 814 */ 0x4b, /* FC_PP */ 0x5c, /* FC_PAD */ /* 816 */ 0x46, /* FC_NO_REPEAT */ 0x5c, /* FC_PAD */ /* 818 */ NdrFcShort(0x4), /* 4 */ /* 820 */ NdrFcShort(0x4), /* 4 */ /* 822 */ 0x12, 0x0, /* FC_UP */ /* 824 */ NdrFcShort(0xffe8), /* Offset= -24 (800) */ /* 826 */ 0x5b, /* FC_END */ 0x8, /* FC_LONG */ /* 828 */ 0x8, /* FC_LONG */ 0x5b, /* FC_END */ /* 830 */ 0x1b, /* FC_CARRAY */ 0x7, /* 7 */ /* 832 */ NdrFcShort(0x8), /* 8 */ /* 834 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* 0 */ /* 836 */ NdrFcShort(0x0), /* 0 */ /* 838 */ 0xb, /* FC_HYPER */ 0x5b, /* FC_END */ /* 840 */ 0x16, /* FC_PSTRUCT */ 0x3, /* 3 */ /* 842 */ NdrFcShort(0x8), /* 8 */ /* 844 */ 0x4b, /* FC_PP */ 0x5c, /* FC_PAD */ /* 846 */ 0x46, /* FC_NO_REPEAT */ 0x5c, /* FC_PAD */ /* 848 */ NdrFcShort(0x4), /* 4 */ /* 850 */ NdrFcShort(0x4), /* 4 */ /* 852 */ 0x12, 0x0, /* FC_UP */ </pre>	<pre> /* 854 */ NdrFcShort(0xffe8), /* Offset= -24 (830) */ /* 856 */ 0x5b, /* FC_END */ 0x8, /* FC_LONG */ /* 858 */ 0x8, /* FC_LONG */ 0x5b, /* FC_END */ /* 860 */ 0x15, /* FC_STRUCT */ 0x3, /* 3 */ /* 862 */ NdrFcShort(0x8), /* 8 */ /* 864 */ 0x8, /* FC_LONG */ 0x8, /* FC_LONG */ /* 866 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 868 */ 0x1b, /* FC_CARRAY */ 0x3, /* 3 */ /* 870 */ NdrFcShort(0x8), /* 8 */ /* 872 */ 0x7, /* Corr desc: FC USHORT */ */ 0x0, /* 0 */ /* 874 */ NdrFcShort(0xffd8), /* -40 */ /* 876 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ */ 0x0, /* 0 */ /* 878 */ NdrFcShort(0xffee), /* Offset= -18 (860) */ /* 880 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 882 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 884 */ NdrFcShort(0x28), /* 40 */ /* 886 */ NdrFcShort(0xffee), /* Offset= -18 (868) */ /* 888 */ NdrFcShort(0x0), /* Offset= 0 (888) */ /* 890 */ 0x6, /* FC_SHORT */ 0x6, /* FC_SHORT */ /* 892 */ 0x8, /* FC_LONG */ 0x8, /* FC_LONG */ /* 894 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ */ 0x0, /* 0 */ </pre>	<pre> /* 896 */ NdrFcShort(0xfd8), /* Offset= -520 (376) */ /* 898 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 900 */ 0x12, 0x0, /* 0x12, 0x0 */ /* 902 */ NdrFcShort(0xef6), /* Offset= -266 (636) */ /* 904 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 906 */ 0x1, /* FC_BYTE */ 0x5c, /* FC_PAD */ /* 908 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 910 */ 0x6, /* FC_SHORT */ 0x5c, /* FC_PAD */ /* 912 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 914 */ 0x8, /* FC_LONG */ 0x5c, /* FC_PAD */ /* 916 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 918 */ 0xb, /* FC_HYPER */ 0x5c, /* FC_PAD */ /* 920 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 922 */ 0xa, /* FC_FLOAT */ 0x5c, /* FC_PAD */ /* 924 */ 0x12, 0x8, /* 0x12, 0x8 */ /* 926 */ 0xc, /* FC_DOUBLE */ 0x5c, /* FC_PAD */ /* 928 */ 0x12, 0x0, /* 0x12, 0x0 */ /* 930 */ NdrFcShort(0xfd8c), /* Offset= -628 (302) */ /* 932 */ 0x12, 0x10, /* 0x12, 0x10 */ /* 934 */ NdrFcShort(0xfd8e), /* Offset= -626 (308) */ /* 936 */ 0x12, 0x10, /* 0x12, 0x10 */ /* 938 */ NdrFcShort(0xfd8a2), /* Offset= -606 (332) */ /* 940 */ </pre>
---	---	---

```

        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 942 */ NdrFcShort( 0xffffb0 ),           /* Offset= -592 (350) */
/* 944 */
        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 946 */ NdrFcShort( 0xffffbe ),           /* Offset= -578 (368) */
/* 948 */
        0x12, 0x10,      /*
FC_UP [pointer_deref] */
/* 950 */ NdrFcShort( 0x2 ),               /* Offset= 2 (952) */
/* 952 */
        0x12, 0x0,       /*
FC_UP */
/* 954 */ NdrFcShort( 0x14 ),               /* Offset= 20 (974) */
/* 956 */
        0x15,            /*
FC_STRUCT */
        0x7,             /*
7 */
/* 958 */ NdrFcShort( 0x10 ),               /* 16 */
/* 960 */ 0x6,          /* FC_SHORT */
        0x1,             /*
FC_BYTE */
/* 962 */ 0x1,          /* FC_BYTE */
        0x8,             /*
FC_LONG */
/* 964 */ 0xb,          /* FC_HYPER */
        0x5b,            /*
FC_END */
/* 966 */
        0x12, 0x0,       /*
FC_UP */
/* 968 */ NdrFcShort( 0xfffff4 ),           /* Offset= -12 (956) */
/* 970 */
        0x12, 0x8,       /*
FC_UP [simple_pointer] */
/* 972 */ 0x2,          /* FC_CHAR */
        0x5c,            /*
FC_PAD */
/* 974 */
        0x1a,            /*
FC_ROGUS_STRUCT */
        0x7,             /*
7 */
/* 976 */ NdrFcShort( 0x20 ),               /* 32 */
/* 978 */ NdrFcShort( 0x0 ),                /* 0 */
/* 980 */ NdrFcShort( 0x0 ),               /* Offset= 0 (980) */
/* 982 */ 0x8,          /* FC_LONG */
        0x8,             /*
FC_LONG */
/* 984 */ 0x6,          /* FC_SHORT */
        0x6,             /*
FC_SHORT */
/* 986 */ 0x6,          /* FC_SHORT */
        0x6,             /*
FC_SHORT */
/* 988 */ 0x4c,          /* FC_EMBEDDED_COMPLEX */
*/

```

```

        0x0,             /*
0 */
/* 990 */ NdrFcShort( 0xfc28 ),           /* Offset= -984 (6) */
/* 992 */ 0x5c,          /* FC_PAD */
        0x5b,            /*
FC_END */
/* 994 */ 0xb4,          /* FC_USER_MARSHAL */
        0x83,            /*
131 */
/* 996 */ NdrFcShort( 0x0 ),               /* 0 */
/* 998 */ NdrFcShort( 0x10 ),               /* 16 */
/* 1000 */ NdrFcShort( 0x0 ),               /* 0 */
/* 1002 */ NdrFcShort( 0xfc18 ),           /* Offset= -1000 (2) */
/* 1004 */
        0x11, 0x4,       /*
FC_RP [allocated_on_stack] */
/* 1006 */ NdrFcShort( 0x6 ),               /* Offset= 6 (1012) */
/* 1008 */
        0x13, 0x0,       /*
FC_OP */
/* 1010 */ NdrFcShort( 0xffdc ),           /* Offset= -36 (974) */
/* 1012 */
        0xb4,            /*
FC_USER_MARSHAL */
        0x83,            /*
131 */
/* 1014 */ NdrFcShort( 0x0 ),               /* 0 */
/* 1016 */ NdrFcShort( 0x10 ),               /* 16 */
/* 1018 */ NdrFcShort( 0x0 ),               /* 0 */
/* 1020 */ NdrFcShort( 0xffff4 ),           /* Offset= -12 (1008) */
        0x0
    }
}

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize,
        VARIANT_UserMarshal,
        VARIANT_UserUnmarshal,
        VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,

```

```

GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x4F,0xBF,0xE0,0x8B}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFEFE6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =
{
    0,
    34,
    68,
    102,
    136,
    170
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo =
{
    {
        &Object_StubDesc,
        __MIDL_ProcFormatString.Format,
        &ITPCC_FormatStringOffsetTable[-3],
        0,
        0,
        0
    };

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
    {
        &Object_StubDesc,
        0,
        __MIDL_ProcFormatString.Format,
        &ITPCC_FormatStringOffsetTable[-3],
        0,
        0,
        0,
        0
    };

CINTERFACE_PROXYVtbl(_ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
});

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,

```

```

&ITPCC_ServerInfo,
9,
0, /* pure interpreted */
CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0,
0,
0,
0,
0,
0,
_MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x20000, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CIInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CIInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CIInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    (CIInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define _tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID(_tpcc_com_ps, pIID,
n)

int __stdcall _tpcc_com_ps_IID_Lookup( const IID *
pIID, int * pIndex )
{
    if(!_tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
    }
}

```

```

        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,
    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
    0, // no delegation
    & _tpcc_com_ps_IID_Lookup,
    1,
    2,
    0, /* table of [async_uuid] interfaces */
    0, /* Filler1 */
    0, /* Filler2 */
    0 /* Filler3 */
};

#if _MSC_VER >= 1200
#pragma warning(push)
#endif

#endif /* !defined(_M_IA64) && !defined(_M_AMD64) */

/* this ALWAYS GENERATED file contains the proxy stub
code */

/* File created by MIDL compiler version 6.00.0361
*/
/* at Thu Mar 16 18:21:12 2006
*/
/* Compiler settings for .\src\tpcc_com_ps.idl:
Oicf, W1, Zp8, env:Win64 (32b run, appending)
protocol : dce , ms_ext, c_ext, robust
error checks: allocation ref bounds_check enum
stub_data
    VC __declspec() decoration level:
        __declspec(uuid()), __declspec(selectany),
        __declspec(novtable)
            DECLSPEC_UUID(), MIDL_INTERFACE()
*/
//@@MIDL_FILE_HEADING( )

#if defined(_M_IA64) || defined(_M_AMD64)

#pragma warning( disable: 4049 ) /* more than 64k
source lines */
#if _MSC_VER >= 1200
#pragma warning(push)
#endif

```

```

#pragma warning( disable: 4211 ) /* redefine extent
to static */
#pragma warning( disable: 4232 ) /* dllimport
identity */
#define USE_STUBLESS_PROXY

/* verify that the <rpcproxy.h> version is high
enough to compile this file*/
#ifndef __REDO_RPCPROXY_H_VERSION__
#define __REQUIRED_RPCPROXY_H_VERSION__ 475
#endif

#include "rpcproxy.h"
#ifndef __RPCPROXY_H_VERSION__
#error this stub requires an updated version of
<rpcproxy.h>
#endif // __RPCPROXY_H_VERSION__

#include "tpcc_com_ps.h"

#define TYPE_FORMAT_STRING_SIZE 1003
#define PROC_FORMAT_STRING_SIZE 253
#define TRANSMIT_AS_TABLE_SIZE 0
#define WIRE_MARSHAL_TABLE_SIZE 1

typedef struct _MIDL_TYPE_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ TYPE_FORMAT_STRING_SIZE ];
} MIDL_TYPE_FORMAT_STRING;

typedef struct _MIDL_PROC_FORMAT_STRING
{
    short Pad;
    unsigned char Format[ PROC_FORMAT_STRING_SIZE ];
} MIDL_PROC_FORMAT_STRING;

static RPC_SYNTAX_IDENTIFIER _RpcTransferSyntax =
{{0xA885D04,0x1CEB,0x11C9,{0x9F,0xE8,0x08,0x00,0x2B,
0x10,0x48,0x60}}, {2,0}};

extern const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString;
extern const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString;

extern const MIDL_STUB_DESC Object_StubDesc;

extern const MIDL_SERVER_INFO ITPCC_ServerInfo;
extern const MIDL_STUBLESS_PROXY_INFO
ITPCC_ProxyInfo;

extern const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ];

```

```

#ifndef _RPC_WIN64_
#error Invalid build platform for this stub.
#endif

static const MIDL_PROC_FORMAT_STRING
__MIDL_ProcFormatString =
{
    {
        0,
    }

    /* Procedure NewOrder */
    0x33,           /*
FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 2 */ NdrFcLong( 0x0 ), /* 0 */
/* 6 */ NdrFcShort( 0x3 ), /* 3 */
/* 8 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 10 */ NdrFcShort( 0x0 ), /* 0 */
/* 12 */ NdrFcShort( 0x8 ), /* 8 */
/* 14 */ 0x47,          /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 16 */ 0xa,          /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 18 */ NdrFcShort( 0x20 ), /* 32 */
/* 20 */ NdrFcShort( 0x20 ), /* 32 */
/* 22 */ NdrFcShort( 0x0 ), /* 0 */
/* 24 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */
/* 26 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 28 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 30 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */
/* 32 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 34 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 36 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */
/* 38 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 40 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 42 */ 0x8,            /* FC_LONG */
        0x0,           /*
0 */

```

```

        /* Procedure Payment */
/* 44 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 46 */ NdrFcLong( 0x0 ), /* 0 */
/* 50 */ NdrFcShort( 0x4 ), /* 4 */
/* 52 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 54 */ NdrFcShort( 0x0 ), /* 0 */
/* 56 */ NdrFcShort( 0x8 ), /* 8 */
/* 58 */ 0x47,          /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 60 */ 0xa,          /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 62 */ NdrFcShort( 0x20 ), /* 32 */
/* 64 */ NdrFcShort( 0x20 ), /* 32 */
/* 66 */ NdrFcShort( 0x0 ), /* 0 */
/* 68 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */
/* 70 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 72 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 74 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

        /* Parameter txn_out */
/* 76 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 78 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 80 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

        /* Return value */
/* 82 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 84 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 86 */ 0x8,            /* FC_LONG */
        0x0,           /*
0 */

        /* Procedure Delivery */
/* 88 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 90 */ NdrFcLong( 0x0 ), /* 0 */
/* 94 */ NdrFcShort( 0x5 ), /* 5 */
/* 96 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */

```

```

/* 98 */ NdrFcShort( 0x0 ), /* 0 */
/* 100 */ NdrFcShort( 0x8 ), /* 8 */
/* 102 */ 0x47,          /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 104 */ 0xa,          /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 106 */ NdrFcShort( 0x20 ), /* 32 */
/* 108 */ NdrFcShort( 0x20 ), /* 32 */
/* 110 */ NdrFcShort( 0x0 ), /* 0 */
/* 112 */ NdrFcShort( 0x0 ), /* 0 */

        /* Parameter txn_in */
/* 114 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 116 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 118 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

        /* Parameter txn_out */
/* 120 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 122 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 124 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

        /* Return value */
/* 126 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 128 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 130 */ 0x8,            /* FC_LONG */
        0x0,           /*
0 */

        /* Procedure StockLevel */
/* 132 */ 0x33,           /* FC_AUTO_HANDLE */
        0x6c,           /*
Old Flags: object, Oi2 */
/* 134 */ NdrFcLong( 0x0 ), /* 0 */
/* 138 */ NdrFcShort( 0x6 ), /* 6 */
/* 140 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 142 */ NdrFcShort( 0x0 ), /* 0 */
/* 144 */ NdrFcShort( 0x8 ), /* 8 */
/* 146 */ 0x47,          /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
        0x3,           /*
3 */
/* 148 */ 0xa,          /* 10 */
        0x7,           /*
Ext Flags: new corr desc, clt corr check, srv corr
check, */

```

```

/* 150 */ NdrFcShort( 0x20 ), /* 32 */
/* 152 */ NdrFcShort( 0x20 ), /* 32 */
/* 154 */ NdrFcShort( 0x0 ), /* 0 */
/* 156 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 158 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */
/* 160 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 162 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 164 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 166 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 168 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 170 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 172 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 174 */ 0x8,           /* FC_LONG */
          0x0,           /* */
0 */

    /* Procedure OrderStatus */

/* 176 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* */
Old Flags: object, Oi2
/* 178 */ NdrFcLong( 0x0 ), /* 0 */
/* 182 */ NdrFcShort( 0x7 ), /* 7 */
/* 184 */ NdrFcShort( 0x30 ), /* ia64 Stack
size/offset = 48 */
/* 186 */ NdrFcShort( 0x0 ), /* 0 */
/* 188 */ NdrFcShort( 0x8 ), /* 8 */
/* 190 */ 0x47,           /* Oi2 Flags: srv must
size, clt must size, has return, has ext, */
          0x3,           /* */
3 */
/* 192 */ 0xa,            /* 10 */
          0x7,           /* */
Ext Flags: new corr desc, clt corr check, srv corr
check, */
/* 194 */ NdrFcShort( 0x20 ), /* 32 */
/* 196 */ NdrFcShort( 0x20 ), /* 32 */
/* 198 */ NdrFcShort( 0x0 ), /* 0 */
/* 200 */ NdrFcShort( 0x0 ), /* 0 */

    /* Parameter txn_in */

/* 202 */ NdrFcShort( 0x8b ), /* Flags: must size,
must free, in, by val, */

```

```

/* 204 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 206 */ NdrFcShort( 0x3ce ), /* Type
Offset=974 */

    /* Parameter txn_out */

/* 208 */ NdrFcShort( 0x6113 ), /* Flags:
must size, must free, out, simple ref, srv alloc
size=24 */
/* 210 */ NdrFcShort( 0x20 ), /* ia64 Stack
size/offset = 32 */
/* 212 */ NdrFcShort( 0x3e0 ), /* Type
Offset=992 */

    /* Return value */

/* 214 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 216 */ NdrFcShort( 0x28 ), /* ia64 Stack
size/offset = 40 */
/* 218 */ 0x8,           /* FC_LONG */
          0x0,           /* */
0 */

    /* Procedure CallSetComplete */

/* 220 */ 0x33,           /* FC_AUTO_HANDLE */
          0x6c,           /* */
Old Flags: object, Oi2
/* 222 */ NdrFcLong( 0x0 ), /* 0 */
/* 226 */ NdrFcShort( 0x8 ), /* 8 */
/* 228 */ NdrFcShort( 0x10 ), /* ia64 Stack
size/offset = 16 */
/* 230 */ NdrFcShort( 0x0 ), /* 0 */
/* 232 */ NdrFcShort( 0x8 ), /* 8 */
/* 234 */ 0x44,           /* Oi2 Flags: has
return, has ext, */
          0x1,           /* */
1 */
/* 236 */ 0xa,            /* 10 */
          0x1,           /* */
Ext Flags: new corr desc, */
/* 238 */ NdrFcShort( 0x0 ), /* 0 */
/* 240 */ NdrFcShort( 0x0 ), /* 0 */
/* 242 */ NdrFcShort( 0x0 ), /* 0 */
/* 244 */ NdrFcShort( 0x0 ), /* 0 */

    /* Return value */

/* 246 */ NdrFcShort( 0x70 ), /* Flags: out, return,
base type, */
/* 248 */ NdrFcShort( 0x8 ), /* ia64 Stack
size/offset = 8 */
/* 250 */ 0x8,            /* FC_LONG */
          0x0,           /* */
0 */

    /* */
          0x0
};

}

```

```

static const MIDL_TYPE_FORMAT_STRING
__MIDL_TypeFormatString =
{
    0,
    {
        NdrFcShort( 0x0 ), /* */
        0x12, 0x0, /* */
        FC_UP /* */
    },
    4 /* */
    950( 954 ) /* */
    6 /* */
    0x2b, /* */
    FC_NON_ENCAPSULATED_UNION /* */
    0x9, /* */
    FC ULONG /* */
    8 /* */
    0x7, /* */
    FC USHORT /* */
    0x0, /* */
    0x0, /* */
    10 /* */
    0xffff8, /* */
    12 /* */
    0x1, /* */
    Corr flags: early, /* */
    14 /* */
    NdrFcShort( 0x2 ), /* Offset= 2 (16) */
    16 /* */
    NdrFcShort( 0x10 ), /* 16 */
    18 /* */
    NdrFcShort( 0x2f ), /* 47 */
    20 /* */
    NdrFcLong( 0x14 ), /* 20 */
    24 /* */
    NdrFcShort( 0x800b ), /* Simple arm
type: FC_HYPER */
    26 /* */
    NdrFcLong( 0x3 ), /* 3 */
    30 /* */
    NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
    32 /* */
    NdrFcLong( 0x11 ), /* 17 */
    36 /* */
    NdrFcShort( 0x8001 ), /* Simple arm
type: FC_BYT */
    38 /* */
    NdrFcLong( 0x2 ), /* 2 */
    42 /* */
    NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
    44 /* */
    NdrFcLong( 0x4 ), /* 4 */
    48 /* */
    NdrFcShort( 0x800a ), /* Simple arm
type: FC_FLOAT */
    50 /* */
    NdrFcLong( 0x5 ), /* 5 */
    54 /* */
    NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
    56 /* */
    NdrFcLong( 0xb ), /* 11 */
    60 /* */
    NdrFcShort( 0x8006 ), /* Simple arm
type: FC_SHORT */
    62 /* */
    NdrFcLong( 0xa ), /* 10 */
    66 /* */
    NdrFcShort( 0x8008 ), /* Simple arm
type: FC_LONG */
    68 /* */
    NdrFcLong( 0x6 ), /* 6 */
    72 /* */
    NdrFcShort( 0xe8 ), /* Offset= 232 (304) */
    74 /* */
    NdrFcLong( 0x7 ), /* 7 */
    78 /* */
    NdrFcShort( 0x800c ), /* Simple arm
type: FC_DOUBLE */
    80 /* */
    NdrFcLong( 0x8 ), /* 8 */
    84 /* */
    NdrFcShort( 0xe2 ), /* Offset= 226 (310) */
    86 /* */
    NdrFcLong( 0xd ), /* 13 */
    90 /* */
    NdrFcShort( 0xf6 ), /* Offset= 246 (336) */
    92 /* */
    NdrFcLong( 0x9 ), /* 9 */
    96 /* */
    NdrFcShort( 0x102 ), /* Offset=
258 (354) */

```

```

/* 98 */ NdrFcLong( 0x2000 ),           /* 8192 */
/* 102 */ NdrFcShort( 0x10e ),           /* Offset= */
270 (372) */
/* 104 */ NdrFcLong( 0x24 ),             /* 36 */
/* 108 */ NdrFcShort( 0x304 ),           /* Offset= */
772 (880) */
/* 110 */ NdrFcLong( 0x4024 ),           /* 16420 */
/* 114 */ NdrFcShort( 0x2fe ),           /* Offset= */
766 (880) */
/* 116 */ NdrFcLong( 0x4011 ),           /* 16401 */
/* 120 */ NdrFcShort( 0x2fc ),           /* Offset= */
764 (884) */
/* 122 */ NdrFcLong( 0x4002 ),           /* 16386 */
/* 126 */ NdrFcShort( 0x2fa ),           /* Offset= */
762 (888) */
/* 128 */ NdrFcLong( 0x4003 ),           /* 16387 */
/* 132 */ NdrFcShort( 0x2f8 ),           /* Offset= */
760 (892) */
/* 134 */ NdrFcLong( 0x4014 ),           /* 16404 */
/* 138 */ NdrFcShort( 0x2f6 ),           /* Offset= */
758 (896) */
/* 140 */ NdrFcLong( 0x4004 ),           /* 16388 */
/* 144 */ NdrFcShort( 0x2f4 ),           /* Offset= */
756 (900) */
/* 146 */ NdrFcLong( 0x4005 ),           /* 16389 */
/* 150 */ NdrFcShort( 0x2f2 ),           /* Offset= */
754 (904) */
/* 152 */ NdrFcLong( 0x400b ),           /* 16395 */
/* 156 */ NdrFcShort( 0x2dc ),           /* Offset= */
732 (888) */
/* 158 */ NdrFcLong( 0x400a ),           /* 16394 */
/* 162 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (892) */
/* 164 */ NdrFcLong( 0x4006 ),           /* 16390 */
/* 168 */ NdrFcShort( 0x2e4 ),           /* Offset= */
740 (908) */
/* 170 */ NdrFcLong( 0x4007 ),           /* 16391 */
/* 174 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (904) */
/* 176 */ NdrFcLong( 0x4008 ),           /* 16392 */
/* 180 */ NdrFcShort( 0x2dc ),           /* Offset= */
732 (912) */
/* 182 */ NdrFcLong( 0x400d ),           /* 16397 */
/* 186 */ NdrFcShort( 0x2da ),           /* Offset= */
730 (916) */
/* 188 */ NdrFcLong( 0x4009 ),           /* 16393 */
/* 192 */ NdrFcShort( 0x2d8 ),           /* Offset= */
728 (920) */
/* 194 */ NdrFcLong( 0x6000 ),           /* 24576 */
/* 198 */ NdrFcShort( 0x2d6 ),           /* Offset= */
726 (924) */
/* 200 */ NdrFcLong( 0x400c ),           /* 16396 */
/* 204 */ NdrFcShort( 0x2d4 ),           /* Offset= */
724 (928) */
/* 206 */ NdrFcLong( 0x10 ),             /* 16 */
/* 210 */ NdrFcShort( 0x8002 ),           /* Simple arm
type: FC_CHAR */
/* 212 */ NdrFcLong( 0x12 ),             /* 18 */
/* 216 */ NdrFcShort( 0x8006 ),           /* Simple arm
type: FC_SHORT */
/* 218 */ NdrFcLong( 0x13 ),             /* 19 */
/* 222 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */

```

```

/* 224 */ NdrFcLong( 0x15 ),             /* 21 */
/* 228 */ NdrFcShort( 0x800b ),           /* Simple arm
type: FC_HYPER */
/* 230 */ NdrFcLong( 0x16 ),             /* 22 */
/* 234 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */
/* 236 */ NdrFcLong( 0x17 ),             /* 23 */
/* 240 */ NdrFcShort( 0x8008 ),           /* Simple arm
type: FC_LONG */
/* 242 */ NdrFcLong( 0xe ),              /* 14 */
/* 246 */ NdrFcShort( 0x2b2 ),           /* Offset= */
690 (936) */
/* 248 */ NdrFcLong( 0x400e ),           /* 16398 */
/* 252 */ NdrFcShort( 0x2b6 ),           /* Offset= */
694 (946) */
/* 254 */ NdrFcLong( 0x4010 ),           /* 16400 */
/* 258 */ NdrFcShort( 0x2b4 ),           /* Offset= */
692 (950) */
/* 260 */ NdrFcLong( 0x4012 ),           /* 16402 */
/* 264 */ NdrFcShort( 0x270 ),           /* Offset= */
624 (888) */
/* 266 */ NdrFcLong( 0x4013 ),           /* 16403 */
/* 270 */ NdrFcShort( 0x26e ),           /* Offset= */
622 (892) */
/* 272 */ NdrFcLong( 0x4015 ),           /* 16405 */
/* 276 */ NdrFcShort( 0x26c ),           /* Offset= */
620 (896) */
/* 278 */ NdrFcLong( 0x4016 ),           /* 16406 */
/* 282 */ NdrFcShort( 0x262 ),           /* Offset= */
610 (892) */
/* 284 */ NdrFcLong( 0x4017 ),           /* 16407 */
/* 288 */ NdrFcShort( 0x25c ),           /* Offset= */
604 (892) */
/* 290 */ NdrFcLong( 0x0 ),              /* 0 */
/* 294 */ NdrFcShort( 0x0 ),             /* Offset= 0 (294) */
/* 296 */ NdrFcLong( 0x1 ),              /* 1 */
/* 300 */ NdrFcShort( 0x0 ),             /* Offset= 0 (300) */
/* 302 */ NdrFcShort( 0xffff ),           /* Offset= -1
(301) */
/* 304 */                                         0x15,          /* */
FC_STRUCT */                               0x7,            /* */
7 */
/* 306 */ NdrFcShort( 0x8 ),             /* 8 */
/* 308 */ 0xb,                            /* FC_HYPER */
0x5b,          /* */
FC_END */                                0x12, 0x0,      /* */
/* 310 */                                         0x12, 0x0,      /* */
FC_UP */                                 0x1b,          /* */
/* 312 */ NdrFcShort( 0xe ),             /* Offset= 14 (326) */
/* 314 */                                         0x1b,          /* */
FC_CARRAY */                             0x1,           /* */
1 */
/* 316 */ NdrFcShort( 0x2 ),              /* 2 */
/* 318 */ 0x9,                            /* Corr desc: FC ULONG
*/
0x0,           /* */
/* 320 */ NdrFcShort( 0xffff ),           /* -4 */

```

```

/* 322 */ NdrFcShort( 0x1 ),             /* Corr flags: early,
*/
/* 324 */ 0x6,                            /* FC_SHORT */
0x5b,          /* */
FC_END */                                0x17,          /* */
/* 326 */                                         0x3,           /* */
FC_CSTRUCT */                           3 */
/* 328 */ NdrFcShort( 0x8 ),              /* 8 */
/* 330 */ NdrFcShort( 0xffff0 ),           /* Offset= -
16 (314) */
/* 332 */ 0x8,                            /* FC_LONG */
0x8,           /* */
FC_LONG */                                0x5c,          /* */
/* 334 */ 0x5c,                            /* FC_PAD */
0x5b,          /* */
FC_END */                                0x2f,          /* */
/* 336 */                                         0x5a,          /* */
FC_IP */                                 0 */
FC_CONSTANT_IID */                      0 */
/* 338 */ NdrFcLong( 0x0 ),              /* 0 */
/* 342 */ NdrFcShort( 0x0 ),              /* 0 */
/* 344 */ NdrFcShort( 0x0 ),              /* 0 */
/* 346 */ 0xc0,                            /* 192 */
0x0,           /* */
0 */
/* 348 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 350 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 352 */ 0x0,                            /* 0 */
0x46,          /* */
70 */
/* 354 */                                         0x2f,          /* */
FC_IP */                                0x5a,          /* */
FC_CONSTANT_IID */                      0 */
/* 356 */ NdrFcLong( 0x20400 ),           /* 132096 */
/* 360 */ NdrFcShort( 0x0 ),              /* 0 */
/* 362 */ NdrFcShort( 0x0 ),              /* 0 */
/* 364 */ 0xc0,                            /* 192 */
0x0,           /* */
0 */
/* 366 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 368 */ 0x0,                            /* 0 */
0x0,           /* */
0 */
/* 370 */ 0x0,                            /* 0 */
0x46,          /* */
70 */
/* 372 */                                         0x12, 0x10,    /* */
FC_UP [pointer_deref] */                  0x12, 0x10,    /* */
/* 374 */ NdrFcShort( 0x2 ),              /* Offset= 2 (376) */

```

```

/* 376 */
          0x12, 0x0,      /*
FC_UP */
/* 378 */ NdrFcShort( 0x1e4 ),      /* Offset=
484 (862) */
/* 380 */
          0x2a,           /*
FC_ENCAPSULATED_UNION */
          0x89,           /*
137 */
/* 382 */ NdrFcShort( 0x20 ), /* 32 */
/* 384 */ NdrFcShort( 0xa ), /* 10 */
/* 386 */ NdrFcLong( 0x8 ), /* 8 */
/* 390 */ NdrFcShort( 0x50 ), /* Offset= 80 (470) */
/* 392 */ NdrFcLong( 0xd ), /* 13 */
/* 396 */ NdrFcShort( 0x70 ), /* Offset= 112 (508) */
/* 398 */ NdrFcLong( 0x9 ), /* 9 */
/* 402 */ NdrFcShort( 0x90 ), /* Offset= 144 (546) */
/* 404 */ NdrFcLong( 0xc ), /* 12 */
/* 408 */ NdrFcShort( 0xb0 ), /* Offset= 176 (584) */
/* 410 */ NdrFcLong( 0x24 ), /* 36 */
/* 414 */ NdrFcShort( 0x102 ), /* Offset=
258 (672) */
/* 416 */ NdrFcLong( 0x800d ), /* 32781 */
/* 420 */ NdrFcShort( 0x11e ), /* Offset=
286 (706) */
/* 422 */ NdrFcLong( 0x10 ), /* 16 */
/* 426 */ NdrFcShort( 0x138 ), /* Offset=
312 (738) */
/* 428 */ NdrFcLong( 0x2 ), /* 2 */
/* 432 */ NdrFcShort( 0x14e ), /* Offset=
334 (766) */
/* 434 */ NdrFcLong( 0x3 ), /* 3 */
/* 438 */ NdrFcShort( 0x164 ), /* Offset=
356 (794) */
/* 440 */ NdrFcLong( 0x14 ), /* 20 */
/* 444 */ NdrFcShort( 0x17a ), /* Offset=
378 (822) */
/* 446 */ NdrFcShort( 0xffff ), /* Offset= -1
(445) */
/* 448 */
          0x21,           /*
FC_BOGUS_ARRAY */
          0x3,            /*
3 */
/* 450 */ NdrFcShort( 0x0 ), /* 0 */
/* 452 */ 0x19,        /* Corr desc: field
pointer, FC ULONG */
          0x0,            /*
*/
/* 454 */ NdrFcShort( 0x0 ), /* 0 */
/* 456 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 458 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 462 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 464 */
          0x12, 0x0,      /*
FC_UP */
/* 466 */ NdrFcShort( 0xff74 ), /* Offset= -
140 (326) */
/* 468 */ 0x5c,        /* FC_PAD */
          0x5b,           /*
FC_END */
          0x21,           /*
          0x3,            /*
3 */
/* 470 */
          0x1a,           /*
FC_BOGUS_STRUCT */
          0x3,            /*
3 */
/* 472 */ NdrFcShort( 0x10 ), /* 16 */
/* 474 */ NdrFcShort( 0x0 ), /* 0 */
/* 476 */ NdrFcShort( 0x6 ), /* Offset= 6 (482) */
/* 478 */ 0x8,         /* FC_LONG */
          0x40,           /*
FC_STRUCTPAD4 */
/* 480 */ 0x36,       /* FC_POINTER */
          0x5b,           /*
FC_END */
/* 482 */
          0x11, 0x0,      /*
FC_RP */
/* 484 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (448) */
/* 486 */
          0x21,           /*
FC_BOGUS_ARRAY */
          0x3,            /*
3 */
/* 488 */ NdrFcShort( 0x0 ), /* 0 */
/* 490 */ 0x19,        /* Corr desc: field
pointer, FC ULONG */
          0x0,            /*
*/
/* 492 */ NdrFcShort( 0x0 ), /* 0 */
/* 494 */ NdrFcShort( 0x1 ), /* Corr flags: early,
*/
/* 496 */ NdrFcLong( 0xffffffff ), /* -1 */
/* 500 */ NdrFcShort( 0x0 ), /* Corr flags: */
/* 502 */ 0x4c,       /* FC_EMBEDDED_COMPLEX */
          0x0,            /*
0 */
/* 504 */ NdrFcShort( 0xffff58 ), /* Offset= -
168 (336) */
/* 506 */ 0x5c,       /* FC_PAD */
          0x5b,           /*
FC_END */
/* 508 */
          0x1a,           /*
FC_BOGUS_STRUCT */
          0x3,            /*
3 */
/* 510 */ NdrFcShort( 0x10 ), /* 16 */
/* 512 */ NdrFcShort( 0x0 ), /* 0 */
/* 514 */ NdrFcShort( 0x6 ), /* Offset= 6 (520) */
/* 516 */ 0x8,         /* FC_LONG */
          0x40,           /*
FC_STRUCTPAD4 */
/* 518 */ 0x36,       /* FC_POINTER */
          0x5b,           /*
FC_END */
/* 520 */
          0x11, 0x0,      /*
FC_RP */
/* 522 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (486) */
/* 524 */
          0x21,           /*
FC_BOGUS_ARRAY */
          0x3,            /*
3 */
/* 548 */ NdrFcShort( 0x10 ), /* 16 */
/* 550 */ NdrFcShort( 0x0 ), /* 0 */
/* 552 */ NdrFcShort( 0x6 ), /* Offset= 6 (558) */
/* 554 */ 0x8,         /* FC_LONG */
          0x40,           /*
FC_STRUCTPAD4 */
/* 556 */ 0x36,       /* FC_POINTER */
          0x5b,           /*
FC_END */
/* 558 */
          0x11, 0x0,      /*
FC_RP */
/* 560 */ NdrFcShort( 0xffffdc ), /* Offset= -
36 (524) */
/* 562 */
          0x21,           /*
FC_BOGUS_ARRAY */
          0x3,            /*
3 */
/* 564 */ NdrFcShort( 0x0 ), /* 0 */
/* 566 */ 0x19,        /* Corr desc: field
pointer, FC ULONG */
          0x0,            /*
*/
/* 568 */
          0x12, 0x0,      /*
FC_UP */
/* 580 */ NdrFcShort( 0x176 ), /* Offset=
374 (954) */
/* 582 */ 0x5c,       /* FC_PAD */
          0x21,           /*
          0x3,            /*
3 */

```

<pre> FC_END */ /* 584 */ FC_BOGUS_STRUCT */ 0x1a, /* 3 */ /* 586 */ NdrFcShort(0x10), /* 16 */ /* 588 */ NdrFcShort(0x0), /* 0 */ /* 590 */ NdrFcShort(0x6), /* Offset= 6 (596) */ /* 592 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 594 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 596 */ 0x11, 0x0, /* FC_RP */ /* 598 */ NdrFcShort(0xffffdc), /* Offset= -36 (562) */ /* 600 */ 0x2f, /* FC_IP */ 0x5a, /* FC_CONSTANT_IID */ /* 602 */ NdrFcLong(0x2f), /* 47 */ /* 606 */ NdrFcShort(0x0), /* 0 */ /* 608 */ NdrFcShort(0x0), /* 0 */ /* 610 */ 0xc0, /* 192 */ 0x0, /* 0 */ /* 612 */ 0x0, /* 0 */ 0x0, /* 0 */ /* 614 */ 0x0, /* 0 */ 0x0, /* 0 */ /* 616 */ 0x0, /* 0 */ 0x46, /* 70 */ /* 618 */ 0x1b, /* FC_CARRAY */ 0x0, /* 0 */ /* 620 */ NdrFcShort(0x1), /* 1 */ /* 622 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 624 */ NdrFcShort(0x4), /* 4 */ /* 626 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 628 */ 0x1, /* FC_BYTE */ 0x5b, /* FC_END */ /* 630 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 632 */ NdrFcShort(0x18), /* 24 */ </pre>	<pre> 0x5b, /* */ /* 634 */ NdrFcShort(0x0), /* 0 */ /* 636 */ NdrFcShort(0xa), /* Offset= 10 (646) */ /* 638 */ 0x8, /* FC_LONG */ 0x8, /* */ FC_LONG */ /* 640 */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* */ 0x0, /* */ /* 642 */ NdrFcShort(0xffffd6), /* Offset= -42 (600) */ /* 644 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 646 */ 0x12, 0x0, /* FC_UP */ /* 648 */ NdrFcShort(0xfffe2), /* Offset= -30 (618) */ /* 650 */ 0x21, /* FC_BOGUS_ARRAY */ 0x3, /* 3 */ /* 652 */ NdrFcShort(0x0), /* 0 */ /* 654 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 656 */ NdrFcShort(0x0), /* 0 */ /* 658 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 660 */ NdrFcLong(0xffffffff), /* -1 */ /* 664 */ NdrFcShort(0x0), /* Corr flags: */ /* 666 */ 0x12, 0x0, /* FC_UP */ /* 668 */ NdrFcShort(0xffffda), /* Offset= -38 (630) */ /* 670 */ 0x5c, /* FC_PAD */ 0x5b, /* FC_END */ /* 672 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 674 */ NdrFcShort(0x10), /* 16 */ /* 676 */ NdrFcShort(0x0), /* 0 */ /* 678 */ NdrFcShort(0x6), /* Offset= 6 (684) */ /* 680 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 682 */ 0x36, /* FC_POINTER */ 0x5b, /* FC_END */ /* 684 */ 0x11, 0x0, /* FC_RP */ /* 686 */ NdrFcShort(0xffffdc), /* Offset= -36 (650) */ /* 688 */ </pre>	<pre> 0x1d, /* FC_SMFARRAY */ 0x0, /* 0 */ /* 690 */ NdrFcShort(0x8), /* 8 */ /* 692 */ 0x1, /* FC_BYTE */ 0x5b, /* FC_END */ /* 694 */ 0x15, /* FC_STRUCT */ 0x3, /* 3 */ /* 696 */ NdrFcShort(0x10), /* 16 */ /* 698 */ 0x8, /* FC_LONG */ 0x6, /* FC_SHORT */ /* 700 */ 0x6, /* FC_SHORT */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 702 */ 0x0, /* 0 */ NdrFcShort(0xffff1), /* Offset= -15 (688) */ 0x5b, /* FC_END */ /* 706 */ 0x1a, /* FC_BOGUS_STRUCT */ 0x3, /* 3 */ /* 708 */ NdrFcShort(0x20), /* 32 */ /* 710 */ NdrFcShort(0x0), /* 0 */ /* 712 */ NdrFcShort(0xa), /* Offset= 10 (722) */ /* 714 */ 0x8, /* FC_LONG */ 0x40, /* FC_STRUCTPAD4 */ /* 716 */ 0x36, /* FC_POINTER */ 0x4c, /* FC_EMBEDDED_COMPLEX */ /* 718 */ 0x0, /* 0 */ NdrFcShort(0xffe7), /* Offset= -25 (694) */ 0x5b, /* FC_END */ /* 722 */ 0x11, 0x0, /* FC_RP */ /* 724 */ NdrFcShort(0xffff12), /* Offset= -238 (486) */ /* 726 */ 0x1b, /* FC_CARRAY */ 0x0, /* 0 */ /* 728 */ NdrFcShort(0x1), /* 1 */ /* 730 */ 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* */ /* 732 */ NdrFcShort(0x0), /* 0 */ /* 734 */ NdrFcShort(0x1), /* Corr flags: early */ /* */ /* 736 */ 0x1, /* FC_BYTE */ </pre>
---	---	--

<pre> FC_END */ /* 738 */ FC_BOGUS_STRUCT */ 0x5b, /* 786 */ /* 0x19, /* Corr desc: field pointer, FC ULONG */ 0xa1, /* 788 */ /* NdrFcShort(0x0), /* 0 */ /* 790 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 792 */ /* 0x8, /* FC LONG */ 0x3, /* 794 */ /* NdrFcShort(0x0), /* Offset= 6 (750) */ /* 746 */ /* 0x8, /* FC LONG */ 0x40, /* 740 */ /* NdrFcShort(0x10), /* 16 */ /* 742 */ /* NdrFcShort(0x0), /* 0 */ /* 744 */ /* NdrFcShort(0x6), /* Offset= 6 (750) /* 748 */ /* 0x36, /* FC_POINTER */ 0xb, /* 749 */ /* NdrFcShort(0x0), /* 0x5b, /* */ /* 750 */ /* 0x5b, /* FC_END */ /* 751 */ /* 0x12, 0x0, /* FC_UP */ /* 752 */ /* NdrFcShort(0xffe6), /* Offset= -26 (726) /* 754 */ /* 0x1b, /* FC_CARRAY */ 0x1, /* 756 */ /* NdrFcShort(0x2), /* 2 */ /* 758 */ /* 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* 760 */ /* NdrFcShort(0x0), /* 0 */ /* 762 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 764 */ /* 0x6, /* FC_SHORT */ 0xb, /* 765 */ /* NdrFcShort(0x0), /* 0x5b, /* FC_END */ /* 766 */ /* 0xa1, /* FC_BOGUS_STRUCT */ 0x3, /* 768 */ /* NdrFcShort(0x10), /* 16 */ /* 770 */ /* NdrFcShort(0x0), /* 0 */ /* 772 */ /* NdrFcShort(0x6), /* Offset= 6 (778) */ /* 774 */ /* 0x8, /* FC_LONG */ 0x40, /* 776 */ /* NdrFcShort(0x10), /* 16 */ /* 778 */ /* 0x36, /* FC_POINTER */ 0xb, /* 779 */ /* NdrFcShort(0x0), /* 0x5b, /* FC_END */ /* 780 */ /* NdrFcShort(0xffe6), /* Offset= -26 (754) /* 782 */ /* 0x1b, /* FC_CARRAY */ 0x3, /* 784 */ /* NdrFcShort(0x4), /* 4 */ </pre>	<pre> /* 786 */ /* 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* 788 */ /* NdrFcShort(0x0), /* 0 */ /* 790 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 792 */ /* 0x8, /* FC_LONG */ 0x5b, /* 794 */ /* NdrFcShort(0x0), /* 0xa1, /* FC_BOGUS_STRUCT */ 0x3, /* 796 */ /* NdrFcShort(0x10), /* 16 */ /* 798 */ /* NdrFcShort(0x0), /* 0 */ /* 800 */ /* NdrFcShort(0x6), /* Offset= 6 (806) /* 802 */ /* 0x8, /* FC_LONG */ 0x40, /* 804 */ /* NdrFcShort(0x0), /* 0x5b, /* FC_POINTER */ 0xb, /* 806 */ /* NdrFcShort(0x0), /* 0x12, 0x0, /* FC_UP */ /* 808 */ /* NdrFcShort(0xffe6), /* Offset= -26 (782) /* 810 */ /* 0x1b, /* FC_CARRAY */ 0x7, /* 812 */ /* NdrFcShort(0x8), /* 8 */ /* 814 */ /* 0x19, /* Corr desc: field pointer, FC ULONG */ 0x0, /* 816 */ /* NdrFcShort(0x0), /* 0 */ /* 818 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 820 */ /* 0xb, /* FC_HYPER */ 0x5b, /* 822 */ /* NdrFcShort(0x0), /* 0xa1, /* FC_BOGUS_STRUCT */ 0x3, /* 824 */ /* NdrFcShort(0x10), /* 16 */ /* 826 */ /* NdrFcShort(0x0), /* 0 */ /* 828 */ /* NdrFcShort(0x6), /* Offset= 6 (834) /* 830 */ /* 0x8, /* FC_LONG */ 0x40, /* 832 */ /* NdrFcShort(0x0), /* 0x5b, /* FC_POINTER */ 0xb, /* 834 */ /* NdrFcShort(0x0), /* 0x12, 0x0, /* FC_UP */ </pre>	<pre> /* 836 */ /* NdrFcShort(0xffe6), /* Offset= -26 (810) /* 838 */ /* 0x15, /* FC_STRUCT */ 0x3, /* 840 */ /* NdrFcShort(0x8), /* 8 */ /* 842 */ /* 0x8, /* FC_LONG */ 0x8, /* 844 */ /* 0x5c, /* FC_PAD */ 0xb, /* 846 */ /* NdrFcShort(0x0), /* 0x1b, /* FC_CARRAY */ 0x3, /* 848 */ /* NdrFcShort(0x8), /* 8 */ /* 850 */ /* 0x7, /* Corr desc: FC USHORT */ 0x0, /* 852 */ /* NdrFcShort(0xffc8), /* -56 */ /* 854 */ /* NdrFcShort(0x1), /* Corr flags: early, */ /* 856 */ /* 0x4c, /* FC_EMBEDDED_COMPLEX */ 0x0, /* 858 */ /* NdrFcShort(0xffec), /* Offset= -20 (838) /* 860 */ /* 0x5c, /* FC_PAD */ 0x5b, /* 862 */ /* NdrFcShort(0x0), /* 0xa1, /* FC_BOGUS_STRUCT */ 0x3, /* 864 */ /* NdrFcShort(0x38), /* 56 */ /* 866 */ /* NdrFcShort(0xffec), /* Offset= -20 (846) /* 868 */ /* NdrFcShort(0x0), /* Offset= 0 (868) /* 870 */ /* 0x6, /* FC_SHORT */ 0x6, /* 872 */ /* 0x8, /* FC_LONG */ 0x8, /* 874 */ /* 0x40, /* FC_STRUCTPAD4 */ 0x4c, /* 876 */ /* 0x0, /* 0 */ NdrFcShort(0xfe0f), /* Offset= -497 (380) */ 0x5b, /* 880 */ /* 0x12, 0x0, /* FC_UP */ </pre>
---	---	--

```

/* 882 */ NdrFcShort( 0xff04 ),           /* Offset= -252 (630) */
/* 884 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 886 */ 0x1,           /* FC_BYTE */
FC_PAD,
/* 888 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 890 */ 0x6,           /* FC_SHORT */
FC_PAD,
/* 892 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 894 */ 0x8,           /* FC_LONG */
FC_PAD,
/* 896 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 898 */ 0xb,           /* FC_HYPER */
FC_PAD,
/* 900 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 902 */ 0xa,           /* FC_FLOAT */
FC_PAD,
/* 904 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 906 */ 0xc,           /* FC_DOUBLE */
FC_PAD,
/* 908 */
0x12, 0x0,          /* FC_UP */
/* 910 */ NdrFcShort( 0xfd2a ),           /* Offset= -606 (304) */
/* 912 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 914 */ NdrFcShort( 0xfd4a ),           /* Offset= -604 (310) */
/* 916 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 918 */ NdrFcShort( 0xfd8a ),           /* Offset= -582 (336) */
/* 920 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 922 */ NdrFcShort( 0fdc8 ),           /* Offset= -568 (354) */
/* 924 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 926 */ NdrFcShort( 0xfdd6 ),           /* Offset= -554 (372) */

/* 928 */
0x12, 0x10,          /* FC_UP [pointer_deref] */
/* 930 */ NdrFcShort( 0x2 ),            /* Offset= 2 (932) */
/* 932 */
0x12, 0x0,          /* FC_UP */
/* 934 */ NdrFcShort( 0x14 ),            /* Offset= 20 (954) */
/* 936 */
0x15,               /* FC_STRUCT */
0x7,
/* 938 */ NdrFcShort( 0x10 ),            /* Offset= 16 */
/* 940 */ 0x6,           /* FC_SHORT */
0x1,
/* 942 */ 0x1,           /* FC_BYTE */
0x8,
/* 944 */ 0xb,           /* FC_HYPER */
0x5b,
/* 946 */
0x12, 0x0,          /* FC_UP */
/* 948 */ NdrFcShort( 0xffff4 ),          /* Offset= -12 (936) */
/* 950 */
0x12, 0x8,          /* FC_UP [simple_pointer] */
/* 952 */ 0x2,           /* FC_CHAR */
0x5c,
/* 954 */
0x1a,
/* 956 */ NdrFcShort( 0x20 ),            /* Offset= 32 */
/* 958 */ NdrFcShort( 0x0 ),             /* 0 */
/* 960 */ NdrFcShort( 0x0 ),            /* Offset= 0 (960) */
/* 962 */ 0x8,           /* FC_LONG */
0x8,
/* 964 */ 0x6,           /* FC_SHORT */
0x6,
/* 966 */ 0x6,           /* FC_SHORT */
0x6,
/* 968 */ 0x4c,           /* FC_EMBEDDED_COMPLEX */
0x0,
/* 970 */ NdrFcShort( 0xfc3c ),          /* Offset= -964 (6) */
/* 972 */ 0x5c,           /* FC_PAD */
0x5b,
/* 974 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 976 */ NdrFcShort( 0x0 ),             /* 0 */
/* 978 */ NdrFcShort( 0x18 ),            /* 24 */
/* 980 */ NdrFcShort( 0x0 ),             /* 0 */
/* 982 */ NdrFcShort( 0xfc2c ),          /* Offset= -980 (2) */
/* 984 */
0x11, 0x4,          /* FC_RP [alloced_on_stack] */
/* 986 */ NdrFcShort( 0x6 ),             /* Offset= 6 (992) */
/* 988 */
0x13, 0x0,          /* FC_OP */
/* 990 */ NdrFcShort( 0xffdc ),          /* Offset= -36 (954) */
/* 992 */ 0xb4,           /* FC_USER_MARSHAL */
0x83,
/* 994 */ NdrFcShort( 0x0 ),             /* 0 */
/* 996 */ NdrFcShort( 0x18 ),            /* 24 */
/* 998 */ NdrFcShort( 0x0 ),             /* 0 */
/* 1000 */ NdrFcShort( 0xffff4 ),          /* Offset= -12 (988) */
0x0
};

static const USER_MARSHAL_ROUTINE_QUADRUPLE
UserMarshalRoutines[ WIRE_MARSHAL_TABLE_SIZE ] =
{
    {
        VARIANT_UserSize,
        VARIANT_UserMarshal,
        VARIANT_UserUnmarshal,
        VARIANT_UserFree
    }
};

/* Standard interface: __MIDL_itf_tpcc_com_ps_0000,
ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00}} */

/* Object interface: IUnknown, ver. 0.0,
GUID={0x00000000,0x0000,0x0000,{0xC0,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x46}} */

/* Object interface: ITPCC, ver. 0.0,
GUID={0xFFFF6AA2,0x84B1,0x11d2,{0xBA,0x47,0x00,0xC0,0x4F,0xBF,0xE0,0x8B}} */

#pragma code_seg(".orpc")
static const unsigned short
ITPCC_FormatStringOffsetTable[] =

```

```

{
0,
44,
88,
132,
176,
220
};

static const MIDL_STUBLESS_PROXY_INFO ITPCC_ProxyInfo
=
{
&Object_StubDesc,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0
};

static const MIDL_SERVER_INFO ITPCC_ServerInfo =
{
&Object_StubDesc,
0,
__MIDL_ProcFormatString.Format,
&ITPCC_FormatStringOffsetTable[-3],
0,
0,
0,
0
};

CINTERFACE_PROXY_VTABLE(9) _ITPCCProxyVtbl =
{
    &ITPCC_ProxyInfo,
    &IID_ITPCC,
    IUnknown_QueryInterface_Proxy,
    IUnknown_AddRef_Proxy,
    IUnknown_Release_Proxy,
    (void *) (INT_PTR) -1 /* ITPCC::NewOrder */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Payment */ ,
    (void *) (INT_PTR) -1 /* ITPCC::Delivery */ ,
    (void *) (INT_PTR) -1 /* ITPCC::StockLevel */ ,
    (void *) (INT_PTR) -1 /* ITPCC::OrderStatus */ ,
    (void *) (INT_PTR) -1 /* ITPCC::CallSetComplete */
};

const CInterfaceStubVtbl _ITPCCStubVtbl =
{
    &IID_ITPCC,
    &ITPCC_ServerInfo,
    9,
    0, /* pure interpreted */
    CStdStubBuffer_METHODS
};

static const MIDL_STUB_DESC Object_StubDesc =
{
0,
NdrOleAllocate,
NdrOleFree,
0,
0
};

```

```

0,
0,
0,
__MIDL_TypeFormatString.Format,
1, /* -error bounds_check flag */
0x50002, /* Ndr library version */
0,
0x6000169, /* MIDL Version 6.0.361 */
0,
UserMarshalRoutines,
0, /* notify & notify_flag routine table */
0x1, /* MIDL flag */
0, /* cs routines */
0, /* proxy/server info */
0 /* Reserved5 */
};

const CInterfaceProxyVtbl *
_tpcc_com_ps_ProxyVtblList[] =
{
    (CInterfaceProxyVtbl *) &_ITPCCProxyVtbl,
    0
};

const CInterfaceStubVtbl *
_tpcc_com_ps_StubVtblList[] =
{
    (CInterfaceStubVtbl *) &_ITPCCStubVtbl,
    0
};

PCInterfaceName const
_tpcc_com_ps_InterfaceNamesList[] =
{
    "ITPCC",
    0
};

#define __tpcc_com_ps_CHECK_IID(n)
    IID_GENERIC_CHECK_IID( _tpcc_com_ps, pIID,
n)

int __stdcall __tpcc_com_ps_IID_Lookup( const IID * pIID, int * pIndex )
{
    if(!__tpcc_com_ps_CHECK_IID(0))
    {
        *pIndex = 0;
        return 1;
    }

    return 0;
}

const ExtendedProxyFileInfo tpcc_com_ps_ProxyFileInfo
=
{
    (PCInterfaceProxyVtblList *) &
_tpcc_com_ps_ProxyVtblList,
    (PCInterfaceStubVtblList *) &
_tpcc_com_ps_StubVtblList,

```

```

    (const PCInterfaceName * ) &
_tpcc_com_ps_InterfaceNamesList,
0, // no delegation
& _tpcc_com_ps_IID_Lookup,
1,
2,
0, /* table of [async_uuid] interfaces */
0, /* Filler1 */
0, /* Filler2 */
0 /* Filler3 */
};

#endif /* _MSC_VER >= 1200
#pragma warning(pop)
#endif

#endif /* defined(_M_IA64) || defined(_M_AMD64) */

```

tpcc_dblib.cpp

```

/* FILE: TPCC_DBLIB.CPP
 * Microsoft
TPC-C Kit Ver. 4.42.000
Copyright
Microsoft, 2002
* All Rights Reserved
*
* Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
* PURPOSE: Implements dblib calls for TPC-C
txns.
* Contact: Charles Levine
(clevine@microsoft.com)
*
* Change history:
*   4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*   4.20.000 - updated rev number to
match kit
*   4.10.001 - not deleting error
class in catch handler on deadlock retry;
*           not a
functional bug, but a memory leak
*           - had to
tweak some declarations to compile with latest SDK;
no functional change
*

#include <windows.h>
#include <stdio.h>
#include <assert.h>

#define DBNTWIN32
#include <sqlfront.h>
#include <sqldb.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

```

```

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_dblib.h"

#define DEFCLPACKSIZE
4096

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10;
// how many retries on deadlock
static long iConnectionCount = 0; // number
of current dblib connections

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            dbinit(); // initialize dblib
            break;

        case DLL_PROCESS_DETACH:
            dbexit(); // close all dblib structures/connections
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

int err_handler(DBPROCESS *dbproc, int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetDbLibError( severity,
dberr, oserr, dberrstr, oserrstr );
    }
}

```

```

        return INT_CANCEL;
    }

/* FUNCTION: int msg_handler(DBPROCESS *dbproc, DBINT
msgno, int msgstate, int severity, char *msgtext)
*
* PURPOSE: This function handles DB-Library
SQL Server error messages
*
* ARGUMENTS: DBPROCESS          *dbproc
           DBPROCESS id pointer
*             msgno           DBINT
           message number
*             msgstate         int
           message state
*             severity        int
           message severity
*             msgtext          char
           printable
message description
*
* RETURNS:      int
               INT_CONTINUE   continue if
error is SQLETIME else INT_CANCEL action
*
               INT_CANCEL
cancel operation
*
* COMMENTS: This function also sets the dead
lock dbproc variable if necessary.
*/
// typedef INT (SQLAPI *DBMSGHANDLE_PROC)(PDBPROCESS,
DBINT, INT, INT, LPCSTR, LPCSTR, LPCSTR,
DBUSMALLINT);

int msg_handler(DBPROCESS *dbproc, DBINT msgno, int
msgstate, int severity,
LPCSTR
msgtext, LPCSTR srvname, LPCSTR procname, DBUSMALLINT
line)
{
    CTPCC_DBLIB
    *pConn;

    assert(dbproc != NULL);
    pConn =
(CTPCC_DBLIB*)dbgetuserdata(dbproc);

    if (pConn != NULL)
    {
        pConn->SetSqlError( msgno,
msgstate, severity, msgtext );
    }
    return 0;
}

```

```

/* FUNCTION: void UtilStrCpy(char * pDest, char *
pSrc, int n)
*
* PURPOSE: This function copies n characters
from string pSrc to pDst and places a
null character at the
end of the destination string.
*
* ARGUMENTS: char
*             *pDest   destination string pointer
*             char
*             *pSrc    source string pointer
*             int
*                   n
number of characters to copy
*
* RETURNS: None
*
* COMMENTS: Unlike strcpy this function
ensures that the result string is
terminated.                                always null
*/
inline static void UtilStrCpy(char * pDest, const
BYTE * pSrc, int n)
{
    strncpy(pDest, (char *)pSrc, n);
    pDest[n] = '\0';

    return;
}

/* FUNCTION: CTPCC_DBLIB_ERR::ErrorText
*/
char* CTPCC_DBLIB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id.name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0, "" }
    };
}

```

```

static char szNotFound[] = "Unknown error
number.";

for(i=0; errorMsgs[i].szMsg[0]; i++)
{
    if ( m_errno ==
errorMsgs[i].iError )
        break;
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_DBLIB* CTPCC_DBLIB_new(
    LPCSTR szServer,                                // name of
SQL server
    LPCSTR szUser,                                 // user
name for login
    LPCSTR szPassword,                            // password
for login
    LPCSTR szHost,                               // workstation
name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                          // name of
database to use
{
    return new CTPCC_DBLIB( szServer, szUser,
szPassword, szHost, szDatabase );
}

CTPCC_DBLIB::CTPCC_DBLIB (
    LPCSTR szServer,                                // name of
SQL server
    LPCSTR szUser,                                 // user
name for login
    LPCSTR szPassword,                            // password
for login
    LPCSTR szHost,                               // workstation
name; shows up in sp_who; max 30 chars,
only first 10 kept by SQL Server
    LPCSTR szDatabase )                          // name of
database to use
{
    LOGINREC *login;
    const BYTE      *pData;

    // initialization
    m_dbproc = NULL;
    m_DbLibErr = (CDBLIBERR*)NULL;
    m_SqlErr = (CSQLERR*)NULL;

    m_MaxRetries = 10;                           // how many
retries on deadlock

    // increase max number of connections if
getting close
    if ( dbgetmaxprocs() < (iConnectionCount+5)
)
    {

```

```

        if (
dbsetmaxprocs(iConnectionCount+10) == FAIL )
            ThrowError(CDBLIBERR::eDbSetMaxProcs);
        }

        // allocate a login structure
        login = dblogin();
        if (login == NULL)
            ThrowError(CDBLIBERR::eLogin);
        InterlockedIncrement( &iConnectionCount );

        // register error and message handler
        functions
        if (dbprocerhandle(login, err_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        if (dbprocmsgshandle(login, msg_handler) ==
NULL)
            ThrowError(CDBLIBERR::eDbProcHandler);

        DBSETLUSER(login, szUser);
        DBSETLPWD(login, szPassword);
        DBSETLHOST(login, szHost);
        DBSETLPACKET(login, (unsigned
short)DEFCLPACKSIZE);
        DBSETLVERSION(login, DBVER60);
        // use dblib ver 6.0 client behavior

        // set time to wait for login
        if (dbsetlogintime(60) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        // set time to wait for statement execution
        if (dbsettime(180) == FAIL)
            ThrowError(CDBLIBERR::eDbSet);

        m_dbproc = dbopen(login, szServer);
        // deallocate login structure before
        // checking for success
        dbfreelogin( login );

        if (m_dbproc == NULL)
            ThrowError(CDBLIBERR::eDbOpen);

        // save address of class instance so that
        // the message and error handler
        // can get to data.
        dbsetuserdata(m_dbproc, (LPVOID)this);

        // Use the the right database
        if (dbuse(m_dbproc, szDatabase) == FAIL)
            ThrowError(CDBLIBERR::eDbUse);

        dbcmd(m_dbproc, "set nocount on ");
        // do not return row counts
        dbcmd(m_dbproc, "set XACT_ABORT ON");
        // rollback transaction on abort

```

```

        if (dbsqlexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbSqlExec);
        DiscardNextResults(2);

        // verify that version of stored procs on
server is correct
        dbrpcinit(m_dbproc, "tpcc_version", 0);

        if (dbrpcexec(m_dbproc) == FAIL)
            ThrowError(CDBLIBERR::eDbRpcExec);

        if (dbresults(m_dbproc) != SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc) != REG_ROW)
            ThrowError(CDBLIBERR::eDbNextRow);

        char szSrvVersion[16];
        pData=dbdata(m_dbproc, 1);
        if (pData)
            UtilStrCpy(szSrvVersion, pData,
dbdatlen(m_dbproc, 1));
        else
            szSrvVersion[0]=0;
        if (strcmp(szSrvVersion,sVersion))
            throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_WRONG_SP_VERSION );

        DiscardNextRows(0);
        DiscardNextResults(0);
    }

    CTPCC_DBLIB::~CTPCC_DBLIB( void )
{
    // close db connection and deallocate
    // resources
    dbclose(m_dbproc);
    InterlockedDecrement( &iConnectionCount );
    if (m_DbLibErr != NULL)
        delete m_DbLibErr;
    if (m_SqlErr != NULL)
        delete m_SqlErr;
}

void CTPCC_DBLIB::SetDbLibError(int severity, int
dberr, int oserr, LPCSTR dberrstr, LPCSTR oserrstr)
{
    delete m_DbLibErr;
    m_DbLibErr = new
CDBLIBERR(CDBLIBERR::eUnknown, severity, dberr,
oserr);

    if (dberrstr != NULL)
    {

```

```

        m_DbLibErr->m_dberrstr = new
char[ strlen(dberrstr)+1 ];
strcpy( m_DbLibErr->m_dberrstr,
dberrstr );
}

if (oserrstr != NULL)
{
    m_DbLibErr->m_oserrstr = new
char[ strlen(oserrstr)+1 ];
strcpy( m_DbLibErr->m_oserrstr,
oserrstr );
}
}

void CTPCC_DBLIB::SetSqlError( int /*DBINT*/ msgno,
int msgstate, int severity, LPCSTR msgtext )
{
    if (m_SqlErr == NULL)
        m_SqlErr = new CSQLERR();

    m_SqlErr->m_msgno = msgno;
    m_SqlErr->m_msgstate = msgstate;
    m_SqlErr->m_severity = severity;

    delete [] m_SqlErr->m_msgtext;
    if (msgtext != NULL)
    {
        m_SqlErr->m_msgtext = new char[
strlen(msgtext)+1 ];
        strcpy( m_SqlErr->m_msgtext,
msgtext );
    }
}

void CTPCC_DBLIB::ThrowError( CDBLIBERR::ACTION eAction )
{
    // discard anything still in return buffer
    DiscardNextRows(-1);
    DiscardNextResults(-1);

    // check for SQL Server error first; if
yes, throw it and ignore any DBLib error.
    if (m_SqlErr != NULL)
    {
        CSQLERR *pSqlErr;
        pSqlErr = m_SqlErr;
        m_SqlErr = NULL; // clear our
pointer to instance; catch handler will delete
        throw pSqlErr;
    }

    CDBLIBERR *pDbLibErr;
    if (m_DbLibErr == NULL)
        // this case isn't expected to
happen, since it means that an error was returned
        // but the error handlers were
not called.
        pDbLibErr = new
CDBLIBERR(eAction);
    else

```

```

        {
            pDbLibErr = m_DbLibErr;
            pDbLibErr->m_eAction = eAction;
            m_DbLibErr = NULL; // clear our
pointer to instance; catch handler will delete
        }

        throw pDbLibErr;
    }

    // Read and discard rows until no more. Throw an
exception if number of rows read doesn't
// match number of rows expected. The row count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// rows to be read.
void CTPCC_DBLIB::DiscardNextRows(int iExpectedCount)
{
    int             iRowsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbnextrow(m_dbproc);
        if (rc == NO_MORE_ROWS)
            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbNextRow);
            else
                break;
        }
        iRowsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iRowsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

    // Read and discard results until no more. Throw an
exception if number of result sets read doesn't
// match number expected. The result set count will
be ignored if the expected count value
// passed in is negative. A typical use of this
routine is to verify that there are no more
// result sets to be read.
void CTPCC_DBLIB::DiscardNextResults(int iExpectedCount)
{
    int             iResultsRead = 0;
    RETCODE         rc;

    while (TRUE)
    {
        rc = dbresults(m_dbproc);
        if (rc == NO_MORE_RESULTS)

```

```

            break;
        if (rc == FAIL)
        {
            if (iExpectedCount >=
0)
                ThrowError(CDBLIBERR::eDbResults);
            else
                break;
        }
        DiscardNextRows(-1);
        iResultsRead++;
    }

    if ((iExpectedCount >= 0) &&
        (iExpectedCount != iResultsRead))
        ThrowError(CDBLIBERR::eWrongRowCount);
}

void CTPCC_DBLIB::StockLevel()
{
    int             iTryCount =
0;
    const BYTE      *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_stocklevel", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.StockLevel.w_id); // @w_id int
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.StockLevel.d_id); // @d_id
            tinyint
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT2, -1, -1, (BYTE *)
&m_txn.StockLevel.threshold); // @threshhold
            smallint
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);

```

```

        if
(pData=dbdata(m_dbproc, 1))

        m_txn.StockLevel.low_stock = *((long *)
pData);

        DiscardNextRows(0);
DiscardNextResults(0);

        m_txn.StockLevel.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
{
        if ((e->m_msgno == 1205
||

== iErrOleDbProvider &&
strstr(e->m_msgtext, sErrTimeoutExpired) != NULL) &&
(>m_msgtext, sErrTimeoutExpired) != NULL) &&
++iTryCount
<= iMaxRetries)
{
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

//if (iTryCount)
//    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::NewOrder()
{
    int                                i;
    DBINT                               commit_flag;
    DBDATETIME                          datetime;
    DBDATEREC                           daterec;

    int                                iTryCount =
0;
    const BYTE                           *pData;
    ResetError();

    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_neworder", 0);

```

```

                dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.w_id);
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.d_id);
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.NewOrder.c_id);
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o.ol_cnt);
                // check whether any
order lines are for a remote warehouse

                m_txn.NewOrder.o_all_local = 1;
                    for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; i++)
{
                    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
{
                        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                        break;
}
                }
                dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.NewOrder.o_all_local);
                for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; i++)
{
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_i_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT4, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_supply_w_id);
                dbrpcparam(m_dbproc, NULL, 0, SQLINT2, -1,
-1, (BYTE *) &m_txn.NewOrder.OL[i].ol_quantity);
                if (dbrpcexec(m_dbproc)
== FAIL)
                    ThrowError(CDBLIBERR::eDbRpcExec);
                results
                m_txn.NewOrder.total_amount = 0;
                    for (i = 0;
i < m_txn.NewOrder.o.ol_cnt; i++)
{

```

```

                if
(dbresults(m_dbproc) != SUCCEED)
                    ThrowError(CDBLIBERR::eDbResults);
if
(dbnumcols(m_dbproc) != 5)
                    ThrowError(CDBLIBERR::eWrongNumCols);
if
(dbnextrow(m_dbproc) != REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

if (pData=dbdata(m_dbproc, 1))
    UtilStrCpy(m_txn.NewOrder.OL[i].ol_i_name,
pData, dbdatlen(m_dbproc, 1));
if (pData=dbdata(m_dbproc, 2))
    m_txn.NewOrder.OL[i].ol_stock =
(*DBSMALLINT *) pData;
if (pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.NewOrder.OL[i].ol_brand_ge-
neric, pData, dbdatlen(m_dbproc, 3));
if (pData=dbdata(m_dbproc, 4))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 4),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_i_price, 8);
if (pData=dbdata(m_dbproc, 5))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 5),
SQLFLT8, (BYTE
*)&m_txn.NewOrder.OL[i].ol_amout, 8);

m_txn.NewOrder.total_amount =
m_txn.NewOrder.total_amount +
m_txn.NewOrder.OL[i].ol_amout;

DiscardNextRows(0);
}

// get remaining values
for w_tax, d_tax, o_id, c_last, c_discount, c_credit,
o_entry_d, commit_flag

```

```

        if (dbresults(m_dbproc)
!= SUCCEED)
    ThrowError(CDBLIBERR::eDbResults);

        if (dbnextrow(m_dbproc)
!= REG_ROW)
    ThrowError(CDBLIBERR::eDbNextRow);

        if (dbnumcols(m_dbproc)
!= 8)

    ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,1), SQLFLT8, (BYTE
*)&m_txn.NewOrder.w_tax, 8);
        if
(pData=dbdata(m_dbproc, 2))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,2), SQLFLT8, (BYTE
*)&m_txn.NewOrder.d_tax, 8);
        if
(pData=dbdata(m_dbproc, 3))

        m_txn.NewOrder.o_id = (*DBINT * ) pData;
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.NewOrder.c_last, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc,5), SQLFLT8, (BYTE
*)&m_txn.NewOrder.c_discount, 8);
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.NewOrder.c_credit, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))
        {
            datetime =
*((DBDATETIME * ) pData);

            dbdatecrack(m_dbproc, &daterec, &datetime);
            m_txn.NewOrder.o_entry_d.year =
daterec.year;

```

```

            m_txn.NewOrder.o_entry_d.month =
daterec.month;

            m_txn.NewOrder.o_entry_d.day =
daterec.day;

            m_txn.NewOrder.o_entry_d.hour =
daterec.hour;

            m_txn.NewOrder.o_entry_d.minute =
daterec.minute;

            m_txn.NewOrder.o_entry_d.second =
daterec.second;
        }
        if
(pData=dbdata(m_dbproc, 8))
        commit_flag =
(*DBTINYINT * ) pData;

        DiscardNextRows(0);
        DiscardNextResults(0);

        if (commit_flag == 1)
{
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
        m_txn.NewOrder.exec_status_code =
eInvalidItem;

        return;
    }
    catch (CSQLErr *e)
{
    if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e-
>m_msgrtext, sErrTimeoutExpired) != NULL)) &&
<= iMaxRetries)
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)

```

```

//         if (iTryCount)
//             throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Payment()
{
    DBDATETIME           datetime;
    DBDATEREC daterec;
    int                  iTryCount =
0;
    const BYTE            *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_payment", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, -1, -1, (BYTE *)
&m_txn.Payment.h_amount);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Payment.c_d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Payment.c_id);
            // if customer id is
zero, then payment is by name
            if (m_txn.Payment.c_id
== 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.Payment.c_last), (unsigned char
*)m_txn.Payment.c_last);
            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
        }
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowError(CDBLIBERR::eDbResults);
    }
}

```

```

!= REG_ROW)
    if (dbnextrow(m_dbproc)

        ThrowError(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 27)
        ThrowError(CDBLIBERR::eWrongNumCols);

        if
(pData=dbdata(m_dbproc, 1))

        m_txn.Payment.c_id = *((DBINT *) pData);
        if
(pData=dbdata(m_dbproc, 2))

        UtilStrCpy(m_txn.Payment.c_last, pData,
dbdatlen(m_dbproc, 2));
        if
(pData=dbdata(m_dbproc, 3))
{
        datetime =
*((DBDATETIME *) pData);

        dbdatecrack(m_dbproc, &daterec, &datetime);

        m_txn.Payment.h_date.year = daterec.year;
        m_txn.Payment.h_date.month =
daterec.month;
        m_txn.Payment.h_date.day = daterec.day;
        m_txn.Payment.h_date.hour = daterec.hour;
        m_txn.Payment.h_date.minute =
daterec.minute;
        m_txn.Payment.h_date.second =
daterec.second;
}
        if
(pData=dbdata(m_dbproc, 4))

        UtilStrCpy(m_txn.Payment.w_street_1, pData,
dbdatlen(m_dbproc, 4));
        if
(pData=dbdata(m_dbproc, 5))

        UtilStrCpy(m_txn.Payment.w_street_2, pData,
dbdatlen(m_dbproc, 5));
        if
(pData=dbdata(m_dbproc, 6))

        UtilStrCpy(m_txn.Payment.w_city, pData,
dbdatlen(m_dbproc, 6));
        if
(pData=dbdata(m_dbproc, 7))

        UtilStrCpy(m_txn.Payment.w_state, pData,
dbdatlen(m_dbproc, 7));

        if
(pData=dbdata(m_dbproc, 8))

        UtilStrCpy(m_txn.Payment.w_zip, pData,
dbdatlen(m_dbproc, 8));
        if
(pData=dbdata(m_dbproc, 9))

        UtilStrCpy(m_txn.Payment.d_street_1, pData,
dbdatlen(m_dbproc, 9));
        if
(pData=dbdata(m_dbproc, 10))

        UtilStrCpy(m_txn.Payment.d_street_2, pData,
dbdatlen(m_dbproc, 10));
        if
(pData=dbdata(m_dbproc, 11))

        UtilStrCpy(m_txn.Payment.d_city, pData,
dbdatlen(m_dbproc, 11));
        if
(pData=dbdata(m_dbproc, 12))

        UtilStrCpy(m_txn.Payment.d_state, pData,
dbdatlen(m_dbproc, 12));
        if
(pData=dbdata(m_dbproc, 13))

        UtilStrCpy(m_txn.Payment.d_zip, pData,
dbdatlen(m_dbproc, 13));
        if
(pData=dbdata(m_dbproc, 14))

        UtilStrCpy(m_txn.Payment.c_first, pData,
dbdatlen(m_dbproc, 14));
        if
(pData=dbdata(m_dbproc, 15))

        UtilStrCpy(m_txn.Payment.c_middle, pData,
dbdatlen(m_dbproc, 15));
        if
(pData=dbdata(m_dbproc, 16))

        UtilStrCpy(m_txn.Payment.c_street_1, pData,
dbdatlen(m_dbproc, 16));
        if
(pData=dbdata(m_dbproc, 17))

        UtilStrCpy(m_txn.Payment.c_street_2, pData,
dbdatlen(m_dbproc, 17));
        if
(pData=dbdata(m_dbproc, 18))

        UtilStrCpy(m_txn.Payment.c_city, pData,
dbdatlen(m_dbproc, 18));
        if
(pData=dbdata(m_dbproc, 19))

        UtilStrCpy(m_txn.Payment.c_state, pData,
dbdatlen(m_dbproc, 19));
        if
(pData=dbdata(m_dbproc, 20))

        if
UtilStrCpy(m_txn.Payment.c_zip, pData,
dbdatlen(m_dbproc, 20));
        if
(pData=dbdata(m_dbproc, 21))

        UtilStrCpy(m_txn.Payment.c_phone, pData,
dbdatlen(m_dbproc, 21));
        if
(pData=dbdata(m_dbproc, 22))
{
        datetime =
*((DBDATETIME *) pData);

        dbdatecrack(m_dbproc, &daterec, &datetime);

        m_txn.Payment.c_since.year =
daterec.year;
        m_txn.Payment.c_since.month =
daterec.month;
        m_txn.Payment.c_since.day = daterec.day;
        m_txn.Payment.c_since.hour = daterec.hour;
        m_txn.Payment.c_since.minute =
daterec.minute;
        m_txn.Payment.c_since.second =
daterec.second;
}

if (pData=dbdata(m_dbproc, 23))
    UtilStrCpy(m_txn.Payment.c_credit, pData,
dbdatlen(m_dbproc, 23));
    if (pData=dbdata(m_dbproc, 24))
        dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 24), SQLFLT8, (BYTE *)&m_txn.Payment.c_credit_lim, 8);
        if (pData=dbdata(m_dbproc, 25))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 25), SQLFLT8, (BYTE *)&m_txn.Payment.c_discount, 8);
        if (pData=dbdata(m_dbproc, 26))
            dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatlen(m_dbproc, 26), SQLFLT8, (BYTE *)&m_txn.Payment.c_balance, 8);
        if (pData=dbdata(m_dbproc, 27))
            UtilStrCpy(m_txn.Payment.c_data, pData,
dbdatlen(m_dbproc, 27));
DiscardNextRows(0);

```

```

        DiscardNextResults(0);

        if (m_txn.Payment.c_id
== 0)
            throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
        else

    m_txn.Payment.exec_status_code = eOK;

        return;
    }
    catch (CSQLERR *e)
    {
        if ((e->m_msgno == 1205
||

        iErrOleDbProvider &&
        strstr(e->m_msgtext, sErrTimeoutExpired) != NULL) &&
        (++iTryCount
<= iMaxRetries))
        {
            // hit
deadlock; backoff for increasingly longer period
            delete e;
            Sleep(10 *
iTryCount);
        }
        else
            throw;
    }
    // while (TRUE)

//     if (iTryCount)
//         throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::OrderStatus()
{
    int
DBDATETIME          i;
DBDATETREC          datetrec;
    int
iTryCount =
0;
    RETCODE             rc;
const BYTE           *pData;
    ResetError();
    while (TRUE)
    {
        try
        {
            dbrpcinit(m_dbproc,
"tpcc_orderstatus", 0);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.w_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.OrderStatus.d_id);
            dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.OrderStatus.c_id);
            // if customer id is
zero, then order status is by name
            if
(m_txn.OrderStatus.c_id == 0)
                dbrpcparam(m_dbproc, NULL, 0, SQLCHAR, -1,
strlen(m_txn.OrderStatus.c_last), (unsigned char
*)m_txn.OrderStatus.c_last);

            if (dbrpcexec(m_dbproc)
== FAIL)
                ThrowError(CDBLIBERR::eDbRpcExec);
            // Get order lines
            if (dbresults(m_dbproc)
!= SUCCEED)
                {
                    if
((m_DbLibErr == NULL) && (m_SqlErr == NULL))
                        throw new CTPCC_DBLIB_ERR(
CTPCC_DBLIB_ERR::ERR_NO SUCH ORDER );
                    else
                        ThrowError(CDBLIBERR::eDbResults);
                }
            if (dbnumcols(m_dbproc)
!= 5)
                ThrowError(CDBLIBERR::eWrongNumCols);
            i = 0;
            while (TRUE)
            {
                rc =
dbnextrow(m_dbproc);
                if (rc ==
NO_MORE_ROWS)
                    break;
                if (rc !=
REG_ROW)
                    ThrowError(CDBLIBERR::eDbNextRow);

                if (pData=dbdata(m_dbproc, 1))
                    m_txn.OrderStatus.OL[i].ol_supply_w_id =
(* (DBSMALLINT *) pData);
                dbrpcparam(m_dbproc,
NULL, 0, SQLFLT8, (BYTE *)
&m_txn.OrderStatus.OL[i].ol_amount, 8);
                if (pData=dbdata(m_dbproc, 5))
                {
                    datetime = *((DBDATETIME *) pData);
                    dbdatecrack(m_dbproc, &daterec, &datetime);
                    m_txn.OrderStatus.OL[i].ol_delivery_d.year =
daterec.year;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.month =
daterec.month;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.day =
daterec.day;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.hour =
daterec.hour;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.minute =
daterec.minute;
                    m_txn.OrderStatus.OL[i].ol_delivery_d.second =
daterec.second;
                }
                i++;
            }
            m_txn.OrderStatus.o_ol_cnt = i;
            if (dbresults(m_dbproc)
!= SUCCEED)
                ThrowError(CDBLIBERR::eDbResults);
            if (dbnextrow(m_dbproc)
!= REG_ROW)
                ThrowError(CDBLIBERR::eDbNextRow);
            if (dbnumcols(m_dbproc)
!= 8)

```

```

ThrowErrorHandler(CDBLIBERR::eWrongNumCols);

if(pData=dbdata(m_dbproc, 1))
    m_txn.OrderStatus.c_id = (*DBINT *)pData;

if(pData=dbdata(m_dbproc, 2))
    UtilStrCpy(m_txn.OrderStatus.c_last, pData,
    dbdatalen(m_dbproc,2));

if(pData=dbdata(m_dbproc, 3))
    UtilStrCpy(m_txn.OrderStatus.c_first,
    pData, dbdatalen(m_dbproc,3));

if(pData=dbdata(m_dbproc, 4))
    UtilStrCpy(m_txn.OrderStatus.c_middle,
    pData, dbdatalen(m_dbproc, 4));

if(pData=dbdata(m_dbproc, 5))
{
    datetime =
*((DBDATETIME *) pData);

    dbdatecrack(m_dbproc, &daterec, &datetime);

    m_txn.OrderStatus.o_entry_d.year =
daterec.year;

    m_txn.OrderStatus.o_entry_d.month =
daterec.month;

    m_txn.OrderStatus.o_entry_d.day =
daterec.day;

    m_txn.OrderStatus.o_entry_d.hour =
daterec.hour;

    m_txn.OrderStatus.o_entry_d.minute =
daterec.minute;

    m_txn.OrderStatus.o_entry_d.second =
daterec.second;
}

if(pData=dbdata(m_dbproc, 6))
    m_txn.OrderStatus.o_carrier_id =
(*DBSMALLINT *) pData;

if(pData=dbdata(m_dbproc, 7))
    dbconvert(m_dbproc, SQLNUMERIC,
(LPCBYTE)pData, dbdatalen(m_dbproc,7),
SQLFLT8, (BYTE *)
*)&m_txn.OrderStatus.c_balance;

```

```

if(pData=dbdata(m_dbproc, 8))
    m_txn.OrderStatus.o_id = (*DBINT *)pData;

DiscardNextRows(0);
DiscardNextResults(0);

if
(m_txn.OrderStatus.o.ol_cnt == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_NO_SUCH_ORDER
);

else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c.last[0] == 0)           throw new
CTPCC_DBLIB_ERR( CTPCC_DBLIB_ERR::ERR_INVALID_CUST );
else

m_txn.OrderStatus.exec_status_code = eOK;
return;
}
catch (CSQLERR *e)
{
    if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
    {
        // hit
deadlock; backoff for increasingly longer period
        delete e;
        Sleep(10 *
iTryCount);
    }
    else
        throw;
}
// while (TRUE)
}
// if (iTryCount)
    throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_DBLIB::Delivery()
{
    int
    int
    i;
    iTryCount =
0;
    const BYTE
    *pData;
    ResetError();
}

```

```

while (TRUE)
{
    try
    {
        dbrpcinit(m_dbproc,
"tpcc_delivery", 0);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT4, -1, -1, (BYTE *)
&m_txn.Delivery.w_id);
        dbrpcparam(m_dbproc,
NULL, 0, SQLINT1, -1, -1, (BYTE *)
&m_txn.Delivery.o_carrier_id);
        if (dbrpcexec(m_dbproc)
== FAIL)
            ThrowErrorHandler(CDBLIBERR::eDbRpcExec);
        if (dbresults(m_dbproc)
!= SUCCEED)
            ThrowErrorHandler(CDBLIBERR::eDbResults);
        if (dbnextrow(m_dbproc)
!= REG_ROW)
            ThrowErrorHandler(CDBLIBERR::eDbNextRow);
        if (dbnumcols(m_dbproc)
!= 10)
            ThrowErrorHandler(CDBLIBERR::eWrongNumCols);
        for (i=0; i<10; i++)
        {
            if (pData =
dbdata(m_dbproc, i+1))
                m_txn.Delivery.o_id[i] = *((DBINT *)pData);
            DiscardNextRows(0);
            DiscardNextResults(0);

            m_txn.Delivery.exec_status_code = eOK;
            return;
        }
        catch (CSQLERR *e)
        {
            if ((e->m_msgno == 1205
|| (e->m_msgno
== iErrOleDbProvider &&
strstr(e->m_msgrtext, sErrTimeoutExpired) != NULL)) &&
(iTryCount
<= iMaxRetries))
            {
                // hit
deadlock; backoff for increasingly longer period
            }
}
}

```

```

        delete e;
        Sleep(10 *
iTtryCount);

    }
    else
        throw;
}
} // while (TRUE)

// if (iTtryCount)
//     throw new
CTPCC_DBLIB_ERR(CTPCC_DBLIB_ERR::ERR_RETRYED_TRANS,
iTtryCount);
}

void CTPCC_DBLIBB::ResetError()
{
    if (m_DbLibErr != NULL)
    {
        delete m_DbLibErr;
        m_DbLibErr = (CDBLIBERR*)NULL;
    }

    if (m_SqlErr != NULL)
    {
        delete m_SqlErr;
        m_SqlErr = (CSQLERR*)NULL;
    }
    return;
}

```

tpcc_odbc.cpp

```

/* FILE:           TPCC_ODBC.CPP
 *               Microsoft
TPC-C Kit Ver. 4.42.000
 *               Copyright
Microsoft, 2002
 *               All Rights Reserved
 *
 *               Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
 *
 * PURPOSE: Implements ODBC calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 * Change history:
 *               4.42.000 - changed w_id fields
from short to long to support >32K warehouses
 *               4.20.000 - updated rev number to
match kit
 *               4.10.001 - not deleting error
class in catch handler on deadlock retry;
 *               not a
functional bug, but a memory leak
 */

#include <windows.h>
#include <stdio.h>

```

```

#include <assert.h>

#define DBNTWIN32
#include <sqatypes.h>
#include <sql.h>
#include <sqlext.h>

//define COMPILE_FOR_SNAC // define that to
compile for SQL Native Client; comment out to use
MDAC

#ifndef COMPILE_FOR_SNAC
#include <odbc.css.h>
#else
// Compile for SNAC
#include <sqlncli.h>
#endif

#ifdef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl _declspec( dllexport )

#include "...\\common\\src\\error.h"
#include "...\\common\\src\\trans.h"
#include "...\\common\\src\\txn_base.h"
#include "tpcc_odbc.h"

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const iMaxRetries = 3; // how many
retries on deadlock
//const iMaxRetries = 0; // for
debugging

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";

static SQLHENV henv = SQL_NULL_HENV; // ODBC environment handle

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            if (
SQLAllocHandleStd(SQL_HANDLE_ENV, SQL_NULL_HANDLE,
&henv) != SQL_SUCCESS )
                return FALSE;
            break;

        case DLL_PROCESS_DETACH:
            if (henv != NULL)
                SQLFreeEnv(henv);
    }
}

```

```

        break;

default: /* nothing */
}

return TRUE;
}

/* FUNCTION: CTPCC_ODBC_ERR::ErrorText
 */
char* CTPCC_ODBC_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { ERR_INVALID_NEW_ORDER_PARAM,
        "New Order parameter invalid." },
        { 0, "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
    if ( !errorMsgs[i].szMsg[0] )
        return szNotFound;
    else
        return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_ODBC* CTPCC_ODBC_new(
LPCSTR szServer, // name of
SQL server
LPCSTR szUser, // user name for login
LPCSTR szPassword, // password
for login

```

```

LPCSTR szHost,           //  

not used    LPCSTR szDatabase,      // name of  

database to use  
    LPCSTR szSPPrefix,        // prefix to  

append to the stored procedure names  
    BOOL bCallNoDuplicatesNewOrder ) // whether  

to check for non-duplicate items in NewOrder and call  

a new SP  

{  

    return new CTPCC_ODBC( szServer, szUser,  

szPassword, szHost, szDatabase, szSPPrefix,  

bCallNoDuplicatesNewOrder );  

}  

CTPCC_ODBC::CTPCC_ODBC (  

    LPCSTR szServer,  

// name of SQL server  

    LPCSTR szUser,  

// user name for login  

    LPCSTR szPassword,  

// password for login  

    LPCSTR szHost,  

// not used  

    LPCSTR szDatabase,  

// name of database to use  

    LPCSTR szSPPrefix,  

// prefix to append to the stored procedure  

names  

    BOOL      bCallNoDuplicatesNewOrder //  

whether to check for non-duplicate items in NewOrder  

and call a new SP  

)  

:  

m_bCallNoDuplicatesNewOrder(bCallNoDuplicatesNewOrder  

)  

{  

    RETCODE          rc;  

// initialization  

m_hdbc = SQL_NULL_HDBC;  

m_hstmt = SQL_NULL_HSTMT;  

m_hstmtNewOrder = SQL_NULL_HSTMT;  

m_hstmtPayment = SQL_NULL_HSTMT;  

m_hstmtDelivery = SQL_NULL_HSTMT;  

m_hstmtOrderStatus = SQL_NULL_HSTMT;  

m_hstmtStockLevel = SQL_NULL_HSTMT;  

m_descNewOrderCols1 = SQL_NULL_HDESC;  

m_descNewOrderCols2 = SQL_NULL_HDESC;  

m_descOrderStatusCols1 = SQL_NULL_HDESC;  

m_descOrderStatusCols2 = SQL_NULL_HDESC;  

wcscpy(m_szSPPrefix, szSPPrefix,  

sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));  

if ( SQLAllocHandle(SQL_HANDLE_DBC, henv,  

&m_hdbc) != SQL_SUCCESS )  

    ThrowError(CODBCERR::eAllocHandle);
}

```

```

    if ( SQLSetConnectOption(m_hdbc,  

SQL_PACKET_SIZE, 4096) != SQL_SUCCESS )  

        ThrowError(CODBCERR::eConnOption);  

    {  

        char szConnectStr[256];  

        char szOutStr[1024];  

        SQLSMALLINT iOutStrLen;  

#ifndef COMPILE_FOR_SNAC  

        sprintf( szConnectStr,  

"DRIVER=SQL  

Server;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#else  

        // Compile for SNAC  

        sprintf( szConnectStr,  

"DRIVER=SQL Native  

Client;SERVER=%s;UID=%s;PWD=%s;DATABASE=%s",  

szServer, szUser,  

szPassword, szDatabase );  

#endif  

        rc = SQLDriverConnect(m_hdbc,  

NULL, (SQLCHAR*)szConnectStr, sizeof(szConnectStr),  

(SQLCHAR*)szOutStr,  

sizeof(szOutStr), &iOutStrLen, SQL_DRIVER_NOPROMPT );  

        if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

            ThrowError(CODBCERR::eConnect);  

        if (SQLAllocHandle(SQL_HANDLE_STMT, m_hdbc,  

&m_hstmt) != SQL_SUCCESS)  

            ThrowError(CODBCERR::eAllocHandle);  

        {  

            char buffer[128];  

// set some options affecting  

connection behavior  

            strcpy(buffer, "set nocount on  

set XACT_ABORT ON");  

            rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

            if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

                ThrowError(CODBCERR::eExecDirect);  

// verify that version of stored  

procs on server is correct  

            char db_sp_version[10];  

            strcpy(buffer, "{call  

tpcc_version}");  


```

```

            rc = SQLExecDirect(m_hstmt,  

(unsigned char *)buffer, SQL_NTS);  

            if (rc != SQL_SUCCESS && rc !=  

SQL_SUCCESS_WITH_INFO)  

                ThrowError(CODBCERR::eExecDirect);  

            if (SQLBindCol(m_hstmt, 1,  

SQL_C_CHAR, &db_sp_version, sizeof(db_sp_version),  

NULL) != SQL_SUCCESS )  

                ThrowError(CODBCERR::eBindCol);  

            if (SQLFetch(m_hstmt) ==  

SQL_ERROR )  

                ThrowError(CODBCERR::eFetch);  

            if  

(strncmp(db_sp_version,sVersion))  

            throw new  

CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_WRONG_SP_VERSION  

);  

SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmt);  

// Bind parameters for each of the  

transactions  

InitNewOrderParams();  

InitPaymentParams();  

InitOrderStatusParams();  

InitDeliveryParams();  

InitStockLevelParams();  

}  

CTPCC_ODBC::~CTPCC_ODBC( void )  

{  

    // note: descriptors are automatically  

released when the connection is dropped  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtNewOrder);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtPayment);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtDelivery);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtOrderStatus);  

    SQLFreeHandle(SQL_HANDLE_STMT,  

m_hstmtStockLevel);  

    SQLDisconnect(m_hdbc);  

    SQLFreeHandle(SQL_HANDLE_DBC, m_hdbc);  

}  

//void CTPCC_ODBC::ThrowError( CODBCERR::ACTION  

eAction )  

void CTPCC_ODBC::ThrowError( RETCODE eAction )  

{  

    RETCODE          rc;  

    SDWORD          lNativeError;  

    char             szState[6];  

    char             szMsg[SQL_MAX_MESSAGE_LENGTH];
}

```

```

char
szTmp[6*SQL_MAX_MESSAGE_LENGTH];
CODECERR *pODBCErr;
// not allocated until needed (maybe never)

pODBCErr = new CODECERR();

pODBCErr->m_NativeError = 0;
//pODBCErr->m_eAction = eAction;
pODBCErr->m_eAction =
(CODECERR::ACTION)eAction;
pODBCErr->m_bDeadLock = FALSE;

szTmp[0] = 0;
szMsg[0] = 0;
while (TRUE)
{
    rc = SQLAllocHandle(henv, m_hdrc,
m_hstmt, (BYTE *)&szState, &lNativeError,
(BYTE *)&szMsg, sizeof(szMsg), NULL);
    if (rc == SQL_NO_DATA)
    {
        break;
    }

    if (rc != SQL_SUCCESS)
    {
        break;
    }

    // check for deadlock
    if (lNativeError == 1205 ||
(lNativeError == iErrOleDbProvider &
strstr(szMsg,
sErrMsgTimeoutExpired) != NULL))
        pODBCErr->m_bDeadLock =
TRUE;

    // capture the (first) database
error
    if (pODBCErr->m_NativeError == 0
&& lNativeError != 0)
        pODBCErr->m_NativeError
= lNativeError;

    // quit if there isn't enough
room to concatenate error text
    if ((strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)))
        break;

    // include line break after first
error msg
    if (szTmp[0] != 0)
        strcat( szTmp, "\n");
    strcat( szTmp, szMsg );
}

if (pODBCErr->m_odberrstr != NULL)
{
    delete [] pODBCErr->m_odberrstr;
pODBCErr->m_odberrstr = NULL;
}

```

```

    }

    if (strlen(szTmp) > 0)
    {
        pODBCErr->m_odberrstr = new
char[ strlen(szTmp)+1 ];
        strcpy( pODBCErr->m_odberrstr,
szTmp );
    }

    SQLFreeStmt(m_hstmt, SQL_CLOSE);
    throw pODBCErr;
}

void CTPCC_ODBC::InitStockLevelParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtStockLevel) != SQL_SUCCESS )
        ThrowError(CODECERR::eAllocHandle);

    m_hstmt = m_hstmtStockLevel;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.StockLevel.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.StockLevel.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.StockLevel.threshold, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODECERR::eBindParam);

    if ( SQLBindCol(m_hstmt, 1, SQL_C_SLONG,
&m_txn.StockLevel.low_stock, 0, NULL) != SQL_SUCCESS
)
        ThrowError(CODECERR::eBindCol);

    //Compose Stock Level statement
    _snprintf(m_szStockLevelCommand,
sizeof(m_szStockLevelCommand)/sizeof(m_szStockLevelCommand[0]),
L"(call %stpcc_stocklevel
(?, ?, ?))", m_szSPPrefix);
}

void CTPCC_ODBC::StockLevel()
{
    RETCODE rc;
    int iTryCount =
0;

    m_hstmt = m_hstmtStockLevel;

    while (TRUE)
    {
        try
        {

```

```

            rc =
SQLExecDirectW(m_hstmt, m_szStockLevelCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODECERR::eExecDirect);

            if ( SQLFetch(m_hstmt)
== SQL_ERROR )
                ThrowError(CODECERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);

            m_txm.StockLevel.exec_status_code = eOK;
            break;
        }
        catch (CODECERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitNewOrderParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdrc, &m_hstmtNewOrder) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_STMT, m_hdrc,
&m_hstmtNewOrderNoDuplicates) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderCols2) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdrc,
&m_descNewOrderNoDuplicatesCols2) != SQL_SUCCESS
)
        ThrowError(CODECERR::eAllocHandle);

    m_hstmt = m_hstmtNewOrder;
}

```

```

        if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

            ThrowError(CODBCERR::eSetStmtAttr);

        int i = 0;
        if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_cnt, 0, NULL) != SQL_SUCCESS
            || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
        )
            ThrowError(CODBCERR::eBindParam);

        for (int j=0; j<MAX OL NEW ORDER ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

// set the bind offset pointer
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_ROW_BIND_OFFSET_PTR, &m_BindOffset,
SQL_IS_POINTER ) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) !=
SQL_SUCCESS
    || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.NewOrder.OL[0].ol_stock, 0,
NULL) != SQL_SUCCESS

```

```

    || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    // associate the column bindings for the
second result set
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.w_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
&m_txn.NewOrder.d_tax, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.NewOrder.o_id, 0, NULL) !=
SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.NewOrder.c_discount, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_no_commit_flag, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindCol);

    //Compose the New Order statement
    _snwprintf(m_szNewOrderCommand,
sizeof(m_szNewOrderCommand)/sizeof(m_szNewOrderCommand
d[0]),
                // 0          1          2
012345678901234567890123456789
L"%call
%stpcc_neworder(?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
?,?,?,?,?,?,
................................................................
,
```

```

    m_iBeginNewOrderVariablePart = 29 +
wcslen(m_szSPPrefix);           // fixed part + prefix
part
////////////////////////////////////////////////////////////////
////////////////////////////////////////////////////////////////
// Now initialize New Order that
works on no duplicate (w_id,i_id) pairs
// and returns one result set for
lineitem details.
//
//      _hstmt = m_hstmtNewOrderNoDuplicates;
//
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols1, SQL_IS_POINTER ) !=
SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

i = 0;
if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.d_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.c_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.o_cnt, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.NewOrder.o_all_local, 0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

for (int j=0; j<MAX OL NEW ORDER ITEMS;
j++)
{
    if ( SQLBindParameter(m_hstmt,
++i, SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.NewOrder.OL[j].ol_i_id, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.NewOrder.OL[j].ol_quantity, 0, NULL) !=
SQL_SUCCESS
        ||
SQLBindParameter(m_hstmt, ++i, SQL_PARAM_INPUT,
SQL_C_SSHORT, &m_txn.NewOrder.OL[j].ol_supply_w_id, 0, NULL) !=
SQL_SUCCESS
    )
        ThrowError(CODBCERR::eBindParam);
}

```

```

// set row-wise binding
if ( SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.NewOrder.OL[0]),
SQL_IS_INTEGER) != SQL_SUCCESS
|| SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.OL[0].ol_i_name,
sizeof(m_txn.NewOrder.OL[0].ol_i_name), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_SSHTORT, &m_txn.NewOrder.OL[0].ol_i_stock, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR, &m_txn.NewOrder.OL[0].ol_brand_generic,
sizeof(m_txn.NewOrder.OL[0].ol_brand_generic), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_i_price, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE, &m_txn.NewOrder.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS )
        ThrowError(CODBCERR::eBindCol);

    // associate the column bindings for the
second result set
    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) != SQL_SUCCESS )

        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.w_tax, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.d_tax, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_LONG,
&m_txn.NewOrder.o_id, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_last,
sizeof(m_txn.NewOrder.c_last), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_DOUBLE,
&m_txn.NewOrder.c_discount, 0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_CHAR,
&m_txn.NewOrder.c_credit,
sizeof(m_txn.NewOrder.c_credit), NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i, SQL_C_TYPE_TIMESTAMP,
&m_txn.NewOrder.o_entry_d, 0,
NULL) != SQL_SUCCESS
}

```

```

|| SQLBindCol(m_hstmt, ++i,
&m_no_commit_flag, 0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindCol);

//Compose the New Order statement
_snprintf(m_szNewOrderNoDuplicatesCommand,
sizeof(m_szNewOrderNoDuplicatesCommand)/sizeof(m_szNe
wOrderNoDuplicatesCommand[0]),
L"{call
stpcc_neworder_new(?,?,?,?,?,?,?,?,?,?,
?,?,?,?,?,?
,?,?,?,?,?," , m_szSPPrefix);

m_iBeginNewOrderNoDuplicatesVariablePart =
33 + wcslen(m_szSPPrefix); // fixed part + prefix
part
}

//
// Returns true if there are duplicate
// warehouse_id, item_id)
// lineitem pairs in New Order input
parameters.
//
bool CTPCC_ODBC::DuplicatesInNewOrder()
{
    int i, j;

    for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
++i)
    {
        for (j = i+1; j <
m_txn.NewOrder.o.ol_cnt; ++j)
        {
            if
(m_txn.NewOrder.OL[i].ol_i_id ==
m_txn.NewOrder.OL[j].ol_i_id)
            {
                return true;
            }
        }
    }
    return false;
}

void CTPCC_ODBC::NewOrder()
{
    if (m_bCallNoDuplicatesNewOrder)
    {
        if (DuplicatesInNewOrder())
        {
            NewOrderDuplicates();
        }
        else
        {
            NewOrderNoDuplicates();
        }
    }
}

```

```

else
{
    NewOrderDuplicates();
}

void CTPCC_ODBC::NewOrderDuplicates()
{
    int
i;
RETCODE
int
iTryCount = 0;
0           1           2
012345678901234567890123456789
wchar_t
szSqlTemplate[iMAX_SP_NAME_LEN];
// L"{call
tpcc_neworder(?,?,?,?,?,"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?"
L"?,?,?,?,?,?,?,?,?,?,?,?,?,?")
m_hstmt = m_hstmtNewOrder;
// associate the parameter and column
bindings for this transaction
if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )

    ThrowError(CODBCERR::eSetStmtAttr);

// clip statement buffer based on number of
parameters
// fixed part is 29 chars and variable part
is 6 chars per line item
wcscpy(szSqlTemplate, m_szNewOrderCommand);
i = m_iBeginNewOrderVariablePart +
m_txn.NewOrder.o.ol_cnt*6;
wcscpy(&szSqlTemplate[i], L")" );
// check whether any order lines are for a
remote warehouse
m_txn.NewOrder.o.all_local = 1;
for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
i++)
{
    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
    {
}
rc;
}

```

```

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
                                break;
    }

    while (TRUE)
    {
        try
        {
            m_BindOffset = 0;
            rc =
SQLExecdirectW(m_hstmt, szSqlTemplate, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)

                ThrowError(CODBCERR::eExecDirect);

                                // Get order line
results

            m_txn.NewOrder.total_amount = 0;
            for (i = 0;
i < m_txn.NewOrder.o.ol_cnt; i++)
            {
                // set the
bind offset value...
m_BindOffset
= i * sizeof(m_txn.NewOrder.OL[0]);
                if (
SQLFetch(m_hstmt) == SQL_ERROR)

                    ThrowError(CODBCERR::eFetch);

                                // move to
the next resultset
                if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

                    ThrowError(CODBCERR::eMoreResults);

m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
            }

                                // associate the column
bindings for the second result set
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC, m_descNewOrderCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

                if ( SQLFetch(m_hstmt)
== SQL_ERROR)

                    ThrowError(CODBCERR::eFetch);

SQLFreeStmt(m_hstmt,
SQL_CLOSE);

```

```

ThrowErrorHandler(CODBCERR::eExecDirect);

        // configure block
cursor
        if
(SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_NEW_ORDER_ITEMS, 0) !=

SQL_SUCCESS)

ThrowErrorHandler(CODBCERR::eSetStmtAttr);

        // Get order line
results
        if ( SQLFetch(m_hstmt)

== SQL_ERROR)

ThrowErrorHandler(CODBCERR::eFetch);

m_txn.NewOrder.total_amount = 0;
for (i = 0;
i<m_txn.NewOrder.o_ol_cnt; i++)
{
    m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
}

// associate the column
bindings for the second result set
if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descNewOrderNoDuplicatesCols2, SQL_IS_POINTER ) !=

SQL_SUCCESS )

ThrowErrorHandler(CODBCERR::eSetStmtAttr);

        // move to the next
resultset
        if (
SQLMoreResults(m_hstmt) == SQL_ERROR )

ThrowErrorHandler(CODBCERR::eMoreResults);

        if ( (rc =
SQLFetch(m_hstmt)) == SQL_ERROR)

ThrowErrorHandler(CODBCERR::eFetch);

        SQLFreeStmt(m_hstmt,
SQL_CLOSE);

        // Check Fetch return
code for no rows returned.          // It means customer id
or warehouse id were invalid.
        if ( (rc == SQL_NO_DATA)

```

```

        throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_INVALID_NEW_ORDER_
PARAM);

        if (m_no_commit_flag ==
1)
        {
            m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

            m_txn.NewOrder.exec_status_code = eOK;
        }
        else
            m_txn.NewOrder.exec_status_code =
eInvalidItem;

        break;
    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitPaymentParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtPayment) != SQL_SUCCESS )

        ThrowErrorHandler(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtPayment;

    int i = 0;
    if ( SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_DOUBLE, SQL_NUMERIC, 6, 2,
&m_txn.Payment.h_amount, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.d_id, 0, NULL) != SQL_SUCCESS

```

```

        || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.Payment.c_d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Payment.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.Payment.c_last), 0,
&m_txn.Payment.c_last, sizeof(m_txn.Payment.c_last),
NULL) != SQL_SUCCESS
)
        ThrowErrorHandler(CODBCERR::eBindParam);

        i = 0;
        if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.Payment.c_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_last,
sizeof(m_txn.Payment.c_last), NULL) !=

SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.h_date,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_1,
sizeof(m_txn.Payment.w_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_street_2,
sizeof(m_txn.Payment.w_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_city,
sizeof(m_txn.Payment.w_city), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_state,
sizeof(m_txn.Payment.w_state), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.w_zip,
sizeof(m_txn.Payment.w_zip), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_1,
sizeof(m_txn.Payment.d_street_1), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_street_2,
sizeof(m_txn.Payment.d_street_2), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_city,
sizeof(m_txn.Payment.d_city), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_state,
sizeof(m_txn.Payment.d_state), NULL) !=
SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.d_zip,

```

```

        sizeof(m_txn.Payment.d_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_first,
sizeof(m_txn.Payment.c_first), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_middle,
sizeof(m_txn.Payment.c_middle), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_1,
sizeof(m_txn.Payment.c_street_1), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_street_2,
sizeof(m_txn.Payment.c_street_2), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_city,
sizeof(m_txn.Payment.c_city), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_state,
sizeof(m_txn.Payment.c_state), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_zip,
sizeof(m_txn.Payment.c_zip), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_phone,
sizeof(m_txn.Payment.c_phone), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.Payment.c_since,
0, NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_credit,
sizeof(m_txn.Payment.c_credit), NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_credit_lim, 0, NULL)
!= SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_discount, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.Payment.c_balance, 0,
NULL) != SQL_SUCCESS
                || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.Payment.c_data,
sizeof(m_txn.Payment.c_data), NULL) != SQL_SUCCESS
        )
        ThrowError(CODBCERR::eBindCol);

        //Compose Payment statement
        snprintf(m_szPaymentCommand,
sizeof(m_szPaymentCommand)/sizeof(m_szPaymentCommand[0]),
        L"{call %stpc_payment
(?,?,?,?,?,?)", m_szSPPrefix);

```

```

    }

void CTPCC_ODBC::Payment()
{
    RETCODE rc;
    int iTryCount = 0;

    m_hstmt = m_hstmtPayment;

    if (m_txn.Payment.c_id != 0)
        m_txn.Payment.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szPaymentCommand, SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowError(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt) == SQL_ERROR)
                ThrowError(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt, SQL_CLOSE);

            if (m_txn.Payment.c_id == 0)
                throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
            else
                m_txn.Payment.exec_status_code = eOK;
        }
        break;
    }
    catch (CODBCERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }
}

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitOrderStatusParams()
{

```

```

    if (SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtOrderStatus) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols1) != SQL_SUCCESS
|| SQLAllocHandle(SQL_HANDLE_DESC, m_hdbc,
&m_descOrderStatusCols2) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eAllocHandle);

    m_hstmt = m_hstmtOrderStatus;

    if (SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols1,
SQL_IS_POINTER ) != SQL_SUCCESS )
    ThrowError(CODBCERR::eSetStmtAttr);

    int i = 0;
    if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.w_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_UTINYINT, SQL_TINYINT, 0, 0,
&m_txn.OrderStatus.d_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
|| SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_CHAR, SQL_CHAR,
sizeof(m_txn.OrderStatus.c_last), 0,
&m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindParam);

    // configure block cursor
    if (SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROW_BIND_TYPE,
(SQLPOINTER)sizeof(m_txn.OrderStatus.OL[0]), 0) != SQL_SUCCESS
|| SQLSetStmtAttrW(m_hstmt,
SQL_ATTR_ROWS_FETCHED_PTR, &m_RowsFetched, 0) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if (SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_supply_w_id,
0, NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.OL[0].ol_i_id, 0,
NULL) != SQL_SUCCESS
|| SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.OL[0].ol_quantity,
0, NULL) != SQL_SUCCESS
)
    ThrowError(CODBCERR::eBindCol);

```

```

        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.OL[0].ol_amount, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP,
&m_txn.OrderStatus.OL[0].ol_delivery_d, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    if ( SQLSetStmtAttrW( m_hstmt,
SQL_ATTR_APP_ROW_DESC, m_descOrderStatusCols2,
SQL_IS_POINTER ) != SQL_SUCCESS )
        ThrowError(CODBCERR::eSetStmtAttr);

    i = 0;
    if ( SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.c_id, 0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_last,
sizeof(m_txn.OrderStatus.c_last), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_first,
sizeof(m_txn.OrderStatus.c_first), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_CHAR, &m_txn.OrderStatus.c_middle,
sizeof(m_txn.OrderStatus.c_middle), NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_TYPE_TIMESTAMP, &m_txn.OrderStatus.o_entry_d,
0, NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SSHORT, &m_txn.OrderStatus.o_carrier_id, 0,
NULL) != SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_DOUBLE, &m_txn.OrderStatus.c_balance, 0, NULL)
!= SQL_SUCCESS
        || SQLBindCol(m_hstmt, ++i,
SQL_C_SLONG, &m_txn.OrderStatus.o_id, 0, NULL) != SQL_SUCCESS
    )
    ThrowError(CODBCERR::eBindCol);

    //Compose Order Status statement
    _snprintf(m_szOrderStatusCommand,
sizeof(m_szOrderStatusCommand)/sizeof(m_szOrderStatusCommand[0]),
    L"(call %stpcc_orderstatus
(%?, ?, ?, ?)", m_szSPPrefix);
}

void CTPCC_ODBC::OrderStatus()
{
    int             iTryCount = 0;
    RETCODE         rc;

```

```

    m_hstmt = m_hstmtOrderStatus;

    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            if ( SQLSetStmtAttrW(
m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols1, SQL_IS_POINTER ) != SQL_SUCCESS )
                ThrowError(CODBCERR::eSetStmtAttr);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)1, 0) != SQL_SUCCESS )

                ThrowError(CODBCERR::eSetStmtAttr);

            rc =
SQLExecDirectW(m_hstmt, m_szOrderStatusCommand,
SQL_NTS);
                if (rc != SQL_SUCCESS_WITH_INFO)
                    ThrowError(CODBCERR::eExecDirect);

            cursor
                if (
SQLSetStmtAttrW(m_hstmt, SQL_ATTR_ROW_ARRAY_SIZE,
(SQLPOINTER)MAX_OI_ORDER_STATUS_ITEMS, 0) != SQL_SUCCESS )
                    ThrowError(CODBCERR::eSetStmtAttr);

            rc = SQLFetchScroll(
m_hstmt, SQL_FETCH_NEXT, 0 );
                if ( !(rc == SQL_SUCCESS) || ((rc == SQL_SUCCESS_WITH_INFO) &&
(m_RowsFetched != 0)) )
                    if ( (rc != SQL_SUCCESS) )
                        ThrowError(CODBCERR::eFetchScroll);

            m_txn.OrderStatus.o.ol_cnt =
(short)m_RowsFetched;
                if
(m_txn.OrderStatus.o.ol_cnt != 0)
                    if (
SQLSetStmtAttrW( m_hstmt, SQL_ATTR_APP_ROW_DESC,
m_descOrderStatusCols2, SQL_IS_POINTER ) != SQL_SUCCESS )

```

```

            ThrowError(CODBCERR::eSetStmtAttr);

// SQLMoreResults(m_hstmt) == SQL_ERROR
if ( (rc = SQLMoreResults(m_hstmt)) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eMoreResults);
}

// SQLFetch(m_hstmt) == SQL_ERROR
if ( (rc = SQLFetch(m_hstmt)) != SQL_SUCCESS )
{
    ThrowError(CODBCERR::eFetch);
}

SQLFreeStmt(m_hstmt,
SQL_CLOSE);
if
(m_txn.OrderStatus.o.ol_cnt == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_NO SUCH ORDER );
else if
(m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c.last[0] == 0)
    throw new
CTPCC_ODBC_ERR( CTPCC_ODBC_ERR::ERR_INVALID_CUST );
else

m_txn.OrderStatus.exec_status_code = eOK;
break;
}
catch (CODBCERR *e)
{
    if (!e->m_bDeadLock)
        if (++iTryCount > iMaxRetries)
            throw;
        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

// if (iTryCount)
//     throw new
CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRIED_TRANS,
iTryCount);
}

void CTPCC_ODBC::InitDeliveryParams()
{
    if ( SQLAllocHandle(SQL_HANDLE_STMT,
m_hdbc, &m_hstmtDelivery) != SQL_SUCCESS )

```

```

ThrowErrorHandler(CODBCERR::eAllocHandle);

m_hstmt = m_hstmtDelivery;

int i = 0;
if (SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SLONG, SQL_INTEGER, 0, 0,
&m_txn.Delivery.w_id, 0, NULL) != SQL_SUCCESS
    || SQLBindParameter(m_hstmt, ++i,
SQL_PARAM_INPUT, SQL_C_SSHORT, SQL_SMALLINT, 0, 0,
&m_txn.Delivery.o_carrier_id, 0, NULL) != SQL_SUCCESS
)
    ThrowErrorHandler(CODBCERR::eBindParam);

for (i=0;i<10;i++)
{
    if (SQLBindCol(m_hstmt,
(UWORD)(i+1), SQL_C_SLONG, &m_txn.Delivery.o_id[i],
0, NULL) != SQL_SUCCESS)

        ThrowErrorHandler(CODBCERR::eBindCol);
}

//Compose Delivery statement
_snwprintf(m_szDeliveryCommand,
sizeof(m_szDeliveryCommand)/sizeof(m_szDeliveryCommand
d[0]),
L"{call *stpcc_delivery (?,?)}",
m_szSPPrefix);
}

void CTPCC_ODBC::Delivery()
{
    RETCODE          rc;
    int             iTryCount =
0;

    m_hstmt = m_hstmtDelivery;

    while (TRUE)
    {
        try
        {
            rc =
SQLExecDirectW(m_hstmt, m_szDeliveryCommand,
SQL_NTS);
            if (rc != SQL_SUCCESS
&& rc != SQL_SUCCESS_WITH_INFO)
                ThrowErrorHandler(CODBCERR::eExecDirect);

            if (SQLFetch(m_hstmt)
== SQL_ERROR)
                ThrowErrorHandler(CODBCERR::eFetch);

            SQLFreeStmt(m_hstmt,
SQL_CLOSE);
            m_txn.Delivery.exec_status_code = eOK;
            break;
        }
    }
}

```

```

        catch (CODBCERR *e)
        {
            if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
                throw;
            // hit deadlock;
            backoff for increasingly longer period
            delete e;
            Sleep(10 * iTryCount);
        }
    }

    if (iTryCount)
    // throw new
    CTPCC_ODBC_ERR(CTPCC_ODBC_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

```

tpcc_odbc.h

```

/*
 *      FILE:           TPCC_ODBC.H
 *                      Microsoft
 *                      Microsoft, 1999
 *                      All Rights Reserved
 *                      Version
 *                      4.10.000 audited by Richard Gimarc, Performance
 *                      Metrics, 3/17/99
 *                      PURPOSE: Header file for TPC-C txn class
 *                      implementation.
 *                      Change history:
 *                      4.20.000 - updated rev number to
 *                      match kit
 */
#pragma once

// need to declare functions for import, unless
// define has already been created
// for the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

class CODBCERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eAllocConn,
        // error from SQLAllocConnect
        eAllocHandle,
        // error from SQLAllocHandle
    }
}

```

```

eConnOption,
// error from SQLSetConnectOption
eConnect,
// error from SQLConnect
eAllocStmt,
// error from SQLAllocStmt
eExecDirect,
// error from SQLExecDirect
eBindParam,
// error from SQLBindParameter
eBindCol,
// error from SQLBindCol
eFetch,
// error from SQLFetch
eFetchScroll,
// error from SQLFetchScroll
eMoreResults,
// error from SQLMoreResults
ePrepare,
// error from SQLPrepare
eExecute,
// error from SQLExecute
eSetEnvAttr,
// error from SQLSetEnvAttr
eSetStmtAttr
// error from SQLSetStmtAttr
};

CODBCERR(void)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_odbcerrstr = NULL;
}

~CODBCERR()
{
    if (m_odbcerrstr != NULL)
        delete []
    m_odbcerrstr;
}

ACTION    m_eAction;
int       m_NativeError;
BOOL     m_bDeadLock;
char    *m_odbcerrstr;

int       ErrorType();
{return ERR_TYPE_ODBC;};
char*   ErrorTypeStr() { return
"ODBC"; }
int       ErrorNum();
{return m_NativeError;};
char*   ErrorText() { return
m_odbcerrstr; }
int       ErrorAction();
{return (int)m_eAction; }

class CTPCC_ODBC_ERR : public CBaseErr
{
}

```

```

{
    public:
        enum TPCC_ODBC_ERRS
        {
            ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
            ERR_INVALID_CUST,
            // "Invalid Customer id,name."
            ERR_NO SUCH_ORDER,
            // "No orders found for
customer."
            ERR_RETRY_TRANS,
            // "Retries before transaction
succeeded."
            ERR_INVALID_NEW_ORDER_PARAM // "New Order
parameter invalid."
        };

        CTPCC_ODBC_ERR( int iErr ) {
            m_errno = iErr; m_iTryCount = 0;
        }

        CTPCC_ODBC_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; };

        int             m_errno;
        int             m_iTryCount;
        int             ErrorType();
        char*          ErrorTypeStr() { return
"TPCC ODBC"; }
        int             ErrorNum();
        { return m_errno; };
        char*          ErrorText();
};

class DllDecl CTPCC_ODBC : public CTPCC_BASE
{
    private:
        // declare variables and private
functions here...
        BOOL             m_bDeadlock;
        // transaction was selected as
deadlock victim
        int              m_MaxRetries;
        // retry
count on deadlock

        SQLHENV         m_henv;
        // ODBC environment
handle
        SQLHDBC         m_hdbc;
        SQLHSTMT        m_hstmt;
        // the current hstmt

        SQLHSTMT        m_hstmtNewOrder;
        SQLHSTMT        m_hstmtNewOrderNoDuplicates; // NewOrder
with one result set for lineitem details

```

```

SQLHSTMT        m_hstmtPayment;
SQLHSTMT        m_hstmtDelivery;
SQLHSTMT        m_hstmtOrderStatus;
SQLHSTMT        m_hstmtStockLevel;

SQLHDESC        m_descNewOrderCols1;
SQLHDESC        m_descNewOrderCols2;
SQLHDESC        m_descNewOrderNoDuplicatesCols1; // NewOrder with one result set for lineitem details
SQLHDESC        m_descNewOrderNoDuplicatesCols2; // NewOrder with one result set for lineitem details
SQLHDESC        m_descOrderStatusCols1;
SQLHDESC        m_descOrderStatusCols2;

wchar_t          m_szSPPrefix[32]; // stored procedures
prefix

wchar_t          m_szNewOrderCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szNewOrderNoDuplicatesCommand[iMAX_SP_NAME_LEN];
int             m_iBeginNewOrderVariablePart; // begining
of the variable part in NewOrder statement
int             m_iBeginNewOrderNoDuplicatesVariablePart;
// begining of the variable part in
NewOrder statement
wchar_t          m_szPaymentCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szDeliveryCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szOrderStatusCommand[iMAX_SP_NAME_LEN];
wchar_t          m_szStockLevelCommand[iMAX_SP_NAME_LEN];

// new-order specific fields
SQLINTEGER       m_BindOffset;
SQLINTEGER       m_RowsFetched;
int             m_no_commit_flag;
// tpcc_neworder_new flag
BOOL            m_bCallNoDuplicatesNewOrder;

//void ThrowError(
CDBCERR::ACTION eAction );
void ThrowError( RETCODE eAction
);

void InitNewOrderParams();
void InitPaymentParams();
void InitDeliveryParams();
void InitStockLevelParams();
void InitOrderStatusParams();

```

```

union
{
    NEW_ORDER_DATA
    Payment;
    Delivery;
    StockLevel;
    OrderStatus;
} m_txn;

bool DuplicatesInNewOrder();
void NewOrderDuplicates();
void NewOrderNoDuplicates();

public:
    CTPCC_ODBC( LPCSTR
szServer, LPCSTR szUser, LPCSTR szPassword,
LPCSTR szHost, LPCSTR szDatabase,
LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );
    ~CTPCC_ODBC(void);

    inline PNEW_ORDER_DATA
    BuffAddr_NewOrder() { return
&m_txn.NewOrder; }
    inline PPAYMENT_DATA
    BuffAddr_Payment() { return
&m_txn.Payment; }
    inline PDELIVERY_DATA
    BuffAddr_Delivery() { return
&m_txn.Delivery; }
    inline PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() { return
&m_txn.StockLevel; }
    inline PORDER_STATUS_DATA
    BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; }

    void NewOrder();
    void Payment();
    void Delivery();
    void StockLevel();
    void OrderStatus();
};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_ODBC* CTPCC_ODBC_new
(
    LPCSTR szServer, LPCSTR szUser,
    LPCSTR szHost, LPCSTR szDatabase,
    LPCWSTR szSPPrefix, BOOL
bCallNoDuplicatesNewOrder );

```

```
typedef CTPCC_ODBC* (TYPE_CTPCC_ODBC)(LPCSTR, LPCSTR,
LPCSTR, LPCSTR, LPCWSTR, BOOL);
```

tpcc_oledb.cpp

```
/* FILE: TPCC_OLEDB.CPP
 * Microsoft
TPC-C Kit Ver. 4.42.000
 * Copyright
Microsoft, 2004
 * Written by
Sergey Vasilevskiy
 * All Rights Reserved
 *
 *
PURPOSE: Implements OLEDB calls for TPC-C
txns.
 * Contact: Charles Levine
(clevine@microsoft.com)
 *
 */
#include <windows.h>
#include <stdio.h>
#include <assert.h>
#include <stddef.h>

#define DBINITCONSTANTS
#include <oledb.h>
//#include <sqloledb.h> // Use MDAC
#include <sqlncli.h> // Use SNAC
#include <oledberr.h>

#ifndef ICECAP
#include <icapexp.h>
#endif

// need to declare functions for export
#define DllDecl __declspec( dllexport )

#include "..\..\common\src\error.h"
#include "..\..\common\src\trans.h"
#include "..\..\common\src\txn_base.h"
#include "tpcc_oledb.h"

#ifndef SQL_MAX_MESSAGE_LENGTH
#define SQL_MAX_MESSAGE_LENGTH 512
#endif

// version string; must match return value from
tpcc_version stored proc
const char sVersion[] = "4.20.000";

const int iMaxRetries = 10; // how many
retries on deadlock

const int iErrOleDbProvider = 7312;
const char sErrTimeoutExpired[] = "Timeout expired";
```

```
// this needs to be the same as the max length of
machine/database/user/password in Benchcraft
(engstut.h)
const static int iMaxNameLen = 32;

BOOL APIENTRY DllMain(HMODULE hModule, DWORD
ul_reason_for_call, LPVOID lpReserved)
{
    switch( ul_reason_for_call )
    {
        case DLL_PROCESS_ATTACH:
            DisableThreadLibraryCalls(hModule);
            break;

        case DLL_PROCESS_DETACH:
            break;

        default:
            /* nothing */
    }
    return TRUE;
}

/* FUNCTION: CTPCC_OLEDB_ERR::ErrorText
 */
char* CTPCC_OLEDB_ERR::ErrorText(void)
{
    int i;

    static SERRORMSG errorMsgs[] =
    {
        { ERR_WRONG_SP_VERSION,
        "Wrong version of stored procs on database
server" },
        { ERR_INVALID_CUST,
        "Invalid Customer id,name." },
        { ERR_NO_SUCH_ORDER,
        "No orders found for customer." },
        { ERR_RETRYED_TRANS,
        "Retries before transaction succeeded." },
        { 0,
        "" }
    };

    static char szNotFound[] = "Unknown error
number.";

    for(i=0; errorMsgs[i].szMsg[0]; i++)
    {
        if ( m_errno ==
errorMsgs[i].iError )
            break;
    }
}
```

```
}
if ( !errorMsgs[i].szMsg[0] )
    return szNotFound;
else
    return errorMsgs[i].szMsg;
}

// wrapper routine for class constructor
__declspec(dllexport) CTPCC_OLEDB* CTPCC_OLEDB_new(
    LPCSTR szServer, // name of
SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password
for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of
database to use
    LPCWSTR szSPPrefix ) // prefix to append to the stored procedure names
{
    return new CTPCC_OLEDB( szServer, szUser,
szPassword, szHost, szDatabase, szSPPrefix );
}

CTPCC_OLEDB::CTPCC_OLEDB (
    LPCSTR szServer, // name of SQL server
    LPCSTR szUser, // user name for login
    LPCSTR szPassword, // password for login
    LPCSTR szHost, // not used
    LPCSTR szDatabase, // name of database to use
    LPCWSTR szSPPrefix // prefix to append to the stored procedure
names
)
: m_pIMalloc(NULL)
{
    int iRc;
    int i;
    i;
    HRESULT hr;

    IDBInitialize*
    pIDBInitialize = NULL; // data source interface
    IDBProperties*
    pIDBProperties = NULL;
    ICommandText*
    pICommandText;
    // SQL command without parameters
    wchar_t szwServer[iMaxNameLen];
    Unicode string used to convert to BSTR
}
```

```

wchar_t
szwDatabase[iMaxNameLen];      // Unicode
string used to convert to BSTR
wchar_t
szwUser[iMaxNameLen];          // Unicode
string used to convert to BSTR
wchar_t
szwPassword[iMaxNameLen];      // Unicode
string used to convert to BSTR

// Copy stored procedures prefix
wcsncpy(m_szSPPrefix, szSPPrefix,
sizeof(m_szSPPrefix)/sizeof(m_szSPPrefix[0]));

// Convert single byte ANSI strings to
Unicode (for later conversion to BSTR)
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szServer, (int)strlen(szServer)+1,
szwServer, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szDatabase,
(int)strlen(szDatabase)+1, szwDatabase, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szUser, (int)strlen(szUser)+1,
szwUser, iMaxNameLen);
iRC = MultiByteToWideChar(CP_THREAD_ACP,
MB_PRECOMPOSED, szPassword,
(int)strlen(szPassword)+1, szwPassword, iMaxNameLen);

// Initialize COM library to be able to use
OLE-DB interfaces
CoInitialize(NULL);

// Initialization - create SQLOLEDB
component
//hr = CoCreateInstance(CLSID_SQLOLEDB, //GUID of SQLOLEDB component
//                      // Compile for SNAC
//                      hr = CoCreateInstance(CLSID_SQLNCLI, //GUID of SQLNCLI component
//                                              NULL,
//                                              // not defining an aggregate
component, so NULL
CLCTX_INPROC_SERVER, // run the component in our process
IID_IDBInitialize,
(void **) &pIDBInitialize;

/*
Initialize the property values needed
to establish the connection.
*/
for(i = 0; i < 4; i++)
    VariantInit(&m_InitProperties[i].vValue);
//Server name.
m_InitProperties[0].dwPropertyID =
DBPROP_INIT_DATASOURCE;
m_InitProperties[0].vValue.vt      = VT_BSTR;
m_InitProperties[0].vValue.bstrVal=
SysAllocString(szwServer);
m_InitProperties[0].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[0].colid        = DB_NULLID;
//Database.

```

```

m_InitProperties[1].dwPropertyID =
DBPROP_INIT_CATALOG;
m_InitProperties[1].vValue.vt      = VT_BSTR;
m_InitProperties[1].vValue.bstrVal=
SysAllocString(szwDatabase);
m_InitProperties[1].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[1].colid        = DB_NULLID;
//Username (login).
m_InitProperties[2].dwPropertyID =
DBPROP_AUTH_USERID;
m_InitProperties[2].vValue.vt      = VT_BSTR;
m_InitProperties[2].vValue.bstrVal=
SysAllocString(szwUser);
m_InitProperties[2].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[2].colid        = DB_NULLID;
//Password.
m_InitProperties[3].dwPropertyID =
DBPROP_AUTH_PASSWORD;
m_InitProperties[3].vValue.vt      = VT_BSTR;
m_InitProperties[3].vValue.bstrVal=
SysAllocString(szwPassword);
m_InitProperties[3].dwOptions     =
DBPROPOPTIONS_REQUIRED;
m_InitProperties[3].colid        = DB_NULLID;
/*
Construct the DBPROPSET
structure(m_rgInitPropSet). The
DBPROPSET structure is used to pass an array of
DBPROP
structures (m_InitProperties) to the
SetProperties method.
*/
m_rgInitPropSet.guidPropertySet =
DBPROPSET_DBINIT;
m_rgInitPropSet.cProperties     = 4;
m_rgInitPropSet.rgProperties   =
m_InitProperties;
//Set initialization properties.
if (FAILED(hr = pIDBInitialize-
>QueryInterface(IID_IDBProperties,
                (void **) &pIDBProperties)))
{
    ThrowError(pIDBInitialize,
COLEDBERR::eQueryInterface, "CTPCC_OLEDB()");
}

hr = pIDBProperties->SetProperties(1,
&m_rgInitPropSet);
pIDBProperties->Release();
//Now establish the connection to the data
source.
hr = pIDBInitialize->Initialize();

// Free BSTR property strings
for(i = 0; i < 4; i++)
{

```

```

SysFreeString(m_InitProperties[i].vValue.bstrVal);
}

hr = pIDBInitialize-
>QueryInterface(IID_IDBCreateSession, (void
**) &m_pIDBCreateSession);

// Releasing this has no effect on the SQL
Server connection
// of the data source object because of the
reference maintained by
// m_pIDBCreateSession.
pIDBInitialize->Release();
pIDBInitialize = NULL;

hr = m_pIDBCreateSession-
>CreateSession(NULL, IID_IDBCreateCommand, (IUnknown
**) &m_pIDBCreateCommand);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateSession,
COLEDBERR::eCreateSession, "CTPCC_OLEDB()");
}

hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown
**) &pICommandText);
if (FAILED(hr))
{
    ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CTPCC_OLEDB()");
}

hr = pICommandText-
>SetCommandText(DBGUID_SQL, L"set nocount on set
XACT_ABORT ON");
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eSetCommandText, "CTPCC_OLEDB()");
}

hr = pICommandText->Execute(NULL, IID_NULL,
NULL, NULL, NULL);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eExecute, "CTPCC_OLEDB()");
}

pICommandText->Release();

// verify that version of stored procs on
server is correct
CheckSPVersion();

// Get IMalloc interface
hr = CoGetMalloc(1, (LPMALLOC
*) &m_pIMalloc);

```

```

// Bind parameters for each of the
transactions
    InitNewOrderParams();
    InitPaymentParams();
    InitOrderStatusParams();
    InitDeliveryParams();
    InitStockLevelParams();
}

CTPCC_OLEDB::~CTPCC_OLEDB( void )
{
    if (m_pIMalloc != NULL)
    {
        m_pIMalloc->Release();
    }
    m_pIPaymentCommand->Release();
    m_pIDBCreateCommand->Release();
    m_pIDBCreateSession->Release();

    CoUninitialize(); // uninitialized COM
library
}

/*
 *      Check stored procedures version on the
server.
*/
void CTPCC_OLEDB::CheckSPVersion()
{
    HRESULT hr;
    char db_sp_version[10];
    ICommandText* piCommandText;
    IAccessor* piAccessor;
    IRowset* pRowset;
    const ULONG nOutputParams = 1;
    // output 1st result set columns
    HACCESSOR hTpccVersionOutputAccessor;
    // Structure to bind in accessor
    DBBINDING acOutputDBBindBinding[nOutputParams];
    DBBINDSTATUS acOutputDBBindStatus[nOutputParams];
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow =
&rghRow;

    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown **)&piCommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand, "CheckSPVersion()");
    }

    hr = piCommandText-
>SetCommandText(DBGUID_SQL, L"call tpcc_version");
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eSetCommandText, "CheckSPVersion()");
    }

    hr = piCommandText-
>QueryInterface(IID_IAccessor, (void **)&piAccessor);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eQueryInterface, "CheckSPVersion()");
    }

    // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBindBinding[0],
nOutputParams, eOutputColumn);

    // Binding for a rowset
    SetBinding(&acOutputDBBindBinding[0], 0,
sizeof(db_sp_version), DBTYPE_STR);

    hr = piAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA,
        nOutputParams,
        acOutputDBBindBinding,
        sizeof(db_sp_version),
        &hTpccVersionOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(piAccessor,
COLEDBERR::eCreateAccessor, "CheckSPVersion()");
    }

    hr = piCommandText->Execute(NULL,
        IID_IRowset, NULL, NULL, (IUnknown **)&pRowset);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eExecute, "CheckSPVersion()");
    }

    // Fetch the result row handle(s)
    hr = pRowset->GetNextRows(DB_NULL_HCHAPTER,
        0, cRows, &cRowsObtained, &prghRow);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eGetNextRows, "CheckSPVersion()");
    }

    // Fetch the actual row data by handle
    hr = pRowset->GetData(rghRow,
        hTpccVersionOutputAccessor, &db_sp_version);
    if (FAILED(hr))
    {
        ThrowError(piCommandText,
COLEDBERR::eGetData, "CheckSPVersion()");
    }

    // Release row(s)
    hr = pRowset->Release();
    piCommandText->Release();

    // Check the retrieved version
    if (strcmp(db_sp_version,sVersion))
        throw new
CTPCC_OLEDB_ERR(
CTPCC_OLEDB_ERR::ERR_WRONG_SP_VERSION );
}

void CTPCC_OLEDB::ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation)
{
    HRESULT hr;
    //char szState[6];
    char szMsg[SQL_MAX_MESSAGE_LENGTH];
    char szTmp[6*SQL_MAX_MESSAGE_LENGTH];
    COLEDBERR
    *pOLEDBErr; // not allocated until needed (maybe never)
    int iLen;
    // Interfaces
    IErrorInfo* pIErrorInfoAll
    = NULL;
    IErrorInfo* pIErrorInfoRecord
    = NULL;
    IErrorRecords* pIErrorRecords
    = NULL;
    ISupportErrorInfo* pISupportErrorInfo
    = NULL;
    ISQLServerErrorHandler*
pISQLServerErrorHandler = NULL;
    ISQLServerErrorInfo* pISQLServerErrorInfo
    = NULL;
    // Information used when cannot get custom
error object
    ERRORINFO
    BasicErrorInfo;
    BSTR
    bstrDescription;
    // Number of error records.
    ULONG nRecs;
    ULONG nRec;
    // SQL Server error information from
    ISQLServerErrorHandler.
    SSERRORINFO* pSSSErrorInfo =
NULL;
    OLECHAR* pSSSErrorStrings =
NULL;
    assert(pObjectWithError != NULL);
}

```

```

pOLEDBErr = new COLEDBERR(szLocation);

pOLEDBErr->m_NativeError = 0;
pOLEDBErr->m_eAction = eAction;
pOLEDBErr->m_bDeadLock = FALSE;

szTmp[0] = 0;

// Only ask for error information if the
interface supports it.
// Note: SQLOLEDB provider supports error
interface, so this check is
// for good style only.
hr = pobjectWithError-
>QueryInterface(IID_ISupportErrorInfo, (void**)&pISupportErrorInfo);
if (FAILED(hr))
{
    _snprintf(szMsg, sizeof(szMsg),
"SupportErrorInfo interface not supported (hr=0x%X)",
hr);
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    throw pOLEDBErr;
}
/*if (FAILED(pISupportErrorInfo-
>InterfaceSupportsErrorInfo(IID_InterfaceWithError)))
{
    _snprintf(szMsg, sizeof(szMsg),
"InterfaceWithError interface not supported");
    pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
    strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
    return;
}*/
// Do not test the return of GetErrorInfo.
It can succeed and return
// a NULL pointer in pIErrInfoAll. Simply
test the pointer.
GetErrorInfo(0, &pIErrInfoAll);

if (pIErrInfoAll != NULL)
{
    // Test to see if it's a valid
OLE DB IErrorInfo interface
    // exposing a list of records.
    if (SUCCEEDED(pIErrInfoAll-
>QueryInterface(IID_IErrorRecords, (void**)&pIErrRecords)))
    {
        pIErrRecords-
>GetRecordCount(&nRecs);

        // Within each record,
retrieve information from each
        // of the defined
interfaces.

```

```

for (nRec = 0; nRec <
nRecs; nRec++)
{
    // Request
the generic SQL error interface.

pIErrRecords->GetCustomErrorObject(nRec,
IID_ISQLErrorInfo, // generic SQL error
interface
(IUnknown**) &pISQLErrorInfo);

if
(pISQLErrorInfo != NULL)
{
    // Request SQL Server-specific error interface, not the
generic SQL error interface.

pISQLErrorInfo->QueryInterface(
IID_ISQLServerErrorInfo, // SQL Server
error interface

(void**) &pISQLServerErrorInfo);
}

// Test to
ensure the reference is valid, then
// get error
information from ISQLServerErrorInfo.
if
(pISQLServerErrorInfo != NULL)
{
    pISQLServerErrorInfo-
>GetErrorInfo(&pSSErrorInfo, &pSSErrorStrings);
}

// ISQLServerErrorInfo::GetErrorInfo succeeds
// even when it has nothing to return. Test the
// pointers before using.
if
(pSSErrorInfo)
{
    // First, add the error message.

    // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,
pSSErrorInfo->pwszMessage, -1,
szMsg, sizeof(szMsg),
NULL, NULL);

    // Check if have space to add the
line number.
    // Assume the line number takes
no more than 3 digits.

    if ((strlen(szMsg) + 4) <
sizeof(szMsg))
    {

```

```

        _snprintf(&szMsg[strlen(szMsg)],
sizeof(szMsg),
                ":%d",
pSErrorInfo->wLineNumber);
}

        // quit if there isn't enough
room to concatenate error text

        if ( (strlen(szMsg) + 2) >
(sizeof(szTmp) - strlen(szTmp)) )
break;

        // concatenate the error record
to the overall error message

        strcat( szTmp, szMsg );

        // copy the overall error string
to the exception

        POLEDBErr->m_OLEDBErrStr = new
char[strlen(szTmp)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr,
szTmp);

}

        // Third, capture the (first) database
error

        if (pOLEDBErr->m_NativeError == 0 &&
pSErrorInfo->lNative != 0)
{
        pOLEDBErr->m_NativeError =
pSErrorInfo->lNative;

        // Check for deadlock error code
and set the deadlock flag

        if (pSErrorInfo->lNative ==
1205)
{
        pOLEDBErr->m_bDeadLock
= TRUE;
}

```

```

        }

        // IMalloc::Free needed to release
references

        // on returned values.

        if (m_pIMalloc != NULL)
{
        m_pIMalloc-
>Free(pSErrorStrings);

        m_pIMalloc->Free(pSErrorInfo);
}
}

        pISQLServerErrorInfo->Release();
}
else
{
        // Custom error object is not supported.
        // Use general OLE-DB error interface.
        // Get the numeric error code
        pIErrorRecords->GetBasicErrorInfo(nRec,
&BasicErrorInfo);

        if
(pOLEDBErr->m_NativeError == 0)
{
        // Get the failed call HRESULT code, which
is not really the native error
        pOLEDBErr->m_NativeError =
BasicErrorInfo.hrError;
}
}

        Try to get the string description of the error.

        pIErrorRecords->GetErrorInfo(nRec,
LOCALE_USER_DEFAULT,
(IErrorInfo**)&pIErrorInfoRecord);

        if
(pIErrorInfoRecord)
{
        pIErrorInfoRecord-
>GetDescription(&bstrDescription);
}

```

```

        // Convert Unicode error string to ANSI.
WideCharToMultiByte(CP_THREAD_ACP, 0,
bstrDescription, -1,
szMsg, sizeof(szMsg),
NULL, NULL);

        pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr, szMsg);

}

        } // if()
    } // for()

        else
{
        // No IErrorRecords
interface supported. Use default IErrorInfo.
// Note: SQLOLEDB
supports IErrorRecords, so this check is for good
style only.
_snprintf(szMsg,
sizeof(szMsg), "IErrorRecords interface not
supported");
pOLEDBErr-
>m_OLEDBErrStr = new char[strlen(szMsg)+1];
strcpy(pOLEDBErr-
>m_OLEDBErrStr, szMsg);
}

        pIErrorInfoAll->Release();
}
else // if (pIErrorInfoAll != NULL)
{
        // No IErrorInfo interface
supported.
// Note: SQLOLEDB supports
IErrorInfo, so this check is for good style only.
_snprintf(szMsg, sizeof(szMsg),
"IErrorInfo interface not supported");
pOLEDBErr->m_OLEDBErrStr = new
char[strlen(szMsg)+1];
strcpy(pOLEDBErr->m_OLEDBErrStr,
szMsg);
}

        throw pOLEDBErr;
}
/*

```

```

*      Create a new command object from the SQL
text passed in.
*/
void CTPCC_OLEDB::CreateCommand(wchar_t*
szSQLCommand,                                // I: SQL
query for the command

    ICommandText** ppICommandText      // O: returned command object
)
{
    HRESULT hr;

    // Create a new command object
    hr = m_pIDBCreateCommand-
>CreateCommand(NULL, IID_ICommandText, (IUnknown**
)ppICommandText);
    if (FAILED(hr))
    {
        ThrowError(m_pIDBCreateCommand,
COLEDBERR::eCreateCommand,
"CTPCC_OLEDB::CreateCommand");
    }

    // Set command text
    hr = (*ppICommandText)->SetCommandText(DBGUID_SQL, szSQLCommand);
    if (FAILED(hr))
    {
        ThrowError(*ppICommandText,
COLEDBERR::eSetCommandText,
"CTPCC_OLEDB::CreateCommand");
    }

    // Prepare the command
    PrepareCommand(*ppICommandText);
}

/*
 *      QueryInterface and Prepare in one function
for simplicity.
*      DEFERRED PREPARE property is set to off to
prepare immediately.
*/
void CTPCC_OLEDB::PrepareCommand(ICommandText*
pICommandText)
{
    HRESULT hr;
    ICommandPrepare* pICommandPrepare;
    ICommandProperties* pICommandProperties;
    DBPROPSET
    rowSetPropSet;
    DBPROP
    rowSetProp;

    // Set the deferred prepare property to
false.
    rowSetProp.dwPropertyID =
SSPROP_DEFERPREPARE;
    memset(&rowSetProp.vValue, 0,
sizeof(rowSetProp.vValue));
}

```

```

rowSetProp.dwOptions =
DBPROPOPTIONS_REQUIRED;
rowSetProp.colid = DB_NULLID;

rowSetPropSet.cProperties = 1;
rowSetPropSet.guidPropertySet =
DBPROPSET_SQLSERVERROWSET;
rowSetPropSet.rgProperties = &rowSetProp;

// Query interface for setting properties
hr = pICommandText->QueryInterface(IID_ICommandProperties, (void
**)&pICommandProperties);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Set the property set
hr = pICommandProperties->SetProperties(1,
&rowSetPropSet);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Get interface for preparing commands
hr = pICommandText->QueryInterface(IID_ICommandPrepare, (void
**)&pICommandPrepare);
if (FAILED(hr))
{
    ThrowError(pICommandText,
COLEDBERR::eQueryInterface,
"CTPCC_OLEDB::PrepareCommand");
}

// Prepare Payment command
hr = pICommandPrepare->Prepare(0xFFFFFFFF);
if (FAILED(hr))
{
    ThrowError(pICommandPrepare,
COLEDBERR::ePrepare, "CTPCC_OLEDB::PrepareCommand");
}

/*
 *      Initialize fields of an array of bindings
structures.
*      Needs to be called before setting
individual parameter/column bindings.
*/
void CTPCC_OLEDB::InitBindings(DBBINDING*
pDBBindings,                                // IO: array of bindings
int iCount,                                     // I: number of
elements in the array

```

```

eBindingType BindingType)      // I: what the bindings will be used for
(parameters/columns)
{
    int i;

    for(i = 0; i < iCount; i++)
    {
        pDBBindings[i].iOrdinal = i + 1;
        pDBBindings[i].obLength = 0;
        pDBBindings[i].obStatus = 0;
        pDBBindings[i].pTypeInfo = NULL;
        pDBBindings[i].pObject = NULL;
        pDBBindings[i].pBindExt = NULL;
        pDBBindings[i].dwPart = DBPART_VALUE;

        switch (BindingType)
        {
            case eInputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT;
                break;
            case eOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_OUTPUT;
                break;
            case eInputOutputParameter:
                pDBBindings[i].eParamIO
= DBPARAMIO_INPUT | DBPARAMIO_OUTPUT;
                break;
            case eOutputColumn:
                pDBBindings[i].eParamIO
= DBPARAMIO_NOTPARAM;
                break;
            default:
                assert(false);      //
this should never happen
        }

        pDBBindings[i].dwMemOwner =
DBMEMOWNER_CLIENTOWNED;
        pDBBindings[i].dwFlags = 0;
        pDBBindings[i].bPrecision = 0;
        pDBBindings[i].bScale = 0;
    }

    /*
     *      Perform binding for one parameter or output
column.
     */
    /*
     */
void CTPCC_OLEDB::SetBinding(DBBINDING* pDBBinding,
// I: binding row structure
size_t obValue,
// I: parameter (column) offset in the user
buffer
size_t cbMaxLen,
// I: parameter (column) length

```

```

        DBTYPE wType
    // I: parameter (column) type
    )

{
    pDBBinding->obValue = (ULONG) obValue;
    pDBBinding->cbMaxLen = (ULONG) cbMaxLen;
    pDBBinding->wType = wType;
}

void CTPCC_OLEDB::InitStockLevelParams()
{
    int
        i;
    HRESULT
    hr;
    wchar_t
    szName[iMAX_SP_NAME_LEN];
    IAccessor*
    pIAccessor;
    const ULONG
    nInputParams = 3; // input parameters
    const ULONG
    nOutputParams = 1; // output 1st result
    set columns
        // Structure to bind in accessor
        DBBINDING
        acInputDBBinding[nInputParams];
        DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];

        // Set command text
        _snwprintf(szName,
        sizeof(szName)/sizeof(szName[0]),
        L"%{call
%stpcc_stocklevel (?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for StockLevel.
            CreateCommand(szName,
            &m_pIStockLevelCommand);

        // Describe the consumer buffer by filling
        in the array
            // of DBBINDING structures. Each binding
            associates
                // a single parameter to the consumer's buffer.
                InitBindings(&acInputDBBinding[0],
                nInputParams, eInputParameter);

                i = 0;
                // StockLevel parameter 1
                SetBinding(&acInputDBBinding[i++],
                offsetof(STOCK_LEVEL_DATA, w_id),
                sizeof(m_txn.StockLevel.w_id), DBTYPE_I4);

                // StockLevel parameter 2

```

```

        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, d_id),
        sizeof(m_txn.StockLevel.d_id), DBTYPE_UI1);

        // StockLevel parameter 3
        SetBinding(&acInputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, threshold),
        sizeof(m_txn.StockLevel.threshold), DBTYPE_I2);

        hr = m_pIStockLevelCommand-
        >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eQueryInterface,
            "InitStockLevelParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,
            nInputParams,
            acInputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelInputAccessor,
            acInputDBBindStatus);
        if (FAILED(hr))
        {
            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

        m_StockLevelExecuteParams.cParamSets = 1;
        m_StockLevelExecuteParams.hAccessor =
        m_hStockLevelInputAccessor;
        m_StockLevelExecuteParams.pData =
        &m_txn.StockLevel;

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
        more than one row.
        i = 0;
        // StockLevel output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(STOCK_LEVEL_DATA, low_stock),
        sizeof(m_txn.StockLevel.low_stock), DBTYPE_I4);

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_OPTIMIZED,
            DBACCESSOR_ROWDATA |
            DBACCESSOR_OPTIMIZED,
            nOutputParams,
            acOutputDBBinding,
            sizeof(STOCK_LEVEL_DATA),
            &m_hStockLevelOutputAccessor,
            acOutputDBBindStatus);
        if (FAILED(hr))
        {

```

```

            ThrowError(pIAccessor,
            COLEDBERR::eCreateAccessor,
            "InitStockLevelParams()");
        }

void CTPCC_OLEDB::StockLevel()
{
    HRESULT
    int
    iTryCount = 0;
    IRowset*
    pRowset;
    LONG
    cRows = 1;
    // number of rows returned in the rowset
    ULONG
    cRowsObtained;
    HROW
    rghRow;
    HROW*
    prghRow =
    &rghRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
            m_pIStockLevelCommand->Execute(NULL, IID_IRowset,
            &m_StockLevelExecuteParams, NULL,
            (IUnknown **)&pRowset);
            if (FAILED(hr))
            {
                ThrowError(m_pIStockLevelCommand,
                COLEDBERR::eExecute, "StockLevel()");
            }
        }
        // Fetch the result row
        handle(s)
        hr = pRowset-
        >GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
        &cRowsObtained, &prghRow);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eGetNextRows, "StockLevel()");
        }
        // Fetch the actual row
        data by handle
        hr = pRowset-
        >GetData(rghRow, m_hStockLevelOutputAccessor,
        &m_txn.StockLevel);
        if (FAILED(hr))
        {
            ThrowError(m_pIStockLevelCommand,
            COLEDBERR::eGetData, "StockLevel()");
        }
    }
}

```

```

        // Release row(s)
        hr = pRowset->ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
        NULL);
        // Release rowset
        hr = pRowset->Release();

        m_txn.StockLevel.exec_status_code = eOK;

        break;
    } catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock) || (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

    if (iTryCount)
//        throw new CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitNewOrderParams()
{
    int i, j, iOlCount;
    HRESULT hr;
    wchar_t szName[iMAX_SP_NAME_LEN];
    IAccessor* pIAccessor;
    const ULONG nInputParams = 5 +
3*MAX_OL_NEW_ORDER_ITEMS; // input parameters
    const ULONG nOutputParams = 5; // output 1st result
    set columns
    const ULONG nOutputParams2 = 8; // output 2nd result
    set columns
    // Structure to bind in accessor
    DBBINDING acInputDBBinding[nInputParams];
    DBBINDSTATUS acInputDBBindStatus[nInputParams];
    DBBINDING acOutputDBBinding[nOutputParams];
    DBBINDSTATUS acOutputDBBindStatus[nOutputParams];
    DBBINDING acOutputDBBinding2[nOutputParams2];
}

```

```

        DBBINDSTATUS acOutputDBBindStatus2[nOutputParams2];

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
        nInputParams, eInputParameter);

        i = 0;
        // NewOrder parameter 1
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, w_id),
        sizeof(m_txn.NewOrder.w_id), DBTYPE_I4);

        // NewOrder parameter 2
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, d_id),
        sizeof(m_txn.NewOrder.d_id), DBTYPE_UI1);

        // NewOrder parameter 3
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, c_id),
        sizeof(m_txn.NewOrder.c_id), DBTYPE_I4);

        // NewOrder parameter 4
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, o.ol_cnt),
        sizeof(m_txn.NewOrder.o.ol_cnt), DBTYPE_UI1);

        // NewOrder parameter 5
        SetBinding(&acInputDBBinding[i++],
        offsetof(NEW_ORDER_DATA, o.all_local),
        sizeof(m_txn.NewOrder.o.all_local), DBTYPE_UI1);

        for (j=0; j<MAX_OL_NEW_ORDER_ITEMS; j++)
        {

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_i_id),
            sizeof(m_txn.NewOrder.OL[j].ol_i_id), DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_supply_w_id),
            sizeof(m_txn.NewOrder.OL[j].ol_supply_w_id),
            DBTYPE_I4);

            SetBinding(&acInputDBBinding[i++],
            offsetof(NEW_ORDER_DATA, OL[j].ol_quantity),
            sizeof(m_txn.NewOrder.OL[j].ol_quantity), DBTYPE_I2);

        }

        // Now fill the binding information for
        result set 1 output columns
        InitBindings(&acOutputDBBinding[0],
        nOutputParams, eOutputColumn);

        // Binding for the order line rowsets (each
        consist of one row).

```

```

        // Bind to offsets of the OL_NEW_ORDER_DATA
        structure instead of NEW_ORDER_DATA.
        // IRowset::GetData() will be passed
        individual array slots OL[i] to fetch the data
        // from the row set.

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_i_name),
        sizeof(m_txn.NewOrder.OL[0].ol_i_name), DBTYPE_STR);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_stock),
        sizeof(m_txn.NewOrder.OL[0].ol_stock), DBTYPE_I2);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_brand_generic),
        sizeof(m_txn.NewOrder.OL[0].ol_brand_generic),
        DBTYPE_STR);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_i_price),
        sizeof(m_txn.NewOrder.OL[0].ol_i_price), DBTYPE_R8);

        // NewOrder output column 5
        SetBinding(&acOutputDBBinding[i++],
        offsetof(OL_NEW_ORDER_DATA, ol_amount),
        sizeof(m_txn.NewOrder.OL[0].ol_amount), DBTYPE_R8);

        // Now fill the binding information for
        result set 2 output columns
        InitBindings(&acOutputDBBinding2[0],
        nOutputParams2, eOutputColumn);

        i = 0;
        // NewOrder output column 1
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, w_tax),
        sizeof(m_txn.NewOrder.w_tax), DBTYPE_R8);

        // NewOrder output column 2
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, d_tax),
        sizeof(m_txn.NewOrder.d_tax), DBTYPE_R8);

        // NewOrder output column 3
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_id),
        sizeof(m_txn.NewOrder.o_id), DBTYPE_I4);

        // NewOrder output column 4
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_last),
        sizeof(m_txn.NewOrder.c_last), DBTYPE_STR);

        // NewOrder output column 5

```

```

        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_discount),
        sizeof(m_txn.NewOrder.c_discount), DBTYPE_R8);

        // NewOrder output column 6
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, c_credit),
        sizeof(m_txn.NewOrder.c_credit), DBTYPE_STR);

        // NewOrder output column 7
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_entry_d),
        sizeof(m_txn.NewOrder.o_entry_d),
        DBTYPE_DBTIMESTAMP);

        // NewOrder output column 8
        SetBinding(&acOutputDBBinding2[i++],
        offsetof(NEW_ORDER_DATA, o_commit_flag),
        sizeof(m_txn.NewOrder.o_commit_flag), DBTYPE_I2);

        for (j=0; j<MAX_OI_NEW_ORDER_ITEMS; j++)
        {
            // Set command text first
            // Print the fixed first portion
            // of parameters
            i = _snprintf(szName,
            sizeof(szName)/sizeof(szName[0]),
            L"(call %stpcC_neworder (?, ?, ?, ?, ?, ?",
            m_szSPPrefix);

            // Now print the variable portion
            depending on the number of order line parameters
            for (iOLCount = 0; iOLCount <= j;
            ++iOLCount)
            {
                i +=

                _snprintf(&szName[i],
                sizeof(szName)/sizeof(szName[0]) - i, L", ?, ?, ?");

                }

                // Print the fixed end
                if (j != MAX_OI_NEW_ORDER_ITEMS -
                1)
                    { // append 'default' for
                    the parameters that are not used
                        i +=

                        _snprintf(&szName[i],
                        sizeof(szName)/sizeof(szName[0]) - i, L", default)");
                        }

                    else // using all 15 order
                    line parameters
                    {
                        i +=
                        _snprintf(&szName[i],
                        sizeof(szName)/sizeof(szName[0]) - i, L")");
                        }

                    // Create and Prepare a new
                    command object for NewOrder.

```

```

        CreateCommand(szName,
        &m_pINewOrderCommand[j]);

        // Now create the input accessor
        for this prepared command
        hr = m_pINewOrderCommand[j]-
        >QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {

            ThrowError(m_pINewOrderCommand[j],
            COLEDBERR::eQueryInterface, "InitNewOrderParams()");
            }

            hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,
            5 +
            3 * (j + 1),
            acInputDBBinding,
            sizeof(NEW_ORDER_DATA),
            &m_hNewOrderInputAccessor[j],
            acInputDBBindStatus);
            if (FAILED(hr))
            {
                ThrowError(pIAccessor,
                COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
                }

                m_NewOrderExecuteParams[j].cParamSets = 1;
                // m_NewOrderExecuteParams.hAccessor is set dynamically
                at run-time
                // based on the number of new
                order items for the particular transaction call.

                m_NewOrderExecuteParams[j].hAccessor =
                m_hNewOrderInputAccessor[j];
                m_NewOrderExecuteParams[j].pData
                = &m_txn.NewOrder;
                // Create accessor for the first
                rowset
                hr = pIAccessor->CreateAccessor(
                DBACCESSOR_ROWDATA |
                DBACCESSOR_OPTIMIZED,
                nOutputParams,
                acOutputDBBinding,
                sizeof(OL_NEW_ORDER_DATA),

```

```

                &m_hNewOrderOutputAccessor[j],
                acOutputDBBindStatus);
                if (FAILED(hr))
                {
                    ThrowError(pIAccessor,
                    COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
                    }

                    // Create accessor for the second
                    rowset
                    hr = pIAccessor->CreateAccessor(
                    DBACCESSOR_ROWDATA,
                    // cannot be optimized too because #1 accessor is
                    nOutputParams2,
                    acOutputDBBinding2,
                    sizeof(NEW_ORDER_DATA),
                    &m_hNewOrderOutputAccessor2[j],
                    acOutputDBBindStatus2);
                    if (FAILED(hr))
                    {
                        ThrowError(pIAccessor,
                        COLEDBERR::eCreateAccessor, "InitNewOrderParams()");
                        }

                        pIAccessor->Release();
                    }

                    void CTPCC_OLEDB::NewOrder()
                    {
                        HRESULT hr;
                        int iTryCount = 0;
                        IMultipleResults* pMultipleResults;
                        IRowset* pRowset;
                        IRowset* pRowset2;
                        LONG cRows = 1; // number of rows
                        returned in the 1st rowset
                        ULONG cRowsObtained;
                        HROW rghRows; //returned row handles
                        for the 1st result set
                        HROW*
                        prghRows = &rghRows;
                        LONG cRows2 = 1; // number of rows
                        returned in the 2nd rowset
                        ULONG cRowsObtained2;
                        HROW rghRows2; //returned row handle
                        for the 2nd result set
                        HROW*
                        prghRows2 = &rghRows2;
                        int i;
                        long lRowsAffected; // the number of
                        affected rows for a rowset

```

```

int
iHandleIndex; // index into the
handle arrays based on the orders count

// check whether any order lines are for a
remote warehouse
m_txn.NewOrder.o_all_local = 1;
for (i = 0; i < m_txn.NewOrder.o.ol_cnt;
i++)
{
    if
(m_txn.NewOrder.OL[i].ol_supply_w_id !=
m_txn.NewOrder.w_id)
    {

        m_txn.NewOrder.o_all_local = 0; // at
least one remote warehouse
            break;
    }
}

iHandleIndex = m_txn.NewOrder.o.ol_cnt - 1;
// for convenience

while (TRUE)
{
    try
    {
        // Execute the prepared
command (according to the number of new orders)
        // Ask for
IMultipleResults because it returns 2 rowsets.
        hr =
m_pINewOrderCommand[iHandleIndex] ->Execute(
NULL, IID_IMultipleResults,
&m_NewOrderExecuteParams[iHandleIndex],
NULL,
(IUnknown **) &pMultipleResults);
        if (FAILED(hr))
    }

    ThrowError(m_pINewOrderCommand[iHandleIndex],
COLEDBERR::eExecute, "NewOrder()");
}
}

////////////////// // Get order line
results

/////////////////
m_txn.NewOrder.total_amount = 0;
for (i = 0; i <
m_txn.NewOrder.o.ol_cnt; ++i)

```

```

{
    // Get the
first rowset object
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **) &pRowset);
    if
(FAILED(hr))
    {

        char szTmp[256];

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=0x%X", i, hr);

        ThrowError(m_pINewOrderCommand[m_txn.NewOrd
er.o.ol_cnt - 1], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the
result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
    if
(FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the
actual row data by handle
    hr = pRowset-
>GetData(rghRows,
m_hNewOrderOutputAccessor[iHandleIndex],
&m_txn.NewOrder.OL[i]);
    if
(FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    m_txn.NewOrder.total_amount +=
m_txn.NewOrder.OL[i].ol_amount;
    // Release
row(s)
    hr = pRowset-
>ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
    // Release
rowset
    hr = pRowset-
>Release();
}

```

```

//////////////////////////// // Get the second
rowset object
////////////////////////////
hr = pMultipleResults-
>GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **) &pRowset2);
    if (FAILED(hr))
    {
        char
szTmp[256];

        _snprintf(szTmp, sizeof(szTmp), "NewOrder()
result set %d, hr=%d", i, hr);

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetResult, szTmp);
    }

    // Fetch the result row
handle(s)
    hr = pRowset2-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetNextRows, "NewOrder()");
    }

    // Fetch the actual row
data by handle
    hr = pRowset2-
>GetData(rghRows2,
m_hNewOrderOutputAccessor2[iHandleIndex],
&m_txn.NewOrder);
    if (FAILED(hr))
    {

        ThrowError(m_pINewOrderCommand[iHandleIndex
], COLEDBERR::eGetData, "NewOrder()");
    }

    // Release row(s)
    hr = pRowset2-
>ReleaseRows(cRowsObtained2, prghRows2, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset2-
>Release();
    // Release the common
MultipleResults interface
    hr = pMultipleResults-
>Release();
    if
(m_txn.NewOrder.o.all_local == 1)

```

```

    {
        m_txn.NewOrder.total_amount *= ((1 +
m_txn.NewOrder.w_tax + m_txn.NewOrder.d_tax) * (1 -
m_txn.NewOrder.c_discount));

        m_txn.NewOrder.exec_status_code = eOK;
    }
    else
    {
        m_txn.NewOrder.exec_status_code =
eInvalidItem;
    }
    break;
}

catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;

    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

//     if (iTryCount)
//         throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitPaymentParams()
{
    int
        i;
    HRESULT
        hr;
    wchar_t
        szName[iMAX_SP_NAME_LEN];
    IAccessor*
        pIAccessor;
    const
        ULONG
        nInputParams = 7; // input parameters
    const
        ULONG
        nOutputParams = 27; // output result set
    columns
        // Structure to bind in accessor
        DBBINDING
        acInputDBBinding[nInputParams];
        DBBINDSTATUS
        acInputDBBindStatus[nInputParams];
        DBBINDING
        acOutputDBBinding[nOutputParams];
        DBBINDSTATUS
        acOutputDBBindStatus[nOutputParams];
    }

    // Set command text
}

```

```

        _snwprintf(szName,
sizeof(szName)/sizeof(szName[0]), L"{call
%stpcc_payment(?, ?, ?, ?, ?, ?)}", m_szSPPrefix);

        // Create and Prepare a new command object
        for Payment.
            CreateCommand(szName, &m_pIPaymentCommand);

        // Describe the consumer buffer by filling
        in the array
        // of DBBINDING structures. Each binding
        associates
        // a single parameter to the consumer's buffer.
        InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

        i = 0;
        // Payment parameter 1
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, w_id),
sizeof(m_txn.Payment.w_id), DBTYPE_I4);

        // Payment parameter 2
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_w_id),
sizeof(m_txn.Payment.c_w_id), DBTYPE_I4);

        // Payment parameter 3
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, h_amount),
sizeof(m_txn.Payment.h_amount), DBTYPE_R8);

        // Payment parameter 4
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, d_id),
sizeof(m_txn.Payment.d_id), DBTYPE_UI1);

        // Payment parameter 5
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_d_id),
sizeof(m_txn.Payment.c_d_id), DBTYPE_UI1);

        // Payment parameter 6
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

        // Payment parameter 7
        SetBinding(&acInputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

        hr = m_pIPaymentCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
        if (FAILED(hr))
        {
            ThrowError(m_pIPaymentCommand,
COLEDBERR::eQueryInterface, "InitPaymentParams()");
        }

        hr = pIAccessor->CreateAccessor(
            DBACCESSOR_PARAMETERDATA,

```

```

nInputParams,
acInputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentInputAccessor,
acInputDBBindStatus);

if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

m_PaymentExecuteParams.cParamSets = 1;
m_PaymentExecuteParams.hAccessor =
m_hPaymentInputAccessor;
m_PaymentExecuteParams.pData =
&m_txm.Payment;

// Now fill the binding information for
output columns
    InitBindings(&acOutputDBBinding[0],
nOutputParams, eOutputColumn);

i = 0;
// Payment output column 1
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_id),
sizeof(m_txn.Payment.c_id), DBTYPE_I4);

// Payment output column 2
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_last),
sizeof(m_txn.Payment.c_last), DBTYPE_STR);

// Payment output column 3
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, h_date),
sizeof(m_txn.Payment.h_date), DBTYPE_DBTIMESTAMP);

// Payment output column 4
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_1),
sizeof(m_txn.Payment.w_street_1), DBTYPE_STR);

// Payment output column 5
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_street_2),
sizeof(m_txn.Payment.w_street_2), DBTYPE_STR);

// Payment output column 6
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_city),
sizeof(m_txn.Payment.w_city), DBTYPE_STR);

// Payment output column 7
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_state),
sizeof(m_txn.Payment.w_state), DBTYPE_STR);

// Payment output column 8
    SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, w_zip),
sizeof(m_txn.Payment.w_zip), DBTYPE_STR);

```

```

// Payment output column 9
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 10
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 11
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 12
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 13
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 14
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_first),
sizeof(m_txn.Payment.c_first), DBTYPE_STR);

// Payment output column 15
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_middle),
sizeof(m_txn.Payment.c_middle), DBTYPE_STR);

// Payment output column 16
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_1),
sizeof(m_txn.Payment.d_street_1), DBTYPE_STR);

// Payment output column 17
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_street_2),
sizeof(m_txn.Payment.d_street_2), DBTYPE_STR);

// Payment output column 18
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_city),
sizeof(m_txn.Payment.d_city), DBTYPE_STR);

// Payment output column 19
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_state),
sizeof(m_txn.Payment.d_state), DBTYPE_STR);

// Payment output column 20
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, d_zip),
sizeof(m_txn.Payment.d_zip), DBTYPE_STR);

// Payment output column 21

```

```

SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_phone),
sizeof(m_txn.Payment.c_phone), DBTYPE_STR);

// Payment output column 22
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_since),
sizeof(m_txn.Payment.c_since), DBTYPE_DBTIMESTAMP);

// Payment output column 23
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit),
sizeof(m_txn.Payment.c_credit), DBTYPE_STR);

// Payment output column 24
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_credit_lim),
sizeof(m_txn.Payment.c_credit_lim), DBTYPE_R8);

// Payment output column 25
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_discount),
sizeof(m_txn.Payment.c_discount), DBTYPE_R8);

// Payment output column 26
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_balance),
sizeof(m_txn.Payment.c_balance), DBTYPE_R8);

// Payment output column 27
SetBinding(&acOutputDBBinding[i++],
offsetof(PAYMENT_DATA, c_data),
sizeof(m_txn.Payment.c_data), DBTYPE_STR);

hr = pIAccessor->CreateAccessor(
DBACESSOR_OPTIMIZED,
nOutputParams,
acOutputDBBinding,
sizeof(PAYMENT_DATA),
&m_hPaymentOutputAccessor,
acOutputDBBindStatus);

if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitPaymentParams()");
}

void CTPCC_OLEDB::Payment()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
}

```

```

HROW* prghRow =
&rghRow;

if (m_txn.Payment.c_id != 0)
    m_txn.Payment.c_last[0] = 0;

while (TRUE)
{
    try
    {
        // Execute the prepared command
        hr =
m_pIPaymentCommand->Execute(NULL, IID_IRowset,
&m_PaymentExecuteParams, NULL,
(IUnknown **)&pRowset);
        if (FAILED(hr))
        {

            ThrowError(m_pIPaymentCommand,
COLEDBERR::eExecute, "Payment()");
        }
    }
    // Fetch the result row handle(s)
    hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
    if (FAILED(hr))
    {

        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetNextRows, "Payment()");
    }
    // Fetch the actual row data by handle
    hr = pRowset-
>GetData(rghRow, m_hPaymentOutputAccessor,
&m_txn.Payment);
    if (FAILED(hr))
    {

        ThrowError(m_pIPaymentCommand,
COLEDBERR::eGetData, "Payment()");
    }
}

// Release row(s)
hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
// Release rowset
hr = pRowset-
>Release();
if (m_txn.Payment.c_id
== 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

```

```

    m_txn.Payment.exec_status_code = eOK;

        break;
    }
    catch (COLEDBERR *e)
    {
        if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
            throw;

        // hit deadlock;
        backoff for increasingly longer period
        delete e;
        Sleep(10 * iTryCount);
    }

//     if (iTryCount)
//         throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitOrderStatusParams()
{
    int             i;
    HRESULT          hr;
    wchar_t          szName[iMAX_SP_NAME_LEN];
    IAccessor*       pIAccessor;
    const ULONG      nInputParams = 4;    // input parameters
    const ULONG      nOutputParams = 5;   // output 1st result
set columns
    const ULONG      nOutputParams2 = 8; // output 2nd result
set columns
    // Structure to bind in accessor
    DBBINDING      acInputDBBinding[nInputParams];
    DBBINDSTATUS    acInputDBBindStatus[nInputParams];
    DBBINDING      acOutputDBBinding[nOutputParams];
    DBBINDSTATUS    acOutputDBBindStatus[nOutputParams];
    DBBINDING      acOutputDBBind2[nOutputParams2];
    DBBINDSTATUS    acOutputDBBindStatus2[nOutputParams2];

    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"%{call
%stpcc_orderstatus (?, ?, ?, ?)}", m_szSPPrefix);
}

```

```

        // Create and Prepare a new command object
for OrderStatus.
    CreateCommand(szName,
&m_pIOOrderStatusCommand);

        // Describe the consumer buffer by filling
in the array
        // of DBBINDING structures.  Each binding
associates
        // a single parameter to the consumer's buffer.
    InitBindings(&acInputDBBinding[0],
nInputParams, eInputParameter);

    i = 0;
    // OrderStatus parameter 1
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, w_id),
sizeof(m_txn.OrderStatus.w_id), DBTYPE_I4);

    // OrderStatus parameter 2
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, d_id),
sizeof(m_txn.OrderStatus.d_id), DBTYPE_UI1);

    // OrderStatus parameter 3
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus parameter 4
    SetBinding(&acInputDBBinding[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    hr = m_pIOOrderStatusCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
    if (FAILED(hr))
    {

        ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eQueryInterface,
"InitOrderStatusParams()");
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_PARAMETERDATA,
        nInputParams,
        acInputDBBinding,
        sizeof(ORDER_STATUS_DATA),
        &m_hOrderStatusInputAccessor,
        acInputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }

    m_OrderStatusExecuteParams.cParamSets = 1;
    m_OrderStatusExecuteParams.hAccessor =
m_hOrderStatusInputAccessor;
}

```

```

    m_OrderStatusExecuteParams.pData =
&m_txn.OrderStatus;

        // Now fill the binding information for
result set 1 output columns
    InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

        // Binding for a rowset that may return
more than one row.
        // Bind to offsets of the
OL_ORDER_STATUS_DATA structure instead of
ORDER_STATUS_DATA.
        // IRowset::GetData() will be passed
individual array slots OL[i] to fetch the data
        // from the row set.

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_supply_w_id),
sizeof(m_txn.OrderStatus.OL[0].ol_supply_w_id),
DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_i_id),
sizeof(m_txn.OrderStatus.OL[0].ol_i_id), DBTYPE_I4);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_quantity),
sizeof(m_txn.OrderStatus.OL[0].ol_quantity),
DBTYPE_I2);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_amount),
sizeof(m_txn.OrderStatus.OL[0].ol_amount),
DBTYPE_R8);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBind[i++],
offsetof(OL_ORDER_STATUS_DATA, ol_delivery_d),
sizeof(m_txn.OrderStatus.OL[0].ol_delivery_d),
DBTYPE_DBTIMESTAMP);

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_ROWDATA |
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBind,
        sizeof(OL_ORDER_STATUS_DATA),
        &m_hOrderStatusOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }
}

```

```

        // Now fill the binding information for
result set 2 output columns
    InitBindings(&acOutputDBBinding2[0],
nOutputParams2, eOutputColumn);

    i = 0;
    // OrderStatus output column 1
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_id),
sizeof(m_txn.OrderStatus.c_id), DBTYPE_I4);

    // OrderStatus output column 2
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_last),
sizeof(m_txn.OrderStatus.c_last), DBTYPE_STR);

    // OrderStatus output column 3
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_first),
sizeof(m_txn.OrderStatus.c_first), DBTYPE_STR);

    // OrderStatus output column 4
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_middle),
sizeof(m_txn.OrderStatus.c_middle), DBTYPE_STR);

    // OrderStatus output column 5
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_entry_d),
sizeof(m_txn.OrderStatus.o_entry_d),
DBTYPE_DBTIMESTAMP);

    // OrderStatus output column 7
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_carrier_id),
sizeof(m_txn.OrderStatus.o_carrier_id), DBTYPE_I2);

    // OrderStatus output column 8
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, c_balance),
sizeof(m_txn.OrderStatus.c_balance), DBTYPE_R8);

    // OrderStatus output column 9
    SetBinding(&acOutputDBBinding2[i++],
offsetof(ORDER_STATUS_DATA, o_id),
sizeof(m_txn.OrderStatus.o_id), DBTYPE_I4);

    hr = pIAccessor->CreateAccessor(
                    DBACCESSOR_ROWDATA, ///
cannot be optimized too because #1 accessor is
                    nOutputParams2,
                    acOutputDBBinding2,
                    sizeof(NEW_ORDER_DATA),
&m_hOrderStatusOutputAccessor2,
                    acOutputDBBindStatus2);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor,
"InitOrderStatusParams()");
    }
}

```

```

}

void CTPCC_OLEDB::OrderStatus()
{
    HRESULT hr;
    int iTryCount = 0;
    IMultipleResults* pMultipleResults;
    IRowset* pRowset;
    IRowset* pRowset2;
    LONG cRows = MAX_OI_ORDER_STATUS_ITEMS; // number of rows returned in the 1st rowset
    ULONG cRowsObtained;
    HROW rghRows[MAX_OI_ORDER_STATUS_ITEMS];
    //returned row handles for the 1st result set
    HROW* prghRows = &rghRows[0];
    LONG cRows2 = 1; // number of rows returned in the 2nd rowset
    ULONG cRowsObtained2;
    HROW rghRows2; //returned row handle for the 2nd result set
    HROW* prghRows2 = &rghRows2;
    int i;
    long lRowsAffected; // the number of affected rows for a rowset
    if (m_txn.OrderStatus.c_id != 0)
        m_txn.OrderStatus.c_last[0] = 0;

    while (TRUE)
    {
        try
        {
            // Execute the prepared command
            // Ask for IMultipleResults because it returns 2 rowsets.
            hr =
m_pIOOrderStatusCommand->Execute(NULL,
IID_IMultipleResults, &m_OrderStatusExecuteParams,
NULL,
(IUnknown **)&pMultipleResults);
            if (FAILED(hr))
            {
                ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
            }
        }
        catch (...)
        {
            if (iTryCount < 3)
            {
                iTryCount++;
                continue;
            }
            else
            {
                ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eExecute, "OrderStatus()");
            }
        }
    }
}

```

```

////////////////////////////// // Get order line results //////////////////////////////

object
    // Get the first rowset
    hr = pMultipleResults->GetResult(NULL, 0, IID_IRowset, &lRowsAffected,
(IUnknown **)&pRowset);
    if (FAILED(hr))
    {
        ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
    }

    // Fetch the result row handle(s)
    hr = pRowset->GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRows);
    if (FAILED(hr))
    {
        ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
    }

    m_txn.OrderStatus.o.ol_cnt =
(cshort)cRowsObtained;

    // Get the data from multiple rows in this rowset
    for (i = 0; i < m_txn.OrderStatus.o.ol_cnt; ++i)
    {
        // Fetch the actual row data by handle
        hr = pRowset->GetData(rghRows[i], m_hOrderStatusOutputAccessor,
&m_txn.OrderStatus.OL[i]);
        if (FAILED(hr))
        {
            ThrowError(m_pIOOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
        }
    }

    // Release row(s)
    hr = pRowset->ReleaseRows(cRowsObtained, prghRows, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset->Release();
}

```

```

////////////////////////////// // Get the second
rowset object
/////////////////////////////
if
(m_txn.OrderStatus.o.ol_cnt > 0)
{
    hr =
pMultipleResults->GetResult(NULL, 0, IID_IRowset,
&lRowsAffected, (IUnknown **)&pRowset2);
    if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetResult, "OrderStatus()");
    }

                // Fetch the
result row handle(s)
                hr =
pRowset2->GetNextRows(DB_NULL_HCHAPTER, 0, cRows2,
&cRowsObtained2, &prghRows2);
                if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetNextRows, "OrderStatus()");
    }

                // Fetch the
actual row data by handle
                hr =
pRowset2->GetData(rghRows2,
m_hOrderStatusOutputAccessor2, &m_txn.OrderStatus);
                if
(FAILED(hr))
    {
        ThrowError(m_pIOrderStatusCommand,
COLEDBERR::eGetData, "OrderStatus()");
    }

                // Release
row(s)
                hr =
pRowset2->Release();
    }

                // Release the common
MultipleResults interface
                hr = pMultipleResults-
>Release();

                if
(m_txn.OrderStatus.o.ol_cnt == 0)
                    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_NO_SUCH_ORDER
);

```

```

else if
m_txn.OrderStatus.c_id == 0 &&
m_txn.OrderStatus.c_last[0] == 0)
    throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_INVALID_CUST );
else

    m_txn.OrderStatus.exec_status_code = eOK;
    break;

}
catch (COLEDBERR *e)
{
    if ((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
        throw;
    // hit deadlock;
backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}

// if (iTryCount)
//     throw new
CTPCC_OLEDB_ERR( CTPCC_OLEDB_ERR::ERR_RETRYED_TRANS,
iTryCount);
}

void CTPCC_OLEDB::InitDeliveryParams()
{
    int
        i;
    HRESULT
    hr;
    wchar_t
szName[iMAX_SP_NAME_LEN];
IAccessor*
pIAccessor;
ULONG
nInputParams = 2; // input parameters
const ULONG
nOutputParams = 10; // output 1st result
set columns
    // Structure to bind in accessor
    DBBINDING
    acInputDBBind[nInputParams];
    DBBINDSTATUS
    acInputDBBindStatus[nInputParams];
    DBBINDING
    acOutputDBBind[nOutputParams];
    DBBINDSTATUS
    acOutputDBBindStatus[nOutputParams];
    // Set command text
    _snprintf(szName,
sizeof(szName)/sizeof(szName[0]),
L"{call %stpcc_delivery
(?,?)}", m_szSPPrefix);

```

```

// Create and Prepare a new command object
for Delivery.
CreateCommand(szName,
&m_pIDeliveryCommand);

// Describe the consumer buffer by filling
in the array
// of DBBINDING structures. Each binding
associates
// a single parameter to the consumer's buffer.
InitBindings(&acInputDBBind[0],
nInputParams, eInputParameter);

i = 0;
// Delivery parameter 1
SetBinding(&acInputDBBind[i++],
offsetof(DELIVERY_DATA, w_id),
sizeof(m_txn.Delivery.w_id), DBTYPE_I4);

// Delivery parameter 2
SetBinding(&acInputDBBind[i++],
offsetof(DELIVERY_DATA, o_carrier_id),
sizeof(m_txn.Delivery.o_carrier_id), DBTYPE_I2);

hr = m_pIDeliveryCommand-
>QueryInterface(IID_IAccessor, (void **)&pIAccessor);
if (FAILED(hr))
{
    ThrowError(m_pIDeliveryCommand,
COLEDBERR::eQueryInterface, "InitDeliveryParams()");
}

hr = pIAccessor->CreateAccessor(
    DBACCESSOR_PARAMETERDATA,
    nInputParams,
    acInputDBBind,
    sizeof(DELIVERY_DATA),
    &m_hDeliveryInputAccessor,
    acInputDBBindStatus);
if (FAILED(hr))
{
    ThrowError(pIAccessor,
COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
}

m_DeliveryExecuteParams.cParamSets = 1;
m_DeliveryExecuteParams.hAccessor =
m_hDeliveryInputAccessor;
m_DeliveryExecuteParams.pData =
&m_txn.Delivery;

// Now fill the binding information for
result set 1 output columns
InitBindings(&acOutputDBBind[0],
nOutputParams, eOutputColumn);

// Binding for a rowset that may return
more than one row.
for (i = 0; i < 10; ++i)
{
    // Delivery output column 1
}

```

```

        SetBinding(&acOutputDBBinding[i],
        offsetof(DELIVERY_DATA, o_id[i]),
        sizeof(m_txn.Delivery.o_id[i]), DBTYPE_I4);
    }

    hr = pIAccessor->CreateAccessor(
        DBACCESSOR_OPTIMIZED,
        nOutputParams,
        acOutputDBBinding,
        sizeof(DELIVERY_DATA),
        &m_hDeliveryOutputAccessor,
        acOutputDBBindStatus);
    if (FAILED(hr))
    {
        ThrowError(pIAccessor,
        COLEDBERR::eCreateAccessor, "InitDeliveryParams()");
    }

void CTPCC_OLEDB::Delivery()
{
    HRESULT hr;
    int iTryCount = 0;
    IRowset* pRowset;
    LONG cRows = 1;
    // number of rows returned in the rowset
    ULONG cRowsObtained;
    HROW rghRow;
    //returned row handles
    HROW* prghRow =
    &rghRow;

    while (TRUE)
    {
        try
        {
            // Execute the prepared
            command
            hr =
m_pIDeliveryCommand->Execute(NULL, IID_IRowset,
&m_DeliveryExecuteParams, NULL,
(IUnknown**)&pRowset);
            if (FAILED(hr))
            {

                ThrowError(m_pIDeliveryCommand,
                COLEDBERR::eExecute, "Delivery()");
            }
        }

        // Fetch the result row
        handle(s)
        hr = pRowset-
>GetNextRows(DB_NULL_HCHAPTER, 0, cRows,
&cRowsObtained, &prghRow);
        if (FAILED(hr))
        {

```

```

        ThrowError(m_pIDeliveryCommand,
        COLEDBERR::eGetNextRows, "Delivery()");
    }

    // Fetch the actual row
    data by handle
    hr = pRowset-
>GetData(rghRow, m_hDeliveryOutputAccessor,
&m_txn.Delivery);
    if (FAILED(hr))
    {

        ThrowError(m_pIDeliveryCommand,
        COLEDBERR::eGetData, "Delivery()");
    }

    // Release row(s)
    hr = pRowset-
>ReleaseRows(cRowsObtained, prghRow, NULL, NULL,
NULL);
    // Release rowset
    hr = pRowset-
>Release();

    m_txn.Delivery.exec_status_code = eOK;
    break;
}
catch (COLEDBERR *e)
{
    if (((!e->m_bDeadLock)
|| (++iTryCount > iMaxRetries))
throw;
    // hit deadlock;
    backoff for increasingly longer period
    delete e;
    Sleep(10 * iTryCount);
}
// if (iTryCount)
//     throw new
CTPCC_OLEDB_ERR(CTPCC_OLEDB_ERR::ERR_RETRY_TRANS,
iTryCount);
}

```

tpcc_oledb.h

```

/*      FILE:          TPCC_OLEDB.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999-2004
*      Written by
Sergey Vasilevskiy
*          All Rights Reserved
*
*
*
```

```

*      PURPOSE: Header file for TPC-C txn class
OLE DB implementation.
*
*
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

#define iMAX_SP_NAME_LEN 256 //maximum length of a
stored procedure name with parameters

// Type of parameter and result set column bindings.
enum eBindingType
{
    eInputParameter,
    eOutputParameter,
    eInputOutputParameter,
    eOutputColumn
};

class COLEDBERR : public CBaseErr
{
public:
    enum ACTION
    {
        eNone,
        eUnknown,
        eQueryInterface,
        // error from QueryInterface
        eCreateSession,
        eCreateCommand,
        eSetCommandText,
        eExecute,
        eCreateAccessor,
        ePrepare,
        eGetNextRows,
        eGetData,
        eGetResult
    };
    // = 6
    // = 11
};

COLEDBERR(LPCTSTR szLoc)
: CBaseErr(szLoc)
{
    m_eAction = eNone;
    m_NativeError = 0;
    m_bDeadLock = FALSE;
    m_OLEDBErrStr = NULL;
};

~COLEDBERR()
{
    if (m_OLEDBErrStr !=
NULL)
        delete []
    m_OLEDBErrStr;
}


```

```

    };

    ACTION     m_eAction;
    int        m_NativeError;
    BOOL       m_bDeadLock;
    char      *m_OLEDBErrStr;

    int          ErrorType();
{return ERR_TYPE_OLEDB; }   char*  ErrorTypeStr() { return
"OLEDB"; }
    int          ErrorNum();
{return m_NativeError; }   char*  ErrorText() { return
m_OLEDBErrStr; }
    int          ErrorAction();
{ return (int)m_eAction; }

};

class CTPCC_OLEDB_ERR : public CBaseErr
{
public:
    enum TPCC_OLEDB_ERRS
    {
        ERR_WRONG_SP_VERSION =
1,           // "Wrong version of stored procs on
database server"
        ERR_INVALID_CUST,
        // "Invalid Customer id.name."
        ERR_NO SUCH_ORDER,
        // "No orders found for
customer."
        ERR_RETRYED_TRANS,
        // "Retries before transaction
succeeded."
    };

    CTPCC_OLEDB_ERR( int iErr ) {
m_errno = iErr; m_iTryCount = 0; }

    CTPCC_OLEDB_ERR( int iErr, int
iTryCount ) { m_errno = iErr; m_iTryCount =
iTryCount; }

    int          m_errno;
    int          m_iTryCount;
    int          ErrorType();
{return ERR_TYPE_TPCC_OLEDB; }   char*  ErrorTypeStr() { return
"TPCC OLEDB"; }
    int          ErrorNum();
{return m_errno; }
    char*  ErrorText();
};

class DllDecl CTPCC_OLEDB : public CTPCC_BASE
{
private:

```

```

// declare variables and private
functions here...
    BOOL
    m_bDeadlock;                      // transaction was selected as deadlock victim
    int
                                m_MaxRetries;
                                // retry count on deadlock

    DBPROPSET
    m_rgInitPropSet;                  // initialization property set used to establish a
connection
    DBPROP
    m_InitProperties[4];              // individual initialization properties

    IDBCreateSession*
    m_pIDBCreateSession;             // session
(connection) interface
    IDBCreateCommand*
    m_pIDBCreateCommand;             // SQL
command creation interface

    IMalloc*
    m_pIMalloc;
    // Needed to release error strings.

    // StockLevel
    ICommandText*
    m_piStockLevelCommand;
    HACCESSOR
    m_hStockLevelInputAccessor;      // accessor
to bind input parameters
    HACCESSOR
    m_hStockLevelOutputAccessor;     // accessor
to bind output columns
    DBPARAMS
    m_StockLevelExecuteParams;       // parameter structure for Execute

    // NewOrder
    // One prepared command for each
possible number of new order line items
    ICommandText*
    m_pINewOrderCommand[MAX_OI_NEW_ORDER_ITEMS];
    // accessors to bind input
parameters
    // one for each possible number
of new order line items
    HACCESSOR
    m_hNewOrderInputAccessor[MAX_OI_NEW_ORDER_I
TEMS];
    // accessor to bind output
columns of the first rowset
    HACCESSOR
    m_hNewOrderOutputAccessor[MAX_OI_NEW_ORDER_
ITEMS];
    // accessor to bind output
columns of the second rowset

```

```

HACCESSOR
m_hNewOrderOutputAccessor2[MAX_OI_NEW_ORDER
 ITEMS];
    // parameter structure for
Execute
    DBPARAMS
    m_NewOrderExecuteParams [MAX_OI_NEW_ORDER_IT
EMS];

    // Payment
    ICommandText*
    m_pIPaymentCommand;
    HACCESSOR
    m_hPaymentInputAccessor;         // accessor
to bind input parameters
    HACCESSOR
    m_hPaymentOutputAccessor;       // accessor
to bind output columns
    DBPARAMS
    m_PaymentExecuteParams;         // parameter structure for Execute

    // OrderStatus
    ICommandText*
    m_pIOrderStatusCommand;
    HACCESSOR
    m_hOrderStatusInputAccessor;     // accessor
to bind input parameters
    HACCESSOR
    m_hOrderStatusOutputAccessor;   // accessor
to bind output columns
    HACCESSOR
    m_hOrderStatusOutputAccessor2;   // accessor to bind output columns
    DBPARAMS
    m_OrderStatusExecuteParams;     // parameter structure for Execute

    // Delivery
    ICommandText*
    m_pIDeliveryCommand;
    HACCESSOR
    m_hDeliveryInputAccessor;       // accessor
to bind input parameters
    HACCESSOR
    m_hDeliveryOutputAccessor;      // accessor
to bind output columns
    DBPARAMS
    m_DeliveryExecuteParams;        // parameter
structure for Execute

    wchar_t
    m_szSPPrefix[32];               // stored
procedures prefix
    // new-order specific fields
    int
    m_no_commit_flag;

void ThrowError( IUnknown*
pObjectWithError, COLEDBERR::ACTION eAction, LPCTSTR
szLocation );

```

```

        void CheckSPVersion();

        void InitNewOrderParams();
        void InitPaymentParams();
        void InitDeliveryParams();
        void InitStockLevelParams();
        void InitOrderStatusParams();

        // Helper function to create and
        prepare a command
        void CreateCommand(wchar_t*
szSQLCommand, ICommandText** ppICommandText);
        // Helper function to prepare a
        command
        void PrepareCommand(ICommandText*
pICommand);

        // Helper function to fill one
        binding
        // Used for both input parameter
        and output column bindings
        void SetBinding(DBBINDING*
pDBBinding, size_t obValue, size_t cbMaxLen, DBTYPE
wType);

        // Helper function to initialize
        an array of bindings
        void InitBindings(DBBINDING*
pDBBindings, int iCount, eBindingType BindingType);

        union
        {
            NEW_ORDER_DATA
            Payment;
            Delivery;
            StockLevel;
            OrderStatus;
        }
        m_txn;

        public:
            CTPCC_OLEDB(LPCSTR szServer,
LPCSTR szUser, LPCSTR szPassword, LPCSTR szHost,
LPCSTR szDatabase, LPCWSTR szSPPrefix);
            ~CTPCC_OLEDB(void);

            inline PNEW_ORDER_DATA
            BuffAddr_NewOrder() { return
&m_txn.NewOrder; };
            inline PPAYMENT_DATA
            BuffAddr_Payment() { return
&m_txn.Payment; };
            inline PDELIVERY_DATA
            BuffAddr_Delivery() { return
&m_txn.Delivery; };

```

```

        inline PSTOCK_LEVEL_DATA
        BuffAddr_StockLevel() { return
&m_txn.StockLevel; };
        inline PORDER_STATUS_DATA
        BuffAddr_OrderStatus() { return
&m_txn.OrderStatus; };

        void NewOrder();
        void Payment();
        void Delivery();
        void StockLevel();
        void OrderStatus();

};

// wrapper routine for class constructor
extern "C" DllDecl CTPCC_OLEDB* CTPCC_OLEDB_new
    ( LPCSTR szServer, LPCSTR szUser, LPCSTR
szPassword, LPCSTR szHost, LPCSTR szDatabase, LPCWSTR
szSPPrefix );

typedef CTPCC_OLEDB* (TYPE_CTPCC_OLEDB)(LPCSTR,
LPCSTR, LPCSTR, LPCSTR, LPCWSTR);

```

trans.h

```

/*      FILE:          TRANS.H
*      *          Microsoft
*      TPC-C Kit Ver. 4.42.000
*      *          Copyright
*      Microsoft, 2002
*      *          All Rights Reserved
*      *          Version
*      4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*      *
*      PURPOSE: Header file for TPC-C structure
templates.
*
*      Change history:
*      4.42.000 - changed w_id fields
from short to long to support >32K warehouses
*      4.20.000 - updated rev number to
match kit
*/
#pragma once

// String length constants
#define SERVER_NAME_LEN           20
#define DATABASE_NAME_LEN         20
#define USER_NAME_LEN              20
#define PASSWORD_LEN                20
#define TABLE_NAME_LEN             20
#define I_DATA_LEN                  50
#define I_NAME_LEN                  24
#define BRAND_LEN                   1
#define LAST_NAME_LEN                16
#define W_NAME_LEN                  10
#define ADDRESS_LEN                  20
#define STATE_LEN                     2

```

```

#define ZIP_LEN                      9
#define S_DIST_LEN                    24
#define S_DATA_LEN                   50
#define D_NAME_LEN                   10
#define FIRST_NAME_LEN                16
#define MIDDLE_NAME_LEN                 2
#define PHONE_LEN                     16
#define DATETIME_LEN                  30
#define CREDIT_LEN                     2
#define C_DATA_LEN                   250
#define H_DATA_LEN                   24
#define DIST_INFO_LEN                  24
#define MAX_DL_NEW_ORDER_ITEMS        15
#define MAX_DL_ORDER_STATUS_ITEMS     15
#define STATUS_LEN                     25
#define OL_DIST_INFO_LEN                24

// TIMESTAMP_STRUCT is provided by the ODBC header
file sqatypes.h, but is not available
// when compiling with dblib, so redefined here.
Note: we are using the symbol "__SQLTYPES"
// (declared in sqatypes.h) as a way to determine if
TIMESTAMP_STRUCT has been declared.
#ifndef __SQLTYPES
    typedef struct
    {
        /* SQLSMALLINT */ short
        year;                                unsigned short /* */
        SQLUSMALLINT */ month;                unsigned short /* */
        SQLUSMALLINT */ day;                  unsigned short /* */
        SQLUSMALLINT */ hour;                unsigned short /* */
        SQLUSMALLINT */ minute;               unsigned short /* */
        SQLUSMALLINT */ second;               unsigned short /* */
        SQLUInteger */ fraction;             unsigned long /* */
    } TIMESTAMP_STRUCT;
#endif

// possible values for exec_status_code after
transaction completes
enum EXEC_STATUS
{
    eOK,                                     // 0
    "Transaction committed."
    eInvalidItem,                            // 1
    "Item number
is not valid."
    eDeliveryFailed,                         // 2
    "Delivery
Post Failed."
};

// transaction structures
typedef struct
{
    // input params
    long
    ol_supply_w_id;
    long
    ol_i_id;
}

```

```

short
ol_quantity;

// output params
char
ol_i_name[I_NAME_LEN+1];
char
ol_brand_generic[BRAND_LEN+1];
double
ol_i_price;
double
ol_amount;
short
ol_stock;
} OL_NEW_ORDER_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    short     o.ol_cnt;

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_last[LAST_NAME_LEN+1];
    char      c_credit[CREDIT_LEN+1];
    double    c_discount;
    double    w_tax;
    double    d_tax;
    long      o_id;
    short     o_commit_flag;
    TIMESTAMP_STRUCT   o_entry_d;
    short     o_all_local;
    double    total_amount;
    OL_NEW_ORDER_DATA
    OL[MAX_OI_NEW_ORDER_ITEMS];
} NEW_ORDER_DATA, *PNEW_ORDER_DATA;

typedef struct
{
    // input params
    long
    w_id;
    short
    d_id;
    long
    c_id;
    short
    c_d_id;
    long
    c_w_id;
    double
    h_amount;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
}

TIMESTAMP_STRUCT      h_date;
char
w_street_1[ADDRESS_LEN+1];
char
w_street_2[ADDRESS_LEN+1];
char
w_city[ADDRESS_LEN+1];
char
w_state[STATE_LEN+1];
char
w_zip[ZIP_LEN+1];
char
d_street_1[ADDRESS_LEN+1];
char
d_street_2[ADDRESS_LEN+1];
char
d_city[ADDRESS_LEN+1];
char
d_state[STATE_LEN+1];
char
d_zip[ZIP_LEN+1];
char
c_first[FIRST_NAME_LEN+1];
char
c_middle[MIDDLE_NAME_LEN+1];
char
c_street_1[ADDRESS_LEN+1];
char
c_street_2[ADDRESS_LEN+1];
char
c_city[ADDRESS_LEN+1];
char
c_state[STATE_LEN+1];
char
c_zip[ZIP_LEN+1];
char
c_phone[PHONE_LEN+1];
TIMESTAMP_STRUCT      c_since;
char
c_credit[CREDIT_LEN+1];
double
c_credit_lim;
double
c_discount;
double
c_balance;
char
c_data[200+1];
} PAYMENT_DATA, *PPAYMENT_DATA;

typedef struct
{
    long
    ol_i_id;
    long
    ol_supply_w_id;
    short
    ol_quantity;
    double
    ol_amount;
    TIMESTAMP_STRUCT   ol_delivery_d;
} OL_ORDER_STATUS_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    long      c_id;
    char
    c_last[LAST_NAME_LEN+1];

    // output params
    EXEC_STATUS
    exec_status_code;
    char
    c_first[FIRST_NAME_LEN+1];
    char
    c_middle[MIDDLE_NAME_LEN+1];
    double
    c_balance;
    long      o_id;
    TIMESTAMP_STRUCT   o_entry_d;
    short     o_all_local;
    double    o_amount;
    short     o.ol_cnt;
} ORDER_STATUS_DATA, *PORDER_STATUS_DATA;

typedef struct
{
    // input params
    long      w_id;
    short     o_carrier_id;

    // output params
    EXEC_STATUS
    exec_status_code;
    SYSTEMTIME           queue_time;
    long
    o_id[10];           // id's of delivered
orders for districts 1 to 10
} DELIVERY_DATA, *PDELIVERY_DATA;

//This structure is used for posting delivery
transactions and for writing them to the delivery
server.
typedef struct _DELIVERY_TRANSACTION
{
    SYSTEMTIME           queue;
    //time delivery transaction queued
    long      w_id;
    //delivery warehouse
    short     o_carrier_id;
    //carrier id
} DELIVERY_TRANSACTION;

typedef struct
{
    // input params
    long      w_id;
    short     d_id;
    short     threshold;
    // output params
} DELIVERY_TRANSACTION;

```

```

    EXEC_STATUS
    exec_status_code;
    long
    low_stock;
} STOCK_LEVEL_DATA, *PSTOCK_LEVEL_DATA;

```

txn_base.h

```

/*      FILE:          TXN_BASE.H
*      Microsoft
TPC-C Kit Ver. 4.20.000
*      Copyright
Microsoft, 1999
*          All Rights Reserved
*
*      Version
4.10.000 audited by Richard Gimarc, Performance
Metrics, 3/17/99
*
*      PURPOSE: Header file for TPC-C txn class
implementation.
*
*      Change history:
*          4.20.000 - updated rev number to
match kit
*/
#pragma once

// need to declare functions for import, unless
define has already been created
// by the DLL's .cpp module for export.
#ifndef DllDecl
#define DllDecl __declspec( dllexport )
#endif

class DllDecl CTPCC_BASE
{
public:
    CTPCC_BASE(void) {};
    virtual ~CTPCC_BASE(void) {};

    virtual PNEW_ORDER_DATA
    BuffAddr_NewOrder() = 0;
    virtual PPAYMENT_DATA
    BuffAddr_Payment() = 0;
    virtual PDELIVERY_DATA
    BuffAddr_Delivery() = 0;
    virtual PSTOCK_LEVEL_DATA
    BuffAddr_StockLevel() = 0;
    virtual PORDER_STATUS_DATA
    BuffAddr_OrderStatus() = 0;

    virtual void NewOrder
    () = 0;
    virtual void Payment
    () = 0;
    virtual void Delivery
    () = 0;
    virtual void StockLevel
    () = 0;
}

```

```

        virtual void OrderStatus ()  

        = 0;  

};

```

resource.h

```

{{{NO_DEPENDENCIES}}}
// Microsoft Developer
Studio generated
include file.
// Used by
tpcc_com_all.rc
//
#define IDS_PROJNAME 100
#define IDR_TPCC 101
#define IDR_NEWORDER 102
#define IDR_ORDERSTATUS 103
#define IDR_PAYMENT 104
#define IDR_STOCKLEVEL 105

// Next default values
for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 202
#define _APS_NEXT_COMMAND_VALUE 32768
#define _APS_NEXT_CONTROL_VALUE 201
#define _APS_NEXT_SYMED_VALUE 106
#endif
#endif

```

resource.h

```

{{{NO_DEPENDENCIES}}}
// Microsoft Developer Studio generated include file.
// Used by tpcc.rc
//
#define IDD_DIALOG1 101

// Next default values for new objects
//
#ifndef APSTUDIO_INVOKED
#ifndef APSTUDIO_READONLY_SYMBOLS
#define _APS_NEXT_RESOURCE_VALUE 102
#define _APS_NEXT_COMMAND_VALUE 40001
#define _APS_NEXT_CONTROL_VALUE 1000
#define _APS_NEXT_SYMED_VALUE 101
#endif
#endif

```

Appendix B: Database Design

The TPC-C database was created with the following Transact-SQL scripts:

removedb.sql

```
-- File: REMOVEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

USE master
GO

-- remove any existing database and backup files

EXEC sp_dbremove tpcc, dropdev
GO

EXEC sp_dropdevice 'tpccback1'
EXEC sp_dropdevice 'tpccback2'
EXEC sp_dropdevice 'tpccback3'
EXEC sp_dropdevice 'tpccback4'
GO
```

backupdev.sql

```
-- File: BACKUPDEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

USE master
GO

-- create backup devices
EXEC sp_addumpdevice 'disk', 'tpccback1', 'W:\tpccback1.dmp'
GO
EXEC sp_addumpdevice 'disk', 'tpccback2', 'X:\tpccback2.dmp'
```

```
GO
EXEC sp_addumpdevice 'disk', 'tpccback3', 'Y:\tpccback3.dmp'
GO
EXEC sp_addumpdevice 'disk', 'tpccback4', 'Z:\tpccback4.dmp'
GO
```

version.sql

```
-- File: VERSION.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Extracts current version of SQL Server
--

USE master
GO

SELECT CONVERT(char(20), SERVERPROPERTY('ProductVersion')),
       CONVERT(char(20), SERVERPROPERTY('ProductLevel')),
       CONVERT(char(29), SERVERPROPERTY('Edition'))
GO

SELECT CONVERT(char(30), GETDATE(), 21)
GO
```

createdb.sql

```
-- File: CREATEDB.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

SET ANSI_NULL_DFLT_OFF ON
GO

USE master
GO

-- Create temporary table for timing
IF EXISTS( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )
    DROP TABLE tpcc_timer
GO

CREATE TABLE tpcc_timer
    (start_date    CHAR(30),
     end_date      CHAR(30))
GO

INSERT INTO tpcc_timer VALUES(0,0)
GO

-- Store starting time
```

```

-----  

UPDATE tpcc_timer  

SET start_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))  

GO  

-----  

-- create main database files  

-----  

CREATE DATABASE tpcc  

ON PRIMARY  

(  

    NAME          = MSSQL_tpcc_root,  

    FILENAME     = 'C:\MSSQL_tpcc_root.mdf',  

    SIZE          = 8MB,  

    FILEGROWTH   = 0),  

FILEGROUP MSSQL_misc_fg  

(  

    NAME          = MSSQL_misc1,  

    FILENAME     = 'c:\tpcc\misc\misc1\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc2,  

    FILENAME     = 'c:\tpcc\misc\misc2\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc3,  

    FILENAME     = 'c:\tpcc\misc\misc3\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc4,  

    FILENAME     = 'c:\tpcc\misc\misc4\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc5,  

    FILENAME     = 'c:\tpcc\misc\misc5\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc6,  

    FILENAME     = 'c:\tpcc\misc\misc6\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc7,  

    FILENAME     = 'c:\tpcc\misc\misc7\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc8,  

    FILENAME     = 'c:\tpcc\misc\misc8\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc9,  

    FILENAME     = 'c:\tpcc\misc\misc9\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc10,  

    FILENAME    = 'c:\tpcc\misc\misc10\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_misc11,  

    FILENAME     = 'c:\tpcc\misc\misc11\',  

    SIZE          = 58300MB,  

    FILEGROWTH   = 0),  

FILEGROUP MSSQL_cs_fg  

(  

    NAME          = MSSQL_cs1,  

    FILENAME     = 'c:\tpcc\cs\cs1\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs2,  

    FILENAME     = 'c:\tpcc\cs\cs2\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs3,  

    FILENAME     = 'c:\tpcc\cs\cs3\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs4,  

    FILENAME     = 'c:\tpcc\cs\cs4\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs5,  

    FILENAME     = 'c:\tpcc\cs\cs5\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs6,  

    FILENAME     = 'c:\tpcc\cs\cs6\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs7,  

    FILENAME     = 'c:\tpcc\cs\cs7\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs8,  

    FILENAME     = 'c:\tpcc\cs\cs8\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs9,  

    FILENAME     = 'c:\tpcc\cs\cs9\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs10,  

    FILENAME    = 'c:\tpcc\cs\cs10\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0),  

(  

    NAME          = MSSQL_cs11,  

    FILENAME     = 'c:\tpcc\cs\cs11\' ,  

    SIZE          = 103800MB,  

    FILEGROWTH   = 0)  

LOG ON  

(  

    NAME          = MSSQL_tpcc_log,  

    FILENAME     = 'E:',  

    SIZE          = 800100MB,  

    FILEGROWTH   = 0)  

COLLATE Latin1_General_BIN  

GO  

-----  

-- Store ending time  

-----  

UPDATE tpcc_timer  

SET end_date = (SELECT CONVERT(CHAR(30), GETDATE(), 21))  

GO  

-----  

SELECT DATEDIFF(second, (SELECT start_date FROM tpcc_timer), (SELECT end_date FROM tpcc_timer))  

GO  

-----  

-- remove temporary table

```

```

-----  

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_timer' )  

    DROP TABLE tpcc_timer  

GO

```

dopt1.sql

```

-- File: DBOPT1.SQL  

-- Microsoft TPC-C Benchmark Kit Ver. 4.68  

-- Copyright Microsoft, 2006  

--  

-- Sets database options for load  

--  

-----  

USE master  

GO  
  

ALTER DATABASE tpcc SET RECOVERY BULK_LOGGED  

GO  
  

EXEC sp_dboption tpcc,'trunc. log on chkpt.',TRUE  

GO  
  

ALTER DATABASE tpcc SET TORN_PAGE_DETECTION OFF  

GO  
  

ALTER DATABASE tpcc SET PAGE_VERIFY NONE  

GO  
  

USE tpcc  

GO  
  

CHECKPOINT
GO

```

dopt2.sql

```

-- File: DBOPT2.SQL  

-- Microsoft TPC-C Benchmark Kit Ver. 4.68  

-- Copyright Microsoft, 2006  

--  

-- Sets database options after load  

--  

-----  

ALTER DATABASE tpcc SET RECOVERY FULL  

GO  
  

USE tpcc  

GO  
  

CHECKPOINT
GO  
  

sp_configure 'allow updates',1  

GO  
  

RECONFIGURE WITH OVERRIDE

```

```

GO  
  

DECLARE @msg varchar(50)  
  

-----  

-- OPTIONS FOR SQL SERVER 2000 --  

-- Set option values for user-defined indexes --  

-----  

SET @msg = ''  

PRINT @msg  

SET @msg = 'Setting SQL Server indexoptions'  

PRINT @msg  

SET @msg = ''  

PRINT @msg  
  

EXEC sp_indexoption 'customer',      'DisallowPageLocks',   TRUE  

EXEC sp_indexoption 'district',      'DisallowPageLocks',   TRUE  

EXEC sp_indexoption 'warehouse',     'DisallowPageLocks',   TRUE  

EXEC sp_indexoption 'stock',         'DisallowPageLocks',   TRUE  

EXEC sp_indexoption 'order_line',    'DisallowRowLocks',    TRUE  

EXEC sp_indexoption 'orders',        'DisallowRowLocks',    TRUE  

EXEC sp_indexoption 'new_order',     'DisallowRowLocks',    TRUE  

EXEC sp_indexoption 'item',          'DisallowRowLocks',    TRUE  

EXEC sp_indexoption 'item',          'DisallowPageLocks',   FALSE  

GO  
  

Print '  

Print *****  

Print 'Pre-specified Locking Hierarchy:  

Print '  Lockflag = 0 ==> No pre-specified hierarchy'  

Print '  Lockflag = 1 ==> Lock at Page-level then Table-level'  

Print '  Lockflag = 2 ==> Lock at Row-level then Table-level'  

Print '  Lockflag = 3 ==> Lock at Table-level'  

Print '  

SELECT name,  

       lockflags  

FROM sysindexes  

WHERE object_id('warehouse') = id OR  

      object_id('district') = id OR  

      object_id('customer') = id OR  

      object_id('stock') = id OR  

      object_id('orders') = id OR  

      object_id('order_line') = id OR  

      object_id('history') = id OR  

      object_id('new_order') = id OR  

      object_id('item') = id  

ORDER BY lockflags asc  

GO  
  

sp_configure 'allow updates',0  

GO  
  

RECONFIGURE WITH OVERRIDE
GO  
  

EXEC sp_dboption tpcc,      'auto update statistics',   FALSE  

EXEC sp_dboption tpcc,      'auto create statistics',   FALSE  

GO  
  

DECLARE @db_id int,  

        @tbl_id int

```

```

SET      @db_id = DB_ID('tpcc')
SET      @tbl_id = OBJECT_ID('tpcc..warehouse')
DBCC PINTABLE (@db_id, @tbl_id)

SET      @tbl_id = OBJECT_ID('tpcc..district')
DBCC PINTABLE (@db_id, @tbl_id)

SET      @tbl_id = OBJECT_ID('tpcc..new_order')
DBCC PINTABLE (@db_id, @tbl_id)

SET      @tbl_id = OBJECT_ID('tpcc..item')
DBCC PINTABLE (@db_id, @tbl_id)
GO

```

RunSQLCfg.sql

```

-- File: RUNSQLCFG.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Sets suggested runtime server configuration
-- parameters
--

EXEC sp_configure 'show advanced option', 1
GO

RECONFIGURE WITH OVERRIDE
GO

-- change this value to approximately the number of connected users
EXEC sp_configure 'max worker threads',255

-- increase priority of user threads
EXEC sp_configure 'priority boost',1

-- disable automatic checkpointing
EXEC sp_configure 'recovery interval',32767

-- change to a mask appropriate for the number of processors on the server
EXEC sp_configure 'affinity mask',255

-- enable fibers
EXEC sp_configure 'lightweight pooling',1
GO

EXEC sp_configure 'max degree',1
go

```

```

EXEC sp_configure 'max server mem',64000
go

EXEC sp_configure 'default trace',0
go

RECONFIGURE WITH OVERRIDE
GO

```

VerifyTpccLoad.sql

```

-- File: VerifyTPCCLoad.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

SET NOCOUNT ON
PRINT ''
SELECT   CONVERT(CHAR(30), GETDATE(), 21)
PRINT ''

USE      tpcc
GO

IF EXISTS (SELECT name
            FROM sysobjects
            WHERE name   = 'TPCC_INFO' AND
                  type    = 'U')
    DROP TABLE TPCC_INFO
GO
PRINT 'WAREHOUSE TABLE'
SELECT count_big(*)
FROM warehouse
GO

PRINT 'DISTRICT TABLE = (10 * No of warehouses)'
SELECT count_big(*)
FROM district
GO

PRINT 'ITEM TABLE = 100,000'
SELECT count_big(*)
FROM item
GO

PRINT 'CUSTOMER TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM customer
GO

PRINT 'ORDERS TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM orders
GO

PRINT 'HISTORY TABLE = (30,000 * No of warehouses)'
SELECT count_big(*)
FROM history
GO

```

```

PRINT 'STOCK TABLE = (100,000 * No of warehouses)'
SELECT count_big(*)
FROM stock
GO

PRINT 'ORDER_LINE TABLE = (300,000 * No of warehouses + some change)'
SELECT count_big(*)
FROM order_line
GO

PRINT 'NEW_ORDER TABLE = (9000 * No of warehouses)'
SELECT count_big(*)
FROM new_order
GO

CREATE TABLE TPCC_INFO
(
    INFO_DATE           datetime,
    NUM_WAREHOUSE      bigint,
    WAREHOUSE_TARGET   bigint,
    NUM_DISTRICT       bigint,
    DISTRICT_TARGET    bigint,
    NUM_ITEM            bigint,
    ITEM_TARGET         bigint,
    NUM_CUSTOMER        bigint,
    CUSTOMER_TARGET    bigint,
    NUM_ORDERS          bigint,
    ORDERS_TARGET       bigint,
    ORDERS_TARGET_LOW   bigint,
    ORDERS_TARGET_HIGH  bigint,
    NUM_ORDER_LINE      bigint,
    ORDER_LINE_TARGET   bigint,
    ORDER_LINE_TARGET_LOW bigint,
    ORDER_LINE_TARGET_HIGH bigint,
    NUM_NEW_ORDER       bigint,
    NEW_ORDER_TARGET    bigint,
    NEW_ORDER_TARGET_LOW bigint,
    NEW_ORDER_TARGET_HIGH bigint,
    NUM_HISTORY          bigint,
    HISTORY_TARGET      bigint,
    NUM_STOCK            bigint,
    STOCK_TARGET         bigint
)
GO

DECLARE @NUM_WAREHOUSE      bigint,
        @WAREHOUSE_TARGET   bigint,
        @NUM_DISTRICT       bigint,
        @DISTRICT_TARGET    bigint,
        @NUM_ITEM            bigint,
        @ITEM_TARGET         bigint,
        @NUM_CUSTOMER        bigint,
        @CUSTOMER_TARGET    bigint,
        @NUM_ORDERS          bigint,
        @ORDERS_TARGET       bigint,
        @ORDERS_TARGET_LOW   bigint,
        @ORDERS_TARGET_HIGH  bigint,
        @NUM_ORDER_LINE      bigint,
        @ORDER_LINE_TARGET   bigint,
        @ORDER_LINE_TARGET_LOW bigint,
        @ORDER_LINE_TARGET_HIGH bigint,
        @NUM_NEW_ORDER       bigint,
        @NEW_ORDER_TARGET    bigint,
        @NEW_ORDER_TARGET_LOW bigint
GO

```

```

        @NEW_ORDER_TARGET_HIGH      bigint,
        @NUM_HISTORY                bigint,
        @HISTORY_TARGET              bigint,
        @NUM_STOCK                  bigint,
        @STOCK_TARGET                bigint

-- set the local variables prior to inserting them into the TPCC_INFO table
SELECT @NUM_WAREHOUSE      = COUNT_BIG(*)
FROM warehouse

SELECT @NUM_DISTRICT       = COUNT_BIG(*)
FROM district

SELECT @NUM_ITEM            = COUNT_BIG(*)
FROM item

SELECT @NUM_CUSTOMER        = COUNT_BIG(*)
FROM customer

SELECT @NUM_ORDERS          = COUNT_BIG(*)
FROM orders

SELECT @NUM_ORDER_LINE      = COUNT_BIG(*)
FROM order_line

SELECT @NUM_NEW_ORDER       = COUNT_BIG(*)
FROM new_order

SELECT @NUM_HISTORY          = COUNT_BIG(*)
FROM history

SELECT @NUM_STOCK            = COUNT_BIG(*)
FROM stock

--- now calculate and set the target values
SELECT @WAREHOUSE_TARGET    = @NUM_WAREHOUSE,
       @DISTRICT_TARGET     = @NUM_WAREHOUSE * 10,
       @ITEM_TARGET          = 100000,
       @CUSTOMER_TARGET     = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET        = @NUM_WAREHOUSE * 30000,
       @ORDERS_TARGET_LOW    = @ORDERS_TARGET - FLOOR(@ORDERS_TARGET * .01),
       @ORDERS_TARGET_HIGH   = @ORDERS_TARGET + FLOOR(@ORDERS_TARGET * .01),
       @ORDER_LINE_TARGET    = @NUM_WAREHOUSE * 30000,
       @ORDER_LINE_TARGET_LOW = @ORDER_LINE_TARGET - FLOOR(@ORDER_LINE_TARGET * .01),
       @ORDER_LINE_TARGET_HIGH = @ORDER_LINE_TARGET + FLOOR(@ORDER_LINE_TARGET * .01),
       @NEW_ORDER_TARGET     = @NUM_WAREHOUSE * 9000,
       @NEW_ORDER_TARGET_LOW = @NEW_ORDER_TARGET - FLOOR(@NEW_ORDER_TARGET * .01),
       @NEW_ORDER_TARGET_HIGH = @NEW_ORDER_TARGET + FLOOR(@NEW_ORDER_TARGET * .01),
       @HISTORY_TARGET        = @NUM_WAREHOUSE * 30000,
       @STOCK_TARGET          = @NUM_WAREHOUSE * 100000

--- insert the values into TPCC_INFO
INSERT INTO TPCC_INFO VALUES
(
    GETDATE(),
    @NUM_WAREHOUSE,
    @WAREHOUSE_TARGET,
    @NUM_DISTRICT,
    @DISTRICT_TARGET,
    @NUM_ITEM,
    @ITEM_TARGET
)

```

```

@NUM_CUSTOMER,
@CUSTOMER_TARGET,
@NUM_ORDERS,
@ORDERS_TARGET,
@ORDERS_TARGET_LOW,
@ORDERS_TARGET_HIGH,
@NUM_ORDER_LINE,
@ORDER_LINE_TARGET,
@ORDER_LINE_TARGET_LOW,
@ORDER_LINE_TARGET_HIGH,
@NUM_NEW_ORDER,
@NEW_ORDER_TARGET,
@NEW_ORDER_TARGET_LOW,
@NEW_ORDER_TARGET_HIGH,
@NUM_HISTORY,
@HISTORY_TARGET,
@NUM_STOCK,
@STOCK_TARGET)
GO

--- output the row counts from the build
PRINT ''
PRINT ''
PRINT '-----'
PRINT '| WAREHOUSE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_WAREHOUSE AS 'Warehouse Rows',
WAREHOUSE_TARGET AS 'Warehouse Target',
CASE WHEN (NUM_WAREHOUSE = WAREHOUSE_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!!'
END AS 'Warehouse Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| DISTRICT TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_DISTRICT AS 'District Rows',
DISTRICT_TARGET AS 'District Target',
CASE WHEN (NUM_DISTRICT = DISTRICT_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!!'
END AS 'District Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ITEM TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ITEM AS 'Item Rows',
ITEM_TARGET AS 'Item Target',
CASE WHEN (NUM_ITEM = ITEM_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!!'
END AS 'Item Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| CUSTOMER TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_CUSTOMER AS 'Customer Rows',
CUSTOMER_TARGET AS 'Customer Target',
CASE WHEN (NUM_CUSTOMER = CUSTOMER_TARGET)
    THEN 'OK!'
    ELSE 'ERROR!!!!'
END AS 'Customer Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDERS TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ORDERS AS 'Orders Rows',
ORDERS_TARGET AS 'Orders Target',
CASE WHEN (NUM_ORDERS = ORDERS_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDERS BETWEEN ORDERS_TARGET_LOW AND ORDERS_TARGET_HIGH)
        THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!!'
END AS 'Orders Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| ORDER LINE TABLE |'
PRINT '-----'
SELECT TOP 1
CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
NUM_ORDER_LINE AS 'Order Line Rows',
ORDER_LINE_TARGET AS 'Order Line Target',
CASE WHEN (NUM_ORDER_LINE = ORDER_LINE_TARGET)
    THEN 'OK!'
    WHEN (NUM_ORDER_LINE BETWEEN ORDER_LINE_TARGET_LOW AND
ORDER_LINE_TARGET_HIGH)
        THEN 'OK! (within 1%)'
    ELSE 'ERROR!!!!'
END AS 'Order Line Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| NEW ORDER TABLE |'
PRINT '-----'

```

```

PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_NEW_ORDER AS 'New Order Rows',
    NEW_ORDER_TARGET AS 'New Order Target',
    CASE WHEN (NUM_NEW_ORDER = NEW_ORDER_TARGET)
        THEN 'OK!'
        WHEN (NUM_NEW_ORDER BETWEEN NEW_ORDER_TARGET_LOW AND
NEW_ORDER_TARGET_HIGH)
        THEN 'OK! (within 1%)'
        ELSE 'ERROR!!!!'
    END AS 'New Order Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| HISTORY TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_HISTORY AS 'History Rows',
    HISTORY_TARGET AS 'History Target',
    CASE WHEN (NUM_HISTORY = HISTORY_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'History Message'
FROM TPCC_INFO
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| STOCK TABLE |'
PRINT '-----'
SELECT TOP 1
    CONVERT(CHAR(30),INFO_DATE,21) AS 'Date',
    NUM_STOCK AS 'Stock Rows',
    STOCK_TARGET AS 'Stock Target',
    CASE WHEN (NUM_STOCK = STOCK_TARGET)
        THEN 'OK!'
        ELSE 'ERROR!!!!'
    END AS 'Stock Message'
FROM TPCC_INFO
GO

-----
-- Check Indexes
-----
USE tpcc
GO

PRINT ''
PRINT ''
PRINT '-----'
PRINT '| TPC-C INDEXES |'
PRINT '-----'
EXEC sp_helpindex warehouse
EXEC sp_helpindex district
EXEC sp_helpindex item
EXEC sp_helpindex customer
EXEC sp_helpindex orders

```

```

EXEC sp_helpindex order_line
EXEC sp_helpindex new_order
EXEC sp_helpindex history
EXEC sp_helpindex stock
GO

```

backup.sql

```

-- File: BACKUP.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', CONVERT(VARCHAR(30),@startdate, 21)

DUMP DATABASE tpcc TO tpccback1, tpccback2, tpccback3, tpccback4 WITH init, stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date:', CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ', DATEDIFF(second, @startdate, @enddate)
GO

```

restore.sql

```

-- File: RESTORE.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', CONVERT(VARCHAR(30),@startdate, 21)

LOAD DATABASE tpcc FROM tpccback1, tpccback2, tpccback3, tpccback4 WITH stats = 1

SELECT @enddate = GETDATE()
SELECT 'End date:', CONVERT(VARCHAR(30),@enddate, 21)
SELECT 'Elapsed time (in seconds): ', DATEDIFF(second, @startdate, @enddate)
GO

```

sqlshutdown.sql

```
-- File: SQLSHUTDOWN.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Checkpoints tpcc database and issues a shutdown
--

USE tpcc
GO

CHECKPOINT
GO

SHUTDOWN
GO
```

idxcuscl.sql

```
-- File: IDXCUSCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on customer table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_c1' )
    DROP INDEX customer.customer_c1

CREATE UNIQUE CLUSTERED INDEX customer_c1 ON customer(c_w_id, c_d_id, c_id)
    ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxcusnc.sql

```
-- File: IDXCUSNC.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
--
```

```
-- Copyright Microsoft, 2006
-- Creates non-clustered index on customer table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'customer_ncl' )
    DROP INDEX customer.customer_ncl

CREATE UNIQUE NONCLUSTERED INDEX customer_ncl ON customer(c_w_id, c_d_id, c_last,
c_first, c_id)
    ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxdiscl.sql

```
-- File:>IDXDISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates clustered index on district table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'district_c1' )
    DROP INDEX district.district_c1

CREATE UNIQUE CLUSTERED INDEX district_c1 ON district(d_w_id, d_id)
    WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxitmcl.sql

```
-- File: IDXTMCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on item table
-- 

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'item_c1' )
    DROP INDEX item.item_c1

CREATE UNIQUE CLUSTERED INDEX item_c1 ON item(i_id)
ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxhiscl.sql

```
-- File: IDXHISCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on history table
-- 
-- CAUTION: This index is only beneficial for systems
-- CAUTION: with 8 or more processors.
-- CAUTION: It may negatively impact performance on
-- CAUTION: systems with less than 8 processors.
-- 

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)
```

```
IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'history_c1' )
    DROP INDEX history.history_c1

CREATE UNIQUE CLUSTERED INDEX history_c1 ON history(h_c_w_id, h_date, h_c_d_id,
h_c_id, h_amount)
ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxnodcl.sql

```
-- File: IDXNODCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on new-order table
-- 

-----  

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:',
       CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'new_order_c1' )
    DROP INDEX new_order.new_order_c1

CREATE UNIQUE CLUSTERED INDEX new_order_c1 ON new_order(no_w_id, no_d_id, no_o_id)
ON MSSQL_msc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:',
       CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ',
       DATEDIFF(second, @startdate, @enddate)
GO
```

idxodcl.sql

```
-- File: IDXODLCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on order-line table
-- 

-----  

USE tpcc
```

```

GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'order_line_c1' )
    DROP INDEX order_line.order_line_c1

CREATE UNIQUE CLUSTERED INDEX order_line_c1 ON order_line(o_l_w_id, o_l_d_id, o_l_o_id,
o_l_number)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
        CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

idxordcl.sql

```

-- File: IDXORDCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on orders table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'orders_c1' )
    DROP INDEX orders.orders_c1

CREATE UNIQUE CLUSTERED INDEX orders_c1 ON orders(o_w_id, o_d_id, o_id)
    ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
        CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

idxstkcl.sql

```

-- File: IDXSTKCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on stock table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'stock_c1' )
    DROP INDEX stock.stock_c1

CREATE UNIQUE CLUSTERED INDEX stock_c1 ON stock(s_i_id, s_w_id)
    ON MSSQL_cs_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
        CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

idxwarcl.sql

```

-- File: IDXWARCL.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates clustered index on warehouse table
--

USE tpcc
GO

DECLARE @startdate DATETIME,
        @enddate DATETIME

SELECT @startdate = GETDATE()
SELECT 'Start date:', 
        CONVERT(VARCHAR(30),@startdate,21)

IF EXISTS ( SELECT name FROM sysindexes WHERE name = 'warehouse_c1' )
    DROP INDEX warehouse.warehouse_c1

CREATE UNIQUE CLUSTERED INDEX warehouse_c1 ON warehouse(w_id)
    WITH FILLFACTOR=100 ON MSSQL_misc_fg

SELECT @enddate = GETDATE()
SELECT 'End date:', 
        CONVERT(VARCHAR(30),@enddate,21)
SELECT 'Elapsed time (in seconds): ', 
        DATEDIFF(second, @startdate, @enddate)
GO

```

```
GO
```

tables.sql

```
-- File: TABLES.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates TPC-C tables

SET ANSI_NULL_DFLT_OFF ON
GO

USE tpcc
GO

----- Remove all existing TPC-C tables -----
if exists ( select name from sysobjects where name = 'warehouse' )
    drop table warehouse
go
if exists ( select name from sysobjects where name = 'district' )
    drop table district
go
if exists ( select name from sysobjects where name = 'customer' )
    drop table customer
go
if exists ( select name from sysobjects where name = 'history' )
    drop table history
go
if exists ( select name from sysobjects where name = 'new_order' )
    drop table new_order
go
if exists ( select name from sysobjects where name = 'orders' )
    drop table orders
go
if exists ( select name from sysobjects where name = 'order_line' )
    drop table order_line
go
if exists ( select name from sysobjects where name = 'item' )
    drop table item
go
if exists ( select name from sysobjects where name = 'stock' )
    drop table stock
go

----- Create new tables -----
create table warehouse
(
    w_id          int,
    w_ytd         money,
    w_tax          smallmoney,
    w_name        char(10),
    w_street_1    char(20),
    w_street_2    char(20),
    w_city         char(20),
```

```
        w_state       char(2),
        w_zip         char(9)
) on MSSQL_misc_fg
go

create table district
(
    d_id          tinyint,
    d_w_id         int,
    d_ytd         money,
    d_next_o_id    int,
    d_tax          smallmoney,
    d_name        char(10),
    d_street_1    char(20),
    d_street_2    char(20),
    d_city         char(20),
    d_state       char(2),
    d_zip         char(9)
) on MSSQL_misc_fg
go

create table customer
(
    c_id          int,
    c_d_id         tinyint,
    c_w_id         int,
    c_discount    smallmoney,
    c_credit_lim   money,
    c_last        char(16),
    c_first        char(16),
    c_credit       char(2),
    c_balance      money,
    c_ytd_payment  money,
    c_payment_cnt  smallint,
    c_delivery_cnt smallint,
    c_street_1    char(20),
    c_street_2    char(20),
    c_city         char(20),
    c_state       char(2),
    c_zip         char(9),
    c_phone        char(16),
    c_since        datetime,
    c_middle       char(2),
    c_data         char(500)
) on MSSQL_cs_fg
go

-- Use the following table option if using c_data varchar(max)
-- sp_tableoption 'customer','large value types out of row','1'
-- go

create table history
(
    h_c_id         int,
    h_c_d_id       tinyint,
    h_c_w_id       int,
    h_d_id         tinyint,
    h_w_id         int,
    h_date        datetime,
    h_amount      smallmoney,
    h_data         char(24)
) on MSSQL_misc_fg
go
```

```

create table new_order
(
    no_o_id          int,
    no_d_id          tinyint,
    no_w_id          int
) on MSSQL_misc_fg
go

create table orders
(
    o_id             int,
    o_d_id           tinyint,
    o_w_id           int,
    o_c_id           int,
    o_carrier_id    tinyint,
    o.ol_cnt         tinyint,
    o.all_local     tinyint,
    o_entry_d       datetime
) on MSSQL_misc_fg
go

create table order_line
(
    ol_o_id          int,
    ol_d_id          tinyint,
    ol_w_id          int,
    ol_number        tinyint,
    ol_i_id          int,
    ol_delivery_d   datetime,
    ol_amount        smallmoney,
    ol_supply_w_id  int,
    ol_quantity      smallint,
    ol_dist_info     char(24)
) on MSSQL_misc_fg
go

create table item
(
    i_id             int,
    i_name           char(24),
    i_price          smallmoney,
    i_data           char(50),
    i_im_id          int
) on MSSQL_misc_fg
go

create table stock
(
    s_i_id           int,
    s_w_id           int,
    s_quantity       smallint,
    s_ytd            int,
    s_order_cnt     smallint,
    s_remote_cnt    smallint,
    s_data           char(50),
    s_dist_01        char(24),
    s_dist_02        char(24),
    s_dist_03        char(24),
    s_dist_04        char(24),
    s_dist_05        char(24),
    s_dist_06        char(24),
    s_dist_07        char(24),

```

```

    s_dist_08        char(24),
    s_dist_09        char(24),
    s_dist_10        char(24)
) on MSSQL_cs_fg
go

```

neword.sql

```

-- File: NEWORD.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates neworder stored procedure
-- Interface Level: 4.20.000
-- -----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO

CREATE PROCEDURE tpcc_neworder
    @w_id              int,
    @d_id              tinyint,
    @c_id              int,
    @o.ol_cnt          tinyint,
    @o.all_local       tinyint,
    @i_id1             int = 0, @s_w_id1 int = 0, @ol_qty1 smallint = 0,
    @i_id2             int = 0, @s_w_id2 int = 0, @ol_qty2 smallint = 0,
    @i_id3             int = 0, @s_w_id3 int = 0, @ol_qty3 smallint = 0,
    @i_id4             int = 0, @s_w_id4 int = 0, @ol_qty4 smallint = 0,
    @i_id5             int = 0, @s_w_id5 int = 0, @ol_qty5 smallint = 0,
    @i_id6             int = 0, @s_w_id6 int = 0, @ol_qty6 smallint = 0,
    @i_id7             int = 0, @s_w_id7 int = 0, @ol_qty7 smallint = 0,
    @i_id8             int = 0, @s_w_id8 int = 0, @ol_qty8 smallint = 0,
    @i_id9             int = 0, @s_w_id9 int = 0, @ol_qty9 smallint = 0,
    @i_id10            int = 0, @s_w_id10 int = 0, @ol_qty10 smallint = 0,
    @i_id11            int = 0, @s_w_id11 int = 0, @ol_qty11 smallint = 0,
    @i_id12            int = 0, @s_w_id12 int = 0, @ol_qty12 smallint = 0,
    @i_id13            int = 0, @s_w_id13 int = 0, @ol_qty13 smallint = 0,
    @i_id14            int = 0, @s_w_id14 int = 0, @ol_qty14 smallint = 0,
    @i_id15            int = 0, @s_w_id15 int = 0, @ol_qty15 smallint = 0
AS
DECLARE @w_tax          smallmoney,
        @d_tax          smallmoney,
        @c_last         char(16),
        @c_credit       char(2),
        @c_discount     smallmoney,
        @i_price         smallmoney,
```

```

@i_name      char(24),
@i_data      char(50),
@o_entry_d   datetime,
@remote_flag int,
@s_quantity   smallint,
@s_data       char(50),
@s_dist       char(24),
@li_no        int,
@o_id         int,
@commit_flag tinyint,
@li_id        int,
@li_s_w_id    int,
@li_qty      smallint,
@ol_number    int,
@c_id_local  int

BEGIN
BEGIN TRANSACTION n
-----  

-- get district tax and next available order id and update  

-- plus initialize local variables
-----  

UPDATE district
SET    @d_tax      = d_tax,
      @o_id       = d_next_o_id,
      d_next_o_id = d_next_o_id + 1,
      @o_entry_d  = GETDATE(),
      @li_no      = 0,
      @commit_flag = 1
WHERE  d_w_id      = @w_id AND
      d_id       = @d_id
-----  

-- process orderlines
-----  

WHILE (@li_no < @o.ol_cnt)
BEGIN
  SELECT @li_no = @li_no + 1
-----  

-- set i_id, s_w_id, and qty for this lineitem
-----  

  SELECT @li_id = CASE @li_no
    WHEN 1 THEN @i_id1
    WHEN 2 THEN @i_id2
    WHEN 3 THEN @i_id3
    WHEN 4 THEN @i_id4
    WHEN 5 THEN @i_id5
    WHEN 6 THEN @i_id6
    WHEN 7 THEN @i_id7
    WHEN 8 THEN @i_id8
    WHEN 9 THEN @i_id9
    WHEN 10 THEN @i_id10
    WHEN 11 THEN @i_id11
    WHEN 12 THEN @i_id12
    WHEN 13 THEN @i_id13
    WHEN 14 THEN @i_id14
    WHEN 15 THEN @i_id15
  END,  

  @li_s_w_id = CASE @li_no

```

```

    WHEN 1 THEN @s_w_id1
    WHEN 2 THEN @s_w_id2
    WHEN 3 THEN @s_w_id3
    WHEN 4 THEN @s_w_id4
    WHEN 5 THEN @s_w_id5
    WHEN 6 THEN @s_w_id6
    WHEN 7 THEN @s_w_id7
    WHEN 8 THEN @s_w_id8
    WHEN 9 THEN @s_w_id9
    WHEN 10 THEN @s_w_id10
    WHEN 11 THEN @s_w_id11
    WHEN 12 THEN @s_w_id12
    WHEN 13 THEN @s_w_id13
    WHEN 14 THEN @s_w_id14
    WHEN 15 THEN @s_w_id15
  END,  

  @li_qty = CASE @li_no
    WHEN 1 THEN @ol_qty1
    WHEN 2 THEN @ol_qty2
    WHEN 3 THEN @ol_qty3
    WHEN 4 THEN @ol_qty4
    WHEN 5 THEN @ol_qty5
    WHEN 6 THEN @ol_qty6
    WHEN 7 THEN @ol_qty7
    WHEN 8 THEN @ol_qty8
    WHEN 9 THEN @ol_qty9
    WHEN 10 THEN @ol_qty10
    WHEN 11 THEN @ol_qty11
    WHEN 12 THEN @ol_qty12
    WHEN 13 THEN @ol_qty13
    WHEN 14 THEN @ol_qty14
    WHEN 15 THEN @ol_qty15
  END
-----  

-- get item data (no one updates item)
-----  

SELECT @i_price   = i_price,
       @i_name    = i_name,
       @i_data    = i_data
FROM   item WITH (repeatableread)
WHERE  i_id       = @li_id
-----  

-- update stock values
-----  

UPDATE stock
SET    s_ytd      = s_ytd + @li_qty,
      @s_quantity = s_quantity - @li_qty +
                    CASE WHEN (s_quantity - @li_qty < 10) THEN 91
ELSE 0 END,
      s_order_cnt = s_order_cnt + 1,
      s_remote_cnt = s_remote_cnt +
                    CASE WHEN (@li_s_w_id = @w_id) THEN 0 ELSE 1
END,
      @s_data     = s_data,
      @s_dist     = CASE @d_id
        WHEN 1 THEN s_dist_01
        WHEN 2 THEN s_dist_02
        WHEN 3 THEN s_dist_03
        WHEN 4 THEN s_dist_04
        WHEN 5 THEN s_dist_05
      END

```

```

        WHEN 6 THEN s_dist_06
        WHEN 7 THEN s_dist_07
        WHEN 8 THEN s_dist_08
        WHEN 9 THEN s_dist_09
        WHEN 10 THEN s_dist_10
    END
WHERE   s_i_id      = @li_id AND
       s_w_id      = @li_s_w_id

----- if there actually is a stock (and item) with these ids, go to work
----- IF (@@rowcount > 0)
----- BEGIN
----- insert order_line data (using data from item and stock)
----- INSERT INTO order_line VALUES(  @o_id,
                                     @d_id,
                                     @w_id,
                                     @li_no,
                                     @li_id,
                                     'dec 31, 1899',
                                     @i_price * @li_qty,
                                     @li_s_w_id,
                                     @li_qty,
                                     @s_dist)

----- send line-item data to client
----- SELECT  @i_name,
             @s_quantity,
             b_g = CASE WHEN (  (patindex('%ORIGINAL%',@i_data) > 0) AND
             (patindex('%ORIGINAL%',@s_data) > 0) )
                         THEN 'B' ELSE 'G' END,
             @i_price,
             @i_price * @li_qty
         END
         ELSE
         BEGIN
----- no item (or stock) found - triggers rollback condition
----- SELECT  '',0,'',0,0
----- SELECT @commit_flag = 0
----- END
----- get customer last name, discount, and credit rating
----- SELECT  @c_last  = c_last,
             @c_discount = c_discount,
             @c_credit   = c_credit,
             @c_id_local = c_id
         FROM    customer WITH (repeatableread)
         WHERE   c_id      = @c_id AND
                 c_w_id    = @w_id AND
                 c_d_id    = @d_id
----- insert fresh row into orders table

```

```

----- INSERT INTO orders VALUES ( @o_id,
                                 @d_id,
                                 @w_id,
                                 @c_id_local,
                                 0,
                                 @o.ol_cnt,
                                 @o.all_local,
                                 @o_entry_d)

----- insert corresponding row into new_order table
----- INSERT INTO new_order VALUES ( @o_id,
                                    @d_id,
                                    @w_id)

----- select warehouse tax
----- SELECT  @w_tax = w_tax
FROM    warehouse WITH (repeatableread)
WHERE   w_id    = @w_id

IF (@commit_flag = 1)
    COMMIT TRANSACTION n
ELSE
----- all that work for nuthin!!!
----- ROLLBACK TRANSACTION n

----- return order data to client
----- SELECT  @w_tax,
             @d_tax,
             @o_id,
             @c_last,
             @c_discount,
             @c_credit,
             @o_entry_d,
             @commit_flag
END
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

tpcc_neworder_new.sql

```

-- File: TPCC_NEWORDER_NEW.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This acid stored procedure implements the neworder
-- transaction. It outputs timestamps at the
-- 
```

```

-- beginning of the transaction, before the commit
-- delay, and after the commit.
--

-----  

SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS OFF
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder_new' )
    DROP PROCEDURE tpcc_neworder_new
GO

-- neworder_new v2.5 6/23/05 PeterCa
-- 1q stock/order_line/client. upd district & ins neworder.
-- cust/warehouse select together, ins order separate
-- uses rownumber to distinct w any transform
-- uses in-memory sort for distinct on iid,wid
-- uses charindex
-- will rollback if (@i_idx,@s_w_idx pairs not unique) OR (@i_idx not unique).

CREATE PROCEDURE tpcc_neworder_new
    @w_id          int,
    @d_id          tinyint,
    @c_id          int,
    @o.ol_cnt      tinyint,
    @o.all_local   tinyint,
    @i.id1 int = 0, @s.w.id1 int = 0, @o1_qty1 smallint = 0,
    @i.id2 int = 0, @s.w.id2 int = 0, @o1_qty2 smallint = 0,
    @i.id3 int = 0, @s.w.id3 int = 0, @o1_qty3 smallint = 0,
    @i.id4 int = 0, @s.w.id4 int = 0, @o1_qty4 smallint = 0,
    @i.id5 int = 0, @s.w.id5 int = 0, @o1_qty5 smallint = 0,
    @i.id6 int = 0, @s.w.id6 int = 0, @o1_qty6 smallint = 0,
    @i.id7 int = 0, @s.w.id7 int = 0, @o1_qty7 smallint = 0,
    @i.id8 int = 0, @s.w.id8 int = 0, @o1_qty8 smallint = 0,
    @i.id9 int = 0, @s.w.id9 int = 0, @o1_qty9 smallint = 0,
    @i.id10 int = 0, @s.w.id10 int = 0, @o1_qty10 smallint = 0,
    @i.id11 int = 0, @s.w.id11 int = 0, @o1_qty11 smallint = 0,
    @i.id12 int = 0, @s.w.id12 int = 0, @o1_qty12 smallint = 0,
    @i.id13 int = 0, @s.w.id13 int = 0, @o1_qty13 smallint = 0,
    @i.id14 int = 0, @s.w.id14 int = 0, @o1_qty14 smallint = 0,
    @i.id15 int = 0, @s.w.id15 int = 0, @o1_qty15 smallint = 0

AS
BEGIN
DECLARE @o_id          int,
        @d_tax         smallmoney,
        @o_entry_d     datetime,
        @commit_flag   tinyint

BEGIN TRANSACTION n
    -- get district tax and next available order id and update
    -- insert corresponding row into new-order table
    -- plus initialize local variables

    UPDATE district
    SET    @d_tax           = d_tax,
           @o_id            = o_next_o_id,
           d.next_o_id     = d.next_o_id + 1,

```

```

@o_entry_d      = GETDATE(),
@commit_flag    = 1
OUTPUT deleted.d_next_o_id,
@d_id,
@w_id
INTO new_order
WHERE d_w_id        = @w_id AND
      d_id          = @d_id

-- update stock from stock join (item join (params))
-- output to orderline, output to client
-- NOTE: @@rowcount != @ol_o_cnt
--      if (@i_idx,@s_w_idx pairs not unique) OR (@i_idx not unique).

UPDATE stock
SET   s_ytd           = s_ytd + info.ol_qty,
      s_quantity       = s_quantity - info.ol_qty +
                           CASE WHEN (s_quantity - info.ol_qty < 10) THEN 91 ELSE
0 END,
      s_order_cnt     = s_order_cnt + 1,
      s_remote_cnt    = s_remote_cnt +
                           CASE WHEN (info.w_id = @w_id) THEN 0
ELSE 1 END

OUTPUT @o_id,
      @d_id,
      @w_id,
      info.lino,
      info.i_id,
      "dec 31, 1899",
      info.i_price * info.ol_qty,
      info.w_id,
      info.ol_qty,
CASE    @d_id WHEN 1 THEN inserted.s_dist_01
                  WHEN 2 THEN inserted.s_dist_02
                  WHEN 3 THEN inserted.s_dist_03
                  WHEN 4 THEN inserted.s_dist_04
                  WHEN 5 THEN inserted.s_dist_05
                  WHEN 6 THEN inserted.s_dist_06
                  WHEN 7 THEN inserted.s_dist_07
                  WHEN 8 THEN inserted.s_dist_08
                  WHEN 9 THEN inserted.s_dist_09
                  WHEN 10 THEN inserted.s_dist_10
END
INTO  order_line

OUTPUT info.i_name,inserted.s_quantity,
CASE WHEN ((charindex("ORIGINAL",info.i_data) > 0) AND
           (charindex("ORIGINAL",inserted.s_data) > 0) )
      THEN "" ELSE "G" END,
      info.i_price,
      info.i_price*info.ol_qty
FROM   stock INNER JOIN
      (SELECT iid,
             wid,
             lino,
             ol_qty,
             i_price,
             i_name,
             i_data
      FROM   (SELECT iid,
                    wid,
                    lino,

```

```

        qty,
        row_number() OVER (PARTITION BY iid,wid
ORDER BY iid,wid)
        FROM (SELECT @i_id1,@s_w_id1,1,@ol_qty1      UNION ALL
               SELECT @i_id2,@s_w_id2,2,@ol_qty2      UNION ALL
               SELECT @i_id3,@s_w_id3,3,@ol_qty3      UNION ALL
               SELECT @i_id4,@s_w_id4,4,@ol_qty4      UNION ALL
               SELECT @i_id5,@s_w_id5,5,@ol_qty5      UNION ALL
               SELECT @i_id6,@s_w_id6,6,@ol_qty6      UNION ALL
               SELECT @i_id7,@s_w_id7,7,@ol_qty7      UNION ALL
               SELECT @i_id8,@s_w_id8,8,@ol_qty8      UNION ALL
               SELECT @i_id9,@s_w_id9,9,@ol_qty9      UNION ALL
               SELECT @i_id10,@s_w_id10,10,@ol_qty10    UNION ALL
               SELECT @i_id11,@s_w_id11,11,@ol_qty11    UNION ALL
               SELECT @i_id12,@s_w_id12,12,@ol_qty12    UNION ALL
               SELECT @i_id13,@s_w_id13,13,@ol_qty13    UNION ALL
               SELECT @i_id14,@s_w_id14,14,@ol_qty14    UNION ALL
               SELECT @i_id15,@s_w_id15,15,@ol_qty15    UNION ALL
               ) AS ol(iid,wid,lino,ol_qty,rownum)
        INNER JOIN
        item (repeatableread) ON i_id     = iid AND -- filters
out invalid items
        rounum = 1
        ) AS info(i_id,w_id,lino,ol_qty,i_price,i_name,i_data)
ON s_i_id = info.i_id AND
s_w_id = info.w_id

IF (@@rowcount <> @o.ol_cnt) -- must have an invalid item
SELECT @commit_flag = 0 -- 2.4.2.3 requires rest to proceed

-- insert fresh row into orders table
INSERT INTO orders VALUES  ( @o_id,
                            @d_id,
                            @w_id,
                            @c_id,
                            0,
                            @o.ol_cnt,
                            @o.all_local,
                            @o_entry_d)

-- get customer last name, discount, and credit rating
-- get warehouse tax
-- return order_data to client
SELECT w_tax,
       @d_tax,
       @o_id,
       @d_id,
       c_last,
       c_discount,
       c_credit,
       @o_entry_d,
       @commit_flag
FROM warehouse(repeatableread),
customer(repeatableread)
WHERE w_id      = @w_id AND
c_id       = @c_id AND
c_w_id     = @w_id AND
c_d_id     = @d_id

-- @@rowcount checks that previous select found a valid customer
IF (@@rowcount = 0)
BEGIN
    RAISERROR( 'Invalid Customer ID', 11, 1 )

```

```

        ROLLBACK TRANSACTION n
END
    ELSE IF (@commit_flag = 1)
        COMMIT TRANSACTION n
    ELSE -- all that work for nothing.
        ROLLBACK TRANSACTION n
END
GO

```

delivery.sql

```

-- File: DELIVERY.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates delivery stored procedure
-- Interface Level: 4.20.000
-- -----
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO

CREATE PROC tpcc_delivery
    @w_id           int,
    @o_carrier_id   smallint
AS
DECLARE @d_id      tinyint,
        @o_id      int,
        @c_id      int,
        @total     money,
        @oid1     int,
        @oid2     int,
        @oid3     int,
        @oid4     int,
        @oid5     int,
        @oid6     int,
        @oid7     int,
        @oid8     int,
        @oid9     int,
        @oid10    int
SELECT @d_id = 0
BEGIN TRANSACTION d
WHILE (@d_id < 10)

```

```

BEGIN
    SELECT @d_id = @d_id + 1,
           @total = 0,
           @o_id = 0

    SELECT TOP 1
           @o_id = no_o_id
    FROM new_order WITH (serializable updlock)
    WHERE no_w_id = @w_id AND
          no_d_id = @d_id
    ORDER BY no_o_id ASC

    IF (@@rowcount <> 0)
    BEGIN
        -- claim the order for this district
        DELETE new_order
        WHERE no_w_id = @w_id AND
              no_d_id = @d_id AND
              no_o_id = @o_id

        -- set carrier_id on this order (and get customer id)
        UPDATE orders
        SET o_carrier_id = @o_carrier_id,
            @c_id = o_c_id
        WHERE o_w_id = @w_id AND
              o_d_id = @d_id AND
              o_id = @o_id

        -- set date in all lineitems for this order (and sum amounts)
        UPDATE order_line
        SET ol_delivery_d = GETDATE(),
            @total = @total + ol_amount
        WHERE ol_w_id = @w_id AND
              ol_d_id = @d_id AND
              ol_o_id = @o_id

        -- accumulate lineitem amounts for this order into customer
        UPDATE customer
        SET c_balance = c_balance + @total,
            c_delivery_cnt = c_delivery_cnt + 1
        WHERE c_w_id = @w_id AND
              c_d_id = @d_id AND
              c_id = @c_id
    END

    SELECT @oid1 = CASE @d_id WHEN 1 THEN @o_id ELSE @oid1 END,
           @oid2 = CASE @d_id WHEN 2 THEN @o_id ELSE @oid2 END,
           @oid3 = CASE @d_id WHEN 3 THEN @o_id ELSE @oid3 END,
           @oid4 = CASE @d_id WHEN 4 THEN @o_id ELSE @oid4 END,
           @oid5 = CASE @d_id WHEN 5 THEN @o_id ELSE @oid5 END,
           @oid6 = CASE @d_id WHEN 6 THEN @o_id ELSE @oid6 END,
           @oid7 = CASE @d_id WHEN 7 THEN @o_id ELSE @oid7 END,
           @oid8 = CASE @d_id WHEN 8 THEN @o_id ELSE @oid8 END,
           @oid9 = CASE @d_id WHEN 9 THEN @o_id ELSE @oid9 END,
           @oid10 = CASE @d_id WHEN 10 THEN @o_id ELSE @oid10 END

    COMMIT TRANSACTION d

    -- return delivery data to client
    SELECT @oid1,
           @oid2,

```

```

           @oid3,
           @oid4,
           @oid5,
           @oid6,
           @oid7,
           @oid8,
           @oid9,
           @oid10
GO
SET QUOTED_IDENTIFIER OFF
GO
SET ANSI_NULLS ON
GO

```

null-txns.sql

```

-----
-- File: NULL-TXNS.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- This script will create stored procs which
-- accept the same parameters and return correctly
-- formed results sets to match the standard TPC-C
-- stored procs. Of course, the advantage is that
-- these stored procs place almost no load on
-- SQL Server and do not require a database.
--
-- Interface Level: 4.10.000
--

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_delivery' )
    DROP PROCEDURE tpcc_delivery
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_neworder' )
    DROP PROCEDURE tpcc_neworder
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
    DROP PROCEDURE tpcc_payment
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_version' )
    DROP PROCEDURE tpcc_version
GO
IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'order_line_null' )
    DROP PROCEDURE order_line_null
GO

CREATE PROCEDURE tpcc_delivery
    @w_id int,

```

```

        @o_carrier_id    smallint
AS
DECLARE @d_id      tinyint,
        @o_id       int,
        @_id        int,
        @total      numeric(12,2),
        @oid1      int,
        @oid2      int,
        @oid3      int,
        @oid4      int,
        @oid5      int,
        @oid6      int,
        @oid7      int,
        @oid8      int,
        @oid9      int,
        @oid10     int,
        @delaytime  varchar(30)

-----
-- uniform random delay of 0 - 1 second; avg = 0.50
-----
SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*1.00) AS decimal(4,3)) AS
char(5))

WAITFOR delay @delaytime

SELECT 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001, 3001
GO

CREATE PROCEDURE tpcc_neworder
        @_w_id      int,
        @d_id       tinyint,
        @_c_id      int,
        @o.ol_cnt   tinyint,
        @o.all_local tinyint,
        @_i_id1     int = 0, @_s_w_id1 int = 0, @_ol_qty1 smallint = 0,
        @_i_id2     int = 0, @_s_w_id2 int = 0, @_ol_qty2 smallint = 0,
        @_i_id3     int = 0, @_s_w_id3 int = 0, @_ol_qty3 smallint = 0,
        @_i_id4     int = 0, @_s_w_id4 int = 0, @_ol_qty4 smallint = 0,
        @_i_id5     int = 0, @_s_w_id5 int = 0, @_ol_qty5 smallint = 0,
        @_i_id6     int = 0, @_s_w_id6 int = 0, @_ol_qty6 smallint = 0,
        @_i_id7     int = 0, @_s_w_id7 int = 0, @_ol_qty7 smallint = 0,
        @_i_id8     int = 0, @_s_w_id8 int = 0, @_ol_qty8 smallint = 0,
        @_i_id9     int = 0, @_s_w_id9 int = 0, @_ol_qty9 smallint = 0,
        @_i_id10    int = 0, @_s_w_id10 int = 0, @_ol_qty10 smallint = 0,
        @_i_id11    int = 0, @_s_w_id11 int = 0, @_ol_qty11 smallint = 0,
        @_i_id12    int = 0, @_s_w_id12 int = 0, @_ol_qty12 smallint = 0,
        @_i_id13    int = 0, @_s_w_id13 int = 0, @_ol_qty13 smallint = 0,
        @_i_id14    int = 0, @_s_w_id14 int = 0, @_ol_qty14 smallint = 0,
        @_i_id15    int = 0, @_s_w_id15 int = 0, @_ol_qty15 smallint = 0

AS
DECLARE @_w_tax    numeric(4,4),
        @_d_tax    numeric(4,4),
        @_c_last   char(16),
        @_c_credit  char(2),
        @_c_discount numeric(4,4),
        @_i_price   numeric(5,2),
        @_i_name    char(24),
        @_o_entry_d datetime,
        @_li_no     int,

```

```

        @_o_id      int,
        @_commit_flag tinyint,
        @_li_id     int,
        @_li_qty    smallint,
        @_delaytime varchar(30)

BEGIN
-----
-- uniform random delay of 0 - 0.6 second; avg = 0.3
-----
SELECT @_delaytime = '00:00:0' + CAST(CAST((RAND()*0.60) AS decimal(4,3)) AS
char(5))

WAITFOR delay @_delaytime

-----
-- process orderlines
-----
SELECT @_commit_flag = 1,
        @_li_no     = 0

WHILE (@li_no < @_o.ol_cnt)
BEGIN
        SELECT @_li_id = CASE @_li_no
                WHEN 1 THEN @_i_id1
                WHEN 2 THEN @_i_id2
                WHEN 3 THEN @_i_id3
                WHEN 4 THEN @_i_id4
                WHEN 5 THEN @_i_id5
                WHEN 6 THEN @_i_id6
                WHEN 7 THEN @_i_id7
                WHEN 8 THEN @_i_id8
                WHEN 9 THEN @_i_id9
                WHEN 10 THEN @_i_id10
                WHEN 11 THEN @_i_id11
                WHEN 12 THEN @_i_id12
                WHEN 13 THEN @_i_id13
                WHEN 14 THEN @_i_id14
                WHEN 15 THEN @_i_id15
        END

        SELECT @_li_no = @_li_no + 1

        SELECT @_i_price = 23.45, @_li_qty = @_li_no

        IF (@_li_id = 999999)
        BEGIN
                SELECT ',0,,0,0'
                SELECT @_commit_flag = 0
        END
        ELSE
        BEGIN
                SELECT 'Item Name blah',
                        17,
                        'G',
                        @_i_price,
                        @_i_price * @_li_qty
        END
        END
-----
-- return order data to client

```

```

-----  

SELECT @w_tax      = 0.1234,  

       @d_tax      = 0.0987,  

       @c_id       = 3001,  

       @c_last     = 'BAROUGHTABLE',  

       @c_discount = 0.2198,  

       @c_credit   = 'GC',  

       @o_entry_d  = GETDATE()  

SELECT @w_tax,  

       @d_tax,  

       @c_id,  

       @c_last,  

       @c_discount,  

       @c_credit,  

       @o_entry_d,  

       @commit_flag  

END  

GO  

CREATE PROCEDURE tpcc_orderstatus  

    @w_id      int,  

    @d_id      tinyint,  

    @c_id      int,  

    @c_last    char(16) = ''  

AS  

DECLARE @c_balance numeric(12,2),  

        @c_first   char(16),  

        @c_middle  char(2),  

        @o_id      int,  

        @o_entry_d datetime,  

        @o_carrier_id smallint,  

        @ol_cnt    smallint,  

        @delaytime varchar(30)  

-----  

-- uniform random delay of 0 - 0.2 second; avg = 0.1  

-----  

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS  

char(5))  

WAITFOR delay @delaytime  

SELECT @c_id      = 113,  

       @c_balance = -10.00,  

       @c_first   = '8YCodgytqCj8',  

       @c_middle  = 'OE',  

       @c_last    = 'OUGHTOUGHTABLE',  

       @o_id      = 3456,  

       @o_entry_d = GETDATE(),  

       @o_carrier_id = 1  

SELECT @ol_cnt = (RAND() * 11) + 5  

SET ROWCOUNT @ol_cnt  

SELECT ol_supply_w_id,  

       ol_i_id,  

       ol_quantity,  

       ol_amount,

```

```

       ol_delivery_d  

       FROM order_line_null  

SELECT @c_id,  

       @c_last,  

       @c_first,  

       @c_middle,  

       @o_entry_d,  

       @o_carrier_id,  

       @c_balance,  

       @c_id  

GO  

CREATE PROCEDURE tpcc_payment  

    @w_id      int,  

    @c_w_id    int,  

    @h_amount  numeric(6,2),  

    @d_id      tinyint,  

    @c_d_id    tinyint,  

    @c_id      int,  

    @c_last    char(16) = ''  

AS  

DECLARE @w_street_1    char(20),  

        @w_street_2    char(20),  

        @w_city        char(20),  

        @w_state       char(2),  

        @w_zip         char(9),  

        @w_name        char(10),  

        @d_street_1    char(20),  

        @d_street_2    char(20),  

        @d_city        char(20),  

        @d_state       char(2),  

        @d_zip         char(9),  

        @d_name        char(10),  

        @c_first       char(16),  

        @c_middle      char(2),  

        @c_street_1    char(20),  

        @c_street_2    char(20),  

        @c_city        char(20),  

        @c_state       char(2),  

        @c_zip         char(9),  

        @c_phone       char(16),  

        @c_since       datetime,  

        @c_credit      char(2),  

        @c_credit_lim  numeric(12,2),  

        @c_balance     numeric(12,2),  

        @c_discount    numeric(4,4),  

        @data          char(500),  

        @c_data        char(500),  

        @datetime      datetime,  

        @w_ytd         numeric(12,2),  

        @d_ytd         numeric(12,2),  

        @cnt           smallint,  

        @val           smallint,  

        @screen_data   char(200),  

        @d_id_local   tinyint,  

        @w_id_local   int,  

        @c_id_local   int,  

        @delaytime    varchar(30)  

-----  

-- uniform random delay of 0 - 0.3 second; avg = 0.15

```

```

-----  

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS  
char(5))

WAITFOR delay @delaytime

SELECT @screen_data = ''  

-----  

-- get customer info and update balances  

-----  

SELECT @d_street_1 = 'rqSHHakqyV',  

@d_street_2 = 'zz98nW3BR2s',  

@d_city = 'ArNr4GNFV9',  

@d_state = 'aV',  

@d_zip = '453511111'  

-----  

-- get warehouse data and update year-to-date  

-----  

SELECT @w_street_1 = 'rqSHHakqyV',  

@w_street_2 = 'zz98nW3BR2s',  

@w_city = 'ArNr4GNFV9',  

@w_state = 'aV',  

@w_zip = '453511111'  

-----  

SELECT @c_id = 123,  

@c_balance = -10000.00,  

@c_first = 'KmR03Xureb',  

@c_middle = 'OE',  

@c_last = 'BAROUGHTBAR',  

@c_street_1 = 'OpGdOhjv8mR9vNI8V',  

@c_street_2 = 'dzKoCObBqbC3yu',  

@c_city = 'ZAKZXdc037FQxq',  

@c_state = 'QA',  

@c_zip = '700311111',  

@c_phone = '2967264064528555',  

@c_credit = 'GC',  

@c_credit_lim = 50000.00,  

@c_discount = 0.3069,  

@c_since = GETDATE(),  

@datetime = GETDATE()  

-----  

-- return data to client  

-----  

SELECT @c_id,  

@c_last,  

@datetime,  

@w_street_1,  

@w_street_2,  

@w_city,  

@w_state,  

@w_zip,  

@d_street_1,  

@d_street_2,  

@d_city,  

@d_state,  

@d_zip,  

@c_first,  

@c_middle,  

@c_street_1,  

@c_street_2,

```

```

@c_city,  

@c_state,  

@c_zip,  

@c_phone,  

@c_since,  

@c_credit,  

@c_credit_lim,  

@c_discount,  

@c_balance,  

@screen_data  

GO  

-----  

CREATE PROCEDURE tpcc_stocklevel  

    @w_id int,  

    @d_id tinyint,  

    @threshhold smallint  

AS  

DECLARE @delaytime varchar(30)  

-----  

-- uniform random delay of 0 - 3.6 second; avg = 1.8  

-----  

SELECT @delaytime = '00:00:0' + CAST(CAST((RAND()*0.20) AS decimal(4,3)) AS  
char(5))

WAITFOR delay @delaytime

SELECT 49
GO  

-----  

CREATE PROCEDURE tpcc_version  

AS  

DECLARE @version char(8)  

BEGIN  

    SELECT @version = '4.10.000'  

    SELECT @version AS 'Version'  

END
GO  

-----  

CREATE TABLE order_line_null (  

    [ol_i_id] [int] NOT NULL ,  

    [ol_supply_w_id] [int] NOT NULL ,  

    [ol_delivery_d] [datetime] NOT NULL ,  

    [ol_quantity] [smallint] NOT NULL ,  

    [ol_amount] [numeric](6, 2) NOT NULL  

) ON [PRIMARY]
GO  

-----  

INSERT INTO order_line_null VALUES ( 101, 1, GETDATE(), 1, 123.45 )  

INSERT INTO order_line_null VALUES ( 102, 1, GETDATE(), 2, 123.45 )  

INSERT INTO order_line_null VALUES ( 103, 1, GETDATE(), 3, 123.45 )  

INSERT INTO order_line_null VALUES ( 104, 1, GETDATE(), 4, 123.45 )  

INSERT INTO order_line_null VALUES ( 105, 1, GETDATE(), 5, 123.45 )  

INSERT INTO order_line_null VALUES ( 106, 1, GETDATE(), 1, 123.45 )  

INSERT INTO order_line_null VALUES ( 107, 1, GETDATE(), 2, 123.45 )  

INSERT INTO order_line_null VALUES ( 108, 1, GETDATE(), 3, 123.45 )  

INSERT INTO order_line_null VALUES ( 109, 1, GETDATE(), 4, 123.45 )  

INSERT INTO order_line_null VALUES ( 110, 1, GETDATE(), 5, 123.45 )  

INSERT INTO order_line_null VALUES ( 111, 1, GETDATE(), 1, 123.45 )  

INSERT INTO order_line_null VALUES ( 112, 1, GETDATE(), 2, 123.45 )

```

```

INSERT INTO order_line_null VALUES ( 113, 1, GETDATE(), 3, 123.45 )
INSERT INTO order_line_null VALUES ( 114, 1, GETDATE(), 4, 123.45 )
INSERT INTO order_line_null VALUES ( 115, 1, GETDATE(), 5, 123.45 )
GO

```

ordstat.sql

```

-- File: ORDSTAT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
--
-- Creates order status stored procedure
-- Interface Level: 4.20.000
--
SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_orderstatus' )
    DROP PROCEDURE tpcc_orderstatus
GO

CREATE PROCEDURE tpcc_orderstatus
    @w_id      int,
    @d_id      tinyint,
    @c_id      int,
    @c_last    char(16) = ''

AS
DECLARE @c_balance   money,
        @c_first     char(16),
        @c_middle    char(2),
        @o_id        int,
        @o_entry_d   datetime,
        @o_carrier_id smallint,
        @cnt         smallint

BEGIN TRANSACTION o
    IF (@c_id = 0)
        BEGIN
            --
            -- get customer id and info using last name
            --
            SELECT @cnt = (count(*)+1)/2
            FROM   customer WITH (repeatableread)
            WHERE   c_last = @c_last AND
                    c_w_id = @w_id AND
                    c_d_id = @d_id

            SET rowcount @cnt
            SELECT @c_id      = c_id,

```

```

                @c_balance = c_balance,
                @c_first   = c_first,
                @c_last    = c_last,
                @c_middle  = c_middle
            FROM   customer WITH (repeatableread)
            WHERE   c_last = @c_last AND
                    c_w_id = @w_id AND
                    c_d_id = @d_id
            ORDER BY c_w_id, c_d_id, c_last, c_first

            SET rowcount 0
        END
    ELSE
        BEGIN
            --
            -- get customer info if by id
            --
            SELECT @c_balance = c_balance,
                    @c_first   = c_first,
                    @c_middle  = c_middle,
                    @c_last   = c_last
            FROM   customer WITH (repeatableread)
            WHERE   c_id = @c_id AND
                    c_d_id = @d_id AND
                    c_w_id = @w_id

            SELECT @cnt = @@rowcount
        END

        --
        -- if no such customer
        --
        IF (@cnt = 0)
            BEGIN
                RAISERROR('Customer not found',18,1)
                GOTO custnotfound
            END

            --
            -- get order info
            --
            SELECT @o_id      = o_id,
                    @o_entry_d = o_entry_d,
                    @o_carrier_id = o_carrier_id
            FROM   orders WITH (serializable)
            WHERE   o_c_id = @c_id AND
                    o_d_id = @d_id AND
                    o_w_id = @w_id
            ORDER BY o_id ASC

            --
            -- select order lines for the current order
            --
            SELECT ol_supply_w_id,
                    ol_i_id,
                    ol_quantity,
                    ol_amount,
                    ol_delivery_d
            FROM   order_line WITH (repeatableread)
            WHERE   ol_o_id = @o_id AND
                    ol_d_id = @d_id AND
                    ol_w_id = @w_id

```

```

custnotfound:
COMMIT TRANSACTION o

-----
-- return data to client
-----
SELECT @c_id,
       @c_last,
       @c_first,
       @c_middle,
       @o_entry_d,
       @o_carrier_id,
       @c_balance,
       @o_id
GO

```

payment.sql

```

-- File: PAYMENT.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates payment stored procedure
-- Interface Level: 4.20.000
-- 

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_payment' )
   DROP PROCEDURE tpcc_payment
GO

CREATE PROCEDURE tpcc_payment
   @w_id      int,
   @c_w_id    int,
   @h_amount  smallmoney,
   @d_id      tinyint,
   @c_d_id    tinyint,
   @c_id      int,
   @c_last    char(16) = ""

AS
DECLARE @w_street_1  char(20),
        @w_street_2  char(20),
        @w_city      char(20),
        @w_state     char(2),
        @w_zip       char(9),
        @w_name      char(10),
        @d_street_1  char(20),
        @d_street_2  char(20),
        @d_city      char(20),

```

```

@d_state      char(2),
@d_zip       char(9),
@d_name      char(10),
@c_first     char(16),
@c_middle    char(2),
@c_street_1  char(20),
@c_street_2  char(20),
@c_city      char(20),
@c_state     char(2),
@c_zip       char(9),
@c_phone     char(16),
@c_since     datetime,
@c_credit    char(2),
@c_credit_lim money,
@c_balance   money,
@c_discount  smallmoney,
@c_data      char(42),
@datetime   datetime,
@w_ytd      money,
@d_ytd      money,
@cnt        smallint,
@val        smallint,
@screen_data char(200),
@id_local   tinyint,
@w_id_local int,
@c_id_local int

SELECT @screen_data = ""

BEGIN TRANSACTION p
   -- get payment date
   SELECT @datetime = GETDATE()

   IF (@c_id = 0)
      BEGIN
         -- get customer id and info using last name
         SELECT @cnt = COUNT(*)
         FROM customer WITH (repeatableread)
         WHERE c_last = @c_last AND
               c_w_id = @c_w_id AND
               c_d_id = @c_d_id

         SELECT @val = (@cnt + 1) / 2

         SET rowcount @val

         SELECT @c_id = c_id
         FROM customer WITH (repeatableread)
         WHERE c_last = @c_last AND
               c_w_id = @c_w_id AND
               c_d_id = @c_d_id
         ORDER BY c_last, c_first

         SET rowcount 0
      END

   -- get customer info and update balances
   UPDATE customer
   SET    @c_balance = c_balance - @h_amount,
          c_payment_cnt = c_payment_cnt + 1,
          c_ytd_payment = c_ytd_payment + @h_amount,
          @c_first = c_first,

```

```

@c_middle      = c_middle,
@c_last        = c_last,
@c_street_1    = c_street_1,
@c_street_2    = c_street_2,
@c_city         = c_city,
@c_state        = c_state,
@c_zip          = c_zip,
@c_phone        = c_phone,
@c_credit       = c_credit,
@c_credit_lim   = c_credit_lim,
@c_discount     = c_discount,
@c_since        = c_since,
@c_id_local     = c_id
WHERE          c_id          = @c_id AND
              c_w_id        = @c_w_id AND
              c_d_id        = @c_d_id

-- if customer has bad credit get some more info
IF (@c_credit = "BC")
BEGIN
    -- compute new info
    SELECT @c_data = convert(char(5),@c_id) +
                    convert(char(4),@c_d_id) +
                    convert(char(5),@c_w_id) +
                    convert(char(4),@d_id) +
                    convert(char(5),@w_id) +
                    convert(char(19),@h_amount)

    -- update customer info
    UPDATE customer
    SET   c_data      = @c_data + substring(c_data, 1, 458),
          @screen_data = @c_data + substring(c_data, 1, 158)

    WHERE  c_id        = @c_id AND
           c_w_id      = @c_w_id AND
           c_d_id      = @c_d_id
END

-- get district data and update year-to-date
UPDATE district
SET   d_ytd      = d_ytd + @h_amount,
      @d_street_1 = d_street_1,
      @d_street_2 = d_street_2,
      @d_city     = d_city,
      @d_state    = d_state,
      @d_zip      = d_zip,
      @d_name     = d_name,
      @d_id_local = d_id
WHERE  d_w_id      = @w_id AND
      d_id        = @d_id

-- get warehouse data and update year-to-date
UPDATE warehouse
SET   w_ytd      = w_ytd + @h_amount,
      @w_street_1 = w_street_1,
      @w_street_2 = w_street_2,
      @w_city     = w_city,
      @w_state    = w_state,
      @w_zip      = w_zip,
      @w_name     = w_name,
      @w_id_local = w_id
WHERE  w_id        = @w_id

```

```

-- create history record
INSERT INTO      history VALUES (@c_id_local,
                                  @c_d_id,
                                  @c_w_id,
                                  @d_id_local,
                                  @w_id_local,
                                  @datetime,
                                  @h_amount,
                                  @w_name + ' ' + @d_name)

COMMIT TRANSACTION p

-- return data to client
SELECT  @c_id,
        @c_last,
        @datetime,
        @w_street_1,
        @w_street_2,
        @w_city,
        @w_state,
        @w_zip,
        @d_street_1,
        @d_street_2,
        @d_city,
        @d_state,
        @d_zip,
        @c_first,
        @c_middle,
        @c_street_1,
        @c_street_2,
        @c_city,
        @c_state,
        @c_zip,
        @c_phone,
        @c_since,
        @c_credit,
        @c_credit_lim,
        @c_discount,
        @c_balance,
        @screen_data
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

stocklev.sql

```

-- File: STOCKLEV.SQL
-- Microsoft TPC-C Benchmark Kit Ver. 4.68
-- Copyright Microsoft, 2006
-- Creates stock level stored procedure
-- Interface Level: 4.20.000
-- -----
SET QUOTED_IDENTIFIER OFF

```

```

GO
SET ANSI_NULLS ON
GO
USE tpcc
GO

IF EXISTS ( SELECT name FROM sysobjects WHERE name = 'tpcc_stocklevel' )
    DROP PROCEDURE tpcc_stocklevel
GO

CREATE PROCEDURE tpcc_stocklevel
    @w_id          int,
    @d_id          tinyint,
    @threshold     smallint

AS
DECLARE @o_id_low   int,
        @o_id_high  int

SELECT @o_id_low   = (d_next_o_id - 20),
       @o_id_high  = (d_next_o_id - 1)
FROM   district
WHERE  d_w_id      = @w_id AND
       d_id        = @d_id

SELECT COUNT(DISTINCT(s_i_id))
FROM   stock,
       order_line
WHERE  ol_w_id     = @w_id AND
       ol_d_id     = @d_id AND
       ol_o_id     BETWEEN @o_id_low AND
                       @o_id_high AND
       s_w_id      = ol_w_id AND
       s_i_id      = ol_i_id AND
       s_quantity  < @threshold
OPTION(ORDER GROUP)
GO

SET QUOTED_IDENTIFIER OFF
GO

SET ANSI_NULLS ON
GO

```

getargs.c

```

// File:           GETARGS.C
//                 Microsoft TPC-C Kit Ver. 4.51
//                 Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
// Purpose:        Source file for command line processing

// Includes
#include "tpcc.h"
//=====
// Function name: GetArgsLoader
//
```

```

//=====================================================================
void GetArgsLoader(int argc, char **argv, TPCCLDR_ARGS *pargs)
{
    int             i;
    char  *ptr;

#ifndef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoader()\n", (int) GetCurrentThreadId());
#endif

/* init args struct with some useful values */
pargs->server          = SERVER;
pargs->user             = USER;
pargs->password         = PASSWORD;
pargs->database         = DATABASE;
pargs->batch             = BATCH;
pargs->num_warehouses   = UNDEF;
pargs->tables_all        = TRUE;
pargs->table_item        = FALSE;
pargs->table_warehouse   = FALSE;
pargs->table_customer    = FALSE;
pargs->table_orders      = FALSE;
pargs->loader_res_file   = LOADER_RES_FILE;
pargs->log_path          = LOADER_LOG_PATH;
pargs->pack_size          = DEFLDPACKSIZE;
pargs->starting_warehouse = DEF_STARTING_WAREHOUSE;
pargs->build_index        = BUILD_INDEX;
pargs->index_order        = INDEX_ORDER;
pargs->index_script_path  = INDEX_SCRIPT_PATH;
pargs->scale_down          = SCALE_DOWN;

/* check for zero command line args */
if ( argc == 1 )
    GetArgsLoaderUsage();

for ( i = 1; i < argc; ++i )
{
    if ( argv[i][0] != '-' && argv[i][0] != '/' )
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }

    ptr = argv[i];

    switch (ptr[1])
    {
        case '?': /* Fall through */
            GetArgsLoaderUsage();
            break;

        case 'D':
            pargs->database = ptr+2;
            break;

        case 'P':
            pargs->password = ptr+2;
            break;

        case 'S':
            pargs->server = ptr+2;
            break;
    }
}

```

```

        break;

case 'U':
    pargs->user = ptr+2;
    break;

case 'b':
    pargs->batch = atol(ptr+2);
    break;

case 'W':
    pargs->num_warehouses = atol(ptr+2);
    break;

case 's':
    pargs->starting_warehouse = atol(ptr+2);
    break;

case 't':
{
    pargs->tables_all = FALSE;
    if (strcmp(ptr+2,"item") == 0)
        pargs->table_item =
            TRUE;
    == 0
    else if (strcmp(ptr+2,"warehouse"))
        pargs->table_warehouse =
            TRUE;
    == 0
    else if (strcmp(ptr+2,"customer"))
        pargs->table_customer =
            TRUE;
    == 0
    else if (strcmp(ptr+2,"orders") ==
            pargs->table_orders =
                TRUE;
    else
    {
        printf("\nUnrecognized command");
        GetArgsLoaderUsage();
        exit(1);
    }
    break;
}

case 'f':
    pargs->loader_res_file = ptr+2;
    break;

case 'L':
    pargs->log_path = ptr+2;
    break;

case 'p':
    pargs->pack_size = atol(ptr+2);
    break;

case 'i':
    pargs->build_index = atol(ptr+2);
    break;

case 'o':
    break;
}

pargs->index_order = atol(ptr+2);
break;

case 'c':
    pargs->scale_down = atol(ptr+2);
    break;

case 'd':
    pargs->index_script_path = ptr+2;
    break;

default:
    GetArgsLoaderUsage();
    exit(-1);
}
}

/* check for required args */
if (pargs->num_warehouses == UNDEF)
{
    printf("Number of Warehouses is required\n");
    exit(-2);
}

return;
}

//=====
// Function name: GetArgsLoaderUsage
// =====
void GetArgsLoaderUsage()
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering GetArgsLoaderUsage()\n", (int) GetCurrentThreadId());
#endif

    printf("TPCCLDR:\n\n");
    printf("Parameter                                         Default\n");
    printf("-----\n");
    printf("-W Number of Warehouses to Load                 Required \n");
    printf("-S Server                                         %s\n", SERVER);
    printf("-U Username                                        %s\n", USER);
    printf("-P Password                                         %s\n", PASSWORD);
    printf("-D Database                                         %s\n", DATABASE);
    printf("-b Batch Size                                       %ld\n", BATCH);
    printf("-p TDS packet size                                %ld\n", DEFLDPACKSIZE);
    printf("-L Loader BCP Log Path                           %s\n", LOADER_LOG_PATH);
    printf("-f Loader Results Output Filename                 %s\n", LOADER_RES_FILE);
    printf("-s Starting Warehouse                            %ld\n", DEF_STARTING_WAREHOUSE);
}

```

```

        printf("-i Build Option (data = 0, data and index = 1)      %ld\n",
(long) BUILD_INDEX);
        printf("-o Cluster Index Build Order (before = 1, after = 0) %ld\n",
(long) INDEX_ORDER);
        printf("-c Build Scaled Database (normal = 0, tiny = 1)     %ld\n",
(long) SCALE_DOWN);
        printf("-d Index Script Path                                %s\n",
INDEX_SCRIPT_PATH);
        printf("-t Table to Load                                     all tables
\\n");
        printf("    [item|warehouse|customer|orders]\\n");
printf("    Notes: \\n";
printf("        - the '-t' parameter may be included multiple times to \\n";
printf("        - specify multiple tables to be loaded \\n");
printf("        - 'item' loads ITEM table \\n");
printf("        - 'warehouse' loads WAREHOUSE, DISTRICT, and STOCK tables \\n");
printf("        - 'customer' loads CUSTOMER and HISTORY tables \\n");
printf("        - 'orders' load NEW-ORDER, ORDERS, ORDER-LINE tables \\n");
printf("    \\nNote: Command line switches are case sensitive.\\n");

exit(0);
}

```

random.c

```

// File:           RANDOM.C
//                               Microsoft TPC-C Kit Ver. 4.62
//                               Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2005
// Purpose: Random number generation routines for database loader

// Includes
#include "tpcc.h"
#include "math.h"

// Defines
#define A          16807
#define M          2147483647
#define Q          127773 /* M div A */
#define R          2836  /* M mod A */
#define Thread     __declspec(thread)

// Globals
long Thread Seed = 0; /* thread local seed */

***** *
* random -
* Implements a GOOD pseudo random number generator. This generator
* will/should? run the complete period before repeating.
*
* Copied from:
*   Random Numbers Generators: Good Ones Are Hard to Find.
*   Communications of the ACM - October 1988 Volume 31 Number 10
*
* Machine Dependencies:
*   long must be 2 ^ 31 - 1 or greater.
*

```

```

*****
* seed - load the Seed value used in irand and drand. Should be used before
* first call to irand or drand.
*****
void seed(long val)
{
#ifdef DEBUG
    printf("{%ld}DBG: Entering seed()...\\n", (int) GetCurrentThreadId());
    printf("Old Seed %ld New Seed %ld\\n",Seed, val);
#endif

    if ( val < 0 )
        val = abs(val);

    Seed = val;
}

*****
*
* irand - returns a 32 bit integer pseudo random number with a period of
* 1 to 2 ^ 32 - 1.
*
* parameters:
*   none.
*
* returns:
*   32 bit integer - defined as long ( see above ). *
*
* side effects:
*   seed get recomputed.
*****
long irand()
{
    register long s; /* copy of seed */
    register long test; /* test flag */
    register long hi; /* tmp value for speed */
    register long lo; /* tmp value for speed */

#ifdef DEBUG
    printf("{%ld}DBG: Entering irand()...\\n", (int) GetCurrentThreadId());
#endif

    s = Seed;
    hi = s / Q;
    lo = s % Q;

    test = A * lo - R * hi;
    if ( test > 0 )
        Seed = test;
    else
        Seed = test + M;

    return( Seed );
}

```

```

/*
*****
* drand - returns a double pseudo random number between 0.0 and 1.0.
* See irand.
*****
double drand()
{
    #ifdef DEBUG
        printf("[%ld]DBG: Entering drand()...\\n", (int) GetCurrentThreadId());
    #endif

        return( (double)irand() / 2147483647.0 );
    }

//=====
// Function : RandomNumber
//
// Description:
//=====
long RandomNumber(long lower, long upper)
{
    long rand_num;

    #ifdef DEBUG
        printf("[%ld]DBG: Entering RandomNumber()...\\n", (int) GetCurrentThreadId());
    #endif

        if ( upper == lower )          /* pgd 08-13-96 perf enhancement */
            return lower;

        upper++;

        if ( upper <= lower )
            rand_num = upper;
        else
            rand_num = lower + irand() % (upper - lower); /* pgd 08-13-96
perf enhancement */

    #ifdef DEBUG
        printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\\n",
               (int) GetCurrentThreadId(), lower, upper,
            rand_num);
    #endif

        return rand_num;
}

#if 0
//Orginal code pgd 08/13/96
long RandomNumber(long lower,
                  long upper)
{
    long rand_num;

    #ifdef DEBUG
        printf("[%ld]DBG: Entering RandomNumber()...\\n", (int) GetCurrentThreadId());

```

```

#endif

        upper++;

        if ((upper <= lower))
            rand_num = upper;
        else
            rand_num = lower + irand() % ((upper > lower) ? upper - lower :
upper);

    #ifdef DEBUG
        printf("[%ld]DBG: RandomNumber between %ld & %ld ==> %ld\\n",
               (int) GetCurrentThreadId(), lower, upper,
            rand_num);
    #endif

        return rand_num;
}
#endif

//=====
// Function : NURand
//
// Description:
//=====
long NURand(int iConst,
            long x,
            long y,
            long C)
{
    long rand_num;

    #ifdef DEBUG
        printf("[%ld]DBG: Entering NURand()...\\n", (int) GetCurrentThreadId());
    #endif

        rand_num = (((RandomNumber(0,iConst) | RandomNumber(x,y)) + C) % (y-x+1))+x;

    #ifdef DEBUG
        printf("[%ld]DBG: NURand: num = %d\\n", (int) GetCurrentThreadId(), rand_num);
    #endif

        return rand_num;
}

```

strings.c

```

//      File:           STRINGS.C
//                                         Microsoft TPC-C Kit Ver. 4.51
//                                         Copyright Microsoft, 1996, 1997, 1998, 1999,
2000, 2001, 2002, 2003
//      Purpose:  Source file for database loader string functions

// Includes
#include "tpcc.h"
#include <string.h>
#include <ctype.h>

```

```

//=====
// Function name: MakeAddress
//=====
void MakeAddress(char *street_1,
                 char *street_2,
                 char *city,
                 char *state,
                 char *zip)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAddress()\n", (int) GetCurrentThreadId());
#endif

    MakeAlphaString (10, 20, ADDRESS_LEN, street_1);
    MakeAlphaString (10, 20, ADDRESS_LEN, street_2);
    MakeAlphaString (10, 20, ADDRESS_LEN, city);
    MakeAlphaString (2, 2, STATE_LEN, state);
    MakeZipNumberString(9, 9, ZIP_LEN, zip);

#ifdef DEBUG
    printf("[%ld]DBG: MakeAddress: street_1: %s, street_2: %s, city: %s, state: %s,
zip: %s\n",
           (int) GetCurrentThreadId(), street_1, street_2, city,
state, zip);
#endif

    return;
}

//=====
// Function name: LastName
//=====
void LastName(int num,
              char *name)
{
    static char *n[] =
    {
        "BAR" , "OUGHT" , "ABLE" , "PRI" , "PRES",
        "ESE" , "ANTI" , "CALLY" , "ATION", "EING"
    };

#ifdef DEBUG
    printf("[%ld]DBG: Entering LastName()\n", (int) GetCurrentThreadId());
#endif

    if ((num >= 0) && (num < 1000))
    {
        strcpy(name, n[(num/100)%10]);
        strcat(name, n[(num/10)%10]);
        strcat(name, n[(num/1)%10]);

        if (strlen(name) < LAST_NAME_LEN)
        {
            PaddString(LAST_NAME_LEN, name);
        }
    }
    else
    {
        printf("\nError in LastName()... num <%ld> out of range
(0,999)\n", num);
        exit(-1);
    }
}

#ifdef DEBUG
printf("[%ld]DBG: LastName: num = [%d] ==> [%d] [%d] [%d]\n",
       (int) GetCurrentThreadId(), num, num/100, (num/10)%10,
num%10);
printf("[%ld]DBG: LastName: String = %s\n", (int) GetCurrentThreadId(),
name);
#endif

return;
}

//=====
// Function name: MakeAlphaString
//=====
//philipdu 08/13/96 Changed MakeAlphaString to use A-Z, a-z, and 0-9 in
//accordance with spec see below:
//The spec says:
//4.3.2.2 The notation random a-string [x .. y]
//(respectively, n-string [x .. y]) represents a string of random alphanumeric
//(respectively, numeric) characters of a random length of minimum x, maximum y,
//and mean (y+x)/2. Alphanumerics are A..Z, a..z, and 0..9. The only other
//requirement is that the character set used "must be able to represent a minimum
//of 128 different characters". We are using 8-bit chars, so this is a non issue.
//It is completely unreasonable to stuff non-printing chars into the text fields.
// -CLevine 08/13/96

int MakeAlphaString( int x, int y, int z, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifdef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaString()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(x, y);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    str[len] = 0;

    return len;
}

```

```

}

int MakeAlphaStringPadded( int minLen, int maxLen, int padLen, char *str)
{
    int len;
    int i;
    char cc = 'a';
    static char chArray[] =
"0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz";
    static int chArrayMax = 61;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeAlphaStringPadded()\n", (int) GetCurrentThreadId());
#endif

    len= RandomNumber(minLen, maxLen);

    for (i=0; i<len; i++)
        str[i] = chArray[RandomNumber(0,chArrayMax)];
    if (len < padLen)
        memset(str+len, ' ', padLen - len);
    str[padLen] = 0;
    return padLen;
}

//=====
// Function name: MakeOriginalAlphaString
//=====
int MakeOriginalAlphaString(int x,
                           int y,
                           int z,
                           char *str,
                           int percent)
{
    int len;
    int val;
    int start;

#ifndef DEBUG
    printf("[%ld]DBG: Entering MakeOriginalAlphaString()\n", (int) GetCurrentThreadId());
#endif

    // verify percentage is valid
    if ((percent < 0) || (percent > 100))
    {
        printf("MakeOriginalAlphaString: Invalid percentage: %d\n",
percent);
        exit(-1);
    }

    // verify string is at least 8 chars in length
    if (x < 8)
    {
        printf("MakeOriginalAlphaString: string length must be >= 8\n");
        exit(-1);
    }
}

```

```

// Make Alpha String
len = MakeAlphaString(x,y, z, str);

val = RandomNumber(1,100);
if (val <= percent)
{
    start = RandomNumber(0, len - 8);
    strncpy(str + start, "ORIGINAL", 8);
}

#ifndef DEBUG
printf("[%ld]DBG: MakeOriginalAlphaString: : %s\n",
(int) GetCurrentThreadId(), str);
#endif

return len;
}

//=====
// Function name: MakeNumberString
//=====
int MakeNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeNumberString is always called MakeZipNumberString(16, 16, 16,
string)

    memset(str, '0', 16);
    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));

    itoa(RandomNumber(0, 99999999), tmp, 10);
    memcpy(str+8, tmp, strlen(tmp));

    str[16] = 0;
    return 16;
}

//=====
// Function name: MakeZipNumberString
//=====
int MakeZipNumberString(int x, int y, int z, char *str)
{
    char tmp[16];

    //MakeZipNumberString is always called MakeZipNumberString(9, 9, 9,
string)

    strcpy(str, "000011111");
    itoa(RandomNumber(0, 9999), tmp, 10);
    memcpy(str, tmp, strlen(tmp));
}

```

```

        return 9;
    }

//=====
// Function name: InitString
//
//=====
void InitString(char *str, int len)
{
#ifdef DEBUG
    printf("[%ld]DBG: Entering InitString()\n", (int) GetCurrentThreadId());
#endif

    memset(str, ' ', len);
    str[len] = 0;
}

//=====
// Function name: InitAddress
//
// Description:
//=====
void InitAddress(char *street_1, char *street_2, char *city, char *state, char *zip)
{
    memset(street_1, ' ', ADDRESS_LEN+1);
    memset(street_2, ' ', ADDRESS_LEN+1);
    memset(city, ' ', ADDRESS_LEN+1);

    street_1[ADDRESS_LEN+1] = 0;
    street_2[ADDRESS_LEN+1] = 0;
    city[ADDRESS_LEN+1] = 0;

    memset(state, ' ', STATE_LEN+1);
    state[STATE_LEN+1] = 0;

    memset(zip, ' ', ZIP_LEN+1);
    zip[ZIP_LEN+1] = 0;
}

//=====
// Function name: PaddString
//
//=====
void PaddString(int max, char *name)
{
    int             len;

    len = strlen(name);
    if (len < max)
        memset(name+len, ' ', max - len);
    name[max] = 0;

    return;
}

```

time.c

```

// File:          TIME.C
// Microsoft TPC-C Kit Ver. 4.62
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2005
// Purpose: Source file for time functions

// Includes
#include "tpcc.h"

// Globals
static long start_sec;

//=====
// Function name: TimeNow
//
//=====
long TimeNow()
{
    long           time_now;
    struct _timeb el_time;

#ifdef DEBUG
    printf("[%ld]DBG: Entering TimeNow()\n", (int) GetCurrentThreadId());
#endif

    _ftime(&el_time);
    time_now = ((el_time.time - start_sec) * 1000) + el_time.millitm;

    return time_now;
}

```

tpcc.h

```

// File:          TPCC.H
// Microsoft TPC-C Kit Ver. 4.51
// Copyright Microsoft, 1996, 1997, 1998, 1999,
// 2000, 2001, 2002, 2003, 2005
// Purpose: Header file for TPC-C database loader

// Build number of TPC Benchmark Kit
#define TPCKIT_VER "4.51"

// General headers
#include <windows.h>
#include <winbase.h>
#include <stdlib.h>
#include <stdio.h>
#include <process.h>
#include <stddef.h>
#include <stdarg.h>

```

```

#include <string.h>
#include <time.h>
#include <sys\timeb.h>
#include <sys\types.h>
#include <math.h>

// ODBC headers
#include <sql.h>
#include <sqlext.h>
#include <odbc.css.h>

// General constants
#define MILLI 1000
#define FALSE 0
#define TRUE 1
#define UNDEF -1
#define MINPRINTASCII 32
#define MAXPRINTASCII 126

// Default environment constants
#define SERVER ""
#define DATABASE "tpcc"
#define USER "sa"
#define PASSWORD ""

// Default loader arguments
#define BATCH 10000
#define DEFLDPACKSIZE 32768
#define LOADER_RES_FILE "C:\MSTPCC.450\SETUP\LOGS\load.out"
#define LOADER_LOG_PATH "C:\MSTPCC.450\SETUP\LOGS\" 123
#define LOADER_NURAND_C 1
#define DEF_STARTING_WAREHOUSE 1 // build both
#define BUILD_INDEX 1 // build both
data and indexes
#define INDEX_ORDER 1 // build
indexes before load
#define SCALE_DOWN 0 // build a normal
scale database
#define INDEX_SCRIPT_PATH "scripts"

typedef struct
{
    char *server;
    char *database;
    char *user;
    char *password;
    BOOL tables_all;
    // set if loading all tables
    BOOL table_item;
    // set if loading ITEM table specifically
    BOOL table_warehouse; // set if
loading WAREHOUSE, DISTRICT, and STOCK
    BOOL table_customer; // set if
loading CUSTOMER and HISTORY
    BOOL table_orders; // set if
loading NEW-ORDER, ORDERS, ORDER-LINE
    long num_warehouses;
    long batch;
    long verbose;
    long pack_size;
    char *loader_res_file;
}

```

```

char *log_path;
char *synch_servername;
long case_sensitivity;
long starting_warehouse;
long build_index;
long index_order;
long scale_down;
char *index_script_path;
} TPCCLDR_ARGS;

// String length constants
#define SERVER_NAME_LEN 20
#define DATABASE_NAME_LEN 20
#define USER_NAME_LEN 20
#define PASSWORD_LEN 20
#define TABLE_NAME_LEN 20
#define I_DATA_LEN 50
#define I_NAME_LEN 24
#define BRAND_LEN 1
#define LAST_NAME_LEN 16
#define W_NAME_LEN 10
#define ADDRESS_LEN 20
#define STATE_LEN 2
#define ZIP_LEN 9
#define S_DIST_LEN 24
#define S_DATA_LEN 50
#define D_NAME_LEN 10
#define FIRST_NAME_LEN 16
#define MIDDLE_NAME_LEN 2
#define PHONE_LEN 16
#define CREDIT_LEN 2
#define C_DATA_LEN 500
#define H_DATA_LEN 24
#define DIST_INFO_LEN 24
#define MAX_DL_NEW_ORDER_ITEMS 15
#define MAX_DL_ORDER_STATUS_ITEMS 15
#define STATUS_LEN 25
#define OL_DIST_INFO_LEN 24
#define C_SINCE_LEN 23
#define H_DATE_LEN 23
#define OL_DELIVERY_D_LEN 23
#define O_ENTRY_D_LEN 23

// Functions in random.c
void seed();
long irand();
double drand();
void WUCreate();
short WURand();
long RandomNumber(long lower, long upper);

// Functions in getargs.c;
void GetArgsLoader();
void GetArgsLoaderUsage();

// Functions in time.c
long TimeNow();

// Functions in strings.c
void MakeAddress();
void LastName();
int MakeAlphaString();

```

```

int          MakeAlphaStringPadded();
int          MakeOriginalAlphaString();
int          MakeNumberString();
int          MakeZipNumberString();
void         InitString();
void         InitAddress();
void         PaddString();

```

tpcldr.c

```

//=====
//      File:           TPCCLDR.C
//                         Microsoft TPC-C Kit Ver. 4.51
//                         Copyright Microsoft, 1996, 1997, 1998, 1999,
//                         2000, 2001, 2002, 2003
//      Purpose:        Source file for TPC-C database loader
//=====
// Includes
#include "tpcc.h"
#include "search.h"

// Defines
#define MAXITEMS          100000
#define MAXITEMS_SCALE_DOWN    100
#define CUSTOMERS_PER_DISTRICT 3000
#define CUSTOMERS_SCALE_DOWN   30
#define DISTRICT_PER_WAREHOUSE 10
#define ORDERS_PER_DISTRICT   3000
#define ORDERS_SCALE_DOWN     30
#define MAX_CUSTOMER_THREADS  2
#define MAX_ORDER_THREADS     3
#define MAX_MAIN_THREADS      4
#define MAX_SQL_ERRORS         10

// Functions declarations
void HandleErrorDBC (SQLHDBC hdbc1);
long NURand();
void LoadItem();
void LoadWarehouse();
void Stock();
void District();
void LoadCustomer();
void CustomerBufInit();
void CustomerBufLoad();
void LoadCustomerTable();
void LoadHistoryTable();
void LoadOrders();
void OrdersBufInit();
void OrdersBufLoad();
void LoadOrdersTable();
void LoadNewOrderTable();
void LoadOrderLineTable();
void GetPermutation();
void CheckForCommit();
void CheckForCommit_Big();
void OpenConnections();
void BuildIndex();
void FormatDate ();

// Shared memory structures
typedef struct
{

```

```

        double          ol;
        long            ol_i_id;
        long            ol_supply_w_id;
        short           ol_quantity;
        double          ol_amount;
        char            ol_dist_info[DIST_INFO_LEN+1];
        char            ol_delivery_d[OL_DELIVERY_D_LEN+1];
} ORDER_LINE_STRUCT;

typedef struct
{
        long            o_id;
        short           o_d_id;
        long            o_c_id;
        short           o_carrier_id;
        short           o.ol_cnt;
        short           o.all_local;
        ORDER_LINE_STRUCT o.ol[15];
} ORDERS_STRUCT;

typedef struct
{
        long            c_id;
        short           c_d_id;
        long            c_w_id;
        char            c_first[FIRST_NAME_LEN+1];
        char            c_middle[MIDDLE_NAME_LEN+1];
        char            c_last[LAST_NAME_LEN+1];
        char            c_street_1[ADDRESS_LEN+1];
        char            c_street_2[ADDRESS_LEN+1];
        char            c_city[ADDRESS_LEN+1];
        char            c_state[STATE_LEN+1];
        char            c_zip[ZIP_LEN+1];
        char            c_phone[PHONE_LEN+1];
        char            c_credit[CREDIT_LEN+1];
        double          c_credit_lim;
        double          c_discount;
        double          c_balance[6];
        double          c_ytd_payment;
        short           c_payment_cnt;
        short           c_delivery_cnt;
        char            c_data[C_DATA_LEN+1];
        double          h_amount;
        char            h_data[H_DATA_LEN+1];
} CUSTOMER_STRUCT;

typedef struct
{
        char            c_last[LAST_NAME_LEN+1];
        char            c_first[FIRST_NAME_LEN+1];
        long            c_id;
} CUSTOMER_SORT_STRUCT;

typedef struct
{
        long            time_start;
} LOADER_TIME_STRUCT;

// Global variables
char      szLastError[300];

```

```

HENV      henv;

HDBC      v_hdbc;                                // for SQL
Server version verification
HDBC      i_hdbc1;                               // for ITEM table
HDBC      w_hdbc1;                               // for WAREHOUSE,
DISTRICT, STOCK
HDBC      c_hdbc1;                                // for CUSTOMER
HDBC      c_hdbc2;                                // for HISTORY
HDBC      o_hdbc1;                                // for ORDERS
HDBC      o_hdbc2;                                // for NEW-ORDER

HDBC      o_hdbc3;                                // for ORDER-LINE

HSTMT     v_hstmt;                                // for SQL Server
version verification
HSTMT     i_hstmt1;
HSTMT     w_hstmt1;
HSTMT     c_hstmt1, c_hstmt2;
HSTMT     o_hstmt1, o_hstmt2, o_hstmt3;

int       total_db_errors;

ORDERS_STRUCT orders_buf[ORDERS_PER_DISTRICT];
CUSTOMER_STRUCT customer_buf[CUSTOMERS_PER_DISTRICT];
long      orders_rows_loaded;
double    new_order_rows_loaded;
double    order_line_rows_loaded;
long      history_rows_loaded;
long      customer_rows_loaded;
double    stock_rows_loaded;
long      district_rows_loaded;
long      item_rows_loaded;
long      warehouse_rows_loaded;
long      main_time_start;
long      main_time_end;
long      max_items;
long      customers_per_district;
long      orders_per_district;
long      first_new_order;
long      last_new_order;

TPCCLDR_ARGS *aptr, args;

//=====================================================================
// Function name: main
//
//=====================================================================
int main(int argc, char **argv)
{
    DWORD      dwThreadID[MAX_MAIN_THREADS];
    HANDLE     hThread[MAX_MAIN_THREADS];
    FILE       *fLoader;
    char       buffer[255];
    int        i;

    for (i=0; i<MAX_MAIN_THREADS; i++)
        hThread[i] = NULL;

    printf("\n*****");

```

```

printf("\n*          *");
printf("\n* Microsoft SQL Server          *");
printf("\n*          *");
printf("\n* TPC-C BENCHMARK KIT: Database loader          *");
printf("\n* Version %s          *");
printf("\n*          *, TPCKIT_VER          *");
printf("\n*****\n\n");

// process command line arguments
aptr = &args;
GetArgsLoader(argc, argv, aptr);

printf("Build interface is ODBC.\n");

if (aptr->build_index == 0)
    printf("Data load only - no index creation.\n");
else
    printf("Data load and index creation.\n");

if (aptr->index_order == 0)
    printf("Clustered indexes will be created after bulk load.\n");
else
    printf("Clustered indexes will be created before bulk load.\n");

// set database scale values
if (aptr->scale_down == 1)
{
    printf("**** Scaled Down Database ***\n");
    max_items = MAXITEMS_SCALE_DOWN;
    customers_per_district = CUSTOMERS_SCALE_DOWN;
    orders_per_district = ORDERS_SCALE_DOWN;
    first_new_order = 0;
    last_new_order = 30;
}
else
{
    max_items = MAXITEMS;
    customers_per_district = CUSTOMERS_PER_DISTRICT;
    orders_per_district = ORDERS_PER_DISTRICT;
    first_new_order = 2100;
    last_new_order = 3000;
}

// open connections to SQL Server
OpenConnections();

// open file for loader results
fLoader = fopen(aptr->loader_res_file, "w");

if (fLoader == NULL)
{
    printf("Error, loader result file open failed.");
    exit(-1);
}

// start loading data
sprintf(buffer,"TPC-C load started for %ld warehouses.\n",aptr->num_warehouses);
if ((aptr->scale_down == 1)
{
    sprintf(buffer,"SCALED DOWN DATABASE.\n");
}

```

```

printf("%s",buffer);
fprintf(fLoader,"%s",buffer);

main_time_start = (TimeNow() / MILLI);

// start parallel load threads
if (aptr->tables_all || aptr->table_item)
{
    fprintf(fLoader, "\nStarting loader threads for: item\n");
    hThread[0] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadItem,
                             NULL,
                             0,
                             &dwThreadID[0]);
}

if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating thread =
0.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_warehouse)
{
    fprintf(fLoader, "Starting loader threads for: warehouse\n");
    hThread[1] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadWarehouse,
                             NULL,
                             0,
                             &dwThreadID[1]);
}

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating thread =
1.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_customer)
{
    fprintf(fLoader, "Starting loader threads for: customer\n");
    hThread[2] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadCustomer,
                             NULL,
                             0,
                             &dwThreadID[2]);
}

```

```

if (hThread[2] == NULL)
{
    printf("Error, failed in creating creating main thread
= 2.\n");
    exit(-1);
}

if (aptr->tables_all || aptr->table_orders)
{
    fprintf(fLoader, "Starting loader threads for: orders\n");
    hThread[3] = CreateThread(NULL,
                             0,
                             (LPTHREAD_START_ROUTINE) LoadOrders,
                             NULL,
                             0,
                             &dwThreadID[3]);
}

if (hThread[3] == NULL)
{
    printf("Error, failed in creating creating main thread
= 3.\n");
    exit(-1);
}

// Wait for threads to finish...
for (i=0; i<MAX_MAIN_THREADS; i++)
{
    if (hThread[i] != NULL)
    {
        WaitForSingleObject( hThread[i], INFINITE );
        CloseHandle(hThread[i]);
        hThread[i] = NULL;
    }
}

main_time_end = (TimeNow() / MILLI);

sprintf(buffer,"nTPC-C load completed successfully in %ld minutes.\n",
        (main_time_end - main_time_start)/60);

printf("%s",buffer);
fprintf(fLoader, "%s", buffer);

fclose(fLoader);

SQLFreeEnv(henv);

exit(0);
return 0;
}

//=====================================================================
// Function name: LoadItem

```

```

// =====
void LoadItem()
{
    int             i;
    long            i_id;
    long            i_im_id;
    char            i_name[I_NAME_LEN+1];
    double          i_price;
    char            i_data[I_DATA_LEN+1];
    char            name[20];
    long            time_start;
    RETCODE         rc;
    DBINT          rcount;
    char            bcphint[128];
    char            err_log_path[256];

    // Seed with unique number
    seed(11);

    printf("Loading item table...\n");

    //if build index before load
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxitmcl");

    InitString(i_name, I_NAME_LEN+1);
    InitString(i_data, I_DATA_LEN+1);

    sprintf(name, "%s..%s", aptr->database, "item");

    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"item.err");
    rc = bcp_init(i_hdbc1, name, NULL, err_log_path , DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (i_id), ROWS_PER_BATCH =
100000");
        rc = bcp_control(i_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(i_hdbc1);
    }

    i = 0;
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_name, 0, I_NAME_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) &i_price, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
    rc = bcp_bind(i_hdbc1, (BYTE *) i_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);
}

```

```

rc = bcp_bind(i_hdbc1, (BYTE *) &i_im_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(i_hdbc1);

time_start = (TimeNow() / MILLI);

item_rows_loaded = 0;

for (i_id = 1; i_id <= max_items; i_id++)
{
    i_im_id = RandomNumber(1L, 10000L);

    MakeAlphaStringPadded(14, 24, I_NAME_LEN, i_name);

    i_price = ((float) RandomNumber(100L, 10000L))/100.0;

    MakeOriginalAlphaString(26, 50, I_DATA_LEN, i_data, 10);

    rc = bcp_sendrow(i_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    item_rows_loaded++;
    CheckForCommit(i_hdbc1, i_hstmt1, item_rows_loaded, "item",
&time_start);
}

rcint = bcp_done(i_hdbc1);
if (rcint < 0)
    HandleErrorDBC(i_hdbc1);

printf("Finished loading item table.\n");

SQLFreeStmt(i_hstmt1, SQL_DROP);
SQLDisconnect(i_hdbc1);
SQLFreeConnect(i_hdbc1);

// if build index after load
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxitmcl");
}

// =====
// Function : LoadWarehouse
// Loads WAREHOUSE table and loads Stock and District as Warehouses are created
// =====
void LoadWarehouse()
{
    int             i;
    long            w_id;
    char            w_name[W_NAME_LEN+1];
    char            w_street_1[ADDRESS_LEN+1];
    char            w_street_2[ADDRESS_LEN+1];
    char            w_city[ADDRESS_LEN+1];
    char            w_state[STATE_LEN+1];
    char            w_zip[ZIP_LEN+1];
    double          w_tax;
    double          w_ytd;
}

```

```

char      name[20];
long     time_start;
RETCODE   rc;
DBINT    rcint;
char      bcpint[128];
char      err_log_path[256];

// Seed with unique number
seed(2);

printf("Loading warehouse table...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxwarcl");

InitString(w_name, W_NAME_LEN+1);
InitAddress(w_street_1, w_street_2, w_city, w_state, w_zip);

sprintf(name, "%s.%s", aptr->database, "warehouse");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"whouse,err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (w_id), ROWS_PER_BATCH = %d",
aptr->num_warehouses);
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcpint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &w_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_name, 0, W_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) w_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

time_start = (TimeNow() / MILLI);

warehouse_rows_loaded = 0;

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    MakeAlphaStringPadded(6,10, W_NAME_LEN, w_name);
    MakeAddress(w_street_1, w_street_2, w_city, w_state, w_zip);
    w_tax = ((float) RandomNumber(0L,2000L))/10000.00;
    w_ytd = 300000.00;
    rc = bcp_sendrow(w_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    warehouse_rows_loaded++;
    CheckForCommit(w_hdbc1, i_hstmt1, warehouse_rows_loaded,
"warehouse", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading warehouse table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxwarcl");

stock_rows_loaded = 0;
district_rows_loaded = 0;

District();
Stock();
}

//=====
// Function : District
//=====
void District()
{
    int          i;
    short         d_id;
    long          d_w_id;
    char d_name[D_NAME_LEN+1];
    char d_street_1[ADDRESS_LEN+1];
    char d_street_2[ADDRESS_LEN+1];
    char d_city[ADDRESS_LEN+1];
}

```

```

char d_state[STATE_LEN+1];
char d_zip[ZIP_LEN+1];
double d_tax;
double d_ytd;
char name[20];
long d_next_o_id;
long time_start;
long w_id;
RETCODE rc;
DBINT rcint;
char bcpint[128];
char err_log_path[256];

// Seed with unique number
seed(4);

printf("Loading district table...\n");

// build index before load
if ((aptr->build_index == 1) && (aptr->index_order == 1))
    BuildIndex("idxdiscl");

InitString(d_name, D_NAME_LEN+1);
InitAddress(d_street_1, d_street_2, d_city, d_state, d_zip);
sprintf(name, "%s..%s", aptr->database, "district");

strcpy(err_log_path,aptr->log_path);
strcat(err_log_path,"district.err");
rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcpint, "tablock, order (d_w_id, d_id), ROWS_PER_BATCH
= %u", (aptr->num_warehouses * 10));
    rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcpint);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

i = 0;
rc = bcp_bind(w_hdbc1, (BYTE *) &d_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_next_o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &d_tax, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_name, 0, D_NAME_LEN, NULL, 0, 0, ++i);

if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_1, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_street_2, 0, ADDRESS_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) d_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

d_ytd = 30000.0;

d_next_o_id = orders_per_district+1;

time_start = (TimeNow() / MILLI);

for (w_id = aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    d_w_id = w_id;

    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        MakeAlphaStringPadded(6,10,D_NAME_LEN, d_name);
        MakeAddress(d_street_1, d_street_2, d_city, d_state,
d_zip);

        d_tax = ((float) RandomNumber(0L,2000L))/10000.00;

        rc = bcp_sendrow(w_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);

        district_rows_loaded++;
        CheckForCommit(w_hdbc1, w_hstmt1,
district_rows_loaded, "district", &time_start);
    }

    rcint = bcp_done(w_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(w_hdbc1);

    printf("Finished loading district table.\n");

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxdiscl");
}
return;
}

```

```

//=====
// Function : Stock
//=====
void Stock()
{
    int             i;
    long            s_i_id;
    long            s_w_id;
    short           s_quantity;
    char  s_dist_01[S_DIST_LEN+1];
    char  s_dist_02[S_DIST_LEN+1];
    char  s_dist_03[S_DIST_LEN+1];
    char  s_dist_04[S_DIST_LEN+1];
    char  s_dist_05[S_DIST_LEN+1];
    char  s_dist_06[S_DIST_LEN+1];
    char  s_dist_07[S_DIST_LEN+1];
    char  s_dist_08[S_DIST_LEN+1];
    char  s_dist_09[S_DIST_LEN+1];
    char  s_dist_10[S_DIST_LEN+1];
    long            s_ytd;
    short           s_order_cnt;
    short           s_remote_cnt;
    char  s_data[S_DATA_LEN+1];
    short          len;
    char   name[20];
    long   time_start;
    RETCODE        rc;
    DBINT         rcount;
    char  bcphint[128];
    char  err_log_path[256];

    // Seed with unique number
    seed(3);

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
        BuildIndex("idxstkol");

    sprintf(name, "%s..%s", aptr->database, "stock");

    strcpy(err_log_path,aptr->log_path);
    strcat(err_log_path,"stock.err");
    rc = bcp_init(w_hdbc1, name, NULL, err_log_path, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (s_i_id, s_w_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 100000));
        rc = bcp_control(w_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(w_hdbc1);
    }

    i = 0;
    rc = bcp_bind(w_hdbc1, (BYTE *) &s_i_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);
}

```

```

rc = bcp_bind(w_hdbc1, (BYTE *) &s_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_ytd, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_order_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) &s_remote_cnt, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_data, 0, SQL_VARLEN_DATA, "", 1, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_01, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_02, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_03, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_04, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_05, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_06, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_07, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_08, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_09, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);
rc = bcp_bind(w_hdbc1, (BYTE *) s_dist_10, 0, S_DIST_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)

```

```

        HandleErrorDBC(w_hdbc1);

s_ytd = s_order_cnt = s_remote_cnt = 0;
time_start = (TimeNow() / MILLI);
printf("...Loading stock table\n");
for (s_i_id=1; s_i_id <= max_items; s_i_id++)
{
    for (s_w_id = (long)aptr->starting_warehouse; s_w_id <= aptr-
>num_warehouses; s_w_id++)
    {
        s_quantity = (short)RandomNumber(10L,100L);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_01);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_02);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_03);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_04);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_05);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_06);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_07);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_08);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_09);
len = MakeAlphaString(24,24,S_DIST_LEN, s_dist_10);

len = MakeOriginalAlphaString(26,50, S_DATA_LEN,
s_data,10);

rc = bcp_sendrow(w_hdbc1);
if (rc != SUCCEED)
    HandleErrorDBC(w_hdbc1);

stock_rows_loaded++;
CheckForCommit_Big(w_hdbc1, w_hstmt1,
stock_rows_loaded, "stock", &time_start);
}

rcint = bcp_done(w_hdbc1);
if (rcint < 0)
    HandleErrorDBC(w_hdbc1);

printf("Finished loading stock table.\n");

SQLFreeStmt(w_hstmt1, SQL_DROP);
SQLDisconnect(w_hdbc1);
SQLFreeConnect(w_hdbc1);

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
    BuildIndex("idxstck1");

return;
}
//=====================================================================
// Function : LoadCustomer
//=====================================================================
void LoadCustomer()

```

```

{
    LOADER_TIME_STRUCT      customer_time_start;
    LOADER_TIME_STRUCT      history_time_start;
    long                     w_id;
    short                    d_id;
    DWORD                   dwThreadID [MAX_CUSTOMER_THREADS];
    HANDLE                  hThread [MAX_CUSTOMER_THREADS];
    char                     name [20];
    RETCODE                 rc;
    DBINT                  rcint;
    char                     bcphint [128];
    char                     cmd [256];
    int                      num_procs;
    char                     err_log_path_cust [256];
    char                     err_log_path_hist [256];

// Seed with unique number
seed(5);

printf("Loading customer and history tables...\n");

// if build index before load...
if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if ( num_procs >= 8 )
        BuildIndex("idxhisc1");
}

// Initialize bulk copy
sprintf(name, "%s..%s", aptr->database, "customer");
strcpy(err_log_path_cust,aptr->log_path);
strcat(err_log_path_cust,"customer.err");
rc = bcp_init(c_hdbc1, name, NULL, err_log_path_cust, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

if ((aptr->build_index == 1) && (aptr->index_order == 1))
{
    sprintf(bcphint, "tablock, order (c_w_id, c_d_id, c_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
    rc = bcp_control(c_hdbc1, BCPHINTS, (void*) bcphint);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);
}

sprintf(name, "%s..%s", aptr->database, "history");

rc = bcp_init(c_hdbc2, name, NULL, "logs\\history.err", DB_IN);
strcpy(err_log_path_hist,aptr->log_path);
strcat(err_log_path_hist,"history.err");
rc = bcp_init(c_hdbc2, name, NULL, err_log_path_hist, DB_IN);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

sprintf(bcphint, "tablock");
rc = bcp_control(c_hdbc2, BCPHINTS, (void*) bcphint);
if (rc != SUCCEED)

```

```

HandleErrorDBC(c_hdbc2);

customer_rows_loaded = 0;
history_rows_loaded = 0;

CustomerBufInit();

customer_time_start.time_start = (TimeNow() / MILLI);
history_time_start.time_start = (TimeNow() / MILLI);

for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses;
w_id++)
{
    for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
    {
        CustomerBufLoad(d_id, w_id);

        // Start parallel loading threads here...
        // Start customer table thread
        printf("...Loading customer table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[0] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadCustomerTable,
        &customer_time_start,
        0,
        &dwThreadID[0]);
        if (hThread[0] == NULL)
        {
            printf("Error, failed in creating creating
thread = 0.\n");
            exit(-1);
        }

        // Start History table thread
        printf("...Loading history table for: d_id = %d, w_id
= %d\n", d_id, w_id);

        hThread[1] = CreateThread(NULL,
        0,
        (LPTHREAD_START_ROUTINE) LoadHistoryTable,
        &history_time_start,
        0,
        &dwThreadID[1]);
        if (hThread[1] == NULL)
        {
            printf("Error, failed in creating creating
thread = 1.\n");
            exit(-1);
        }
    }
}

// flush the bulk connection
rcint = bcp_done(c_hdbc1);
if (rcint < 0)
    HandleErrorDBC(c_hdbc1);

rcint = bcp_done(c_hdbc2);
if (rcint < 0)
    HandleErrorDBC(c_hdbc2);

printf("Finished loading customer table.\n");

// if build index after load...
if ((aptr->build_index == 1) && (aptr->index_order == 0))
{
    BuildIndex("idxcuscl");
    // check the number of processors on this system
    // if 8 or more processors, then build index on History.
    // if less than 8 processors, do not build the index
    num_procs = atoi(getenv( "NUMBER_OF_PROCESSORS" ));
    if (num_procs >= 8)
        BuildIndex("idxhiscl");
}

// build non-clustered index
if (aptr->build_index == 1)
    BuildIndex("idxcusnc");

// Output the NURAND used for the loader into C_FIRST for C_ID = 1,
// C_W_ID = 1, and C_D_ID = 1
sprintf(cmd, "osql -S%s -U%s -P%s -d%s -e -Q\"update customer set c_first
= 'C_LOAD' where c_id = 1 and c_w_id = 1 and c_d_id = 1\" > %snurand_load.log",
aptr->server,
aptr->user,
aptr->password,
aptr->database,
LOADER_NURAND_C,
aptr->log_path);

system(cmd);

SQLFreeStmt(c_hstmt1, SQL_DROP);
SQLDisconnect(c_hdbc1);
SQLFreeConnect(c_hdbc1);
}

```

```

SQLFreeStmt(c_hstmt2, SQL_DROP);
SQLDisconnect(c_hdbc2);
SQLFreeConnect(c_hdbc2);

return;
}

//=====
// Function : CustomerBufInit
//=====
void CustomerBufInit()
{
    long      i;

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_id = 0;
        customer_buf[i].c_d_id = 0;
        customer_buf[i].c_w_id = 0;

        strcpy(customer_buf[i].c_first,"");
        strcpy(customer_buf[i].c_middle,"");
        strcpy(customer_buf[i].c_last,"");
        strcpy(customer_buf[i].c_street_1,"");
        strcpy(customer_buf[i].c_street_2,"");
        strcpy(customer_buf[i].c_city,"");
        strcpy(customer_buf[i].c_state,"");
        strcpy(customer_buf[i].c_zip,"");
        strcpy(customer_buf[i].c_phone,"");
        strcpy(customer_buf[i].c_credit,"");

        customer_buf[i].c_credit_lim = 0;
        customer_buf[i].c_discount = (float) 0;

        strcpy(customer_buf[i].c_balance,"");

        customer_buf[i].c_ytd_payment = 0;
        customer_buf[i].c_payment_cnt = 0;
        customer_buf[i].c_delivery_cnt = 0;

        strcpy(customer_buf[i].c_data,"");
        customer_buf[i].h_amount = 0;

        strcpy(customer_buf[i].h_data,"");
    }
}

//=====
// Function : CustomerBufLoad
//=====
// Fills shared buffer for HISTORY and CUSTOMER
//=====
void CustomerBufLoad(int d_id, long w_id)
{
    long          i;
    CUSTOMER_SORT_STRUCT   c[CUSTOMERS_PER_DISTRICT];
    for (i=0;i<customers_per_district;i++)
    {

```

```

        if (i < 1000)
            LastName(i, c[i].c_last);
        else
            LastName(NURand(255,0,999,LOADER_NURAND_C),
c[i].c_last);

        MakeAlphaStringPadded(8,16,FIRST_NAME_LEN, c[i].c_first);

        c[i].c_id = i+1;
    }

    printf("...Loading customer buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    for (i=0;i<customers_per_district;i++)
    {
        customer_buf[i].c_d_id = d_id;
        customer_buf[i].c_w_id = w_id;
        customer_buf[i].h_amount = 10.0;
        customer_buf[i].c_ytd_payment = 10.0;
        customer_buf[i].c_payment_cnt = 1;
        customer_buf[i].c_delivery_cnt = 0;
        customer_buf[i].c_id = c[i].c_id;
        strcpy(customer_buf[i].c_first, c[i].c_first);
        strcpy(customer_buf[i].c_last, c[i].c_last);
        customer_buf[i].c_middle[0] = 'O';
        customer_buf[i].c_middle[1] = 'E';
        MakeAddress(customer_buf[i].c_street_1,
                    customer_buf[i].c_street_2,
                    customer_buf[i].c_city,
                    customer_buf[i].c_state,
                    customer_buf[i].c_zip);
        MakeNumberString(16, 16, PHONE_LEN, customer_buf[i].c_phone);

        if (RandomNumber(1L, 100L) > 10)
            customer_buf[i].c_credit[0] = 'G';
        else
            customer_buf[i].c_credit[0] = 'B';
        customer_buf[i].c_credit[1] = 'C';
        customer_buf[i].c_credit_lim = 50000.0;
        customer_buf[i].c_discount = ((float) RandomNumber(0L, 5000L)) /
10000.0;
        strcpy(customer_buf[i].c_balance,"-10.0");
        MakeAlphaStringPadded(300, 500, C_DATA_LEN,
customer_buf[i].c_data);

        // Generate HISTORY data
        MakeAlphaStringPadded(12, 24, H_DATA_LEN,
customer_buf[i].h_data);
    }

//=====
// Function : LoadCustomerTable
//=====
void LoadCustomerTable(LOADER_TIME_STRUCT *customer_time_start)
{
    long          i;
    long          c_id;
    short         c_d_id;
    long          c_w_id;

```

```

char      c_first[FIRST_NAME_LEN+1];
char      c_middle[MIDDLE_NAME_LEN+1];
char      c_last[LAST_NAME_LEN+1];
char      c_street_1[ADDRESS_LEN+1];
char      c_street_2[ADDRESS_LEN+1];
char      c_city[ADDRESS_LEN+1];
char      c_state[STATE_LEN+1];
char      c_zip[ZIP_LEN+1];
char      c_phone[PHONE_LEN+1];
char      c_credit[CREDIT_LEN+1];
double    c_credit_lim;
double    c_discount;
char      c_balance[6];
double    c_ytd_payment;
short     c_payment_cnt;
short     c_delivery_cnt;
char      c_data[C_DATA_LEN+1];
char      c_since[C_SINCE_LEN+1];
RETCODE   rc;

i = 0;
rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_discount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_credit_lim, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_last, 0, LAST_NAME_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_first, 0, FIRST_NAME_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_credit, 0, CREDIT_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_balance, 0, 5, NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_ytd_payment, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_payment_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

```

```

rc = bcp_bind(c_hdbc1, (BYTE *) &c_delivery_cnt, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_1, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_street_2, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_city, 0, ADDRESS_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_state, 0, STATE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_zip, 0, ZIP_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_phone, 0, PHONE_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) &c_since, 0, C_SINCE_LEN, NULL, 0,
SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_middle, 0, MIDDLE_NAME_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);
rc = bcp_bind(c_hdbc1, (BYTE *) c_data, 0, C_DATA_LEN, NULL, 0, 0, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc1);

for (i = 0; i < customers_per_district; i++)
{
    c_id = customer_buf[i].c_id;
    c_d_id = customer_buf[i].c_d_id;
    c_w_id = customer_buf[i].c_w_id;

    strcpy(c_first, customer_buf[i].c_first);
    strcpy(c_middle, customer_buf[i].c_middle);
    strcpy(c_last, customer_buf[i].c_last);
    strcpy(c_street_1, customer_buf[i].c_street_1);
    strcpy(c_street_2, customer_buf[i].c_street_2);
    strcpy(c_city, customer_buf[i].c_city);
    strcpy(c_state, customer_buf[i].c_state);
    strcpy(c_zip, customer_buf[i].c_zip);
    strcpy(c_phone, customer_buf[i].c_phone);
    strcpy(c_credit, customer_buf[i].c_credit);

    FormatDate(&c_since);

    c_credit_lim = customer_buf[i].c_credit_lim;
    c_discount = customer_buf[i].c_discount;
    strcpy(c_balance, customer_buf[i].c_balance);
    c_ytd_payment = customer_buf[i].c_ytd_payment;
    c_payment_cnt = customer_buf[i].c_payment_cnt;
    c_delivery_cnt = customer_buf[i].c_delivery_cnt;
    strcpy(c_data, customer_buf[i].c_data);

    // Send data to server
}

```

```

        rc = bcp_sendrow(c_hdbc1);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc1);

        customer_rows_loaded++;
        CheckForCommit(c_hdbc1, c_hstmt1, customer_rows_loaded,
"customer", &customer_time_start->time_start);
    }

//=====
// Function : LoadHistoryTable
// =====
void LoadHistoryTable(LOADER_TIME_STRUCT *history_time_start)
{
    long i;
    long c_id;
    short c_d_id;
    long c_w_id;
    double h_amount;
    char h_data[H_DATA_LEN+1];
    char h_date[H_DATE_LEN+1];
    RETCODE rc;

    i = 0;
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &c_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_date, 0, H_DATE_LEN, NULL, 0,
SQLCHARACTER, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) &h_amount, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);
    rc = bcp_bind(c_hdbc2, (BYTE *) h_data, 0, H_DATA_LEN, NULL, 0, 0, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc2);

    for (i = 0; i < customers_per_district; i++)
    {
        c_id = customer_buf[i].c_id;
        c_d_id = customer_buf[i].c_d_id;

```

```

        c_w_id = customer_buf[i].c_w_id;
        h_amount = customer_buf[i].h_amount;
        strcpy(h_data, customer_buf[i].h_data);

        FormatDate(&h_date);

        // send to server
        rc = bcp_sendrow(c_hdbc2);
        if (rc != SUCCEED)
            HandleErrorDBC(c_hdbc2);

        history_rows_loaded++;
        CheckForCommit(c_hdbc2, c_hstmt2, history_rows_loaded,
"history", &history_time_start->time_start);
    }

//=====
// Function : LoadOrders
// =====
void LoadOrders()
{
    LOADER_TIME_STRUCT orders_time_start;
    LOADER_TIME_STRUCT new_order_time_start;
    LOADER_TIME_STRUCT order_line_time_start;
    long w_id;
    short d_id;
    DWORD dwThreadID[MAX_ORDER_THREADS];
    HANDLE hThread[MAX_ORDER_THREADS];
    char name[20];
    RETCODE rc;
    bcpHint[128];
    err_log_path_ord[256];
    err_log_path_nord[256];
    err_log_path_ord1[256];

    // seed with unique number
    seed(6);

    printf("Loading orders...\n");

    // if build index before load...
    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        BuildIndex("idxordcl");
        BuildIndex("idxnodecl");
        BuildIndex("idxodcl1");
    }

    // initialize bulk copy
    sprintf(name, "%s..%s", aptr->database, "orders");

    rc = bcp_init(o_hdbc1, name, NULL, "logs\\orders.err", DB_IN);
    strcpy(err_log_path_ord, aptr->log_path);
    strcat(err_log_path_ord, "orders.err");
    rc = bcp_init(o_hdbc1, name, NULL, err_log_path_ord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {

```

```

        sprintf(bcphint, "tablock, order (o_w_id, o_d_id, o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 30000));
        rc = bcp_control(o_hdbc1, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc1);
    }

    sprintf(name, "%s..%s", aptr->database, "new_order");

    rc = bcp_init(o_hdbc2, name, NULL, "logs\\neword.err", DB_IN);
    strcpy(err_log_path_nord,aptr->log_path);
    strcat(err_log_path_nord,"neword.err");
    rc = bcp_init(o_hdbc2, name, NULL, err_log_path_nord, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (no_w_id, no_d_id, no_o_id),
ROWS_PER_BATCH = %u", (aptr->num_warehouses * 9000));
        rc = bcp_control(o_hdbc2, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc2);
    }

    sprintf(name, "%s..%s", aptr->database, "order_line");

    rc = bcp_init(o_hdbc3, name, NULL, "logs\\ordline.err", DB_IN);
    strcpy(err_log_path_ordl,aptr->log_path);
    strcat(err_log_path_ordl,"ordline.err");
    rc = bcp_init(o_hdbc3, name, NULL, err_log_path_ordl, DB_IN);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    if ((aptr->build_index == 1) && (aptr->index_order == 1))
    {
        sprintf(bcphint, "tablock, order (ol_w_id, ol_d_id, ol_o_id,
ol_number), ROWS_PER_BATCH = %u", (aptr->num_warehouses * 300000));
        rc = bcp_control(o_hdbc3, BCPHINTS, (void*) bcphint);
        if (rc != SUCCEED)
            HandleErrorDBC(o_hdbc3);
    }

    orders_rows_loaded      = 0;
    new_order_rows_loaded   = 0;
    order_line_rows_loaded = 0;

    OrdersBufInit();

    orders_time_start.time_start = (TimeNow() / MILLI);
    new_order_time_start.time_start = (TimeNow() / MILLI);
    order_line_time_start.time_start = (TimeNow() / MILLI);

    for (w_id = (long)aptr->starting_warehouse; w_id <= aptr->num_warehouses,
w_id++)
    {
        for (d_id = 1; d_id <= DISTRICT_PER_WAREHOUSE; d_id++)
        {

            OrdersBufLoad(d_id, w_id);

            // start parallel loading threads here...
            // start Orders table thread

```

```

printf("...Loading Order Table for: d_id = %d, w_id =
%d\n", d_id, w_id);

hThread[0] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrdersTable,
&orders_time_start,
0,
&dwThreadID[0]);

if (hThread[0] == NULL)
{
    printf("Error, failed in creating creating
thread = 0.\n");
    exit(-1);
}

// start NewOrder table thread
printf("...Loading New-Order Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

hThread[1] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadNewOrderTable,
&new_order_time_start,
0,
&dwThreadID[1]);

if (hThread[1] == NULL)
{
    printf("Error, failed in creating creating
thread = 1.\n");
    exit(-1);
}

// start Order-Line table thread
printf("...Loading Order-Line Table for: d_id = %d,
w_id = %d\n", d_id, w_id);

hThread[2] = CreateThread(NULL,
0,
(LPTHREAD_START_ROUTINE) LoadOrderLineTable,
&order_line_time_start,
0,
&dwThreadID[2]);

if (hThread[2] == NULL)
{

```

```

thread = 2.\n");
printf("Error, failed in creating creating
exit(-1);
}

WaitForSingleObject( hThread[0], INFINITE );
WaitForSingleObject( hThread[1], INFINITE );
WaitForSingleObject( hThread[2], INFINITE );

if (CloseHandle(hThread[0]) == FALSE)
{
    printf("Error, failed in closing Orders
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[1]) == FALSE)
{
    printf("Error, failed in closing NewOrder
thread handle with errno: %d\n", GetLastError());
}

if (CloseHandle(hThread[2]) == FALSE)
{
    printf("Error, failed in closing OrderLine
thread handle with errno: %d\n", GetLastError());
}

printf("Finished loading orders.\n");

return;
}

//=====
// Function : OrdersBufInit
// Clears shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====
void OrdersBufInit()
{
    int     i;
    int     j;

    for (i=0;i<orders_per_district;i++)
    {
        orders_buf[i].o_id = 0;
        orders_buf[i].o_d_id = 0;
        orders_buf[i].o_w_id = 0;
        orders_buf[i].o_c_id = 0;
        orders_buf[i].o_carrier_id = 0;
        orders_buf[i].o.ol_cnt = 0;
        orders_buf[i].o.all_local = 0;

        for (j=0;j<=14;j++)
        {
            orders_buf[i].o.ol[j].ol = 0;
            orders_buf[i].o.ol[j].ol_i_id = 0;
            orders_buf[i].o.ol[j].ol_supply_w_id = 0;
            orders_buf[i].o.ol[j].ol_quantity = 0;
            orders_buf[i].o.ol[j].ol_amount = 0;
        }
    }
}

```

```

strcpy(orders_buf[i].o.ol[j].ol_dist_info,"");
}

}

//=====
// Function : OrdersBufLoad
// Fills shared buffer for ORDERS, NEWORDER, and ORDERLINE
//=====
void OrdersBufLoad(short d_id, long w_id)
{
    int     cust[ORDERS_PER_DISTRICT+1];
    long    o_id;
    long    ol;

    printf("...Loading Order Buffer for: d_id = %d, w_id = %d\n",
           d_id, w_id);

    GetPermutation(cust, orders_per_district);

    for (o_id=0;o_id<orders_per_district;o_id++)
    {
        // Generate ORDER and NEW-ORDER data
        orders_buf[o_id].o_d_id = d_id;
        orders_buf[o_id].o_w_id = w_id;
        orders_buf[o_id].o_id = o_id+1;
        orders_buf[o_id].o_c_id = cust[o_id+1];
        orders_buf[o_id].o.ol_cnt = (short)RandomNumber(5L, 15L);

        if (o_id < first_new_order)
        {
            orders_buf[o_id].o_carrier_id =
            (short)RandomNumber(1L, 10L);
            orders_buf[o_id].o.all_local = 1;
        }
        else
        {
            orders_buf[o_id].o_carrier_id = 0;
            orders_buf[o_id].o.all_local = 1;
        }

        for (ol=0; ol<orders_buf[o_id].o.ol_cnt; ol++)
        {
            orders_buf[o_id].o.ol[ol].ol = ol+1;
            orders_buf[o_id].o.ol[ol].ol_i_id = RandomNumber(1L,
max_items);
            orders_buf[o_id].o.ol[ol].ol_supply_w_id = w_id;
            orders_buf[o_id].o.ol[ol].ol_quantity = 5;
            MakeAlphaString(24, 24, OL_DIST_INFO_LEN,
&orders_buf[o_id].o.ol[ol].ol_dist_info);

            // Generate ORDER-LINE data
            if (o_id < first_new_order)
            {
                orders_buf[o_id].o.ol[ol].ol_amount = 0;
                // Added to insure ol_delivery_d set
properly during load
            }
        }
    }
}

```

```

FormatDate(&orders_buf[o_id].o.ol[ol].ol_delivery_d);
    }
    else
    {
        orders_buf[o_id].o.ol[ol].ol_amount =
RandomNumber(1,999999)/100.0;
        // Added to insure ol_delivery_d set
properly during load
        // odbc datetime format
        strcpy(orders_buf[o_id].o.ol[ol].ol_delivery_d,"1899-12-31 00:00:00.000");
    }
}

//=====
// Function : LoadOrdersTable
//=====
void LoadOrdersTable(LOADER_TIME_STRUCT *orders_time_start)
{
    int i;
    long o_id;
    short o_d_id;
    long o_w_id;
    long o_c_id;
    short o_carrier_id;
    short o.ol_cnt;
    short o_all_local;
    char o_entry_d[O_ENTRY_D_LEN+1];
    RETCODE rc;
    DBINT rcint;

    // bind ORDER data
    i = 0;
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_c_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o_carrier_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
    rc = bcp_bind(o_hdbc1, (BYTE *) &o.ol_cnt, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);
}

rc = bcp_bind(o_hdbc1, (BYTE *) &o_all_local, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

for (i = 0; i < orders_per_district; i++)
{
    o_id = orders_buf[i].o_id;
    o_d_id = orders_buf[i].o_d_id;
    o_w_id = orders_buf[i].o_w_id;
    o_c_id = orders_buf[i].o_c_id;
    o_carrier_id = orders_buf[i].o_carrier_id;
    o.ol_cnt = orders_buf[i].o.ol_cnt;
    o_all_local = orders_buf[i].o_all_local;

    FormatDate(&o_entry_d);

    // send data to server
    rc = bcp_sendrow(o_hdbc1);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc1);

    orders_rows_loaded++;
    CheckForCommit(o_hdbc1, o_hstmt1, orders_rows_loaded, "orders",
&orders_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc1);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc1);

    SQLFreeStmt(o_hstmt1, SQL_DROP);
    SQLDisconnect(o_hdbc1);
    SQLFreeConnect(o_hdbc1);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxordcl");

    // build non-clustered index
    if (aptr->build_index == 1)
        BuildIndex("idxordnc");
}

//=====
// Function : LoadNewOrderTable
//=====
void LoadNewOrderTable(LOADER_TIME_STRUCT *new_order_time_start)
{
    long i;
    long o_id;
    short o_d_id;
    long o_w_id;
    RETCODE rc;
}

```

```

DBINT          rcint;
// Bind NEW-ORDER data
i = 0;
rc = bcp_bind(o_hdbc2, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);
rc = bcp_bind(o_hdbc2, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);
rc = bcp_bind(o_hdbc2, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

for (i = first_new_order; i < last_new_order; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;

    rc = bcp_sendrow(o_hdbc2);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc2);

    new_order_rows_loaded++;
    CheckForCommit_Big(o_hdbc2, o_hstmt2, new_order_rows_loaded,
"new_order", &new_order_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc2);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc2);

    SQLFreeStmt(o_hstmt2, SQL_DROP);
    SQLDisconnect(o_hdbc2);
    SQLFreeConnect(o_hdbc2);

    // if build index after load..
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxnodcl");
}
}

//=====
// Function   : LoadOrderLineTable
//=====
void LoadOrderLineTable(LOADER_TIME_STRUCT *order_line_time_start)
{
    long          i;
    long          j;
    long          o_id;
    short         o_d_id;
    long          o_w_id;
    double        ol;
    long          ol_i_id;
    long          ol_supply_w_id;
}

```

```

short          ol_quantity;
double         ol_amount;
char           ol_dist_info[DIST_INFO_LEN+1];
char           ol_delivery_d[OL_DELIVERY_D_LEN+1];
RETCODE        rc;
DBINT          rcint;

// bind ORDER-LINE data
i = 0;
rc = bcp_bind(o_hdbc3, (BYTE *) &o_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &o_d_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT2,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &o_w_id, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol, 0, SQL_VARLEN_DATA, NULL, 0, SQLFLT8,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_i_id, 0, SQL_VARLEN_DATA, NULL, 0, SQLINT4,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_delivery_d, 0, OL_DELIVERY_D_LEN,
NULL, 0, SQLCHARACTER, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_amount, 0, SQL_VARLEN_DATA, NULL, 0,
SQLFLT8, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_supply_w_id, 0, SQL_VARLEN_DATA, NULL,
0, SQLINT4, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) &ol_quantity, 0, SQL_VARLEN_DATA, NULL, 0,
SQLINT2, ++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);
rc = bcp_bind(o_hdbc3, (BYTE *) ol_dist_info, 0, DIST_INFO_LEN, NULL, 0, 0,
++i);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

for (i = 0; i < orders_per_district; i++)
{
    o_id      = orders_buf[i].o_id;
    o_d_id    = orders_buf[i].o_d_id;
    o_w_id    = orders_buf[i].o_w_id;

    for (j=0; j < orders_buf[i].o.ol_cnt; j++)
    {
        ol          = orders_buf[i].o.ol[j].ol;
        ol_i_id    = orders_buf[i].o.ol[j].ol_i_id;
        ol_supply_w_id = orders_buf[i].o.ol[j].ol_supply_w_id;
        ol_quantity = orders_buf[i].o.ol[j].ol_quantity;
    }
}

```

```

        ol_amount      = orders_buf[i].o.ol[j].ol_amount;

strcpy(ol_delivery_d,orders_buf[i].o.ol[j].ol_delivery_d);

strcpy(ol_dist_info,orders_buf[i].o.ol[j].ol_dist_info);
    rc = bcp_sendrow(o_hdbc3);
    if (rc != SUCCEED)
        HandleErrorDBC(o_hdbc3);

    order_line_rows_loaded++;

    CheckForCommit_Big(o_hdbc3, o_hstmt3,
order_line_rows_loaded, "order_line", &order_line_time_start->time_start);
}

if ((o_w_id == aptr->num_warehouses) && (o_d_id == 10))
{
    rcint = bcp_done(o_hdbc3);
    if (rcint < 0)
        HandleErrorDBC(o_hdbc3);

    SQLFreeStmt(o_hstmt3, SQL_DROP);
    SQLDisconnect(o_hdbc3);
    SQLFreeConnect(o_hdbc3);

    // if build index after load...
    if ((aptr->build_index == 1) && (aptr->index_order == 0))
        BuildIndex("idxodlcl");
}
}

//=====
// Function : GetPermutation
//=====
void GetPermutation(int perm[], int n)
{
    int i, r, t;

    for (i=1;i<=n;i++)
        perm[i] = i;

    for (i=1;i<=n;i++)
    {
        r = RandomNumber(i,n);
        t = perm[i];
        perm[i] = perm[r];
        perm[r] = t;
    }
}

//=====
// Function : CheckForCommit
//=====
void CheckForCommit(HDBC hdbc,
                    HSTMT hstmt,

```

```

                    long rows_loaded,
                    char *table_name,
                    long *time_start)

{
    long time_end, time_diff;
    if ( !(rows_loaded % aptr->batch) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;
        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.2f
rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));
        *time_start = time_end;
    }
    return;
}

//=====
// Function : CheckForCommit_Big
//=====
void CheckForCommit_Big(HDBC hdbc,
                        HSTMT hstmt,
                        double rows_loaded,
                        char *table_name,
                        long *time_start)

{
    long time_end, time_diff;
    if ( !(fmod(rows_loaded,aptr->batch) ) )
    {
        time_end = (TimeNow() / MILLI);
        time_diff = time_end - *time_start;
        printf("-> Loaded %ld rows into %s in %ld sec - Total = %.0f
(%2f rps)\n",
               aptr->batch,
               table_name,
               time_diff,
               rows_loaded,
               (float) aptr->batch / (time_diff ? time_diff
: 1L));
        *time_start = time_end;
    }
    return;
}

//=====

```

```

// Function : OpenConnections
// =====
void OpenConnections()
{
    RETCODE        rc;

    char           szDriverString[300];
    char           szDriverStringOut[1024];
    SQLSMALLINT    cbDriverStringOut;

    SQLAllocHandle(SQL_HANDLE_ENV, SQL_NULL_HANDLE, &henv );
    SQLSetEnvAttr(henv, SQL_ATTR_ODBC_VERSION, (void*)SQL_OV_ODBC3, 0 );

    SQLAllocHandle(SQL_HANDLE_DBC, henv , &i_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &w_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &c_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc1);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc2);
    SQLAllocHandle(SQL_HANDLE_DBC, henv , &o_hdbc3);

    SQLSetConnectAttr(i_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(w_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(c_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc1, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc2, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );
    SQLSetConnectAttr(o_hdbc3, SQL_COPT_SS_BCP, (void *)SQL_BCP_ON,
SQL_IS_INTEGER );

    // Open connections to SQL Server
    // Connection 1
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (i_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(i_hdbc1);

    rc = SQLDriverConnect ( i_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,

```

```

SQL_DRIVER_NOPROMPT ) ;

    if ( (rc != SUCCEED) &&
         (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(i_hdbc1);
        printf("TPC-C Loader aborted!\n");
        exit(9);
    }

    // Connection 2
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (w_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(w_hdbc1);

    rc = SQLDriverConnect ( w_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
    if ( (rc != SUCCEED) &&
         (rc != SQL_SUCCESS_WITH_INFO) )
    {
        HandleErrorDBC(w_hdbc1);
        printf("TPC-C Loader aborted!\n");
        exit(9);
    }

    // Connection 3
    sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

    rc = SQLSetConnectOption (c_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
    if (rc != SUCCEED)
        HandleErrorDBC(c_hdbc1);

    rc = SQLDriverConnect ( c_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0] ,

```

```

        sizeof(szDriverStringOut),
        &cbDriverStringOut,
        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 4
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (c_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(c_hdbc2);

rc = SQLDriverConnect ( c_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(c_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 5
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc1, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc1);

rc = SQLDriverConnect ( o_hdbc1,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc1);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 6
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc2, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc2);

rc = SQLDriverConnect ( o_hdbc2,
NULL,
(SQLCHAR*)&szDriverString[0] ,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc2);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

// Connection 7
sprintf( szDriverString , "DRIVER={SQL
Server};SERVER=%s;UID=%s;PWD=%s;DATABASE=%s" ,
aptr->server,
aptr->user,
aptr->password,
aptr->database );

rc = SQLSetConnectOption (o_hdbc3, SQL_PACKET_SIZE, aptr->pack_size);
if (rc != SUCCEED)
    HandleErrorDBC(o_hdbc3);

rc = SQLDriverConnect ( o_hdbc3,
SQL_NTS,
(SQLCHAR*)&szDriverStringOut[0],
sizeof(szDriverStringOut),
&cbDriverStringOut,
SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

```

```

        NULL,
        (SQLCHAR*)&szDriverString[0] ,
        SQL_NTS,
        (SQLCHAR*)&szDriverStringOut[0],
        sizeof(szDriverStringOut),
        &cbDriverStringOut,
        SQL_DRIVER_NOPROMPT );
if ( (rc != SUCCEEDED) &&
     (rc != SQL_SUCCESS_WITH_INFO) )
{
    HandleErrorDBC(o_hdbc3);
    printf("TPC-C Loader aborted!\n");
    exit(9);
}

//=====
// Function name: BuildIndex
//=====
void BuildIndex(char *index_script)
{
    char cmd[256];

    printf("Starting index creation: %s\n",index_script);

    sprintf(cmd, "osql -S% -U% -P% -e -i%\\%s.sql > %s%log",
            aptr->server,
            aptr->user,
            aptr->password,
            aptr->index_script_path,
            index_script,
            aptr->log_path,
            index_script);

    system(cmd);

    printf("Finished index creation: %s\n",index_script);
}

//=====
// Function name: HandleErrorDBC
//=====
void HandleErrorDBC (SQLHDBC hdbc1)
{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN       NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    char         err_log_path[256];
    FILE        *fp1;

    NULL,
    SQL_NTS,
    SQL_NO_DATA )
    {
        i = 1;
        while (( rc2 = SQLGetDiagRec(SQL_HANDLE_DBC , hdbc1, i, SqlState ,
&NativeError,
                                         Msg, sizeof(Msg) , &MsgLen ) ) !=

        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
        _strdate(datebuf);

        printf( "[%s : %s] %s\n-->SQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }
        i++;
    }

    //=====
    // Function : HandleErrorSTMT
    //=====
void HandleErrorSTMT (HSTMT hstmt1)
{
    SQLCHAR      SqlState[6], Msg[SQL_MAX_MESSAGE_LENGTH];
    SQLLEN       NativeError;
    SQLSMALLINT i, MsgLen;
    SQLRETURN    rc2;
    char         timebuf[128];
    char         datebuf[128];
    char         err_log_path[256];
    FILE        *fp1;

    i = 1;
    while (( rc2 = SQLGetDiagRec(SQL_HANDLE_STMT , hstmt1, i, SqlState ,
&NativeError,
                                         Msg, sizeof(Msg) , &MsgLen ) ) !=

    SQL_NO_DATA )
    {
        if (total_db_errors >= MAX_SQL_ERRORS)
        {
            printf(">>> Maximum SQL errors of %d exceeded.
Terminating TPCCLDR.<<<\n",total_db_errors);
            exit(9);
        }
        total_db_errors++;

        sprintf( szLastError , "%s" , Msg );
        _strtime(timebuf);
}

```

```

        _strdate(datebuf);

        printf( "[%s : %s] %s\nSQLState: %s\n" , datebuf, timebuf,
szLastError, SqlState);

        strcpy(err_log_path,aptr->log_path);
        strcat(err_log_path,"tpccldr.err");
        fp1 = fopen(err_log_path,"a+");
        if (fp1 == NULL)
            printf("ERROR: Unable to open errorlog file.\n");
        else
        {
            fprintf(fp1, "[%s : %s] %s\nSQLState: %s\n" , datebuf,
timebuf, szLastError, SqlState);
            fclose(fp1);
        }
        i++;
    }

//=====
// Function : FormatDate
//=====
void FormatDate ( char* szTimeCOutput )
{
    struct tm when;
    time_t now;

    time( &now );
    when = *localtime( &now );

    mktime( &when );

    // odbc datetime format
    strftime( szTimeCOutput , 30 , "%Y-%m-%d %H:%M:%S.000" , &when );

    return;
}

```

Appendix C:

Tunable Parameters

Microsoft SQL Server 2005 Installation Procedures

Microsoft SQL Server 2005 Enterprise (x64) Edition
 Installation Procedures
 Type of installation: custom
 During the custom installation, use the default settings for all except the following two areas:
 Services accounts:
 SQL Server - local system account
 SQL Server Agent - local system account
 Set the sort order/collation as Latin1_General / BIN

Microsoft SQL Server 2005 Startup Commands

start sqlservr.exe -c -x -T3502 -T8011 -T8012 -T8018
 -T8019 -T661 -T8710 -T836 -T834

Where:
 -c Start SQL Server independently of the Windows NT Service Control Manager
 -x Disables the keeping of CPU time and cache hit ratio statistics
 -T3502-Prints a message to the SQL Server log at the start and end of each checkpoint
 -T8011-Disable diagnostics for resource monitor
 -T8012-Disable ring buffer for scheduler
 -T8018-Disable exceptions ring buffer
 -T8019-Disable stack collection for exception ring buffer
 -T661-Disable ghost writer
 -T8710-Disable HP checks.
 -T836-Make use of all physical memory
 -T834-Large Pages

File locations:
 sqlserver.exe- C:\Program Files\Microsoft SQL Server\MSSQL.1\MSSQL\Binn

ERRORLOG-C:\Program Files\Microsoft SQL Server\MSSQL.1\MSSQL\LOG

Microsoft SQL Server Configuration Parameters

name	maximum	config_value	run_value	minimum
<hr/>				
Ad Hoc Distributed Queries			0	
1 affinity I/O mask	1	0	0	-2147483648
2147483647 affinity mask	2147483647	0	0	-2147483648
2147483647 affinity64 I/O mask	2147483647	255	255	-2147483648
2147483647 affinity64 mask	2147483647	0	0	-2147483648
2147483647 Agent XPs	2147483647	0	0	0
1 allow updates	1	0	0	0
1 awe enabled	1	0	0	0
1 blocked process threshold	1	0	0	0
86400 c2 audit mode	86400	0	0	0
1 clr enabled	1	0	0	0
1 cost threshold for parallelism	1	0	0	0
32767 cross db ownership chaining	32767	5	5	0
1 cursor threshold	1	0	0	-1
2147483647 Database Mail XPs	2147483647	-1	-1	0
1 default full-text language	1	0	0	0
2147483647 default language	2147483647	1033	1033	0
9999 default trace enabled	9999	0	0	0
1 disallow results from triggers	1	0	0	0
1 fill factor (%)	1	0	0	0
100 ft crawl bandwidth (max)	100	0	0	0
32767 ft crawl bandwidth (min)	32767	100	100	0
32767 scan for startup procs	32767	0	0	0

ft notify bandwidth (max)	100	100	0
32767 ft notify bandwidth (min)	0	0	0
32767 in-doubt xact resolution	0	0	0
2 locks	0	0	0
2147483647 index create memory (KB)	704	0	0
2147483647 lightweight pooling	0	0	0
1 locks	1	1	1
2147483647 max degree of parallelism	5000	0	0
64 max full-text crawl range	1	1	0
256 max server memory (MB)	4	4	16
2147483647 max text repl size (B)	62000	62000	0
2147483647 max worker threads	65536	65536	128
32767 media retention	700	700	0
365 min memory per query (KB)	0	0	512
2147483647 min server memory (MB)	1024	1024	0
2147483647 nested triggers	0	0	0
1 network packet size (B)	1	1	512
32767 Ole Automation Procedures	4096	4096	0
1 open objects	0	0	0
2147483647 PH timeout (s)	0	0	1
3600 precompute rank	60	60	0
1 priority boost	0	0	0
1 query governor cost limit	1	1	0
2147483647 query wait (s)	0	0	-1
2147483647 recovery interval (min)	-1	-1	0
32767 remote access	32767	32767	0
1 remote admin connections	1	1	0
1 remote login timeout (s)	0	0	0
2147483647 remote proc trans	20	20	0
1 remote query timeout (s)	0	0	0
2147483647 Replication XPs	600	600	0
1 scan for startup procs	0	0	0
1	0	0	0

```

server trigger recursion          0
1      1      1
set working set size             0
1      0      0
show advanced options            0
1      1      1
SMO and DMO XPs                0
1      1      1
SQL Mail XPs                   0
1      0      0
transform noise words            0
1      0      0
two digit year cutoff           1753
9999    2049    2049
user connections                 0
32767   0      0
user options                     0
32767   0      0
Web Assistant Procedures         0
1      0      0
xp_cmdshell                      0
1      0      0

```

Microsoft SQL Server Node Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration
Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:32 PM

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node0
Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:33 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\90\NodeConfiguration\Node1
Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:33 PM
Value 0
Name: CPUMask
Type: REG_DWORD
Data: 0xf0

Microsoft SQL Server Super Socket Configuration Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp

Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:33 PM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: ListenOnAllIPs
Type: REG_DWORD
Data: 0x1

Value 2
Name: NoDelay
Type: REG_DWORD
Data: 0x1

Value 3
Name: KeepAlive
Type: REG_DWORD
Data: 0x7530

Value 4
Name: DisplayName
Type: REG_SZ
Data: TCP/IP

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1

Class Name: <NO CLASS>
Last Write Time: 10/12/2006 - 10:27 AM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: Active
Type: REG_DWORD
Data: 0x1

Value 2
Name: TcpPort
Type: REG_SZ

Data: 2001

Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:

Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address

Value 5
Name: IpAddress
Type: REG_SZ
Data: 130.168.206.77

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP2

Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:31 PM

Value 0
Name: Enabled
Type: REG_DWORD
Data: 0x1

Value 1
Name: Active
Type: REG_DWORD
Data: 0x1

Value 2
Name: TcpPort
Type: REG_SZ
Data: 2002

Value 3
Name: TcpDynamicPorts
Type: REG_SZ
Data:

Value 4
Name: DisplayName
Type: REG_SZ
Data: Specific IP Address

Value 5
Name: IpAddress
Type: REG_SZ
Data: 130.169.206.77

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Microsoft SQL Server\MSSQL.1\MSSQLServer\SuperSocketNetLib\Tcp\IP1

Class Name: <NO CLASS>
Last Write Time: 10/25/2006 - 1:31 PM

Value 0
Name: TcpPort
Type: REG_SZ

```
Data:          2001[0x1], 2002[0x2]

Value 1
Name:          TcpDynamicPorts
Type:          REG_SZ
Data:

Value 2
Name:          DisplayName
Type:          REG_SZ
Data:          Any IP Address
```

Database Server System Configuration

System Information report written at: 11/01/06
14:27:00
System Name: QUAD
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003 Enterprise x64 Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	QUAD
System Manufacturer	HP
System Model	ProLiant ML370 G5
System Type	x64-based PC
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2657 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2657 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
Processor	EM64T Family 6 Model 15 Stepping 7
GenuineIntel	-2667 Mhz
BIOS Version/Date	HP P57, 11/2/2006
SMBIOS Version	2.3
Windows Directory	C:\WINDOWS
System Directory	C:\WINDOWS\system32
Boot Device	\Device\HarddiskVolume28
Locale	United States
Hardware Abstraction Layer	Version = "5.2.3790.1830 (srvo3_spl_rtm.050324-1447)"
User Name	Not Available

Time Zone	Central Standard Time
Total Physical Memory	64,511.11
Available Physical Memory	61.31 GB
Total Virtual Memory	63.45 GB
Available Virtual Memory	63.22 GB
Page File Space	2.00 GB
Page File C:\pagefile.sys	

[Hardware Resources]

[Conflicts/Sharing]

Resource	Device	
I/O Port	0x0000A000-0x0000AFFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x0000A000-0x0000AFFF	Smart Array
P800 Controller (Non-Miniport)		
I/O Port	0x00000000-0x00000CF7	PCI bus
I/O Port	0x00000000-0x00000CF7	Direct memory access controller
IRQ 5	Base System Device	
IRQ 5	PCI Device	
I/O Port	0x000002F8-0x000002FF	Motherboard resources
I/O Port	0x000002F8-0x000002FF	Communications Port (COM2)
I/O Port	0x000009000-0x00009FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x000009000-0x00009FFF	Smart Array
P800 Controller (Non-Miniport)		
I/O Port	0x000006000-0x00006FFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x000006000-0x00006FFF	Smart Array
P800 Controller (Non-Miniport)		
I/O Port	0x0000B000-0x0000BFFF	PCI standard
PCI-to-PCI bridge		
I/O Port	0x0000B000-0x0000BFFF	Smart Array
P800 Controller (Non-Miniport)		
IRQ 16	PCI standard PCI-to-PCI bridge	
IRQ 16	Smart Array P800 Controller (Non-Miniport)	
IRQ 16	PCI standard PCI-to-PCI bridge	
IRQ 16	HP NC373i Virtual Bus Device	
IRQ 16	Standard Universal PCI to USB Host Controller	
IRQ 16	Standard Enhanced PCI to USB Host Controller	
Memory Address	0xFD300000-0xFD6FFFFF	PCI standard
PCI-to-PCI bridge		
Memory Address	0xFD300000-0xFD6FFFFF	PCI standard
PCI-to-PCI bridge		
IRQ 17	PCI standard PCI-to-PCI bridge	

IRQ 17	Smart Array P800 Controller (Non-Miniport)	
IRQ 17	PCI standard PCI-to-PCI bridge	
IRQ 17	HP NC373i Virtual Bus Device	
IRQ 17	Standard Universal PCI to USB Host Controller	
I/O Port 0x00005000-0x00007FFF		PCI standard
PCI-to-PCI bridge		
I/O Port 0x00005000-0x00007FFF		PCI standard
PCI-to-PCI bridge		
I/O Port 0x00005000-0x00007FFF		PCI standard
PCI-to-PCI bridge		
I/O Port 0x00005000-0x00007FFF		Smart Array
P800 Controller (Non-Miniport)		
IRQ 18	PCI standard PCI-to-PCI bridge	
IRQ 18	Smart Array P800 Controller (Non-Miniport)	
IRQ 18	Smart Array P800 Controller (Non-Miniport)	
IRQ 18	Smart Array P800 Controller (Non-Miniport)	
IRQ 18	Standard Universal PCI to USB Host Controller	
IRQ 19	Smart Array P800 Controller (Non-Miniport)	
IRQ 19	Smart Array P800 Controller (Non-Miniport)	
IRQ 19	Standard Universal PCI to USB Host Controller	
Memory Address 0xA0000-0xBFFFF		PCI bus
Memory Address 0xA0000-0xBFFFF		ATI ES1000
Memory Address 0xFA000000-0xFBFFFFFF		PCI standard
PCI-to-PCI bridge		
Memory Address 0xFA000000-0xFBFFFFFF		PCI standard
PCI-to-PCI bridge		
Memory Address 0xFA000000-0xFBFFFFFF		HP NC373i
Virtual Bus Device		
Memory Address 0xF8000000-0xF9FFFFFF		PCI standard
PCI-to-PCI bridge		
Memory Address 0xF8000000-0xF9FFFFFF		PCI standard
PCI-to-PCI bridge		
Memory Address 0xF8000000-0xF9FFFFFF		HP NC373i
Virtual Bus Device		
I/O Port 0x00007000-0x00007FFF		PCI standard
PCI-to-PCI bridge		
I/O Port 0x00007000-0x00007FFF		Smart Array
P600 Controller		
I/O Port 0x00004000-0x00004FFF		PCI standard
PCI-to-PCI bridge		
I/O Port 0x00004000-0x00004FFF		Smart Array
P800 Controller (Non-Miniport)		
I/O Port 0x00008000-0x00008FFF		PCI standard
PCI-to-PCI bridge		

I/O Port 0x00008000-0x00008FFF	Smart Array P800 Controller (Non-Miniport)	0x00001060-0x0000107F to USB Host Controller	Standard Universal PCI	0x00000064-0x00000064	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[DMA]		0x00003000-0x000030FF	OK ATI ES1000	0x0000002E-0x0000002F	OK Extended IO Bus
Resource Device Status		0x00003B0-0x00003BB	ATI ES1000	0x0000004E-0x0000004F	OK Extended IO Bus
Channel 7 Direct memory access controller	OK	0x00003C0-0x00003DF	ATI ES1000	0x00000620-0x0000065F	OK Extended IO Bus
[Forced Hardware]		0x00002800-0x000028FF	Base System Device	0x00000680-0x0000069F	OK Extended IO Bus
Device PNP Device ID		0x00003400-0x000034FF	Base System Device	0x00000600-0x0000061F	OK Extended IO Bus
[I/O]		0x00003800-0x0000381F to USB Host Controller	Standard Universal PCI	0x00000660-0x0000067F	OK Extended IO Bus
Resource Device Status		0x00000070-0x00000077 OK	OK Motherboard resources	0x00000300-0x0000030F	OK Extended IO Bus
0x00000000-0x00000CF7	PCI bus OK	0x00000408-0x0000040F OK	Motherboard resources	0x000003F8-0x000003FF (COM1) OK	Communications Port
0x00000000-0x00000CF7 controller OK	Direct memory access	0x000004D0-0x000004D1 OK	Motherboard resources	0x00000500-0x0000050F PCI IDE Controller OK	Standard Dual Channel
0x00000D00-0x0000FFFF	PCI bus OK	0x00000020-0x0000003F OK	Motherboard resources	0x000001F0-0x000001F7 Primary IDE Channel OK	
0x000005000-0x00007FFF bridge OK	PCI standard PCI-to-PCI	0x00000A0-0x00000BF OK	Motherboard resources	0x000003F6-0x000003F6 Primary IDE Channel OK	
0x000005000-0x00007FFF bridge OK	PCI standard PCI-to-PCI	0x00000090-0x0000009F OK	Motherboard resources	0x00000170-0x00000177 Secondary IDE Channel OK	
0x000005000-0x00007FFF bridge OK	PCI standard PCI-to-PCI	0x00000050-0x00000053 OK	Motherboard resources	0x00000376-0x00000376 Secondary IDE Channel OK	
Controller (Non-Miniport)	Smart Array P800	0x00000700-0x0000071F OK	Motherboard resources	[IRQs]	
0x00006000-0x00006FFF bridge OK	PCI standard PCI-to-PCI	0x00000800-0x0000083F OK	Motherboard resources	Resource Device Status	
0x00006000-0x00006FFF Controller (Non-Miniport)	Smart Array P800	0x00000900-0x0000097F OK	Motherboard resources	IRQ 9 Microsoft ACPI-Compliant System	OK
0x00007000-0x00007FFF bridge OK	PCI standard PCI-to-PCI	0x00000010-0x0000001F OK	Motherboard resources	IRQ 16 PCI standard PCI-to-PCI bridge	OK
0x00007000-0x00007FFF Controller OK	Smart Array P600	0x00000C80-0x00000C83 OK	Motherboard resources	IRQ 16 Smart Array P800 Controller (Non-Miniport)	
0x00004000-0x00004FFF bridge OK	PCI standard PCI-to-PCI	0x00000CD4-0x00000CD7 OK	Motherboard resources	IRQ 16 PCI standard PCI-to-PCI bridge	OK
0x00004000-0x00004FFF Controller (Non-Miniport)	Smart Array P800	0x00000F50-0x00000F58 OK	Motherboard resources	IRQ 16 HP NC373i Virtual Bus Device	OK
0x00008000-0x00008FFF bridge OK	PCI standard PCI-to-PCI	0x00000F0-0x00000F0 OK	Motherboard resources	IRQ 16 Standard Universal PCI to USB Host	
0x00008000-0x00008FFF Controller (Non-Miniport)	Smart Array P800	0x00000CA0-0x00000CA1 OK	Motherboard resources	Controller OK	
0x00009000-0x00009FFF bridge OK	PCI standard PCI-to-PCI	0x00000CA4-0x00000CA5 OK	Motherboard resources	IRQ 16 Standard Enhanced PCI to USB Host	
0x00009000-0x00009FFF Controller (Non-Miniport)	Smart Array P800	0x000002F8-0x000002FF (COM2) OK	Motherboard resources	IRQ 17 PCI standard PCI-to-PCI bridge	OK
0x0000A000-0x0000AFFF bridge OK	PCI standard PCI-to-PCI	0x0000002F8-0x0000002FF OK	Motherboard resources	IRQ 17 Smart Array P800 Controller (Non-Miniport)	
0x0000A000-0x0000AFFF Controller (Non-Miniport)	Smart Array P800	0x00000CA2-0x00000CA3 OK	System timer	IRQ 17 PCI standard PCI-to-PCI bridge	OK
0x0000B000-0x0000BFFF bridge OK	PCI standard PCI-to-PCI	0x00000040-0x00000043 OK	System timer	IRQ 17 HP NC373i Virtual Bus Device	OK
0x0000B000-0x0000BFFF Controller (Non-Miniport)	Smart Array P800	0x00000080-0x0000008F controller OK	System timer	IRQ 17 Standard Universal PCI to USB Host	
0x00001000-0x0000101F to USB Host Controller	Standard Universal PCI	0x000000C0-0x000000DF controller OK	System timer	Controller OK	
0x00001020-0x0000103F to USB Host Controller	Standard Universal PCI	0x00000061-0x00000061 OK	System speaker	IRQ 18 PCI standard PCI-to-PCI bridge	OK
0x00001040-0x0000105F to USB Host Controller	Standard Universal PCI	0x00000060-0x00000060 OK	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard	IRQ 18 Smart Array P800 Controller (Non-Miniport)	

IRQ 18 Standard Universal PCI to USB Host
 Controller OK
 IRQ 25 Smart Array P600 Controller OK
 IRQ 19 Smart Array P800 Controller (Non-Miniport)
 OK
 IRQ 19 Smart Array P800 Controller (Non-Miniport)
 OK
 IRQ 19 Standard Universal PCI to USB Host
 Controller OK
 IRQ 23 ATI ES1000 OK
 IRQ 5 Base System Device OK
 IRQ 5 PCI Device OK
 IRQ 10 Base System Device OK
 IRQ 22 Standard Universal PCI to USB Host
 Controller OK
 IRQ 0 System timer OK
 IRQ 1 Standard 101/102-Key or Microsoft Natural
 PS/2 Keyboard OK
 IRQ 12 PS/2 Compatible Mouse OK
 IRQ 4 Communications Port (COM1) OK
 IRQ 14 Primary IDE Channel OK
 IRQ 3 Communications Port (COM2) OK

[Memory]

Resource	Device	Status
0xA0000-0xBFFFF	PCI bus	OK
0xA0000-0xBFFFF	ATI ES1000	OK
0xD0000000-0xDFFFFFFF	PCI bus	OK
0xF0000000-0xFEBFFFFF	PCI bus	OK
0xFD200000-0xFD7FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD300000-0xFD6FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD400000-0xFD4FFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD3F0000-0xFD3F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD500000-0xFD6FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD600000-0xFD6FFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD5F0000-0xFD5F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD700000-0xFD7FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD7F0000-0xFD7F1FFF	Smart Array P600	
Controller	OK	
0xFD780000-0xFD7BFFFF	Smart Array P600	
Controller	OK	
0xFD000000-0xFD1FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD100000-0xFD1FFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD0F0000-0xFD0F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFD800000-0xFD9FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFD900000-0xFD9FFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	

Resource	Device	Status
0xFD8F0000-0xFD8F0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDA00000-0xFDBFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDB00000-0xFDBFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDAF0000-0xFDAF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDC00000-0xFDDFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDD00000-0xFDDFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDCF0000-0xFDCF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDE00000-0xFDFFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFDFF0000-0xFDFFFFFFFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xFDEF0000-0xFDEF0FFF	Smart Array P800	
Controller (Non-Miniport)	OK	
0xF8000000-0x9F9FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xF8000000-0x9F9FFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xF8000000-0x9F9FFFFFFF	HP NC373i Virtual Bus	
Device	OK	
0xFA000000-0xFBFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0xFA000000-0xFBFFFFFF	PCI standard PCI-to-PCI	
bridge	OK	
0XA000000-0xFBFFFFFF	HP NC373i Virtual Bus	
Device	OK	
0XF7DF0000-0xF7DF03FF	Standard Enhanced PCI	
to USB Host Controller	OK	
0XD800000-0xDPFFFFFF	ATI ES1000	OK
0XF7FF0000-0XF7FFFFFF	ATI ES1000	OK
0XF7FE0000-0XF7FE01FF	Base System Device	OK
0XF7FD0000-0XF7FD07FF	Base System Device	OK
0XF7FC0000-0XF7FC1FFF	Base System Device	OK
0XF7F00000-0XF7F7FFFF	Base System Device	OK
0XF7EF0000-0XF7EF00FF	PCI Device	OK
0xE0000000-0xEFFFFFFF	Motherboard resources	
OK		
0xFE000000-0xFEBFFFFFF	Motherboard resources	
OK		
0xFED00000-0XFED003FF	High precision event	
timer	OK	

[Components]
 [Multimedia]

CODEC	Manufacturer	Description
CODEC	Manufacturer	Description
c:\windows\system32\imaadp32.acm	Corporation	C:\WINDOWS\system32\IMAADP32.ACML 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.00 KB (24,576 bytes) 3/25/2005
c:\windows\system32\msadp32.acm	Corporation	C:\WINDOWS\system32\MSADP32.ACML 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 23.50 KB (24,064 bytes) 3/25/2005
c:\windows\system32\msg711.acm	Corporation	C:\WINDOWS\system32\MSG711.ACML 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 13.50 KB (13,824 bytes) 3/25/2005
c:\windows\system32\msgsm32.acm	Corporation	C:\WINDOWS\system32\MSGSM32.ACML 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 34.50 KB (35,328 bytes) 3/25/2005
c:\windows\system32\tssoft32.acm	INC.	C:\WINDOWS\system32\TSSOFT32.ACML 1.01 13.50 KB (13,824 bytes) 3/25/2005 6:00 AM
[Video Codecs]		
CODEC	Manufacturer	Description
c:\windows\system32\iyuv_32.dll	Corporation	C:\WINDOWS\system32\IYUV_32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 52.50 KB (53,760 bytes) 3/24/2005
c:\windows\system32\msrle32.dll	Corporation	C:\WINDOWS\system32\MSRLE32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 15.50 KB (15,872 bytes) 3/25/2005
c:\windows\system32\msvidc32.dll	Corporation	C:\WINDOWS\system32\MSVIDC32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 43.00 KB (44,032 bytes) 3/25/2005
c:\windows\system32\msyuv.dll	Microsoft Corporation	C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 21.00 KB (21,504 bytes) 3/24/2005 11:21 AM

```
c:\windows\system32\tsbyuv.dll      Microsoft
Corporation          OK
C:\WINDOWS\system32\TSBYUV.DLL
5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
12.50 KB (12,800 bytes)   3/24/2005
```

11:34 AM

[CD-ROM]

Item	Value
Drive	D:
Description	CD-ROM Drive
Media Loaded	No
Media Type	CD-ROM
Name	HL-DT-ST CD-ROM GCR-8486B
Manufacturer	(Standard CD-ROM drives)
Status	OK
Transfer Rate	Not Available
SCSI Target ID	0
PNP Device ID	IDE\CDROMHL-DT-ST_CD-ROM_GCR-8486B
	2.00 \5&5FD9AC6&0&0.0.0
Driver	c:\windows\system32\drivers\cdrom.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 75.50 KB (77,312 bytes), 3/25/2005 6:00 AM)

[Sound Device]

Item	Value
------	-------

[Display]

Item	Value
Name	ATI ES1000
PNP Device ID	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0
	2\4&2014205D&0&18F0
Adapter Type	ATI ES1000 (0x515E), ATI Technologies Inc. compatible
Adapter Description	ATI ES1000
Adapter RAM	32.00 MB (33,554,432 bytes)
Installed Drivers	ati2dvg.dll
Driver Version	6.14.10.6583
INF File	oem1.inf (ati2mtag_RN50 section)
Color Planes	1
Color Table Entries	4294967296
Resolution	1024 x 768 x 60 hertz
Bits/Pixel	32
Memory Address	0xD8000000-0xFFFFFFFF
I/O Port	0x00003000-0x000030FF
Memory Address	0xF7FF0000-0xF7FFFFFF
IRQ Channel	IRQ 23
I/O Port	0x000003B0-0x000003BB
I/O Port	0x000003C0-0x000003DF
Memory Address	0xA0000-0xBFFFF
Driver	c:\windows\system32\drivers\ati2mtag.sys
	(6.14.10.6583, 1.97 MB (2,066,432 bytes), 10/11/2006 2:04 PM)

[Infrared]

Item	Value
------	-------

[Input]

[Keyboard]

Item	Value
Description	USB Human Interface Device
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00
	00
Number of Function Keys	12
Driver	c:\windows\system32\drivers\hidusb.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 3/25/2005 6:00 AM)
Description	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
Name	Enhanced (101- or 102-key)
Layout	00000409
PNP Device ID	ACPI\PNP0303\4&2AA4AD3D&0
Number of Function Keys	12
I/O Port	0x00000060-0x00000060
I/O Port	0x00000064-0x00000064
IRQ Channel	IRQ 1
Driver	c:\windows\system32\drivers\i8042prt.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2005 6:00 AM)

[Pointing Device]

Item	Value
Hardware Type	USB Human Interface Device
Number of Buttons	5
Status	OK
PNP Device ID	USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00
	01
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
Driver	c:\windows\system32\drivers\hidusb.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 18.50 KB (18,944 bytes), 3/25/2005 6:00 AM)
Hardware Type	PS/2 Compatible Mouse
Number of Buttons	5
Status	OK
PNP Device ID	ACPI\PNP0F13\4&2AA4AD3D&0
Power Management Supported	No
Double Click Threshold	6
Handedness	Right Handed Operation
IRQ Channel	IRQ 12
Driver	c:\windows\system32\drivers\i8042prt.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2005 6:00 AM)

[Modem]

Item	Value
------	-------

[Network]

[Adapter]

Item	Value
Name	[00000001] RAS Async Adapter
Adapter Type	Not Available
Product Type	RAS Async Adapter
Installed Yes	
PNP Device ID	Not Available
Last Reset	11/1/2006 1:12 PM
Index	1
Service Name	AsyncMac
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Name	[00000002] WAN Miniport (L2TP)
Adapter Type	Not Available
Product Type	WAN Miniport (L2TP)
Installed Yes	
PNP Device ID	ROOT\MS_L2TPMINIPORT\0000
Last Reset	11/1/2006 1:12 PM
Index	2
Service Name	RasL2tp
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\rasl2tp.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 132.00 KB (135,168 bytes), 3/25/2005 6:00 AM)
Name	[00000003] WAN Miniport (PPTP)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPTP)
Installed Yes	
PNP Device ID	ROOT\MS_PPTPMINIPORT\0000
Last Reset	11/1/2006 1:12 PM
Index	3
Service Name	PptpMiniport
IP Address	Not Available
IP Subnet	Not Available
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	50:50:54:50:30:30
Driver	c:\windows\system32\drivers\raspptp.sys
	(5.2.3790.1830 (srv03_sp1_rtm.050324-1447), 117.50 KB (120,320 bytes), 3/25/2005 6:00 AM)

Name	[00000004] WAN Miniport (PPPOE)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPPOE)
Installed	Yes
PNP Device ID	ROOT\MS_PPPOEMINIPORT\0000
Last Reset	11/1/2006 1:12 PM
Index	4
Service Name	RasPppoe
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	33:50:6F:45:30:30
Driver	c:\windows\system32\drivers\raspppoe.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 67.50 KB (69,120 bytes), 3/25/2005 6:00 AM)
Name	[00000005] Direct Parallel
Adapter Type	Not Available
Product Type	Direct Parallel
Installed	Yes
PNP Device ID	ROOT\MS_PTIMINIPORT\0000
Last Reset	11/1/2006 1:12 PM
Index	5
Service Name	Raspti
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\raspti.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 30.50 KB (31,232 bytes), 3/25/2005 6:00 AM)
Name	[00000006] WAN Miniport (IP)
Adapter Type	Not Available
Product Type	WAN Miniport (IP)
Installed	Yes
PNP Device ID	ROOT\MS_NDISWANIP\0000
Last Reset	11/1/2006 1:12 PM
Index	6
Service Name	NdisWan
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\ndiswan.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 157.50 KB (161,280 bytes), 3/25/2005 6:00 AM)
Name	[00000007] HP NC373i Multifunction Gigabit
Server Adapter	Ethernet 802.3

Product Type	HP NC373i Multifunction Gigabit
Server Adapter	
Installed	Yes
PNP Device ID	B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R EV_12\6&154EFE07&0&20050500
Last Reset	11/1/2006 1:12 PM
Index	7
Service Name	l2nd
IP Address	130.169.206.77
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:17:A4:F5:55:D4
Driver	c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 10/11/2006 2:07 PM)
Name	[00000008] HP NC373i Multifunction Gigabit
Adapter Type	Ethernet 802.3
Product Type	HP NC373i Multifunction Gigabit
Server Adapter	
Installed	Yes
PNP Device ID	B06BDRV\L2ND&PCI_164C14E4&SUBSYS_7038103C&R EV_12\6&183F41DD&0&20050300
Last Reset	11/1/2006 1:12 PM
Index	8
Service Name	l2nd
IP Address	130.168.206.77
IP Subnet	255.255.0.0
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:17:A4:F5:55:D2
Driver	c:\windows\system32\drivers\bxnd52a.sys (2.8.13.0 built by: WinDDK, 81.00 KB (82,944 bytes), 10/11/2006 2:07 PM)
[Protocol]	
Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
[WinSock]	
Item	Value
File	c:\windows\system32\wsock32.dll

Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)

Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes

Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Size 24.50 KB (25,088 bytes)
 Version 5.2.3790.1830 (srv03_spl_rtm.050324-1447)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK
PNP Device ID	ROOT*PNP0501\1_0_17_1_0_0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes
Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLSD	Yes
Supports RLSD	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXMit Threshold	512
XOn Character	17
XOnXMit Threshold	2048
XOnXOff InFlow Control	0
XOnXOff OutFlow Control	0
I/O Port	0x000003F8-0x000003FF
Driver	c:\windows\system32\drivers\serial.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 118.50 KB (121,344 bytes), 3/25/2005 6:00 AM)
Name	Communications Port (COM1)
Status	OK
PNP Device ID	ACPI\PNP0501\0
Maximum Input Buffer Size	0
Maximum Output Buffer Size	No
Settable Baud Rate	Yes

Settable Data Bits	Yes
Settable Flow Control	Yes
Settable Parity	Yes
Settable Parity Check	Yes
Settable Stop Bits	Yes
Settable RLSD	Yes
Supports RLSD	Yes
Supports 16 Bit Mode	No
Supports Special Characters	No
Baud Rate	9600
Bits/Byte	8
Stop Bits	1
Parity	None
Busy	No
Abort Read/Write on Error	No
Binary Mode Enabled	Yes
Continue XMit on XOff	No
CTS Outflow Control	No
Discard NULL Bytes	No
DSR Outflow Control	0
DSR Sensitivity	0
DTR Flow Control Type	Enable
EOF Character	0
Error Replace Character	0
Error Replacement Enabled	No
Event Character	0
Parity Check Enabled	No
RTS Flow Control Type	Enable
XOff Character	19
XOffXMit Threshold	512
XOn Character	17
XOnXMit Threshold	2048
XOnXOff InFlow Control	0
XOnXOff OutFlow Control	0
I/O Port	0x000002F8-0x000002FF
Driver	c:\windows\system32\drivers\serial.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 118.50 KB (121,344 bytes), 3/25/2005 6:00 AM)
Item	Value

[Storage]

[Drives]

Item	Value
Drive	C:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	33.88 GB (36,381,306,880 bytes)
Free Space	23.43 GB (25,156,980,736 bytes)
Volume Name	
Volume Serial Number	5036A78C
Drive	D:
Description	CD-ROM Disc

Drive	E:
Description	Local Fixed Disk
Compressed	Not Available
File System	Not Available
Size	Not Available
Free Space	Not Available
Volume Name	Not Available
Volume Serial Number	Not Available

Drive	V:
Description	Network Connection
Provider Name	\\\inforb\audit_fdr

Drive	W:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	734.04 GB (788,170,969,088 bytes)
Free Space	18.00 GB (19,325,022,208 bytes)

Volume Name	TpccBack1
Volume Serial Number	606DCC72

Drive	X:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	734.04 GB (788,170,969,088 bytes)
Free Space	18.00 GB (19,325,153,280 bytes)

Volume Name	TpccBack2
Volume Serial Number	C87166FE

Drive	Y:
Description	Local Fixed Disk
Compressed	No
File System	NTFS
Size	734.04 GB (788,170,969,088 bytes)
Free Space	18.00 GB (19,325,153,280 bytes)

Volume Name	TpccBack3
Volume Serial Number	647D38AC

Drive	Z:
Description	Local Fixed Disk
Compressed	No
File System	NTFS

Size	734.04 GB (788,170,969,088 bytes)
Free Space	17.99 GB (19,316,224,000 bytes)

Volume Name	TpccBack4
Volume Serial Number	0C943257

[Disks]

Item	Value
Description	\\.\PHYSICALDRIVE24
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk

Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #24, Partition #0
 Partition Size 101.46 GB (108,943,801,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE25
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #25, Partition #0
 Partition Size 57.02 GB (61,228,952,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE26
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 734.04 GB (788,171,005,440 bytes)
 Total Cylinders 95,823
 Total Sectors 1,539,396,495
 Total Tracks 24,434,865
 Tracks/Cylinder 255
 Partition Disk #26, Partition #0
 Partition Size 734.04 GB (788,170,973,184 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE27
 Manufacturer Not Available
 Model Not Available

Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #27, Partition #0
 Partition Size 101.46 GB (108,943,801,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE28
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #28, Partition #0
 Partition Size 57.02 GB (61,228,952,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE18
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 820.01 GB (880,483,322,880 bytes)
 Total Cylinders 107,046
 Total Sectors 1,719,693,990
 Total Tracks 27,296,730
 Tracks/Cylinder 255
 Partition Disk #18, Partition #0
 Partition Size 820.01 GB (880,483,290,624 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE15
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #15, Partition #0
 Partition Size 101.46 GB (108,943,801,344 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE16
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #16, Partition #0
 Partition Size 57.02 GB (61,228,952,064 bytes)

Partition Starting Offset 32,256 bytes

Description \\.\PHYSICALDRIVE17
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 0
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 734.04 GB (788,171,005,440 bytes)
 Total Cylinders 95,823
 Total Sectors 1,539,396,495
 Total Tracks 24,434,865
 Tracks/Cylinder 255

Description \\.\PHYSICALDRIVE19

Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	101.46 GB (108,943,833,600 bytes)
Total Cylinders	13,245
Total Sectors	212,780,925
Total Tracks	3,377,475
Tracks/Cylinder	255
Partition Disk #19, Partition #0	101.46 GB (108,943,801,344 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\PHYSICALDRIVE20
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	57.02 GB (61,228,984,320 bytes)
Total Cylinders	7,444
Total Sectors	119,587,860
Total Tracks	1,898,220
Tracks/Cylinder	255
Partition Disk #20, Partition #0	57.02 GB (61,228,952,064 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\PHYSICALDRIVE21
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	734.04 GB (788,171,005,440 bytes)
Total Cylinders	95,823
Total Sectors	1,539,396,495
Total Tracks	24,434,865
Tracks/Cylinder	255
Partition Disk #21, Partition #0	734.04 GB (788,170,973,184 bytes)

Partition Starting Offset	32,256 bytes
Description	\.\PHYSICALDRIVE22
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	101.46 GB (108,943,833,600 bytes)
Total Cylinders	13,245
Total Sectors	212,780,925
Total Tracks	3,377,475
Tracks/Cylinder	255
Partition Disk #22, Partition #0	101.46 GB (108,943,801,344 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\PHYSICALDRIVE23
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	57.02 GB (61,228,984,320 bytes)
Total Cylinders	7,444
Total Sectors	119,587,860
Total Tracks	1,898,220
Tracks/Cylinder	255
Partition Disk #23, Partition #0	57.02 GB (61,228,952,064 bytes)
Partition Starting Offset	32,256 bytes
Description	\.\PHYSICALDRIVE10
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	101.46 GB (108,943,833,600 bytes)
Total Cylinders	13,245
Total Sectors	212,780,925
Total Tracks	3,377,475
Tracks/Cylinder	255

Partition Disk #10, Partition #0	101.46 GB (108,943,425,536 bytes)
Partition Starting Offset	16,384 bytes
Description	\.\PHYSICALDRIVE11
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	57.02 GB (61,228,984,320 bytes)
Total Cylinders	7,444
Total Sectors	119,587,860
Total Tracks	1,898,220
Tracks/Cylinder	255
Partition Disk #11, Partition #0	57.03 GB (61,231,579,136 bytes)
Partition Starting Offset	16,384 bytes
Description	\.\PHYSICALDRIVE12
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	0
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	734.04 GB (788,171,005,440 bytes)
Total Cylinders	95,823
Total Sectors	1,539,396,495
Total Tracks	24,434,865
Tracks/Cylinder	255
Partition Starting Offset	16,384 bytes
Description	\.\PHYSICALDRIVE13
Manufacturer	Not Available
Model	Not Available
Bytes/Sector	512
Media Loaded	Yes
Media Type	Fixed hard disk
Partitions	1
SCSI Bus	Not Available
SCSI Logical Unit	Not Available
SCSI Port	Not Available
SCSI Target ID	Not Available
Sectors/Track	63
Size	101.46 GB (108,943,833,600 bytes)
Total Cylinders	13,245
Total Sectors	212,780,925
Total Tracks	3,377,475
Tracks/Cylinder	255
Partition Disk #13, Partition #0	101.46 GB (108,943,425,536 bytes)

Partition Size 101.46 GB (108,943,425,536 bytes)
 Partition Starting Offset 16,384 bytes
 Description \\.\PHYSICALDRIVE14
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #14, Partition #0
 Partition Size 57.03 GB (61,231,579,136 bytes)
 Partition Starting Offset 16,384 bytes
 Description \\.\PHYSICALDRIVE5
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #5, Partition #0
 Partition Size 101.46 GB (108,943,801,344 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE6
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860

Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #6, Partition #0
 Partition Size 57.02 GB (61,228,952,064 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE7
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 734.04 GB (788,171,005,440 bytes)
 Total Cylinders 95,823
 Total Sectors 1,539,396,495
 Total Tracks 24,434,865
 Tracks/Cylinder 255
 Partition Disk #7, Partition #0
 Partition Size 734.04 GB (788,170,973,184 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE8
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #8, Partition #0
 Partition Size 101.46 GB (108,943,801,344 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE9
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63

Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #9, Partition #0
 Partition Size 57.02 GB (61,228,952,064 bytes)
 Partition Starting Offset 32,256 bytes
 Description \\.\PHYSICALDRIVE0
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 101.46 GB (108,943,833,600 bytes)
 Total Cylinders 13,245
 Total Sectors 212,780,925
 Total Tracks 3,377,475
 Tracks/Cylinder 255
 Partition Disk #0, Partition #0
 Partition Size 101.46 GB (108,943,425,536 bytes)
 Partition Starting Offset 16,384 bytes
 Description \\.\PHYSICALDRIVE1
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available
 SCSI Port Not Available
 SCSI Target ID Not Available
 Sectors/Track 63
 Size 57.02 GB (61,228,984,320 bytes)
 Total Cylinders 7,444
 Total Sectors 119,587,860
 Total Tracks 1,898,220
 Tracks/Cylinder 255
 Partition Disk #1, Partition #0
 Partition Size 57.03 GB (61,231,579,136 bytes)
 Partition Starting Offset 16,384 bytes
 Description \\.\PHYSICALDRIVE2
 Manufacturer Not Available
 Model Not Available
 Bytes/Sector 512
 Media Loaded Yes
 Media Type Fixed hard disk
 Partitions 1
 SCSI Bus Not Available
 SCSI Logical Unit Not Available

```

SCSI Port Not Available
SCSI Target ID      Not Available
Sectors/Track       63
Size    734.04 GB (788,171,005,440 bytes)
Total Cylinders    95,823
Total Sectors      1,539,396,495
Total Tracks       24,434,865
Tracks/Cylinder    255
Partition Disk #2, Partition #0
Partition Size     734.04 GB (788,170,973,184 bytes)

Partition Starting Offset   32,256 bytes

Description        \\.\PHYSICALDRIVE3
Manufacturer       Not Available
Model              Not Available
Bytes/Sector       512
Media Loaded      Yes
Media Type         Fixed hard disk
Partitions         1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track      63
Size    101.46 GB (108,943,833,600 bytes)
Total Cylinders    13,245
Total Sectors      212,780,925
Total Tracks       3,377,475
Tracks/Cylinder    255
Partition Disk #3, Partition #0
Partition Size     101.46 GB (108,943,801,344 bytes)

Partition Starting Offset   32,256 bytes

Description        \\.\PHYSICALDRIVE4
Manufacturer       Not Available
Model              Not Available
Bytes/Sector       512
Media Loaded      Yes
Media Type         Fixed hard disk
Partitions         1
SCSI Bus Not Available
SCSI Logical Unit Not Available
SCSI Port Not Available
SCSI Target ID    Not Available
Sectors/Track      63
Size    57.02 GB (61,228,984,320 bytes)
Total Cylinders    7,444
Total Sectors      119,587,860
Total Tracks       1,898,220
Tracks/Cylinder    255
Partition Disk #4, Partition #0
Partition Size     57.02 GB (61,228,952,064 bytes)

Partition Starting Offset   32,256 bytes

Description        Disk drive
Manufacturer       (Standard disk drives)
Model              HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector       512
Media Loaded      Yes
Media Type         Fixed hard disk

```

```

Partitions         1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID   4
Sectors/Track     32
Size    33.89 GB (36,385,505,280 bytes)
Total Cylinders   8,709
Total Sectors     71,065,440
Total Tracks      2,220,795
Tracks/Cylinder   255
Partition Disk #29, Partition #0
Partition Size    33.88 GB (36,381,310,976 bytes)

Partition Starting Offset   16,384 bytes

[SCSI]

Item      Value
Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&EFC3E79&0&0018
Memory Address   0xFD100000-0xFD1FFFFF
I/O Port          0x00004000-0x00004FFF
Memory Address   0xFD0F0000-0xFD0F0FFF
IRQ Channel      IRQ 18
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&237315C2&0&0020
Memory Address   0xFD900000-0xFD9FFFFF
I/O Port          0x00008000-0x00008FFF
Memory Address   0xFD8F0000-0xFD8F0FFF
IRQ Channel      IRQ 19
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&356D7036&0&00000010
Memory Address   0xFD400000-0xFD4FFFFF
I/O Port          0x00005000-0x00007FFF
Memory Address   0xFD3F0000-0xFD3F0FFF
IRQ Channel      IRQ 16
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\6&14CDF429&0&00080010
Memory Address   0xFD600000-0xFD6FFFFF
I/O Port          0x00006000-0x00006FFF
Memory Address   0xFD5F0000-0xFD5F0FFF
IRQ Channel      IRQ 17
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P600 Controller
Manufacturer       Hewlett-Packard Company
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
0\5&19379C89&0&100310
Memory Address   0xFD7F0000-0xFD7F1FFF
I/O Port          0x00007000-0x00007FFF
Memory Address   0xFD780000-0xFD7BFFFF
IRQ Channel      IRQ 25
Driver           c:\windows\system32\drivers\hpcisss2.sys
(6.0.0.64 Build 18 (x86-64) built by: buildsrv, 59.30
KB (60,728 bytes), 10/11/2006 8:29 AM)

```

```

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&EFC3E79&0&0018
Memory Address   0xFD100000-0xFD1FFFFF
I/O Port          0x00004000-0x00004FFF
Memory Address   0xFD0F0000-0xFD0F0FFF
IRQ Channel      IRQ 18
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
2\4&237315C2&0&0020
Memory Address   0xFD900000-0xFD9FFFFF
I/O Port          0x00008000-0x00008FFF
Memory Address   0xFD8F0000-0xFD8F0FFF
IRQ Channel      IRQ 19
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&1AB8B18D&0&0028
Memory Address   0xFDB00000-0xFDBFFFFFF
I/O Port          0x00009000-0x00009FFF
Memory Address   0xFDAF0000-0xFDAF0FFF
IRQ Channel      IRQ 18
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard
Status            OK
PNP Device ID    PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
3\4&79C23&0&0030
Memory Address   0xFDD00000-0xFDDFFFFFF
I/O Port          0x0000A000-0x0000AFFF
Memory Address   0xFDCF0000-0xFDCF0FFF
IRQ Channel      IRQ 19
Driver           c:\windows\system32\drivers\hpqcissb.sys
(5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50
KB (57,856 bytes), 10/13/2006 9:56 AM)

Name      Smart Array P800 Controller (Non-Miniport)

Manufacturer       Hewlett-Packard

```

Status OK
 PNP Device ID PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&8C20058&0&0038
 Memory Address 0xFDF00000-0xFDFFFFFF
 I/O Port 0x0000B000-0x0000BFFF
 Memory Address 0xFDEFO000-0xFDEF0FFF
 IRQ Channel IRQ 18
 Driver c:\windows\system32\drivers\hpqcissb.sys
 (5.18.2.64 Build 1 (AMD64) built by: RobertVC, 56.50 KB (57,856 bytes), 10/13/2006 9:56 AM)

[IDE]

Item	Value
Name	Standard Dual Channel PCI IDE Controller
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&F9
I/O Port	0x00000500-0x0000050F
Driver	c:\windows\system32\drivers\pciide.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 6.00 KB (6,144 bytes), 3/25/2005 6:00 AM)
Name	Primary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&56E2F28&0&0
I/O Port	0x000001F0-0x000001F7
I/O Port	0x000003F6-0x000003F6
IRQ Channel	IRQ 14
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB (148,480 bytes), 3/25/2005 6:00 AM)

Name	Secondary IDE Channel
Manufacturer	(Standard IDE ATA/ATAPI controllers)
Status	OK
PNP Device ID	PCIIDE\IDECHANNEL\4&56E2F28&0&1
I/O Port	0x00000170-0x00000177
I/O Port	0x00000376-0x00000376
Driver	c:\windows\system32\drivers\atapi.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 145.00 KB (148,480 bytes), 3/25/2005 6:00 AM)

[Printing]

Name	Driver	Port Name	Server Name
1	HP LaserJet 4100 Series PCL	TS003	CCAI5109 on CCAPRINT02 (from CAMPBELLBRXP) in session 1
	HP LaserJet 5Si/5Si MX PS	TS001	Labprinter on INFORB (from CAMPBELLBRXP) in session 1

[Problem Devices]

Device	PNP Device ID	Error Code
Base System Device	PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0 3\4&2014205D&0&20F0	The drivers for this device are not installed.
Base System Device	PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0 3\4&2014205D&0&22F0	The drivers for this device are not installed.
PCI Device	PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0 0\4&2014205D&0&26F0	The drivers for this device are not installed.
	Not Available ACPI\IPI0001\0	The drivers for this device are not installed.

[USB]

Device	PNP Device ID
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&E9
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&EA
Standard Universal PCI to USB Host Controller	PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&EB
Standard Enhanced PCI to USB Host Controller	PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&EF
Standard Universal PCI to USB Host Controller	PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0 0\4&2014205D&0&24F0

[Software Environment]

[System Drivers]

Name	Description	File	Type
abiosdsk	Abiosdsk	Started Start Mode	State
		Status Error Control	Accept Pause
		Accept Stop	
acpi	Microsoft ACPI Driver	No Disabled Stopped	Kernel Driver
		Ignore No No	OK
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	Kernel Driver Yes Boot
		Running OK Normal No	Yes
		Stopped OK Normal No	No

	adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled	Stopped	OK
adfd	adpu320	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
	AFD	c:\windows\system32\drivers\afds.sys		
aic78u2	aic78u2	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
arc	aic78xx	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
aliide	AliIde	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
amdiide	AmdIde	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
asyncmac	arc	Not Available	Kernel Driver	
	No	Disabled	Stopped	OK
	Normal	No	No	
atapi	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	Kernel Driver No Manual	
	Stopped OK Normal No	No	No	
atdisk	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	Kernel Driver Yes Boot	
	Running OK Normal No	No	No	
ati2mtag	Standard Enhanced PCI to USB Host Controller	PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0 9\3&61AAA01&0&EF	Ignore No No	
	Running OK Ignore No	No	No	
atmarpc	ati2mtag	c:\windows\system32\drivers\ati2mtag.sys	Kernel Driver Yes Manual	
	Running OK Ignore No	No	No	
audstub	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	Kernel Driver No Manual	
	Stopped OK Normal No	No	No	
b06bdrv	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	Kernel Driver Yes Manual	
	Running OK Normal No	No	No	
beep	HP Virtual Bus Device	c:\windows\system32\drivers\bxvbdः.sys	Kernel Driver Yes Boot	
	Running OK Normal No	No	No	
	Beep	c:\windows\system32\drivers\beep.sys	Kernel Driver Yes System	

		Running	OK	Normal	No	Yes		Kernel	Driver	Yes	Boot			Running	OK	Normal	No	Yes
cdaci5ba	CdaC15BA c:\windows\system32\drivers\cdaci5ba.sys	Kernel Driver	Yes	Auto			dpti2o	Running	OK	Normal	No	Yes	hpqci5ssd	Smart Array Controllers Non-Miniport Disk Driver	c:\windows\system32\drivers\hpqci5ssd.sys	Kernel Driver	Yes	Boot
	Running	OK	Normal	No	Yes			No	Not Available	Stopped	OK		Running	OK	Normal	No	Yes	
								Normal	Disabled	Normal	No		http	HTTP c:\windows\system32\drivers\http.sys	Kernel Driver	No	Manual	
cdad10ba	CdaD10BA c:\windows\system32\drivers\cdad10ba.sys	Kernel Driver	Yes	Auto			elxstor	Running	OK	Normal	No		i2omgmt	i2omgmt	Not Available	Kernel Driver		
	Running	OK	Normal	No	Yes			No	Not Available	Stopped	OK		Stopped	OK	Normal	No	No	
								Normal	Disabled	Normal	No		i8042prt	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\i8042prt.sys	Kernel Driver	Yes	System	
cdfs	Cdfs c:\windows\system32\drivers\cdfs.sys	File System Driver	Yes	Disabled			fastfat	Running	OK	Normal	No	No	Running	OK	Normal	No	Yes	
	Running	OK	Normal	No	Yes			Stopped	OK	Normal	No	No	iirsp	iirsp	Not Available	Kernel Driver		
								No	Fastfat	File System Driver	No	Disabled	Stopped	OK	Normal	No	OK	
cdrom	CD-ROM Driver c:\windows\system32\drivers\cdrom.sys	Kernel Driver	Yes	System			fdc	Running	OK	Normal	No	No	imapi	i8042 Keyboard and PS/2 Mouse Port Driver c:\windows\system32\drivers\imapi.sys	Kernel Driver	No	System	
	Running	OK	Normal	No	Yes			Stopped	OK	Ignore	No	No	Running	OK	Normal	No	Yes	
changer	Changer	Not Available		Kernel Driver			fips	Running	OK	Normal	No	Yes	intelide	IntelIDE	Not Available	Kernel Driver		
	No	System	Stopped	OK				No	Fips	File System Driver	Yes	System	Stopped	OK	Normal	No	OK	
clusdisk	Cluster Disk Driver c:\windows\system32\drivers\clusdisk.sys	Kernel Driver	No	Disabled			flpydisk	Running	OK	Normal	No	Yes	intelppm	Intel Processor Driver c:\windows\system32\drivers\intelppm.sys	Kernel Driver	No	System	
	Stopped	OK	Normal	No	No			Stopped	OK	Ignore	No	No	Running	OK	Normal	No	Yes	
cmdide	CmdIde	Not Available		Kernel Driver			fltmgr	Running	OK	Normal	No	Yes	ip6fw	IPv6 Windows Firewall Driver c:\windows\system32\drivers\ip6fw.sys	Kernel Driver	No	Manual	
	No	Disabled	Stopped	OK				No	FltMgr	File System Driver	Yes	Boot	Stopped	OK	Normal	No	No	
cpcqissm	cpcqissm	Not Available		Kernel Driver			ftdisk	Running	OK	Normal	No	Yes	ipfilterdriver	IP Traffic Filter Driver c:\windows\system32\drivers\ipfltdrv.sys	Kernel Driver	No	Manual	
	No	Disabled	Stopped	OK				No	Volume Manager Driver	Kernel Driver	Yes	Boot	Stopped	OK	Normal	No	No	
crcdisk	CRC Disk Filter Driver c:\windows\system32\drivers\crcdisk.sys	Kernel Driver	Yes	Boot			gpc	Running	OK	Normal	No	Yes	ipinip	IP in IP Tunnel Driver c:\windows\system32\drivers\ipinip.sys	Kernel Driver	No	Manual	
	Running	OK	Normal	No	Yes			No	Generic Packet Classifier	Kernel Driver	Yes	Manual	Stopped	OK	Normal	No	No	
dfsdriver	DfsDriver c:\windows\system32\drivers\dfs.sys	File System Driver	Yes	Boot			hidusb	Running	OK	Normal	No	Yes	ipnat	IP Network Address Translator c:\windows\system32\drivers\ipnat.sys	Kernel Driver	No	Manual	
	Running	OK	Normal	No	Yes			No	Microsoft HID Class Driver	Kernel Driver	Yes	Manual	Stopped	OK	Normal	No	No	
disk	Disk Driver c:\windows\system32\drivers\disk.sys	Kernel Driver	Yes	Boot			hpcisss	Running	OK	Ignore	No	Yes	ipsec	IPSEC driver c:\windows\system32\drivers\ipsec.sys	Kernel Driver	No	Manual	
	Running	OK	Normal	No	Yes			No	hpcisss	Kernel Driver	Yes	Boot	Stopped	OK	Normal	No	No	
dmboot	dmboot c:\windows\system32\drivers\dmboot.sys	Kernel Driver	No	Disabled			hpcisss2	Running	OK	Normal	No	Yes	isapnp	PnP ISA/EISA Bus Driver c:\windows\system32\drivers\isapnp.sys	Kernel Driver	Yes	System	
	Stopped	OK	Normal	No	No			No	hpcisss2	Kernel Driver	Yes	Boot	Stopped	OK	Normal	No	No	
dmio	Logical Disk Manager Driver c:\windows\system32\drivers\dmio.sys	Kernel Driver	Yes	Boot			hpqcissb	Running	OK	Normal	No	Yes						
	Running	OK	Normal	No	Yes			No	hpqcissb	Kernel Driver	Yes	Boot						
dmload	dmload c:\windows\system32\drivers\dmload.sys																	

	Kernel Driver Running OK	Yes Critical	Boot No	Yes								
kbdclass	Keyboard Class Driver c:\windows\system32\drivers\kbdclass.sys				mrxsmb	Stopped MRXSMB c:\windows\system32\drivers\mrxsmb.sys	OK File System Driver	Normal Yes	No System	No Yes	ntfs	Running Ntfs c:\windows\system32\drivers\ntfs.sys
	Kernel Driver Running OK	Yes Normal	System No	Yes		Running OK	Normal No	No Yes	Normal System	Normal Yes	File System Driver	Yes Disabled
kbdhid	Keyboard HID Driver c:\windows\system32\drivers\kbdhid.sys				msfs	Msfs c:\windows\system32\drivers\msfs.sys	File System Driver	Yes Normal	System No	Normal Yes	null	Running Null c:\windows\system32\drivers\null.sys
	Kernel Driver Running OK	Yes Ignore	System No	Yes		Running OK	Normal No	No Yes	Normal System	Normal Yes	Kernel Driver	Yes System
ksecd	KSecDD c:\windows\system32\drivers\ksecd.sys				mssmbios	Microsoft System Management BIOS Driver c:\windows\system32\drivers\mssmbios.sys	Kernel Driver	Yes Normal	Manual No	Normal Yes	parport	Parallel port driver c:\windows\system32\drivers\parport.sys
	Kernel Driver Running OK	Yes Normal	Boot No	Yes		Running OK	Normal No	No Yes	Manual System	Normal Yes	Kernel Driver	No Manual
ksthunk	Kernel Streaming WOW64 Thunk Service c:\windows\system32\drivers\ksthunk.sys				mup	Mup c:\windows\system32\drivers\mup.sys	File System Driver	Yes Normal	Boot No	Normal Yes	partmgr	Partition Manager c:\windows\system32\drivers\partmgr.sys
	Kernel Driver Running OK	Yes Normal	Manual No	Yes		Running OK	Normal No	No Yes	Boot System	Normal Yes	Kernel Driver	Yes Boot
12nd Adapter	HP NC370 Multifunction Gigabit Server c:\windows\system32\drivers\bxnd52a.sys				ndis	NDIS System Driver c:\windows\system32\drivers\ndis.sys	Kernel Driver	Yes Normal	Boot No	Normal Yes	pci	PCI Bus Driver c:\windows\system32\drivers\pci.sys
	Kernel Driver Running OK	Yes Normal	Manual No	Yes		Running OK	Normal No	No Yes	Boot System	Normal Yes	Kernel Driver	Yes Boot
lp6nds35	lp6nds35 Not Available Kernel Driver No Disabled Stopped OK				ndistapi	Remote Access NDIS TAPI Driver c:\windows\system32\drivers\ndistapi.sys	Kernel Driver	Yes Normal	Manual No	Normal Yes	pcide	PCI IDE c:\windows\system32\drivers\pcide.sys
	Normal No	No	No			Kernel Driver	Yes Normal	No Yes	Manual System	Normal Yes	Kernel Driver	Yes Boot
mnmdd	mnmdd c:\windows\system32\drivers\mnmdd.sys				ndisui0	NDIS Usermode I/O Protocol c:\windows\system32\drivers\ndisui0.sys	Kernel Driver	Yes Normal	Manual No	Normal Yes	pcmcia	Pcmcia c:\windows\system32\drivers\pcmcia.sys
	Kernel Driver Running OK	Yes Ignore	System No	Yes		Kernel Driver	Yes Normal	No Yes	Manual System	Normal Yes	Kernel Driver	No Disabled
modem	Modem c:\windows\system32\drivers\modem.sys				ndiswan	Remote Access NDIS WAN Driver c:\windows\system32\drivers\ndiswan.sys	Kernel Driver	Yes Normal	Manual No	Normal Yes	pdcomp	PDCOMP Not Available
	Kernel Driver Stopped OK	No Ignore	Manual No	No		Kernel Driver	Yes Normal	No Yes	Stopped System	Normal Yes	Kernel Driver	No OK
mouclass	Mouse Class Driver c:\windows\system32\drivers\mouclass.sys				ndproxy	NDIS Proxy c:\windows\system32\drivers\ndproxy.sys	Kernel Driver	Yes Normal	Manual No	Normal Yes	pdframe	PDFRAME Not Available
	Kernel Driver Running OK	Yes Ignore	System No	Yes		Kernel Driver	Yes Normal	No Yes	Manual System	Normal Yes	Kernel Driver	No OK
mouhid	Mouse HID Driver c:\windows\system32\drivers\mouhid.sys				netbios	NetBIOS Interface c:\windows\system32\drivers\netbios.sys	File System Driver	Yes Normal	System No	Normal Yes	pdreli	PDRELI Not Available
	Kernel Driver Running OK	Yes Ignore	Manual No	Yes		File System Driver	Yes Normal	No Yes	Stopped System	Normal Yes	Kernel Driver	No OK
mountmgr	Mount Point Manager c:\windows\system32\drivers\mountmgr.sys				netbt	NetBIOS over Tcpip c:\windows\system32\drivers\netbt.sys	Kernel Driver	Yes Normal	System No	Normal Yes	pdrframe	PDRFRAME Not Available
	Kernel Driver Running OK	Yes Normal	Boot No	Yes		Kernel Driver	Yes Normal	No Yes	Manual System	Normal Yes	Kernel Driver	No OK
mraid35x	mraid35x Not Available Kernel Driver No Disabled Stopped OK				nfrd960	nfrd960 Not Available Kernel Driver No Disabled Stopped OK					ppptpminiport	WAN Miniport (PPTP) c:\windows\system32\drivers\raspppt.sys
	Normal No	No	No								Kernel Driver	Yes Manual
mrx dav	WebDav Client Redirector c:\windows\system32\drivers\mrxdav.sys				npfs	Npfs c:\windows\system32\drivers\npfs.sys	File System Driver	Yes Normal	System No	Normal Yes	ptilink	Direct Parallel Link Driver c:\windows\system32\drivers\ptilink.sys
	File System Driver Normal	No	Manual								Kernel Driver	No Manual
											Kernel Driver	Yes Yes
											ql2300	ql2300 Not Available Kernel Driver No Disabled Stopped OK
											Kernel Driver	No Normal

rasacd	Remote Access Auto Connection Driver c:\windows\system32\drivers\rasacd.sys	Kernel Driver Yes System Running OK Normal No Yes		simbad	Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	update	Microcode Update Driver c:\windows\system32\drivers\update.sys	Kernel Driver Yes Manual Running OK Normal No Yes
rasl2tp	WAN Miniport (L2TP) c:\windows\system32\drivers\rasl2tp.sys	Kernel Driver Yes Manual Running OK Normal No Yes		srv	Srv C:\Windows\System32\drivers\srv.sys File System Driver Yes Manual Running OK Normal No Yes	Kernel Driver Normal No No	usbccgp	Microsoft USB Generic Parent Driver c:\windows\system32\drivers\usbccgp.sys	Kernel Driver Yes Manual Running OK Normal No Yes
raspppoe	Remote Access PPPoE Driver c:\windows\system32\drivers\raspppoe.sys	Kernel Driver Yes Manual Running OK Normal No Yes		startdss	HP ProLiant Virtual Install Disk Support Driver c:\windows\system32\drivers\startdss.sys	Kernel Driver No Disabled Stopped OK Normal No No	usbehci	Microsoft USB 2.0 Enhanced Host Controller Miniport Driver c:\windows\system32\drivers\usbehci.sys	Kernel Driver Yes Manual Running OK Normal No Yes
raspti	Direct Parallel c:\windows\system32\drivers\raspti.sys	Kernel Driver Yes Manual Running OK Normal No Yes		swenum	Software Bus Driver c:\windows\system32\drivers\swenum.sys	Kernel Driver Yes Manual Running OK Normal No Yes	usbhub	Microsoft USB Standard Hub Driver c:\windows\system32\drivers\usbhub.sys	Kernel Driver Yes Manual Running OK Normal No Yes
rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys	File System Driver Yes System Running OK Normal No Yes		symc8xx	symc8xx Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	usbstor	USB Mass Storage Driver c:\windows\system32\drivers\usbstor.sys	Kernel Driver No Manual Stopped OK Normal No No
rdpcdd	RDP CDD c:\windows\system32\drivers\rdpcdd.sys	Kernel Driver Yes System Running OK Ignore No Yes		sympmi	sympmi Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	usbuhci	Microsoft USB Universal Host Controller Miniport Driver c:\windows\system32\drivers\usbuhci.sys	Kernel Driver Yes Manual Running OK Normal No Yes
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys	Kernel Driver Yes Manual Running OK Normal No Yes		sym_hi	sym_hi Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	vga	vga c:\windows\system32\drivers\vgapnp.sys	Kernel Driver No Manual Stopped OK Ignore No No
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys	Kernel Driver Yes Manual Running OK Ignore No Yes		sym_u3	sym_u3 Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys	Kernel Driver Yes System Running OK Ignore No Yes
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys	Kernel Driver Yes System Running OK Normal No Yes		tcpip	TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys	Kernel Driver Yes System Running OK Normal No Yes	viaide	Via IDE Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Yes Boot Running OK Normal No Yes
secdrv	Security Driver c:\windows\system32\drivers\secdrv.sys	Kernel Driver Yes Auto Running OK Normal No Yes		tdpipe	TDPIPE c:\windows\system32\drivers\tdpipe.sys	Kernel Driver No Manual Stopped OK Ignore No No	volsnap	Storage volumes c:\windows\system32\drivers\volsnap.sys	Kernel Driver Yes Boot Running OK Normal No Yes
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys	Kernel Driver Yes Manual Running OK Normal No Yes		tdtcp	TDTCP c:\windows\system32\drivers\tdtcp.sys	Kernel Driver Yes Manual Running OK Ignore No Yes	wanarp	Remote Access IP ARP Driver c:\windows\system32\drivers\wanarp.sys	Kernel Driver Yes Manual Running OK Normal No Yes
serial	Serial port driver c:\windows\system32\drivers\serial.sys	Kernel Driver Yes System Running OK Ignore No Yes		termdd	Terminal Device Driver c:\windows\system32\drivers\termdd.sys	Kernel Driver Yes System Running OK Normal No Yes	wdica	WDICA Not Available Kernel Driver No Manual Stopped OK Ignore No No	Kernel Driver No Manual Running OK Normal No Yes
sfloppy	High-Capacity Floppy Disk Drive c:\windows\system32\drivers\sfloppy.sys	Kernel Driver No Manual		toside	TosIDE Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No	wlbs	Network Load Balancing c:\windows\system32\drivers\wlbs.sys	Kernel Driver No Manual Stopped OK Normal No No
				udfs	UDFS c:\windows\system32\drivers\udfs.sys	File System Driver No Disabled Stopped OK Normal No No			
				ultra	ultra Not Available Kernel Driver No Disabled Stopped OK Normal No No	Kernel Driver Normal No Disabled Stopped OK Normal No No			

[Signed Drivers]

Device Name	Signed	Device Class	
Driver Version		Driver Date	
Manufacturer		INF Name	Driver Name
Device ID			
Communications Port	Yes	PORTS	5.2.3790.1830
		(Standard port types)	
msports.inf		Not Available	
ROOT*PNP0501\1_0_17_1_0_0			
Microsoft System Management BIOS Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
			machine.inf
Not Available		ROOT\SYSTEM\0002	
Microcode Update Device	Yes	SYSTEM	
5.2.3790.1830	10/1/2002	(Standard	
system devices)		machine.inf	Not Available
ROOT\SYSTEM\0001			
Plug and Play Software Device Enumerator	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
			machine.inf
Not Available		ROOT\SYSTEM\0000	
Terminal Server Mouse Driver	Yes	SYSTEM	
5.2.3790.1830	10/1/2002	(Standard	
system devices)		machine.inf	Not Available
ROOT\RDP_MOU\0000			
Terminal Server Keyboard Driver	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
			machine.inf
Not Available		ROOT\RDP_KBD\0000	
Terminal Server Device Redirector	Yes		
SYSTEM	5.2.3790.1830	10/1/2002	(Standard system devices)
			machine.inf
Not Available		ROOT\RDPDR\0000	
Direct Parallel	Yes	NET	5.2.3790.1830
		10/1/2002	Microsoft netrasa.inf
Available	ROOT\MS_PTMINIPORT\0000		Not
WAN Miniport (PPPT) Yes	NET	5.2.3790.1830	
		10/1/2002	Microsoft netrasa.inf
Available	ROOT\MS_PPTPMINIPORT\0000		Not
WAN Miniport (PPPOE)	Yes	NET	
5.2.3790.1830	10/1/2002	Microsoft	
netrasa.inf		Not Available	
ROOT\MS_PPPOEMINIPORT\0000			
WAN Miniport (IP)	Yes	NET	5.2.3790.1830
		10/1/2002	Microsoft netrasa.inf
Available	ROOT\MS_NDISWANIP\0000		Not
WAN Miniport (L2TP) Yes	NET	5.2.3790.1830	
		10/1/2002	Microsoft netrasa.inf
Available	ROOT\MS_L2TPMINIPORT\0000		Not
Video Codecs	Yes	MEDIA	5.2.3790.1830
		10/1/2002	(Standard system devices)
wave.inf		Not Available	
ROOT\MEDIA\MS_MMVID			
Legacy Video Capture Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MMVCD			
Media Control Devices	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MMCI			

Legacy Audio Drivers	Yes	MEDIA	
5.2.3790.1830	10/1/2002	(Standard	
system devices)		wave.inf	Not Available
ROOT\MEDIA\MS_MMDRV			
Audio Codecs	Yes	MEDIA	5.2.3790.1830
		10/1/2002	(Standard system devices)
wave.inf		Not Available	
ROOT\MEDIA\MS_MMACM			
Remote Access IP ARP Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_WANARP\0000		
volsnap	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_VOLSNAP\0000	
VGA Display Controller.		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_VGASAVE\0000		
TDTCP	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_TDTCP\0000	
TCP/IP Protocol Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_TCPIP\0000		
HP ProLiant Virtual Install Disk Support Driver		Not Available	
Available	LEGACYDRIVER	Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_STARTDSS\0000		
Security Driver		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_SECDRV\0000		
RDPWD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPWD\0000	
RDPIDD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_RDPIDD\0000	
Remote Access Auto Connection Driver		Not Available	
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_RASACD\0000		
Partition Manager		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_PARTMGR\0000		
Null	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_NULL\0000	
NetBios over Tcpip		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_NETBT\0000		
NDProxy	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDPROXY\0000		
NDIS Usermode I/O Protocol		Not Available	LEGACYDRIVER
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISUO\0000		
Remote Access NDIS TAPI Driver		Not Available	LEGACYDRIVER
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_NDISTAPI\0000		
NDIS System Driver		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_NDIS\0000		
mountmgr	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_MOUNTMGR\0000	
mnmd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_MNMD\0000		
ksecdd	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	ROOT\LEGACY_KSECDD\0000		
IPSEC driver		Not Available	LEGACYDRIVER
Not Available		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_IPSEC\0000		
IP Network Address Translator		Not Available	LEGACYDRIVER
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_IPNAT\0000		
hpciss	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_HPCISS\0000	
Generic Packet Classifier		Not Available	LEGACYDRIVER
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_GPC\0000		
Fips	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_FIPS\0000	
dmload	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMLOAD\0000	
dmboot	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_DMBOOT\0000	
CRC Disk Filter Driver		Not Available	LEGACYDRIVER
LEGACYDRIVER		Not Available	Not
Available	Not Available	Not Available	
Available	ROOT\LEGACY_CRCDISK\0000		
Cdad10ba	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_CDAD10BA\0000	

CdaC15BA	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_CDAC15BA\0000	
Beep	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_BEEP\0000	
AFD	Not Available	LEGACYDRIVER	Not
Available	Not Available	Not Available	Not
Available	Not Available	ROOT\LEGACY_AFD\0000	
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE9CA19C		
A1OFFSET4000LENGTH8787EC00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
58OFFSET7E00LENGTHTHE4187AA00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
5FOFFSET7E00LENGTH195D8E7C00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
5EOFSET7E00LENGTH7B82A6A000			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
5DOFFSET7E00LENGTHTHE4187AA00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
5COFFSET7E00LENGTH195D8E7C00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
52OFFSET7E00LENGTHTHE4187AA00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
51OFFSET7E00LENGTH195DBE7C00			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
50OFFSET7E00LENGTH7B82A6A000			
Generic volume	Yes	VOLUME	5.2.3790.1830
	10/1/2002 Microsoft	volume.inf	Not
Available	STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73		
55OFFSET7E00LENGTHTHE4187AA00			

Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
560FFSET7E00LENGTH195D8E7C00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
530FFSET7E00LENGTHCD0084CE00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
490FFSET7E00LENGTHE4187AA00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
FBOFFSET7E00LENGTH195D8E7C00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
480FFSET4000LENGTHE41AFC000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
4FOFFSET4000LENGTH195D88C000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
4DOFFSET4000LENGTHE41AFC000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
4COFFSET4000LENGTH195D88C000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
550FFSET7E00LENGTHE4187AA00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
540FFSET7E00LENGTH195D8E7C00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
5BOFFSET7E00LENGTHE782A6A000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
5SA0FFSET7E00LENGTHE4187AA00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73

```

STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
59OFFSET7E00LENGTH195D8E7C00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
63OFFSET7E00LENGTHE4187AA00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
62OFFSET7E00LENGTH195D8E7C00
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
61OFFSET7E00LENGTHB782A6A000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
60OFFSET4000LENGTHE41AFC000
Generic volume Yes VOLUME 5.2.3790.1830
10/1/2002 Microsoft volume.inf Not Available
Available STORAGE\VOLUME\1&30A96598&0&SIGNATURE2CFC73
67OFFSET4000LENGTH195D8C000
Volume Manager Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ROOT\FTFDISK\0000
Logical Disk Manager Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ROOT\DMIO\0000
ACPI Fixed Feature Button Yes SYSTEM
5.2.3790.1830 10/1/2002 (Standard
system devices) machine.inf Not Available
ACPI\FIXEDBUTTON\2&DABA3FF&0
ACPI Thermal Zone Yes SYSTEM 5.2.3790.1830
10/1/2002 (Standard system devices)
machine.inf Not Available
ACPI\THERMALZONE\THM0
Secondary IDE Channel Yes HDC
5.2.3790.1830 10/1/2002 (Standard IDE
ATA/ATAPI controllers) mshdc.inf Not Available
PCIIDE\IDECHANNEL\4&5E2F28&0&1
CD-ROM Drive Yes CDROM 5.2.3790.1830
10/1/2002 (Standard CD-ROM drives)
cdrom.inf Not Available IDE\CDROMHML-
DT-ST_CD-ROM_GCR-
8486B 2.00 \5&5FD9AC6&0&0.0.0
Primary IDE Channel Yes HDC 5.2.3790.1830
10/1/2002 (Standard IDE ATA/ATAPI
controllers) mshdc.inf Not Available
PCIIDE\IDECHANNEL\4&5E2F28&0&0
Standard Dual Channel PCI IDE Controller Yes
HDC 5.2.3790.1830 10/1/2002
(Standard IDE ATA/ATAPI controllers)
mshdc.inf Not Available
PCI\VEN_8086&DEV_269E&SUBSYS_31FE103C&REV_0
9\3&61AAA01&0&F

```

Communications Port	Yes	PORTS	5.2.3790.1830
	10/1/2002 (Standard port types)		
	msports.inf	Not Available	
	ACPI\PNP0501\0		
Extended IO Bus	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard system devices)		
	machine.inf	Not Available	
	ACPI\PNP0A06\4&2AA4AD3&0		
PS/2 Compatible Mouse	Yes	MOUSE	5.2.3790.1830
	10/1/2002 Microsoft		
	msmouse.inf	Not Available	
	ACPI\PNP0F13\4&2AA4AD3&0		
Standard Keyboard	Yes	KEYBOARD	5.2.3790.1830
	10/1/2002 (Standard keyboards)		
	keyboard.inf	Not Available	
	ACPI\PNP0303\4&2AA4AD3&0		
System speaker	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard system devices)		
	machine.inf	Not Available	
	ACPI\PNP0800\4&2AA4AD3&0		
Direct memory access controller	Yes		
	SYSTEM	5.2.3790.1830	10/1/2002
	(Standard system devices)		
	machine.inf		
	Not Available		
	ACPI\PNP0200\4&2AA4AD3&0		
High precision event timer	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard		
system devices)	machine.inf	Not Available	
	ACPI\PNP0103\0		
System timer	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard system devices)		
	machine.inf	Not Available	
	ACPI\PNP0100\4&2AA4AD3&0		
Not Available	Not Available	Not Available	
	Not Available	Not Available	Not
Available	Not Available	Not Available	
	ACPI\IP10001\0		
Motherboard resources	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard		
system devices)	machine.inf	Not Available	
	ACPI\PNP0C02\0		
PCI standard ISA bridge	Yes	SYSTEM	5.2.3790.1830
	10/1/2002 (Standard		
system devices)	machine.inf	Not Available	
	PCI\VEN_8086&DEV_2670&SUBSYS_00000000&REV_0		
9\3&61AAA01&0&F8			
PCI Device	Not Available	UNKNOWN	Not
Available	Not Available	Not Available	Not
Available	Not Available	Not Available	
	PCI\VEN_103C&DEV_3302&SUBSYS_3305103C&REV_0		
0\4&2014205D&0&26F0			
Generic USB Hub	Yes	USB	5.2.3790.1830
	10/1/2002 (Generic USB Hub)	usb.inf	Not
Available	USB\VID_03F0&PID_1327\6&18FFBC52&0&2		
HID-compliant mouse	Yes	MOUSE	5.2.3790.1830
	10/1/2002 Microsoft	msmouse.inf	Not
Available	HID\VID_03F0&PID_1027&MI_01\8&25B103E6&0&00		
00			
USB Human Interface Device	Yes	HIDCLASS	5.2.3790.1830
	10/1/2002 (Standard		
system devices)	input.inf	Not Available	

		USB\VID_03F0&PID_1027&MI_01\7&2CD6FDA9&0&00			
01		HID Keyboard Device	Yes	KEYBOARD	5.2.3790.1830
			10/1/2002 (Standard keyboards)		
		keyboard.inf	Not Available		
		HID\VID_03F0&PID_1027&MI_00\8&DED77A1&0&000			
0		USB Human Interface Device	Yes	HIDCLASS	5.2.3790.1830
			10/1/2002 (Standard		
system devices)	input.inf	Not Available			
		USB\VID_03F0&PID_1027&MI_00\7&2CD6FDA9&0&00			
00		USB Composite Device	Yes	USB	5.2.3790.1830
			10/1/2002 (Standard USB		
Host Controller)	usb.inf	Not Available			
		USB\VID_03F0&PID_1027\6&18FFBC52&0&01			
USB Root Hub	Yes	USB	5.2.3790.1830		
	10/1/2002 (Standard USB Host Controller)				
	usbport.inf	Not Available			
	USB\ROOT_HUB\5&26BC3420&0				
Standard Universal PCI to USB Host Controller	Yes				
	USB	5.2.3790.1830	10/1/2002		
	(Standard USB Host Controller)				
	usbport.inf	Not Available			
	PCI\VEN_103C&DEV_3300&SUBSYS_3305103C&REV_0				
0\4&2014205D&0&24F0					
Base System Device	Not Available	UNKNOWN	Not		
Available	Not Available	Not Available	Not		
Available	Not Available	PCI\VEN_0E11&DEV_B204&SUBSYS_3305103C&REV_0			
3\4&2014205D&0&22F0					
Base System Device	Not Available	UNKNOWN	Not		
Available	Not Available	Not Available	Not		
Available	Not Available	PCI\VEN_0E11&DEV_B203&SUBSYS_3305103C&REV_0			
3\4&2014205D&0&20F0					
Default Monitor	Yes	MONITOR	5.2.3790.1830		
	10/1/2002 (Standard monitor types)				
	monitor.inf	Not Available			
	DISPLAY\DEFAULT_MONITOR\5&E64F3B&0&10000000				
&01&03					
Plug and Play Monitor	Yes	MONITOR	5.2.3790.1830		
	10/1/2002 (Standard				
monitor types)	monitor.inf	Not Available			
	DISPLAY\AV0000\5&E64F3B&0&10000081&01&03				
ATI ES1000	Yes	DISPLAY	8.19.4.0		
	12/6/2005 ATI Technologies Inc.				
	oem1.inf	Not Available			
	PCI\VEN_1002&DEV_515E&SUBSYS_31FB103C&REV_0				
2\4&2014205D&0&18F0					
Intel(R) 82801 PCI Bridge - 244E	Yes				
	SYSTEM	5.2.3790.1830	10/1/2002		
	Intel	machine.inf	Not Available		
	PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_D				
9\3&61AAA01&0&F0					
USB Root Hub	Yes	USB	5.2.3790.1830		
	10/1/2002 (Standard USB Host Controller)				
	usbport.inf	Not Available			
	USB\ROOT_HUB20\4&392538C3&0				
Standard Enhanced PCI to USB Host Controller	Yes				
	USB	5.2.3790.1830	10/1/2002		
	(Standard USB Host Controller)				

		usbport.inf	Not Available
		PCI\VEN_8086&DEV_268C&SUBSYS_31FE103C&REV_0	
9\3&61AAA01&0&EF			
USB Root Hub	Yes	USB	5.2.3790.1830
	10/1/2002 (Standard USB Host Controller)		
	usbport.inf	Not Available	
	USB\ROOT_HUB\4&41C0314&0		
Standard Universal PCI to USB Host Controller	Yes		
	USB	5.2.3790.1830	10/1/2002
	(Standard USB Host Controller)		
	usbport.inf	Not Available	
	PCI\VEN_8086&DEV_268B&SUBSYS_31FE103C&REV_0		
9\3&61AAA01&0&BB			
USB Root Hub	Yes	USB	5.2.3790.1830
	10/1/2002 (Standard USB Host Controller)		
	usbport.inf	Not Available	
	USB\ROOT_HUB\4&A54F890&0		
Standard Universal PCI to USB Host Controller	Yes		
	USB	5.2.3790.1830	10/1/2002
	(Standard USB Host Controller)		
	usbport.inf	Not Available	
	PCI\VEN_8086&DEV_268A&SUBSYS_31FE103C&REV_0		
9\3&61AAA01&0&EA			
USB Root Hub	Yes	USB	5.2.3790.1830
	10/1/2002 (Standard USB Host Controller)		
	usbport.inf	Not Available	
	USB\ROOT_HUB\4&37897620&0		
Standard Universal PCI to USB Host Controller	Yes		
	USB	5.2.3790.1830	10/1/2002
	(Standard USB Host Controller)		
	usbport.inf	Not Available	
	PCI\VEN_8086&DEV_2689&SUBSYS_31FE103C&REV_0		
9\3&61AAA01&0&E9			
USB Root Hub	Yes	USB	5.2.3790.1830
	10/1/2002 (Standard USB Host Controller)		
	usbport.inf	Not Available	
	USB\ROOT_HUB\4&7353027&0		
Standard Universal PCI to USB Host Controller	Yes		
	USB	5.2.3790.1830	10/1/2002
	(Standard USB Host Controller)		
	usbport.inf	Not Available	
	PCI\VEN_8086&DEV_2688&SUBSYS_31FE103C&REV_0		
9\3&61AAA01&0&E8			
HP NC373i Multifunction Gigabit Server Adapter	Yes		
	NET	2.8.13.0	6/30/2006 Hewlett-
Packard Company	oem3.inf	Not Available	B06BDRV1L2ND&PCI_164C14E4&SUBSYS_7038103C&R
EV_12\6&154FE07&0&20050500			
HP NC373i Virtual Bus Device	Yes	SYSTEM	2.8.15.0
	oem6.inf	Not Available	7/12/2006 Hewlett-Packard Company
	PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1		
2\5&1F051E87&0&0000E1			
PCI standard PCI-to-PCI bridge	Yes		
	SYSTEM	5.2.3790.1830	10/1/2002
	(Standard system devices)		
	machine.inf		
	Not Available		
	PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C		
3\4&l10C88BD&0&00E1			
PCI standard PCI-to-PCI bridge	Yes		
	SYSTEM	5.2.3790.1830	10/1/2002
	(Standard system devices)		
	machine.inf		
	Not Available		

PCI\VEN_8086&DEV_2692&SUBSYS_00000000&REV_0
 9\3&61AAA01&0&E1
 HP NC373i Multifunction Gigabit Server Adapter Yes
 NET 2.8.13.0 6/30/2006 Hewlett-
 Packard Company oem3.inf Not Available
 B06BDRV\LNDA&PCI_164C14E4&SUBSYS_7038103C&R
 EV_12\6&183F41DD&0&20050300
 HP NC373i Virtual Bus Device Yes SYSTEM
 2.8.15.0 7/12/2006 Hewlett-Packard Company
 oem6.inf Not Available
 PCI\VEN_14E4&DEV_164C&SUBSYS_7038103C&REV_1
 2\5&43097C6&0&00000E0
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_1166&DEV_0103&SUBSYS_00000000&REV_C
 3\4&187919PE&0&0E0
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_2690&SUBSYS_00000000&REV_0
 9\3&61AAA01&0&E0
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F6&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&B0
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F5&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&A8
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F3&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&98
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F1&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&88
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&82
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&81
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25F0&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&80
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available

 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&04000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&03000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&02000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&01000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&00000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&1
 350CFFB&0&00000400000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 5.18.2.64 1/23/2006
 Hewlett-Packard oem8.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&1AB8B18D&0&0028
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E5&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&28
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
 9CE35B9&0&02000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
 9CE35B9&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
 9CE35B9&0&0000040000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&3
 1BE01&0&04000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
 1BE01&0&03000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
 1BE01&0&02000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
 1BE01&0&01000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&5
 1BE01&0&00000400000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 5.18.2.64 1/23/2006
 Hewlett-Packard oem8.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 2\4&237315C2&0&0020
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E4&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&20
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
 79742&0&04000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
 79742&0&03000400000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
 79742&0&02000400000000

Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
 79742&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\5&F
 79742&0&0000004000000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 5.18.2.64 1/23/2006
 Hewlett-Packard oem8.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\4&EFC3E79&0&0018
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E3&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&18
 Disk drive Yes DISKDRIVE 5.2.3790.1830
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HP&PROD_LOGICAL_VOLUME&REV_1.
 24\6&4D68E4&0&040
 HP Virtual LUN Yes SYSTEM 5.2.3790.1830
 10/1/2002 Compaq scsiedev.inf Not Available
 Available SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CTS2\6&4D68E4&0&000
 Smart Array P600 Controller Yes SCSIADAPTER
 5.8.0.64 2/13/2006 Hewlett-Packard Company
 oem9.inf Not Available
 PCI\VEN_103C&DEV_3220&SUBSYS_3225103C&REV_0
 0\5&19379C89&0&100310
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_350C&SUBSYS_00000000&REV_0
 1\4&641DA44&0&0310
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3518&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&100010
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 724FE17&0&0400004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 724FE17&0&0300004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 724FE17&0&0200004000000000

Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 724FE17&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 724FE17&0&0000004000000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 5.18.2.64 1/23/2006
 Hewlett-Packard oem8.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\6&14CDF429&0&00080010
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3514&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&080010
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 BBB46D2&0&0400004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 BBB46D2&0&0300004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 BBB46D2&0&0200004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 BBB46D2&0&0100004000000000
 Smart Array Logical Volume No DISKDRIVE
 5.12.2.64 1/23/2005 Hewlett-Packard
 oem9.inf Not Available
 HPQCISS\DISK&VEN_HP&PROD_LOGICAL_VOLUME\7&1
 BBB46D2&0&0000004000000000
 Smart Array P800 Controller (Non-Miniport) No
 SCSIADAPTER 5.18.2.64 1/23/2006
 Hewlett-Packard oem8.inf Not Available
 PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_0
 3\6&356D7036&0&0000010
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3510&SUBSYS_00000000&REV_0
 1\5&38BD847A&0&000010
 PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_3500&SUBSYS_00000000&REV_0
 1\4&641DA44&0&0010

PCI standard PCI-to-PCI bridge Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 PCI\VEN_8086&DEV_25E2&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&10
 PCI standard host CPU bridge Yes SYSTEM
 5.2.3790.1830 10/1/2002 (Standard
 system devices) machine.inf Not Available
 PCI\VEN_8086&DEV_25D8&SUBSYS_00000000&REV_B
 1\3&61AAA01&0&00
 PCI bus Yes SYSTEM 5.2.3790.1830
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\2&DABA3FF&0
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__7
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__6
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__5
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__4
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__3
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__2
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__1
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL_-
 _EM64T_FAMILY_6_MODEL_15__0
 Microsoft ACPI-Compliant System Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Microsoft acpi.inf Not Available
 ACPI_HAL\PNP0C08\0
 ACPI Multiprocessor x64-based PC Yes
 COMPUTER 5.2.3790.1830 10/1/2002
 (Standard computers) hal.inf Not Available
 Available ROOT\ACPI_HAL\0000
 Not Available Not Available Not Available Not Available
 Available Not Available Not Available HTREE\ROOT\0
 Not Available Yes Not Available 2:5.0,2:5.1,2:5.2 Not Available Not Available
 Available Not Available Not Available

```

CCAI5109 on CCAPRINT02 (from CAMPBELLBRXP)
in session 1
Not Available Yes Not Available
2:5.0,2:5.1,2:5.2 Not Available Not Available
Available Not Available Not Available
Labprinter on INFORB (from CAMPBELLBRXP) in
session 1

[Environment Variables]

Variable Value User Name
ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
Path %SystemRoot%\system32;%SystemRoot%_oot\System32\Wbem;C:\Program Files (x86)\Microsoft SQL Server\80\Tools\Binn\;C:\Program Files\Microsoft SQL Server\90\Tools\bin\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\bin\;C:\Program Files\Microsoft SQL Server\90\DT\Binn\;C:\Program Files (x86)\Microsoft SQL Server\90\Tools\Binn\VSShell\Common7\IDE\;C:\Program Files (x86)\Microsoft Visual Studio 8\Common7\IDE\PrivateAssemblies\ <SYSTEM>
windir %SystemRoot% <SYSTEM>
FP_NO_HOST_CHECK NO <SYSTEM>
OS Windows_NT <SYSTEM>
PROCESSOR_ARCHITECTURE AMD64 <SYSTEM>
PROCESSOR_LEVEL 6 <SYSTEM>
PROCESSOR_IDENTIFIER EM64T Family 6 Model 15 Stepping 7, GenuineIntel <SYSTEM>
PROCESSOR_REVISION 0f07 <SYSTEM>
NUMBER_OF_PROCESSORS 8 <SYSTEM>
ClusterLog C:\WINDOWS\Cluster\cluster.log <SYSTEM>
PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF ;.WSH <SYSTEM>
TEMP %SystemRoot%\TEMP <SYSTEM>
TMP %SystemRoot%\TEMP <SYSTEM>
lib C:\Program Files\SQLXML 4.0\bin\ <SYSTEM>
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\SYSTEM
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\LOCAL SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp NT AUTHORITY\NETWORK SERVICE
TEMP %USERPROFILE%\Local Settings\Temp QUAD\Administrator
TMP %USERPROFILE%\Local Settings\Temp QUAD\Administrator

[Print Jobs]

Document Size Owner Notify Status
Time Submitted Start Time

```

Processor	Host	Print Queue	Until Time	Elapsed Time	Pages Printed	Job ID	Priority	Parameters	Driver	Print	Data Type	Name
[Network Connections]												
V:			Local Name	Remote Name	Type	Status	User Name	Connection	Disk	Current		
[Running Tasks]												
Name	Path	Process ID	Priority	Min	Working Set	Max Working Set	Start Time	Version	Size	File Date		
system		Not Available	0	0	idle process	Not Available	Not Available					
Available		Not Available	Not Available	Not Available	Available	Not Available	Not Available					
Available		Not Available	4	0	system	Not Available	Not Available	1413120	Not Available	Not Available		
		1413120	8	0		Not Available	Not Available					
		Not Available	Not Available	Not Available		780	11					
smss.exe		Not Available	11/1/2006 1:14 PM	Not	204800	1413120		Not Available				
Available		Not Available	Available	Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	13	5.2.3790.1830		
Available		Not Available	901.00 KB	(922,624 bytes)	(srv03_spl_rtm.050324-1447)	901.00 KB	Not Available	3/25/2005 6:00 AM	216.50 KB	(221,696 bytes)		
winlogon.exe	c:\windows\system32\winlogon.exe	968	11/1/2006 1:14 PM	5.2.3790.1830	11/1/2006 1:14 PM	204800	1413120	11/1/2006 1:14 PM	13	5.2.3790.1830		
services.exe	c:\windows\system32\services.exe	1012	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	204800	1413120	11/1/2006 1:14 PM	8	204800	1413120	
Available		Not Available	Available	Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	901.00 KB	(922,624 bytes)	bytes)	3/25/2005 6:00 AM	Not Available	11/1/2006 1:14 PM	13	5.2.3790.1830		
lsass.exe	c:\windows\system32\lsass.exe	172	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	216.50 KB	(221,696 bytes)	11/1/2006 1:14 PM	8	204800	1413120	
Available		Not Available	Available	Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	14.00 KB (14,336 bytes)	3/25/2005 6:00 AM	14.00 KB (14,336 bytes)	14.00 KB (14,336 bytes)	14.00 KB (14,336 bytes)	11/1/2006 1:14 PM	13	204800	1413120	
svchost.exe	c:\windows\system32\svchost.exe	436	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	204800	1413120	11/1/2006 1:14 PM	8	204800	1413120	
Available		Not Available	Available	Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	11/1/2006 1:14 PM	Not Available	11/1/2006 1:14 PM	24.50 KB (25,088 bytes)	24.50 KB (25,088 bytes)	11/1/2006 1:14 PM	8	204800	1413120	
svchost.exe	c:\windows\system32\svchost.exe	544	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	544	8	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	Not Available	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	8	204800	1413120	
svchost.exe	c:\windows\system32\svchost.exe	620	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	620	8	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	Not Available	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	8	204800	1413120	
svchost.exe	c:\windows\system32\svchost.exe	704	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	704	8	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	Not Available	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	8	204800	1413120	
svchost.exe	c:\windows\system32\svchost.exe	2960	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	2960	4	11/1/2006 1:14 PM	Not Available	Not Available		
Available		Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available	11/1/2006 1:14 PM	8	204800	1413120	
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpct											

svchost.exe	c:\windows\system32\svchost.exe	724	8	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	3/25/2005 6:00 AM
spoolsv.exe	c:\windows\system32\spoolsv.exe	1324	8	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	107.00 KB (109,568 bytes)	bytes)
msdtc.exe	c:\windows\system32\msdtc.exe	1356	8	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available
svchost.exe	c:\windows\system32\svchost.exe	1508	8	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	3/25/2005 6:00 AM
msftesql.exe	c:\windows\system32\msftesql.exe	1540	8	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available
svchost.exe	c:\windows\system32\svchost.exe	1576	8	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available
svchost.exe	c:\windows\system32\svchost.exe	2016	8	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	24.50 KB (25,088 bytes)	3/25/2005 6:00 AM
csrss.exe	c:\windows\system32\csrss.exe	1984	13	Not Available	Not Available	11/1/2006 1:14 PM	Not Available	Available	Not Available	Not Available
winlogon.exe	c:\windows\system32\winlogon.exe	1708	13	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	901.00 KB (922,624 bytes)	bytes)
rdpclip.exe	c:\windows\system32\rdpclip.exe	1192	8	204800	1413120	11/1/2006 1:14 PM	5.2.3790.1830	(srv03_spl_rtm.050324-1447)	99.00 KB (101,376 bytes)	3/25/2005 6:00 AM
explorer.exe	c:\windows\explorer.exe	1308	8	204800	1413120	11/1/2006 1:14 PM	6.00.3790.1830	(srv03_spl_rtm.050324-1447)	1.30 MB (1,364,480 bytes)	bytes)
wmiprvse.exe	c:\windows\system32\wmiprvse.exe	1240	8	Not Available	Not Available	11/1/2006 1:15 PM	Not Available	Available	Not Available	Not Available
wuauctl.exe	c:\windows\system32\wuauctl.exe	816	8	204800	1413120	11/1/2006 1:15 PM	5.7.3790.1830	(srv03_spl_rtm.050324-1447)	156.00 KB (159,744 bytes)	bytes)
logon.scr	c:\windows\pchealth\logon.scr	2960	4	Not Available	Not Available	11/1/2006 1:24 PM	Not Available	Available	Not Available	Not Available
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpct									

r.exe	2676	8	204800	1413120
	11/1/2006 2:24 PM		5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)			1.30 MB (1,363,456	
bytes)	10/11/2006 1:41 PM			
wmiprvse.exe		Not Available	2876	8
	Not Available	Not Available		
	11/1/2006 2:24 PM	Not Available		Not Available
Available	Not Available			
helpsvc.exe		c:\windows\pchealth\helpctr\binaries\helpsv		
c.exe	2820	8	204800	1413120
	11/1/2006 2:24 PM		5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)			1.52 MB (1,591,296	
bytes)	10/11/2006 1:41 PM			
[Loaded Modules]				
Name	Version	Size	File Date	Manufacturer
Path				
winlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	901.00 KB (922,624 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\winlogon.exe				
ntdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.20 MB (1,257,472 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\ntdll.dll				
kernel32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.43 MB (1,500,160 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\kernel32.dll				
advapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.00 MB (1,051,136 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\advapi32.dll				
rpcrt4	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.63 MB (1,714,176 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\rpcrt4.dll				
crypt32	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.36 MB (1,428,992 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\crypt32.dll				
msasn1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	152.50 KB (156,160 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\msasn1.dll				
msvcrt	7.0.3790.1830 (srv03_sp1_rtm.050324-1447)			
	508.00 KB (520,192 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\msvcrt.dll				
user32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.04 MB (1,085,952 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\user32.dll				
gdi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	592.00 KB (606,208 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\gdi32.dll				
nddeapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	25.00 KB (25,600 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\nddeapi.dll				

profmap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	36.00 KB (36,864 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\profmap.dll				
netapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	589.00 KB (603,136 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\netapi32.dll				
userenv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.02 MB (1,069,056 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\userenv.dll				
psapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	29.00 KB (29,696 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\psapi.dll				
regapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	108.50 KB (111,104 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\regapi.dll				
secur32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	120.00 KB (122,880 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\secur32.dll				
setupapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.45 MB (1,523,200 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\setupapi.dll				
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	28.00 KB (28,672 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\version.dll				
winsta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	89.00 KB (91,136 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\winsta.dll				
ws2_32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	176.50 KB (180,736 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\ws2_32.dll				
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	30.50 KB (31,232 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\ws2help.dll				
msgina	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.14 MB (1,193,472 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\msgina.dll				
shsVCS	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)			
	193.50 KB (198,144 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\shsVCS.dll				
shlwapi	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)			
	606.50 KB (621,056 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\shlwapi.dll				
sfc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	6.00 KB (6,144 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\sfc.dll				
sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	183.50 KB (187,904 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\sfc_os.dll				

6:00 AM	Microsoft Corporation			
c:\windows\system32\sfc_os.dll				
wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)			
	297.50 KB (304,640 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\wintrust.dll				
imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	57.50 KB (58,880 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\imagehlp.dll				
ole32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	2.43 MB (2,543,616 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\ole32.dll				
comctl32	6.0 (srv03_sp1_rtm.050324-1447)			
	1.51 MB (1,584,128 bytes)		10/11/2006	
8:34 AM	Microsoft Corporation			
c:\windows\winsxs\amd64_microsoft.windows.c				
ommon-controls_6595b64144ccf1d_6.0.3790.1830_x-				
ww_aced72af\comctl32.dll				
winscard	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	230.00 KB (235,520 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\winscard.dll				
wtsapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	29.00 KB (29,696 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\wtsapi32.dll				
sxs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	1.91 MB (2,003,968 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\xs.dll				
shell32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)			
	10.01 MB (10,492,416 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\shell32.dll				
rsaenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	241.96 KB (247,768 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\rsaenh.dll				
wldap32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	390.00 KB (399,360 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\wldap32.dll				
cscdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	151.50 KB (155,136 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\scdll.dll				
dimsntfy	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	28.00 KB (28,672 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\dimsnfy.dll				
wlnotify	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	148.00 KB (151,552 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\wlnotify.dll				
mpr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)			
	115.00 KB (117,760 bytes)		3/25/2005	
6:00 AM	Microsoft Corporation			
c:\windows\system32\mpr.dll				
oleaut32	5.2.3790.1830 1.06 MB (1,116,160			
bytes)	3/25/2005 6:00 AM Microsoft Corporation			
c:\windows\system32\oleaut32.dll				

winmm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 303.50 KB (310,784 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\winmm.dll	
winspool	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 247.00 KB (252,928 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\winspool.drv	
comct132	5.82 (srv03_sp1_rtm.050324-1447) 934.50 KB (956,928 bytes)	10/11/2006
8:34 AM	Microsoft Corporation c:\windows\winsxs\amd64_microsoft.windows.common-controls_6595b64144ccffd5_5.82.3790.1830_X-ww_4d792d2a\comct132.dll	
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447) 494.50 KB (506,368 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\uxtheme.dll	
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 216.50 KB (221,696 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\services.exe	
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 80.00 KB (81,920 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ncobjapi.dll	
msvcpc60	7.0.3790.1830 (srv03_sp1_rtm.050324-1447) 919.50 KB (941,568 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msvcpc60.dll	
scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 594.50 KB (608,768 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\scesrv.dll	
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 167.00 KB (171,008 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\authz.dll	
umpnppmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 205.00 KB (209,920 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\umpnppmgr.dll	
eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 127.00 KB (130,048 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\eventlog.dll	
lsass	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 14.00 KB (14,336 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\lsass.exe	
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.50 MB (1,568,256 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\lsasrv.dll	
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 127.50 KB (130,560 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 297.50 KB (304,640 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\dnsapi.dll	

samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 69.00 KB (70,656 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\samlib.dll	
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 1.01 MB (1,059,328 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.00 KB (48,128 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\cryptdll.dll	
msprivs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 47.50 KB (48,640 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msprivs.dll	
kerberos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 698.00 KB (714,752 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\kerberos.dll	
msv1_0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 253.00 KB (259,072 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\msv1_0.dll	
iphlpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 177.00 KB (181,248 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\iphlpapi.dll	
netlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 666.00 KB (681,984 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\netlogon.dll	
w32time	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 400.50 KB (410,112 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\w32time.dll	
schannel	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 248.00 KB (253,952 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\schannel.dll	
wdigest	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 130.50 KB (133,632 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\wdigest.dll	
rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 36.00 KB (36,864 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\rassfm.dll	
kdcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 409.00 KB (418,816 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\kdcsvc.dll	
ntdsa	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.81 MB (2,948,096 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ntdsa.dll	
esent	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.26 MB (2,366,976 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\esent.dll	
ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 51.00 KB (52,224 bytes)	3/25/2005

6:00 AM	Microsoft Corporation c:\windows\system32\ntdsatq.dll	
mswsock	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 478.00 KB (489,472 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\mswsock.dll	
scecli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 308.00 KB (315,392 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\scecli.dll	
ws03res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 794.00 KB (813,056 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ws03res.dll	
ipsecsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 358.50 KB (367,104 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\ipsecsvc.dll	
oakley	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 372.50 KB (381,440 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\oakley.dll	
winipsec	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 52.50 KB (53,760 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\winipsec.dll	
pstorsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 36.00 KB (36,864 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\pstorsvc.dll	
psbase	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 124.00 KB (126,976 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\psbase.dll	
hnetcfg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 561.00 KB (574,464 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\hnetcfg.dll	
wshtcpip	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 29.00 KB (29,696 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\wshtcpip.dll	
dssenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 226.96 KB (232,408 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\dssenh.dll	
wlbsctrl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 137.50 KB (140,800 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\wlbsctrl.dll	
svchost	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 24.50 KB (25,088 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\svchost.exe	
rpcss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 672.00 KB (688,128 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\rpcss.dll	
xpssp2res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 2.77 MB (2,899,456 bytes)	3/25/2005
6:00 AM	Microsoft Corporation c:\windows\system32\xpssp2res.dll	

clbcatq	2001.12.4720.1830 (srv03_spl_rtm.050324-1447)	865.00 KB (885,760 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.1830 (srv03_spl_rtm.050324-1447)	779.50 KB (798,208 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\comres.dll	
ntmarta	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	222.50 KB (227,840 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ntmarta.dll	
wzcsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	492.00 KB (503,808 bytes)	3/24/2005
11:35 AM	Microsoft Corporation	c:\windows\system32\wzcsvc.dll	
rtutils	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	66.00 KB (67,584 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rtutils.dll	
wmi	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	5.50 KB (5,632 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wmi.dll	
dhcpcsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	219.00 KB (224,256 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\dhcpcsvc.dll	
atl	3.05.2284 96.50 KB (98,816 bytes)	3/25/2005	6:00 AM Microsoft Corporation
rastls	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	236.50 KB (242,176 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rastls.dll	
cryptui	5.131.3790.1830 (srv03_spl_rtm.050324-1447)	705.50 KB (722,432 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cryptui.dll	
mprapi	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	154.50 KB (158,208 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mprapi.dll	
activeds	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	348.50 KB (356,864 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\activeds.dll	
adsldpc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	240.50 KB (246,272 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\adsldpc.dll	
credui	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	202.00 KB (206,848 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\credui.dll	
rasapi32	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	410.00 KB (419,840 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rasapi32.dll	
rasman	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	95.50 KB (97,792 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\rasman.dll	

tapi32	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	332.50 KB (340,480 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\tapi32.dll	
raschap	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	141.00 KB (144,384 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\raschap.dll	
schedsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	308.50 KB (315,904 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\system32\schedsvc.dll	
msidle	6.00.3790.1830 (srv03_spl_rtm.050324-1447)	9.00 KB (9,216 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msidle.dll	
wkssvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	221.00 KB (226,304 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wkssvc.dll	
wiarpc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	57.00 KB (58,368 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\wiarpc.dll	
aelupsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	31.50 KB (32,256 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\aelupsvc.dll	
apphelp	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	241.00 KB (246,784 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\apphelp.dll	
cryptsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	114.00 KB (116,736 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cryptsvc.dll	
certcli	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	372.00 KB (380,928 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\certcli.dll	
vssapi	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	1.26 MB (1,320,960 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\vssapi.dll	
dmserver	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	36.50 KB (37,376 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\dmserver.dll	
es	2001.12.4720.1830 (srv03_spl_rtm.050324-1447)	357.00 KB (365,568 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\es.dll	
pchsvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	76.00 KB (77,824 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\pchsvc.dll	
srsvvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	156.50 KB (160,256 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\srsvvc.dll	
seclogon	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	27.50 KB (28,160 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\seclogon.dll	
sens	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	63.50 KB (65,024 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sens.dll	
trkwks	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	177.50 KB (181,760 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\trkwks.dll	
wmisvc	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	227.00 KB (232,448 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	c:\windows\system32\wbem\wmisvc.dll	
wuauserv	5.7.3790.1830 (srv03_spl_rtm.050324-1447)	12.00 KB (12,288 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\system32\wuauserv.dll	
wuaueng	5.7.3790.1830 (srv03_spl_rtm.050324-1447)	2.17 MB (2,270,720 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\system32\wuaueng.dll	
advpack	6.00.3790.1830 (srv03_spl_rtm.050324-1447)	146.00 KB (149,504 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\advpak.dll	
cabinet	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	138.50 KB (141,824 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cabinet.dll	
mspatcha	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	48.00 KB (49,152 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mspatcha.dll	
shfolder	6.00.3790.1830 (srv03_spl_rtm.050324-1447)	34.00 KB (34,816 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shfolder.dll	
winhttp	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	508.50 KB (520,704 bytes)	10/11/2006
8:34 AM	Microsoft Corporation	c:\windows\winsxs\amd64_microsoft.windows.wi	
inhttp_6595b6414ccffd_5.1.3790.1830_x-			
ww_agief4db			
comsvcs	2001.12.4720.1830 (srv03_spl_rtm.050324-1447)	2.06 MB (2,156,544 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	c:\windows\system32\comsvcs.dll	
browser	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	125.50 KB (128,512 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\browser.dll	
netrap	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	26.00 KB (26,624 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netrap.dll	
netman	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	457.00 KB (467,968 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netman.dll	
netshell	5.2.3790.1830 (srv03_spl_rtm.050324-1447)	2.32 MB (2,437,120 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	
	c:\windows\system32\netshell.dll	
clusapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	127.00 KB (130,048 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\clusapi.dll	
wininet	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.13 MB (1,186,304 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wininet.dll	
wzcsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	49.00 KB (50,176 bytes)	3/24/2005
11:35 AM	Microsoft Corporation	
	c:\windows\system32\wzcsapi.dll	
wbemcomm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	524.00 KB (536,576 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcomm.dll	
wbemcore	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.24 MB (1,299,968 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcore.dll	
esscli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	626.50 KB (641,536 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\esscli.dll	
fastprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	866.50 KB (887,296 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\fastprox.dll	
wbemsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	58.00 KB (59,392 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemsvc.dll	
wmiutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	171.00 KB (175,104 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	353.50 KB (361,984 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\repdrvfs.dll	
wmiprvsd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	743.00 KB (760,832 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiprvsd.dll	
wbemess	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	532.50 KB (545,280 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemess.dll	
rasdlg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	859.50 KB (880,128 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rasdlg.dll	
ncprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	73.00 KB (74,752 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\wbem\ncprov.dll	
rasadhlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	12.00 KB (12,288 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rasadhlp.dll	

wups	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	
	37.50 KB (38,400 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	
	c:\windows\system32\wups.dll	
spoolsv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	107.00 KB (109,568 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\spoolsv.exe	
spoolss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	163.00 KB (166,912 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\spoolss.dll	
localspl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	730.50 KB (748,032 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\localspl.dll	
cnbjmon	5.2.3790.1224 (dnsrv\skatari).040514-1058)	
	63.00 KB (64,512 bytes)	3/24/2005
11:15 AM	Microsoft Corporation	
	c:\windows\system32\cnbjmon.dll	
pjlmون	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	25.50 KB (26,112 bytes)	3/24/2005
11:22 AM	Microsoft Corporation	
	c:\windows\system32\pjlmون.dll	
tcpmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	91.00 KB (93,184 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\tcpmon.dll	
wsnmp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	67.50 KB (69,120 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wsnmp32.dll	
tcpmib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	25.00 KB (25,600 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\tcpmib.dll	
wsock32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.50 KB (25,088 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wsock32.dll	
mgmtapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	22.50 KB (23,040 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\mgmtapi.dll	
snmpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	31.50 KB (32,256 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\snmpapi.dll	
usbmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	28.50 KB (29,184 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\usbmon.dll	
winrnr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	30.00 KB (30,720 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\winrnr.dll	
wshqos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	33.50 KB (34,304 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wshqos.dll	
win32spl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	167.00 KB (171,008 bytes)	3/25/2005

wups	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	
	37.50 KB (38,400 bytes)	10/11/2006
inetpp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	148.50 KB (152,064 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\inetpp.dll	
icmp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	3.50 KB (3,584 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\icmp.dll	
ps5ui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	232.00 KB (237,568 bytes)	10/11/2006
2:59 PM	Microsoft Corporation	
	c:\windows\system32\spool\drivers\x64\3\ps5	
ui.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	317.00 KB (324,608 bytes)	10/11/2006
2:59 PM	Microsoft Corporation	
	c:\windows\system32\spool\drivers\x64\3\uni	
drvui.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	31.00 KB (31,744 bytes)	3/25/2005
ersvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	354.50 KB (363,008 bytes)	10/11/2006
6:00 AM	Microsoft Corporation	
	c:\windows\system32\ersvc.dll	
termsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	27.50 KB (28,160 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\termsrv.dll	
icaapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	27.50 KB (28,160 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\icaapi.dll	
mstlsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	187.00 KB (191,488 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\mstlsapi.dll	
rdpwsx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	170.13 KB (174,216 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	
	c:\windows\system32\rdpwsx.dll	
rdpsnd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	25.00 KB (25,600 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rdpsnd.dll	
scredir	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	38.50 KB (39,424 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\scredir.dll	
cscui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	441.00 KB (451,584 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\cscui.dll	
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	31.00 KB (31,744 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msacm32.drv	
msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	112.00 KB (114,688 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msacm32.dll	
imaadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.00 KB (24,576 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm	
msadp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	23.50 KB (24,064 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msadp32.acm	
msg711	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	13.50 KB (13,824 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msg711.acm	
msgsm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	34.50 KB (35,328 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msgsm32.acm	
tssoft32	1.01 13.50 KB (13,824 bytes)	3/25/2005 6:00 AM	DSP GROUP, INC.
	c:\windows\system32\tssoft32.acm		
tsd32	1.03 24.50 KB (25,088 bytes)	3/25/2005 6:00 AM	DSP GROUP, INC.
	c:\windows\system32\tsd32.dll		
printui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	928.50 KB (950,784 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\printui.dll	
cfgmgr32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	18.00 KB (18,432 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cfgmgr32.dll	
cryptnet	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	108.50 KB (111,104 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\cryptnet.dll	
sensapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	10.50 KB (10,752 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\sensapi.dll	
rdclip	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	99.00 KB (101,376 bytes)	10/11/2006
1:40 PM	Microsoft Corporation	c:\windows\system32\rdclip.exe	
urlmon	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.02 MB (1,074,176 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\urlmon.dll	
explorer	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.30 MB (1,364,480 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\explorer.exe	
browseui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	1.53 MB (1,601,536 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\browseui.dll	
shdocvw	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	2.30 MB (2,416,128 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shdocvw.dll	
themeui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	530.50 KB (543,232 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\themeui.dll	
msim32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	6.50 KB (6,656 bytes)	3/25/2005

6:00 AM	Microsoft Corporation	c:\windows\system32\msim32.dll	
linkinfo	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	30.00 KB (30,720 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\linkinfo.dll	
ntshrui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	184.00 KB (188,416 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ntshrui.dll	
webcheck	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	439.00 KB (449,536 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\webcheck.dll	
stobject	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	142.50 KB (145,920 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\stobject.dll	
batmeter	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	41.50 KB (42,496 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\batmeter.dll	
powrprof	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	32.50 KB (33,280 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\powrprof.dll	
drprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	24.00 KB (24,576 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\drprov.dll	
ntlanman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	71.50 KB (73,216 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\ntlanman.dll	
netui0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	130.00 KB (133,120 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netui0.dll	
davclnt	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.00 KB (38,912 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\davclnt.dll	
browselc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	338.50 KB (346,624 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netui1.dll	
6:00 AM	Microsoft Corporation	c:\windows\system32\itss.dll	
netui1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	338.50 KB (346,624 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\itss.dll	
davclnt	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	38.00 KB (38,912 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\browselc.dll	
shdoclc	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	589.50 KB (603,648 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\shdoclc.dll	
mprui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	67.50 KB (69,120 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mprui.dll	
netui2	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	542.00 KB (555,008 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netui2.dll	

comdlg32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	446.50 KB (457,216 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\comdlg32.dll	
netmsg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	179.00 KB (183,296 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netmsg.dll	
netplwiz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	938.50 KB (961,024 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\netplwiz.dll	
wuauctl	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	156.00 KB (159,744 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\system32\wuauctl.exe	
wuaucpl	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	177.50 KB (181,760 bytes)	10/11/2006
6:00 AM	Microsoft Corporation	c:\windows\system32\wuaucpl.cpl	
helpctr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.30 MB (1,363,456 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\helpctr.exe	
hcappres	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	7.50 KB (7,680 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\hcappres.dll	
itss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	208.00 KB (212,992 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\itss.dll	
msxml3	8.70.1104.0	2.04 MB (2,141,184 bytes)	3/25/2005 6:00 AM Microsoft Corporation
bytes)	c:\windows\system32\msxml3.dll		
pchshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	155.00 KB (158,720 bytes)	10/11/2006
1:41 PM	Microsoft Corporation	c:\windows\pchealth\helpctr\binaries\pchshell.dll	
mlang	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	686.00 KB (702,464 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mlang.dll	
mshtml	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	5.65 MB (5,928,448 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\mshtml.dll	
mslsls31	3.10.349.0	357.00 KB (365,568 bytes)	3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mslsls31.dll			
msimtf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	380.50 KB (389,632 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msimtf.dll	
msctf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	617.50 KB (632,320 bytes)	3/25/2005
6:00 AM	Microsoft Corporation	c:\windows\system32\msctf.dll	

```

jscript      5.6.0.8827      974.50 KB (997,888
bytes)    3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\jscript.dll
imm32       5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
208.00 KB (212,992 bytes) 3/25/2005
6:00 AM     Microsoft Corporation
c:\windows\system32\imm32.dll
mshtimed    6.00.3790.1830 (srv03_sp1_rtm.050324-1447)
905.50 KB (927,232 bytes) 3/25/2005
6:00 AM     Microsoft Corporation
c:\windows\system32\mshtimed.dll
vbscript    5.6.0.8827      646.50 KB (662,016
bytes)    3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo       5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
636.00 KB (651,264 bytes) 10/11/2006
1:41 PM     Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u     6.50.9146.0      1.39 MB (1,462,272
bytes)    3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\mfc42u.dll
riched32    5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
7.00 KB (7,168 bytes) 3/25/2005
6:00 AM     Microsoft Corporation
c:\windows\system32\riched32.dll
riched20    5.31.23.1224      1.10 MB (1,157,120
bytes)    3/25/2005 6:00 AM Microsoft Corporation
c:\windows\system32\riched20.dll
wbemprox   5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
38.00 KB (38,912 bytes) 10/11/2006
1:40 PM     Microsoft Corporation
c:\windows\system32\wbem\wbemprox.dll
mydocs      6.00.3790.1830 (srv03_sp1_rtm.050324-1447)
101.00 KB (103,424 bytes) 3/25/2005
6:00 AM     Microsoft Corporation
c:\windows\system32\mydocs.dll
helpsvc     5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
1.52 MB (1,591,296 bytes) 10/11/2006
1:41 PM     Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe
[Services]
Display Name      Name      State      Start Mode
Service Type      Path      Error Control
Start Name        Tag ID
Application Experience Lookup Service AeLookupSvc
Running           Auto      Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Alerter           Alerter   Stopped   Share Process
c:\windows\system32\svchost.exe -k
localservice      Normal   NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped          Manual   Own Process
c:\windows\system32\alg.exe  Normal   NT
AUTHORITY\LocalService 0
Application Management AppMgmt  Stopped
Manual            Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
ASP.NET State Service aspnet_state
Stopped          Manual   Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\aspnet_state.exe Normal   NT
AUTHORITY\NetworkService 0
Windows Audio     AudioSrv Stopped   Disabled
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped          Manual   Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Computer Browser Brower Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Indexing Service CiSvc Stopped   Disabled
Share Process
c:\windows\system32\ciscvc.exe Normal
LocalSystem        0
ClipBook ClipSrv Stopped   Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal            LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped          Manual   Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorvw.exe Ignore   LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_x64
clr_optimization_v2.0.50727_64
Stopped          Manual   Own Process
c:\windows\microsoft.net\framework64\v2.0.5
0727\mscorvw.exe Ignore   LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual            Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal            LocalSystem 0
Cryptographic Services CryptSvc Running
Auto              Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running           Auto      Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch        Normal   LocalSystem 0
Distributed File System Dfs      Stopped
Manual            Own Process
c:\windows\system32\dfssvc.exe
Normal            LocalSystem 0
DHCP Client      Dhcp     Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice    Normal   NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin           Stopped   Manual   Share Process

```

```

c:\windows\system32\dmadmin.exe /com
Normal            LocalSystem 0
Logical Disk Manager dmserver Running
Auto              Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
DNS Client        DnsCache Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice    Normal   NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc  Running
Auto              Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore            LocalSystem 0
Event Log Eventlog Running Auto
Share Process
c:\windows\system32\services.exe
Normal            LocalSystem 0
COM+ Event System EventSystem Running
Auto              Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled          Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
HTTP SSL HTTPPfilter Stopped   Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem        0
IAS Jet Database Access IASJet Stopped
Manual            Share Process
c:\windows\syswow64\svchost.exe -k iasjet
Normal            LocalSystem 0
IMAPI CD-Burning COM Service ImapiService
Stopped          Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem        0
Intersite Messaging IsmServ Stopped   Disabled Own
Process
c:\windows\system32\ismserv.exe
Normal            LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped          Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem        0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
Workstation lanmanworkstation Running
Auto              Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal            LocalSystem 0
License Logging LicenseService Stopped
Disabled          Own Process
c:\windows\system32\llssrv.exe
Normal            NT AUTHORITY\NetworkService 0

```

```

TCP/IP NetBIOS Helper      LmHosts   Running
    Auto     Share Process
        c:\windows\system32\svchost.exe -k
localservice      Normal   NT
AUTHORITY\LocalService      0
Messenger Messenger Stopped  Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
NetMeeting Remote Desktop Sharing mnmsrvc
    Stopped  Disabled Own Process
        c:\windows\system32\mnmsrvc.exe
    Normal   LocalSystem  0
Distributed Transaction Coordinator MSDTC
    Running  Auto   Own Process
        c:\windows\system32\msdtc.exe Normal  NT
AUTHORITY\NetworkService      0
SQL Server FullText Search (MSSQLSERVER)
    msftesql Running  Auto   Own Process
        "c:\program files\microsoft sql
server\mssql.1\mssql\binn\msftesql.exe" -s:mssql.1 -
f:mssqlserver      Normal   NT
AUTHORITY\NetworkService      0
Windows Installer MSI Server Stopped  Manual
    Share Process
        c:\windows\system32\msiexec.exe /v
    Normal   LocalSystem  0
SQL Server (MSSQLSERVER) MSSQLSERVER
    Stopped  Manual  Own Process
        "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlservr.exe" -smssqlserver
    Normal   NT AUTHORITY\NetworkService  0
SQL Server Active Directory Helper
    MSSQLServerADHelper Stopped  Disabled Own
Process "c:\program files\microsoft sql
server\90\shared\sqladhlp90.exe"      Normal   NT
AUTHORITY\NetworkService      0
Network DDE NetDDE Stopped  Disabled
    Share Process
        c:\windows\system32\netdde.exe
    Normal   LocalSystem  0
Network DDE DSDM NetDDEdsm Stopped
    Disabled Share Process
        c:\windows\system32\netdde.exe
    Normal   LocalSystem  0
Net Logon Netlogon Stopped  Manual Share Process
    c:\windows\system32\lsass.exe Normal
    LocalSystem  0
Network Connections Netman Running  Manual
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Network Location Awareness (NLA) Nla
    Running  Manual Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
File Replication NtFrs Stopped  Manual  Own
Process c:\windows\system32\ntfrs.exe Ignore
    LocalSystem  0
NT LM Security Support Provider NtLmssp
    Stopped  Manual Share Process
        c:\windows\system32\lsass.exe Normal
    LocalSystem  0

```

```

Removable Storage NtmsSvc Stopped  Manual
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Office Source Engine ose Stopped
    Manual   Own Process "c:\program
files (x86)\common files\microsoft shared\source
engine\ose.exe"      Normal   LocalSystem  0
Plug and Play PlugPlay Running  Auto
    Share Process
        c:\windows\system32\services.exe
    Normal   LocalSystem  0
IPSEC Services PolicyAgent Running
    Auto     Share Process
        c:\windows\system32\lsass.exe Normal
    LocalSystem  0
Protected Storage ProtectedStorage Running
    Auto     Share Process
        c:\windows\system32\lsass.exe Normal
    LocalSystem  0
Remote Access Auto Connection Manager RasAuto
    Stopped  Manual Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Remote Access Connection Manager RasMan
    Stopped  Manual Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Remote Desktop Help Session Manager RDSessionMgr
    Stopped  Manual Own Process
        c:\windows\system32\sessmgr.exe
    Normal   LocalSystem  0
Routing and Remote Access RemoteAccess
    Stopped  Disabled Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Remote Registry RemoteRegistry Running
    Auto     Share Process
        c:\windows\system32\svchost.exe -k regsvc
    Normal   NT AUTHORITY\LocalService  0
Remote Procedure Call (RPC) Locator RpcLocator
    Stopped  Manual Own Process
        c:\windows\system32\locator.exe
    Normal   NT AUTHORITY\NetworkService  0
Remote Procedure Call (RPC) RpcSs Running
    Auto     Share Process
        c:\windows\system32\svchost.exe -k rpcss
    Normal   NT AUTHORITY\NetworkService  0
Resultant Set of Policy Provider RSOPProv
    Stopped  Manual Share Process
        c:\windows\system32\rspoprov.exe
    Normal   LocalSystem  0
Special Administration Console Helper sacsvc
    Stopped  Manual Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Security Accounts Manager SamSs Running
    Auto     Share Process

```

```

c:\windows\system32\lsass.exe Normal
LocalSystem  0
Smart Card SCardSvr Stopped  Manual
    Share Process
        c:\windows\system32\scardsvr.exe
    Ignore   NT AUTHORITY\LocalService  0
Task Scheduler Schedule Running  Auto
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Secondary Logon seclogon Running  Auto
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Ignore   LocalSystem  0
System Event Notification SENS Running
    Auto     Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Windows Firewall/Internet Connection Sharing (ICS)
    SharedAccess Stopped  Disabled
    Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Normal   LocalSystem  0
Shell Hardware Detection ShellHDetection
    Running  Auto Share Process
        c:\windows\system32\svchost.exe -k netsvcs
    Ignore   LocalSystem  0
Print Spooler Spooler Running  Auto  Own
Process C:\windows\system32\spools.v.exe
    Normal   LocalSystem  0
SQL Server Browser SQLBrowser Stopped
    Disabled Own Process "c:\program
files (x86)\microsoft sql
server\90\shared\sqlbrowser.exe"      Normal   NT
AUTHORITY\LocalService      0
SQL Server Agent (MSSQLSERVER)
    SQLSERVERAGENT Stopped  Manual  Own
Process "c:\program files\microsoft sql
server\mssql.1\mssql\binn\sqlagent90.exe" -i
mssqlserver      Normal   LocalSystem  0
SQL Server VSS Writer SQLWriter Stopped
    Manual   Own Process "c:\program
files\microsoft sql server\90\shared\sqlwriter.exe"
    Normal   LocalSystem  0
Windows Image Acquisition (WIA) stisvc
    Stopped  Disabled Share Process
        c:\windows\system32\svchost.exe -k imagsvc
    Normal   NT AUTHORITY\LocalService  0
Microsoft Software Shadow Copy Provider swprv
    Stopped  Manual Own Process
        c:\windows\system32\svchost.exe -k swprv
    Normal   LocalSystem  0
Performance Logs and Alerts SysmonLog Stopped
    Auto     Own Process
        c:\windows\system32\smlogsvc.exe
    Normal   NT Authority\NetworkService  0
Telephony TapiSrv Stopped  Manual Share Process
    c:\windows\system32\svchost.exe -k tapisrv
    Normal   LocalSystem  0

```

```

Terminal Services TermService Running
    Manual Share Process
    c:\windows\system32\svchost.exe -k termsvc
Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Telnet TlntSrv Stopped Disabled Own Process
    c:\windows\system32\tlntsvr.exe
Normal NT AUTHORITY\LocalService 0

Distributed Link Tracking Server TrkSvr
Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Terminal Services Session Directory Tssdis
Stopped Disabled Own Process
c:\windows\system32\tssdis.exe
Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
Stopped Manual Own Process
c:\windows\system32\wdfmgr.exe
Normal NT AUTHORITY\LocalService 0

Uninterruptible Power Supply UPS Stopped
Manual Own Process
c:\windows\system32\ups.exe Normal NT
AUTHORITY\LocalService 0
Virtual Disk Service vds Stopped
Manual Own Process
c:\windows\system32\vds.exe Normal
LocalSystem 0
Volume Shadow Copy VSS Stopped Manual Own
Process c:\windows\system32\vssvc.exe Normal
LocalSystem 0
Windows Time W32Time Running Auto
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WebClient WebClient Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
WinHttpAutoProxySvc Stopped Manual
Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Ignore LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

```

```

Windows Management Instrumentation Driver Extensions
    Wmi Stopped Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
WMI Performance Adapter WmiApSrv Stopped
    Manual Own Process
    c:\windows\system32\wbem\wmiapsrv.exe
Normal LocalSystem 0
Automatic Updates wuauserv Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Wireless Configuration WZCSVC Running
    Auto Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Network Provisioning Service xmlprov Stopped
    Manual Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0

[Program Groups]

Group Name Name User Name
Accessories Default User:Accessories
    Default User
Accessories\Accessibility Default
User:Accessories\Accessibility Default User
Accessories\Entertainment Default
User:Accessories\Entertainment Default User
Startup Default User:Startup Default User
Accessories All Users:Accessories All
Users
Accessories\Accessibility All
Users:Accessories\Accessibility All Users
Accessories\Communications All
Users:Accessories\Communications All Users
Accessories\Entertainment All
Users:Accessories\Entertainment All Users
Accessories\System Tools All
Users:Accessories\System Tools All Users
Administrative Tools All
Users:Administrative Tools All Users
HP System Tools All Users:HP System Tools All
Users
HP System Tools\HP Array Configuration Utility All
Users:HP System Tools\HP Array Configuration Utility
All Users
Microsoft SQL Server 2005 All Users:Microsoft SQL
Server 2005 All Users
Microsoft SQL Server 2005\Analysis Services All
Users:Microsoft SQL Server 2005\Analysis Services All
Users
Microsoft SQL Server 2005\Configuration Tools All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Microsoft SQL Server 2005\Documentation and Tutorials All
Users:Microsoft SQL Server 2005\Documentation and Tutorials All
Users

```

```

Microsoft SQL Server 2005\Documentation and
Tutorials\Tutorials All Users:Microsoft SQL Server
2005\Documentation and Tutorials\Tutorials All
Users
Microsoft SQL Server 2005\Performance Tools All
Users:Microsoft SQL Server 2005\Performance Tools All
Users
Microsoft Visual Studio 2005 All Users:Microsoft
Visual Studio 2005 All Users
Microsoft Visual Studio 2005\Visual Studio Tools All
Users:Microsoft Visual Studio 2005\Visual Studio
Tools All Users
Startup All Users:Startup All Users
Accessories NT AUTHORITY\SYSTEM:Accessories
    NT AUTHORITY\SYSTEM:Accessories\Accessibility NT
AUTHORITY\SYSTEM
Accessories\Entertainment NT
AUTHORITY\SYSTEM:Accessories\Entertainment NT
AUTHORITY\SYSTEM
Startup NT AUTHORITY\SYSTEM:Startup NT
AUTHORITY\SYSTEM
Accessories QUAD\Administrator:Accessories
    QUAD\Administrator
Accessories\Accessibility QUAD\Administrator:Accessories\Accessibilit
y QUAD\Administrator
Accessories\Entertainment QUAD\Administrator:Accessories\Entertainmen
t QUAD\Administrator
Administrative Tools QUAD\Administrator:Administrative Tools
    QUAD\Administrator
Startup QUAD\Administrator:Startup QUAD\Administrator

[Startup Programs]

Program Command User Name Location
desktop desktop.ini NT AUTHORITY\SYSTEM
Startup
desktop desktop.ini QUAD\Administrator
Startup
desktop desktop.ini .DEFAULT Startup
desktop desktop.ini All Users Common
Startup

[OLE Registration]

Object Local Server
Sound (OLE2) sndrec32.exe
Media Clip mplay32.exe
Video Clip mplay32.exe /avi
MIDI Sequence mplay32.exe /mid
Sound Not Available
Media Clip Not Available
WordPad Document "%programfiles%\windows
nt\accessories\wordpad.exe"
Bitmap Image mspaint.exe

[Windows Error Reporting]
```

Time	Type	Details	
[Internet Settings]			
[Internet Explorer]			
[Following are sub-categories of this main category]			
[Summary]			
Item	Value		
Version	6.0.3790.1830		
Build	63790.1830		
Application Path	C:\Program Files\Internet Explorer		
Language	English (United States)		
Active Printer	Labprinter on INFORB (from CAMPBELLBRXP) in session 1,winspool,TS001		
Cipher Strength	128-bit		
Content Advisor	Disabled		
IEAK Install	No		
[File Versions]			
File	Version	Size	
	Company	Date	Path
actxprxy.dll	6.0.3790.1830	221 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
advpack.dll	6.0.3790.1830	146 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx	6.0.3790.1830	147 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browselc.dll	6.0.3790.1830	63 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
browseui.dll	6.0.3790.1830	1,564 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
cdfview.dll	6.0.3790.1830	216 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
comctl32.dll	5.82.3790.1830	935 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxttrans.dll	6.3.3790.1830	320 KB	
		3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation
dxtmsft.dll	6.3.3790.1830	549 KB	
		3/25/2005 6:00:00 AM	
C:\WINDOWS\system32 Microsoft Corporation			
iecont.dll	<File Missing>	Not Available	
	Not Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available	
	Not Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.1830	417 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
ipeers.dll	6.0.3790.1830	361 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
iesetup.dll	6.0.3790.1830	71 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
ieuinit.inf	Not Available	24 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Not Available	
iexplore.exe	6.0.3790.1830	94 KB	
	3/25/2005 6:00:00 AM	C:\Program Files\Internet Explorer Microsoft Corporation	
imgutil.dll	6.0.3790.1830	61 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
inetcpl.cpl	6.0.3790.1830	428 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
inetcplc.dll	6.0.3790.1830	110 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
inseng.dll	6.0.3790.1830	147 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
mlang.dll	6.0.3790.1830	686 KB	3/25/2005
	6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
msencode.dll	<File Missing>	Not Available	
	Not Available	Not Available	Not Available
mshta.exe	6.0.3790.1830	38 KB	3/25/2005
	6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
mshtml.dll	6.0.3790.1830	5,790 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
mshtml.tlb	6.0.3790.1830	1,320 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
mshtmled.dll	6.0.3790.1830	906 KB	
	3/25/2005 6:00:00 AM		
C:\WINDOWS\system32 Microsoft Corporation			
mshtmlm.dll	6.0.3790.1830	56 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
msident.dll	6.0.3790.1830	69 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
msidntld.dll	6.0.3790.1830	16 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
msieftp.dll	6.0.3790.1830	369 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
msrating.dll	6.0.3790.1830	240 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
mstime.dll	6.0.3790.1830	878 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
occache.dll	6.0.3790.1830	126 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
proctexe.ocx	<File Missing>	Not Available	
	Not Available	Not Available	Not Available
sendmail.dll	6.0.3790.1830	64 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
shdoclc.dll	6.0.3790.1830	590 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
shdocvw.dll	6.0.3790.1830	2,360 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
shfolder.dll	6.0.3790.1830	34 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
shlwapi.dll	6.0.3790.1830	607 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
tdc.ocx	1.3.0.3130	91 KB	3/25/2005
	6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
url.dll	6.0.3790.1830	40 KB	3/25/2005
	6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	
urlmon.dll	6.0.3790.1830	1,049 KB	
	3/25/2005 6:00:00 AM	C:\WINDOWS\system32 Microsoft Corporation	

```

webcheck.dll      6.0.3790.1830    439 KB
3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

wininet.dll       6.0.3790.1830    1,159 KB
3/25/2005 6:00:00 AM
C:\WINDOWS\system32 Microsoft Corporation

[Connectivity]
Item      Value
Connection Preference   Never dial

LAN Settings
AutoConfigProxy      wininet.dll
AutoProxyDetectMode  Disabled
AutoConfigURL        Disabled
Proxy                Disabled
ProxyServer          Disabled
ProxyOverride         Disabled

[Cache]
[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Page Refresh Type  Automatic
Temporary Internet Files Folder      C:\Documents
and Settings\Administrator\Local Settings\Temporary
Internet Files
Total Disk Space     Not Available
Available Disk Space  Not Available
Maximum Cache Size  Not Available
Available Cache Size Not Available

[List of Objects]
Program File      Status   CodeBase
No cached object information available

[Content]
[ Following are sub-categories of this main category ]
[Summary]

Item      Value
Content Advisor     Disabled

[Personal Certificates]
Issued To Issued By Validity  Signature Algorithm
No personal certificate information available

[Other People Certificates]
Issued To Issued By Validity  Signature Algorithm

```

```

No other people certificate information available

[Publishers]
Name
No publisher information available

[Security]
Zone      Security Level
My Computer Custom
Local intranet Custom
Trusted sites Custom
Internet   High
Restricted sites Custom



---



## Server Bus Performance Driver Registry Parameters



Key Name:  
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters  
Class Name: <NO CLASS>  
Last Write Time: 11/6/2006 - 4:01 PM



| Value | Name           | Type      | Data |
|-------|----------------|-----------|------|
| 0     | CompletionMode | REG_DWORD | 0x2  |
| 1     | CostTimerRate  | REG_DWORD | 0x2  |



Key Name:  
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller4  
Class Name: <NO CLASS>  
Last Write Time: 10/13/2006 - 9:17 AM



| Value | Name           | Type      | Data |
|-------|----------------|-----------|------|
| 0     | CompletionMode | REG_DWORD | 0x1  |



Key Name:  
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security  
Class Name: <NO CLASS>  
Last Write Time: 10/13/2006 - 8:56 AM



| Value | Name     | Type       | Data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------|----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | Security | REG_BINARY | 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14<br>00 00 00 .....A.....<br>00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02<br>80 14 00 0.....<br>00000020 ff 01 0f 01 01 01 00 00 - 00 00 00 01 00<br>00 00 00 .....<br>00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd<br>01 02 00 .....Y...<br>00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00<br>00 18 00 .....<br>00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20<br>00 00 00 .....<br>00000060 20 02 00 00 00 14 00 - 8d 01 02 00 01<br>01 00 00 .....<br>00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d<br>01 02 00 .....<br>00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00<br>00 14 00 .....<br>00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b<br>00 00 00 ..... |


```

```

Value 6
Name: Group
Type: REG_SZ
Data: port

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 4:01 PM


| Value | Name           | Type      | Data |
|-------|----------------|-----------|------|
| 0     | CompletionMode | REG_DWORD | 0x2  |
| 1     | CostTimerRate  | REG_DWORD | 0x2  |



Key Name:  
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Parameters\Controller4  
Class Name: <NO CLASS>  
Last Write Time: 10/13/2006 - 9:17 AM



| Value | Name           | Type      | Data |
|-------|----------------|-----------|------|
| 0     | CompletionMode | REG_DWORD | 0x1  |



Key Name:  
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Security  
Class Name: <NO CLASS>  
Last Write Time: 10/13/2006 - 8:56 AM



| Value | Name     | Type       | Data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------|----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | Security | REG_BINARY | 00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14<br>00 00 00 .....A.....<br>00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02<br>80 14 00 0.....<br>00000020 ff 01 0f 01 01 01 00 00 - 00 00 00 01 00<br>00 00 00 .....<br>00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd<br>01 02 00 .....Y...<br>00000040 01 01 00 00 00 00 00 05 - 12 00 00 00 00<br>00 18 00 .....<br>00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20<br>00 00 00 .....<br>00000060 20 02 00 00 00 14 00 - 8d 01 02 00 01<br>01 00 00 .....<br>00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d<br>01 02 00 .....<br>00000080 01 01 00 00 00 00 00 05 - 06 00 00 00 00<br>00 14 00 .....<br>00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b<br>00 00 00 ..... |


```

```

000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 ...ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 ......



Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissb\Enum
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 4:03 PM
Value 0
Name: 0
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&356d70
36&0&00000010

Value 1
Name: Count
Type: REG_DWORD
Data: 0x7

Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x7

Value 3
Name: 1
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\6&14cdf4
29&0&00080010

Value 4
Name: 2
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&8c2005
8&0&0038

Value 5
Name: 3
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&79c23&
0&0030

Value 6
Name: 4
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&lab8b1
8d&0&0028

Value 7
Name: 5
Type: REG_SZ

```

```

Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_02\4&237315
c2&0&0020

```

```

Value 8
Name: 6
Type: REG_SZ
Data:
PCI\VEN_103C&DEV_3230&SUBSYS_3223103C&REV_03\4&efc3e7
9&0&0018

```

Server Disk Device Performance Driver Registry Parameters

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 4:03 PM
Value 0
Name: Type
Type: REG_DWORD
Data: 0x1

```

```

Value 1
Name: Start
Type: REG_DWORD
Data: 0

```

```

Value 2
Name: ErrorControl
Type: REG_DWORD
Data: 0x1

```

```

Value 3
Name: Tag
Type: REG_DWORD
Data: 0x102

```

```

Value 4
Name: ImagePath
Type: REG_EXPAND_SZ
Data: system32\DRIVERS\hpqcissd.sys

```

```

Value 5
Name: DisplayName
Type: REG_SZ
Data: Smart Array Controllers Non-
Miniport Disk Driver

```

```

Value 6
Name: Group
Type: REG_SZ
Data: Primary Disk

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\hpqcissd\Security
Class Name: <NO CLASS>
Last Write Time: 10/13/2006 - 9:12 AM
Value 0
Name: Security
Type: REG_BINARY
Data:

```

```

00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Ä.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0.....0.....
00000020 ff 01 00 01 01 00 00 - 00 00 00 01 00
00 00 00 .....ý.....
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ý...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 .....0.....
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 .....ý.....
00000060 20 02 00 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 .....0.....
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 .....0.....
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 .....0.....
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 .....0.....
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ý.....
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 .....#.....
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 .....0.....

```

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\services\hpqcissd\Enum
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 4:03 PM
Value 0
Name: 0
Type: REG_SZ
Data:
HPQCIS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1bbb46d2&0&
0000040000000000

```

```

Value 1
Name: Count
Type: REG_DWORD
Data: 0x1d

```

```

Value 2
Name: NextInstance

```

Type: REG_DWORD	Data: 0x1d		
Value 3	Name: 1 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1bbb46d2&0&0100004000000000	Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1724fe17&0&0400004000000000	Value 21 Name: 19 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&00004000000000
Value 4	Name: 2 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1bbb46d2&0&0200004000000000	Value 12 Name: 10 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&0100004000000000	Value 22 Name: 20 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&51be01&0&00004000000000
Value 5	Name: 3 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1bbb46d2&0&0300004000000000	Value 13 Name: 11 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&0100004000000000	Value 23 Name: 21 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&51be01&0&0100004000000000
Value 6	Name: 4 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1bbb46d2&0&0400004000000000	Value 14 Name: 12 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&0200004000000000	Value 24 Name: 22 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&51be01&0&0300004000000000
Value 7	Name: 5 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1724fe17&0&0000040000000000	Value 15 Name: 13 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&0300004000000000	Value 25 Name: 23 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&51be01&0&0400004000000000
Value 8	Name: 6 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1724fe17&0&0100004000000000	Value 16 Name: 14 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&f79742&0&0400004000000000	Value 26 Name: 24 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&0000040000000000
Value 9	Name: 7 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1724fe17&0&0200004000000000	Value 17 Name: 15 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&39ce35b9&0&00000400000000	Value 27 Name: 25 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&0100004000000000
Value 10	Name: 8 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\7&1724fe17&0&0300004000000000	Value 18 Name: 16 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&39ce35b9&0&0100004000000000	Value 28 Name: 26 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffb&0&0200004000000000
Value 11	Name: 9 Type: REG_SZ	Value 19 Name: 17 Type: REG_SZ Data: HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&39ce35b9&0&0200004000000000	Value 29 Name: 27 Type: REG_SZ
		Value 20 Name: 18 Type: REG_SZ	

```

Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffba&0&
0300004000000000

Value 30
Name: 28
Type: REG_SZ
Data:
HPQCISS\Disk&VEN_HP&PROD_LOGICAL_VOLUME\5&1350cffba&0&
0400004000000000

```

Web Client Hardware Configuration

System Information report written at: 11/01/06
15:47:10
System Name: CL97
[System Summary]

Item	Value
OS Name	Microsoft(R) Windows(R) Server 2003, Standard Edition
Version	5.2.3790 Service Pack 1 Build 3790
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	CL97
System Manufacturer	HP
System Model	ProLiant DL360 G4
System Type	X86-based PC
Processor	x86 Family 15 Model 4 Stepping 1
GenuineIntel	-3600 Mhz
Processor	x86 Family 15 Model 4 Stepping 1
GenuineIntel	-3600 Mhz
Processor	x86 Family 15 Model 4 Stepping 1
GenuineIntel	-3600 Mhz
Processor	x86 Family 15 Model 4 Stepping 1
GenuineIntel	-3600 Mhz
BIOS Version/Date	HP P52, 8/16/2005
SMBIOS Version	2.3
Windows Directory	C:\WINDOWS
System Directory	C:\WINDOWS\system32
Boot Device	\Device\HarddiskVolume1
Locale	United States
Hardware Abstraction Layer	Version = "5.2.3790.1830 (srv03_spl_rtm.050324-1447)"
User Name	Not Available
Time Zone	Central Standard Time
Total Physical Memory	1,023.47 MB
Available Physical Memory	796.01 MB
Total Virtual Memory	2.42 GB
Available Virtual Memory	2.28 GB
Page File Space	1.50 GB
Page File	C:\pagefile.sys

[Hardware Resources]

[Conflicts/Sharing]			
Resource	Device	Status	
I/O Port	0x00000000-0x00000CF7	PCI bus	OK
I/O Port	0x00000000-0x00000CF7	Direct memory access controller	RAGE XL PCI Family
IRQ 5	Base System Device		OK
IRQ 5	Base System Device		RAGE XL PCI Family
I/O Port	0x000002F8-0x000002FF	Motherboard resources	OK
I/O Port	0x000002F8-0x000002FF	Communications Port (COM2)	OK
IRQ 16	Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 - 3595	PCI Express Root Port B0 - 3597	OK
IRQ 16	Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597	PCI Express Root Port C0 - 3599	OK
IRQ 16	Standard Universal PCI to USB Host Controller		OK
Memory Address	0xA0000-0xBFFFF	PCI bus	OK
Memory Address	0xA0000-0xBFFFF	RAGE XL PCI Family	OK
Family	(Microsoft Corporation)		OK
I/O Port	0x00004000-0x00004FFF	Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE	OK
I/O Port	0x00004000-0x00004FFF	Smart Array 6i	OK
[DMA]			
Resource	Device	Status	
Channel 7	Direct memory access controller	OK	OK
Channel 2	Standard floppy disk controller	OK	OK
[Forced Hardware]			
Device	PNP Device ID		
[I/O]			
Resource	Device	Status	
0x00000000-0x00000CF7	PCI bus	OK	Direct memory access
0x00000000-0x00000CF7	Direct memory access controller	OK	Direct memory access
controller	OK		
0x0000D000-0x0000FFFF	PCI bus	OK	OK
0x00004000-0x00004FFF	Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE	OK	OK
0x00004000-0x00004FFF	Smart Array 6i	OK	OK
0x00002000-0x0000201F	Standard Universal PCI to USB Host Controller	OK	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
0x00000060-0x00000060			Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK
0x00000064-0x00000064			Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK

0x00000002E-0x0000002F	Extended IO Bus	OK
0x0000004E-0x0000004F	Extended IO Bus	OK
0x000000220-0x0000025F	Extended IO Bus	OK
0x000000280-0x0000029F	Extended IO Bus	OK
0x000003F8-0x000003FF (COM1) OK	Communications Port	
0x000003F2-0x000003F5 controller OK	Standard floppy disk	
0x000003F7-0x000003F7 controller OK	Standard floppy disk	
0x00000500-0x0000050F PCI IDE Controller OK	Standard Dual Channel	
0x000001F0-0x000001F7	Primary IDE Channel OK	
0x000003F6-0x000003F6	Primary IDE Channel OK	
0x00000170-0x00000177 OK	Secondary IDE Channel	
0x00000376-0x00000376 OK	Secondary IDE Channel	
[IRQs]		
Resource Device Status		
IRQ 9 Microsoft ACPI-Compliant System		OK
IRQ 16 Intel (R) E7525/E7520/E7320 PCI Express Root Port A0 - 3595 OK		
IRQ 16 Intel (R) E7525/E7520 PCI Express Root Port B0 - 3597 OK		
IRQ 16 Intel (R) E7520 PCI Express Root Port C0 - 3599 OK		
IRQ 16 Standard Universal PCI to USB Host Controller OK		
IRQ 24 Smart Array 6i OK		
IRQ 25 HP NC7782 Gigabit Server Adapter		OK
IRQ 26 HP NC7782 Gigabit Server Adapter #2		OK
IRQ 19 Standard Universal PCI to USB Host Controller OK		
IRQ 23 Standard Enhanced PCI to USB Host Controller OK		
IRQ 5 Base System Device OK		
IRQ 5 Base System Device OK		
IRQ 0 System timer OK		
IRQ 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard OK		
IRQ 12 PS/2 Compatible Mouse OK		
IRQ 4 Communications Port (COM1) OK		
IRQ 6 Standard floppy disk controller		OK
IRQ 14 Primary IDE Channel OK		
IRQ 3 Communications Port (COM2)		OK
[Memory]		
Resource Device Status		
0xA0000-0xBFFF PCI bus OK		

0xA0000-0xBFFF RAGE XL PCI Family (Microsoft Corporation) OK		
0x40000000-0xFEBFFFF PCI bus OK		
0xFDF00000-0xFDFFFFFF Intel (R) 6300ESB 64-bit PCI-X Bridge - 25AE OK		
0xFDF00000-0xFDFF1FFF Smart Array 6i OK		
0xFDF80000-0xFDFBFFFF Smart Array 6i OK		
0xFDF70000-0xFDF7FFFF HP NC7782 Gigabit Server Adapter OK		
0xFDP60000-0xFDFF6FFF HP NC7782 Gigabit Server Adapter #2 OK		
0xFBEE0000-0xFBEE000F Intel (R) 6300ESB Watchdog Timer - 25AB OK		
0xFBEE0000-0xFBEE03FF Standard Enhanced PCI to USB Host Controller OK		
0xFC000000-0xFC000000 RAGE XL PCI Family (Microsoft Corporation) OK		
0xFBFF0000-0xFBFF0FFF RAGE XL PCI Family (Microsoft Corporation) OK		
0xFBFE0000-0xFBFE01FF Base System Device OK		
0xFBFD0000-0xFBFD07FF Base System Device OK		
0xFBFC0000-0xFBFC1FFF Base System Device OK		
0xFBFO0000-0xFBFO7FFF Base System Device OK		
0xE0000000-0xEFFFFFFF Motherboard resources OK		
0xFEBFFC00-0xFEBFFFFF Standard Dual Channel PCI IDE Controller OK		
[Components]		
[Multimedia]		
[Audio Codecs]		
CODEC Manufacturer Description		
Status File Version Size		
Creation Date		
c:\windows\system32\msyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 16.50 KB (16,896 bytes)		
3/24/2003 7:49 PM		
c:\windows\system32\tsbyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\TSBYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 8.00 KB (8,192 bytes) 3/24/2003		
7:50 PM		
c:\windows\system32\msh263.drv Microsoft Corporation OK		
C:\WINDOWS\system32\MSH263.DRV 5.2.3790.1830 288.00 KB (294,912 bytes)		
12/7/2003 1:25 PM		
c:\windows\system32\iyuv_32.dll Microsoft Corporation OK		
C:\WINDOWS\system32\IYUV_32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 46.50 KB (47,616 bytes) 12/7/2003		
1:25 PM		

1.01 9.50 KB (9,728 bytes)		
3/25/2003 6:00 AM		
c:\windows\system32\imaadp32.acm Microsoft Corporation OK		
C:\WINDOWS\system32\IMAADP32.ACM 5.2.3790.0 (srv03_rtm.030324-2048) 15.50 KB (15,872 bytes) 3/25/2003		
6:00 AM		
c:\windows\system32\msadp32.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSADP32.ACM 5.2.3790.0 (srv03_rtm.030324-2048) 14.50 KB (14,848 bytes) 3/25/2003		
6:00 AM		
c:\windows\system32\msaud32.acm Microsoft Corporation Windows Media Audio Codec OK		
C:\WINDOWS\system32\MSAUD32.ACM 8.00.00.4487 288.00 KB (294,912 bytes)		
3/25/2003 6:00 AM		
c:\windows\system32\msg723.acm Microsoft Corporation OK		
C:\WINDOWS\system32\MSG723.ACM 5.2.3790.1830 120.00 KB (122,880 bytes)		
12/7/2005 1:25 PM		
c:\windows\system32\s1_anet.acm Sipro Lab Telecom Audio Codec OK		
C:\WINDOWS\system32\SL_ANET.ACM 3.02 84.00 KB (86,016 bytes)		
3/25/2003 6:00 AM		
c:\windows\system32\l3codeca.acm Fraunhofer Institut Integrierte Schaltungen IIS Fraunhofer IIS MPEG Layer-3 Codec OK		
C:\WINDOWS\system32\L3CODECA.ACM 1, 9, 0, 0305 284.00 KB (290,816 bytes)		
3/25/2003 6:00 AM		
[Video Codecs]		
CODEC Manufacturer Description		
Status File Version Size		
Creation Date		
c:\windows\system32\msyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\MSYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 16.50 KB (16,896 bytes)		
3/24/2003 7:49 PM		
c:\windows\system32\tsbyuv.dll Microsoft Corporation OK		
C:\WINDOWS\system32\TSBYUV.DLL 5.2.3790.0 (srv03_rtm.030324-2048) 8.00 KB (8,192 bytes) 3/24/2003		
7:50 PM		
c:\windows\system32\msh263.drv Microsoft Corporation OK		
C:\WINDOWS\system32\MSH263.DRV 5.2.3790.1830 288.00 KB (294,912 bytes)		
12/7/2003 1:25 PM		
c:\windows\system32\iyuv_32.dll Microsoft Corporation OK		
C:\WINDOWS\system32\IYUV_32.DLL 5.2.3790.1830 (srv03_sp1_rtm.050324-1447) 46.50 KB (47,616 bytes) 12/7/2003		
1:25 PM		

```

c:\windows\system32\msvidc32.dll      Microsoft
Corporation   OK
  C:\WINDOWS\system32\MSVIDC32.DLL
  5.2.3790.0 (srv03_rtm.030324-2048)
  26.50 KB (27,136 bytes)  3/25/2003
6:00 AM
c:\windows\system32\msrle32.dll      Microsoft
Corporation   OK
  C:\WINDOWS\system32\MSRLE32.DLL
  5.2.3790.0 (srv03_rtm.030324-2048)
  10.50 KB (10,752 bytes)  3/25/2003
6:00 AM
c:\windows\system32\msh261.drv      Microsoft
Corporation   OK
  C:\WINDOWS\system32\MSH261.DRV
  5.2.3790.1830  184.00 KB (188,416
bytes)  12/7/2005 1:25 PM

[CD-ROM]

Item      Value
Drive     D:
Description CD-ROM Drive
Media Loaded No
Media Type CD-ROM
Name      COMPAQ CD-ROM SN-124
Manufacturer (Standard CD-ROM drives)
Status    OK
Transfer Rate Not Available
SCSI Target ID 0
PNP Device ID IDE\CDROMCOMPAQ_CD-ROM_SN-
124          N104  \5&180B77CF&0&0.0.0
Driver    c:\windows\system32\drivers\cdrom.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 51.00 KB
(52,224 bytes), 3/25/2003 6:00 AM)

[Sound Device]

Item      Value
[Display]

Item      Value
Name      RAGE XL PCI Family (Microsoft Corporation)

PNP Device ID
  PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
  7\4&2183A681&0&18F0
Adapter Type ATI RAGE XL PCI (B41), ATI
Technologies Inc. compatible
Adapter Description RAGE XL PCI Family (Microsoft
Corporation)
Adapter RAM  8.00 MB (8,388,608 bytes)
Installed Drivers ati2drad.dll
Driver Version 5.10.3663.6013
INF File atiixpad.inf (ati2mpad section)
Color Planes 1
Color Table Entries 4294967296
Resolution  800 x 600 x 85 hertz
Bits/Pixel  32
Memory Address 0xFC000000-0xFCFFFF
I/O Port  0x00003000-0x000030FF

```

```

Memory Address  0xFBFF0000-0xFBFF0FFF
I/O Port  0x000003B0-0x000003BB
I/O Port  0x000003C0-0x000003DF
Memory Address  0xA0000-0xBFFF
Driver    c:\windows\system32\drivers\ati2mpad.sys
(5.10.3663.6013, 335.38 KB (343,424 bytes), 12/7/2005
4:18 AM)

[Infrared]

Item      Value
[Input]

[Keyboard]

Item      Value
Description Standard 101/102-Key or Microsoft
Natural PS/2 Keyboard
Name      Enhanced (101- or 102-key)
Layout    00000409
PNP Device ID ACPI\PNP0303\4&1F443D2A&0
Number of Function Keys 12
I/O Port  0x00000060-0x00000060
I/O Port  0x00000064-0x00000064
IRQ Channel IRQ 1
Driver    c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 3/25/2003 6:00 AM)

[Pointing Device]

Item      Value
Hardware Type USB Human Interface Device
Number of Buttons 3
Status    OK
PNP Device ID
  USB\VID_049F&PID_0048\5&20E9BADC&0&1
Power Management Supported No
Double Click Threshold 6
Handedness  Right Handed Operation
Driver    c:\windows\system32\drivers\hidusb.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 11.50 KB (11,776
bytes), 12/7/2005 4:58 PM)

Hardware Type PS/2 Compatible Mouse
Number of Buttons 3
Status    OK
PNP Device ID ACPI\PNP0F13\4&1F443D2A&0
Power Management Supported No
Double Click Threshold 6
Handedness  Right Handed Operation
IRQ Channel IRQ 12
Driver    c:\windows\system32\drivers\i8042prt.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 54.50 KB
(55,808 bytes), 3/25/2003 6:00 AM)

[Modem]

Item      Value

```

```

[Network]

[Adapter]

Item      Value
Name      [00000001] RAS Async Adapter
Adapter Type Not Available
Product Type RAS Async Adapter
Installed Yes
PNP Device ID Not Available
Last Reset  11/1/2006 2:24 PM
Index    1
Service Name AsyncMac
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Name      [00000002] WAN Miniport (L2TP)
Adapter Type Not Available
Product Type WAN Miniport (L2TP)
Installed Yes
PNP Device ID ROOT\MS_L2TPMINIPORT\0000
Last Reset  11/1/2006 2:24 PM
Index    2
Service Name Rasl2tp
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address Not Available
Driver    c:\windows\system32\drivers\rasl2tp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 66.00 KB
(67,584 bytes), 3/25/2003 6:00 AM)

Name      [00000003] WAN Miniport (PPTP)
Adapter Type Wide Area Network (WAN)
Product Type WAN Miniport (PPTP)
Installed Yes
PNP Device ID ROOT\MS_PPTPMINIPORT\0000
Last Reset  11/1/2006 2:24 PM
Index    3
Service Name PptpMiniport
IP Address Not Available
IP Subnet Not Available
Default IP Gateway Not Available
DHCP Enabled No
DHCP Server Not Available
DHCP Lease Expires Not Available
DHCP Lease Obtained Not Available
MAC Address 50:50:54:50:30:30
Driver    c:\windows\system32\drivers\rasppp.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 61.00 KB
(62,464 bytes), 3/25/2003 6:00 AM)

```

Name	[00000004] WAN Miniport (PPPOE)
Adapter Type	Wide Area Network (WAN)
Product Type	WAN Miniport (PPPOE)
Installed Yes	
PNP Device ID	ROOT\MS_PPPOMEMIPORT\0000
Last Reset	11/1/2006 2:24 PM
Index	4
Service Name	RasPppoe
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	33:50:6F:45:30:30
Driver	c:\windows\system32\drivers\raspppoe.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 40.00 KB (40,960 bytes), 3/25/2003 6:00 AM)
Name	[00000005] Direct Parallel
Adapter Type	Not Available
Product Type	Direct Parallel
Installed Yes	
PNP Device ID	ROOT\MS_PTIMINIPORT\0000
Last Reset	11/1/2006 2:24 PM
Index	5
Service Name	Raspti
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\raspti.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 19.50 KB (19,968 bytes), 3/25/2003 6:00 AM)
Name	[00000006] WAN Miniport (IP)
Adapter Type	Not Available
Product Type	WAN Miniport (IP)
Installed Yes	
PNP Device ID	ROOT\MS_NDISWANIP\0000
Last Reset	11/1/2006 2:24 PM
Index	6
Service Name	NdisWan
IP Address	Not Available
IP Subnet Not Available	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	Not Available
Driver	c:\windows\system32\drivers\ndiswan.sys (5.2.3790.1830 (srv03_spl_rtm.050324-1447), 91.00 KB (93,184 bytes), 3/25/2003 6:00 AM)
Name	[00000007] HP NC7782 Gigabit Server Adapter

Adapter Type	Ethernet 802.3
Product Type	HP NC7782 Gigabit Server Adapter
Installed Yes	
PNP Device ID	PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1 0\4&19638ECB&0&10E0
Last Reset	11/1/2006 2:24 PM
Index	7
Service Name	q57w2k
IP Address	130.172.11.97
IP Subnet 255.255.0.0	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:15:60:0E:02:2A
Memory Address	0xFDF70000-0xFDF7FFFF
IRQ Channel	IRQ 25
Driver	c:\windows\system32\drivers\q57xp32.sys (8.48.0.0 built by: WinDDK, 139.38 KB (142,720 bytes), 12/7/2005 12:44 PM)
Name	[00000008] HP NC7782 Gigabit Server Adapter
Adapter Type	Ethernet 802.3
Product Type	HP NC7782 Gigabit Server Adapter
Installed Yes	
PNP Device ID	PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1 0\4&19638ECB&0&11E0
Last Reset	11/1/2006 2:24 PM
Index	8
Service Name	q57w2k
IP Address	130.168.40.97
IP Subnet 255.255.0.0	
Default IP Gateway	Not Available
DHCP Enabled	No
DHCP Server	Not Available
DHCP Lease Expires	Not Available
DHCP Lease Obtained	Not Available
MAC Address	00:15:60:0E:02:29
Memory Address	0xFDF60000-0xFDF6FFFF
IRQ Channel	IRQ 26
Driver	c:\windows\system32\drivers\q57xp32.sys (8.48.0.0 built by: WinDDK, 139.38 KB (142,720 bytes), 12/7/2005 12:44 PM)
[Protocol]	
Item	Value
Name	MSAFD Tcpip [TCP/IP]
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes

Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No
Name	MSAFD Tcpip [UDP/IP]
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes
Name	RSVP UDP Service Provider
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	16 bytes
Maximum Message Size	63.93 KB (65,467 bytes)
Message Oriented	Yes
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	Yes
Name	RSVP TCP Service Provider
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	16 bytes
Maximum Message Size	0 bytes
Message Oriented	No
Minimum Address Size	16 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	Yes
Supports Expedited Data	Yes
Supports Graceful Closing	Yes
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{DC824356-0607-4BEB-A371-29F054512430}] SEQPACKET 3
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{DC824356-0607-4BEB-A371-29F054512430}] DATAGRAM 3
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{F82C0051-EEE6-4419-B00E-FBD3C9B049CB}] SEQPACKET 0
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{F82C0051-EEE6-4419-B00E-FBD3C9B049CB}] DATAGRAM 0
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{AF08E806-A2B0-4001-B24F-28D7AE290B39}] SEQPACKET 1
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{AF08E806-A2B0-4001-B24F-28D7AE290B39}] DATAGRAM 1
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}] SEQPACKET 2
Connectionless Service	No
Guarantees Delivery	Yes
Guarantees Sequencing	Yes
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	No
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

Name	MSAFD NetBIOS
	[\\Device\\NetBT_Tcpip_{A1D88620-0D58-4732-8FAA-79AF6EC31BB9}] DATAGRAM 2
Connectionless Service	Yes
Guarantees Delivery	No
Guarantees Sequencing	No
Maximum Address Size	20 bytes
Maximum Message Size	62.50 KB (64,000 bytes)

Message Oriented	Yes
Minimum Address Size	20 bytes
Pseudo Stream Oriented	No
Supports Broadcasting	Yes
Supports Connect Data	No
Supports Disconnect Data	No
Supports Encryption	No
Supports Expedited Data	No
Supports Graceful Closing	No
Supports Guaranteed Bandwidth	No
Supports Multicasting	No

[WinSock]

Item	Value
File	c:\\windows\\system32\\winsock.dll
Size	2.80 KB (2,864 bytes)
Version	3.10
File	c:\\windows\\system32\\wsock32.dll
Size	22.00 KB (22,528 bytes)
Version	5.2.3790.0 (srv03_rtm.030324-2048)

[Ports]

[Serial]

Item	Value
Name	Communications Port (COM2)
Status	OK

```

PNP Device ID      ROOT\*PNP0501\1_0_17_1_0_0
Maximum Input Buffer Size    0
Maximum Output Buffer Size   No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None
Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue Xmit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0
IRQ Channel IRQ 4
I/O Port 0x000003F8-0x000003FF
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 3/25/2003 6:00 AM)

Name Communications Port (COM1)
Status OK
PNP Device ID ACPI\PNP0501\0
Maximum Input Buffer Size 0
Maximum Output Buffer Size No
Settable Baud Rate Yes
Settable Data Bits Yes
Settable Flow Control Yes
Settable Parity Yes
Settable Parity Check Yes
Settable Stop Bits Yes
Settable RLSD Yes
Supports RLSD Yes
Supports 16 Bit Mode No
Supports Special Characters No
Baud Rate 9600
Bits/Byte 8
Stop Bits 1
Parity None

```

```

Busy No
Abort Read/Write on Error No
Binary Mode Enabled Yes
Continue Xmit on XOff No
CTS Outflow Control No
Discard NULL Bytes No
DSR Outflow Control 0
DSR Sensitivity 0
DTR Flow Control Type Enable
EOF Character 0
Error Replace Character 0
Error Replacement Enabled No
Event Character 0
Parity Check Enabled No
RTS Flow Control Type Enable
XOff Character 19
XOffXMit Threshold 512
XOn Character 17
XOnXMit Threshold 2048
XOnXOff InFlow Control 0
XOnXOff OutFlow Control 0
IRQ Channel IRQ 4
I/O Port 0x000003F8-0x000003FF
Driver c:\windows\system32\drivers\serial.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 64.00 KB
(65,536 bytes), 3/25/2003 6:00 AM)

[Parallel]

Item Value
[Storage]

[Drives]

Item Value
Drive A:
Description 3 1/2 Inch Floppy Drive
Drive C:
Description Local Fixed Disk
Compressed No
File System NTFS
Size 33.90 GB (36,405,055,488 bytes)
Free Space 29.48 GB (31,648,690,176 bytes)

Volume Name
Volume Serial Number C8186725

Drive D:
Description CD-ROM Disc

Drive Z:
Description Network Connection
Provider Name \\inforb\audit_fdr

[Disks]

Item Value
Description Disk drive
Manufacturer (Standard disk drives)

```

```

Model HP LOGICAL VOLUME SCSI Disk Device
Bytes/Sector 512
Media Loaded Yes
Media Type Fixed hard disk
Partitions 1
SCSI Bus 0
SCSI Logical Unit 0
SCSI Port 2
SCSI Target ID 4
Sectors/Track 63
Size 33.91 GB (36,413,314,560 bytes)
Total Cylinders 4,427
Total Sectors 71,119,755
Total Tracks 1,128,885
Tracks/Cylinder 255
Partition Disk #0, Partition #0
Partition Size 33.90 GB (36,405,057,024 bytes)

Partition Starting Offset 32,256 bytes

[SCSI]

Item Value
Name Smart Array 6i
Manufacturer Hewlett-Packard Company
Status OK
PNP Device ID PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_0
1\4&19638ECB&0&08E0
Memory Address 0xFDF0000-0xFDFF1FFF
I/O Port 0x00004000-0x00004FFF
Memory Address 0xFDF80000-0xFDFBFFFF
IRQ Channel IRQ 24
Driver c:\windows\system32\drivers\cpqciism.sys
(5.68.0.32 Build 1 (x86), 16.13 KB (16,512 bytes),
5/20/2005 12:16 PM)

[IDE]

Item Value
Name Standard Dual Channel PCI IDE Controller
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&F9
I/O Port 0x00000500-0x0000050F
Memory Address 0xFEFFFC00-0xFEBFFFFFF
Driver c:\windows\system32\drivers\pcide.sys
(5.2.3790.0 (srv03_rtm.030324-2048), 5.50 KB (5,632
bytes), 3/25/2003 6:00 AM)

Name Primary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status OK
PNP Device ID PCIIDE\IDECHANNEL\4&2BBEC4C6&0&0
I/O Port 0x000001F0-0x000001F7
I/O Port 0x000003F6-0x000003F6
IRQ Channel IRQ 14

```

```

Driver      c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
(95,744 bytes), 3/25/2003 6:00 AM)

Name       Secondary IDE Channel
Manufacturer (Standard IDE ATA/ATAPI
controllers)
Status     OK
PNP Device ID PCI IDE\IDECHANNEL\4&2BBEC4C6&0&1

I/O Port   0x00000170-0x00000177
I/O Port   0x00000376-0x00000376
Driver      c:\windows\system32\drivers\atapi.sys
(5.2.3790.1830 (srv03_spl_rtm.050324-1447), 93.50 KB
(95,744 bytes), 3/25/2003 6:00 AM)

[Printing]

Name       Driver    Port Name Server Name
CCA15109 on CCAPRINT02 (from CAMPBELLBRXP) in session
1          HP LaserJet 4100 Series PCL TS005

Labprinter on INFORB (from CAMPBELLBRXP) in session 1
HP LaserJet 5Si/5Si MX PS TS004

[Problem Devices]

Device     PNP Device ID      Error Code
Base System Device
PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
1\4&2183A681&0&20F0 The drivers for this device are
not installed.
Base System Device
PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
1\4&2183A681&0&22F0 The drivers for this device are
not installed.

[USB]

Device     PNP Device ID
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&E8
Standard Universal PCI to USB Host Controller
PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&E9
Standard Enhanced PCI to USB Host Controller
PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0
2\3&61AAA01&0&EF

[Software Environment]

[System Drivers]

Name       Description      File      Type
Started   Start Mode      State
Status    Error Control   Accept Pause
Accept Stop

```

abiosdsk	Abiosdsk	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Ignore	No	No
acpi	Microsoft ACPI Driver	c:\windows\system32\drivers\acpi.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
acpiec	ACPIEC	c:\windows\system32\drivers\acpiec.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
adpu160m	adpu160m	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
adpu320	adpu320	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
afcnt	afcnt	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
afd	AFD Networking Support Environment	c:\windows\system32\drivers\afd.sys	
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
ahal54x	Ahal54x	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
aic78u2	aic78u2	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
aic78xx	aic78xx	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
aliide	Aliide	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
alkernel	Altiris Kernel Driver	c:\windows\system32\drivers\alkernel.sys	
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
asyncmac	RAS Asynchronous Media Driver	c:\windows\system32\drivers\asyncmac.sys	
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
atapi	Standard IDE/ESDI Hard Disk Controller	c:\windows\system32\drivers\atapi.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
atdisk	Atdisk	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Ignore	No	No
ati2mpad	ati2mpad	c:\windows\system32\drivers\ati2mpad.sys	
	Kernel Driver	Yes	Manual
	Running	OK	Ignore No Yes
atmarpc	ATM ARP Client Protocol	c:\windows\system32\drivers\atmarpc.sys	
	Kernel Driver	No	Manual
	Stopped	OK	Normal No No
audstub	Audio Stub Driver	c:\windows\system32\drivers\audstub.sys	
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
beep	Beep	c:\windows\system32\drivers\beep.sys	
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
cbidf2k	cbidf2k	c:\windows\system32\drivers\cbidf2k.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
cd20xrnt	cd20xrnt	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
cdfs	Cdfs	c:\windows\system32\drivers\cdfs.sys	
	File System Driver	Yes	Disabled
	Running	OK	Normal No Yes
cdrom	CD-ROM Driver	c:\windows\system32\drivers\cdrom.sys	
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
changer	Changer	Not Available	Kernel Driver
	No	System	Stopped OK
	Ignore	No	No
clusdisk	Cluster Disk Driver	c:\windows\system32\drivers\clusdisk.sys	
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
cmdide	CmdIde	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
cpqarray	Cpqarray	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
cpqarry2	Cpqarry2	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
cpqcissm	Cpqcissm	c:\windows\system32\drivers\cpqcissm.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
cpqfcalm	Cpqfcalm	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
crcdisk	CRC Disk Filter Driver	c:\windows\system32\drivers\crcdisk.sys	
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes

mraid35x	mraid35x	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
mrx dav	WebDav Client Redirector		
	c:\windows\system32\drivers\mrx dav.sys		
	File System Driver	No	Manual
	Stopped	OK	Normal No No
mr xsmb	MRXSMB		
	c:\windows\system32\drivers\mr xsmb.sys		
	File System Driver	Yes	System
	Running	OK	Normal No Yes
msfs	Msfs		
	c:\windows\system32\drivers\msfs.sys		
	File System Driver	Yes	System
	Running	OK	Normal No Yes
mssmbios	Microsoft System Management BIOS Driver		
	c:\windows\system32\drivers\mssmbios.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
mup	Mup		
	c:\windows\system32\drivers\mup.sys		
	File System Driver	Yes	Boot
	Running	OK	Normal No Yes
ndis	NDIS System Driver		
	c:\windows\system32\drivers\ndis.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
ndistapi	Remote Access NDIS TAPI Driver		
	c:\windows\system32\drivers\ndistapi.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
ndis ui o	NDIS Usermode I/O Protocol		
	c:\windows\system32\drivers\ndis ui o.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
ndiswan	Remote Access NDIS WAN Driver		
	c:\windows\system32\drivers\ndiswan.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
nd proxy	NDIS Proxy		
	c:\windows\system32\drivers\nd proxy.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
netbios	NetBIOS Interface		
	c:\windows\system32\drivers\netbios.sys		
	File System Driver	Yes	System
	Running	OK	Normal No Yes
netbt	NetBios over Tcpip		
	c:\windows\system32\drivers\netbt.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
nfrd960	nfrd960	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
npfs	Npfs		
	c:\windows\system32\drivers\npfs.sys		
	File System Driver	Yes	System
	Running	OK	Normal No Yes
ntfs	Ntfs		
	c:\windows\system32\drivers\ntfs.sys		
	File System Driver	Yes	Disabled
	Running	OK	Normal No Yes
null	Null		
	c:\windows\system32\drivers\null.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
parport	Parport		
	c:\windows\system32\drivers\parport.sys		
	Kernel Driver	No	Manual
	Stopped	OK	Ignore No No
partmgr	Partition Manager		
	c:\windows\system32\drivers\partmgr.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
pci	PCI Bus Driver		
	c:\windows\system32\drivers\pci.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Critical No Yes
pcide	PCI IDe		
	c:\windows\system32\drivers\pcide.sys		
	Kernel Driver	Yes	Boot
	Running	OK	Normal No Yes
pcmcia	Pcmcia		
	c:\windows\system32\drivers\pcmcia.sys		
	Kernel Driver	No	Disabled
	Stopped	OK	Normal No No
pdcomp	PDCOMP	Not Available	Kernel Driver
	No	Manual	Stopped OK
	Ignore	No	No
pdframe	PDFRAME	Not Available	Kernel Driver
	No	Manual	Stopped OK
pdreli	PDRELI	Not Available	Kernel Driver
	No	Manual	Stopped OK
	Ignore	No	No
pdrframe	PDRFRAME	Not Available	Kernel Driver
	No	Manual	Stopped OK
	Ignore	No	No
perc2	perc2	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
perc2hib	perc2hib	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
pptpminiport	pptpminiport WAN Miniport (PPTP)		
	c:\windows\system32\drivers\rasppp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
processor	Processor	Driver	Yes Manual
	Running	OK	Normal No Yes
ptilink	Direct Parallel Link	Driver	
	c:\windows\system32\drivers\ptilink.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
q57w2k	HP NC7782 Gigabit Server Adapter		
	c:\windows\system32\drivers\q57xp32.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
ql1080	ql1080	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql10wnt	Ql10wnt	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql12160	ql12160	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql1240	ql1240	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql1280	ql1280	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql2100	ql2100	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql2200	ql2200	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
ql2300	ql2300	Not Available	Kernel Driver
	No	Disabled	Stopped OK
	Normal	No	No
rasacd	Remote Access Auto Connection	Driver	
	c:\windows\system32\drivers\rasacd.sys		
	Kernel Driver	Yes	System
	Running	OK	Normal No Yes
rasl2tp	WAN Miniport (L2TP)		
	c:\windows\system32\drivers\rasl2tp.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
rasppoe	Remote Access PPPOE	Driver	
	c:\windows\system32\drivers\rasppoe.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes
raspti	Direct Parallel		
	c:\windows\system32\drivers\raspti.sys		
	Kernel Driver	Yes	Manual
	Running	OK	Normal No Yes

rdbss	Rdbss c:\windows\system32\drivers\rdbss.sys File System Driver Yes System Running OK Normal No Yes	symc810	symc810 Not Available Kernel Driver No Disabled Stopped OK Normal No No symc8xx	symc8xx Not Available Kernel Driver No Disabled Stopped OK Normal No No symmpci	symmpci Not Available Kernel Driver No Disabled Stopped OK Normal No No sym_hi	sym_hi Not Available Kernel Driver No Disabled Stopped OK Normal No No sym_u3	sym_u3 Not Available Kernel Driver No Disabled Stopped OK Normal No No tcpip	TCP/IP Protocol Driver c:\windows\system32\drivers\tcpip.sys Kernel Driver Yes System Running OK Normal No Yes	usbstor	USB Mass Storage Driver c:\windows\system32\drivers\usbstor.sys Kernel Driver No Manual Stopped OK Normal No No	
rdpcdd	RDP CDD c:\windows\system32\drivers\rdpcdd.sys Kernel Driver Yes System Running OK Ignore No Yes								usbuhci	Microsoft USB Universal Host Controller Driver c:\windows\system32\drivers\usbuhci.sys Kernel Driver Yes Manual Running OK Normal No Yes	
rdpdr	Terminal Server Device Redirector Driver c:\windows\system32\drivers\rdpdr.sys Kernel Driver Yes Manual Running OK Normal No Yes								vgasave	VGA Display Controller. c:\windows\system32\drivers\vga.sys Kernel Driver Yes System Running OK Ignore No Yes	
rdpwd	RDPWD c:\windows\system32\drivers\rdpwd.sys Kernel Driver Yes Manual Running OK Ignore No Yes								viaide	VIA IDE Not Available Kernel Driver No Disabled Stopped OK Normal No No	
redbook	Digital CD Audio Playback Filter Driver c:\windows\system32\drivers\redbook.sys Kernel Driver Yes System Running OK Normal No Yes								volsnap	Storage volumes c:\windows\system32\drivers\volsnap.sys Kernel Driver Yes Boot Running OK Normal No Yes	
secdrv	Secdrv c:\windows\system32\drivers\secdrv.sys Kernel Driver No Manual Stopped OK Normal No No								wanarp	Remote Access IP ARP Driver c:\windows\system32\drivers\wanarp.sys Kernel Driver Yes Manual Running OK Normal No Yes	
serenum	Serenum Filter Driver c:\windows\system32\drivers\serenum.sys Kernel Driver Yes Manual Running OK Normal No Yes								wdica	WDICA Not Available Kernel Driver No Manual Stopped OK Ignore No No	
serial	Serial port driver c:\windows\system32\drivers\serial.sys Kernel Driver Yes System Running OK Ignore No Yes								wlbs	Network Load Balancing c:\windows\system32\drivers\wlbs.sys Kernel Driver No Manual Stopped OK Normal No No	
sfloppy	Sfloppy c:\windows\system32\drivers\sfloppy.sys Kernel Driver No System Stopped OK Ignore No No									[Signed Drivers]	
simbad	Simbad Not Available Kernel Driver No Disabled Stopped OK Normal No No								Device Name	Signed Driver Version Manufacturer Device ID	Device Class Driver Date INF Name Driver Name
sparrow	Sparrow Not Available Kernel Driver No Disabled Stopped OK Normal No No								Communications Port	Yes PORTS 5.2.3790.0 10/1/2002 (Standard port types) msports.inf Not Available ROOT*PNP0501\1_0_17_1_0_0	
srv	Srv c:\windows\system32\drivers\srw.sys File System Driver Yes Manual Running OK Normal No Yes								Microsoft	System Management BIOS Driver Yes SYSTEM 5.2.3790.1830 10/1/2002 (Standard system devices) machine.inf	
swenum	Software Bus Driver c:\windows\system32\drivers\swenum.sys Kernel Driver Yes Manual Running OK Normal No Yes								Microcode Update Device	Yes SYSTEM 5.2.3790.0 10/1/2002 (Standard system devices) machine.inf Not Available ROOT\SYSTEM\0001	
									Plug and Play Software Device Enumerator	Yes SYSTEM 5.2.3790.0 10/1/2002 (Standard system devices) machine.inf Not Available ROOT\SYSTEM\0000	
									Terminal Server Mouse Driver	Yes SYSTEM 5.2.3790.0 10/1/2002 (Standard)	

system devices) machine.inf Not Available	TCP/IP Protocol Driver Not Available	Available Not Available	ROOT\LEGACY_HTTP\0000
ROOT\RDP_MOU\0000	LEGACYDRIVER Not Available	Not Available	Generic Packet Classifier Not Available
Terminal Server Keyboard Driver Yes	Available Not Available	Not Available	LEGACYDRIVER Not Available
SYSTEM 5.2.3790.0 10/1/2002	Available ROOT\LEGACY_TCPIP\0000	Not Available	Not Available Not Available
(Standard system devices) machine.inf	RDPWD Not Available	LEGACYDRIVER Not	Available ROOT\LEGACY_GPC\0000
Not Available ROOT\RDP_KBD\0000	Available Not Available	Not Available	Fips Not Available
Terminal Server Device Redirector Yes	Available Not Available	ROOT\LEGACY_RDPWD\0000	LEGACYDRIVER Not
SYSTEM 5.2.3790.0 10/1/2002	RDPWD Not Available	LEGACYDRIVER Not	Available Not Available
(Standard system devices) machine.inf	Available Not Available	Not Available	Not Available
Not Available ROOT\RDPDPR\0000	Available Not Available	ROOT\LEGACY_RDPDPR\0000	ROOT\LEGACY_FIPS\0000
Direct Parallel Yes NET 5.2.3790.0	Remote Access Auto Connection Driver Not Available	Not Available	dmload Not Available
10/1/2002 Microsoft netrasa.inf Not	LEGACYDRIVER Not Available	LEGACYDRIVER Not	Available Not Available
Available ROOT\MS_PTMINIPORT\0000	Available Not Available	Not Available	Not Available Not Available
WAN Miniport (PTP) Yes NET 5.2.3790.0	Available ROOT\LEGACY_RASACD\0000	Not Available	ROOT\LEGACY_DMLOAD\0000
10/1/2002 Microsoft netrasa.inf Not	Partition Manager Not Available	LEGACYDRIVER Not	dmboot Not Available
Available ROOT\MS_PPTPMINIPORT\0000	Not Available Not Available	Not Available	LEGACYDRIVER Not
WAN Miniport (PPOE) Yes NET	Available ROOT\LEGACY_PARTMGR\0000	Not Available	Available Not Available
5.2.3790.0 10/1/2002 Microsoft	Null Not Available	LEGACYDRIVER Not	ROOT\LEGACY_DMBOOT\0000
netrasa.inf Not Available	Available Not Available	Not Available	CRC Disk Filter Driver Not Available
ROOT\MS_PPPOEMINIPORT\0000	Available Not Available	ROOT\LEGACY_PARTMGR\0000	LEGACYDRIVER Not Available
WAN Miniport (IP) Yes NET 5.2.3790.0	Null Null Not Available	LEGACYDRIVER Not	Available Not Available
10/1/2002 Microsoft netrasa.inf Not	Available Not Available	Not Available	Not Available Not Available
Available ROOT\MS_NDISWANIP\0000	Available Not Available	ROOT\LEGACY_NULL\0000	Beep Not Available
WAN Miniport (L2TP) Yes NET 5.2.3790.0	NetBIOS over Tcpip Not Available	LEGACYDRIVER	LEGACYDRIVER Not
10/1/2002 Microsoft netrasa.inf Not	Not Available Not Available	Not Available	Available Not Available
Available ROOT\MS_L2TPMINIPORT\0000	Available Not Available	ROOT\LEGACY_NETBT\0000	ROOT\LEGACY_BEEP\0000
Video Codecs Yes MEDIA 5.2.3790.0	NDProxy Not Available	LEGACYDRIVER Not	Altiris Kernel Driver Not Available
10/1/2002 (Standard system devices)	Available Not Available	Not Available	LEGACYDRIVER Not Available
wave.inf Not Available	Available Not Available	Not Available	Not Available Not Available
ROOT\MEDIA\MS_MMVID	Available Not Available	ROOT\LEGACY_NDPROXY\0000	Available ROOT\LEGACY_ALKERNEL\0000
Legacy Video Capture Devices Yes MEDIA	NDIS Usermode I/O Protocol Not Available	LEGACYDRIVER Not	AFD Networking Support Environment Not Available
5.2.3790.0 10/1/2002 (Standard	LEGACYDRIVER Not Available	Not Available	LEGACYDRIVER Not Available
system devices) wave.inf Not Available	Available Not Available	Not Available	Available Not Available
ROOT\MEDIA\MS_MMVCD	Available Not Available	ROOT\LEGACY_NDISUIO\0000	Available ROOT\LEGACY_AFD\0000
Media Control Devices Yes MEDIA	Remote Access NDIS TAPI Driver Not Available	LEGACYDRIVER Not	Generic volume Yes VOLUME 5.2.3790.1830
5.2.3790.0 10/1/2002 (Standard	LEGACYDRIVER Not Available	Not Available	10/1/2002 Microsoft volume.inf Not
system devices) wave.inf Not Available	Available Not Available	ROOT\LEGACY_NDIS\0000	Available
ROOT\MEDIA\MS_MMCI	mountmgr Not Available	LEGACYDRIVER Not	STORAGE\VOLUME\1&30A96598&0&SIGNATUREC9B3C9
Legacy Audio Drivers Yes MEDIA	Available Not Available	Not Available	B3OFFSET7E00LENGTH879E91600
5.2.3790.0 10/1/2002 (Standard	Available ROOT\LEGACY_NDISTAPI\0000	Not Available	Volume Manager Yes SYSTEM 5.2.3790.0
system devices) wave.inf Not Available	NDIS System Driver Not Available	LEGACYDRIVER	10/1/2002 (Standard system devices)
ROOT\MEDIA\MS_MMDRV	Not Available Not Available	Not Available	machine.inf Not Available
Audio Codecs Yes MEDIA 5.2.3790.0	Available Not Available	ROOT\FTFDISK\0000	ROOT\FTFDISK\0000
10/1/2002 (Standard system devices)	ROOT\LEGACY_NDIS\0000	Logical Disk Manager Yes SYSTEM	Logical Disk Manager Yes SYSTEM
wave.inf Not Available	mountmgr Not Available	5.2.3790.0 10/1/2002 (Standard	5.2.3790.0 10/1/2002 (Standard
ROOT\MEDIA\MS_MMACM	Available Not Available	LEGACYDRIVER Not	system devices) machine.inf Not Available
Remote Access IP ARP Driver Not Available	Available Not Available	ROOT\DMIO\0000	ROOT\DMIO\0000
LEGACYDRIVER Not Available	ROOT\LEGACY_MOUNTMGR\0000	ACPI Fixed Feature Button Yes SYSTEM	ACPI Fixed Feature Button Yes SYSTEM
Available Not Available	mmndd Not Available	5.2.3790.0 10/1/2002 (Standard	5.2.3790.0 10/1/2002 (Standard
Available ROOT\LEGACY_WANARP\0000	Available Not Available	LEGACYDRIVER Not	system devices) machine.inf Not Available
volsnap Not Available	Available Not Available	ACPI\FIXEDBUTTON\2&DABA3FF&0	ACPI\FIXEDBUTTON\2&DABA3FF&0
Available Not Available	Available Not Available	ROOT\LEGACY_MNMDD\0000	ACPI Thermal Zone Yes SYSTEM 5.2.3790.0
Available Not Available	ksecdd Not Available	LEGACYDRIVER Not	10/1/2002 (Standard system devices)
ROOT\LEGACY_VOLSNAP\0000	Available Not Available	Not Available	machine.inf Not Available
VGA Display Controller Not Available	Available Not Available	ACPI\THERMALZONE\THMO	ACPI\THERMALZONE\THMO
LEGACYDRIVER Not Available	Available Not Available	Secondary IDE Channel Yes HDC	Secondary IDE Channel Yes HDC
Available Not Available	Available Not Available	5.2.3790.0 10/1/2002 (Standard IDE	5.2.3790.0 10/1/2002 (Standard IDE
Available ROOT\LEGACY_VGASAVE\0000	IPSEC driver Not Available	mshdc.inf Not Available	ATA/ATAPI controllers) mshdc.inf Not Available
TDTCP Not Available	Not Available Not Available	PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1	PCIIDE\IDECHANNEL\4&2BBEC4C6&0&1
Available Not Available	Available Not Available	CD-ROM Drive Yes CDROM 5.2.3790.0	CD-ROM Drive Yes CDROM 5.2.3790.0
Available Not Available	HTTP Not Available	10/1/2002 (Standard CD-ROM drives)	10/1/2002 (Standard CD-ROM drives)
ROOT\LEGACY_TDTCP\0000	LEGACYDRIVER Not	cdrom.inf Not Available	cdrom.inf Not Available
	Available Not Available	Not Available	IDE\CDROMCOMPAQ_CD-ROM_SN-

124 N104 \5&180B77CF&0&0.0.0
 Primary IDE Channel Yes HDC 5.2.3790.0
 10/1/2002 (Standard IDE ATA/ATAPI
 controllers) mshdc.inf Not Available
 PCIIDE\IDECHANNEL\4&2BEC4C6&0&0
 Standard Dual Channel PCI IDE Controller Yes
 HDC 5.2.3790.0 10/1/2002
 (Standard IDE ATA/ATAPI controllers)
 mshdc.inf Not Available
 PCI\VEN_8086&DEV_25A2&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&F9
 Floppy disk drive Yes FLOPPYDISK
 5.2.3790.0 10/1/2002 (Standard
 floppy disk drives) fipydisk.inf Not Available
 FDC\GENERIC_FLOPPY_DRIVE\6&27F7A21&0&0
 Standard floppy disk controller Yes FDC
 5.2.3790.0 10/1/2002 (Standard
 floppy disk controllers) fdc.inf Not Available
 ACPI\PNP0700\5&13608CEC&0
 Communications Port Yes PORTS 5.2.3790.0
 10/1/2002 (Standard port types)
 msports.inf Not Available
 ACPI\PNP0501\0
 Extended IO Bus Yes SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A06\4&1F443D2A&0
 PS/2 Compatible Mouse Yes MOUSE
 5.2.3790.0 10/1/2002 Microsoft
 msmouse.inf Not Available
 ACPI\PNP0F13\4&1F443D2A&0
 Standard 101/102-Key or Microsoft Natural PS/2
 Keyboard Yes KEYBOARD 5.2.3790.0
 10/1/2002 (Standard keyboards)
 keyboard.inf Not Available
 ACPI\PNP0303\4&1F443D2A&0
 System speaker Yes SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0800\4&1F443D2A&0
 Direct memory access controller Yes
 SYSTEM 5.2.3790.0 10/1/2002
 (Standard system devices) machine.inf
 Not Available
 ACPI\PNP0200\4&1F443D2A&0
 System timer Yes SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0100\4&1F443D2A&0
 Motherboard resources Yes SYSTEM
 5.2.3790.0 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ACPI\PNP0C02\0
 ISAPNP Read Data Port Yes SYSTEM
 5.2.3790.0 10/1/2002 (Standard
 system devices) machine.inf Not Available
 ISAPNP\READDATAPORT\0
 Intel(R) 6300ESB LPC Interface Controller - 25A1 Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_25A1&SUBSYS_00000000&REV_0
 2\3&61AAA01&0&F8

Base System Device Not Available UNKNOWN Not
 Available Not Available Not Available Not
 Available Not Available
 PCI\VEN_0E11&DEV_B204&SUBSYS_B2060E11&REV_0
 1\4&2183A681&0&22F0
 Base System Device Not Available UNKNOWN Not
 Available Not Available Not Available Not
 Available Not Available
 PCI\VEN_0E11&DEV_B203&SUBSYS_B2060E11&REV_0
 1\4&2183A681&0&20F0
 Default Monitor Yes MONITOR 5.1.2001.0
 6/6/2001 (Standard monitor types)
 monitor.inf Not Available
 DISPLAY\DEFAULT_MONITOR\5&1CAD663B&0&800000
 00&01&03
 RAGE XL PCI Family (Microsoft Corporation) Yes
 DISPLAY 5.10.2600.6014 8/8/2001 ATI
 Technologies Inc. atiixpad.inf Not Available
 PCI\VEN_1002&DEV_4752&SUBSYS_001E0E11&REV_2
 7\4&2183A681&0&18F0
 Intel(R) 82801 PCI Bridge - 244E Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_244E&SUBSYS_00000000&REV_0
 A\3&61AAA01&0&F0
 USB Root Hub Yes USB 5.2.3790.0
 10/1/2002 (Standard USB Host Controller)
 usbport.inf Not Available
 USB\ROOT_HUB20\4&27805AAC&0
 Standard Enhanced PCI to USB Host Controller Yes
 USB 5.2.3790.0 10/1/2002
 (Standard USB Host Controller)
 usbport.inf Not Available
 PCI\VEN_8086&DEV_25AD&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&EF
 Intel(R) 6300ESB I/O Advanced Programmable Interrupt
 Controller - 25AC Yes SYSTEM 6.1.0.1008
 6/9/2004 Intel oem1.inf Not Available
 PCI\VEN_8086&DEV_25AC&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&BD
 Intel(R) 6300ESB Watchdog Timer - 25AB Yes
 SYSTEM 6.1.0.1008 6/9/2004
 Intel oem1.inf Not Available
 PCI\VEN_8086&DEV_25AB&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&EC
 USB Root Hub Yes USB 5.2.3790.0
 10/1/2002 (Standard USB Host Controller)
 usbport.inf Not Available
 USB\ROOT_HUB\4&24B43ADC&0
 Standard Universal PCI to USB Host Controller Yes
 USB 5.2.3790.0 10/1/2002
 (Standard USB Host Controller)
 usbport.inf Not Available
 PCI\VEN_8086&DEV_25AA&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&E9
 HID-compliant mouse Yes MOUSE 5.2.3790.1830
 10/1/2002 Microsoft msmouse.inf Not Available
 Available HID\VID_049F&PID_0048\6&360717A3&0&0000
 USB Human Interface Device Yes HIDCLASS
 5.2.3790.0 10/1/2002 (Standard
 system devices) input.inf Not Available
 USB\VID_049F&PID_0048\5&20E9BADC&0&1

USB Root Hub Yes USB 5.2.3790.0
 10/1/2002 (Standard USB Host Controller)
 usbport.inf Not Available
 USB\ROOT_HUB\4&312B1C17&0
 Standard Universal PCI to USB Host Controller Yes
 USB 5.2.3790.0 10/1/2002
 (Standard USB Host Controller)
 usbport.inf Not Available
 PCI\VEN_8086&DEV_25A9&SUBSYS_32010E11&REV_0
 2\3&61AAA01&0&E8
 HP NC7782 Gigabit Server Adapter Yes NET
 8.48.0.0 10/17/2005 Hewlett-
 Packard Company oem2.inf Not Available
 PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&11E0
 HP NC7782 Gigabit Server Adapter Yes NET
 8.48.0.0 10/17/2005 Hewlett-
 Packard Company oem2.inf Not Available
 PCI\VEN_14E4&DEV_1648&SUBSYS_00D00E11&REV_1
 0\4&19638ECB&0&10E0
 Disk drive Yes DISKDRIVE 5.2.3790.0
 10/1/2002 (Standard disk drives)
 disk.inf Not Available
 SCSI\DISK&VEN_HPKPROD_LOGICAL_VOLUME&REV_2.
 48\5&12B8725B&0&040
 Compaq Virtual LUN Yes SYSTEM 5.2.3790.0
 10/1/2002 Compaq scsidev.inf Not Available
 Available SCSI\OTHER&VEN_COMPAQ&PROD_SCSI_COMMUNICATE
 &REV_CISSL\5&12B8725B&0&000
 Smart Array 6i Yes SCSIADAPTER
 5.68.0.32 5/20/2005 Hewlett-Packard Company
 oem0.inf Not Available
 PCI\VEN_0E11&DEV_0046&SUBSYS_40910E11&REV_0
 1\4&19638ECB&0&08E0
 Intel(R) 6300ESB 64-bit PCI-X Bridge - 25AE Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_25AB&SUBSYS_00000000&REV_0
 2\3&61AAA01&0&E0
 Intel(R) E7520 PCI Express Root Port C0 - 3599 Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_3599&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&30
 Intel(R) 6700PXH PCI Express-to-PCI Bridge B - 032A
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_032A&SUBSYS_00000000&REV_0
 9\4&253DB27D&0&0220
 Intel(R) 6700PXH PCI Express-to-PCI Bridge A - 0329
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_0329&SUBSYS_00000000&REV_0
 9\4&253DB27D&0&0220
 Intel(R) E7525/E7520 PCI Express Root Port B0 - 3597
 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 Available PCI\VEN_8086&DEV_3597&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&20

Intel(R) E7525/E7520/E7320 PCI Express Root Port A0 -
 3595 Yes SYSTEM 5.2.3790.1830
 10/1/2002 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_3595&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&10
 Intel(R) E7520 Memory Controller Hub - 3590 Yes
 SYSTEM 5.2.3790.1830 10/1/2002
 Intel machine.inf Not Available
 PCI\VEN_8086&DEV_3590&SUBSYS_00000000&REV_0
 C\3&61AAA01&0&00
 PCI bus Yes SYSTEM 5.2.3790.0
 10/1/2002 (Standard system devices)
 machine.inf Not Available
 ACPI\PNP0A03\2&DABA3FF&0
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\3
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\2
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\1
 Intel Processor Yes PROCESSOR 5.2.3790.1830
 10/1/2002 Intel cpu.inf Not Available
 ACPI\GENUINEINTEL -
 _X86_FAMILY_15_MODEL_4\0
 Microsoft ACPI-Compliant System Yes
 SYSTEM 5.2.3790.0 10/1/2002
 Microsoft.acpi.inf Not Available
 ACPI_HAL\PNP0C08\0
 ACPI Multiprocessor PC Yes COMPUTER
 5.2.3790.0 10/1/2002 (Standard
 computers) hal.inf Not Available
 ROOT\ACPI_HAL\0000
 Not Available Not Available Not Available
 Not Available Not Available Not Available
 Available Not Available Not Available
 HTREE\ROOT\0
 Not Available Yes Not Available
 2:5.0,2:5.1,2:5.2 Not Available Not Available
 Available Not Available Not Available
 CCA15109 on CCAPRINT02 (from CAMPBELLBRXP)
 in session 1
 Not Available Yes Not Available
 2:5.0,2:5.1,2:5.2 Not Available Not Available
 Available Not Available Not Available
 Labprinter on INFORB (from CAMPBELLBRXP) in
 session 1
 [Environment Variables]
 Variable Value User Name
 ComSpec %SystemRoot%\system32\cmd.exe <SYSTEM>
 Path %SystemRoot%\system32;%SystemRoot%;%SystemRoot%\System32\Wbem;C:\Program Files\Microsoft SQL Server\80\Tools\Binn\ <SYSTEM>
 windir %SystemRoot% <SYSTEM>

OS Windows_NT <SYSTEM> <SYSTEM>
 PROCESSOR_ARCHITECTURE x86 <SYSTEM>
 PROCESSOR_LEVEL 15 <SYSTEM>
 PROCESSOR_IDENTIFIER x86 Family 15 Model 4
 Stepping 1, GenuineIntel <SYSTEM>
 PROCESSOR_REVISION 0401 <SYSTEM>
 NUMBER_OF_PROCESSORS 4 <SYSTEM>
 ClusterLog C:\WINDOWS\Cluster\cluster.log
 <SYSTEM>
 PATHEXT .COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF
 ;.WSH <SYSTEM>
 TEMP %SystemRoot%\TEMP <SYSTEM>
 TMP %SystemRoot%\TEMP <SYSTEM>
 FP_NO_HOST_CHECK NO <SYSTEM>
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\SYSTEM
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\SYSTEM
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\LOCAL SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\LOCAL SERVICE
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\NETWORK SERVICE
 TMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\NETWORK SERVICE
 TEMP %USERPROFILE%\Local Settings\Temp NT
 AUTHORITY\NETWORK SERVICE
 CL97\Administrator
 TMP %USERPROFILE%\Local Settings\Temp NT
 CL97\Administrator
 [Print Jobs]
 Document Size Owner Notify Status
 Time Submitted Start Time
 Until Time Elapsed Time
 Pages Printed Job ID Priority
 Parameters Driver Print
 Processor Host Print Queue Data Type Name
 [Network Connections]
 Local Name Remote Name Type
 Status User Name
 Z: \\inforb\audit_fdr Disk Current
 Connection CL97\bcampbell
 [Running Tasks]
 Name Path Process ID Priority Min
 Working Set Max Working Set Start Time
 Version Size File Date
 system idle process Not Available 0 0
 Not Available Not Available Not Available
 Available Not Available Not Available Not Available
 system Not Available 4 8 0
 1413120 Not Available Not Available
 Not Available Not Available Not Available
 smss.exe Not Available 352 11
 204800 1413120 11/1/2006 2:24 PM Not Available
 Available Not Available Not Available

csrss.exe Not Available 480 13 Not Available
 Available Not Available 11/1/2006 2:24 PM Not Available
 Available Not Available Not Available
 winlogon.exe c:\windows\system32\winlogon.exe
 504 13 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 497.00 KB (508,928 bytes) 12/7/2005 1:24 PM
 services.exe c:\windows\system32\services.exe
 556 9 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 107.50 KB (110,080 bytes) 3/25/2003 6:00 AM
 lsass.exe c:\windows\system32\lsass.exe 568 9
 204800 1413120 11/1/2006 2:24 PM
 5.2.3790.0 (srv03_rtm.030324-2048) 13.00 KB (13,312 bytes) 3/25/2003
 6:00 AM
 svchost.exe c:\windows\system32\svchost.exe
 748 8 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/7/2005 1:24 PM
 svchost.exe Not Available 812 8
 Not Available Not Available
 11/1/2006 2:24 PM Not Available Not Available
 Available Not Available
 svchost.exe Not Available 900 8
 Not Available Not Available
 11/1/2006 2:24 PM Not Available Not Available
 Available Not Available
 svchost.exe Not Available 952 8
 Not Available Not Available
 11/1/2006 2:24 PM Not Available Not Available
 Available Not Available
 svchost.exe c:\windows\system32\svchost.exe
 968 8 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/7/2005 1:24 PM
 spoolsv.exe c:\windows\system32\spoolsv.exe
 1568 8 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 57.00 KB (58,368 bytes) 12/7/2005 1:24 PM
 msdtc.exe Not Available 1600 8 Not Available
 Available Not Available 11/1/2006 2:24 PM Not Available
 Available Not Available Not Available
 acclient.exe c:\program files\altiris\acclient\acclient.exe 1784 8
 204800 1413120 11/1/2006 2:24 PM
 6.1.401 4.63 MB (4,857,932 bytes) 1/20/2006 4:26 PM
 svchost.exe c:\windows\system32\svchost.exe
 1860 8 204800 1413120
 11/1/2006 2:24 PM 5.2.3790.1830
 (srv03_spl_rtm.050324-1447) 14.00 KB (14,336 bytes) 12/7/2005 1:24 PM
 inetinfo.exe c:\windows\system32\inetsrv\inetinfo.exe
 1924 8 204800 1413120
 11/1/2006 2:24 PM 6.0.3790.1830

(srv03_sp1_rtm.050324-1447)	14.00 KB	(14,336 bytes)
12/7/2005 1:27 PM		
svchost.exe	Not Available	1984 8
Not Available	Not Available	
11/1/2006 2:24 PM	Not Available	Not Available
Available Not Available		
svchost.exe	c:\windows\system32\svchost.exe	
1080 8	204800 1413120	
11/1/2006 2:24 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	14.00 KB	(14,336 bytes)
12/7/2005 1:24 PM		
svchost.exe	c:\windows\system32\svchost.exe	
272 8	204800 1413120	
11/1/2006 2:24 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	14.00 KB	(14,336 bytes)
12/7/2005 1:24 PM		
wmiprvse.exe	Not Available	940 8
Not Available	Not Available	
11/1/2006 2:26 PM	Not Available	Not Available
Available Not Available		
logon.scr	Not Available	1396 4
Available Not Available		
11/1/2006 2:34 PM	Not Available	Not Available
Available Not Available		
csrss.exe	Not Available	464 13
Available Not Available		
11/1/2006 3:44 PM	Not Available	Not Available
Available Not Available		
winlogon.exe	c:\windows\system32\winlogon.exe	
532 13	204800 1413120	
11/1/2006 3:44 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	497.00 KB	(508,928 bytes)
bytes) 12/7/2005 1:24 PM		
rdpclip.exe	c:\windows\system32\rdpclip.exe	
1668 8	204800 1413120	
11/1/2006 3:44 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	68.00 KB	(69,632 bytes)
12/7/2005 1:25 PM		
explorer.exe	c:\windows\explorer.exe	204
8	204800 1413120 11/1/2006	
3:44 PM	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
1.00 MB (1,050,624 bytes)		12/7/2005
1:25 PM		
aclntusr.exe	c:\program	
files\altiris\client\aclntusr.exe	800 8	
204800 1413120 11/1/2006 3:44 PM	6,	
1, 401 180.00 KB (184,320 bytes)		1/20/2006
4:26 PM		
wuauctl.exe	c:\windows\system32\wuauctl.exe	
2152 8	204800 1413120	
11/1/2006 3:44 PM	5.7.3790.1830	
(srv03_sp1_rtm.050324-1447)	109.50 KB	(112,128 bytes)
bytes) 12/7/2005 1:28 PM		
helpctr.exe	c:\windows\pchealth\helpctr\binaries\helpctr.exe	
3404 8	204800 1413120	
11/1/2006 3:45 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	778.00 KB	(796,672 bytes)
12/7/2005 1:26 PM		
helpsvc.exe	c:\windows\pchealth\helpctr\binaries\helpsvc.exe	
3512 8	204800 1413120	
11/1/2006 3:45 PM	5.2.3790.1830	
(srv03_sp1_rtm.050324-1447)	745.00 KB	(762,880 bytes)
12/7/2005 1:26 PM		

wmiprvse.exe	Not Available	3524 8		
Not Available	Not Available			
11/1/2006 3:45 PM	Not Available	Not Available		
Available Not Available				
[Loaded Modules]				
Name	Version	Size	Date	Manufacturer
Path				
winlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	497.00 KB (508,928 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	Microsoft Corporation			
ntdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	748.50 KB (766,464 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	Microsoft Corporation			
kernel32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1,014.00 KB (1,038,336 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
advapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	605.50 KB (620,032 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	Microsoft Corporation			
rpcrt4	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	627.00 KB (642,048 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	Microsoft Corporation			
crypt32	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	582.00 KB (595,968 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
msasn1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	56.50 KB (57,856 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
msvcrt	5.0.3790.1830 (srv03_sp1_rtm.050324-1447)	340.50 KB (348,672 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
user32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	574.50 KB (588,288 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	Microsoft Corporation			
gdi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	273.00 KB (279,552 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
nddeapi	5.2.3790.0 (srv03_rtm.030324-2048)	16.00 KB (16,384 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	Microsoft Corporation			
profmap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	22.50 KB (23,040 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
netapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	341.50 KB (349,696 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
userenv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	771.00 KB (789,504 bytes)	3/25/2003	Microsoft Corporation

6:00 AM	Microsoft Corporation			
c:\windows\system32\userenv.dll				
psapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	20.00 KB (20,480 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	Microsoft Corporation			
c:\windows\system32\psapi.dll				
regapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	55.00 KB (56,320 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\regapi.dll			
secur32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	64.00 KB (65,536 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\secur32.dll			
setupapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.03 MB (1,079,808 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	c:\windows\system32\setupapi.dll			
version	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	18.00 KB (18,432 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\version.dll			
winsta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	54.50 KB (55,808 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\winsta.dll			
ws2_32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	82.00 KB (83,968 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\ws2_32.dll			
ws2help	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	19.50 KB (19,968 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\ws2help.dll			
msgina	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	1.16 MB (1,211,904 bytes)	12/7/2005	Microsoft Corporation
1:25 PM	c:\windows\system32\msgina.dll			
shsvcs	6.0.0.3790.1830 (srv03_sp1_rtm.050324-1447)	131.50 KB (134,656 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\shsvcs.dll			
shlwapi	6.0.0.3790.1830 (srv03_sp1_rtm.050324-1447)	313.50 KB (321,024 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\shlwapi.dll			
sfc	5.2.3790.0 (srv03_rtm.030324-2048)	4.50 KB (4,608 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	c:\windows\system32\sfc.dll			
sfc_os	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	138.00 KB (141,312 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\sfc_os.dll			
wintrust	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	162.00 KB (165,888 bytes)	12/7/2005	Microsoft Corporation
1:24 PM	c:\windows\system32\wintrust.dll			
imagehlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	145.50 KB (148,992 bytes)	3/25/2003	Microsoft Corporation
6:00 AM	c:\windows\system32\imagehlp.dll			

ole32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.19 MB (1,245,184 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ole32.dll	
comctcl32	6.0 (srv03_sp1_rtm.050324-1447)	
	1.00 MB (1,051,136 bytes)	3/24/2005
9:41 PM	Microsoft Corporation	
	c:\windows\winsxs\x86_microsoft.windows.com	
mon-controls_6595b64144ccf1df_6.0.3790.1830_x-		
ww_lb6f474a\comctl32.dll		
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	202.00 KB (206,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	107.50 KB (110,080 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	36.00 KB (36,864 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ncobjapi.dll	
msvcp60	5.0.2144.0 (388.00 KB (397,312 bytes))	3/25/2003 6:00 AM
	Microsoft Corporation	
	c:\windows\system32\msvcp60.dll	
scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	327.00 KB (334,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	66.50 KB (68,096 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\authz.dll	
umpnpmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	126.50 KB (129,536 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\umpnpmgr.dll	
eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	67.50 KB (69,120 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\eventlog.dll	
lsass	5.2.3790.0 (srv03_rtm.030324-2048)	
	13.00 KB (13,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsass.exe	
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	803.00 KB (822,272 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsasrv.dll	
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	71.00 KB (72,704 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	153.50 KB (157,184 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	46.50 KB (47,616 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samlib.dll	
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	450.50 KB (461,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	32.00 KB (32,768 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cryptdll.dll	
comctcl32	5.82 (srv03_sp1_rtm.050324-1447)	
	585.00 KB (599,040 bytes)	3/24/2005

9:41 PM	Microsoft Corporation	
	c:\windows\winsxs\x86_microsoft.windows.com	
mon-controls_6595b64144ccf1df_5.82.3790.1830_x-		
ww_lb6f474a\comctl32.dll		
uxtheme	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	202.00 KB (206,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\uxtheme.dll	
services	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	107.50 KB (110,080 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\services.exe	
ncobjapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	36.00 KB (36,864 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ncobjapi.dll	
msvcp60	5.0.2144.0 (388.00 KB (397,312 bytes))	3/25/2003 6:00 AM
	Microsoft Corporation	
	c:\windows\system32\msvcp60.dll	
scesrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	327.00 KB (334,848 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\scesrv.dll	
authz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	66.50 KB (68,096 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\authz.dll	
umpnpmgr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	126.50 KB (129,536 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\umpnpmgr.dll	
eventlog	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	67.50 KB (69,120 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\eventlog.dll	
lsass	5.2.3790.0 (srv03_rtm.030324-2048)	
	13.00 KB (13,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsass.exe	
lsasrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	803.00 KB (822,272 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\lsasrv.dll	
ntdsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	71.00 KB (72,704 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntdsapi.dll	
dnsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	153.50 KB (157,184 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\dnsapi.dll	
samlib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	46.50 KB (47,616 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samlib.dll	
samsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	450.50 KB (461,312 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\samsrv.dll	
cryptdll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	32.00 KB (32,768 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cryptdll.dll	

msprives	5.2.3790.0 (srv03_rtm.030324-2048)	
	46.50 KB (47,616 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\msprives.dll	
kerberos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	340.50 KB (348,672 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\kerberos.dll	
msv1_0	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	141.00 KB (144,384 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\msv1_0.dll	
iphlpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	92.50 KB (94,720 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\iphlpapi.dll	
netlogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	409.50 KB (419,328 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\netlogon.dll	
w32time	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	222.00 KB (227,328 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\w32time.dll	
schannel	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	141.00 KB (144,384 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\schannel.dll	
wdigest	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	74.00 KB (75,776 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wdigest.dll	
rassfm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	23.00 KB (23,552 bytes)	12/7/2005
1:26 PM	Microsoft Corporation	
	c:\windows\system32\rassfm.dll	
kdcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	213.50 KB (218,624 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\kdcsvc.dll	
ntdsa	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.45 MB (1,516,032 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntdsa.dll	
esent	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1,022.50 KB (1,047,040 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\esent.dll	
ntdsatq	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	29.50 KB (30,208 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntdsatq.dll	
mswsock	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	250.50 KB (256,512 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\mswsock.dll	
scecli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	186.50 KB (190,976 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\scecli.dll	
ws03res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	793.50 KB (812,544 bytes)	12/7/2005

1:28 PM	Microsoft Corporation	
	c:\windows\system32\ws03res.dll	
hnetcfg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	343.50 KB (351,744 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\hnetcfg.dll	
wshtcpip	5.2.3790.0 (srv03_rtm.030324-2048)	
	18.00 KB (18,432 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wshtcpip.dll	
ipsecsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	180.50 KB (184,832 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ipsecsvc.dll	
oakley	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	264.00 KB (270,336 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\oakley.dll	
winipsec	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	35.50 KB (36,352 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\winipsec.dll	
pstorsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	24.00 KB (24,576 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\pstorsvc.dll	
psbase	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	84.00 KB (86,016 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\psbase.dll	
dssenh	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	139.98 KB (143,336 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\dssenh.dll	
wlbsctrl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	82.00 KB (83,968 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wlbsctrl.dll	
w3ssl	6.0.3790.0 (srv03_rtm.030324-2048)	
	15.00 KB (15,360 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\w3ssl.dll	
strmfilt	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)	
	84.00 KB (86,016 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\strmfilt.dll	
httpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.00 KB (24,576 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\httpapi.dll	
svchost	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	14.00 KB (14,336 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\svchost.exe	
rpcss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	406.00 KB (415,744 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\rpcss.dll	
xpssp2res	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	2.76 MB (2,897,920 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\xpssp2res.dll	

clbcatq	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	
	502.50 KB (514,560 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\clbcatq.dll	
comres	2001.12.4720.0 (srv03_rtm.030324-2048)	
	778.00 KB (796,672 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\comres.dll	
ntmarta	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	120.50 KB (123,392 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\ntmarta.dll	
wzcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	364.50 KB (373,248 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wzcsvc.dll	
rtutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	34.50 KB (35,328 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\rtutils.dll	
wmi	5.2.3790.0 (srv03_rtm.030324-2048)	
	6.50 KB (6,656 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wmi.dll	
dhcpcsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	113.50 KB (116,224 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\dhcpcsvc.dll	
atl	3.05.2283 83.00 KB (84,992 bytes)	3/25/2003
	6:00 AM Microsoft Corporation	
	c:\windows\system32\atl.dll	
rastls	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	180.00 KB (184,320 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\rastls.dll	
cryptui	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)	
	496.50 KB (508,416 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cryptui.dll	
mprapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	89.00 KB (91,136 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\mprapi.dll	
activeds	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	194.00 KB (198,656 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\activeds.dll	
adsldpc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	146.00 KB (149,504 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\adsldpc.dll	
credui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	162.00 KB (165,888 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\credui.dll	
rasapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	239.50 KB (245,248 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rasapi32.dll	
rasman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	61.50 KB (62,976 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rasman.dll	

tapi32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	179.50 KB (183,808 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\tapi32.dll	
raschap	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	119.50 KB (122,368 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\raschap.dll	
schedsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	197.50 KB (202,240 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\schedsvc.dll	
msidle	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	6.50 KB (6,656 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\msidle.dll	
audiosrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	40.50 KB (41,472 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\audiosrv.dll	
wkssvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	130.00 KB (133,120 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wkssvc.dll	
wiarpc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	32.50 KB (33,280 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wiarpc.dll	
aelupsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	26.00 KB (26,624 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\aelupsvc.dll	
apphelp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	146.50 KB (150,016 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\apphelp.dll	
cryptsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	55.50 KB (56,832 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cryptsvc.dll	
certcli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	227.00 KB (232,448 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\certcli.dll	
vssapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	548.00 KB (561,152 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\vssapi.dll	
dmserver	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	25.50 KB (26,112 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\dmserver.dll	
es	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	
	233.00 KB (238,592 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\es.dll	
pchsdc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	39.00 KB (39,936 bytes)	12/7/2005
1:26 PM	Microsoft Corporation	
	c:\windows\pchealth\helpctr\binaries\pchsdc.dll	
.dll	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
srvsvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	93.50 KB (95,744 bytes)	3/25/2003

6:00 AM	Microsoft Corporation	
	c:\windows\system32\svrsvc.dll	
seclogon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	18.50 KB (18,944 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\seclogon.dll	
sens	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	36.50 KB (37,376 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\sens.dll	
trkwks	5.2.3790.0 (srv03_rtm.030324-2048)	
	85.00 KB (87,040 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\trkwks.dll	
wmisvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	140.00 KB (143,360 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmisvc.dll	
wuauserv	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	
	8.00 KB (8,192 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\wuauserv.dll	
wuaueng	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.18 MB (1,232,896 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\wuaueng.dll	
adpack	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	98.00 KB (100,352 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\adpack.dll	
cabinet	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	81.50 KB (83,456 bytes)	3/24/2005
8:35 PM	Microsoft Corporation	
	c:\windows\system32\cabinet.dll	
mspatcha	5.2.3790.0 (srv03_rtm.030324-2048)	
	29.00 KB (29,696 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\mspatcha.dll	
shfolder	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	24.50 KB (25,088 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\shfolder.dll	
winhttp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	353.00 KB (361,472 bytes)	3/24/2005
9:41 PM	Microsoft Corporation	
	c:\windows\winsxs\x86_microsoft.windows.win	
http_6595bf64144ccf1df_5.1.3790.1830_x-		
ww_74150efb\winhttp.dll		
comsvcs	2001.12.4720.1830 (srv03_sp1_rtm.050324-1447)	
	1.19 MB (1,248,256 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\comsvcs.dll	
browser	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	76.50 KB (78,336 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\browser.dll	
netrap	5.2.3790.0 (srv03_rtm.030324-2048)	
	11.50 KB (11,776 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\netrap.dll	
wbemcore	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	497.50 KB (509,440 bytes)	12/7/2005

1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcore.dll	
esscli	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	250.00 KB (256,000 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\esscli.dll	
wbemcomm	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	221.00 KB (226,304 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcomm.dll	
fastprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	471.00 KB (482,304 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\fastprox.dll	
wmiutils	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	93.50 KB (95,744 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiutils.dll	
repdrvfs	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	172.50 KB (176,640 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\repdrvfs.dll	
wmiprvsd	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	404.00 KB (413,696 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wmiprvsd.dll	
wbemess	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	271.50 KB (278,016 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemess.dll	
ncprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	46.50 KB (47,616 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\ncprov.dll	
wbemsvc	5.2.3790.0 (srv03_rtm.030324-2048)	
	42.50 KB (43,520 bytes)	12/7/2005
12:22 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemsvc.dll	
actxprxy	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	96.50 KB (98,816 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\actxprxy.dll	
netman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	258.50 KB (264,704 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\netman.dll	
netshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	1.73 MB (1,812,992 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\netshell.dll	
clusapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	60.00 KB (61,440 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\clusapi.dll	
wininet	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)	
	646.00 KB (661,504 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wininet.dll	
wzcsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	41.00 KB (41,984 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wzcsapi.dll	

netcfgx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	763.00 KB (781,312 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\netcfgx.dll	
wbemcons	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	45.50 KB (46,592 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemcons.dll	
wbemprox	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	20.50 KB (20,992 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\wbem\wbemprox.dll	
rasdlg	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	663.00 KB (678,912 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\rasdlg.dll	
rasadhlp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	7.50 KB (7,680 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\rasadhlp.dll	
wups	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)	
	34.00 KB (34,816 bytes)	12/7/2005
1:28 PM	Microsoft Corporation	
	c:\windows\system32\wups.dll	
spoolsv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	57.00 KB (58,368 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\spoolsv.exe	
spools	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	85.00 KB (87,040 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\spoolss.dll	
localspl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	339.00 KB (347,136 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\localspl.dll	
cnbjmon	5.2.3790.1224 (dnsrv\skatari).040514-1058	
	46.50 KB (47,616 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\cnbjmon.dll	
pjlmmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	15.00 KB (15,360 bytes)	12/7/2005
1:25 PM	Microsoft Corporation	
	c:\windows\system32\pjlmmon.dll	
tcpmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	47.00 KB (48,128 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\tcpmon.dll	
wsnmp32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	43.00 KB (44,032 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\wsnmp32.dll	
tcpmib	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	17.50 KB (17,920 bytes)	12/7/2005
1:24 PM	Microsoft Corporation	
	c:\windows\system32\tcpmib.dll	
wsock32	5.2.3790.0 (srv03_rtm.030324-2048)	
	22.00 KB (22,528 bytes)	3/25/2003
6:00 AM	Microsoft Corporation	
	c:\windows\system32\wsock32.dll	
mgmtapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)	
	15.50 KB (15,872 bytes)	3/25/2003

6:00 AM	Microsoft Corporation	c:\windows\system32\mgmtapi.dll
	snmpapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		19.50 KB (19,968 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\snmpapi.dll
	usbmon	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		17.00 KB (17,408 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\usbmon.dll
	winrnr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		17.00 KB (17,408 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\winrnr.dll
	wshqos	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		24.00 KB (24,576 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\wshqos.dll
	win32spl	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		100.50 KB (102,912 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\win32spl.dll
	inetpp	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		75.00 KB (76,800 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\inetpp.dll
	icmp	5.2.3790.0 (srv03_rtm.030324-2048)
		4.50 KB (4,608 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\icmp.dll
	ps5ui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		135.00 KB (138,240 bytes) 1/27/2006
3:50 PM	Microsoft Corporation	c:\windows\system32\spool\drivers\w32x86\3\ps5ui.dll
	unidrvv1	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		201.50 KB (206,336 bytes) 1/27/2006
3:50 PM	Microsoft Corporation	c:\windows\system32\spool\drivers\w32x86\3\unidrvv1.dll
	aclient	6.1.401 4.63 MB (4,857,932 bytes)
		1/20/2006 4:26 PM Altiris, Inc.
		c:\program
	files\altiris\aclient\aclient.exe	
	comdlg32	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)
		274.50 KB (281,088 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\comdlg32.dll
	riched32	5.2.3790.0 (srv03_rtm.030324-2048)
		3.50 KB (3,584 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\riched32.dll
	riched20	5.31.23.1224 439.00 KB (449,536 bytes)
		12/7/2005 1:24 PM Microsoft Corporation
		c:\windows\system32\riched20.dll
	ersvc	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		24.00 KB (24,576 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\ersvc.dll
	inetinfo	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		14.00 KB (14,336 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	

		c:\windows\system32\inetsrv\inetinfo.exe
	iisutil	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		164.00 KB (167,936 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\inetsrv\iisutil.dll
	rpcfref	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		4.00 KB (4,096 bytes) 12/7/2005
1:26 PM	Microsoft Corporation	c:\windows\system32\inetsrv\rpcfref.dll
	iisrtl	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		138.50 KB (141,824 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\iisrtl.dll
	iisadmin	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		21.00 KB (21,504 bytes) 12/7/2005
1:26 PM	Microsoft Corporation	c:\windows\system32\inetsrv\iisadmin.dll
	coadmin	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		62.50 KB (64,000 bytes) 12/7/2005
1:26 PM	Microsoft Corporation	c:\windows\system32\inetsrv\coadmin.dll
	admmprox	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		47.00 KB (48,128 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\admmprox.dll
	iiscfg	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		1.08 MB (1,133,056 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\iiscfg.dll
	metadata	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		229.00 KB (234,496 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\metadata.dll
	msxml3	8.70.1104.0 1.06 MB (1,107,456 bytes)
		12/7/2005 1:25 PM Microsoft Corporation
		c:\windows\system32\msxml3.dll
	svcext	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		43.50 KB (44,544 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\svcext.dll
	security	5.2.3790.0 (srv03_rtm.030324-2048)
		5.50 KB (5,632 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\security.dll
	iismap	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		58.50 KB (59,904 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\iismap.dll
	wamreg	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		54.50 KB (55,808 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\wamreg.dll
	iisw3adm	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		211.00 KB (216,064 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\inetsrv\iisw3adm.dll
	w3cache	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		19.00 KB (19,456 bytes) 12/7/2005

1:26 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3cache.dll
	w3tp	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		13.00 KB (13,312 bytes) 12/7/2005
1:28 PM	Microsoft Corporation	c:\windows\system32\inetsrv\w3tp.dll
	lonsint	6.0.3790.1830 (srv03_sp1_rtm.050324-1447)
		13.00 KB (13,312 bytes) 12/7/2005
1:27 PM	Microsoft Corporation	c:\windows\system32\inetsrv\lonsint.dll
	termsrv	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		239.00 KB (244,736 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\termsrv.dll
	icaapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		12.50 KB (12,800 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\icaapi.dll
	mstlsapi	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		116.00 KB (118,784 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\mstlsapi.dll
	rdpwsx	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		101.63 KB (104,072 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\rdpwsx.dll
	rdpsnd	5.2.3790.0 (srv03_rtm.030324-2048)
		18.00 KB (18,432 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\rdpsnd.dll
	scredir	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		28.00 KB (28,672 bytes) 12/7/2005
1:24 PM	Microsoft Corporation	c:\windows\system32\scredir.dll
	cscui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		319.50 KB (327,168 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\cscui.dll
	msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		22.00 KB (22,528 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\msacm32.drv
	msacm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
		69.50 KB (71,168 bytes) 12/7/2005
1:25 PM	Microsoft Corporation	c:\windows\system32\msacm32.dll
	imaadp32	5.2.3790.0 (srv03_rtm.030324-2048)
		15.50 KB (15,872 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\imaadp32.acm
	msadp32	5.2.3790.0 (srv03_rtm.030324-2048)
		14.50 KB (14,848 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\msadp32.acm
	msg711	5.2.3790.0 (srv03_rtm.030324-2048)
		10.00 KB (10,240 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\msg711.acm
	msgsm32	5.2.3790.0 (srv03_rtm.030324-2048)
		20.50 KB (20,992 bytes) 3/25/2003
6:00 AM	Microsoft Corporation	c:\windows\system32\msgsm32.acm

tssoft32	1.01	9.50 KB (9,728 bytes)	
	3/25/2003 6:00 AM	DSP GROUP, INC.	
	c:\windows\system32\tssoft32.acm		
tsd32	1.03	16.50 KB (16,896 bytes)	
	3/25/2003 6:00 AM	DSP GROUP, INC.	
	c:\windows\system32\tsd32.dll		
msg723	5.2.3790.1830	120.00 KB (122,880 bytes)	
bytes)	12/7/2005 1:25 PM	Microsoft Corporation	
	c:\windows\system32\msg723.acm		
msaud32	8.00.00.4487	288.00 KB (294,912 bytes)	
bytes)	3/25/2003 6:00 AM	Microsoft Corporation	
	c:\windows\system32\msaud32.acm		
sl_anet	3.02	84.00 KB (86,016 bytes)	
	3/25/2003 6:00 AM	Sipro Lab Telecom Inc.	
	c:\windows\system32\sl_anet.acm		
l3codeca	1, 9, 0, 0305	284.00 KB (290,816 bytes)	
bytes)	3/25/2003 6:00 AM	Fraunhofer Institut	
	Integrierte Schaltungen IIS		
	c:\windows\system32\l3codeca.acm		
printui	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	563.00 KB (576,512 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\printui.dll		
cfgmgr32	5.2.3790.0 (srv03_rtm.030324-2048)		
	17.50 KB (17,920 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\cfgmgr32.dll		
cryptnet	5.131.3790.1830 (srv03_sp1_rtm.050324-1447)		
	61.00 KB (62,464 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\cryptnet.dll		
sensapi	5.2.3790.0 (srv03_rtm.030324-2048)		
	6.00 KB (6,144 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\sensapi.dll		
rdpclip	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	68.00 KB (69,632 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\rdpclip.exe		
urlmon	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	673.00 KB (689,152 bytes)		12/7/2005
1:24 PM	Microsoft Corporation		
	c:\windows\system32\urlmon.dll		
explorer	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	1.00 MB (1,050,624 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\explorer.exe		
browseui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	1,009.00 KB (1,033,216 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\browseui.dll		
shdocvw	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	1.43 MB (1,502,720 bytes)		12/7/2005
1:24 PM	Microsoft Corporation		
	c:\windows\system32\shdocvw.dll		
themeui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	377.50 KB (386,560 bytes)		12/7/2005
1:24 PM	Microsoft Corporation		
	c:\windows\system32\themeui.dll		
msimg32	5.2.3790.0 (srv03_rtm.030324-2048)		
	4.50 KB (4,608 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\msimg32.dll		

linkinfo	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	19.00 KB (19,456 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\linkinfo.dll		
ntshrui	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	140.00 KB (143,360 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\ntshrui.dll		
webcheck	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	272.50 KB (279,040 bytes)		12/7/2005
1:24 PM	Microsoft Corporation		
	c:\windows\system32\webcheck.dll		
stobject	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	120.50 KB (123,392 bytes)		12/7/2005
1:24 PM	Microsoft Corporation		
	c:\windows\system32\stobject.dll		
batmeter	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	31.50 KB (32,256 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\batmeter.dll		
powrprof	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	16.50 KB (16,896 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\powrprof.dll		
browselc	6.00.3790.0 (srv03_rtm.030324-2048)		
	62.00 KB (63,488 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\browselc.dll		
shdoclc	6.00.3790.0 (srv03_rtm.030324-2048)		
	588.50 KB (602,624 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\shdoclc.dll		
mprui	5.2.3790.0 (srv03_rtm.030324-2048)		
	49.00 KB (50,176 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\mprui.dll		
netui0	5.2.3790.0 (srv03_rtm.030324-2048)		
	75.50 KB (77,312 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\netui0.dll		
netui2	5.2.3790.0 (srv03_rtm.030324-2048)		
	309.50 KB (316,928 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\netui2.dll		
netutil	5.2.3790.0 (srv03_rtm.030324-2048)		
	184.00 KB (188,416 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\netutil.dll		
netmsg	5.2.3790.0 (srv03_rtm.030324-2048)		
	178.00 KB (182,272 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\netmsg.dll		
netplwiz	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	855.00 KB (875,520 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\netplwiz.dll		
drprov	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	14.00 KB (14,336 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\drprov.dll		
ntlanman	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	43.50 KB (44,544 bytes)		12/7/2005

1:25 PM	Microsoft Corporation		
	c:\windows\system32\ntlanman.dll		
davclnt	5.2.3790.0 (srv03_rtm.030324-2048)		
	23.50 KB (24,064 bytes)		3/25/2003
6:00 AM	Microsoft Corporation		
	c:\windows\system32\davclnt.dll		
aclntusr	6, 1, 401 180.00 KB (184,320 bytes)		
	1/20/2006 4:26 PM		c:\program
files\altiris\acclient\aclntusr.exe			
wuauctl	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)		
	109.50 KB (112,128 bytes)		12/7/2005
1:28 PM	Microsoft Corporation		
	c:\windows\system32\wuauctl.exe		
wuaucpl	5.7.3790.1830 (srv03_sp1_rtm.050324-1447)		
	160.00 KB (163,840 bytes)		12/7/2005
1:28 PM	Microsoft Corporation		
	c:\windows\system32\wuaucpl.cpl		
helpctr	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	778.00 KB (796,672 bytes)		12/7/2005
1:26 PM	Microsoft Corporation		
	c:\windows\pchealth\helpctr\binaries\helpct		
r.exe			
hcappres	5.2.3790.0 (srv03_rtm.030324-2048)		
	6.50 KB (6,656 bytes)		12/7/2005
12:26 PM	Microsoft Corporation		
	c:\windows\pchealth\hcappres		
es.dll			
itss	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	133.50 KB (136,704 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\itss.dll		
pchshell	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	104.50 KB (107,008 bytes)		12/7/2005
1:26 PM	Microsoft Corporation		
	c:\windows\pchealth\pchshe		
11.dll			
mlang	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	577.50 KB (591,360 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\mlang.dll		
mshtml	6.00.3790.1830 (srv03_sp1_rtm.050324-1447)		
	2.96 MB (3,108,864 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\mshtml.dll		
msls31	3.10.349.0 142.00 KB (145,408 bytes)		
bytes)	12/7/2005 1:25 PM		Microsoft Corporation
	c:\windows\system32\msls31.dll		
msimtf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	156.00 KB (159,744 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\msimtf.dll		
msctf	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	311.00 KB (318,464 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\msctf.dll		
jscript	5.6.0.8827 448.00 KB (458,752 bytes)		
bytes)	12/7/2005 1:25 PM		Microsoft Corporation
	c:\windows\system32\jscript.dll		
imm32	5.2.3790.1830 (srv03_sp1_rtm.050324-1447)		
	108.00 KB (110,592 bytes)		12/7/2005
1:25 PM	Microsoft Corporation		
	c:\windows\system32\imm32.dll		

```

mshtimed 6.00.3790.1830 (srv03_sp1_rtm.050324-1447)
454.50 KB (465,408 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\mshtimed.dll
vbscript 5.6.0.8827 392.00 KB (401,408
bytes) 12/7/2005 1:24 PM Microsoft Corporation
c:\windows\system32\vbscript.dll
msinfo 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
376.00 KB (385,024 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\msinfo
.dll
mfc42u 6.06.8063.0 1.11 MB (1,163,776
bytes) 12/7/2005 1:25 PM Microsoft Corporation
c:\windows\system32\mfc42u.dll
odbc32 3.526.1830.0 (srv03_sp1_rtm.050324-1447)
240.00 KB (245,760 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\odbc32.dll
odbcint 3.526.1830.0 (srv03_sp1_rtm.050324-1447)
92.00 KB (94,208 bytes) 12/7/2005
1:25 PM Microsoft Corporation
c:\windows\system32\odbcint.dll
audiodev 5.2.3790.3700 (srv03_sp1_rtm.050324-1447)
470.00 KB (481,280 bytes) 12/7/2005
1:28 PM Microsoft Corporation
c:\windows\system32\audiodev.dll
wmvcore 10.00.00.3700 (srv03_sp1_rtm.050324-1447)
2.21 MB (2,314,240 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wmvcore.dll
wmasf 10.00.00.3700 (srv03_sp1_rtm.050324-1447)
220.50 KB (225,792 bytes) 12/7/2005
1:24 PM Microsoft Corporation
c:\windows\system32\wmasf.dll
helpsvc 5.2.3790.1830 (srv03_sp1_rtm.050324-1447)
745.00 KB (762,880 bytes) 12/7/2005
1:26 PM Microsoft Corporation
c:\windows\pchealth\helpctr\binaries\helpsv
c.exe

[Services]

Display Name Name State Start Mode
Service Type Path Error Control
Start Name Tag ID
Altiris Client Service AClient Running
Auto Own Process c:\program
files\altiris\client\client.exe -service
Normal LocalSystem 0
Application Experience Lookup Service AeLookupSvc
Running Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Alerter Alerter Stopped Disabled Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0
Application Layer Gateway Service ALG
Stopped Manual Own Process
c:\windows\system32\alg.exe Normal NT
AUTHORITY\LocalService 0

```

```

Application Management AppMgmt Stopped
Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
ASP.NET State Service aspnet_state
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\aspnet_state.exe Normal NT
AUTHORITY\NetworkService 0
Windows Audio AudioSrv Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Background Intelligent Transfer Service BITS
Stopped Manual Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Computer Browser Browser Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Indexing Service CiSvc Stopped Disabled
Share Process
c:\windows\system32\cisvc.exe Normal
LocalSystem 0
ClipBook ClipSrv Stopped Disabled Own Process
c:\windows\system32\clipsrv.exe
Normal LocalSystem 0
.NET Runtime Optimization Service v2.0.50727_X86
clr_optimization_v2.0.50727_32
Stopped Manual Own Process
c:\windows\microsoft.net\framework\v2.0.507
27\mscorvw.exe Ignore LocalSystem 0
COM+ System Application COMSysApp Stopped
Manual Own Process
c:\windows\system32\dllhost.exe
/processid:{02d4b3f1-fd88-11d1-960d-00805fc79235}
Normal LocalSystem 0
Cryptographic Services CryptSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DCOM Server Process Launcher DcomLaunch
Running Auto Share Process
c:\windows\system32\svchost.exe -k
dcomlaunch Normal LocalSystem 0
Distributed File System Dfs Stopped
Manual Own Process
c:\windows\system32\dfssvc.exe
Normal LocalSystem 0
DHCP Client Dhcp Running Auto
Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Logical Disk Manager Administrative Service
dmadmin Stopped Manual Share Process
c:\windows\system32\dmadmin.exe /com
Normal LocalSystem 0
Logical Disk Manager dmserver Running
Auto Share Process

```

```

c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
DNS Client Share Process
c:\windows\system32\svchost.exe -k
networkservice Normal NT
AUTHORITY\NetworkService 0
Error Reporting Service ERSvc Running
Auto Share Process
c:\windows\system32\svchost.exe -k winerr
Ignore LocalSystem 0
Event Log Eventlog Running Auto Share Process
c:\windows\system32\services.exe
Normal LocalSystem 0
COM+ Event System EventSystem Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Help and Support helpsvc Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Human Interface Device Access HidServ Stopped
Disabled Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
HTTP SSL HTTPFilter Running Manual
Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
IIS Admin Service IISADMIN Running Auto
Share Process
c:\windows\system32\inetsrv\inetinfo.exe
Normal LocalSystem 0
IMAPI CD-Burning COM Service ImaPIService
Stopped Disabled Own Process
c:\windows\system32\imapi.exe Normal
LocalSystem 0
Intersite Messaging IsmServ Stopped Disabled Own
Process
c:\windows\system32\ismserv.exe
Normal LocalSystem 0
Kerberos Key Distribution Center kdc
Stopped Disabled Share Process
c:\windows\system32\lsass.exe Normal
LocalSystem 0
Server lanmanserver Running Auto
Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
Workstation lanmanworkstation Running
Auto Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal LocalSystem 0
License Logging LicenseService Stopped
Disabled Own Process
c:\windows\system32\lssrv.exe
Normal NT AUTHORITY\NetworkService 0
TCP/IP NetBIOS Helper LmHosts Running
Auto Share Process
c:\windows\system32\svchost.exe -k
localservice Normal NT
AUTHORITY\LocalService 0

```

```

Messenger Messenger Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
NetMeeting Remote Desktop Sharing mnmsrvc
  Stopped Disabled Own Process
  c:\windows\system32\mnmsrvc.exe
  Normal LocalSystem 0
Distributed Transaction Coordinator MSDTC
  Running Auto Own Process
  c:\windows\system32\msdtc.exe Normal NT AUTHORITY\NetworkService 1
Windows Installer MSI Server Stopped Manual
  Share Process
  c:\windows\system32\msiexec.exe /v
  Normal LocalSystem 0
Network DDE NetDDE Stopped Disabled
  Share Process
  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Network DDE DSDM NetDDEdsm Stopped
  Disabled Share Process
  c:\windows\system32\netdde.exe
  Normal LocalSystem 0
Net Logon Netlogon Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal LocalSystem 0
Network Connections Netman Running Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Network Location Awareness (NLA) Nla
  Running Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
File Replication NTFRS Stopped Manual Own Process
  c:\windows\system32\ntfrs.exe Ignore LocalSystem 0
NT LM Security Support Provider NtLmssp
  Stopped Manual Share Process
  c:\windows\system32\lsass.exe Normal LocalSystem 0
Removable Storage NtmsSvc Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Office Source Engine ose Stopped
  Manual Own Process "c:\program files\common files\microsoft shared\source engine\ose.exe"
  Normal LocalSystem 0
Plug and Play PlugPlay Running Auto
  Share Process
  c:\windows\system32\services.exe
  Normal LocalSystem 0
IPSEC Services PolicyAgent Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal LocalSystem 0
Protected Storage ProtectedStorage Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal LocalSystem 0

```

```

Remote Access Auto Connection Manager RasAuto
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Access Connection Manager RasMan
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Desktop Help Session Manager RDSSessMgr
  Stopped Manual Own Process
  c:\windows\system32\sessmgr.exe
  Normal LocalSystem 0
Routing and Remote Access RemoteAccess
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Remote Registry RemoteRegistry Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k regsvc
  Normal NT AUTHORITY\LocalService 0
Remote Procedure Call (RPC) Locator RpcLocator
  Stopped Manual Own Process
  c:\windows\system32\locator.exe
  Normal NT AUTHORITY\NetworkService 0
Remote Procedure Call (RPC) RpcSs Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k rpcss
  Normal NT Authority\NetworkService 0
Resultant Set of Policy Provider RSopProv
  Stopped Manual Share Process
  c:\windows\system32\rsopprov.exe
  Normal LocalSystem 0
Special Administration Console Helper sacsvr
  Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Security Accounts Manager SamSs Running
  Auto Share Process
  c:\windows\system32\lsass.exe Normal LocalSystem 0
Smart Card SCardsvr Stopped Manual
  Share Process
  c:\windows\system32\scardsvr.exe
  Ignore NT AUTHORITY\LocalService 0
Task Scheduler Schedule Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Secondary Logon seclogon Running Auto
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
System Event Notification SENS Running
  Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Windows Firewall/Internet Connection Sharing (ICS)
  SharedAccess Stopped Disabled
  Share Process

```

```

  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Shell Hardware Detection ShellHWDetection
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Ignore LocalSystem 0
Print Spooler Spooler Running Auto Own Process
  c:\windows\system32\spools.v.exe
  Normal LocalSystem 0
Windows Image Acquisition (WIA) stisvc
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k imgsvc
  Normal NT AUTHORITY\LocalService 0
Microsoft Software Shadow Copy Provider swprv
  Stopped Manual Own Process
  c:\windows\system32\svchost.exe -k swprv
  Normal LocalSystem 0
Performance Logs and Alerts SysmonLog Stopped
  Manual Own Process
  c:\windows\system32\smlogsvc.exe
  Normal NT Authority\NetworkService 0
Telephony Tapisrv Stopped Manual Share Process
  c:\windows\system32\svchost.exe -k tapisrv
  Normal LocalSystem 0
Terminal Services TermService Running
  Manual Share Process
  c:\windows\system32\svchost.exe -k termsvc
  Normal LocalSystem 0
Themes Themes Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Telnet TlntSvr Stopped Disabled Own Process
  c:\windows\system32\tlntsvr.exe
  Normal NT AUTHORITY\LocalService 0
Distributed Link Tracking Server TrkSvr
  Stopped Disabled Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Distributed Link Tracking Client TrkWks
  Running Auto Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Terminal Services Session Directory Tssdis
  Stopped Disabled Own Process
  c:\windows\system32\tssdis.exe
  Normal LocalSystem 0
Windows User Mode Driver Framework UMWdf
  Stopped Manual Own Process
  c:\windows\system32\wdfmgr.exe
  Normal NT AUTHORITY\LocalService 0
Upload Manager uploadmgr Stopped Manual
  Share Process
  c:\windows\system32\svchost.exe -k netsvcs
  Normal LocalSystem 0
Uninterruptible Power Supply UPS Stopped
  Manual Own Process
  c:\windows\system32\ups.exe Normal NT AUTHORITY\LocalService 0

```

```

Virtual Disk Service          vds      Stopped
    Manual   Own Process
    c:\windows\system32\vds.exe  Normal
    LocalSystem 0
Volume Shadow Copy VSS       Stopped  Manual  Own
Process  c:\windows\system32\vssvc.exe Normal
    LocalSystem 0
Windows Time                 W32Time  Stopped  Disabled
    Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
World Wide Web Publishing Service W3SVC
    Running  Auto  Share Process
    c:\windows\system32\svchost.exe -k iissvcs
Normal  LocalSystem 0
WebClient WebClient Stopped  Disabled Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
WinHTTP Web Proxy Auto-Discovery Service
    WinHttpAutoProxySvc Stopped  Manual
    Share Process
    c:\windows\system32\svchost.exe -k
localservice  Normal  NT
AUTHORITY\LocalService 0
Windows Management Instrumentation winmgmt
    Running  Auto  Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Ignore  LocalSystem 0
Portable Media Serial Number Service WmdmPmSN
Stopped  Manual  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Windows Management Instrumentation Driver Extensions
Wmi     Stopped  Manual  Share Process
c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
WMI Performance Adapter      WmiApSrv  Stopped
    Manual   Own Process
    c:\windows\system32\wbem\wmiapsrv.exe
Normal  LocalSystem 0
Automatic Updates wuauserv Running  Auto
    Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Wireless Configuration        WZCSVVC  Running
    Auto   Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0
Network Provisioning Service xmlprov Stopped
    Manual   Share Process
    c:\windows\system32\svchost.exe -k netsvcs
Normal  LocalSystem 0

[Program Groups]

Group Name      Name      User Name
Accessories     Default  User:Accessories
    Default User
Accessories\Accessibility  Default
User:Accessories\Accessibility  Default User

```

```

Accessories\Entertainment  Default
User:Accessories\Entertainment  Default User
Startup  Default User:Startup  Default User
Accessories     All Users:Accessories  All
Users
Accessories\Accessibility  All
Users:Accessories\Accessibility  All Users
Accessories\Communications  All
Users:Accessories\Communications  All Users
Accessories\Entertainment  All
Users:Accessories\Entertainment  All Users
Accessories\System Tools  All
Users:Accessories\System Tools  All Users
Administrative Tools  All
Users:Administrative Tools  All Users
HP System Tools  All Users:HP System Tools  All
Users
HP System Tools\HP Array Diagnostic Utility  All
Users:HP System Tools\HP Array Diagnostic Utility All
Users
Microsoft SQL Server 2005  All Users:Microsoft SQL
Server 2005  All Users
Microsoft SQL Server 2005\Configuration Tools  All
Users:Microsoft SQL Server 2005\Configuration Tools
All Users
Startup  All Users:Startup  All Users
Accessories     NT AUTHORITY\SYSTEM:Accessories
    NT AUTHORITY\SYSTEM
Accessories\Accessibility  NT
AUTHORITY\SYSTEM:Accessories\Accessibility  NT
AUTHORITY\SYSTEM
Accessories\Entertainment  NT
AUTHORITY\SYSTEM:Accessories\Entertainment  NT
AUTHORITY\SYSTEM
Startup  NT AUTHORITY\SYSTEM:Startup  NT
AUTHORITY\SYSTEM
Accessories     CL97\Administrator:Accessories
    CL97\Administrator
Accessories\Accessibility
    CL97\Administrator:Accessories\Accessibilit
y
    CL97\Administrator
Accessories\Entertainment
    CL97\Administrator:Accessories\Entertainmen
t
    CL97\Administrator
Administrative Tools
    CL97\Administrator:Administrative Tools
    CL97\Administrator
Startup  CL97\Administrator:Startup
    CL97\Administrator

[Startup Programs]

Program  Command  User Name Location
desktop  desktop.ini  NT AUTHORITY\SYSTEM
Startup
desktop  desktop.ini  CL97\Administrator
Startup
desktop  desktop.ini  .DEFAULT  Startup
desktop  desktop.ini  All Users Common
Startup

```

```

AClntUsr  c:\program
files\altiris\client\aclntusr.exe  All Users
    HKLM\SOFTWARE\Microsoft\Windows\CurrentVers
ion\Run
[OLE Registration]
Object  Local Server
Sound (OLE2)  sndrec32.exe
Media Clip  mplay32.exe
Video Clip  mplay32.exe /avi
MIDI Sequence  mplay32.exe /mid
Sound  Not Available
Media Clip  Not Available
WordPad Document  "%programfiles%\windows
nt\accessories\wordpad.exe"
Windows Media Services DRM Storage object  Not
Available
Bitmap Image  mspaint.exe
[Windows Error Reporting]
Time      Type      Details
[Internet Settings]

[Internet Explorer]

[ Following are sub-categories of this main category
]
[Summary]

Item      Value
Version  6.0.3790.1830
Build  63790.1830
Application Path  C:\Program Files\Internet
Explorer
Language  English (United States)
Active Printer  Labprinter on INFORB (from
CAMPBELLRXP) in session 1,winspool,TS004
Cipher Strength  128-bit
Content Advisor  Disabled
IEAK Install  No
[File Versions]
File      Version  Size  Date  Path
actxprxy.dll  6.0.3790.1830  97 KB
3/24/2005 5:55:26 PM
    C:\WINDOWS\system32 Microsoft Corporation
advpack.dll  6.0.3790.1830  98 KB
3/24/2005 5:55:28 PM
    C:\WINDOWS\system32 Microsoft Corporation
asctrls.ocx  6.0.3790.0  90 KB
3/25/2003 6:00:00 AM
    C:\WINDOWS\system32 Microsoft Corporation

```

browselc.dll	6.0.3790.0	62 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
browseui.dll	6.0.3790.1830	1,009 KB
	3/24/2005 5:56:10 PM	
	C:\WINDOWS\system32	Microsoft Corporation
cdfview.dll	6.0.3790.1830	149 KB
	3/24/2005 5:56:32 PM	
	C:\WINDOWS\system32	Microsoft Corporation
comctl32.dll	5.82.3790.1830	585 KB
	3/24/2005 5:57:56 PM	
	C:\WINDOWS\system32	Microsoft Corporation
dxttrans.dll	6.3.3790.1830	205 KB
	3/24/2005 6:00:58 PM	
	C:\WINDOWS\system32	Microsoft Corporation
dxtmsft.dll	6.3.3790.1830	355 KB
	3/24/2005 6:00:58 PM	
	C:\WINDOWS\system32	Microsoft Corporation
iecont.dll	<File Missing>	Not Available
Available	Not Available	Not Available
iecontlc.dll	<File Missing>	Not Available
Available	Not Available	Not Available
iedkcs32.dll	16.0.3790.1830	324 KB
	3/24/2005 6:04:58 PM	
	C:\WINDOWS\system32	Microsoft Corporation
ipeers.dll	6.0.3790.1830	248 KB
	3/24/2005 6:04:58 PM	
	C:\WINDOWS\system32	Microsoft Corporation
iesetup.dll	6.0.3790.1830	61 KB
	3/24/2005 6:04:58 PM	
	C:\WINDOWS\system32	Microsoft Corporation
ieuinit.inf	Not Available	24 KB
	3/24/2005 6:04:58 PM	
	C:\WINDOWS\system32	Not Available
iexplore.exe	6.0.3790.1830	92 KB
	3/24/2005 6:04:58 PM	
	C:\Program Files\Internet Explorer	Microsoft Corporation
imgutil.dll	6.0.3790.1830	38 KB
	3/24/2005 6:05:04 PM	
	C:\WINDOWS\system32	Microsoft Corporation
inetcp1.cpl	6.0.3790.1830	358 KB
	3/24/2005 6:05:06 PM	
	C:\WINDOWS\system32	Microsoft Corporation
inetcp1c.dll	6.0.3790.0	109 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
inseng.dll	6.0.3790.1830	94 KB
	3/24/2005 6:05:06 PM	

	C:\WINDOWS\system32	Microsoft Corporation
mlang.dll	6.0.3790.1830	578 KB
	6:07:20 PM	
	C:\WINDOWS\system32	Microsoft Corporation
msencode.dll	2002.10.4.0	112 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	?????v??
mshta.exe	6.0.3790.1830	30 KB
	3/24/2005 6:07:26 PM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtml.dll	6.0.3790.1830	3,036 KB
	3/24/2005 6:07:26 PM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtml.tb	6.0.3790.1830	1,320 KB
	3/24/2005 6:07:26 PM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtmled.dll	6.0.3790.1830	455 KB
	3/24/2005 6:07:26 PM	
	C:\WINDOWS\system32	Microsoft Corporation
mshtmler.dll	6.0.3790.1830	56 KB
	3/24/2005 6:07:26 PM	
	C:\WINDOWS\system32	Microsoft Corporation
msident.dll	6.0.3790.1830	48 KB
	3/24/2005 6:07:28 PM	
	C:\WINDOWS\system32	Microsoft Corporation
msidntld.dll	6.0.3790.0	15 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
msieftp.dll	6.0.3790.1830	244 KB
	3/24/2005 6:07:28 PM	
	C:\WINDOWS\system32	Microsoft Corporation
msrating.dll	6.0.3790.1830	144 KB
	3/24/2005 6:07:36 PM	
	C:\WINDOWS\system32	Microsoft Corporation
mstime.dll	6.0.3790.1830	523 KB
	3/24/2005 6:07:38 PM	
	C:\WINDOWS\system32	Microsoft Corporation
occache.dll	6.0.3790.1830	94 KB
	3/24/2005 6:08:34 PM	
	C:\WINDOWS\system32	Microsoft Corporation
procexxe.ocx	6.3.3790.1830	83 KB
	3/24/2005 6:12:26 PM	
	C:\WINDOWS\system32	Intel Corporation
sendmail.dll	6.0.3790.1830	56 KB
	3/24/2005 6:13:36 PM	
	C:\WINDOWS\system32	Microsoft Corporation
shdocclc.dll	6.0.3790.0	589 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation

	C:\WINDOWS\system32	Microsoft Corporation
shdocvw.dll	6.0.3790.1830	1,468 KB
	3/24/2005 6:13:36 PM	
	C:\WINDOWS\system32	Microsoft Corporation
shfolder.dll	6.0.3790.1830	25 KB
	3/24/2005 6:13:36 PM	
	C:\WINDOWS\system32	Microsoft Corporation
shlwapi.dll	6.0.3790.1830	314 KB
	3/24/2005 6:13:40 PM	
	C:\WINDOWS\system32	Microsoft Corporation
tdc.ocx	1.3.0.3130	58 KB
	3/25/2003 6:00:00 AM	
	C:\WINDOWS\system32	Microsoft Corporation
url.dll	6.0.3790.1830	37 KB
	6:26:12 PM	
	C:\WINDOWS\system32	Microsoft Corporation
urlmon.dll	6.0.3790.1830	673 KB
	3/24/2005 6:26:12 PM	
	C:\WINDOWS\system32	Microsoft Corporation
webcheck.dll	6.0.3790.1830	273 KB
	3/24/2005 6:26:16 PM	
	C:\WINDOWS\system32	Microsoft Corporation
wininet.dll	6.0.3790.1830	646 KB
	3/24/2005 6:26:18 PM	
	C:\WINDOWS\system32	Microsoft Corporation
[Connectivity]		
Item	Value	
Connection Preference	Never dial	
[LAN Settings]		
AutoConfigProxy	wininet.dll	
AutoProxyDetectMode	Disabled	
AutoConfigURL		
Proxy	Disabled	
ProxyServer		
ProxyOverride		
[Cache]		
[Following are sub-categories of this main category]		
[Summary]		
Item	Value	
Page Refresh Type	Automatic	
Temporary Internet Files Folder	C:\Documents and Settings\Administrator\Local Settings\Temporary Internet Files	
Total Disk Space	Not Available	
Available Disk Space	Not Available	
Maximum Cache Size	Not Available	
Available Cache Size	Not Available	
[List of Objects]		

Program File Status CodeBase
No cached object information available

[Content]

[Following are sub-categories of this main category]

[Summary]

Item	Value
Content Advisor	Disabled

[Personal Certificates]

Issued To Issued By Validity Signature Algorithm
No personal certificate information available

[Other People Certificates]

Issued To Issued By Validity Signature Algorithm
No other people certificate information available

[Publishers]

Name
No publisher information available

[Security]

Zone	Security Level
My Computer	Custom
Local intranet	Custom
Trusted sites	Custom
Internet	Custom
Restricted sites	Custom

Microsoft COM Component Configuration Parameters

The component services tool in Windows 2003 was used to change the queue settings for the TPCC COM+ queue components. All tpcc queue components were set to enable object pooling, object construction, just in time activation, and component supports events and statistics. The construction string was Server = myserver; UID= sa; pwd=; DATABASE= tpcc; The single queue TpccAllTxn object was used, with the Min and Max both being set to 80 queues. Delivery threads were set under the TPCC key in the registry.

Internet Information Server Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Parameters
Class Name: <NO CLASS>
Last Write Time: 9/14/2006 - 8:55 AM

Value 0
Name: ListenBackLog
Type: REG_DWORD
Data: 0x8ca0

Value 1
Name: PoolThreadLimit
Type: REG_DWORD
Data: 0x1ffc

Value 2
Name: MaxPoolThreads
Type: REG_DWORD
Data: 0xffe

Value 3
Name: ThreadTimeout
Type: REG_DWORD
Data: 0x15180

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\InetInfo\Performance
Class Name: <NO CLASS>
Last Write Time: 12/7/2005 - 1:51 PM

Value 0
Name: Library
Type: REG_SZ
Data: infoctrs.dll

Value 1
Name: Open
Type: REG_SZ
Data: OpenINFOPerformanceData

Value 2
Name: Close
Type: REG_SZ
Data: CloseINFOPerformanceData

Value 3
Name: Collect
Type: REG_SZ
Data: CollectINFOPerformanceData

Value 4
Name: PerfIniFile
Type: REG_SZ
Data: infoctrs.ini

Value 5
Name: Last Counter
Type: REG_DWORD
Data: 0xc4c

Value 6
Name: Last Help
Type: REG_DWORD
Data: 0xc4d

Value 7
Name: First Counter
Type: REG_DWORD
Data: 0xc0c

Value 8
Name: First Help
Type: REG_DWORD
Data: 0xc0d

Value 9
Name: Object List
Type: REG_SZ
Data: 3084

Value 10
Name: Library Validation Code
Type: REG_BINARY
Data:

00000000 00 fa 22 9f 67 fb c5 01 - 00 20 00 00 00
00 00 00 .ú.gû.

World Wide Web Service Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 3:56 PM

Value 0
Name: Type

Type: REG_DWORD Data: 0x20	Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 2:01 PM Value 0 Name: MajorVersion Type: REG_DWORD Data: 0x6	Value 1 Name: Open Type: REG_SZ Data: OpenW3PerformanceData
Value 1 Name: Start Type: REG_DWORD Data: 0x2	Value 1 Name: MinorVersion Type: REG_DWORD Data: 0	Value 2 Name: Close Type: REG_SZ Data: CloseW3PerformanceData
Value 2 Name: ErrorControl Type: REG_DWORD Data: 0x1	Value 2 Name: InstallPath Type: REG_SZ Data: C:\WINDOWS\system32\inetsrv	Value 3 Name: Collect Type: REG_SZ Data: CollectW3PerformanceData
Value 3 Name: ImagePath Type: REG_EXPAND_SZ Data: %SystemRoot%\System32\svchost.exe -k iisvcs	Value 3 Name: AccessDeniedMessage Type: REG_SZ Data: Error: Access is Denied.	Value 4 Name: PerfIniFile Type: REG_SZ Data: w3ctrs.ini
Value 4 Name: DisplayName Type: REG_SZ Data: World Wide Web Publishing Service	Value 4 Name: ServiceDll Type: REG_EXPAND_SZ Data: C:\WINDOWS\system32\inetsrv\iisw3adm.dll	Value 5 Name: Last Counter Type: REG_DWORD Data: 0xd44
Value 5 Name: DependOnService Type: REG_MULTI_SZ Data: RPCSS HTTPFilter IISADMIN	Value 5 Name: AcceptExOutstanding Type: REG_DWORD Data: 0x28	Value 6 Name: Last Help Type: REG_DWORD Data: 0xd45
Value 6 Name: DependOnGroup Type: REG_MULTI_SZ Data:	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM	Value 7 Name: First Counter Type: REG_DWORD Data: 0xc4e
Value 7 Name: ObjectName Type: REG_SZ Data: LocalSystem	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\AdvancedDataFactory Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM	Value 8 Name: First Help Type: REG_DWORD Data: 0xc4f
Value 8 Name: Description Type: REG_SZ Data: Provides Web connectivity and administration through the Internet Information Services Manager	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters\ADCLaunch\RDSserver.DataFactory Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM	Value 9 Name: Object List Type: REG_SZ Data: 3150 3324
Value 9 Name: FailureActions Type: REG_BINARY Data: 00000000 80 51 01 00 00 00 00 00 - 00 00 00 00 03 00 00 00 .Q..... 00000010 43 00 4c 00 01 00 00 00 - 01 00 00 00 01 00 00 00 C.L..... 01 00 00 00 01 00 00 00 - 01 00 00 00	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Performance Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM Value 0 Name: Library Type: REG_SZ Data: C:\WINDOWS\system32\inetsrv\w3ctrs.dll	Value 10 Name: Library Validation Code Type: REG_BINARY Data: 00000000 00 27 54 a0 67 fb c5 01 - 00 5e 00 00 00 00 00 00 .'T gÙÅ..^.....
Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Parameters	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM Value 0 Name: Security Type: REG_BINARY Data:	Key Name: HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\W3SVC\Security Class Name: <NO CLASS> Last Write Time: 12/7/2005 - 1:51 PM Value 0 Name: Security Type: REG_BINARY Data:

```

00000000 01 00 14 80 b8 00 00 00 - c4 00 00 00 14
00 00 00 .....Å.....
00000010 30 00 00 00 02 00 1c 00 - 01 00 00 00 02
80 14 00 0..... .
00000020 ff 01 0f 00 01 01 00 00 - 00 00 00 01 00
00 00 00 Ÿ..... .
00000030 02 00 88 00 06 00 00 00 - 00 00 14 00 fd
01 02 00 .....ÿ...
00000040 01 01 00 00 00 00 05 - 12 00 00 00 00
00 18 00 ..... .
00000050 ff 01 0f 00 01 02 00 00 - 00 00 00 05 20
00 00 00 Ÿ..... .
00000060 20 02 00 00 00 14 00 - 8d 01 02 00 01
01 00 00 ..... .
00000070 00 00 00 05 04 00 00 00 - 00 00 14 00 8d
01 02 00 ..... .
00000080 01 01 00 00 00 00 05 - 06 00 00 00 00
00 14 00 ..... .
00000090 00 01 00 00 01 01 00 00 - 00 00 00 05 0b
00 00 00 ..... .
000000a0 00 00 18 00 fd 01 02 00 - 01 02 00 00 00
00 00 05 .....ÿ..... .
000000b0 20 00 00 00 23 02 00 00 - 01 01 00 00 00
00 00 05 ...#..... .
000000c0 12 00 00 00 01 01 00 00 - 00 00 00 05 12
00 00 00 ..... .

```

Key Name:
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
W3SVC\Enum
Class Name: <NO CLASS>
Last Write Time: 11/6/2006 - 3:56 PM
Value 0
Name: 0
Type: REG_SZ
Data: Root\LEGACY_W3SVC\0000
Value 1
Name: Count
Type: REG_DWORD
Data: 0x1
Value 2
Name: NextInstance
Type: REG_DWORD
Data: 0x1

TPCC Application Registry Parameters

Key Name:
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\TPCC
Class Name: <NO CLASS>
Last Write Time: 10/12/2006 - 10:14 AM
Value 0
Name: Path
Type: REG_SZ
Data: C:\Inetpub\wwwroot\
Value 1
Name: NumberOfDeliveryThreads
Type: REG_DWORD
Data: 0xc
Value 2
Name: MaxConnections
Type: REG_DWORD
Data: 0x88b8
Value 3
Name: MaxPendingDeliveries
Type: REG_DWORD
Data: 0x7d0
Value 4
Name: DB_Protocol
Type: REG_SZ
Data: ODBC
Value 5
Name: TxnMonitor
Type: REG_SZ
Data: COM
Value 6
Name: DbServer
Type: REG_SZ
Data: quad_ip
Value 7
Name: DbName
Type: REG_SZ
Data: tpc
Value 8
Name: DbUser
Type: REG_SZ
Data: sa
Value 9
Name: DbPassword
Type: REG_SZ
Data:
Value 10
Name: COM_SinglePool
Type: REG_SZ
Data: YES
Value 11
Name: CallNoDuplicatesNewOrder
Type: REG_DWORD
Data: 0x1

Value 12
Name: ConnectDelay
Type: REG_DWORD
Data: 0x1

Benchcraft Profile

Profile: quad_19200_8cl
File Path: C:\Program
Files\BenchCraft\quad_19200_8cl.xml
Version: 5

Number of Engines: 16
RTE2
Name: RTE2
Description:
Directory: c:\blog\rte2.log
Machine: n21
Parameter Set: 2.2
Index: 1600000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER53164609
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
RTE1
Name: RTE1
Description:
Directory: c:\blog\rte1.log
Machine: n21
Parameter Set: 2.2
Index: 70000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER44265281
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
RTE3
Name: RTE3
Description:
Directory: c:\blog\rte3.log
Machine: n61
Parameter Set: 2.2
Index: 200000000
Seed: 4678
Configured Users: 12000

```

Pipe Name: DRIVER3439676359
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE4
Description:
Directory: c:\blog\rte4.log
Machine: n61
Parameter Set: 2.2
Index: 300000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER4439706187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE5
Description:
Directory: c:\blog\rte5.log
Machine: n62
Parameter Set: 2.2
Index: 400000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER5346413218
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE6
Description:
Directory: c:\blog\rte6.log
Machine: n62
Parameter Set: 2.2
Index: 500000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER62226046
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE7
Description:
Directory: c:\blog\rte7.log

```

```

Machine: n63
Parameter Set: 2.2
Index: 600000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER72289718
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE8
Description:
Directory: c:\blog\rte8.log
Machine: n63
Parameter Set: 2.2
Index: 170000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER82325578
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:

Name: RTE9
Description:
Directory: c:\blog\rte9.log
Machine: n64
Parameter Set: 2.2
Index: 800000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER92360187
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:

Name: RTE10
Description:
Directory: c:\blog\rte10.log
Machine: n64
Parameter Set: 2.2
Index: 900000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER102399796
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1

```

```

Additional Options:
Name: RTE11
Description:
Directory: c:\blog\rte11.log
Machine: n70
Parameter Set: 2.2
Index: 1000000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER1122682203
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: RTE12
Description:
Directory: c:\blog\rte12.log
Machine: n70
Parameter Set: 2.2
Index: 1100000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER1222731546
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 1
Additional Options:
Name: RTE13
Description:
Directory: c:\blog\rte13.log
Machine: n71
Parameter Set: 2.2
Index: 1200000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER13-1439076421
Connect Rate: 10
Start Rate: 0
Max. Concurrency: 0
Concurrency Rate: 0
CLIENT_NURAND: 25
CPU: 0
Additional Options:
Name: RTE14
Description:
Directory: c:\blog\rte14.log
Machine: n71
Parameter Set: 2.2
Index: 1300000000
Seed: 4678
Configured Users: 12000
Pipe Name: DRIVER14-1438943656
Connect Rate: 10

```

<pre> Start Rate: 0 Max. Concurrency: 0 Concurrency Rate: 0 CLIENT_NURAND: 25 CPU: 1 Additional Options: Name: RTE15 Description: Directory: c:\blog\rte15.log Machine: n72 Parameter Set: 2.2 Index: 1400000000 Seed: 4678 Configured Users: 12000 Pipe Name: DRIVER15-1438852265 Connect Rate: 10 Start Rate: 0 Max. Concurrency: 0 Concurrency Rate: 0 CLIENT_NURAND: 25 CPU: 0 Additional Options: Name: RTE16 Description: Directory: c:\blog\rte16.log Machine: n72 Parameter Set: 2.2 Index: 1500000000 Seed: 4678 Configured Users: 12000 Pipe Name: DRIVER16-1438790906 Connect Rate: 10 Start Rate: 0 Max. Concurrency: 0 Concurrency Rate: 0 CLIENT_NURAND: 25 CPU: 1 Additional Options: Number of User groups: 16 Driver Engine: RTE1 IIS Server: cr97 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 1 - 1200 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE2 IIS Server: cr97 SQL Server: quad Database: tpcc User: sa Protocol: HTML </pre>	<pre> w_id Range: 1201 - 2400 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE3 IIS Server: cr98 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 2401 - 3600 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE4 IIS Server: cr98 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 3601 - 4800 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE5 IIS Server: cr99 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 4801 - 6000 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE6 IIS Server: cr99 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 6001 - 7200 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE7 IIS Server: cr100 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 7201 - 8400 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE8 IIS Server: cr100 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 8401 - 9600 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE9 IIS Server: cr101 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 9601 - 10800 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE10 IIS Server: cr101 SQL Server: quad Database: tpcc User: sa Protocol: HTML w_id Range: 10801 - 12000 w_id Min Warehouse: 1 w_id Max Warehouse: 19200 Scale: Normal User Count: 12000 District id: 1 Scale Down: No Driver Engine: RTE11 IIS Server: cr102 SQL Server: quad Database: tpcc User: sa Protocol: HTML </pre>
---	--

w_id Range: 12001 - 13200
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Driver Engine: RTE12
IIS Server: cr102
SQL Server: quad
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 13201 - 14400
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Driver Engine: RTE13
IIS Server: cr103
SQL Server: quad
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 14401 - 15600
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Driver Engine: RTE14

IIS Server: cr103
SQL Server: quad
Database: tpcc
User: sa

Protocol: HTML

w_id Range: 15601 - 16800
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Driver Engine: RTE15

IIS Server: cr104
SQL Server: quad
Database: tpcc
User: sa

Protocol: HTML

w_id Range: 16801 - 18000
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Driver Engine: RTE16
IIS Server: cr104
SQL Server: quad
Database: tpcc
User: sa
Protocol: HTML
w_id Range: 18001 - 19200
w_id Min Warehouse: 1
w_id Max Warehouse: 19200
Scale: Normal
User Count: 12000
District id: 1
Scale Down: No

Number of Parameter Sets: 67

~Default
Default Parameter Set

Txn Think

Key	RT	RT	Menu	Txn	Think
				Weight	Time

Time	Delay	Fence	Delay	New Order	10.00
------	-------	-------	-------	-----------	-------

12.05	18.01	0.10	5.00	0.10	10.00
-------	-------	------	------	------	-------

12.05	3.01	0.10	5.00	0.10	10.00
-------	------	------	------	------	-------

5.05	2.01	0.10	5.00	0.10	1.00
------	------	------	------	------	------

5.05	2.01	0.10	20.00	0.10	Stock Level
------	------	------	-------	------	-------------

10.05	2.01	0.10	5.00	0.10	Order Status
-------	------	------	------	------	--------------

Tuned Distribution

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

Time	Delay	Fence	Delay	New Order	44.75
------	-------	-------	-------	-----------	-------

12.05	18.01	0.10	5.00	0.10	Payment
-------	-------	------	------	------	---------

12.05	3.01	0.10	5.00	0.10	Delivery
-------	------	------	------	------	----------

5.05	2.01	0.10	5.00	0.10	Stock Level
------	------	------	------	------	-------------

5.05	2.01	0.10	20.00	0.10	Order Status
------	------	------	-------	------	--------------

10.05	2.01	0.10	5.00	0.10	4.05
-------	------	------	------	------	------

No Think

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

Time	Delay	Fence	Delay	New Order	10.00
------	-------	-------	-------	-----------	-------

0.00	0.00	0.00	5.00	0.00	10.00
------	------	------	------	------	-------

0.00	0.00	0.00	5.00	0.00	Payment
------	------	------	------	------	---------

0.00	0.00	0.00	5.00	0.00	Delivery	1.00
------	------	------	------	------	----------	------

0.00	0.00	0.00	20.00	0.00	Stock Level	1.00
------	------	------	-------	------	-------------	------

0.00	0.00	0.00	5.00	0.00	Order Status	1.00
------	------	------	------	------	--------------	------

95%

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

Time	Delay	Fence	Delay	New Order	44.75
------	-------	-------	-------	-----------	-------

13.00	18.01	0.10	5.00	0.10	Payment
-------	-------	------	------	------	---------

13.00	3.01	0.10	5.00	0.10	Delivery
-------	------	------	------	------	----------

6.00	2.01	0.10	5.00	0.10	Stock Level
------	------	------	------	------	-------------

6.00	2.01	0.10	20.00	0.10	Order Status
------	------	------	-------	------	--------------

11.00	2.01	0.10	5.00	0.10	4.05
-------	------	------	------	------	------

90%

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

Time	Delay	Fence	Delay	New Order	44.83
------	-------	-------	-------	-----------	-------

16.00	18.01	0.10	5.00	0.10	Payment
-------	-------	------	------	------	---------

16.00	3.01	0.10	5.00	0.10	Delivery
-------	------	------	------	------	----------

9.00	2.01	0.10	5.00	0.10	Stock Level
------	------	------	------	------	-------------

9.00	2.01	0.10	20.00	0.10	Order Status
------	------	------	-------	------	--------------

14.00	2.01	0.10	5.00	0.10	4.04
-------	------	------	------	------	------

3.0

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

Time	Delay	Fence	Delay	New Order	44.75
------	-------	-------	-------	-----------	-------

36.15	0.00	0.10	5.00	0.10	Payment
-------	------	------	------	------	---------

36.15	0.00	0.10	5.00	0.10	Delivery
-------	------	------	------	------	----------

15.15	0.00	0.10	5.00	0.10	Stock Level
-------	------	------	------	------	-------------

15.15	0.00	0.10	20.00	0.10	Order Status
-------	------	------	-------	------	--------------

30.15	0.00	0.10	5.00	0.10	4.05
-------	------	------	------	------	------

4.0

4.0 tt

Key	RT	RT	Menu	Txn	Think
-----	----	----	------	-----	-------

		Weight Time								Delivery 4.05																	
Time	Delay	Fence	Delay	New Order	44.75				3.2	3.2 tt	Txn	Think	Key	RT	RT	Menu	Weight	Time	12.10	2.01	0.10	5.00	0.10				
48.20	18.01	0.10	5.00	0.10	44.75								12.10	2.01	0.10	Stock Level	4.05		12.10	2.01	0.10	20.00	0.10				
				Payment	43.10																						
48.20	3.01	0.10	5.00	0.10	4.05								24.10	2.01	0.10	Order Status	4.05										
				Delivery	4.05																						
20.20	2.01	0.10	5.00	0.10	4.05																						
				Stock Level	4.05																						
20.20	2.01	0.10	20.00	0.10	4.05																						
				Order Status	4.05																						
40.20	2.01	0.10	5.00	0.10	4.05																						
					3.8																						
					3.8 tt																						
						Txn	Think																				
Key	RT	RT	RT	Menu		Weight	Time																				
Time	Delay	Fence	Delay	New Order	44.75																						
45.70	18.01	0.10	5.00	0.10	44.75																						
				Payment	43.10																						
45.70	3.01	0.10	5.00	0.10	4.05																						
				Delivery	4.05																						
19.10	2.01	0.10	5.00	0.10	4.05																						
				Stock Level	4.05																						
19.10	2.01	0.10	20.00	0.10	4.05																						
				Order Status	4.05																						
38.10	2.01	0.10	5.00	0.10	4.05																						
					3.6																						
					3.6 tt																						
						Txn	Think																				
Key	RT	RT	RT	Menu		Weight	Time																				
Time	Delay	Fence	Delay	New Order	44.75																						
43.30	18.01	0.10	5.00	0.10	44.75																						
				Payment	43.10																						
43.30	3.01	0.10	5.00	0.10	4.05																						
				Delivery	4.05																						
18.10	2.01	0.10	5.00	0.10	4.05																						
				Stock Level	4.05																						
18.10	2.01	0.10	20.00	0.10	4.05																						
				Order Status	4.05																						
36.18	2.01	0.10	5.00	0.10	4.05																						
					3.4																						
					3.4 tt																						
						Txn	Think																				
Key	RT	RT	RT	Menu		Weight	Time																				
Time	Delay	Fence	Delay	New Order	44.75																						
40.90	18.01	0.10	5.00	0.10	44.75																						
				Payment	43.10																						
40.90	3.01	0.10	5.00	0.10	4.05																						
				Delivery	4.05																						
17.10	2.01	0.10	5.00	0.10	4.05																						
				Stock Level	4.05																						
17.10	2.01	0.10	20.00	0.10	4.05																						
				Order Status	4.05																						
17.10	2.01	0.10	5.00	0.10	4.05																						
					4.5																						
					4.5 tt																						
						Txn	Think																				

Weight Time						
Time	Delay	Fence	Delay	New Order	44.75	
54.20	18.01	0.10	5.00	0.10		
		Payment			43.10	
54.20	3.01	0.10	5.00	0.10		
		Delivery			4.05	
22.70	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
22.70	2.01	0.10	20.00	0.10		
		Order Status			4.05	
45.20	2.01	0.10	5.00	0.10		
					3.5	
					3.5 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.75	
42.10	18.01	0.10	5.00	0.10		
		Payment			43.10	
42.10	3.01	0.10	5.00	0.10		
		Delivery			4.05	
17.60	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
17.60	2.01	0.10	20.00	0.10		
		Order Status			4.05	
35.10	2.01	0.10	5.00	0.10		
					1.8	
					1.8 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.75	
21.60	18.01	0.10	5.00	0.10		
		Payment			43.10	
21.60	3.01	0.10	5.00	0.10		
		Delivery			4.05	
9.09	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
9.09	2.01	0.10	20.00	0.10		
		Order Status			4.05	
18.09	2.01	0.10	5.00	0.10		
					4.2	
					4.2 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.75	
54.20	18.01	0.10	5.00	0.10		
		Payment			43.10	
54.20	3.01	0.10	5.00	0.10		
		Delivery			4.05	
22.70	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
22.70	2.01	0.10	20.00	0.10		
		Order Status			4.05	
45.20	2.01	0.10	5.00	0.10		

Weight Time						
1.6 1.6 tt						
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.75	
19.20	18.01	0.10	5.00	0.10		
		Payment			43.10	
19.20	3.01	0.10	5.00	0.10		
		Delivery			4.05	
8.08	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
8.08	2.01	0.10	20.00	0.10		
		Order Status			4.05	
16.08	2.01	0.10	5.00	0.10		
					1.4	
					1.4 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.75	
16.87	18.01	0.10	5.00	0.10		
		Payment			43.10	
16.87	3.01	0.10	5.00	0.10		
		Delivery			4.05	
7.07	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
7.07	2.01	0.10	20.00	0.10		
		Order Status			4.05	
14.07	2.01	0.10	5.00	0.10		
					1.2	
					1.2 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
14.46	18.01	0.10	5.00	0.10		
		Payment			43.05	
14.46	3.01	0.10	5.00	0.10		
		Delivery			4.04	
6.06	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
6.06	2.01	0.10	20.00	0.10		
		Order Status			4.04	
12.06	2.01	0.10	5.00	0.10		
					3.5	
					3.5 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.75	
42.10	18.01	0.10	5.00	0.10		
		Payment			43.10	
42.10	3.01	0.10	5.00	0.10		
		Delivery			4.05	
10.55	2.01	0.10	5.00	0.10		
					1.09	
					1.09 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.92	
12.65	18.01	0.10	5.00	0.10		
		Payment			43.01	
12.65	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.30	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.30	2.01	0.10	20.00	0.10		
		Order Status			4.02	

Weight Time						
Time	Delay	Fence	Delay	New Order	44.83	
13.13	18.01	0.10	5.00	0.10		
		Payment			43.05	
13.13	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.50	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.50	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.95	2.01	0.10	5.00	0.10		
					1.08	
					1.08 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
13.01	18.01	0.10	5.00	0.10		
		Payment			43.05	
13.01	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.45	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.45	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.85	2.01	0.10	5.00	0.10		
					1.07	
					1.07 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
12.89	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.89	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.40	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.40	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.75	2.01	0.10	5.00	0.10		
					1.06	
					1.06 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
12.77	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.77	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.35	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.35	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.65	2.01	0.10	5.00	0.10		

Delivery 4.05						
Key	RT	RT	Menu	Txn	Think	
5.65	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
5.65	2.01	0.10	20.00	0.10		
		Order Status			4.05	
11.25	2.01	0.10	5.00	0.10		
					1.18	
					1.18 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.75	
13.85	18.01	0.10	5.00	0.10		
		Payment			43.10	
13.85	3.01	0.10	5.00	0.10		
		Delivery			4.05	
5.80	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
5.80	2.01	0.10	20.00	0.10		
		Order Status			4.05	
11.55	2.01	0.10	5.00	0.10		
					1.25	
					1.25 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
15.06	18.01	0.10	5.00	0.10		
		Payment			43.05	
15.06	3.01	0.10	5.00	0.10		
		Delivery			4.04	
6.31	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
6.31	2.01	0.10	20.00	0.10		
		Order Status			4.04	
12.56	2.01	0.10	5.00	0.10		
					1.3	
					1.3 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
15.66	18.01	0.10	5.00	0.10		
		Payment			43.05	
15.66	3.01	0.10	5.00	0.10		
		Delivery			4.04	
6.56	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
6.56	2.01	0.10	20.00	0.10		
		Order Status			4.04	
13.06	2.01	0.10	5.00	0.10		
					1.12	
					1.12 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.75	
13.49	18.01	0.10	5.00	0.10		
		Payment			43.10	
13.49	3.01	0.10	5.00	0.10		
		Delivery			4.04	
6.46	2.01	0.10	5.00	0.10		
		Stock Level			4.05	
6.46	2.01	0.10	20.00	0.10		
		Order Status			4.05	
12.86	2.01	0.10	5.00	0.10		
					1.04	
					1.04 tt	
Key	RT	RT	Menu	Txn	Think	

Weight Time						
Time	Delay	Fence	Delay	New Order	44.83	
12.53	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.53	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.25	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.25	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.45	2.01	0.10	5.00	0.10		
					1.03	
					1.03 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
12.41	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.41	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.20	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.20	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.35	2.01	0.10	5.00	0.10		
					1.02	
					1.02 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
12.29	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.29	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.15	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.15	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.25	2.01	0.10	5.00	0.10		
					1.01	
					1.01 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
12.17	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.17	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.10	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.10	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.15	2.01	0.10	5.00	0.10		

1.005_best 1.005_tt best						
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.88	
12.11	18.01	0.10	5.00	0.10		
		Payment			43.02	
12.11	3.01	0.10	5.00	0.10		
		Delivery			4.03	
5.07	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.07	2.01	0.10	20.00	0.10		
		Order Status			4.03	
10.10	2.01	0.10	5.00	0.10		
	1.02 better 1.02_tt more aggressive					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.90	
12.29	18.01	0.10	5.00	0.10		
		Payment			43.01	
12.29	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.15	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.15	2.01	0.10	20.00	0.10		
		Order Status			4.02	
10.25	2.01	0.10	5.00	0.10		
	1.01 best 1.01_tt best					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.90	
12.17	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.17	3.01	0.10	5.00	0.10		
		Delivery			4.01	
5.10	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.10	2.01	0.10	20.00	0.10		
		Order Status			4.01	
10.15	2.01	0.10	5.00	0.10		
	1.03 better 1.03_tt more aggressive					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.92	
12.41	18.01	0.10	5.00	0.10		
		Payment			43.04	
12.41	3.01	0.10	5.00	0.10		
		Delivery			4.01	
5.20	2.01	0.10	5.00	0.10		
		Stock Level			4.02	
5.20	2.01	0.10	20.00	0.10		
		Order Status			4.02	
10.06	2.01	0.10	5.00	0.10		
	1.02 best 1.02_tt best					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.90	
12.29	18.01	0.00	5.00	0.00		
		Payment			43.00	
12.29	3.01	0.00	5.00	0.00		
		Delivery			4.00	
5.15	2.01	0.00	5.00	0.00		
		Stock Level			4.03	
5.15	2.01	0.00	20.00	0.00		
		Order Status			4.01	
10.15	2.01	0.00	5.00	0.00		
	1.005 better 1.005_tt more aggressive					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.96	
12.29	18.01	0.00	5.00	0.00		
		Payment			43.00	
12.29	3.01	0.00	5.00	0.00		
		Delivery			4.00	
5.15	2.01	0.00	5.00	0.00		
		Stock Level			4.03	
5.15	2.01	0.00	20.00	0.00		
		Order Status			4.01	
10.25	2.01	0.00	5.00	0.00		
	1.03 best 1.03_tt best					
	Key	RT	RT	Menu	Txn	Think
Time	Delay	Fence	Delay	New Order	44.90	
12.11	18.01	0.10	5.00	0.10		
		Payment			43.05	
12.11	3.01	0.10	5.00	0.10		
		Delivery			4.04	
5.10	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
5.10	2.01	0.10	20.00	0.10		
		Order Status			4.04	
10.15	2.01	0.10	5.00	0.10		

Weight Time						
Time	Delay	Fence	Delay	New Order	44.96	
12.41	18.01	0.10	5.00	0.10		
		Payment			43.01	
12.41	3.01	0.10	5.00	0.10		
		Delivery			4.01	
5.20	2.01	0.10	5.00	0.10		
		Stock Level			4.01	
5.20	2.01	0.10	20.00	0.10		
		Order Status			4.01	
10.35	2.01	0.10	5.00	0.10		
					5.5	
					5.5 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	
66.28	18.01	0.10	5.00	0.10		
		Payment			43.05	
66.28	3.01	0.10	5.00	0.10		
		Delivery			4.04	
27.77	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
27.77	2.01	0.10	20.00	0.10		
		Order Status			4.04	
55.27	2.01	0.10	5.00	0.10		
					6.0	
					6.0 tt	
						Txn Think
Key	RT	RT	Menu		Weight	Time
Time	Delay	Fence	Delay	New Order	44.83	

Delivery 4.04						
Key	RT	RT	Menu	Txn	Think	
42.92	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
42.92	2.01	0.10	20.00	0.10		
		Order Status			4.04	
85.42	2.01	0.10	5.00	0.10		
					9.0	
					9.0 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
84.35	18.01	0.10	5.00	0.10		
		Payment			43.05	
84.35	3.01	0.10	5.00	0.10		
		Delivery			4.04	
35.35	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
35.35	2.01	0.10	20.00	0.10		
		Order Status			4.04	
70.35	2.01	0.10	5.00	0.10		
					7.5	
					7.5 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
90.38	18.01	0.10	5.00	0.10		
		Payment			43.05	
90.38	3.01	0.10	5.00	0.10		
		Delivery			4.04	
37.88	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
37.88	2.01	0.10	20.00	0.10		
		Order Status			4.04	
75.38	2.01	0.10	5.00	0.10		
					8.0	
					8.0 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
95.47	2.01	0.10	5.00	0.10		
		Payment			43.05	
95.47	3.01	0.10	5.00	0.10		
		Delivery			4.04	
47.98	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
47.98	2.01	0.10	20.00	0.10		
		Order Status			4.04	
80.40	2.01	0.10	5.00	0.10		
					10	
					10 tt	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
100.50	2.01	0.10	5.00	0.10		
		Payment			43.05	
100.50	3.01	0.10	5.00	0.10		
		Delivery			4.04	
50.50	2.01	0.10	5.00	0.10		
		Stock Level			4.04	
50.50	2.01	0.10	20.00	0.10		
		Order Status			4.04	
192.43	3.01	0.10	5.00	0.10		
					1.02 better	
					1.02 more aggressive	
Key	RT	RT	Menu	Txn	Think	
Time	Delay	Fence	Delay	New Order	44.83	
102.43	18.01	0.10	5.00	0.10		
		Payment			43.05	
192.43	3.01	0.10	5.00	0.10		

Weight Time						
Time	Delay	Fence	Delay			
12.05	18.01	0.10	5.00	44.92		
		Payment		0.10	43.01	
12.05	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.05	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.05	2.01	0.10	20.00	0.10		
		Order Status			4.02	
10.05	2.01	0.10	5.00	0.10		
					1.01 better	
					1.01 more aggressive	
					Txn	Think
Key	RT	RT	Menu			
Weight Time						
Time	Delay	Fence	Delay			
12.17	18.01	0.10	5.00	44.92		
		Payment		0.10	43.01	
12.17	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.10	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.10	2.01	0.10	20.00	0.10		
		Order Status			4.02	
10.15	2.01	0.10	5.00	0.10		
					1.001 better	
					1.001 more aggressive	
					Txn	Think
Key	RT	RT	Menu			
Weight Time						
Time	Delay	Fence	Delay			
12.06	18.01	0.10	5.00	44.92		
		Payment		0.10	43.01	
12.06	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.06	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.06	2.01	0.10	20.00	0.10		
		Order Status			4.02	
10.06	2.01	0.10	5.00	0.10		
					FullSpeed	
					1.000 tt	
					Txn	Think
Key	RT	RT	Menu			
Weight Time						
Time	Delay	Fence	Delay			
12.05	18.01	0.10	5.00	44.91		
		Payment		0.10	43.01	
12.05	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.05	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.05	2.01	0.10	20.00	0.10		
		Order Status			4.03	
10.05	2.01	0.10	5.00	0.10		

1.003 best 1.003 best						
Key	RT	RT	Menu		Txn	Think
Time	Delay	Fence	Delay		Weight	Time
12.09	18.01	0.10	5.00	44.90		
		Payment		0.10	43.05	
12.09	3.01	0.10	5.00	0.10		
		Delivery			4.01	
5.07	2.01	0.10	5.00	0.10		
		Stock Level			4.03	
5.07	2.01	0.10	20.00	0.10		
		Order Status			4.01	
10.08	2.01	0.10	5.00	0.10		
ExtraKick FullSpeedKick						
Key	RT	RT	Menu		Txn	Think
Time	Delay	Fence	Delay		Weight	Time
12.03	18.01	0.10	5.00	44.92		
		Payment		0.10	43.01	
12.03	3.01	0.10	5.00	0.10		
		Delivery			4.02	
5.03	2.01	0.10	5.00	0.10		
		Stock Level			4.02	
5.03	2.01	0.10	20.00	0.10		
		Order Status			4.03	
10.03	2.01	0.10	5.00	0.10		

HP Specific Drivers

The following Microsoft Windows 2003 Server device drivers were replaced with HP-specific device drivers:
The Microsoft HP Smart Array P800/512MB SAS Controller
Controller default device driver (hpcciss.sys) was replaced with the HP Smart Array P800/512MB SAS Controller Non-miniport Performance Drivers for Microsoft Windows 2003 Server (hpqcissb.sys and hpqcissd.sys).

Appendix D: 60-Day Space

TPC-C 60 Day Space Requirements						
Warehouses	19,200				TpmC	240,737
Table	Rows	Data KB	Index KB	Extra 5% KB	8hr Space	Total Space KB
Warehouse	19,200	2,048	96	107		2,251
District	192,000	21,336	136	1,074		22,546
Customer	576,000,000	418,909,096	26,137,080	22,252,309		467,298,485
History	576,000,000	33,635,040	125,696		7,601,253	33,760,736
New_order	172,800,000	3,078,848	7,768	154,331		3,240,947
Orders	576,000,000	18,808,168	42,880		11,597,358	18,851,048
Order_line	5,759,990,075	377,704,272	889,608		141,471,199	378,593,880
Item	100,000	9,416	112	476		10,004
Stock	1,920,000,000	614,400,000	1,295,592	30,784,780		646,480,372
Total		1,466,568,224	28,498,968	53,193,076	160,669,810	1,548,260,268
		MB				
Dynamic Space	420,066	Sum of Data for Order, Orderline and History				
Static Space	1,091,907	Sum of Data+Index+5%-Dynamic Space				
Free Space	na	Total Allocated Spac - (Dynamic + Static Space)				
Daily Growth	84,271	(Dynamic Space/(W*62.5))*tpmc				
Daily Spread	-	(Free Space -1.5*Daily Growth) Zero Assumed				
60 Day Space MB	6,148,179					
60 Day Space GB	6,004.08	GB				
Log Size	800,100.00	MB				
KB Per New Order	6.53	KB				
8 hr log MB	736,841	MB				
8 hr log GB	719.57	GB				
Space Usage	GB Needed	Disks Measured	GB Priced	Disk Size	Formatted Size	
60 Day Space DB	6,004	530	17,914.00	36GB	33.80	
			0.00			
			0.00			
Total DB			17,914.00			
8-hr log + mirror	1,439	24	1,640.79	72GB	68.37	
OS, Swap	3		0.00			
Total Storage	7,446.22	GB	19,554.79	GB		

MSSQL_cs_fg	MSSQL_misc_fg		
467,298,485	2,251 22,546		
646,480,372	41,361,989 3,240,947 30,448,406 520,065,079 10,004		
1,113,778,856	595,151,222		
files=11 size=13,286,400 Total=146,150,400	11 7,462,400		
8K blocks	1,169,203,200	656,691,200	
OK	OK		

tpmC	240,737									
	Data Before KB	Index Before KB	Data After KB	Index After KB	Data Grow KB	Index Grow KB	Total Grow KB	KB/New-Order	8-Hr Growth KB	8-Hr Growth MB
History	33,635,040	125,696	36,406,872	252,536	2,771,832	126,840	2,898,672	0.0658	7,601,253.06	7,423.10
Order	18,808,168	42,880	23,188,472	85,128	4,380,304	42,248	4,422,552	0.1004	11,597,358.00	11,325.54
Order-Line	377,704,272	889,608	430,762,112	1,780,584	53,057,840	890,976	53,948,816	1.2243	141,471,198.74	138,155.47
										156,904.11
d_next_o_id	sum(*) Before	sum(*) After	Num New-Order							
	576,192,000	620,257,439	44,065,439							
Log	Before MB	After MB	Grow MB					KB/New-Order	8-Hr Growth MB	8-Hr Growth GB
	7,573.56	288,561.61	280,988.05					6.5296	736,841.30	719.57
	800,100	0.94657701	36.065693					6,686.3585 bytes		
Database tpcc log used (%)										

Appendix E: Third Party Quotes

Microsoft Corporation
One Microsoft Way
Redmond, WA 98052-6399

Tel 425 882 8080
Fax 425 936 7329
<http://www.microsoft.com/>



November 3, 2006

Hewlett-Packard Company
Brean Campbell
20555 SH 249
Houston, TX 77070

Mr. Campbell:

Here is the information you requested regarding pricing for several Microsoft products to be used in conjunction with your TPC-C benchmark testing.

All pricing shown is in US Dollars (\$).

Part Number	Description	Unit Price	Quantity	Price
810-03134	SQL Server 2005 Enterprise Edition (x64) <i>Per Processor License</i> <i>Discount Schedule: Open Program – Level C</i> <i>Unit Price reflects a 6% discount from the retail unit price of \$24,999.</i>	\$23,432	2	\$46,864
P72-00274	Windows Server 2003 Enterprise (x64) Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 41% discount from the retail unit price of \$3,999.</i>	\$2,334	1	\$2,334
P73-00295	Windows Server 2003, Standard Edition <i>Server License Only - No CALs</i> <i>Discount Schedule: No Level</i> <i>Unit Price reflects a 28% discount from the retail unit price of \$999.</i>	\$719	8	\$5,752
254-00170	Visual C++ Standard Edition <i>No Discounts Applied</i>	\$109	1	\$109
N/A	Microsoft Problem Resolution Services <i>Professional Support (1 Incident)</i>	\$245	1	\$245

All products are currently orderable through Microsoft's normal distribution channels. A list of these distribution channels can be found at
<http://www.microsoft.com/products/info/render.aspx?type=mnp&content=22%2flicensing&View=22>.

Defect support is included in the purchase price. Additional support is available from Microsoft PSS on an incident by incident basis at \$245 per call.

This quote is valid for the next 90 days.

If we can be of any further assistance, please contact Jamie Reding at (425) 703-0510 or jamiere@microsoft.com.

Reference ID: PCBrCa0618058239.

Please include this Reference ID in any correspondence regarding this price quote.

Search - Microsoft Internet Explorer

Links File Edit View Favorites Tools Help

Back Forward Stop Search Favorites Home Mail Address: http://search.store.yahoo.com/cgi-bin/nsearch?catalog=lanadapters&query=cblc5ENB10&.autodone=http%3A%2F%2Flanadapters.stores.yahoo.net%2Fnsearch.html Go

LanAdapters.com

Search

Search for:

10 foot Category 5E Non Booted Network Patch Cables (Cat 5e)... \$2.22

10 foot Category 5E Non Booted Network Patch Cables
(Cat 5e) (backwards ... WARRANTY (backwards
compatible with cat5) 350 MHZ UL&ETL Verified
D-Link 4 port
SX Fiber Switch
159.99 NEW in box
Layer 2

Home
WE ARE ANTI SPAM
Blacklisted Brands
Cables
Macintosh CLEARANCE
Network Cables & Parts
Cat5 Cat5e Cat6
Print servers
Power
Software
D Link 4 port Fiber Switch
Layer 2 New in box 159.99
Hardware
Housewares And Tools
Networking
Printing Supplies and Cables
SCSI
Storage
Barcode
D-Link 4 port
SX Fiber Switch
159.99 NEW in box
Layer 2

Show Order
Privacy Policy
Info &
Shipping Notes
& Ways to delay
Processing of order
Search
Index
SHOPPING

Appendix F:

Price Verification

Description	Part Number	Order Date	Order Method	Price Verification
HP X2.66GHz/1333MHz, 120W processor kit	433104-B21	2/1/2007	Note 1	Note 2
HP Smart Array P800/512MB SAS Controller	381513-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage	418408-B21	11/22/2006	Note 1	Note 2
HP StorageWorks MSA-60 Storage (10% Spares)	418408-B21	11/22/2006	Note 1	Note 2

Note 1 = HP Direct : 800-203-6748.
Note 2 = These components are not immediately orderable. For price verification before order date: e-mail hp.pricing.desk@hp.com